



Test Report No.: RF200526S010



TEST REPORT

Applicant	Zound Industries International AB
Address	Centralplan 15 SE-111 20 Stockholm Sweden

Manufacturer or Supplier	Zound Industries International AB
Address	Centralplan 15 SE-111 20 Stockholm Sweden
Product	HEADPHONES
Brand Name	Marshall
Model	MAJOR IV
Additional Model & Model Difference	N/A
Date of tests	Jun. 03, 2020 ~ Jul. 09, 2020

the tests have been carried out according to the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Evans He Project Engineer / EMC Department	Approved by David Huang Assistant Manager / EMC Department
<i>Evans He</i>	<i>David Huang</i>

Date: Aug. 04, 2020

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	5
1 SUMMARY OF TEST RESULTS.....	6
2 MEASUREMENT UNCERTAINTY	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF EUT	7
3.2 DESCRIPTION OF TEST MODES	8
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 TEST TYPES AND RESULTS.....	12
4.1. CONDUCTED EMISSION MEASUREMENT	12
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP.....	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS.....	15
4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	17
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT.....	17
4.2.2 TEST INSTRUMENTS.....	18
4.2.3 TEST PROCEDURES	19
4.2.4 DEVIATION FROM TEST STANDARD	20
4.2.5 TEST SETUP.....	20
4.2.6 EUT OPERATING CONDITIONS	21
4.2.7 TEST RESULTS.....	22
4.3 NUMBER OF HOPPING FREQUENCY USED	30
4.3.1 LIMIT OF HOPPING FREQUENCY USED	30
4.3.2 TEST SETUP.....	30
4.3.3 TEST INSTRUMENTS.....	30
4.3.4 TEST PROCEDURES	31
4.3.5 DEVIATION FROM TEST STANDARD	31



4.3.6	TEST RESULTS.....	31
4.4	DWELL TIME ON EACH CHANNEL.....	33
4.4.1	LIMIT OF DWELL TIME USED.....	33
4.4.2	TEST SETUP.....	33
4.4.3	TEST INSTRUMENTS.....	33
4.4.4	TEST PROCEDURES.....	33
4.4.5	DEVIATION FROM TEST STANDARD.....	34
4.4.6	TEST RESULTS.....	34
4.5	CHANNEL BANDWIDTH.....	37
4.5.1	LIMITS OF CHANNEL BANDWIDTH.....	37
4.5.2	TEST SETUP.....	37
4.5.3	TEST INSTRUMENTS.....	37
4.5.4	TEST PROCEDURE.....	37
4.5.5	DEVIATION FROM TEST STANDARD.....	37
4.5.6	EUT OPERATING CONDITION.....	37
4.5.7	TEST RESULTS.....	38
4.6	HOPPING CHANNEL SEPARATION.....	42
4.6.1	LIMIT OF HOPPING CHANNEL SEPARATION.....	42
4.6.2	TEST SETUP.....	42
4.6.3	TEST INSTRUMENTS.....	42
4.6.4	TEST PROCEDURES.....	42
4.6.5	DEVIATION FROM TEST STANDARD.....	42
4.6.6	TEST RESULTS.....	43
4.7	CONDUCTED OUTPUT POWER.....	47
4.7.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT.....	47
4.7.2	TEST SETUP.....	47
4.7.3	TEST INSTRUMENTS.....	47
4.7.4	TEST PROCEDURES.....	47
4.7.5	DEVIATION FROM TEST STANDARD.....	47
4.7.6	EUT OPERATING CONDITION.....	47
4.7.7	TEST RESULTS.....	48
4.8	OUT OF BAND EMISSION MEASUREMENT.....	49
4.8.1	LIMITS OF out of band eMISSION MEASUREMENT.....	49
4.8.2	TEST INSTRUMENTS.....	49
4.8.3	TEST PROCEDURE.....	49
4.8.4	DEVIATION FROM TEST STANDARD.....	49
4.8.5	EUT OPERATING CONDITION.....	49



**BUREAU
VERITAS**

Test Report No.: RF200526S010

4.8.6	TEST RESULTS.....	49
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	56
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	57



Test Report No.: RF200526S010

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF200526S010	Original release	Aug. 04, 2020



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
15.247(a)(1)(iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.
15.247(a)(1)	1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output Power	PASS	Meet the requirement of limit.
15.247(d)& 15.209	Transmitter Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	±2.70dB
Radiated emissions	9KHz ~ 30MHz	±2.16dB
	30MHz ~ 1GMHz	±3.74dB
	1GHz ~ 18GHz	±4.66dB
	18GHz ~ 40GHz	±4.67dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	HEADPHONES
MODEL NO.	MAJOR IV
ADDITIONAL MODEL	N/A
FCC ID	2AAGF-MAJORIV
POWER SUPPLY	DC 3.7V From Li-ion Battery or DC 5V From Adapter or Wireless Charging
MODULATION TECHNOLOGY	FHSS
MODULATION TYPE	GFSK, $\pi/4$ DQPSK, 8DPSK
OPERATING FREQUENCY	2402MHz~2480MHz
NUMBER OF CHANNEL	79
PEAK OUTPUT POWER	3.797mW (Max. Measured)
ANTENNA TYPE	PCB Antenna, 0dBi Gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB Line: Unshielded, Detachable, 1m 3.5mm audio cable, 1.3cm

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 200526S010) for detailed product photo.



3.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X axis for radiated emission.

Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	√	√	Powered by DC 5V

Where RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	39	FHSS	GFSK	DH5

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5



POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	Hopping	FHSS	GFSK	DH5

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RE<1G	25deg. C, 55%RH	DC 5V from USB	Aaron Liang
RE≥1G	25deg. C, 55%RH	DC 5V from USB	Aaron Liang
PLC	25deg. C, 60%RH	DC 5V from USB	Aaron Liang
APCM	20deg. C, 55%RH	DC 5V from USB	Aaron Liang



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. Section 15.247

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit without any other necessary accessory or support units.



4 TEST TYPES AND RESULTS

4.1. CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCS30	8471241027	Mar. 24, 20	Mar. 24, 21
Artificial Mains Network	SCHWARZBECK	8127	8127713	Mar. 24, 20	Mar. 24, 21
ISN	Com-Power	ISN T800	34373	Mar. 24, 20	Mar. 24, 21
Test software	EZ-EMC	ICP-03A1	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

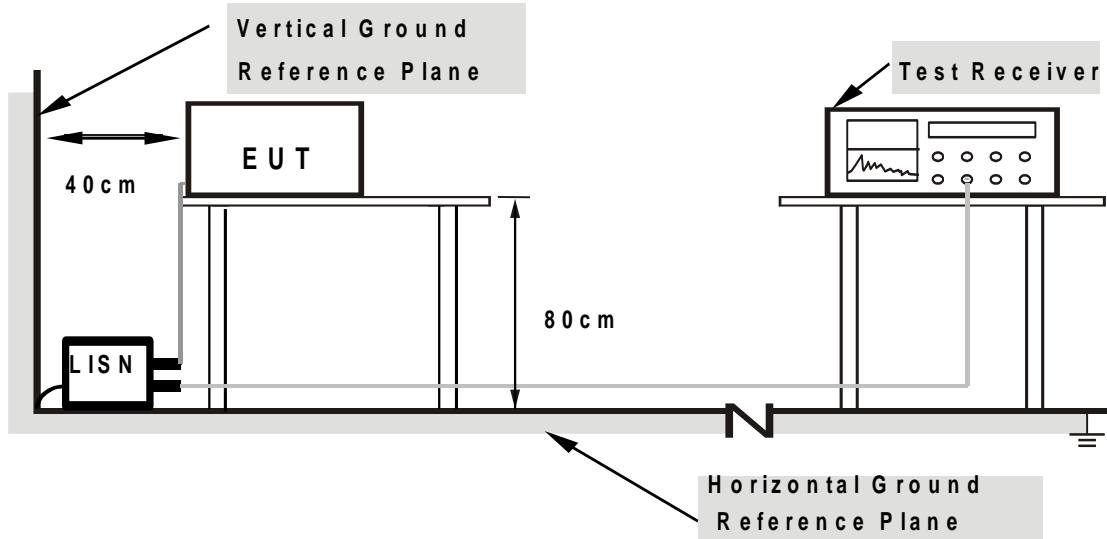

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA:

PHASE	Line	6dB BANDWIDTH	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Reading Value [dB (uV)]	Detector	Corr. Factor (dB)	Result [dB (uV)]	Limit [dB (uV)]	Margin (dB)
1	1.0002	33.25	QP	10.13	43.38	56.00	-12.62
2	1.0002	28.13	AVG	10.13	38.26	46.00	-7.74
3	3.0000	32.86	QP	10.16	43.02	56.00	-12.98
4	3.0000	27.78	AVG	10.16	37.94	46.00	-8.06
5	5.0007	32.71	QP	10.20	42.91	60.00	-17.09
6	5.0007	27.24	AVG	10.20	37.44	50.00	-12.56
7	7.0014	32.24	QP	10.22	42.46	60.00	-17.54
8	7.0014	26.53	AVG	10.22	36.75	50.00	-13.25
9	13.0269	12.09	QP	10.30	22.39	60.00	-37.61
10	13.0269	3.19	AVG	10.30	13.49	50.00	-36.51
11	17.0010	37.39	QP	10.36	47.75	60.00	-12.25
12	17.0010	27.94	AVG	10.36	38.30	50.00	-11.70

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

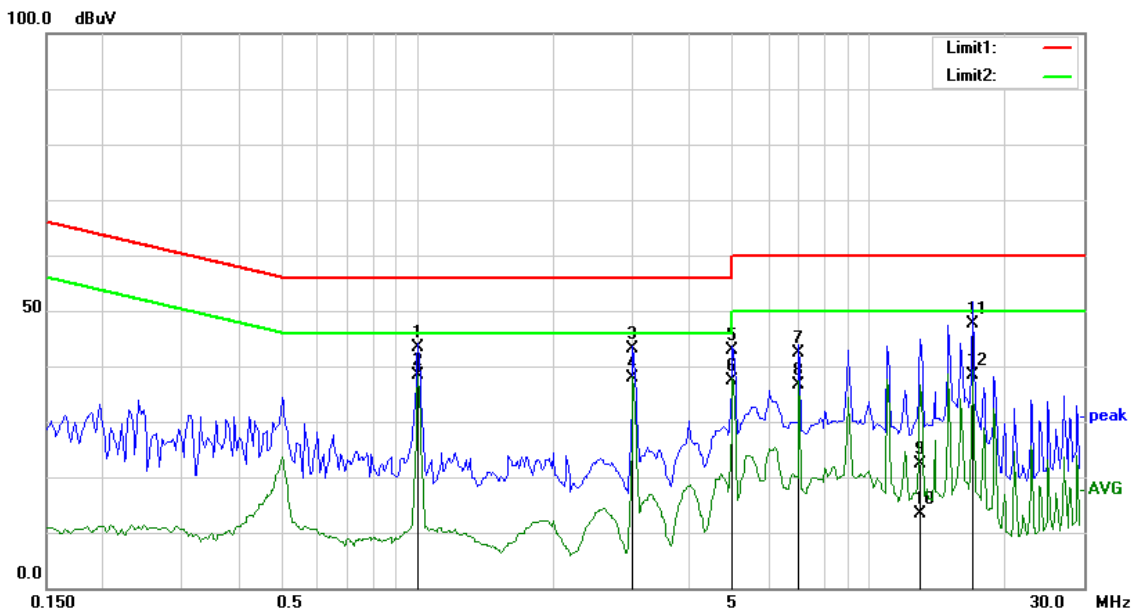




PHASE	Neutral	6dB BANDWIDTH	9kHz
-------	---------	---------------	------

No	Freq. [MHz]	Reading Value [dB (uV)]	Detector	Corr. Factor (dB)	Result [dB (uV)]	Limit [dB (uV)]	Margin (dB)
1	1.0002	32.21	QP	10.15	42.36	56.00	-13.64
2	1.0002	25.31	AVG	10.15	35.46	46.00	-10.54
3	3.0000	31.49	QP	10.18	41.67	56.00	-14.33
4	3.0000	25.22	AVG	10.18	35.40	46.00	-10.60
5	5.0007	30.55	QP	10.21	40.76	60.00	-19.24
6	5.0007	25.47	AVG	10.21	35.68	50.00	-14.32
7	6.9975	28.29	QP	10.23	38.52	60.00	-21.48
8	6.9975	23.44	AVG	10.23	33.67	50.00	-16.33
9	18.9978	34.59	QP	10.36	44.95	60.00	-15.05
10	18.9978	25.02	AVG	10.36	35.38	50.00	-14.62
11	23.9976	34.53	QP	10.45	44.98	60.00	-15.02
12	23.9976	24.05	AVG	10.45	34.50	50.00	-15.50

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

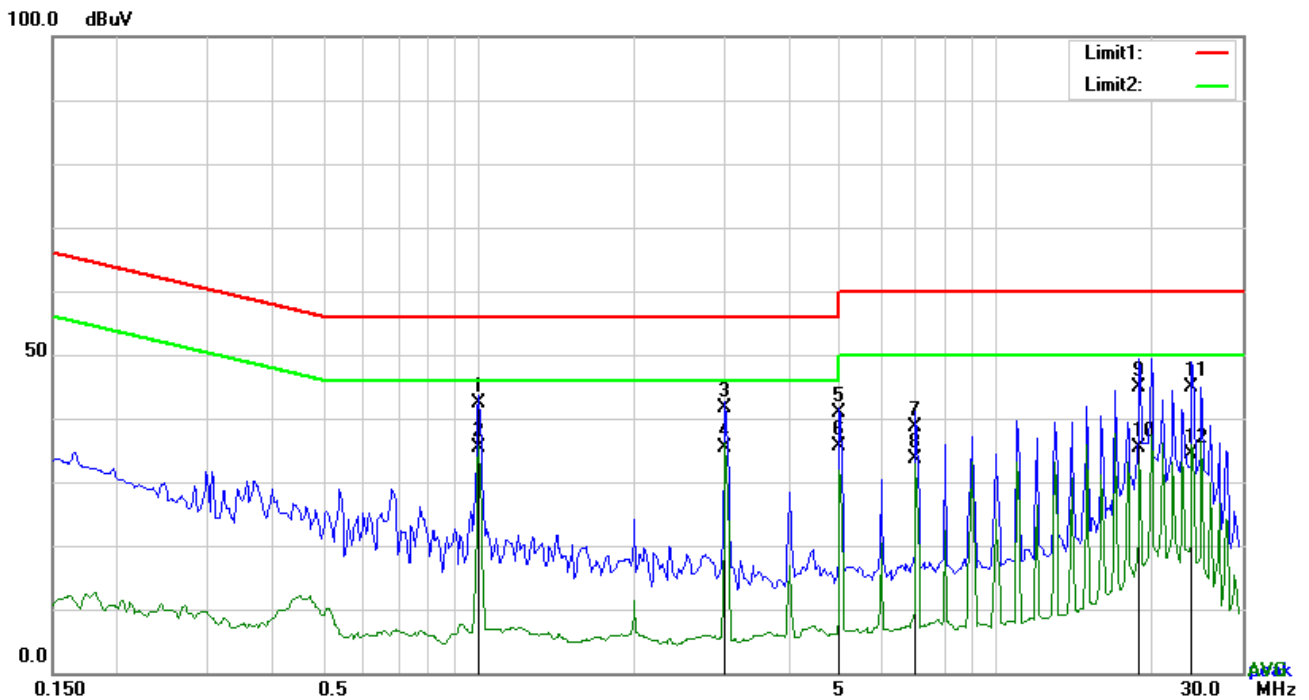

4.2. RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESL6	1300.5001K06 -100262-eQ	Mar. 24, 20	Mar. 24, 21
Bilog Antenna	Sunol Sciences	JB6	A110712	Apr. 08, 20	Apr. 07, 21
Active Antenna	CMO-POWER	AL-130	121031	Mar. 27, 20	Mar. 26, 21
Signal Amplifier	HP	8447E	443008	Mar. 24, 20	Mar. 24, 21
3m Semi-anechoic Chamber	SAEMC	9m*6m*6m	N/A	Oct. 18, 18	Oct. 17, 21
Test Software	EZ-EMC	ICP-03A1	N/A	N/A	N/A
Spectrum	Agilent	E4446A	MY46180622	May 08, 20	May 07, 21
MXA signal analyzer	Agilent	N9020A	MY49100060	Mar. 24, 20	Mar. 24, 21
Horn Antenna	COM-POWER	HAH-118	71259	Apr. 17, 20	Apr. 17, 21
Horn Antenna	COM-POWER	HAH-118	71283	Mar. 20, 20	Mar. 19, 21
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170147	Jun. 30, 20	Jun. 29, 21
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170242	Jun. 30, 20	Jun. 29, 21
AMPLIFIER	EM Electornic Corporation	EM01G26G	60613	Mar. 24, 20	Mar. 24, 21
AMPLIFIER	Emc Instruments Corporation	Emc012645	980077	Jan. 04, 20	Jan. 03, 21
3m Semi-anechoic Chamber	SAEMC	9m*6m*6m	N/A	Oct. 18, 18	Oct. 17, 21
Test Software	EZ-EMC	ICP-03A1	N/A	N/A	N/A

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 535293.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.




4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

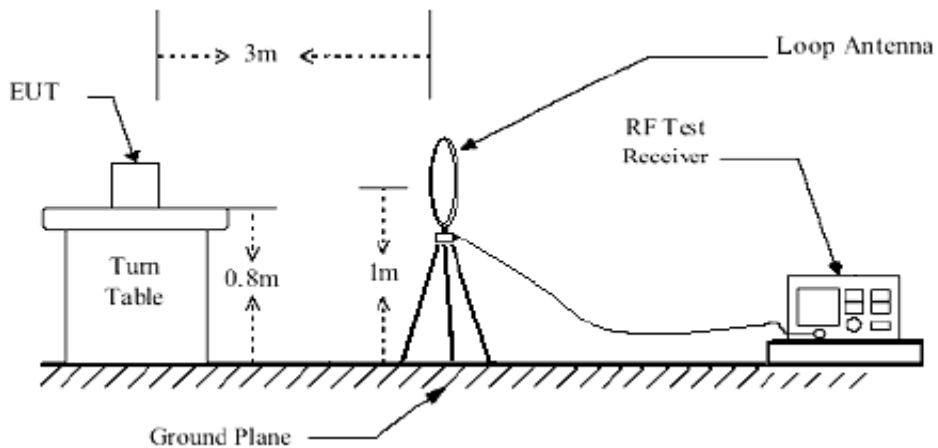


Below 1GHz test setup

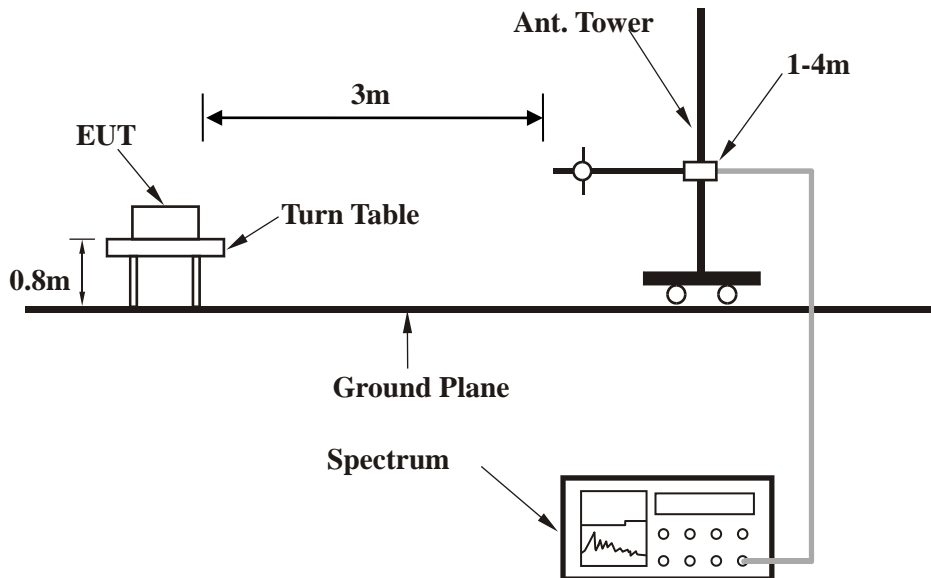

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

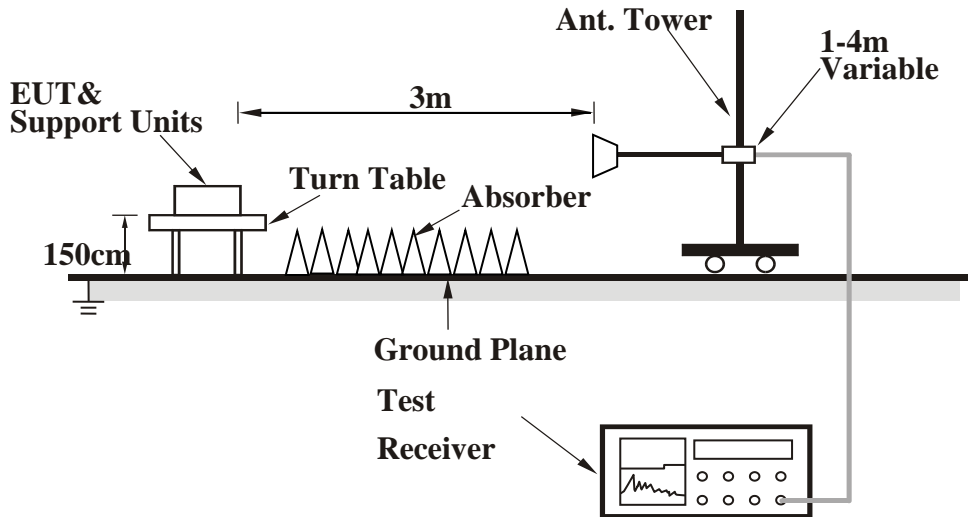

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


GFSK DH5

CHANNEL	Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
NO.	Freq. (MHz)	Reading (dBuV/m)	Ant-F (dB/m)	PA-G (dB)	Cab-L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	58.8185	44.62	7.17	22.41	0.26	29.64	40.00	-10.36	100	247
2	99.5281	30.42	8.65	22.32	0.82	17.57	43.50	-25.93	200	261
3	135.9822	30.64	11.35	22.40	1.16	20.75	43.50	-22.75	100	35
4	229.2931	42.16	11.49	22.33	1.59	32.91	46.00	-13.09	100	296
5	300.3673	32.46	13.71	22.29	1.72	25.60	46.00	-20.40	100	251
6	550.9480	36.81	19.33	21.69	2.27	36.72	46.00	-9.28	100	121

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

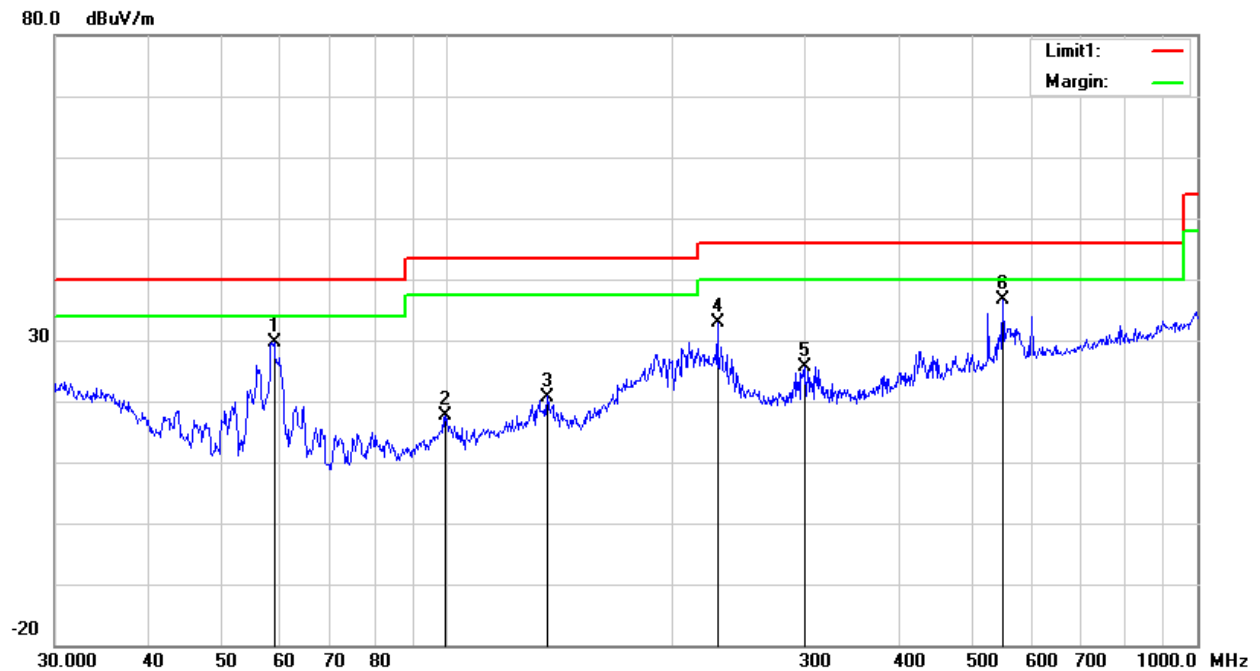




CHANNEL	Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
NO.	Freq. (MHz)	Reading (dBuV/m)	Ant-F (dB/m)	PA-G (dB)	Cab-L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	58.4074	48.46	7.20	22.41	0.26	33.51	40.00	-6.49	100	146
2	229.2931	39.16	11.49	22.33	1.59	29.91	46.00	-16.09	100	149
3	299.3158	30.63	13.68	22.29	1.72	23.74	46.00	-22.26	200	148
4	426.5210	30.34	16.91	21.96	1.97	27.26	46.00	-18.74	100	304
5	526.3967	29.96	19.21	21.75	2.20	29.62	46.00	-16.38	100	86
6	887.6099	26.37	23.35	20.91	2.64	31.45	46.00	-14.55	200	248

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value

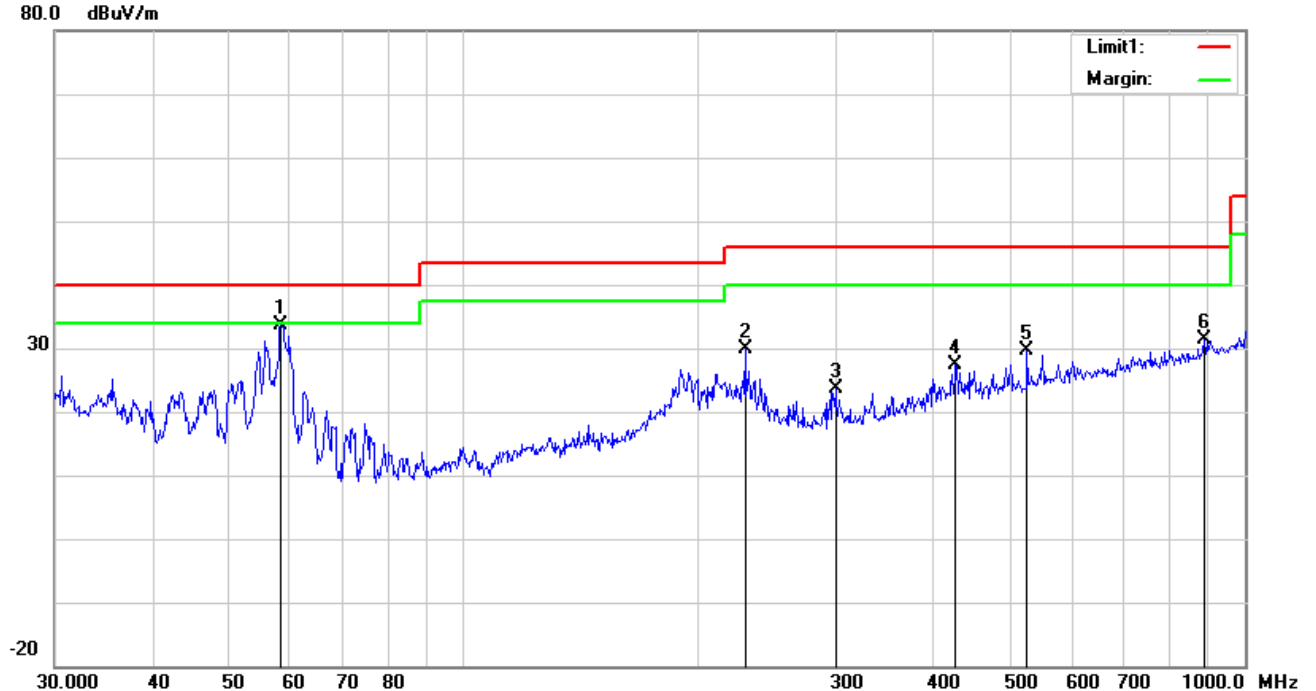



ABOVE 1GHZ DATA

BT_GFSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.63 PK	74.00	-26.37	295	32	59.32	-11.69
2	2390.00	25.13 AV	54.00	-28.87	295	32	36.82	-11.69
3	*2402.00	99.30 PK			218	139	111.04	-11.74
4	*2402.00	76.80 AV			121	139	88.54	-11.74
5	4804.00	51.01 PK	74.00	-22.99	360	291	57.69	-6.68
6	4804.00	28.51 AV	54.00	-25.49	197	291	35.19	-6.68
7	#7206.00	57.89 PK	74.00	-16.11	378	205	58.41	-0.52
8	#7206.00	35.39 AV	54.00	-18.61	231	205	35.91	-0.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	49.89 PK	74.00	-24.11	160	161	61.58	-11.69
2	2390.00	27.39 AV	54.00	-26.61	160	161	39.08	-11.69
3	*2402.00	103.26 PK			131	122	115.00	-11.74
4	*2402.00	80.76 AV			320	122	92.50	-11.74
5	4804.00	53.77 PK	74.00	-20.23	144	170	60.45	-6.68
6	4804.00	31.27 AV	54.00	-22.73	214	170	37.95	-6.68
7	#7206.00	57.37 PK	74.00	-16.63	185	289	57.89	-0.52
8	#7206.00	34.87 AV	54.00	-19.13	271	289	35.39	-0.52

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	101.39 PK			176	234	113.23	-11.84
2	*2441.00	78.89 AV			176	234	90.73	-11.84
3	4882.00	52.58 PK	74.00	-21.42	339	325	58.59	-6.01
4	4882.00	30.08 AV	54.00	-23.92	339	325	36.09	-6.01
5	#7323.00	56.14 PK	74.00	-17.86	252	234	56.48	-0.34
6	#7323.00	33.64 AV	54.00	-20.36	252	234	33.98	-0.34
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	100.93 PK			114	178	112.77	-11.84
2	*2441.00	78.43 AV			114	178	90.27	-11.84
3	4882.00	54.21 PK	74.00	-19.79	309	355	60.22	-6.01
4	4882.00	31.71 AV	54.00	-22.29	309	355	37.72	-6.01
5	#7323.00	56.39 PK	74.00	-17.61	378	151	56.73	-0.34
6	#7323.00	33.89 AV	54.00	-20.11	378	151	34.23	-0.34

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2483.50	51.87 PK	74.00	-22.13	152	322	63.72	-11.85
2	*2483.50	29.37 AV	54.00	-24.63	152	322	41.22	-11.85
3	2480.00	101.90 PK			361	9	113.84	-11.94
4	2480.00	79.40 AV			361	9	91.34	-11.94
5	4960.00	52.97 PK	74.00	-21.03	381	9	58.41	-5.44
6	4960.00	30.47 AV	54.00	-23.53	381	9	35.91	-5.44
7	#7440.00	56.92 PK	74.00	-17.08	136	17	56.96	-0.04
8	#7440.00	34.42 AV	54.00	-19.58	136	17	34.46	-0.04
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2483.50	49.65 PK	74.00	-24.35	320	103	61.50	-11.85
2	*2483.50	27.15 AV	54.00	-26.85	320	103	39.00	-11.85
3	2480.00	98.73 PK			351	251	110.67	-11.94
4	2480.00	76.23 AV			351	251	88.17	-11.94
5	4960.00	51.91 PK	74.00	-22.09	326	267	57.35	-5.44
6	4960.00	29.41 AV	54.00	-24.59	326	267	34.85	-5.44
7	#7440.00	57.02 PK	74.00	-16.98	212	261	57.06	-0.04
8	#7440.00	34.52 AV	54.00	-19.48	212	261	34.56	-0.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



BT_8DPSK

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	46.46 PK	74.00	-27.54	394	14	58.15	-11.69
2	2390.00	23.96 AV	54.00	-30.04	394	14	35.65	-11.69
3	*2402.00	100.52 PK			191	357	112.26	-11.74
4	*2402.00	78.02 AV			162	357	89.76	-11.74
5	4804.00	51.67 PK	74.00	-22.33	237	98	58.35	-6.68
6	4804.00	29.17 AV	54.00	-24.83	328	98	35.85	-6.68
7	#7206.00	56.37 PK	74.00	-17.63	240	217	56.89	-0.52
8	#7206.00	33.87 AV	54.00	-20.13	395	217	34.39	-0.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.11 PK	74.00	-26.89	281	30	58.8	-11.69
2	2390.00	24.61 AV	54.00	-29.39	281	30	36.3	-11.69
3	*2402.00	104.61 PK			227	183	116.35	-11.74
4	*2402.00	82.11 AV			374	183	93.85	-11.74
5	4804.00	52.67 PK	74.00	-21.33	212	40	59.35	-6.68
6	4804.00	30.17 AV	54.00	-23.83	315	40	36.85	-6.68
7	#7206.00	57.16 PK	74.00	-16.84	177	76	57.68	-0.52
8	#7206.00	34.66 AV	54.00	-19.34	223	76	35.18	-0.52

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	103.09 PK			303	62	114.93	-11.84
2	*2441.00	80.59 AV			303	62	92.43	-11.84
3	4882.00	50.99 PK	74.00	-23.01	318	249	57	-6.01
4	4882.00	28.49 AV	54.00	-25.51	318	249	34.5	-6.01
5	7323.00	56.31 PK	74.00	-17.69	168	338	56.65	-0.34
6	7323.00	33.81 AV	54.00	-20.19	168	338	34.15	-0.34
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2441.00	102.64 PK			245	144	114.48	-11.84
2	*2441.00	80.14 AV			245	144	91.98	-11.84
3	4882.00	51.20 PK	74.00	-22.80	280	245	57.21	-6.01
4	4882.00	28.70 AV	54.00	-25.30	280	245	34.71	-6.01
5	7323.00	56.01 PK	74.00	-17.99	179	82	56.35	-0.34
6	7323.00	33.51 AV	54.00	-20.49	179	82	33.85	-0.34

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2483.50	57.68 PK	74.00	-16.32	252	45	69.53	-11.85
2	*2483.50	35.18 AV	54.00	-18.82	252	45	47.03	-11.85
3	2480.00	104.06 PK			328	5	116	-11.94
4	2480.00	81.56 AV			328	5	93.5	-11.94
5	4960.00	51.81 PK	74.00	-22.19	179	276	57.25	-5.44
6	4960.00	29.31 AV	54.00	-24.69	179	276	34.75	-5.44
7	7440.00	56.53 PK	74.00	-17.47	241	32	56.57	-0.04
8	7440.00	34.03 AV	54.00	-19.97	241	32	34.07	-0.04

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2483.50	54.95 PK	74.00	-19.05	358	105	66.80	-11.85
2	*2483.50	32.45 AV	54.00	-21.55	358	105	44.30	-11.85
3	2480.00	101.30 PK			174	300	113.24	-11.94
4	2480.00	78.80 AV			174	300	90.74	-11.94
5	4960.00	52.58 PK	74.00	-21.42	314	124	58.02	-5.44
6	4960.00	30.08 AV	54.00	-23.92	314	124	35.52	-5.44
7	7440.00	57.12 PK	74.00	-16.88	239	127	57.16	-0.04
8	7440.00	34.62 AV	54.00	-19.38	239	127	34.66	-0.04

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.




4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST SETUP

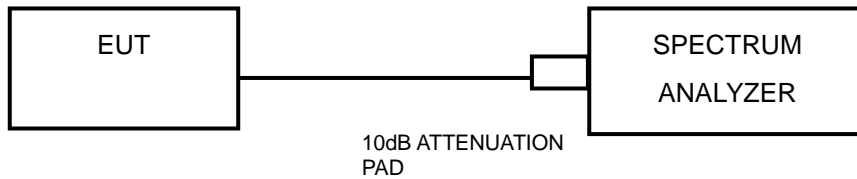

4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 18, 19	Dec. 17, 20
MXA VEXTOR SIGNAL	Agilent	n5182a	MY50140530	Mar. 24, 20	Mar. 24, 21
MXA signal analyzer	Agilent	n9020a	MY49100060	Mar. 24, 20	Mar. 24, 21
RF Control Unit	Tonscend	JS0806-2	188060112	Mar. 24, 20	Mar. 24, 21
Signal Generation	Agilent	E4421B	US40051152	Dec. 18, 19	Dec. 17, 20
DC Power Supply	Agilent	E3640A	MY40004013	Mar. 30, 20	Mar. 30, 21
Programmable Temperature & Humidity Chamber	Hongjin	HYC-TH-225 DH	DG-180746	Mar. 24, 20	Mar. 24, 21
Test System	Tonscend	JS 1120-3	N/A	N/A	N/A
Power Splitter	Weinschel	1580-1	TL177	Mar. 27, 20	Mar. 27, 21

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were completed.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.




BUREAU VERITAS

Test Report No.: RF200526S010

GFSK



8DPSK

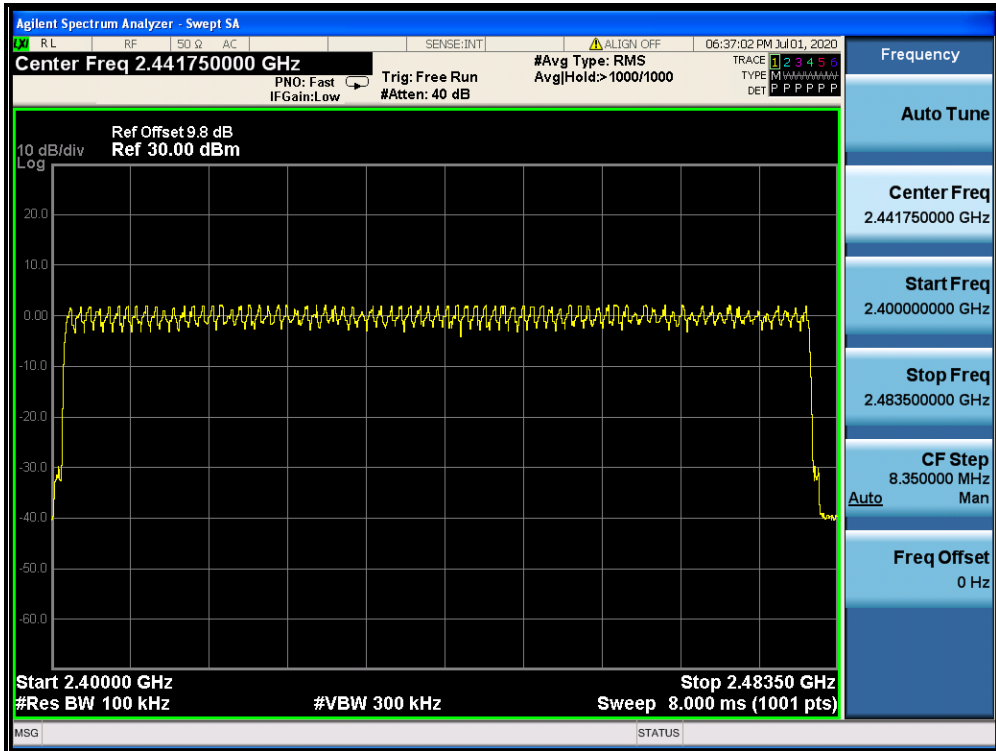

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.


Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com

4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST SETUP

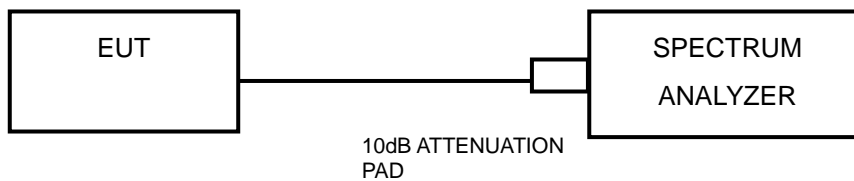

4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 TEST RESULTS

GFSK


Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
DH1	79	31.6	3.16	32	320	0.394	126.08	400	PASS
DH3	79	31.6	3.16	15	150	1.643	246.45	400	PASS
DH5	79	31.6	3.16	10	100	2.890	289.00	400	PASS

8DPSK


Mode	Number of Hopping Channel	Number of transmission in a period(channel number*0.4 sec)				Length of transmission time (msec)	Result (msec)	Limit (msec)	PASS / FAIL
		period (sec)	sweep time (sec)	times in a sweep	times in a period				
3DH1	79	31.6	3.16	32	320	0.397	127.04	400	PASS
3DH3	79	31.6	3.16	16	160	1.647	263.52	400	PASS
3DH5	79	31.6	3.16	11	110	2.890	317.90	400	PASS

NOTE: Test plots of the transmitting time slot are shown on next page.

GFSK

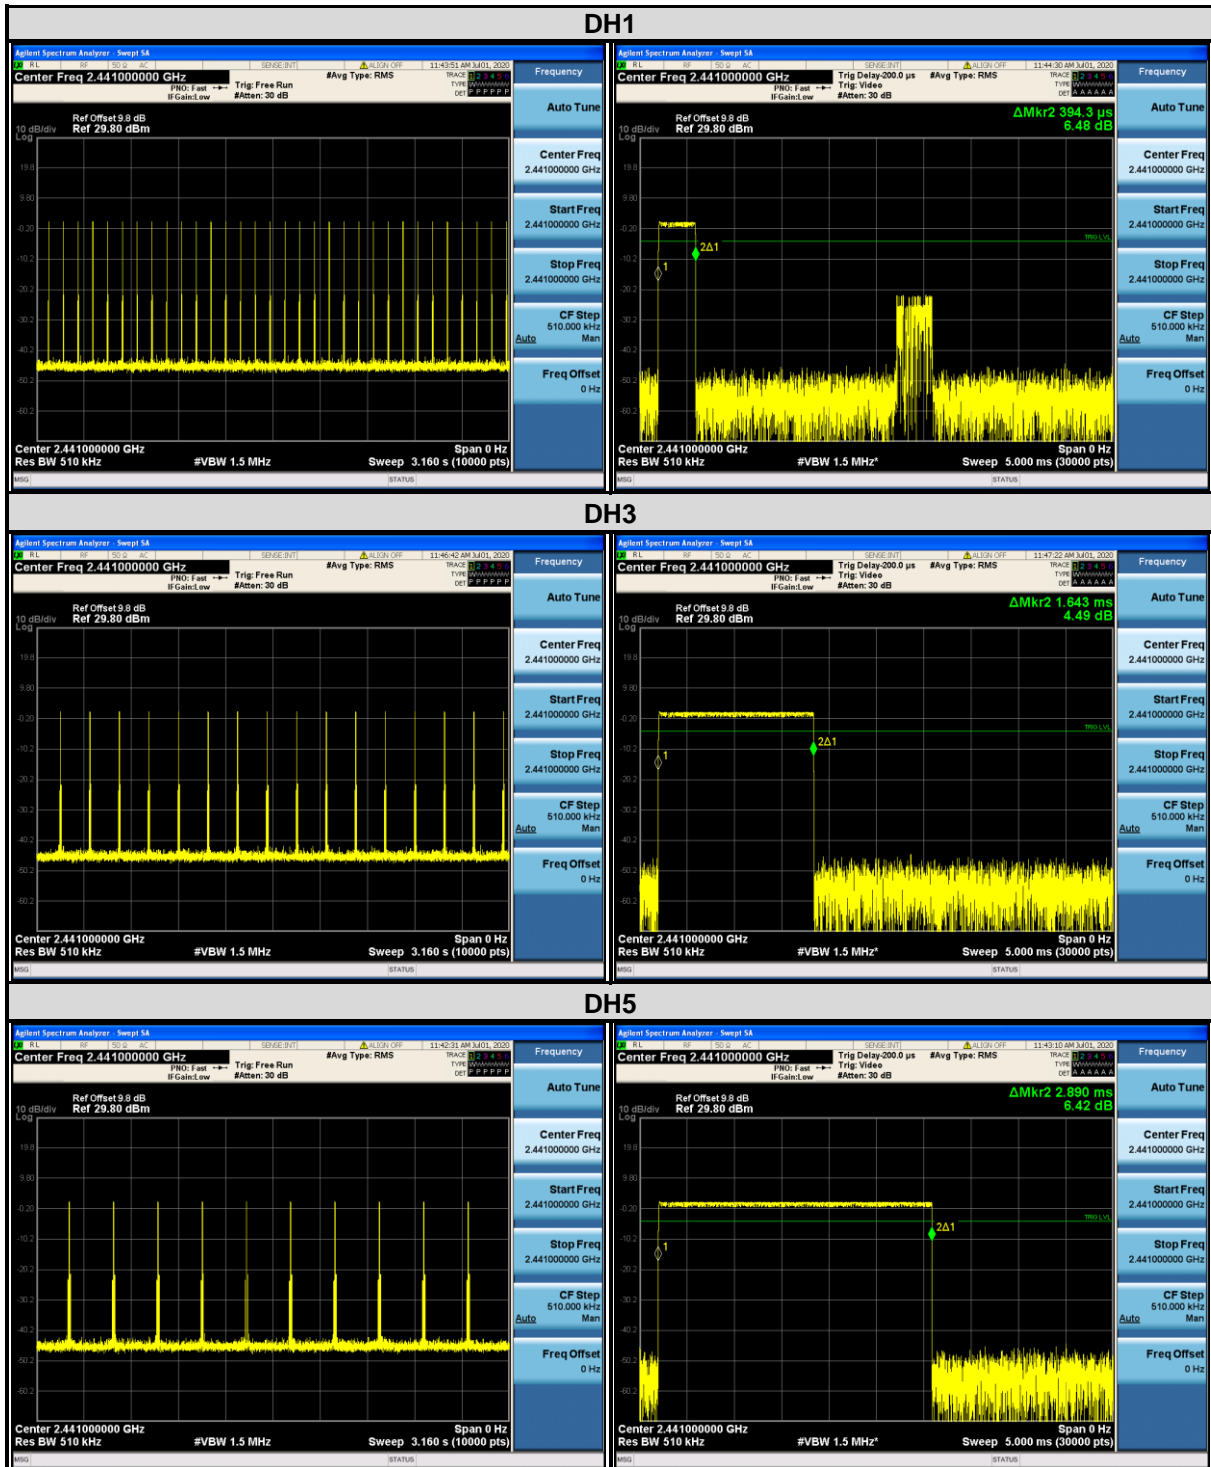

8DPSK

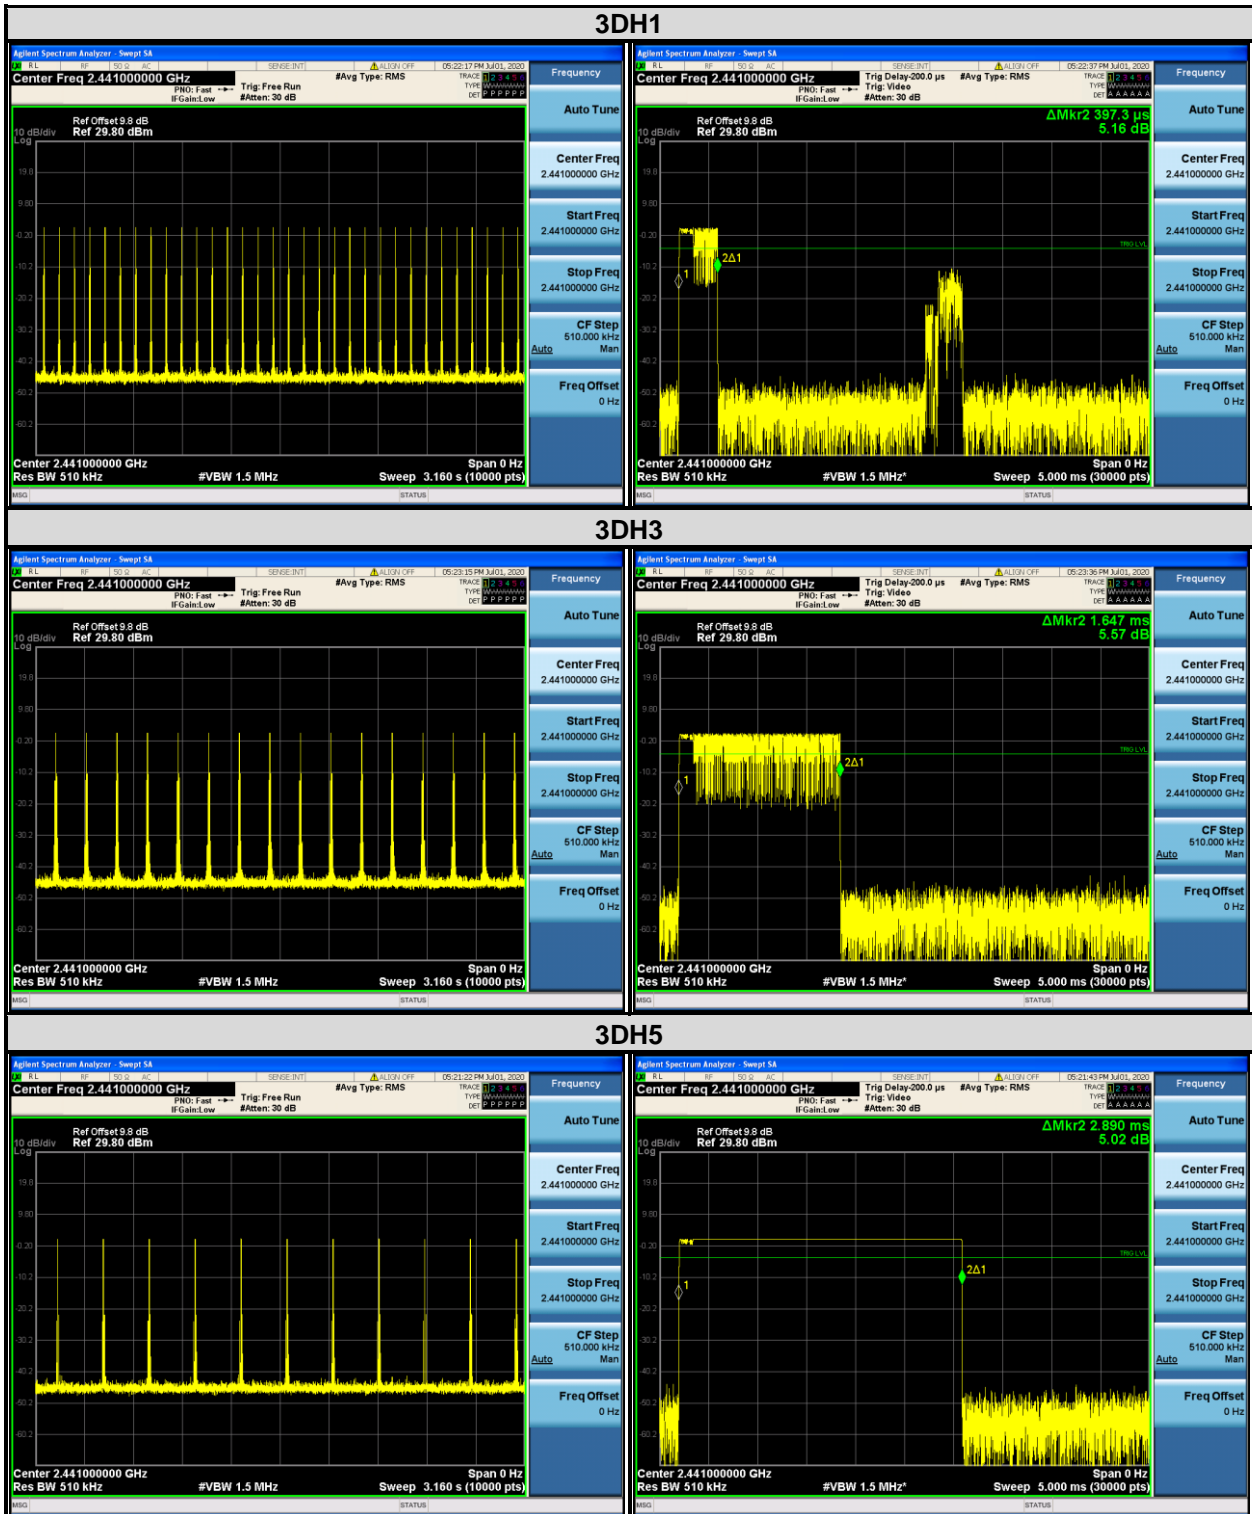




4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

4.5.2 TEST SETUP

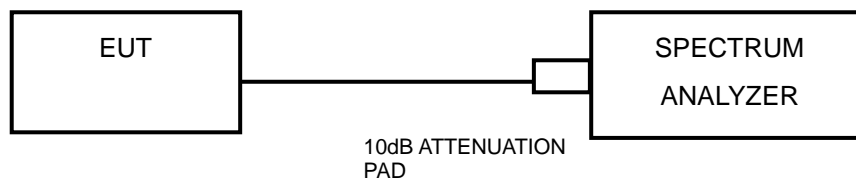

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



**BUREAU
VERITAS**

Test Report No.: RF200526S010

4.5.7 TEST RESULTS

GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	0.942
39	2441	0.942
78	2480	0.945

CH 0



Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com

8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)
0	2402	1.341
39	2441	1.338
78	2480	1.341

CH 0





Test Report No.: RF200526S010

CH 39



CH 78



Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com




4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST SETUP

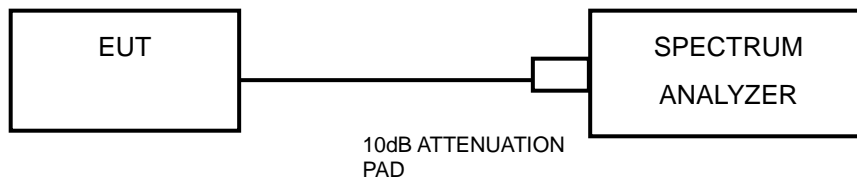

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.




4.6.6 TEST RESULTS

GFSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.002	0.942	0.942	PASS
39	2441	1.002	0.942	0.942	PASS
78	2480	1.002	0.945	0.945	PASS

CH 0

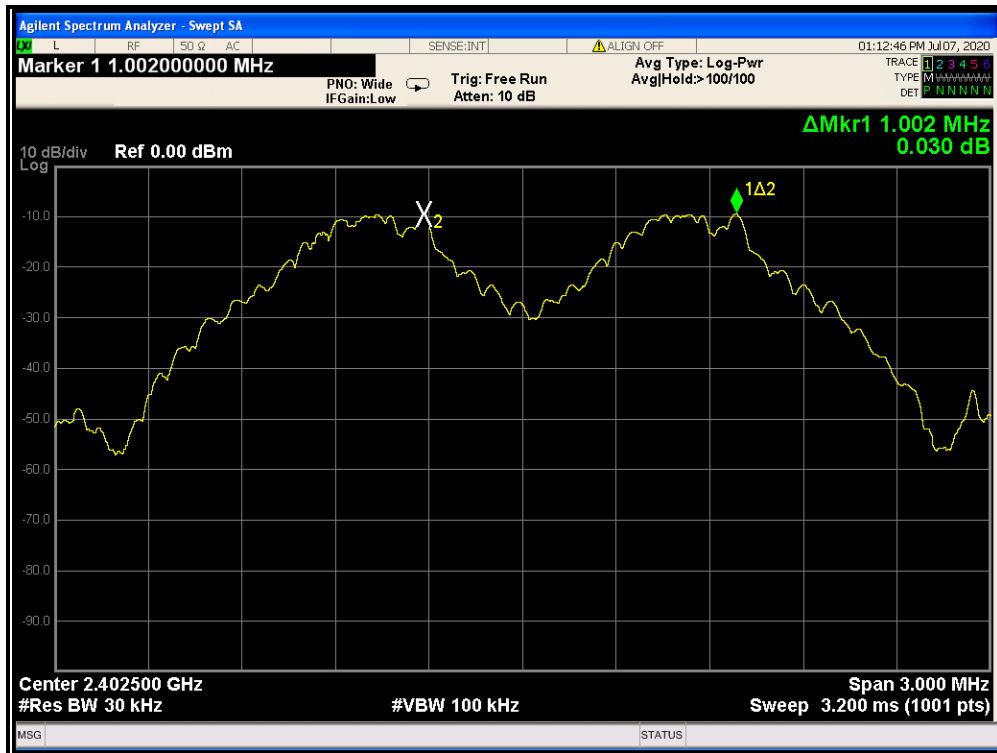



BUREAU VERITAS

Test Report No.: RF200526S010

CH 39



CH 78



Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com

8DPSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.002	1.341	0.89	PASS
39	2441	1.002	1.338	0.89	PASS
78	2480	1.002	1.341	0.89	PASS

NOTE: The minimum limit is two-third 20dB bandwidth.

CH 0



CH 39



CH 78






4.7 CONDUCTED OUTPUT POWER

4.7.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

4.7.2 TEST SETUP

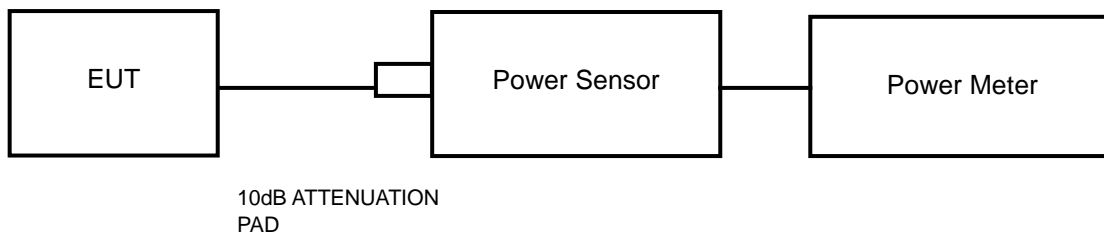

4.7.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.7.5 DEVIATION FROM TEST STANDARD

No deviation.

4.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.7.7 TEST RESULTS

MAXIMUM PEAK OUTPUT POWER

GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	1.962	1.571	1000	PASS
39	2441	2.497	1.777	1000	PASS
78	2480	2.877	1.940	1000	PASS

8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (mW)	PASS/FAIL
0	2402	4.584	2.873	125	PASS
39	2441	5.251	3.350	125	PASS
78	2480	5.794	3.797	125	PASS

AVERAGE OUTPUT POWER(FOR REFERENCE)

GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	1.70	1.479
39	2441	2.06	1.607
78	2480	2.13	1.633

8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)
0	2402	1.56	1.432
39	2441	1.99	1.581
78	2480	2.05	1.603

4.8 OUT OF BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.


4.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.8.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.


GFSK

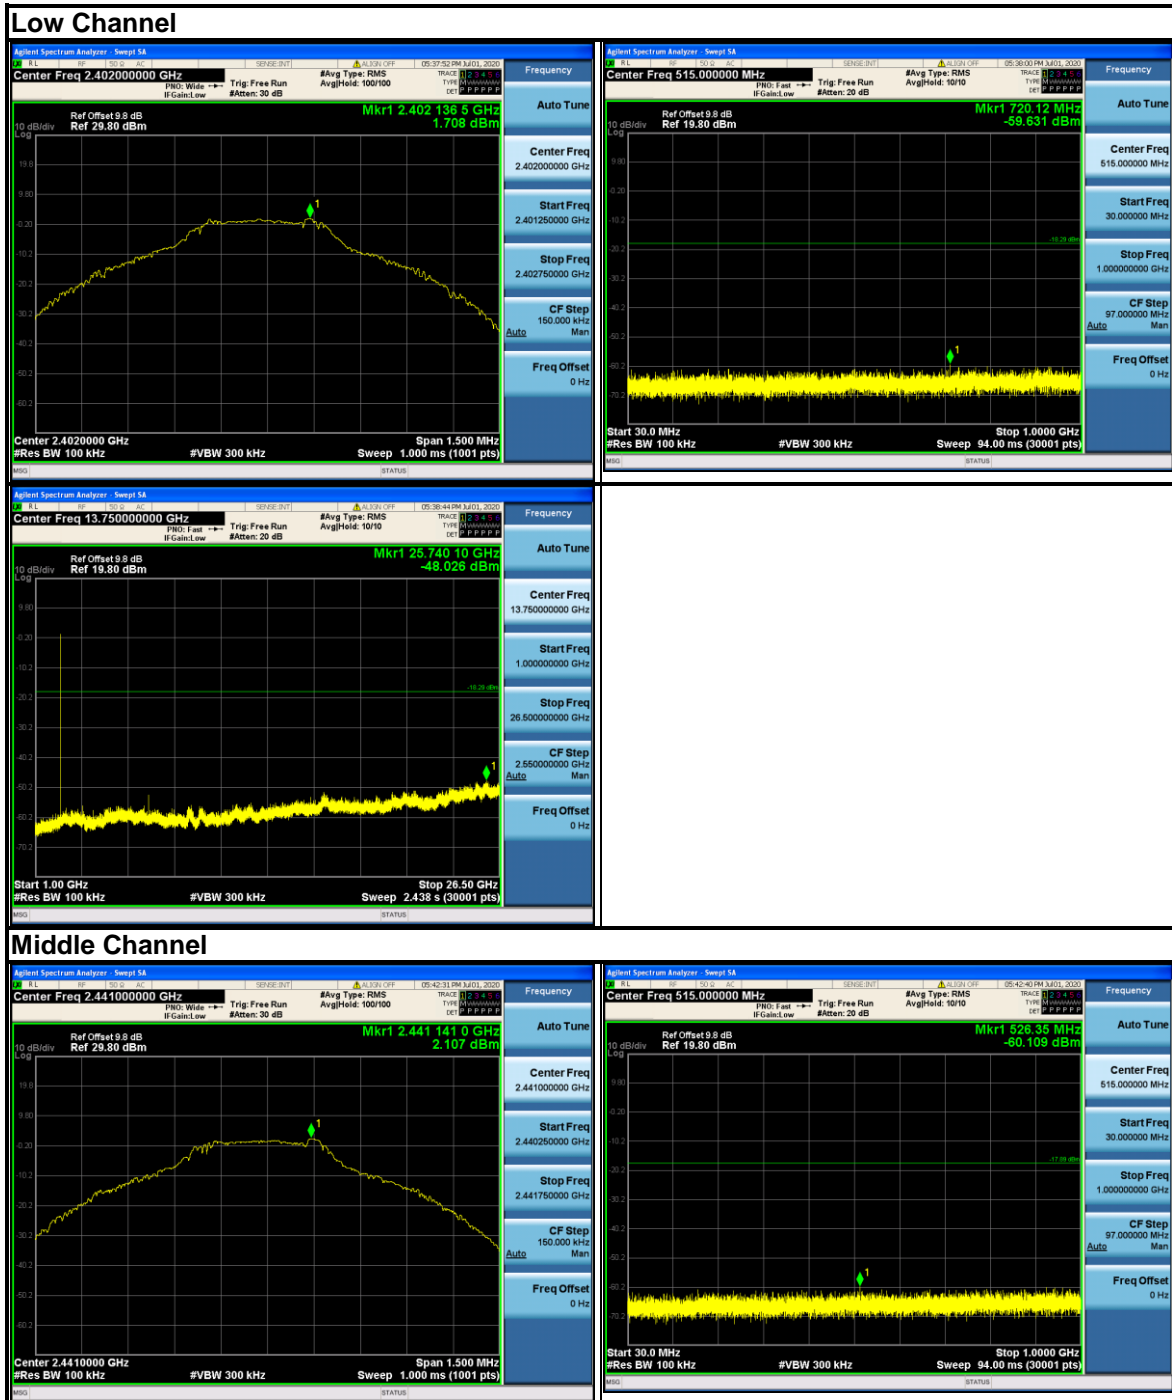





BUREAU VERITAS

Test Report No.: RF200526S010

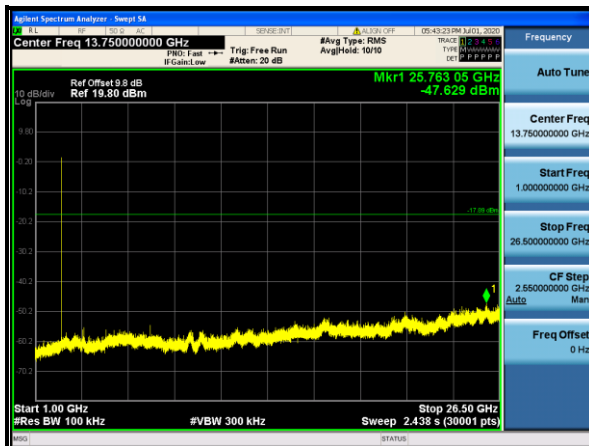

High Channel

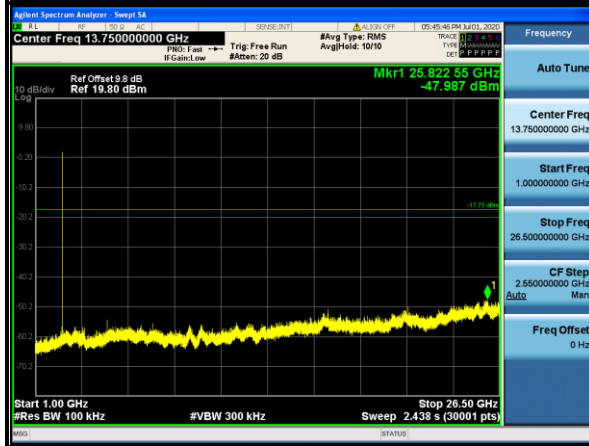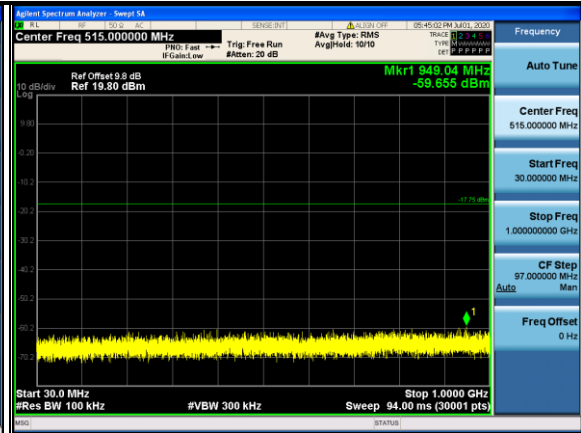

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.


Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com



BUREAU VERITAS

Test Report No.: RF200526S010

8DPSK

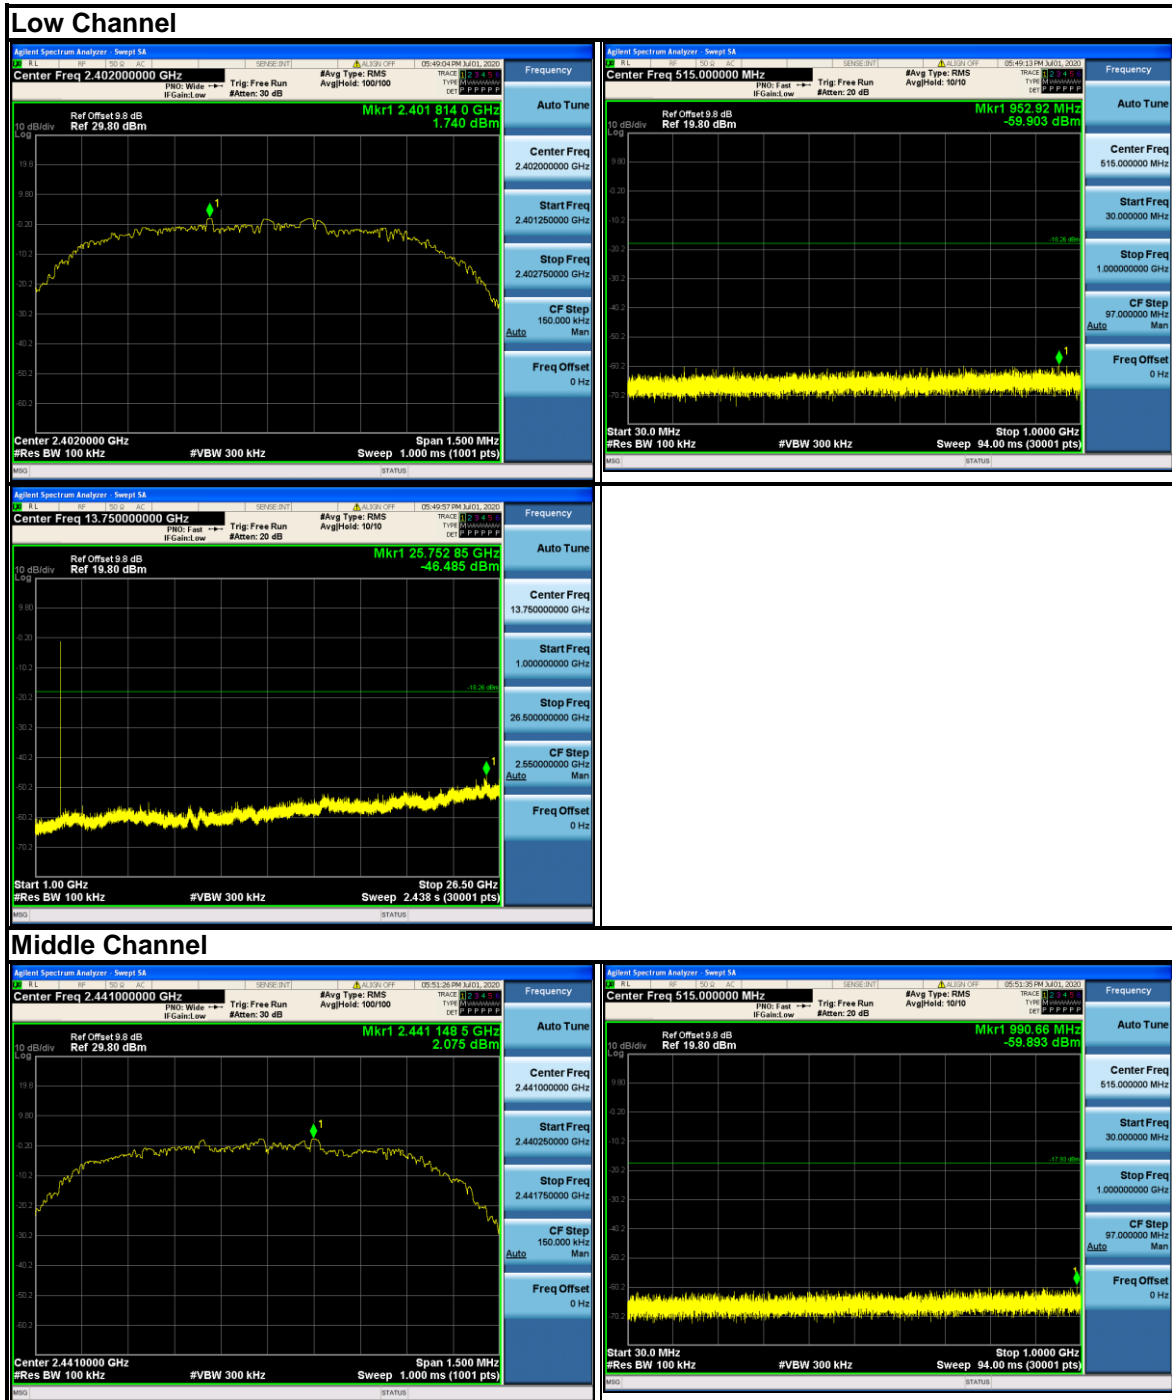

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.


Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com





BUREAU VERITAS

Test Report No.: RF200526S010

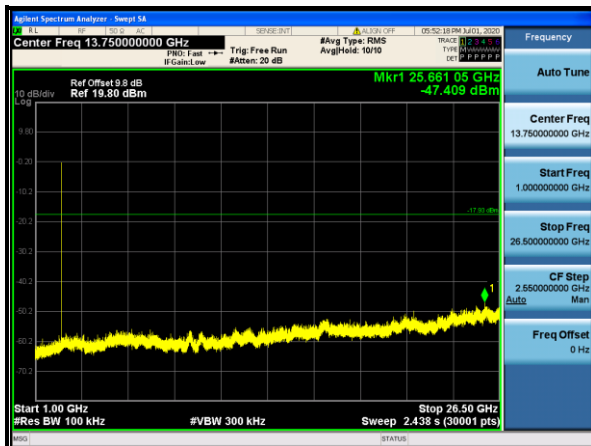

Parameter	Value
Auto Tune	Auto Tune
Center Freq	13.750000000 GHz
Start Freq	1.000000000 GHz
Stop Freq	26.500000000 GHz
CF Step	2.550000000 GHz Auto Man
Freq Offset	0 Hz

High Channel

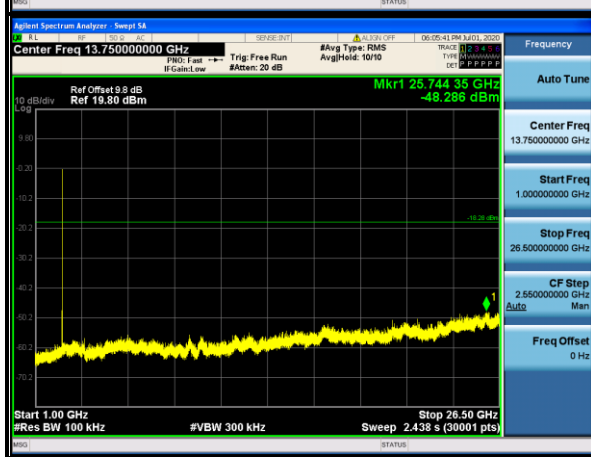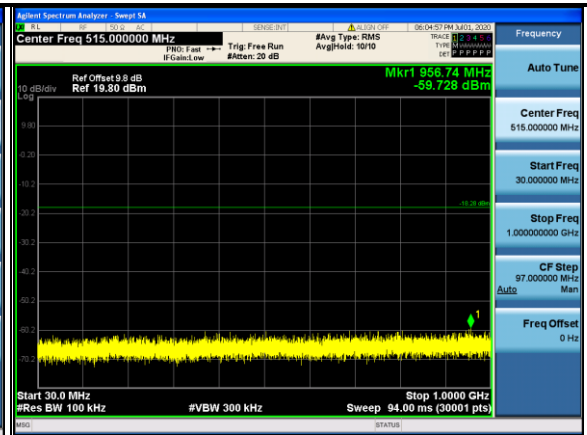

Parameter	Value
Auto Tune	Auto Tune
Center Freq	13.750000000 GHz
Start Freq	1.000000000 GHz
Stop Freq	26.500000000 GHz
CF Step	2.550000000 GHz Auto Man
Freq Offset	0 Hz


Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com




GFSK

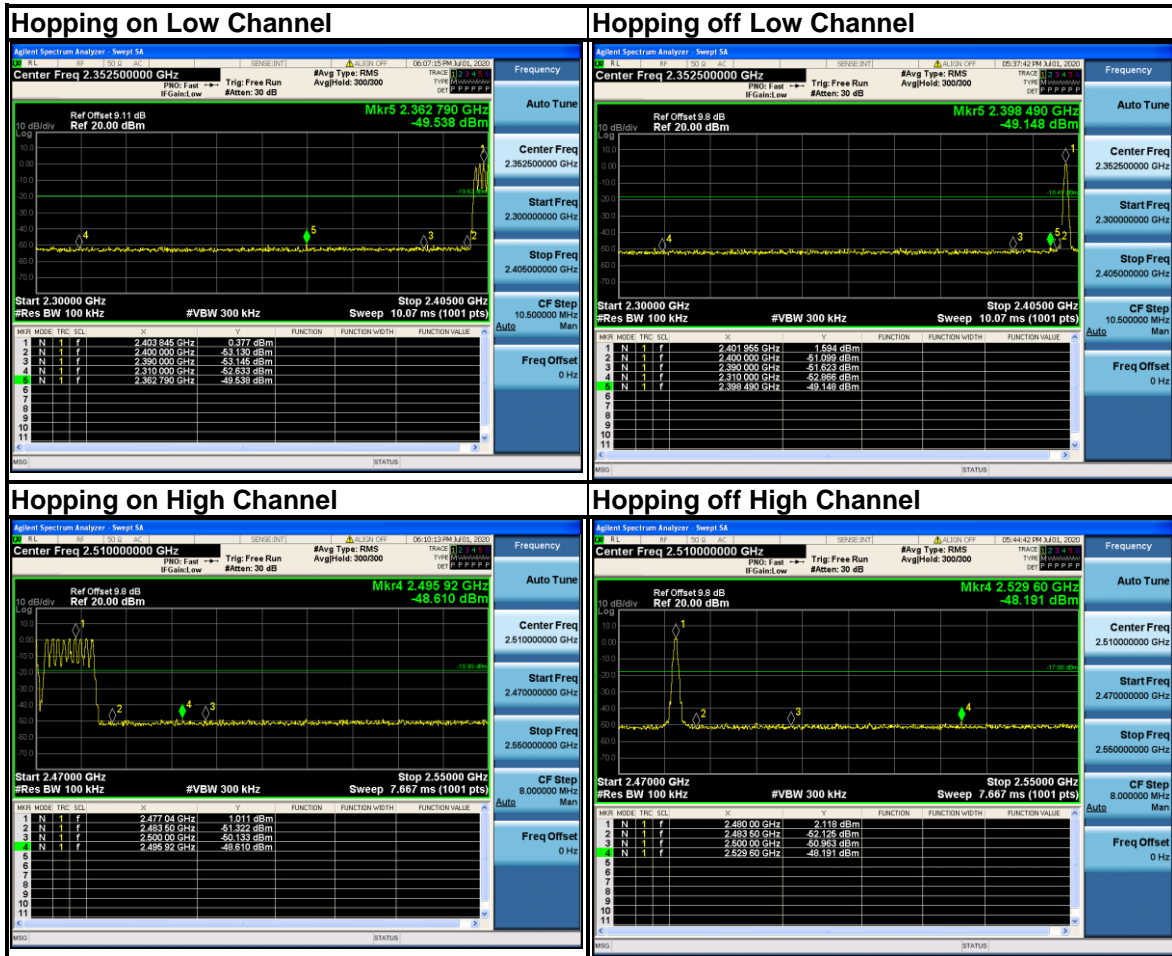



8DPSK

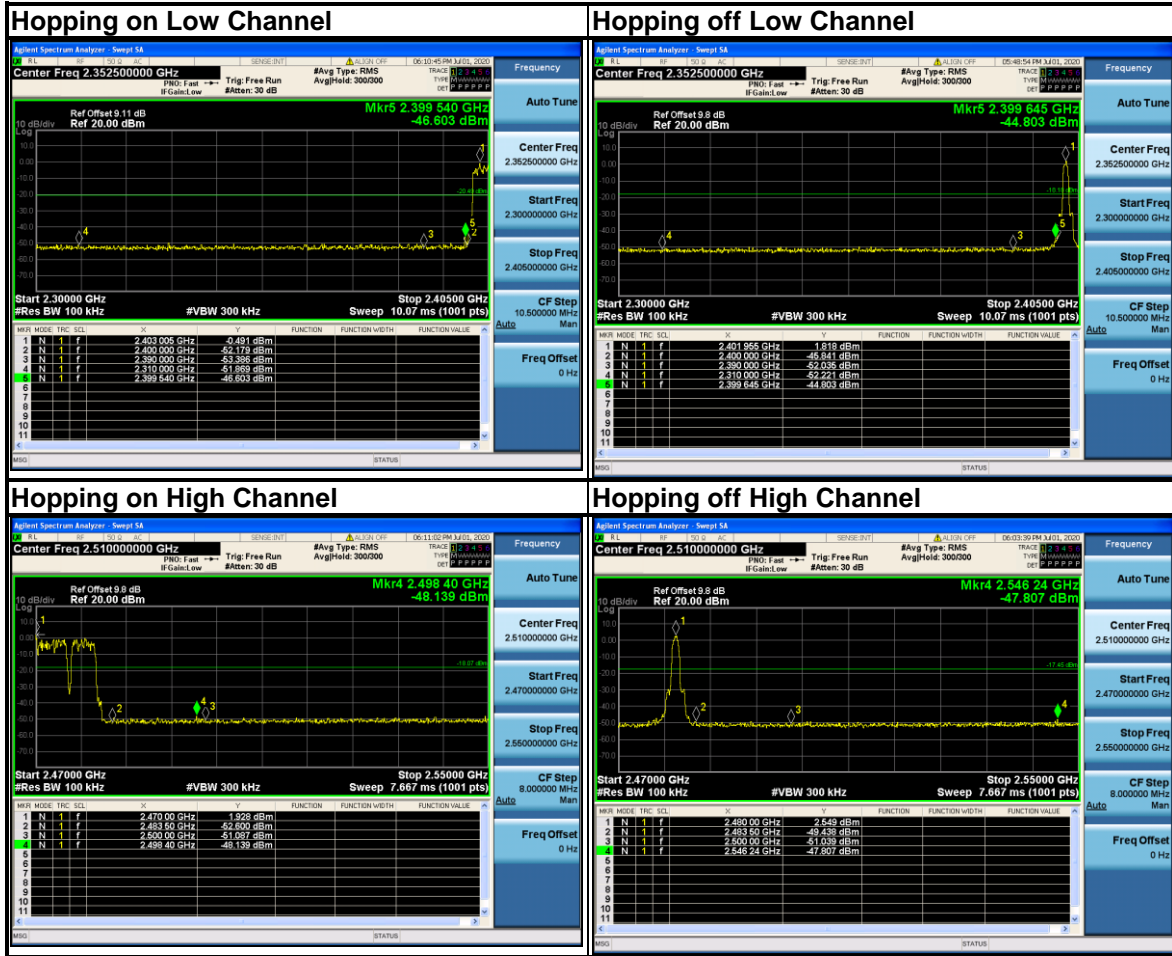



**BUREAU
VERITAS**

Test Report No.: RF200526S010

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF200526S010

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---