

FCC Part 15, Subpart C Test Report

FCC ID: 2AAGF-MOTIFII

Applicant: Zound Industries International AB

Address: Centralplan 15 SE-111 20 Stockholm Sweden

Manufacturer: Zound Industries International AB

Address: Centralplan 15 SE-111 20 Stockholm Sweden

Product: True Wireless Headphones

Brand: Marshall

Test Model(s): MOTIF II A.N.C.

Series Model(s): N/A

Test Date: Dec. 27, 2022 ~ Jan. 16, 2023

Issued Date: Apr. 26, 2023

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.

Address: No.101, Bld. N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town,
Dongguan, China


Test Firm Registration No.: 915896

Designation No.: CN1255

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by



Nature Lee

Reviewed by :



Andy Yeh

Approved by :



Scott He



"This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. Our report includes all the tests requested by you and the results thereof based upon the information that you provided to us. The report would be invalid without specific stamp of test institute and the signatures of tester and approver."

Lab: [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#)Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park,
HuangJiang Town, Dongguan, China](#)Tel: [0769-83078199](tel:0769-83078199)Web: www.hwa-hsing.comE-Mail: customerservice.dg@hwa-hsing.comRelease
Ver. 1.5

Table of Contents

Release Control Record	4
1. Summary of Test Results	5
1.1 Measurement Uncertainty	5
1.2 Modification Record	5
2. General Information	6
2.1 General Description of EUT	6
2.2 Description of Test Channels	7
2.3 Test Mode Applicability and Tested Channel Detail	7
2.4 Description of Support Units	9
2.5 Configuration of System under Test	9
2.6 Duty Cycle of Test Signal	9
3. Test Types and Results	11
3.1 Radiated Emission and Band-edge Measurement	11
3.1.1 Limits of radiated emission and band-edge measurement	11
3.1.2 Test Instruments	12
3.1.3 Test Procedures	13
3.1.4 Deviation from Test Standard	14
3.1.5 Test Setup	15
3.1.6 EUT Operating Conditions	16
3.1.7 Test Results	17
3.2 6dB Bandwidth Measurement	31
3.2.1 Limits of 6dB Bandwidth Measurement	31
3.2.2 Test Setup	31
3.2.3 Test Instruments	31
3.2.4 Test Procedure	32
3.2.5 Deviation from Test Standard	32
3.2.6 EUT Operating Conditions	32
3.2.7 Test Result	33
3.3 Occupied Bandwidth Measurement	35
3.3.1 Test Setup	35
3.3.2 Test Instruments	35
3.3.3 Test Procedure	35
3.3.4 Deviation from Test Standard	35
3.3.5 EUT Operating Conditions	35
3.3.6 Test Results	36
3.4 Conducted Output Power Measurement	38
3.4.1 Limits of Conducted Output Power Measurement	38
3.4.2 Test Setup	38
3.4.3 Test Instruments	38
3.4.4 Test Procedures	38
3.4.5 Deviation from Test Standard	39
3.4.6 EUT Operating Conditions	39
3.4.7 Test Results	40
3.5 Power Spectral Density Measurement	46
3.5.1 Limits of Power Spectral Density Measurement	46
3.5.2 Test Setup	46
3.5.3 Test Instruments	46
3.5.4 Test Procedure	47
3.5.5 Deviation from Test Standard	47
3.5.6 EUT Operating Condition	47
3.5.7 Test Results	48
3.6 Conducted Out of Band Emission Measurement	50

3.6.1 Limits of Conducted Out of Band Emission Measurement..... 50
3.6.2 Test Setup 50
3.6.3 Test Instruments 50
3.6.4 Test Procedure 51
3.6.5 Deviation from Test Standard..... 51
3.6.6 EUT Operating Condition 51
3.6.7 Test results 52
4. Pictures of Test Arrangements 56
5. Test Instruments..... 57
Appendix – Information on The Testing Laboratories 58

Release Control Record

Issue No.	Description	Date Issued
220309EL05-RF-US-02	Original Release	Apr. 26, 2023

1. Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247) KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013			
Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used. The device is professionally installed

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC).
The test report has been issued separately.

1.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The listed uncertainties are the worst cases uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expended Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9KHz ~ 30MHz	2.16 dB
	30MHz ~ 1000MHz	3.47 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.84 dB
	18GHz ~ 40GHz	4.67 dB

1.2 Modification Record

There were no modifications required for compliance.

2. General Information

2.1 General Description of EUT

Product	True Wireless Headphones
Test Model(s)	MOTIF II A.N.C.
Sample No.	HS221219-01-01
Series Model(s)	N/A
Status of EUT	Engineering Prototype
Power Supply Rating	Charge case: Input: DC 5V from USB or DC 3.8V from battery or Powered by Wireless Charger Each Headphone: Input: 5V from Charge case or DC 3.85V from battery
Modulation Type	GFSK for DTS
Transfer Rate	1 Mbps, 2Mbps
Operating Frequency	1M: 2402 ~ 2480MHz 2M: 2404 ~ 2478MHz
Number of Channel	40
Maximum Output Power	L: 9.302dBm (Peak) R: 8.973dBm (Peak)
Antenna Type	FPC Antenna
Antenna Gain	L: -1.26dBi R: -2.13dBi
Antenna Connector	N/A
Accessory Device	N/A

Note:

1. Please refer to the EUT photo document (Reference No.: 220309EL05-01&-02) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.
3. There are only some differences in design due to the difference between the left and right ear. The RF characteristics and parameters are the same. Both in-ear headphones are tested on all items, and the report only shows the worst data.

2.2 Description of Test Channels

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2400	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2462	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note: BLE 2M does not open channels 0, 12, and 39.

2.3 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable test items	X-Axis	Y-Axis	Z-Axis	Voltage Supply
Radiated	AC Power Conducted Emission	N/A	N/A	N/A	DC 3.85V from battery
Radiated	Radiated Emissions	√	√	√	
Antenna Port Conducted Measurement	Band Edge Measurement	N/A	N/A	N/A	
	Antenna Port Emission	N/A	N/A	N/A	
	6dB Bandwidth	N/A	N/A	N/A	
	Occupied Bandwidth Measurement	N/A	N/A	N/A	
	Conducted power	N/A	N/A	N/A	
	Power Spectral Density	N/A	N/A	N/A	

- *: The EUT had been pre-tested on the positioned of each 3 Axis. The worst case was found when positioned on **Z-plane**.
- "N/A" means no effect.

Test Condition:

Applicable test items	Environmental Conditions	Test Date	Tested by
Radiated Emissions	21.5deg. C, 54%RH	2023-01-09	Jim Xu
Antenna Port Conducted Measurement	20.1deg. C, 50%RH	2023-01-13	Dragon Long

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Radiated Emission Test (Above 1GHz):

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	1 to 38	1, 19, 38	GFSK	2
-	0 to 39	0, 19, 39	GFSK	1

Radiated Emission Test (Below 1GHz):

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	1 to 38	19	GFSK	2
-	0 to 39	19	GFSK	1

Power Line Conducted Emission Test:

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	1 to 38	38	GFSK	2
-	0 to 39	39	GFSK	1

Antenna Port Conducted Measurement:

*This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	1 to 38	0, 19, 39	GFSK	2
-	0 to 39	0, 19, 39	GFSK	1

2.4 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	DELL	Latitude 5300	N/A	N/A

Insert Cable Connections to/from EUT provided by test team.


No.	Signal Cable Description of The Above Support Units
1.	USB serial cable Un-shielding 1.2m

2.5 Configuration of System under Test

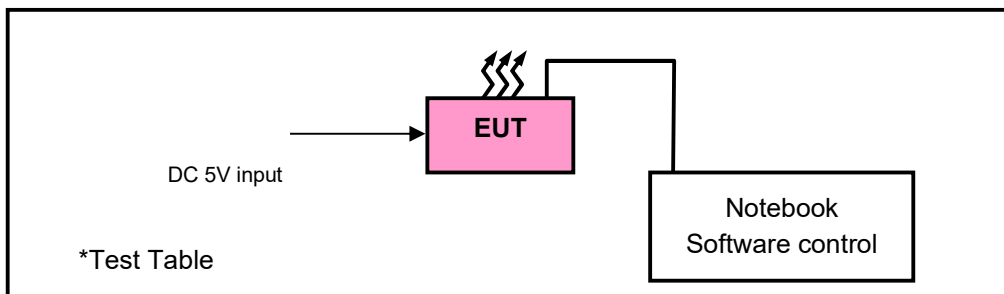


2.6 Duty Cycle of Test Signal

Test Mode	Channel	Duty Cycle [%]
GFSK-1MHz	2402	84.80
	2440	84.80
	2480	84.80

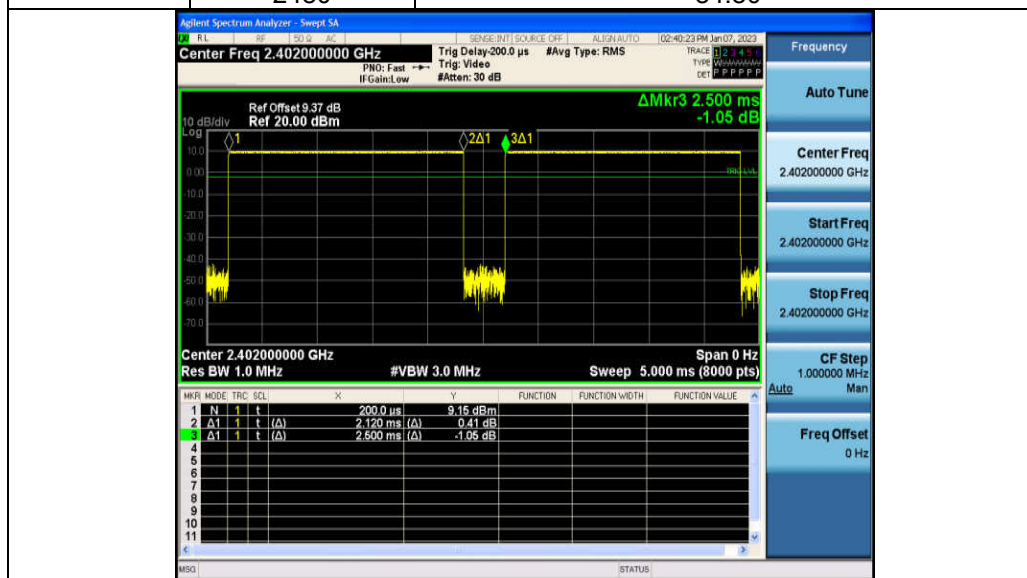

Test Mode	Channel	Duty Cycle [%]
GFSK-2MHz	2404	42.80
	2440	42.80
	2478	42.80

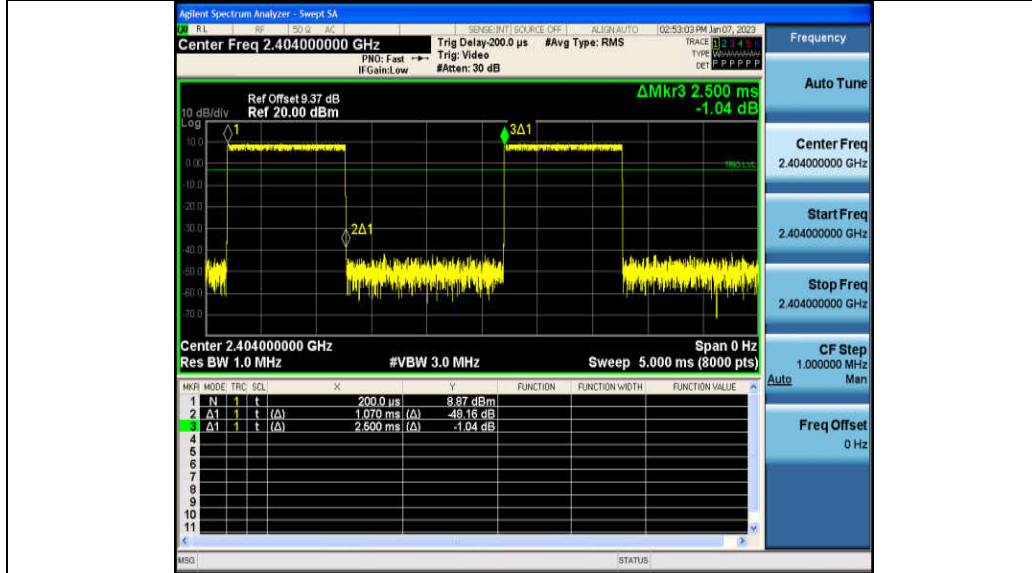

3. Test Types and Results

3.1 Radiated Emission and Band-edge Measurement

3.1.1 Limits of radiated emission and band-edge measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

* DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.
* DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.1.2 Test Instruments

Radiated emission below 30MHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	100962	2023-12-27
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Test software	FARAD	FARAD	EZ EMCV1.1.4.2	N/A
Loop Antenna	EMCI	HLA 6121	45745	2023-04-15*
Pre-Amplifier	EMCI	EMC 184045SE	980201	2023-04-15
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range below 1GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	100962	2023-12-27
Broadband antenna	Schwarzbeck	VULB 9168	00937	2023-09-12*
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Signal Amplifier	Com-power	PAM-103	18020051	2023-08-25
Attenuator	Rohde&Schwarz	TS2GA-6dB	18101101	N/A
Test software	FARAD	FARAD	EZ EMCV1.1.4.2	N/A

Frequency Range 1-18GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Horn Antenna	Schwarzbeck	BBHA 9170	974	2023-05-05
Broadband Coaxial Preamplifier	Schwarzbeck	PAM-118A	1804003	2023-08-25
Spectrum	Keysight	N9020A	MY51240612	2023-08-25
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range 18-40GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2023-04-15*
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2023-12-27
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170242	2023-04-10*
Pre-Amplifier	EMCI	EMC 184045	980102	2023-12-27
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months or 24 months (*).

2. The test was performed in 966.

3.1.3 Test Procedures

a. Peak emission levels are measured by setting the instrument as follow:

1) RBW & VBW setting as a function of frequency:

Frequency	RBW	VBW
9kHz~150kHz	200Hz	600Hz
0.15MHz~30MHz	9kHz	30kHz
30MHz~1000MHz	120kHz	300kHz
>1000MHz	1MHz	3MHz

- 2) Detector = peak.
- 3) Sweep time = auto.
- 4) Trace mode = max hold.
- 5) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

Note: If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement

b. Average emission levels are measured by setting the instrument as follow:

● **Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

- 1) RBW=1 MHz (unless otherwise specified).
- 2) VBW $\geq 3 *RBW$.
- 3) Detector =RMS
- 4) Sweep time = auto.
- 5) Perform a trace average of at least 100 traces.

● **Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction**

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less than $\pm 2\%$), then the following procedure shall be used

- 1) The EUT shall be configured to operate at the maximum achievable duty cycle.
- 2) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- 3) RBW=1 MHz (unless otherwise specified).
- 4) VBW $\geq 3 *RBW$.
- 5) Detector =RMS
- 6) Sweep time = auto.
- 7) Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

*If power averaging (rms) mode was used in step 5), then the applicable correction factor is $[10 \log (1/ D)]$, where D is the duty cycle.

**If linear voltage averaging mode was used in step f), then the applicable correction factor is $[20 \log (1/D)]$, where D is the duty cycle.

***If a specific emission is demonstrated to be continuous ($D > 98\%$) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that

● Reduced VBW Averaging across ON and OFF times of the EUT transmissions with max hold

If continuous transmission of the EUT ($D > 98\%$) cannot be achieved and the duty cycle is not constant (duty cycle variations exceed $\pm 2\%$), then the following procedure shall be used:

- 1) RBW = 1 MHz.
 - 2) VBW $\geq 1/T$.
 - 3) Detector = peak
 - 4) Sweep time = auto.
 - 5) Trace mode = max hold.
 - 6) Allow max hold to run for at least $[50 \times (1/D)]$ traces
- c. The EUT was placed on the top of a rotating table 0.8 meters (below 1GHz) / 1.5 meters (1-18GHz) / 1.5 meters (18-40GHz) above the reference ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The EUT was set 3 meters away from the interference-receiving antenna (Below 1GHz) & (Above 1-18GHz), which was mounted on the top of a variable-height antenna tower. The EUT was set 1 meters away from the interference-receiving antenna (18-40GHz).
- e. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- h. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth = 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth = $1/T$ for Average (Duty cycle $< 98\%$) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is = 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.

3.1.4 Deviation from Test Standard


No deviation.

3.1.5 Test Setup


Radiated emission below 30MHz:

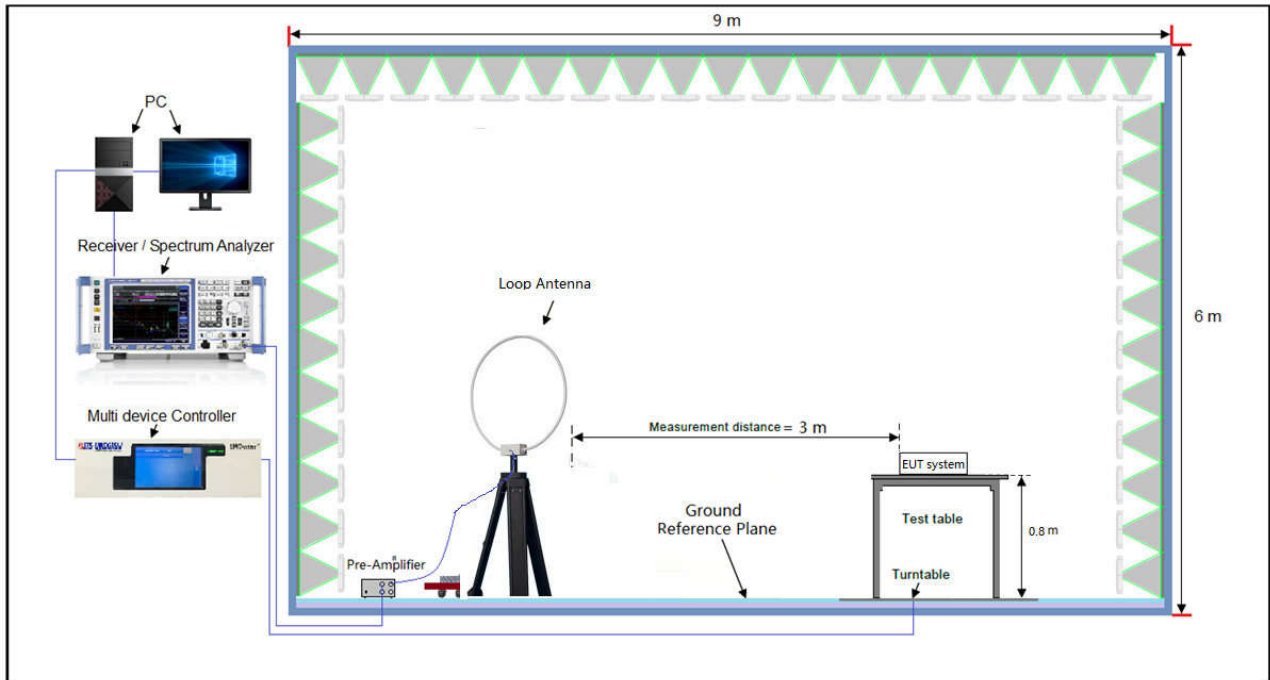


Frequency Range below 1GHz:

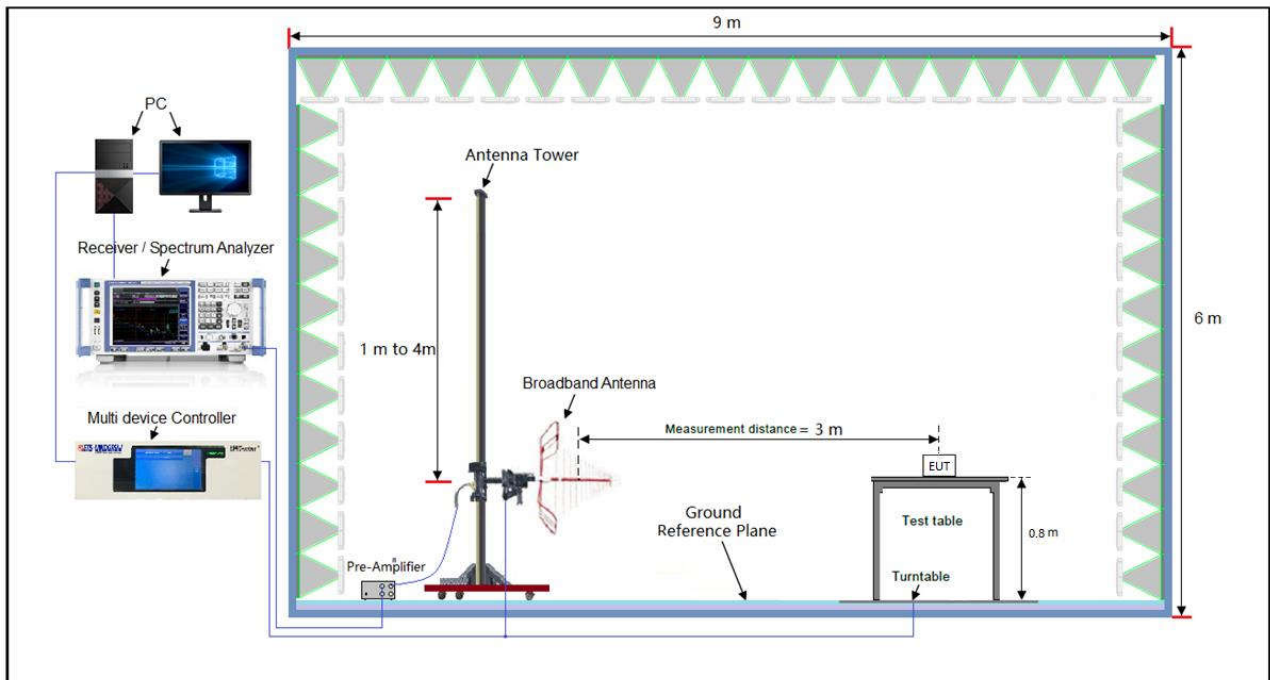

Frequency Range 1-18GHz:

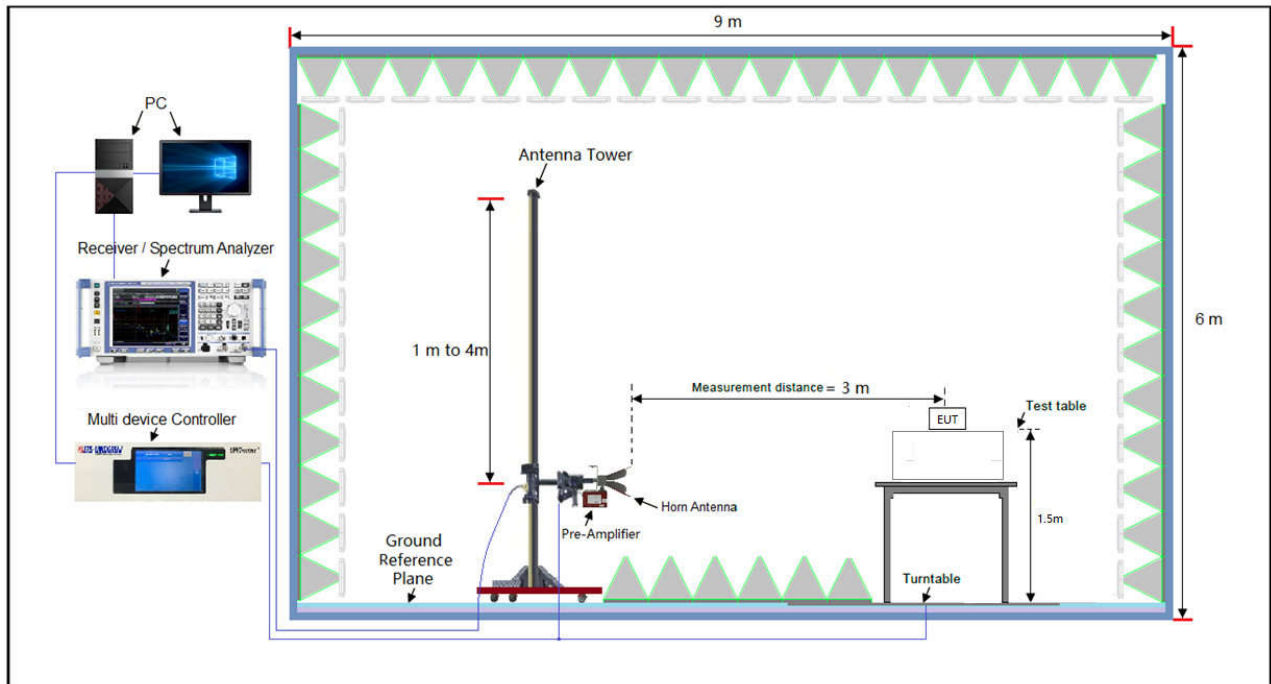

Frequency Range 18-40GHz:

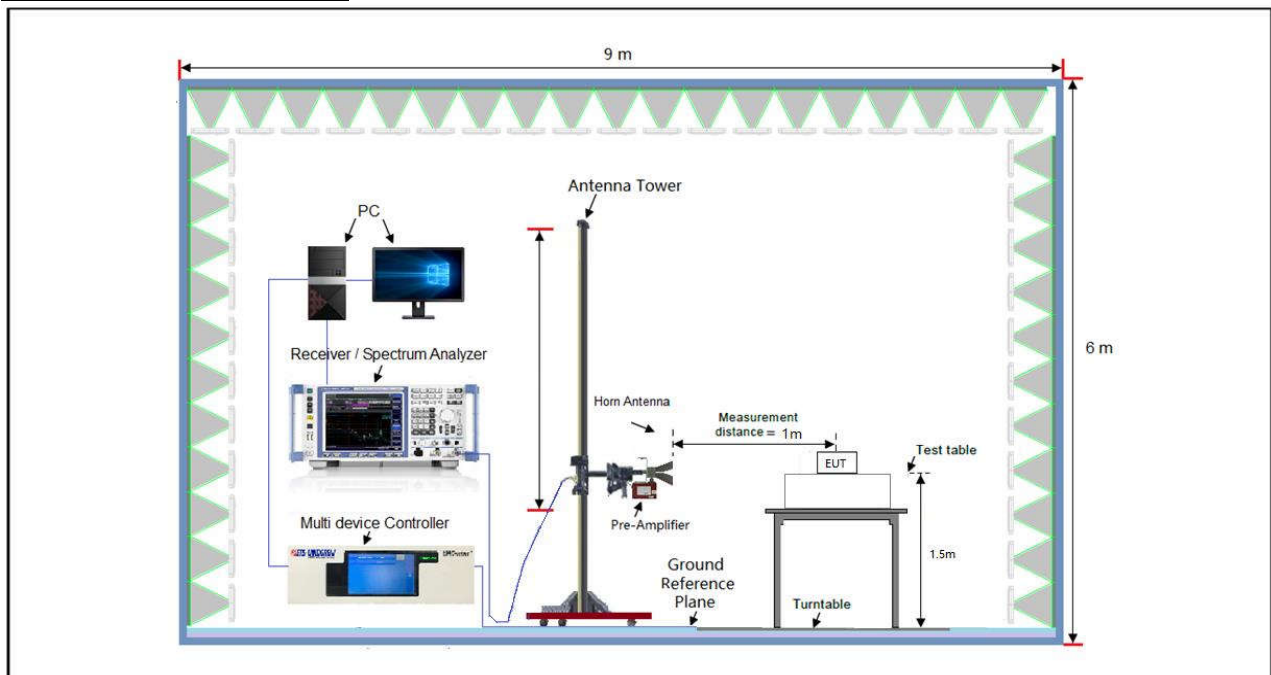

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.

3.1.7 Test Results

9kHz ~ 30MHz Data:


The amplitude of spurious emissions attenuated more than 20dB below the permissible value is not required to be report.

Left

30MHz ~ 1GHz Worst-Case Data:

Test Channel	Channel 19	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Jim Xu

Antennal Polarity & Test Distance: Horizontal at 3m

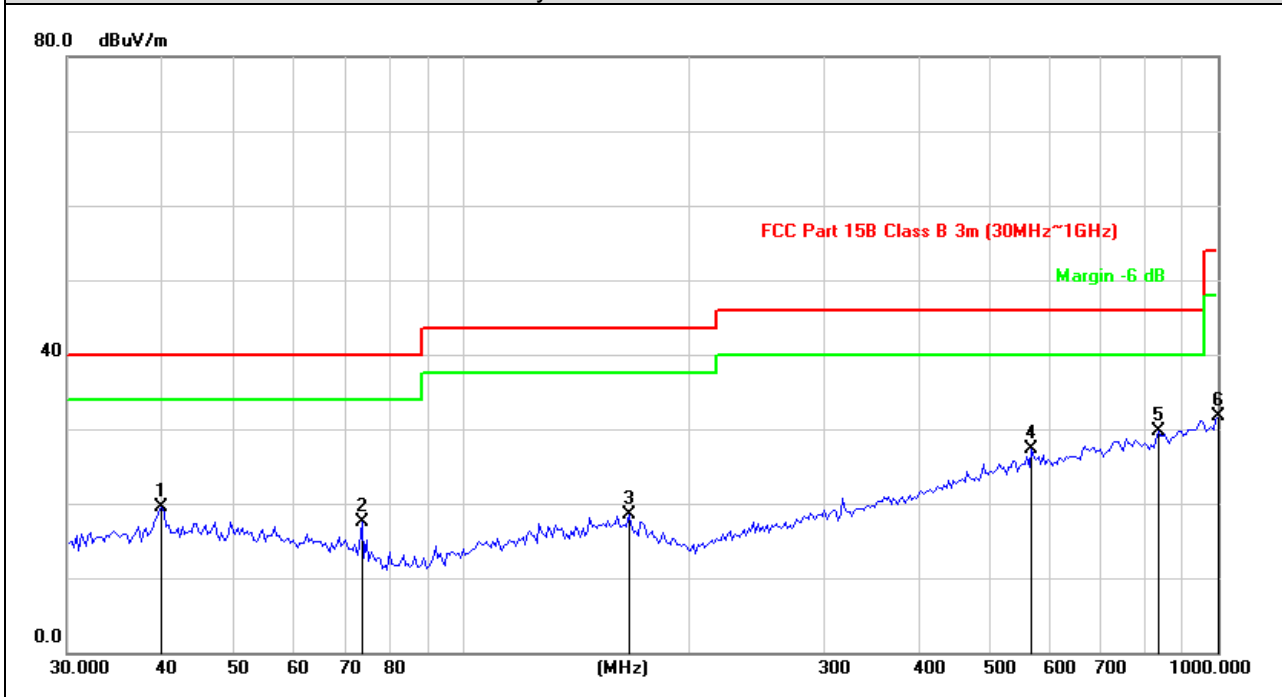


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	39.9942	34.42	-14.86	19.56	40.00	-20.44	peak	100	289
2	73.6170	35.45	-17.95	17.50	40.00	-22.50	peak	100	168
3	166.0680	33.19	-14.63	18.56	43.50	-24.94	peak	200	269
4	566.6223	32.83	-5.58	27.25	46.00	-18.75	peak	120	100
5	833.3171	31.38	-1.67	29.71	46.00	-16.29	peak	200	215
6	1000.0000	30.48	1.23	31.71	54.00	-22.29	peak	150	360

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value

Test Channel	Channel 19	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Jim Xu

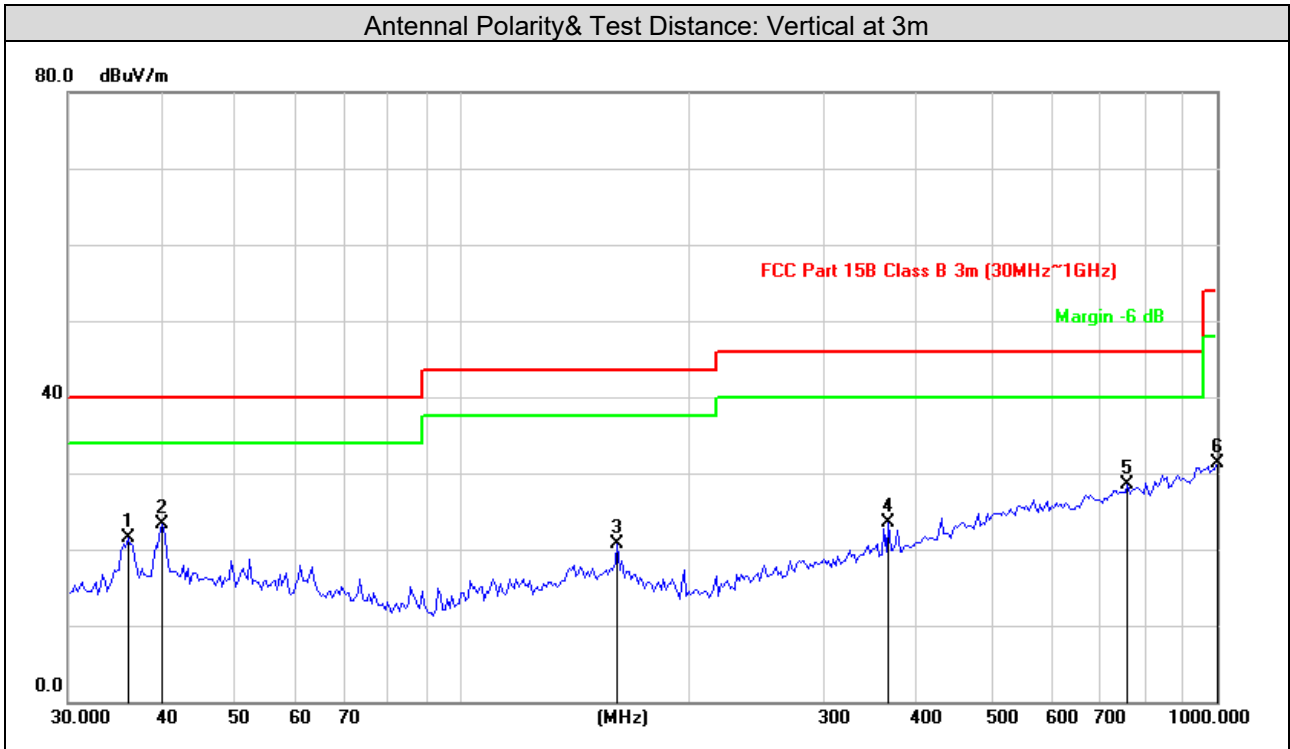

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	36.0007	36.82	-15.39	21.43	40.00	-18.57	peak	200	147
2	39.9942	38.20	-14.86	23.34	40.00	-16.66	peak	200	265
3	160.3456	34.82	-14.07	20.75	43.50	-22.75	peak	100	360
4	366.8231	34.48	-11.01	23.47	46.00	-22.53	peak	100	112
5	760.7036	31.26	-2.75	28.51	46.00	-17.49	peak	150	156
6	1000.0000	30.12	1.23	31.35	54.00	-22.65	peak	150	200

Remarks:


1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value

Right

30MHz ~ 1GHz Worst-Case Data:

Test Channel	Channel 19	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Jim Xu

Antenna Polarity & Test Distance: Horizontal at 3m

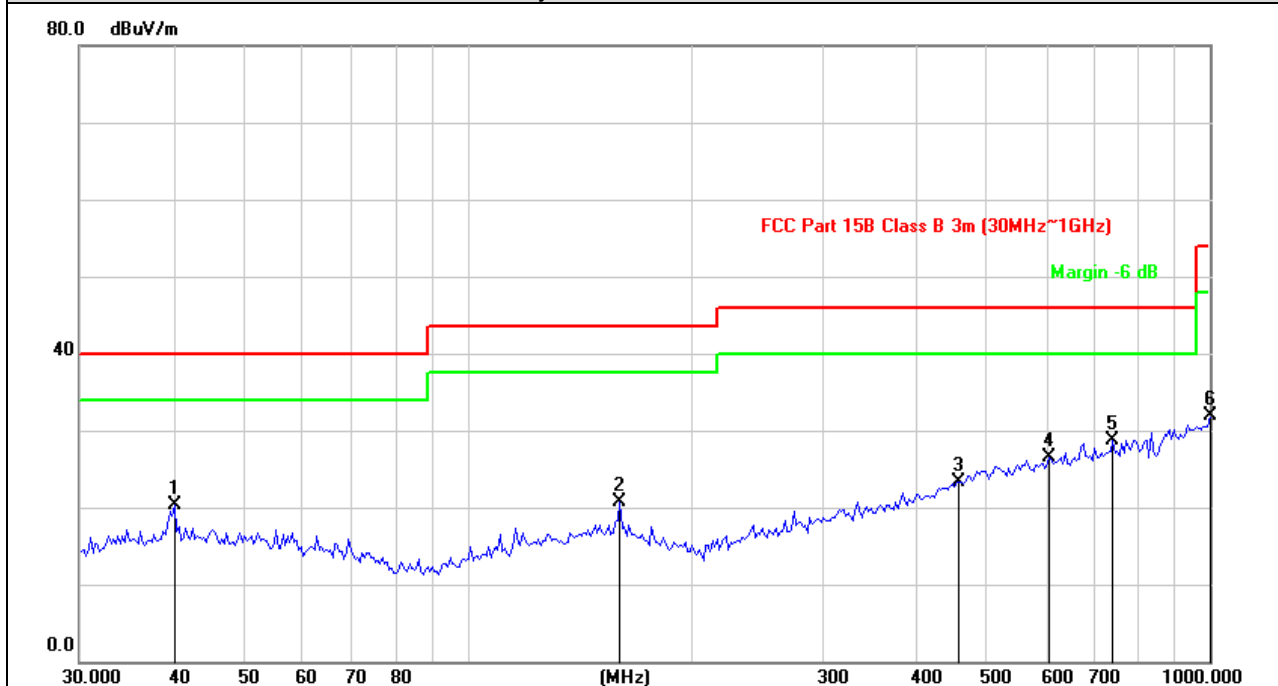


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	40.2757	35.26	-14.87	20.39	40.00	-19.61	peak	200	159
2	160.3456	34.68	-14.07	20.61	43.50	-22.89	peak	100	256
3	459.1144	31.35	-7.97	23.38	46.00	-22.62	peak	200	98
4	607.7867	31.43	-4.97	26.46	46.00	-19.54	peak	100	100
5	739.6604	31.84	-3.08	28.76	46.00	-17.24	peak	150	248
6	1000.0000	30.59	1.23	31.82	54.00	-22.18	peak	150	236

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value

Test Channel	Channel 19	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Vertical at 3m

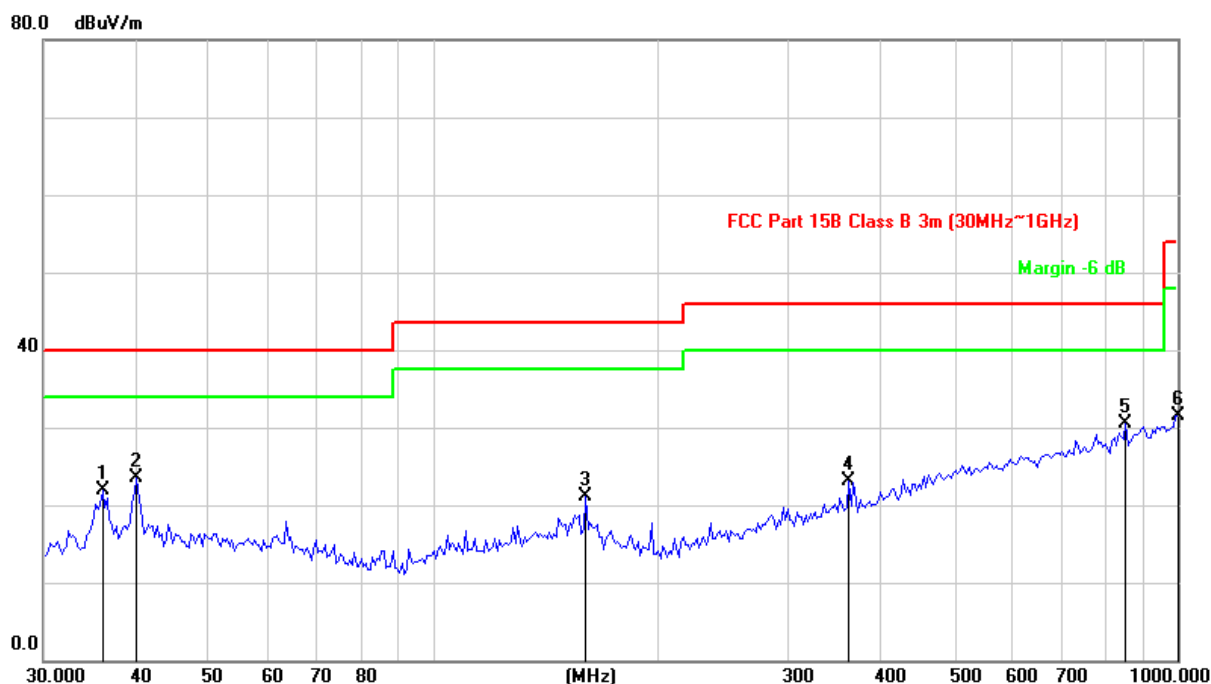

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	36.0007	37.21	-15.39	21.82	40.00	-18.18	peak	100	300
2	39.9942	38.43	-14.86	23.57	40.00	-16.43	peak	200	198
3	160.3456	35.11	-14.07	21.04	43.50	-22.46	peak	200	136
4	361.7139	34.29	-11.16	23.13	46.00	-22.87	peak	100	200
5	851.0353	31.95	-1.44	30.51	46.00	-15.49	peak	150	156
6	1000.0000	30.33	1.23	31.56	54.00	-22.44	peak	100	230

Remarks:


1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value

Above 1GHz Data:

BLE-1Mbps

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antenna Polarity& Test distance: Horizontal at 3 M

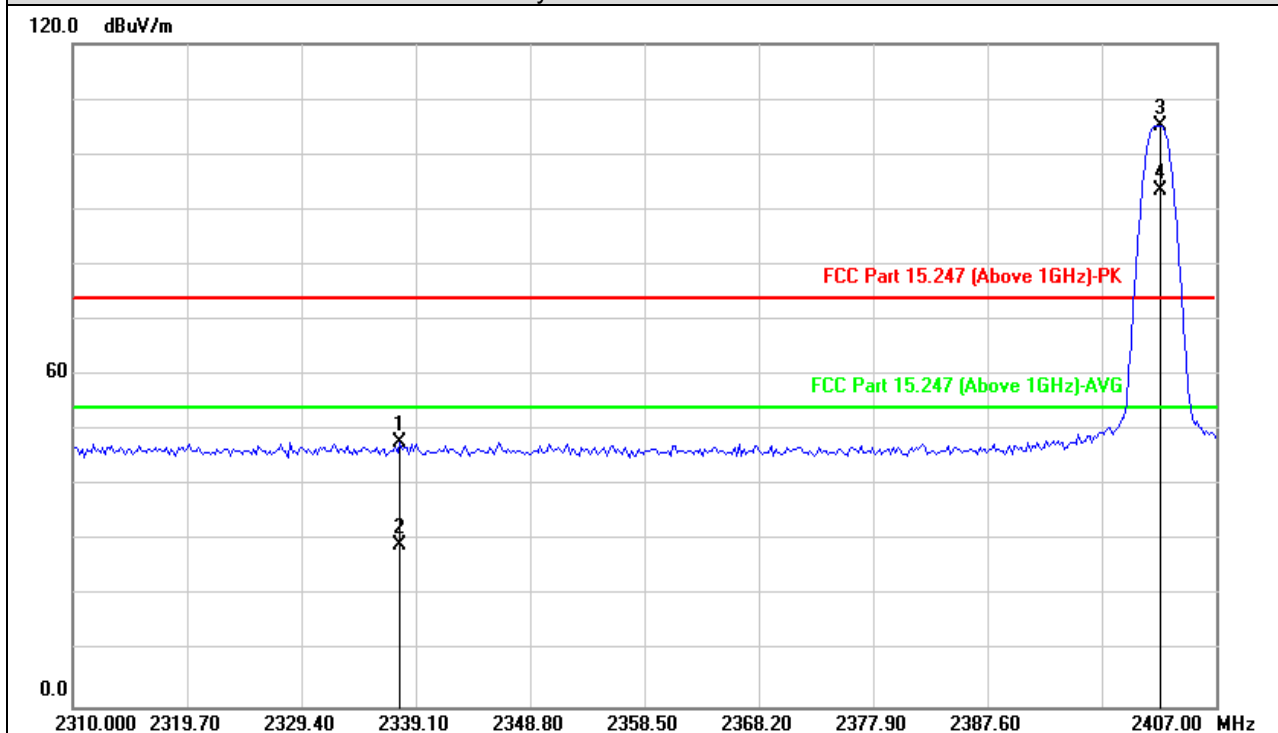


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2337.798	47.03	0.83	47.86	74.00	-26.14	peak	244	183
2	2337.798	28.35	0.83	29.18	54.00	-24.82	AVG	244	183
3 #	2402.335	104.31	0.74	105.05			peak	244	183
4 #	2402.335	92.57	0.74	93.31			AVG	244	183
5	4804.000	52.22	6.59	58.81	74.00	-15.19	peak	100	313
6	4804.000	45.74	6.59	52.33	54.00	-1.67	AVG	100	313
7	7206.000	50.46	9.80	60.26	74.00	-13.74	peak	100	178
8	7206.000	41.36	9.80	51.16	54.00	-2.84	AVG	100	178
9	9608.000	46.75	13.57	60.32	74.00	-13.68	peak	150	284
10	9608.000	34.49	13.57	48.06	54.00	-5.94	AVG	150	284

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Vertical at 3m

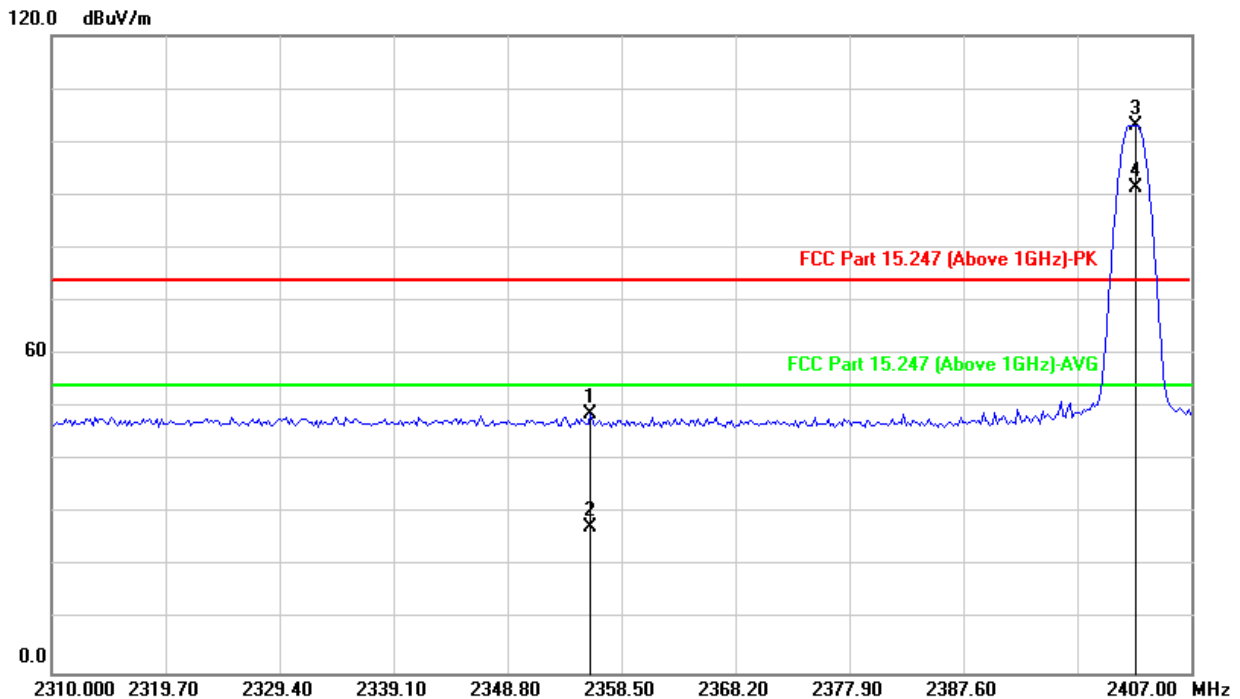

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2355.876	48.04	0.81	48.85	74.00	-25.15	peak	100	260
2	2355.876	26.63	0.81	27.44	54.00	-26.56	AVG	100	260
3 #	2402.335	102.30	0.74	103.04			peak	100	260
4 #	2402.335	90.74	0.74	91.48			AVG	100	260
5	4804.000	51.33	6.59	57.92	74.00	-16.08	peak	100	136
6	4804.000	44.99	6.59	51.58	54.00	-2.42	AVG	100	136
7	7206.000	50.64	9.80	60.44	74.00	-13.56	peak	100	230
8	7206.000	41.40	9.80	51.20	54.00	-2.80	AVG	100	230
9	9608.000	45.71	13.57	59.28	74.00	-14.72	peak	100	235
10	9608.000	34.02	13.57	47.59	54.00	-6.41	AVG	100	235

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2402MHz: Fundamental frequency.

Test channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu


Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	96.37	0.69	97.06			peak	108	21
2#	2440.000	54.86	0.69	55.55			AVG	108	21
3	4880.000	54.74	7.60	62.34	74.00	-11.66	peak	100	173
4	4880.000	43.86	7.60	51.46	54.00	-2.54	AVG	100	173
5	7320.000	51.62	10.92	62.54	74.00	-11.46	peak	201	216
6	7320.000	41.77	10.92	50.68	54.00	-3.32	AVG	201	216
Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	97.86	0.69	98.55			peak	121	185
2#	2440.000	55.13	0.69	55.82			AVG	121	185
3	4880.000	53.18	7.60	60.78	74.00	-13.22	peak	200	262
4	4880.000	41.86	7.60	49.46	54.00	-4.54	AVG	200	262
5	7320.000	53.66	10.92	64.58	74.00	-9.42	peak	150	306
6	7320.000	42.75	10.92	50.14	54.00	-3.86	AVG	150	306

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2440MHz: Fundamental frequency.

Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Horizontal at 3 M

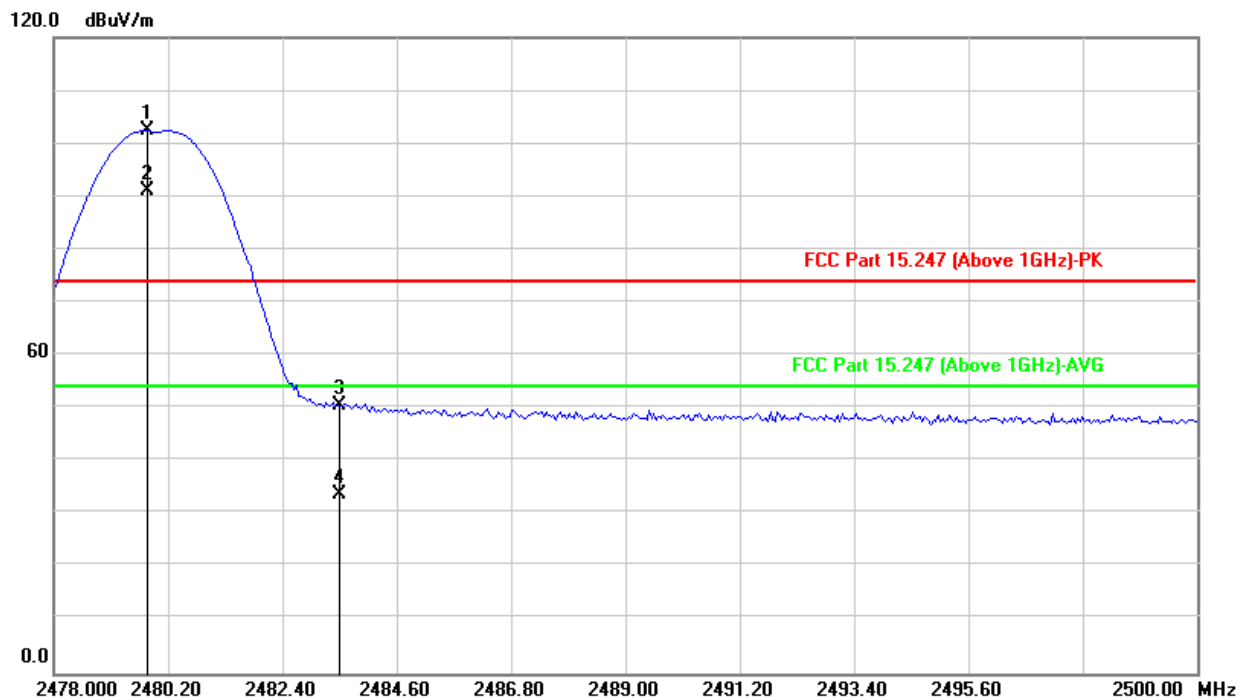


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.808	101.70	0.64	102.34			peak	100	190
2#	2479.808	90.42	0.64	91.06			AVG	100	190
3	2483.500	49.97	0.63	50.60	74.00	-23.40	peak	100	190
4	2483.500	33.15	0.63	33.78	54.00	-20.22	AVG	100	190
5	4960.000	51.80	7.24	59.04	74.00	-14.96	peak	100	48
6	4960.000	45.62	7.24	52.86	54.00	-1.14	AVG	100	48
7	7440.000	50.79	10.12	60.91	74.00	-13.09	peak	100	166
8	7440.000	41.60	10.12	51.72	54.00	-2.28	AVG	100	166
9	9920.000	46.97	14.70	61.67	74.00	-12.33	peak	100	206
10	9920.000	35.48	14.70	50.18	54.00	-3.82	AVG	100	206

Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value
3. #2480MHz: Fundamental frequency.

Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Vertical at 3 M

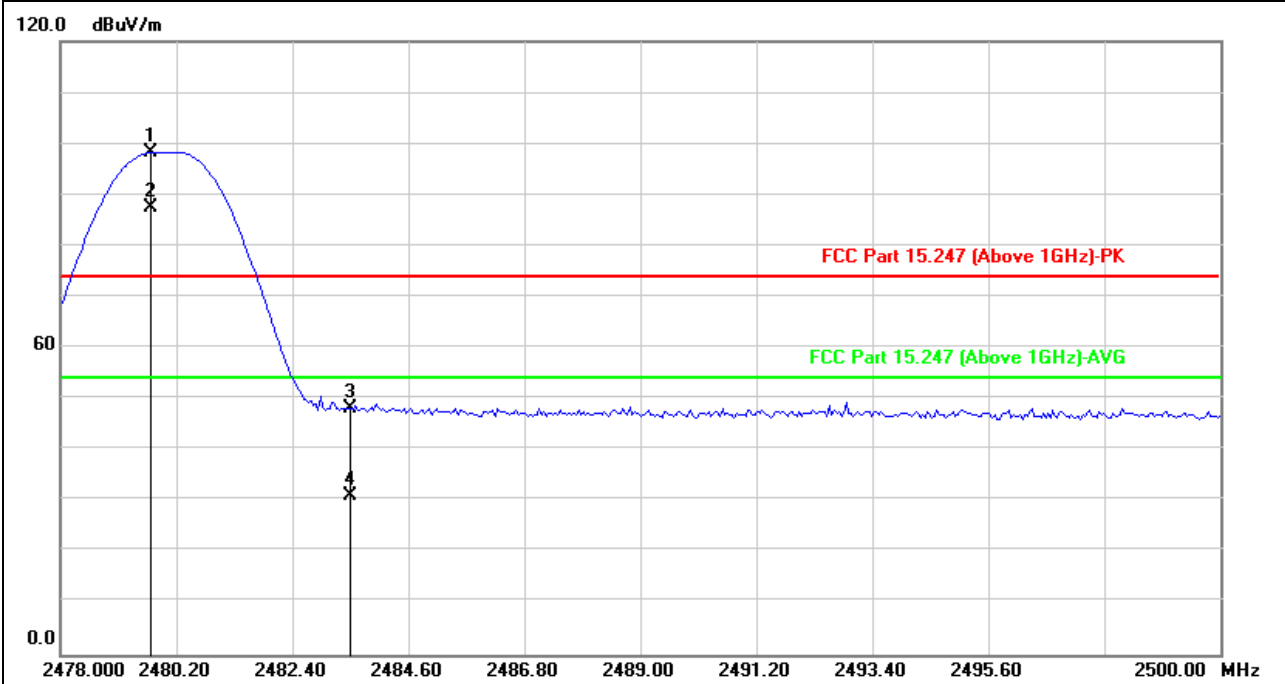

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.719	97.57	0.64	98.21			peak	100	260
2#	2479.719	86.85	0.64	87.49			AVG	100	260
3	2483.500	47.52	0.63	48.15	74.00	-25.85	peak	100	260
4	2483.500	30.37	0.63	31.00	54.00	-23.00	AVG	100	260
5	4960.000	54.25	7.24	61.49	74.00	-12.51	peak	100	185
6	4960.000	43.55	7.24	50.79	54.00	-3.21	AVG	100	185
7	7440.000	48.74	10.12	58.86	74.00	-15.14	peak	100	93
8	7440.000	39.69	10.12	49.81	54.00	-4.19	AVG	100	93
9	9920.000	45.61	14.70	60.31	74.00	-13.69	peak	100	308
10	9920.000	34.47	14.70	49.17	54.00	-4.83	AVG	100	308

Remarks:


4. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
5. Margin value = Emission level – Limit value
6. #2480MHz: Fundamental frequency.

Above 1GHz Data:

BLE-2Mbps

Test channel	Channel 1	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antenna Polarity& Test distance: Horizontal at 3 M

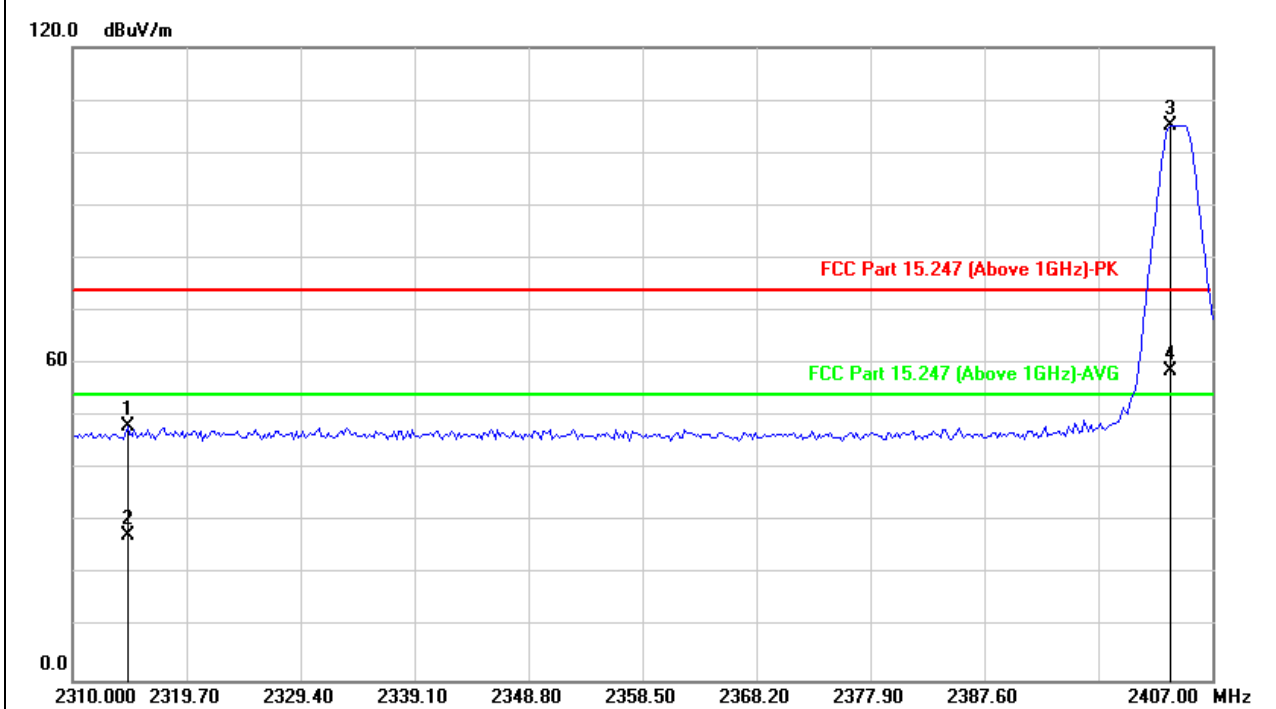


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2314.665	47.30	0.85	48.15	74.00	-25.85	peak	300	180
2	2314.665	26.65	0.85	27.50	54.00	-26.50	AVG	300	180
3 #	2403.501	104.53	0.74	105.27			peak	300	180
4 #	2403.501	57.91	0.74	58.65			AVG	300	180
5	4808.000	51.12	6.61	57.73	74.00	-16.27	peak	100	237
6	4808.000	37.60	6.61	44.21	54.00	-9.79	AVG	100	237
7	7212.000	47.24	9.80	57.04	74.00	-16.96	peak	120	259
8	7212.000	32.54	9.80	42.34	54.00	-11.66	AVG	120	259
9	9616.000	45.20	13.59	58.79	74.00	-15.21	peak	100	185
10	9616.000	29.96	13.59	43.55	54.00	-10.45	AVG	100	185

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
- Margin value = Emission level – Limit value
- #2402MHz: Fundamental frequency.

Test channel	Channel 1	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Vertical at 3m

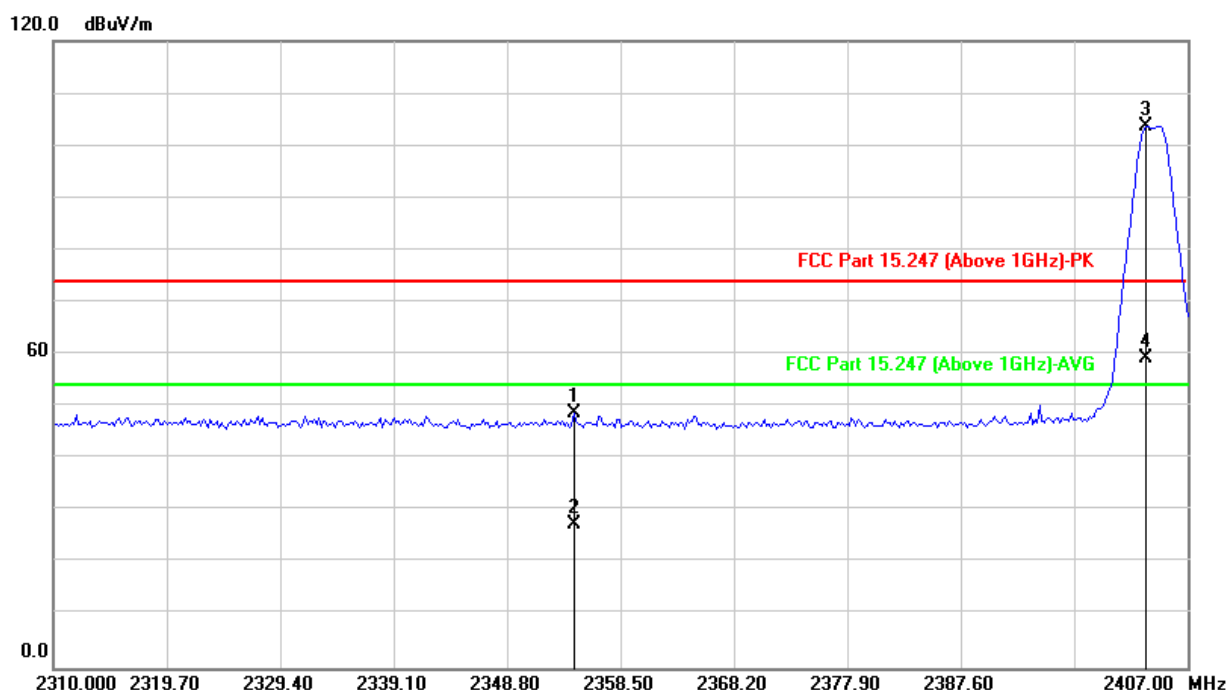

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2354.515	47.94	0.80	48.74	74.00	-25.26	peak	100	261
2	2354.515	26.61	0.80	27.41	54.00	-26.59	AVG	100	261
3 #	2403.501	102.86	0.74	103.60			peak	100	261
4 #	2403.501	58.62	0.74	59.36			AVG	100	261
5	4808.000	50.12	6.61	56.73	74.00	-17.27	peak	100	139
6	4808.000	36.99	6.61	43.60	54.00	-10.40	AVG	100	139
7	7212.000	48.11	9.80	57.91	74.00	-16.09	peak	100	275
8	7212.000	32.85	9.80	42.65	54.00	-11.35	AVG	100	275
9	9616.000	43.46	13.59	57.05	74.00	-16.95	peak	100	233
10	9616.000	28.76	13.59	42.35	54.00	-11.65	AVG	100	233

Remarks:

4. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
5. Margin value = Emission level – Limit value
6. #2402MHz: Fundamental frequency.

Test channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu


Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBUV)	Correct Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	97.17	0.69	97.86			peak	120	230
2#	2440.000	55.65	0.69	56.34			AVG	120	230
3	4880.000	55.65	7.60	63.25	74.00	-10.75	peak	150	116
4	4880.000	41.36	7.60	48.96	54.00	-5.04	AVG	150	116
5	7320.000	50.62	10.92	60.18	74.00	-13.82	peak	123	254
6	7320.000	42.53	10.92	51.68	54.00	-2.32	AVG	123	254
Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	90.33	0.69	91.02			peak	150	64
2#	2440.000	59.63	0.69	60.32			AVG	150	64
3	4880.000	58.83	7.60	66.43	74.00	-7.57	peak	100	264
4	4880.000	42.36	7.60	49.96	54.00	-4.04	AVG	100	264
5	7320.000	53.29	10.92	63.42	74.00	-10.58	peak	200	96
6	7320.000	42.89	10.92	51.73	54.00	-2.27	AVG	200	96

Remarks:

4. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
5. Margin value = Emission level – Limit value
6. #2440MHz: Fundamental frequency.

Test channel	Channel 38	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Horizontal at 3 M

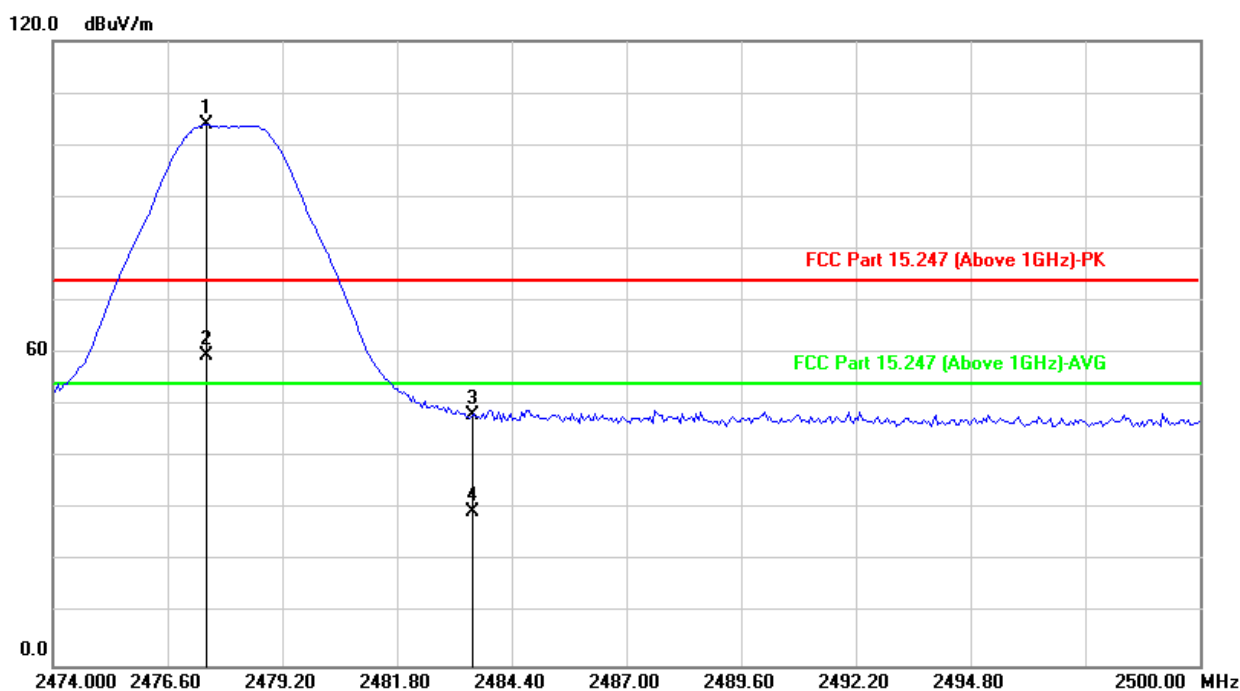


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2477.491	103.18	0.65	103.83			peak	100	190
2#	2477.491	58.87	0.65	59.52			AVG	100	190
3	2483.500	47.67	0.63	48.30	74.00	-25.70	peak	100	190
4	2483.500	28.79	0.63	29.42	54.00	-24.58	AVG	100	190
5	4956.000	50.84	7.23	58.07	74.00	-15.93	peak	100	279
6	4956.000	37.19	7.23	44.42	54.00	-9.58	AVG	100	279
7	7434.000	61.26	10.11	71.37	74.00	-2.63	peak	100	168
8	7434.000	38.47	10.11	48.58	54.00	-5.42	AVG	100	168
9	9912.000	43.52	14.67	58.19	74.00	-15.81	peak	100	135
10	9912.000	28.28	14.67	42.95	54.00	-11.05	AVG	100	135

Remarks:

7. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
8. Margin value = Emission level – Limit value
9. #2480MHz: Fundamental frequency.

Test channel	Channel 38	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Vertical at 3 M

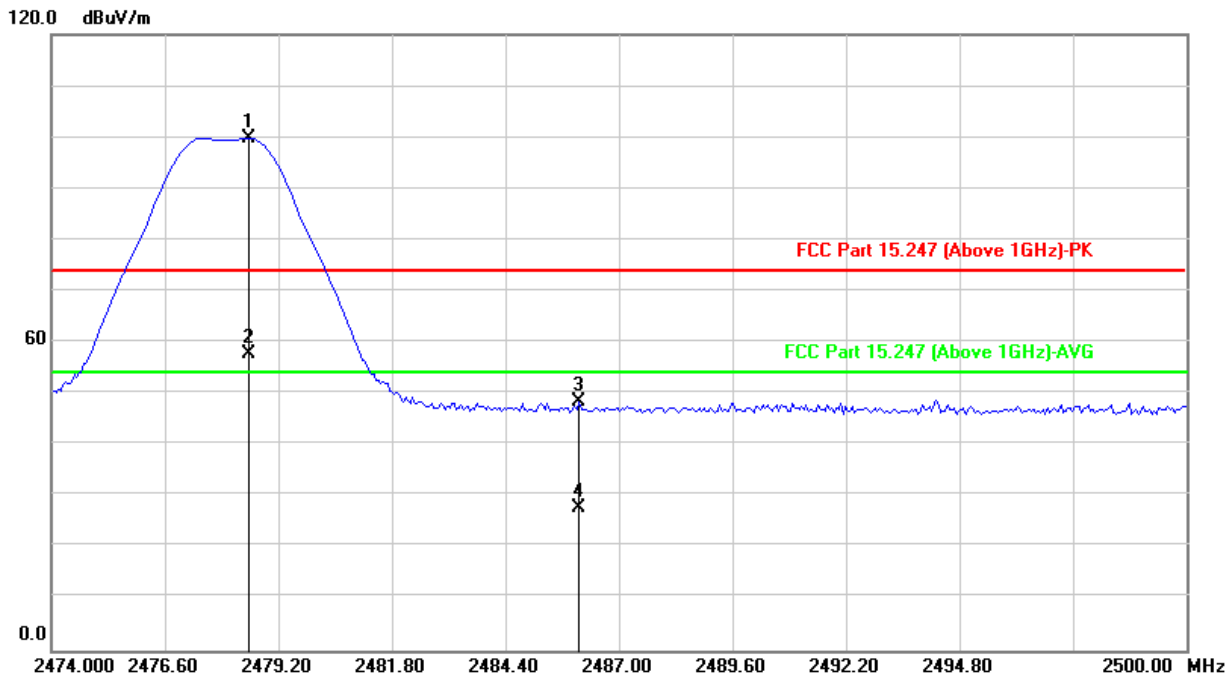

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2478.533	99.15	0.64	99.79			peak	100	260
2#	2478.533	57.22	0.64	57.86			AVG	100	260
3	2486.088	47.71	0.63	48.34	74.00	-25.66	peak	100	260
4	2486.088	27.21	0.63	27.84	54.00	-26.16	AVG	100	260
5	4956.000	54.18	7.23	61.41	74.00	-12.59	peak	100	143
6	4956.000	37.32	7.23	44.55	54.00	-9.45	AVG	100	143
7	7434.000	58.94	10.11	69.05	74.00	-4.95	peak	100	168
8	7434.000	37.58	10.11	47.69	54.00	-6.31	AVG	100	168
9	9912.000	43.08	14.67	57.75	74.00	-16.25	peak	120	210
10	9912.000	27.66	14.67	42.33	54.00	-11.67	AVG	120	210

Remarks:

10.Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)

11.Margin value = Emission level – Limit value

12.#2480MHz: Fundamental frequency.


3.2 6dB Bandwidth Measurement

3.2.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

3.2.2 Test Setup

Subclause 11.8 of ANSI C63.10 is applicable.

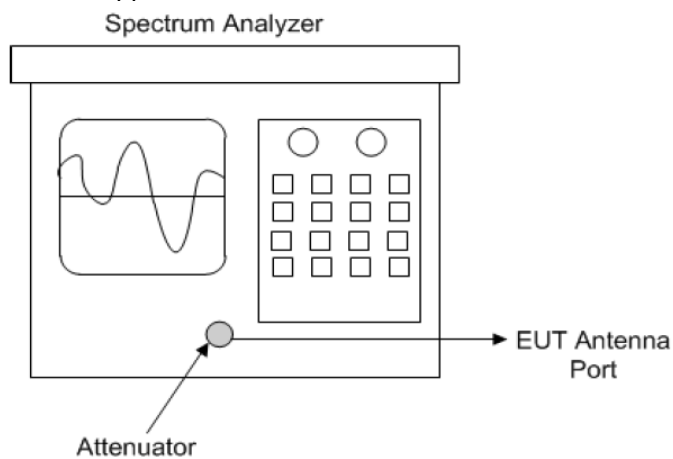

3.2.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.2.4 Test Procedure

Option 1:

- a. Set resolution bandwidth (RBW) = 30kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the dB bandwidth mode with X set to 6 dB. if the functionality described in 11.8.1 (i.e. RBW= 100 kHz. VBW $\geq 3 \times$ RBW. and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability. care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB

3.2.5 Deviation from Test Standard

No deviation.

3.2.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.2.7 Test Result


BLE-1Mbps			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	0.708	>0.5
19	2440MHz	0.664	>0.5
39	2480MHz	0.732	>0.5

BLE-2Mbps			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
1	2404MHz	1.152	>0.5
19	2440MHz	1.156	>0.5
38	2478MHz	1.380	>0.5



3.3 Occupied Bandwidth Measurement

3.3.1 Test Setup

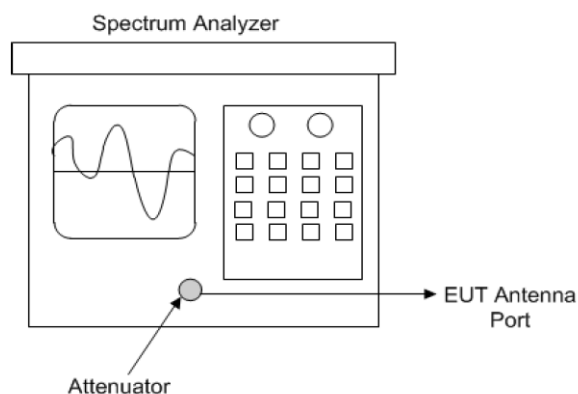

3.3.2 Test Instruments

Refer to section 5 to get information of above instrument.

3.3.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to peak. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

3.3.4 Deviation from Test Standard

No deviation.

3.3.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.3.6 Test Results

BLE-1Mbps			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
0	2402MHz	1.041	2400~2483.5
19	2440MHz	1.044	2400~2483.5
39	2480MHz	1.042	2400~2483.6

BLE-2Mbps			
Operation Channel	Frequency	Occupied Bandwidth (MHz)	
		Result	Limit
1	2404MHz	2.077	2400~2483.5
19	2440MHz	2.072	2400~2483.5
38	2478MHz	2.083	2400~2483.6




3.4 Conducted Output Power Measurement

3.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

3.4.2 Test Setup

- Measurement using a spectrum analyzer (SA) Subclause 11.9.2.2 of ANSI C63.10 is applicable

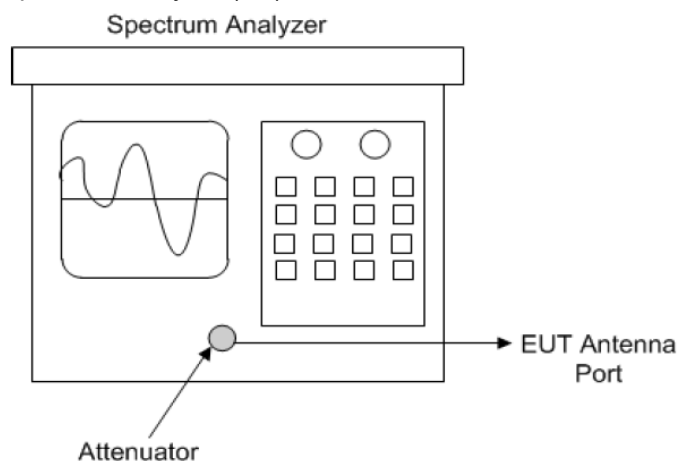

3.4.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.4.4 Test Procedures

Measurement using a spectrum analyzer (SA), Selection of test method:

- Maximum peak conducted output power

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- a) Set the RBW > DTS bandwidth.
- b) Set VBW > [3 x RBW]
- c) Set span > [3 x RBW]
- d) Sweep time = auto couple.
- e) Detector = peak
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

The proper test method is selected based on the following criteria:

- a) **Method AVGSA-1 or method AVGSA-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
 - 1) The EUT transmits continuously (or with a $D > 98\%$).
 - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the instrument configured as in method AVGSA-1) is equal to or shorter than the duration T of each transmission from the EUT, and if those transmissions exhibit full power throughout their durations.
- b) **Method AVGSA-2 or method AVGSA-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than +2%.
- c) **Method AVGSA-3 or method AVGSA-3A (alternative)** shall be applied if the conditions of the preceding item a) and item b) cannot be achieved.

Method SA-2:

Method SA-2 uses trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction. The procedure for this method is as follows:

- a) Measure the duty cycle D of the transmitter output signal as described in 12.2.
- b) Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.
- c) Set RBW= 1 MHz.
- d) Set VBW ≥ 3 MHz.
- e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector= RMS (i. e., power averaging), if available. Otherwise, use sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to "free run."
- i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- j) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument's band power measurement function with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.
- k) Add $[10 \log(1/D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log(1/0.25)] = 6$ dB if the duty cycle is 25%.

3.4.5 Deviation from Test Standard

No deviation.

3.4.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.4.7 Test Results

Left

BLE-1Mbps						
Peak Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	9.302	8.515	<125	<1000	Pass
19	2440	8.821	7.623	<125	<1000	Pass
39	2480	8.965	7.880	<125	<1000	Pass

BLE-1Mbps						
Average Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	3.55	2.265	<125	<1000	Pass
19	2440	3.19	2.084	<125	<1000	Pass
39	2480	3.07	2.028	<125	<1000	Pass

BLE-2Mbps						
Peak Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
1	2404	9.294	8.500	<125	<1000	Pass
19	2440	8.810	7.603	<125	<1000	Pass
38	2478	9.001	7.945	<125	<1000	Pass

BLE-2Mbps						
Average Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
1	2404	2.83	1.919	<125	<1000	Pass
19	2440	2.62	1.828	<125	<1000	Pass
38	2478	2.50	1.778	<125	<1000	Pass

Right


BLE-1Mbps						
Peak Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	8.973	7.894	<125	<1000	Pass
19	2440	8.315	6.784	<125	<1000	Pass
39	2480	8.412	6.937	<125	<1000	Pass

BLE-1Mbps						
Average Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
0	2402	3.15	2.065	<125	<1000	Pass
19	2440	2.71	1.866	<125	<1000	Pass
39	2480	2.81	1.910	<125	<1000	Pass


BLE-2Mbps						
Peak Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
1	2404	8.904	7.770	<125	<1000	Pass
19	2440	8.253	6.688	<125	<1000	Pass
38	2478	8.370	6.871	<125	<1000	Pass

BLE-2Mbps						
Average Power						
Channel	Freq.	RF Output Power		Limit (mW)		Verdict
No.	(MHz)	(dBm)	(mW)	Rss-247	FCC	
1	2404	2.41	1.742	<125	<1000	Pass
19	2440	1.96	1.570	<125	<1000	Pass
38	2478	2.14	1.637	<125	<1000	Pass


Left
1Mbps

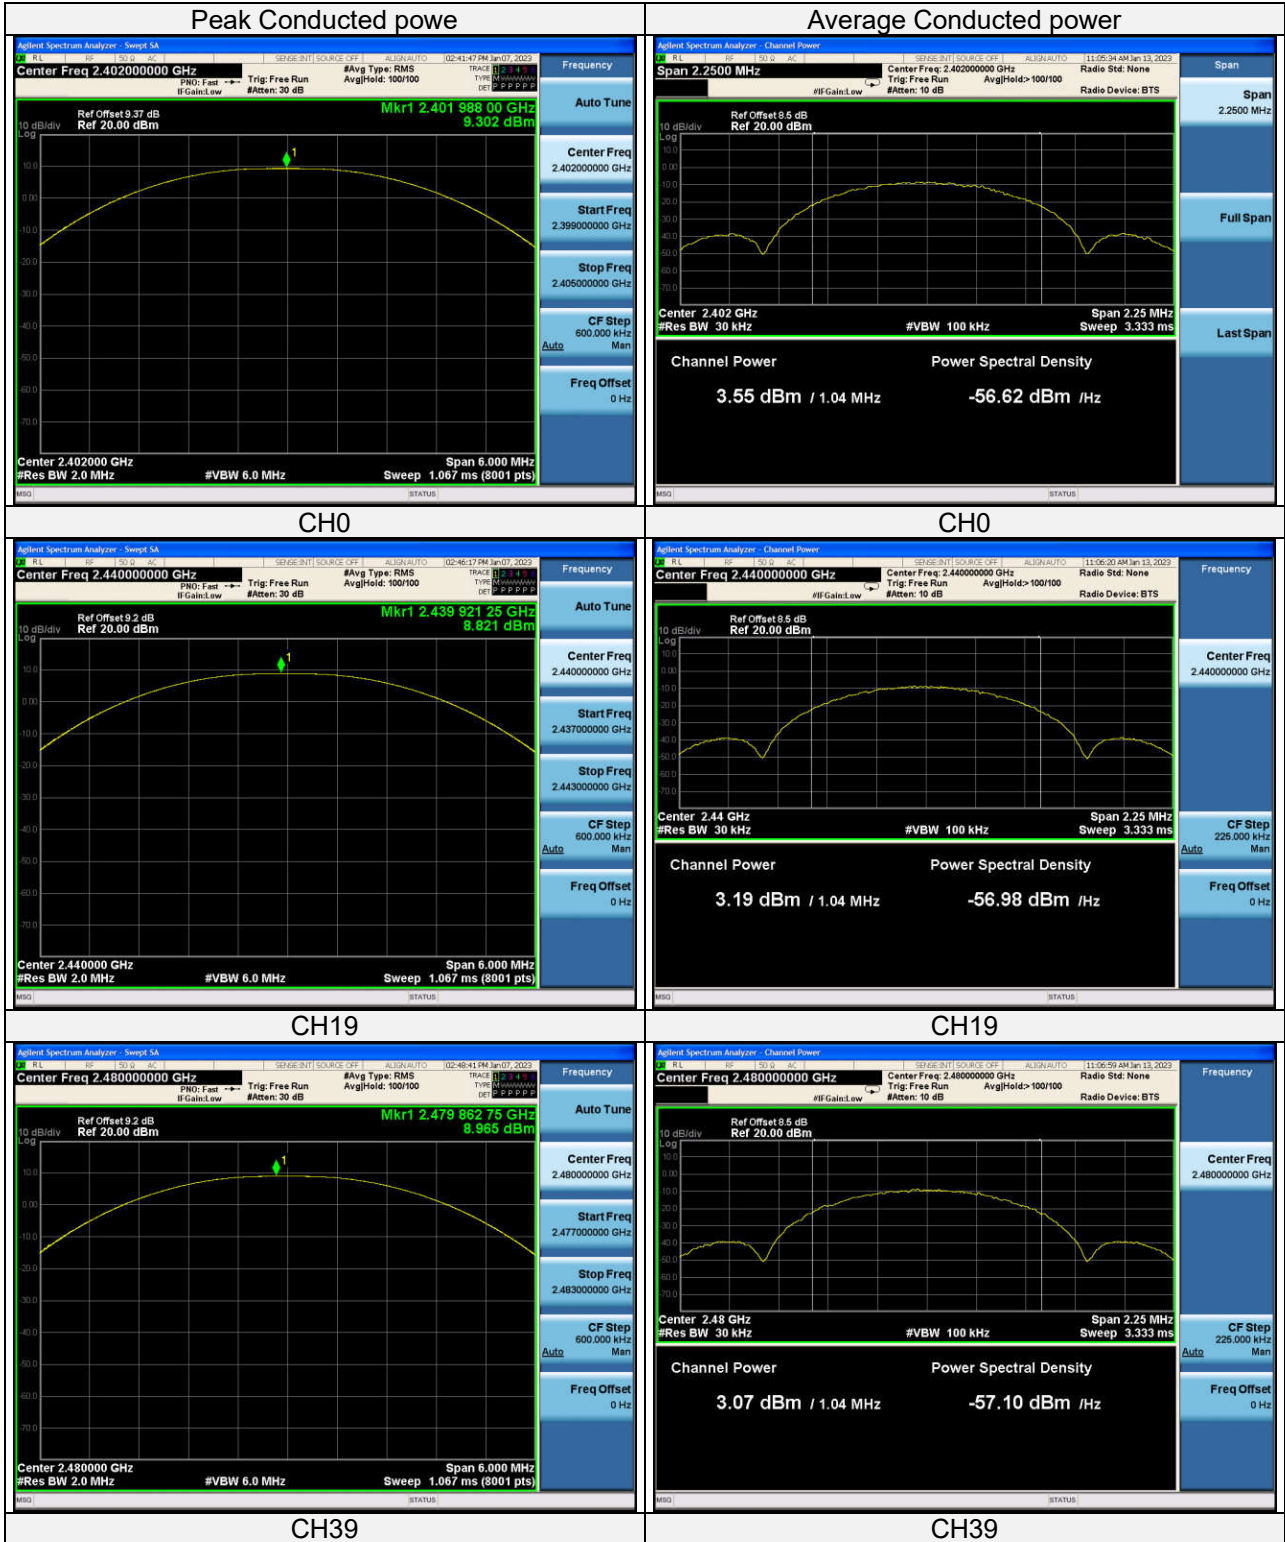


2Mbps

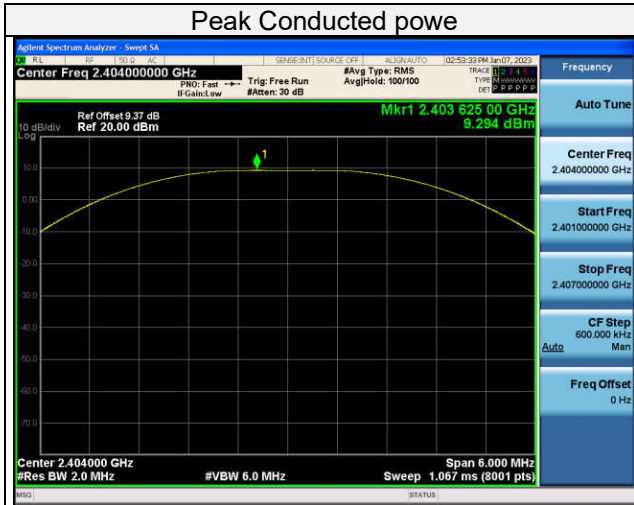


CH1

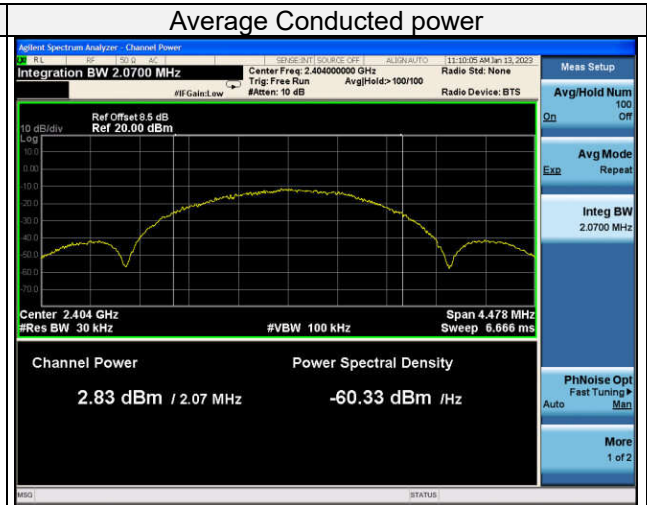


CH1

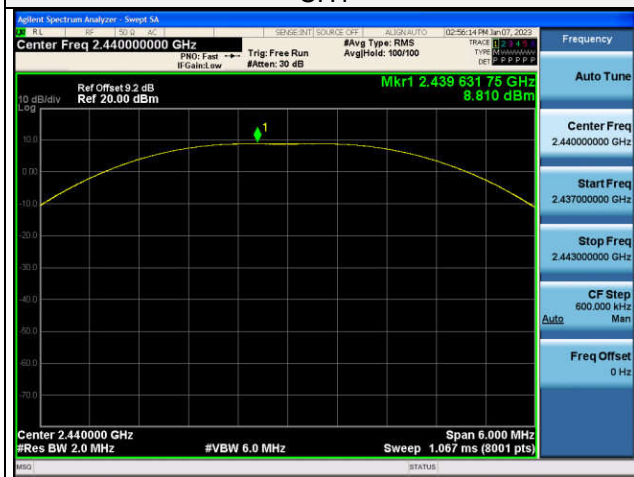


CH19

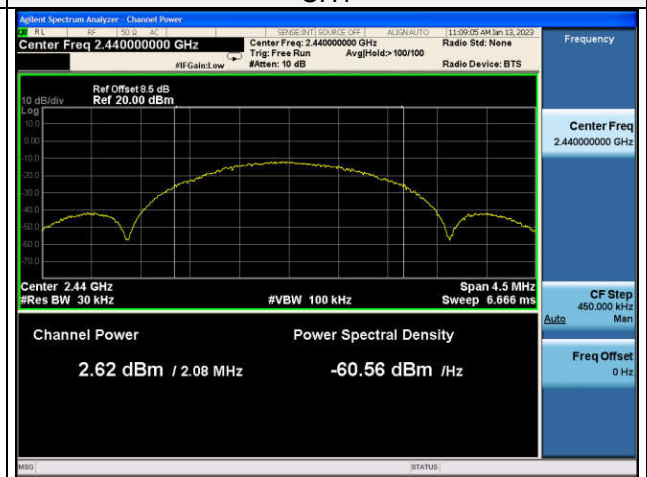

CH19

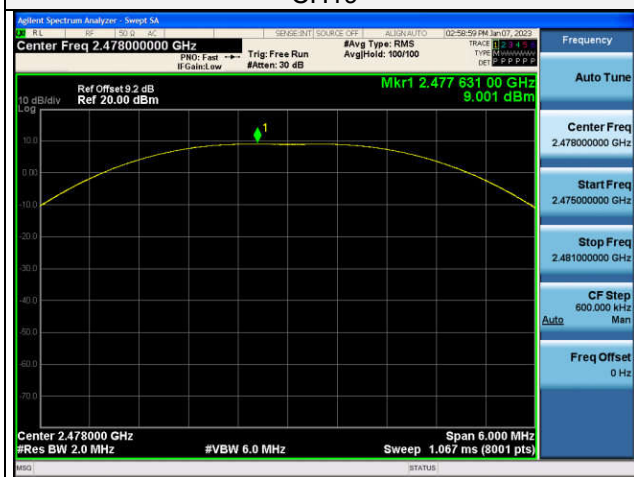


CH38

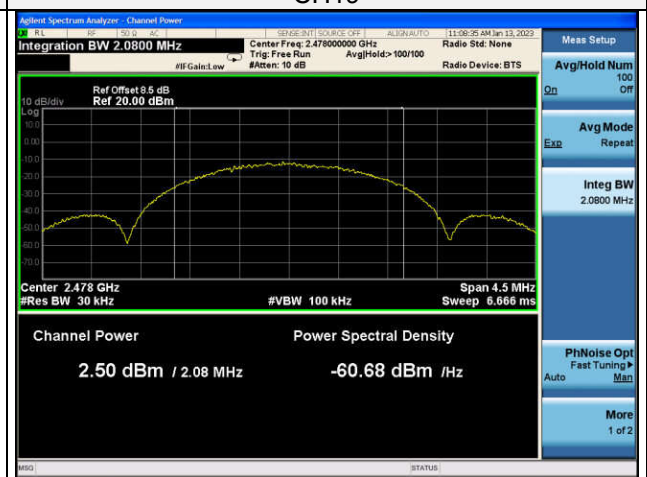


CH38


Right
1Mbps

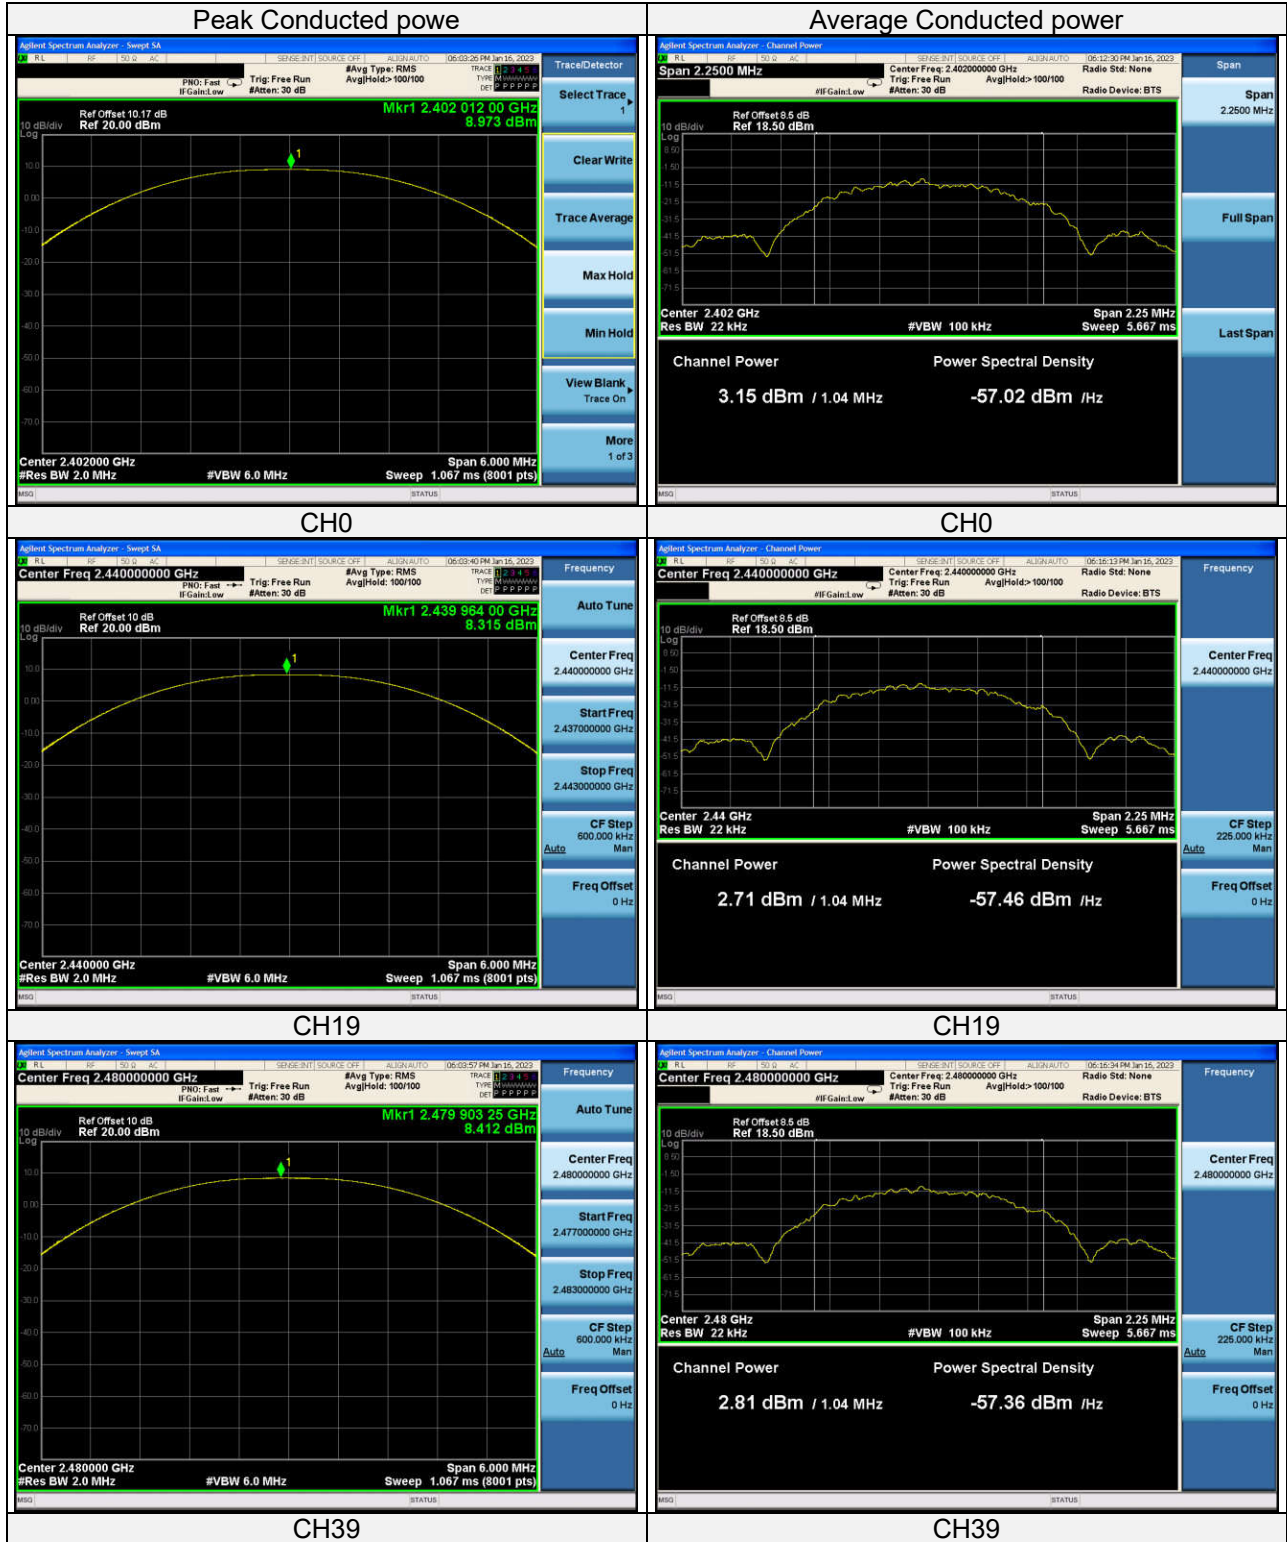


2Mbps

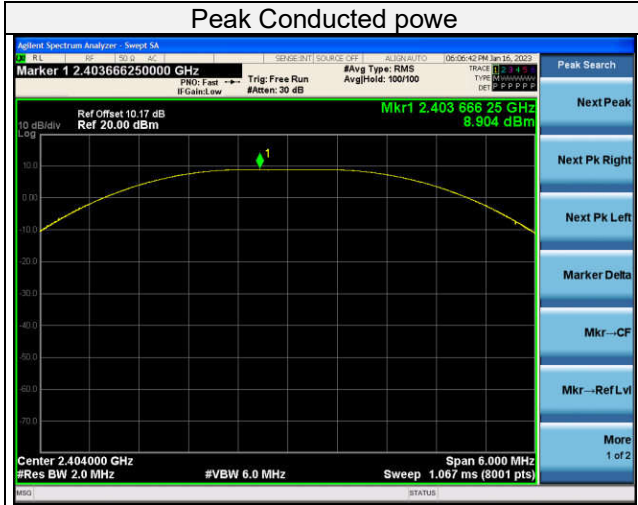

CH1

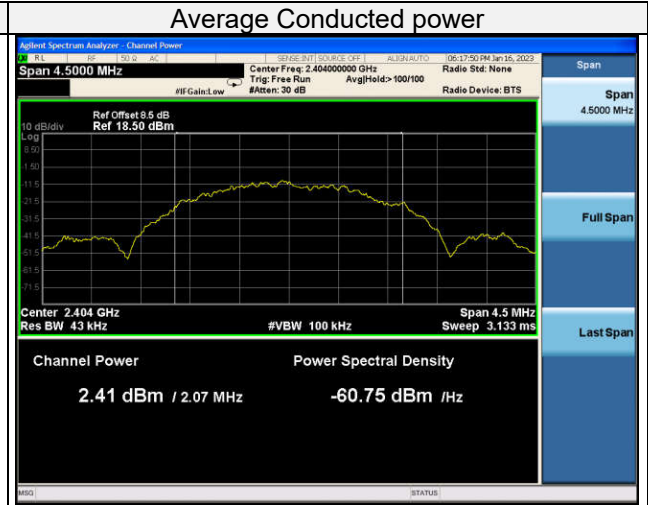


CH1

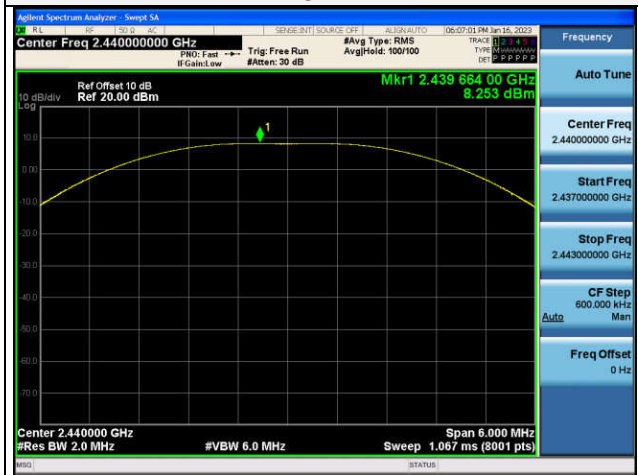

CH19



CH19

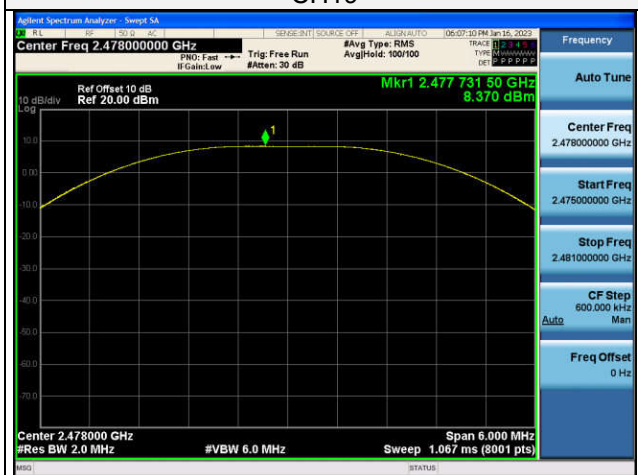

CH38



CH38


3.5 Power Spectral Density Measurement

3.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm/3kHz.

3.5.2 Test Setup

- DTS maximum power spectral density level in the fundamental emission Subclause 11.10 of ANSI C63.10 is applicable

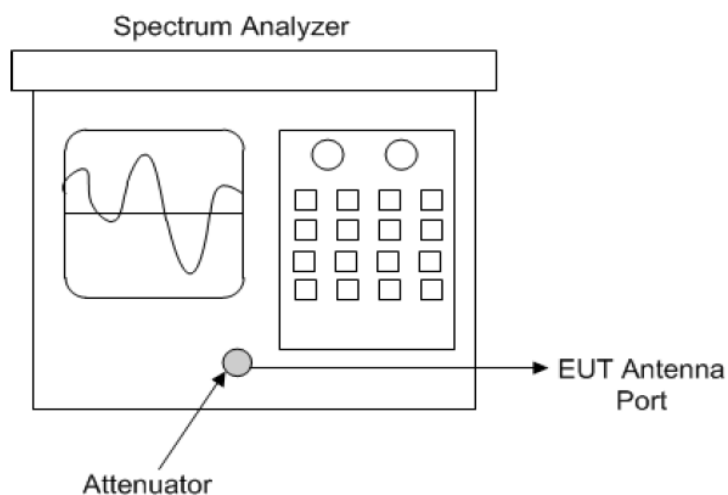

Spectrum analyzer test configuration

3.5.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.5.4 Test Procedure

- a. **Method AVGPSD-1 or method AVGPSD-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
 - 1) The EUT transmits continuously (or with a $D \geq 98\%$).
 - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep is equal to or shorter than the duration I of each transmission from the EUT, and if those transmissions exhibit full power throughout these durations.
- b. **Method AVGPSD-2 or method AVGPSD-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved. and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than $\pm 2\%$.
- c. **Method AVGPSD-3 or method AVGPSD-3A (alternative)** shall be applied if the conditions of the preceding paragraphs a) and b) cannot be achieved.

Method AVGPSD-3:

Method AVGPSD-3 uses mms detection across ON and OFE times of the EUT with max hold. The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e. $D < 98\%$), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level. and when the transmission duty cycle is not constant (i.e., duty cycle variations exceed $\pm 2\%$),

SA Setting:

- a. Set the instrument span to a minimum of 1.5 times the OBW.
 - b. Set sweep trigger to "free run."
 - c. Set the RBW = 3 kHz, VBW = 10 kHz,
 - d. Detector = RMS (power averaging).
 - e. Sweep time = Auto couple,
 - f. Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
 - g. Use the peak marker function to determine the maximum PSD level
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

3.5.5 Deviation from Test Standard

No deviation.


3.5.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.5.7 Test Results

BLE-1Mbps		Power Density	
Test Channel	Channel Frequency	Test Result (dBm/10kHz)	Limit (dBm/3kHz)
0	2402MHz	-6.88	<8
19	2440MHz	-7.36	<8
39	2480MHz	-7.16	<8

BLE-2Mbps		Power Density	
Test Channel	Channel Frequency	Test Result (dBm/10kHz)	Limit (dBm/3kHz)
1	2404MHz	-9.96	<8
19	2440MHz	-10.46	<8
38	2478MHz	-10.28	<8

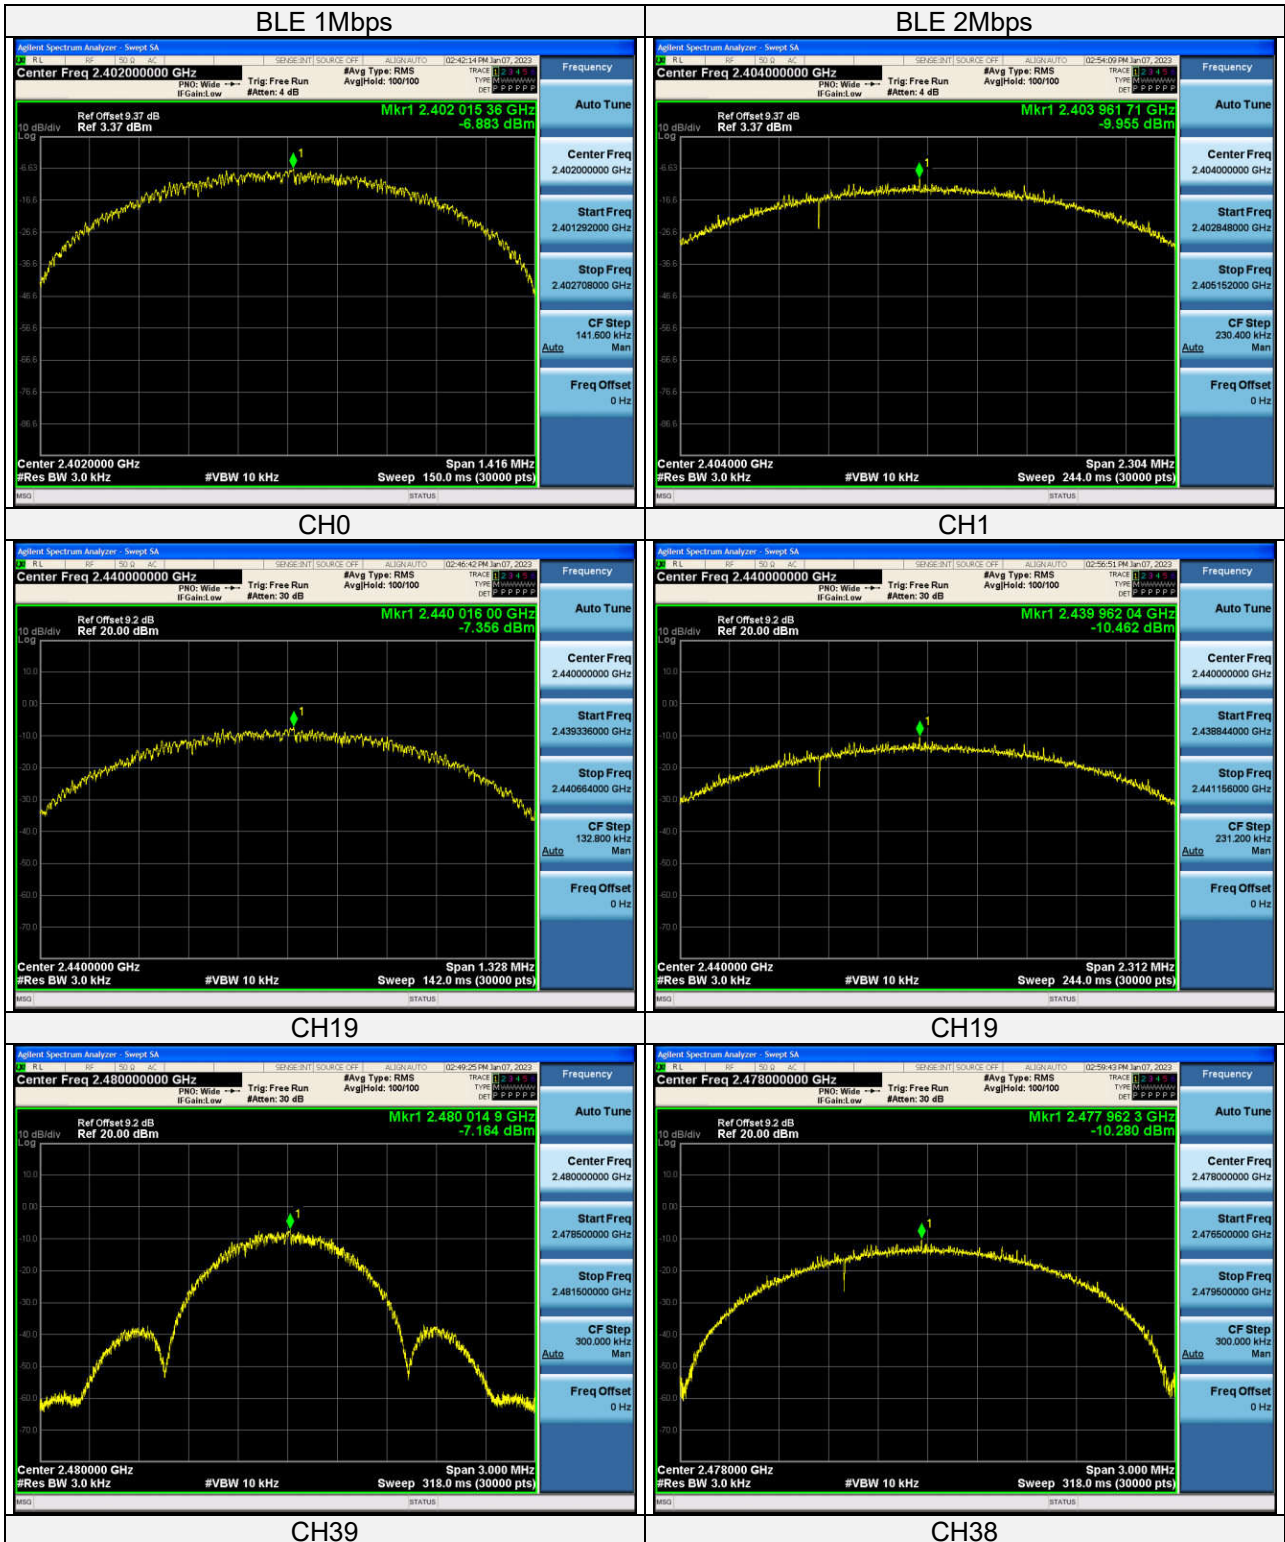


3.6 Conducted Out of Band Emission Measurement

3.6.1 Limits of Conducted Out of Band Emission Measurement

- a. **If the maximum peak conducted output power procedure was used to determine compliance as described in 11.9.1**, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b. **If maximum conducted (average) output power was used to determine compliance as described in 11.9.2**, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

3.6.2 Test Setup

- DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.
- DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable

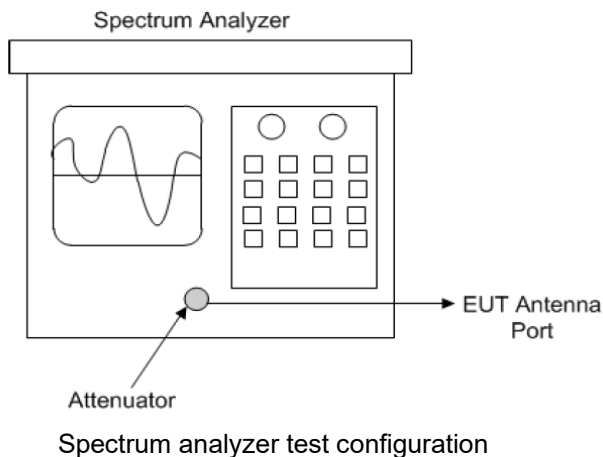

3.6.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.6.4 Test Procedure

a. Establish a reference level by using the following procedure:

- 1) Set instrument center frequency to DTS channel center frequency.
- 2) Set the span to 21.5 times the DTS bandwidth)
- 3) Set the RBW= 100 kHz)
- 4) Set the VBW $\geq 3 \times$ RBW
- 5) Detector = peak
- 6) Sweep time = auto coupling
- 7) Trace mode =max hold
- 8) Allow trace to fully stabilize
- 9) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

b. Establish an emission level by using the following procedure:

- 1) Set the center frequency and span to encompass frequency range to be measured.
- 2) Set the RBW = 100 kHz
- 3) Set the VBW ≥ 300 kHz.
- 4) Detector = peak.
- 5) Sweep time = auto couple.
- 6) Trace mode = max hold.
- 7) Allow trace to fully stabilize.
- 8) Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


3.6.5 Deviation from Test Standard


No deviation.


3.6.6 EUT Operating Condition


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 Test results

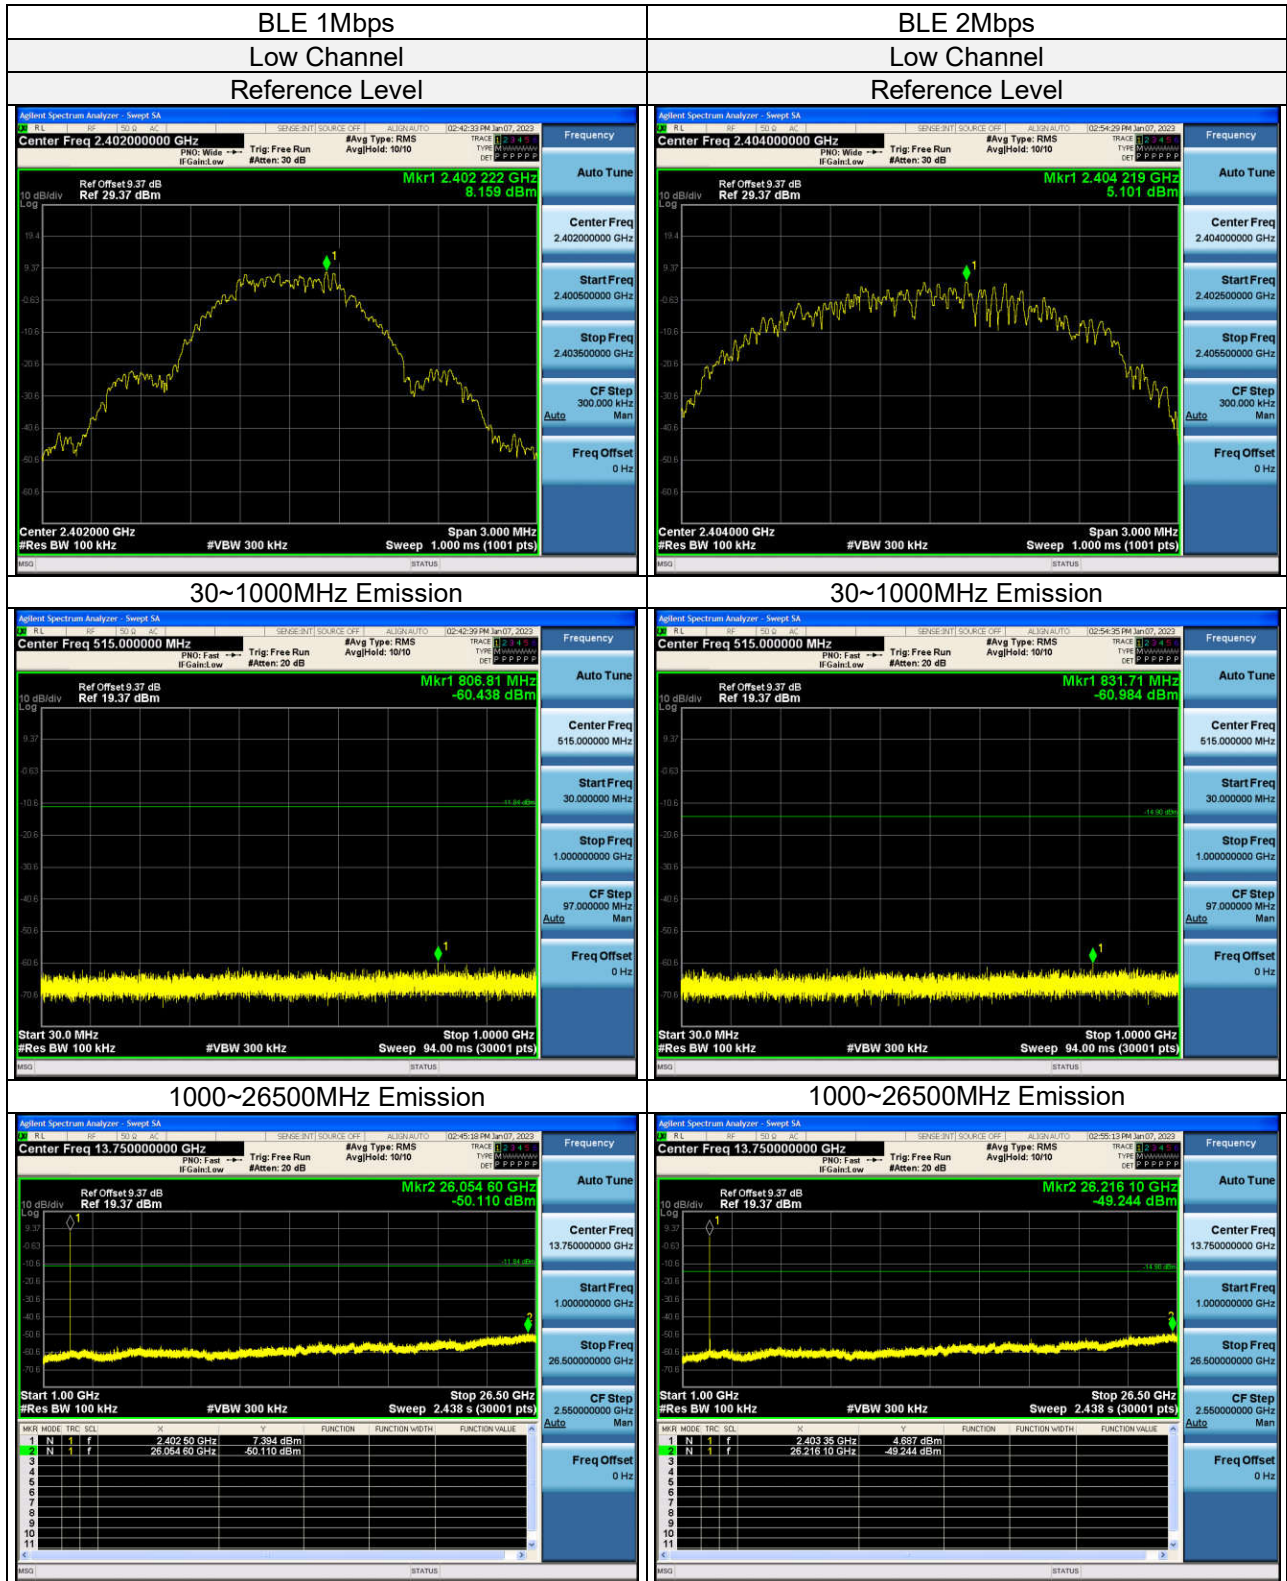

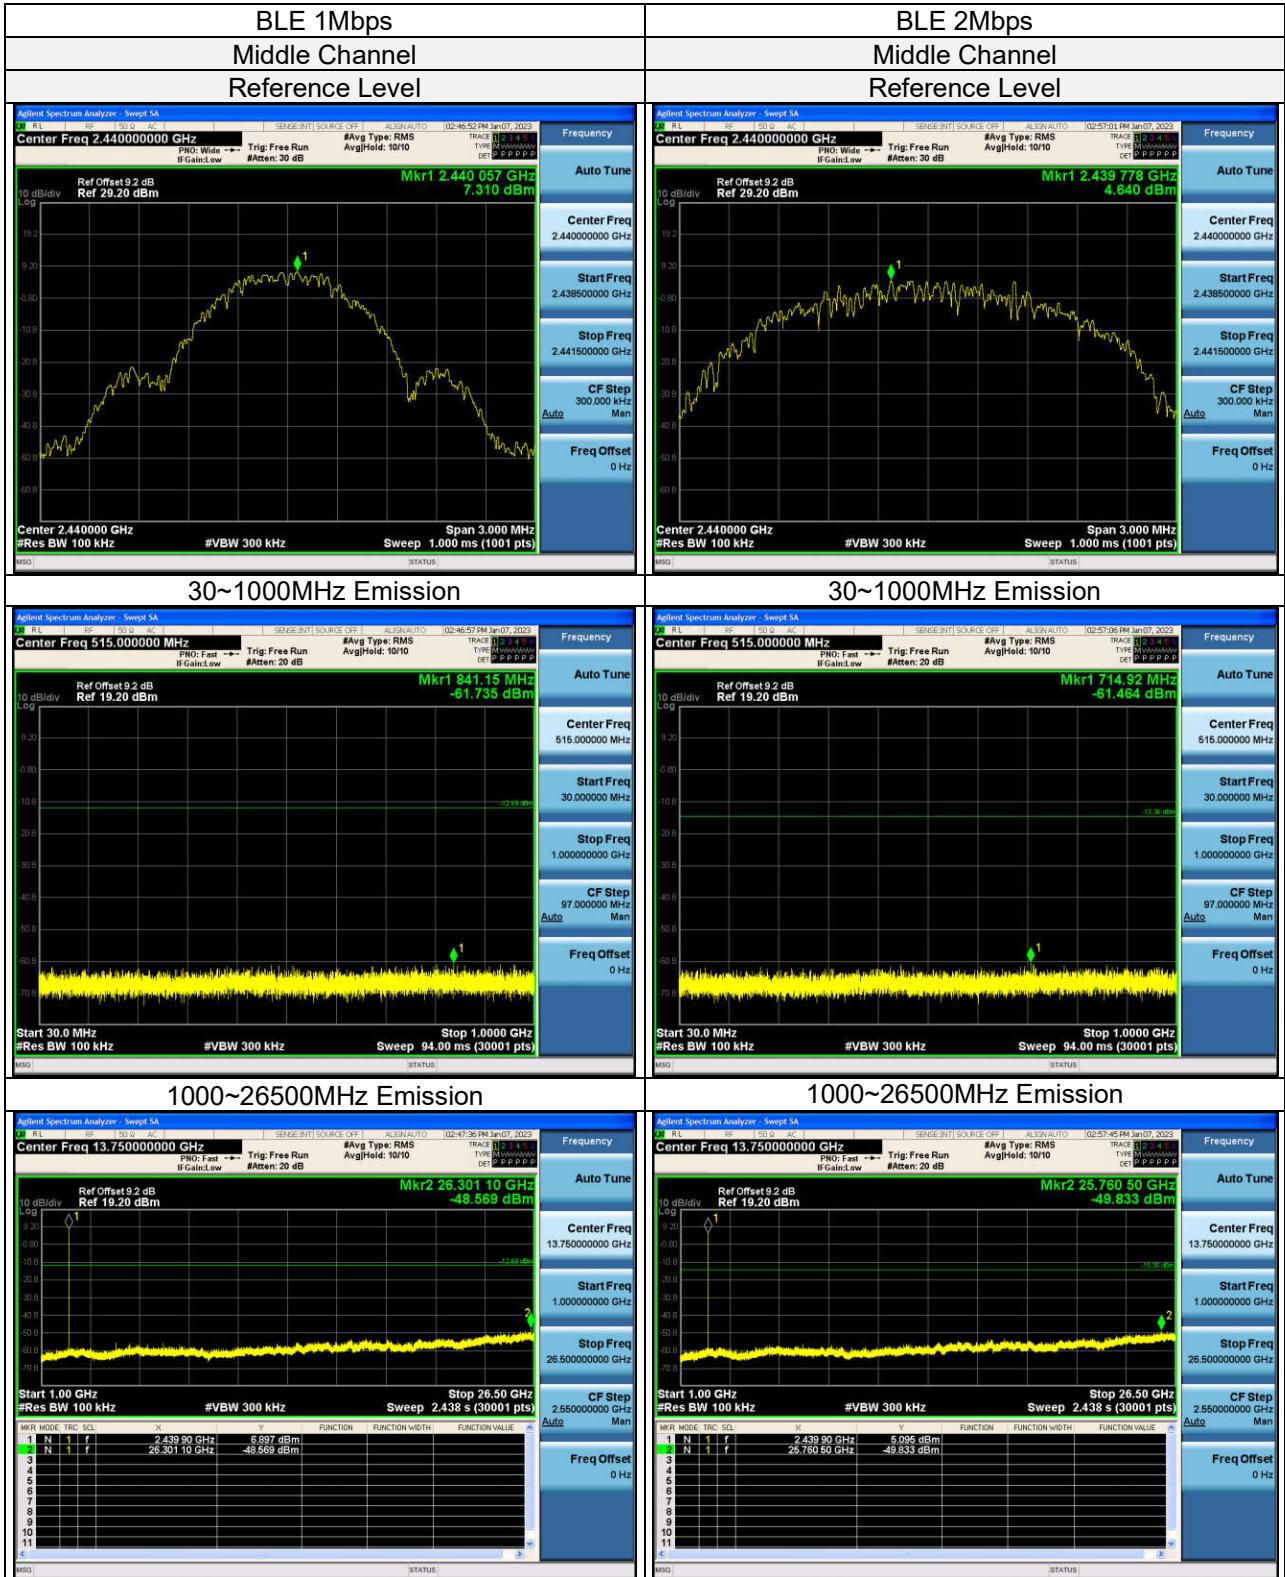

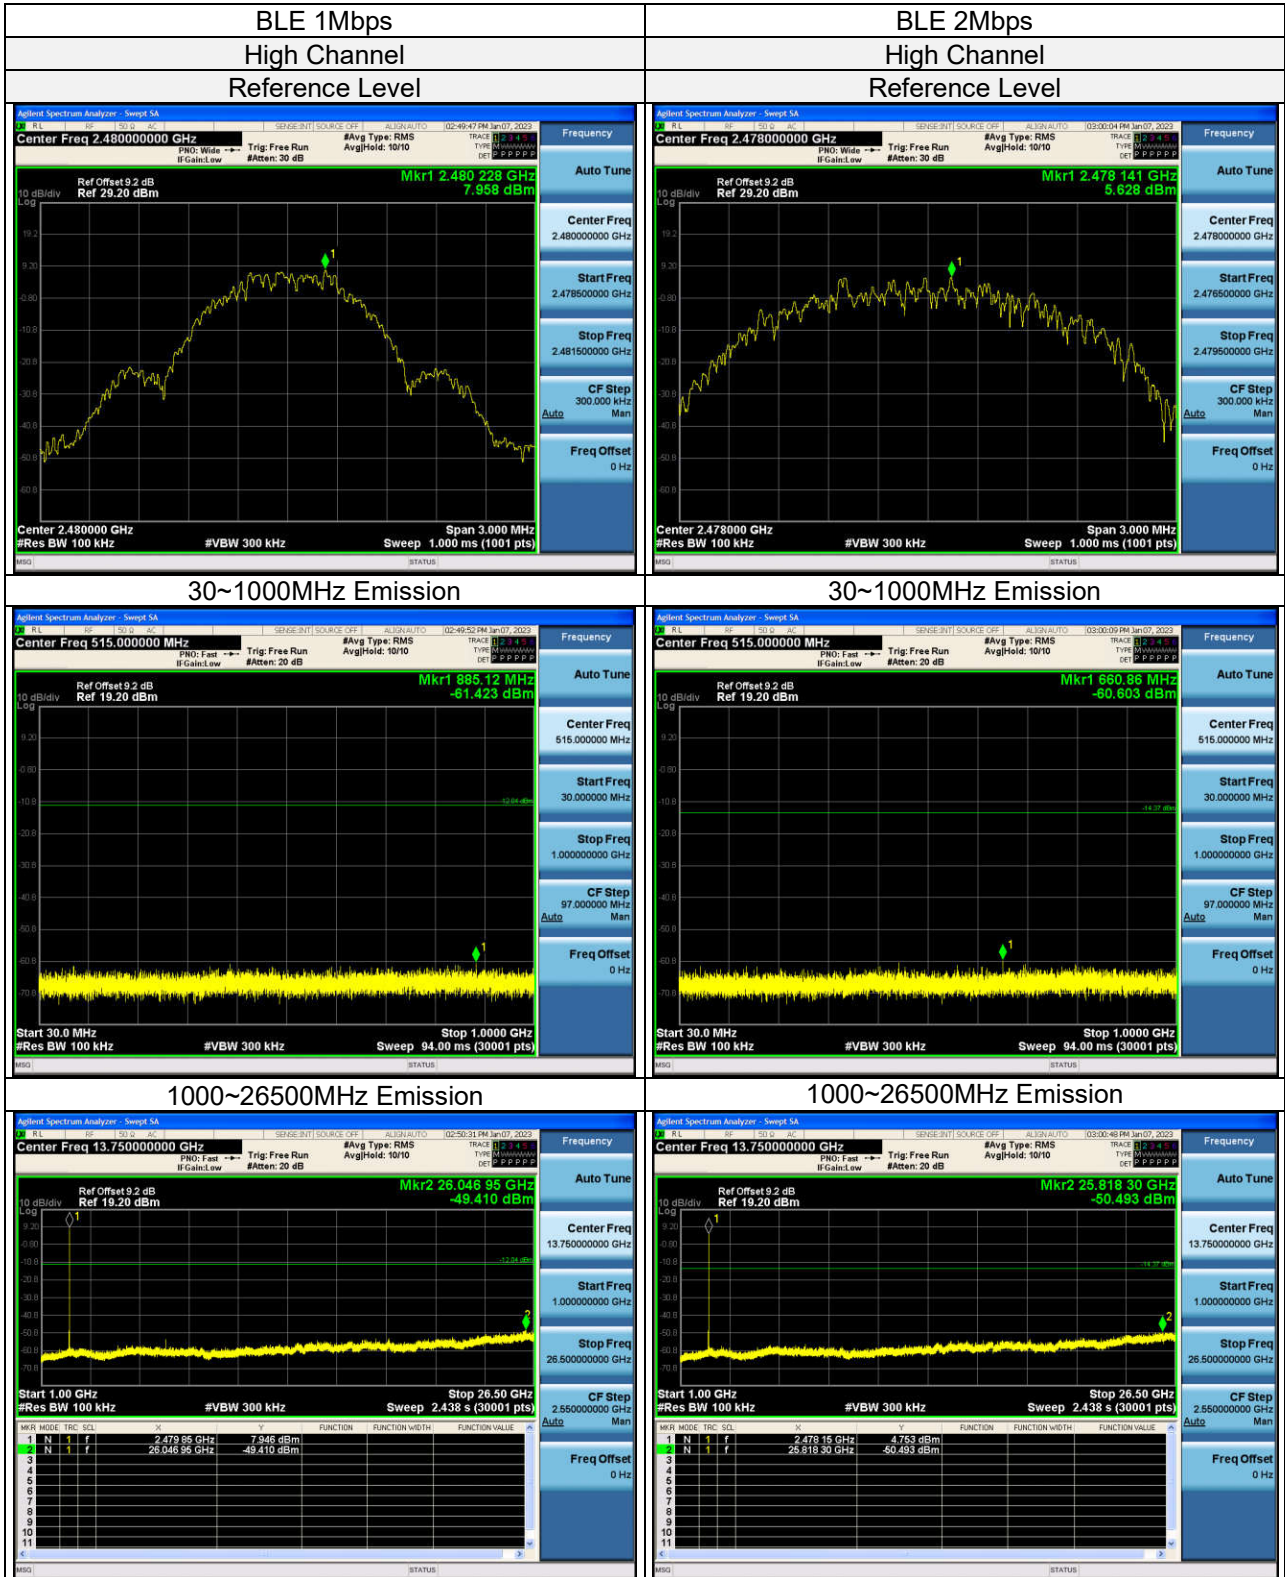

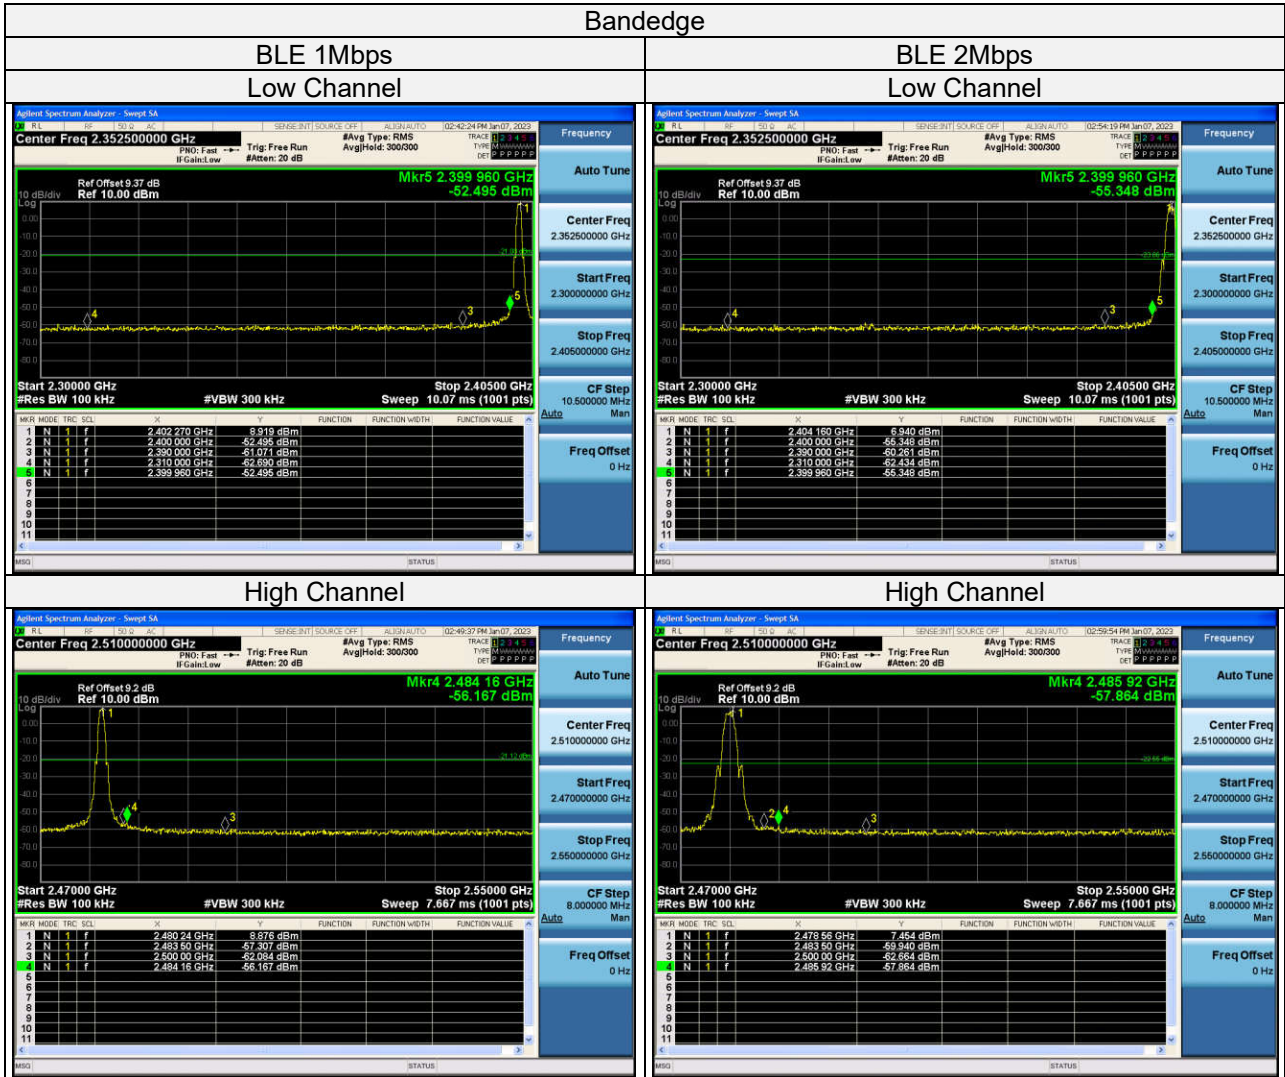

4. Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

5. Test Instruments

Description & Manufacturer	Model No.	Serial No.	Due Date of Calibration
Spectrum Analyzer Keysight	N9020A	MY51240612	2023-08-25
Spectrum Analyzer Rohde&Schwarz	FSV-40N	101783	2023-12-27
Power Meter 10Hz~18GHz Tonscend	JS0806-2	188060126	2023-08-25
Signal generator Keysight	E4421B	GB40051020	2023-08-25
Signal generator Keysight	N5182A	MY47420944	2023-08-25
Test Software Tonscend	JS0806-2	NA	NA
Hygrothermograph Yuhuaze	HTC-1	NA	2023-08-25

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.
2. The test was performed in Chamber 1.

Appendix – Information on The Testing Laboratories

We, [Hwa-Hsing \(Dongguan\) Testing Co., Ltd.](#), A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Contact Tel: [0769-83078199](tel:0769-83078199)

Email: Customerservice.dg@hwa-hsing.com

Web Site: www.hwa-hsing.com

--- END ---