



FCC Part 15, Subpart C Test Report

FCC ID: 2AAGF-STANMIIBT

Applicant: Zound Industries International AB

Address: Centralplan 15 SE-111 20 Stockholm Sweden

Manufacturer: Zound Industries International AB

Address: Centralplan 15 SE-111 20 Stockholm Sweden

Product: WIRELESS HOME BLUETOOTH SPEAKER

Brand: Marshall

Test Model(s): STANMORE II BT

Series Model(s): N/A

Test Date: Jan. 15, 2022 ~ Mar. 29, 2022

Issued Date: Apr. 11, 2022

Issued By: Hwa-Hsing (Dongguan) Testing Co., Ltd.

Address: No.101, Bld. N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China

Test Firm Registration No.: 915896

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Hwa-Hsing (Dongguan) Testing Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

Myrna Chen/ Report Engineer

Reviewed by :

Tank Tan/ Project Engineer

Approved by :

Harry Li/ Technical Director

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into the account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the federal government. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



Table of Contents

- Release Control Record 4**
- 1. Summary of Test Results 5**
 - 1.1 Measurement Uncertainty 5
 - 1.2 Modification Record 5
- 2. General Information 6**
 - 2.1 General Description of EUT 6
 - 2.2 Description of Test Channels 7
 - 2.3 Test Mode Applicability and Tested Channel Detail 7
 - 2.4 Duty Cycle of Test Signal 9
 - 2.5 Description of Support Units 10
 - 2.6 Configuration of System under Test 10
- 3. Test Types and Results 11**
 - 3.1 Radiated Emission and Band-edge Measurement 11
 - 3.1.1 Limits of radiated emission and band-edge measurement 11
 - 3.1.2 Test Instruments 12
 - 3.1.3 Test Procedures 13
 - 3.1.4 Deviation from Test Standard 14
 - 3.1.5 Test Setup 15
 - 3.1.6 EUT Operating Conditions 16
 - 3.1.7 Test Results 17
 - 3.2 Conducted Emission Measurement 29
 - 3.2.1 Limits of Conducted Emission Measurement 29
 - 3.2.2 Test Instruments 29
 - 3.2.3 Test Procedures 29
 - 3.2.4 Deviation from Test Standard 29
 - 3.2.5 Test setup 30
 - 3.2.6 EUT Operating Conditions 30
 - 3.2.7 Test Results 31
 - 3.3 6dB Bandwidth Measurement 33
 - 3.3.1 Limits of 6dB Bandwidth Measurement 33
 - 3.3.2 Test Setup 33
 - 3.3.3 Test Instruments 33
 - 3.3.4 Test Procedure 33
 - 3.3.5 Deviation from Test Standard 34
 - 3.3.6 EUT Operating Conditions 34
 - 3.3.7 Test Result 34
 - 3.4 Occupied Bandwidth Measurement 37
 - 3.4.1 Test Setup 37
 - 3.4.2 Test Instruments 37
 - 3.4.3 Test Procedure 37
 - 3.4.4 Deviation from Test Standard 37
 - 3.4.5 EUT Operating Conditions 37
 - 3.4.6 Test Results 38
 - 3.5 Conducted Output Power Measurement 41
 - 3.5.1 Limits of Conducted Output Power Measurement 41
 - 3.5.2 Test Setup 41
 - 3.5.3 Test Instruments 41
 - 3.5.4 Test Procedures 41
 - 3.5.5 Deviation from Test Standard 42
 - 3.5.6 EUT Operating Conditions 42
 - 3.5.7 Test Results 43



3.6	Power Spectral Density Measurement	46
3.6.1	Limits of Power Spectral Density Measurement.....	46
3.6.2	Test Setup	46
3.6.3	Test Instruments	46
3.6.4	Test Procedure	46
3.6.5	Deviation from Test Standard.....	47
3.6.6	EUT Operating Condition	47
3.6.7	Test Results.....	48
3.7	Conducted Out of Band Emission Measurement	51
3.7.1	Limits of Conducted Out of Band Emission Measurement.....	51
3.7.2	Test Setup	51
3.7.3	Test Instruments	51
3.7.4	Test Procedure	51
3.7.5	Deviation from Test Standard.....	52
3.7.6	EUT Operating Condition	52
3.7.7	Test results	53
4.	Pictures of Test Arrangements	55
5.	Test Instruments.....	56
	Appendix – Information on The Testing Laboratories	57



Release Control Record

Issue No.	Description	Date Issued
220110EL08-RF-US-02	Original Release	Apr. 11, 2022



1. Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247) KDB 558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10:2013			
Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit.
15.205 & 209	Radiated Emissions	Pass	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	Pass	Meet the requirement of limit.
15.247(d)	Antenna Port Emission	Pass	Meet the requirement of limit.
15.247(a)(2)	6dB Bandwidth	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	Pass	Reference only
15.247(b)	Conducted power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	No antenna connector is used. The device is professionally installed

Note: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

1.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The listed uncertainties are the worst cases uncertainty for the entire range of measurement. Please note that the uncertainty values are provided for informational purposes only and are not used in determining the PASS/FAIL results.

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.66 dB
Radiated Emissions up to 1 GHz	9KHz ~ 30MHz	2.16 dB
	30MHz ~ 1000MHz	3.47 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	4.84 dB
	18GHz ~ 40GHz	4.67 dB

1.2 Modification Record

There were no modifications required for compliance.



2. General Information

2.1 General Description of EUT

Product	WIRELESS HOME BLUETOOTH SPEAKER
Brand	Marshall
Test Model(s)	STANMORE II BT
Series Model(s)	N/A
Status of EUT	Engineering Prototype
Power Supply Rating	100-240V~,50/60Hz,60W
Modulation Type	BT-LE(GFSK)
Transfer Rate	1 Mbps
Operating Frequency	2402 ~ 2480MHz
Number of Channel	40
Maximum Output Power	7.08dBm
Antenna Type	FPCB Antenna
Antenna Gain	4.82dBi Maximum peak Gain
Antenna Connector	I-PEX
Accessory Device	N/A
Data Cable Supplied	AC Cable: Unshielded, Detachable,180cm

Note:

1. Please refer to the EUT photo document (Reference No.: 220110EL08-1&-2) for detailed product photo.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



2.2 Description of Test Channels

40 channels are provided to this EUT:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

2.3 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable test items	X-Axis	Y-Axis	Z-Axis	Voltage Supply
Radiated	AC Power Conducted Emission	N/A	N/A	N/A	AC120V/60Hz
Radiated	Radiated Emissions	√	√	√	
Antenna Port Conducted Measurement	Band Edge Measurement	N/A	N/A	N/A	
	Antenna Port Emission	N/A	N/A	N/A	
	6dB Bandwidth	N/A	N/A	N/A	
	Occupied Bandwidth Measurement	N/A	N/A	N/A	
	Conducted power	N/A	N/A	N/A	
	Power Spectral Density	N/A	N/A	N/A	

- *: The EUT had been pre-tested on the positioned of each 3 Axis. The worst case was found when positioned on **Z-plane**.
- "N/A" means no effect.

Test Condition:

Applicable test items	Environmental Conditions	Power supply	Tested by
AC Power Conducted Emission	22.2deg. C, 56%RH	AC120V/60Hz	King Ye
Radiated Emissions	22.2deg. C, 56%RH	AC120V/60Hz	Jim Xu
Antenna Port Conducted Measurement	25deg. C, 65%RH	AC120V/60Hz	Dragon Long



- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
Following channel(s) was (were) selected for the final test as listed below.

Radiated Emission Test (Above 1GHz):

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1
-	0 to 39	0, 19, 39	GFSK	2

Radiated Emission Test (Below 1GHz):

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0	GFSK	1

Power Line Conducted Emission Test:

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1

Antenna Port Conducted Measurement:



*This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

EUT Configure Mode	Available Channel	Tested Channel	Modulation Type	Data Rate (Mbps)
-	0 to 39	0, 19, 39	GFSK	1
-	0 to 39	0, 19, 39	GFSK	2



2.4 Duty Cycle of Test Signal

Test Mode	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
GFSK-1MHz	2402	2.14	2.50	85.60
	2440	2.14	2.50	85.60
	2480	2.14	2.50	85.60
GFSK-2MHz	2402	1.08	1.87	57.75
	2440	1.08	1.87	57.75
	2480	1.08	1.87	57.75

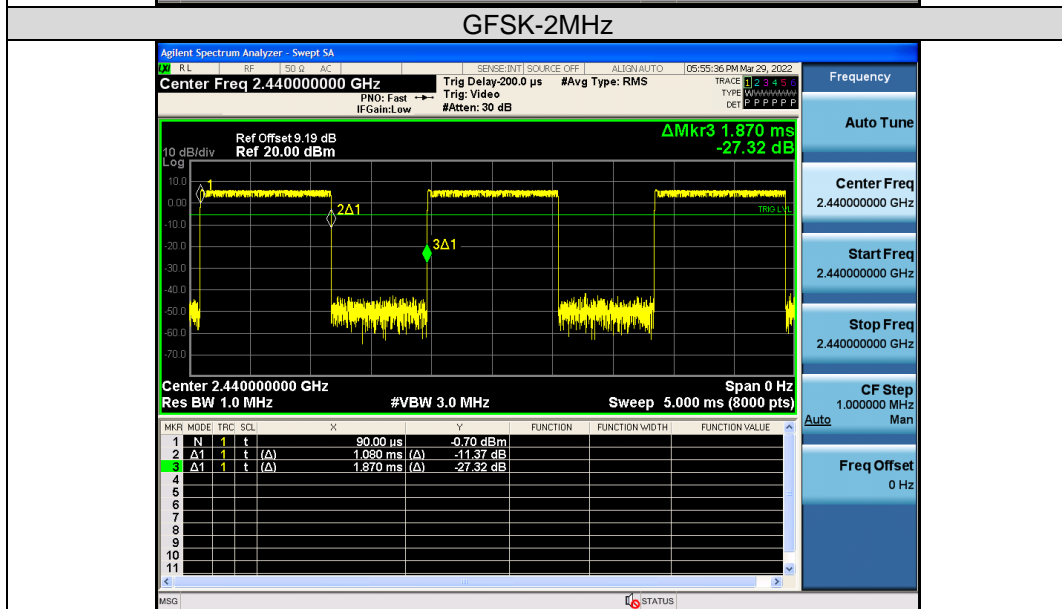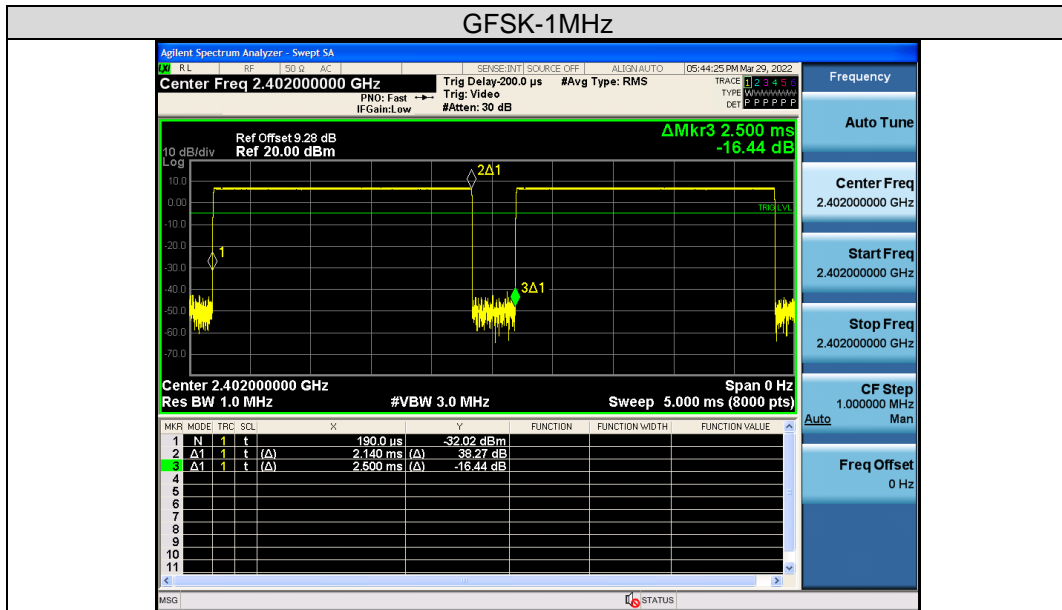



2.5 Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	Lenovo	ThinkPad X280	SL10P97665	N/A

Insert Cable Connections to/from EUT provided by test team.

No.	Signal Cable Description of The Above Support Units
1.	USB serial cable Un-shielding 1.0m

2.6 Configuration of System under Test

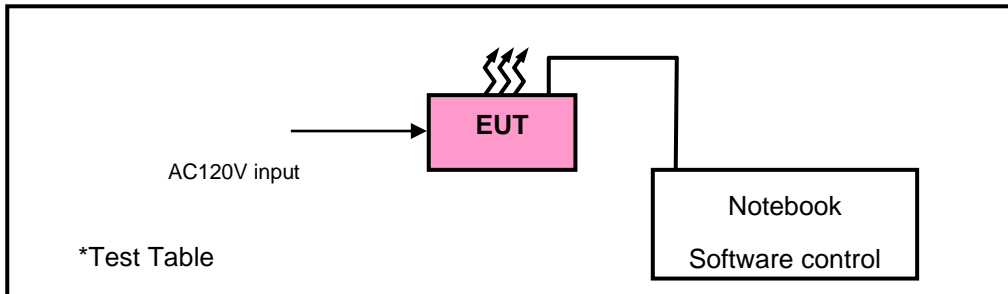



3. Test Types and Results

3.1 Radiated Emission and Band-edge Measurement

3.1.1 Limits of radiated emission and band-edge measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

* DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.
* DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



3.1.2 Test Instruments

Radiated emission below 30MHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI 7	100962	2022/09/12
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2022/04/14
Test software	FARAD	FARAD	EZ_EMCV1.1.4.2	N/A
Loop Antenna	EMCI	HLA 6121	45745	2022/04/13
Preamplifier	EMCI	EMC001340	980201	2022/09/12
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range below 1GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI 7	100962	2022/09/12
Broadband antenna	Schwarzbeck	VULB 9168	00937	2022/04/15
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2022/04/14
Signal Amplifier	Com-power	PAM-103	18020051	2023/01/14
Attenuator	Rohde&Schwarz	TS2GA-6dB	18101101	N/A
Test software	FARAD	FARAD	EZ_EMCV1.1.4.2	N/A

Frequency Range 1-18GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2022/04/14
Horn Antenna	Schwarzbeck	BBHA 9170	01959	2022/04/15
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	00025	2022/04/14
Spectrum	Keysight	N9020A	MY51240612	2022/09/12
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

Frequency Range 18-40GHz:

Equipment	Manufacturer	Model No.	Serial No.	Next Cal.
3m Semi-anechoic Chamber	MAORUI	9m*6m*6m	NSEMC003	2022/04/14
Spectrum Analyzer	Rohde&Schwarz	FSV-40N	101783	2022/09/12
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170242	2022/04/15
Pre-Amplifier	EMCI	EMC 184045	980102	2022/06/14
Antenna Tower	MF	MFA-440H	NA	NA
Turn Table	MF	MFT-201SS	NA	NA
Antenna Tower&Turn Table Controller	MF	MF-7802	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12/24months and the calibrations are traceable to CEPREI/CHINA.
 2. The test was performed in 966.



3.1.3 Test Procedures

a. **Peak emission levels are measured by setting the instrument as follow:**

1) RBW&VBW setting as a function of frequency:

Frequency	RBW	VBW
9kHz~150kHz	200Hz	600Hz
0.15MHz~30MHz	9kHz	30kHz
30MHz~1000MHz	120kHz	300kHz
>1000MHz	1MHz	3MHz

- 2) Detector = peak.
- 3) Sweep time = auto.
- 4) Trace mode = max hold.
- 5) Allow sweeps to continue until the trace stabilizes (Note that the required measurement time may be lengthened for low-duty-cycle applications).

Note: If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement

b. **Average emission levels are measured by setting the instrument as follow:**

● **Trace averaging with continuous EUT transmission at full power**

If the EUT can be configured or modified to transmit continuously (D ≥ 98%), then the average emission levels shall be measured using the following method (with EUT transmitting continuously):

- 1) RBW=1 MHz (unless otherwise specified).
- 2) VBW ≥ 3 *RBW.
- 3) Detector =RMS
- 4) Sweep time = auto.
- 5) Perform a trace average of at least 100 traces.

● **Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction**

If continuous transmission of the EUT (D ≥ 98%) cannot be achieved and the duty cycle is constant (duty cycle variations are less than ±2%), then the following procedure shall be used

- 1) The EUT shall be configured to operate at the maximum achievable duty cycle.
- 2) Measure the duty cycle D of the transmitter output signal as described in 11.6.
- 3) RBW=1 MHz (unless otherwise specified).
- 4) VBW ≥ 3 *RBW.
- 5) Detector =RMS
- 6) Sweep time = auto.
- 7) Perform a trace average of at least 100 traces.

A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

*If power averaging (rms) mode was used in step 5). then the applicable correction factor is [10 10g (1/ D)], where D is the duty cycle.

**If linear voltage averaging mode was used in step f). then the applicable correction factor is [20 10g (1/D)], where D is the duty cycle.

***If a specific emission is demonstrated to be continuous (D > 98%) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that



● **Reduced VBW Averaging across ON and OFF times of the EUT transmissions with max hold**

If continuous transmission of the EUT ($D > 98\%$) cannot be achieved and the duty cycle is not constant (duty cycle variations exceed $\pm 2\%$), then the following procedure shall be used:

- 1) RBW = 1 MHz.
 - 2) VBW $\geq 1/T$.
 - 3) Detector = peak
 - 4) Sweep time = auto.
 - 5) Trace mode = max hold.
 - 6) Allow max hold to run for at least $[50 \times (1/D)]$ traces
- c. The EUT was placed on the top of a rotating table 0.8 meters (below 1GHz) / 1.5 meters (1-18GHz) / 1.5 meters (18-40GHz) above the reference ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The EUT was set 3 meters away from the interference-receiving antenna (Below 1GHz) & (Above 1-18GHz), which was mounted on the top of a variable-height antenna tower. The EUT was set 1 meter away from the interference-receiving antenna (18-40GHz).
- e. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- f. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- g. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- h. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth = 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth = $1/T$ for Average (Duty cycle $< 98\%$) detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is = 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


3.1.4 Deviation from Test Standard

No deviation.




3.1.5 Test Setup

Radiated emission below 30MHz:

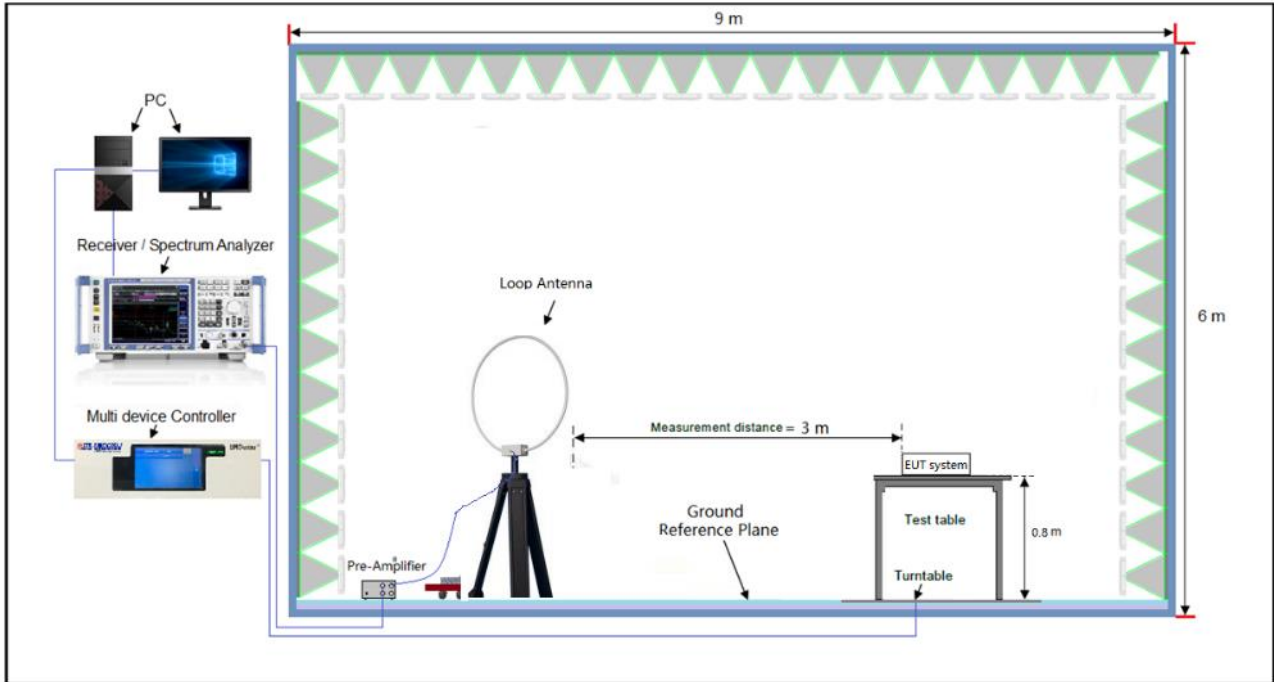


Frequency Range below 1GHz:

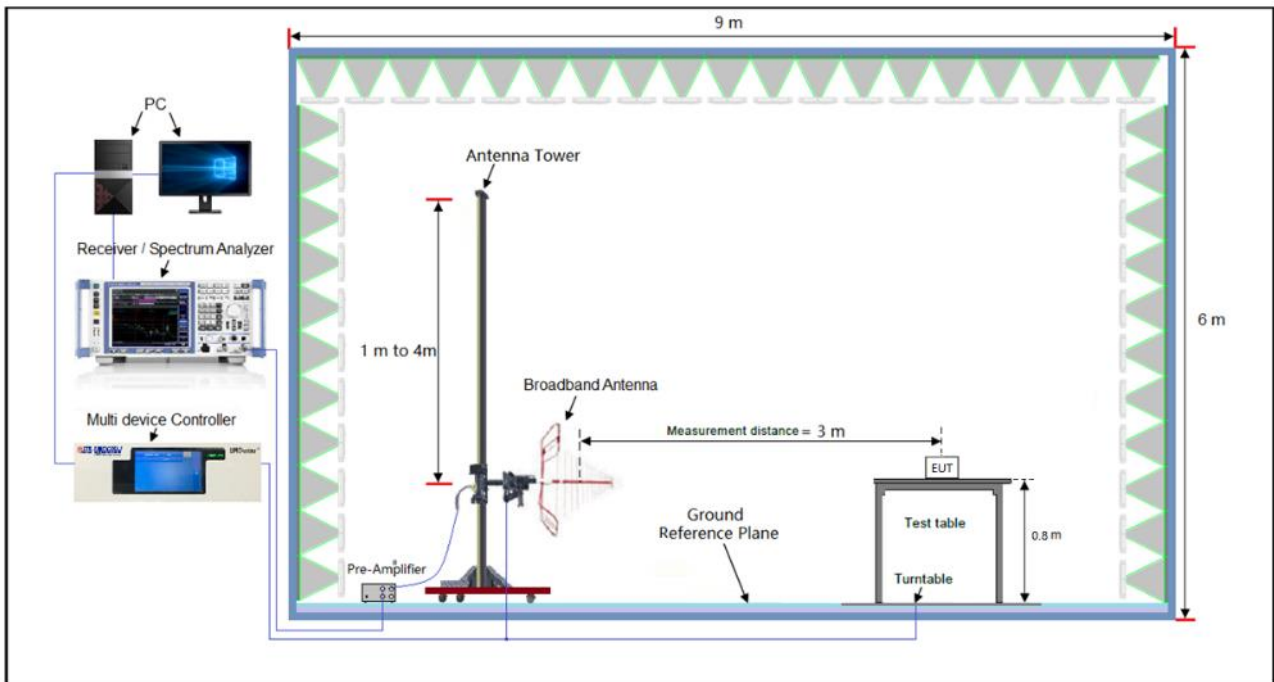




Frequency Range 1-18GHz:

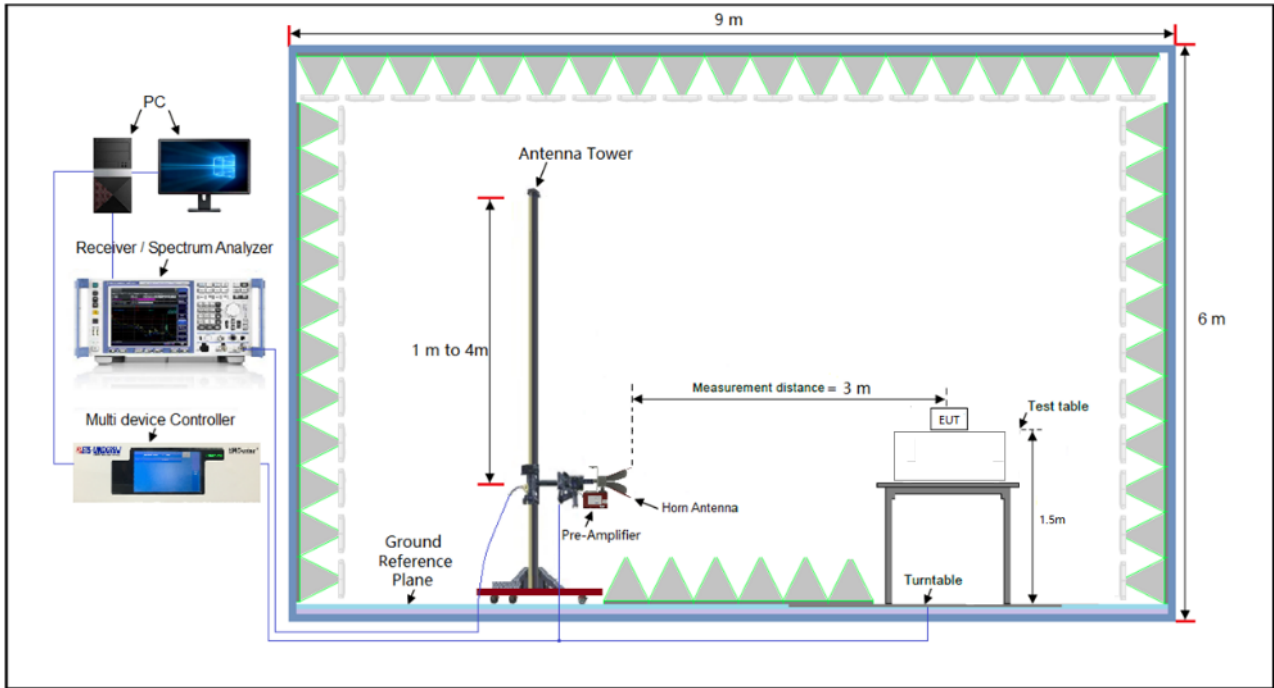

Frequency Range 18-40GHz:

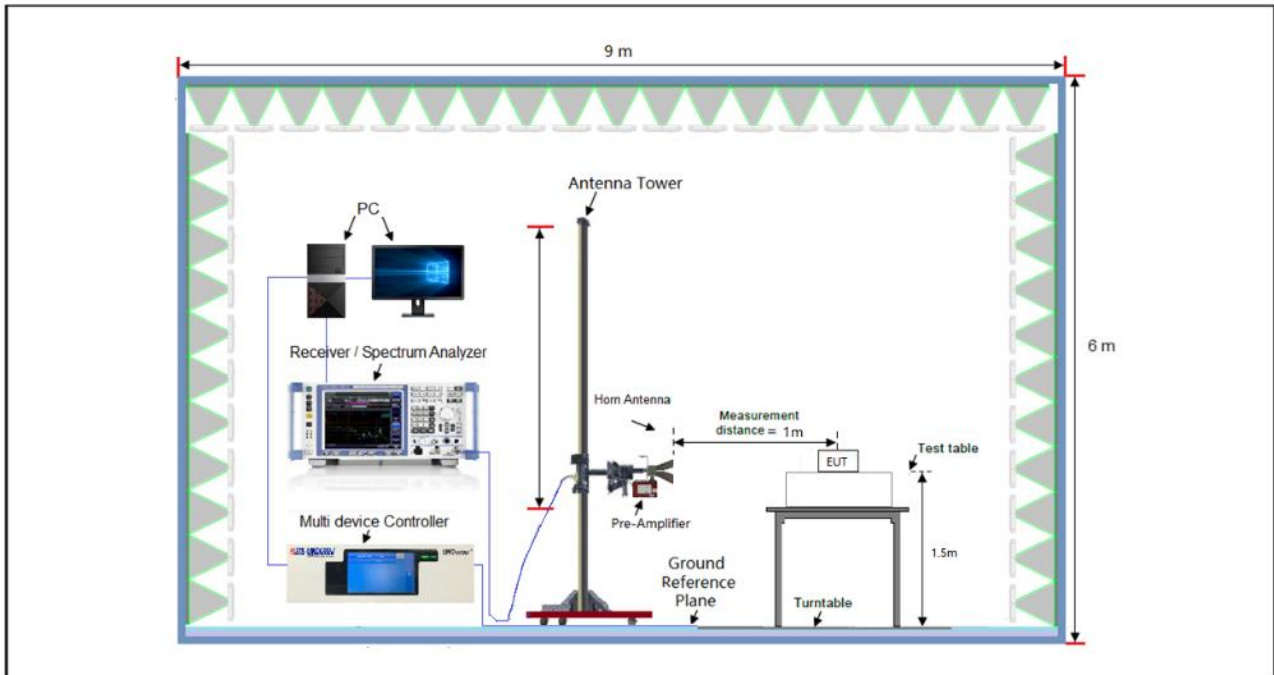

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT Operating Conditions

- a. Placed the EUT on the testing table.
- b. Set the EUT under transmission condition continuously at specific channel frequency.




3.1.7 Test Results

9kHz ~ 30MHz Data:

The amplitude of spurious emissions attenuated more than 20dB below the permissible value is not required to be report.

30MHz ~ 1GHz Worst-Case Data:

Test Channel	Channel 0	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Jim Xu

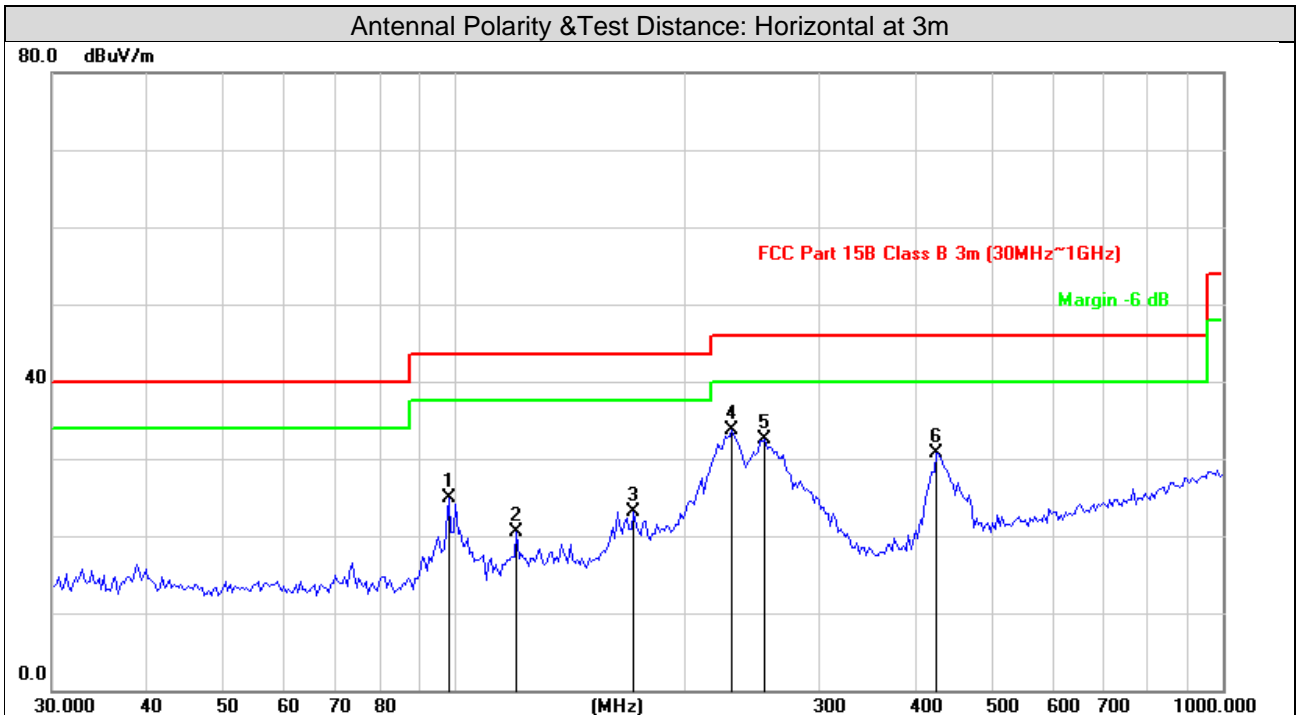

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	98.3752	42.47	-17.59	24.88	43.50	-18.62	peak	200	254
2	120.6118	36.48	-16.05	20.43	43.50	-23.07	peak	300	147
3	171.3890	35.98	-12.84	23.14	43.50	-20.36	peak	200	159
4	230.2295	49.46	-15.84	33.62	46.00	-12.38	peak	300	156
5	254.0312	47.68	-15.17	32.51	46.00	-13.49	peak	200	123
6	424.2999	41.79	-11.16	30.63	46.00	-15.37	peak	300	35


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value



Test Channel	Channel 0	Frequency Range	30MHz ~ 1GHz
Detector Function	Peak (PK) Quasi-peak (QP)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Vertical at 3m

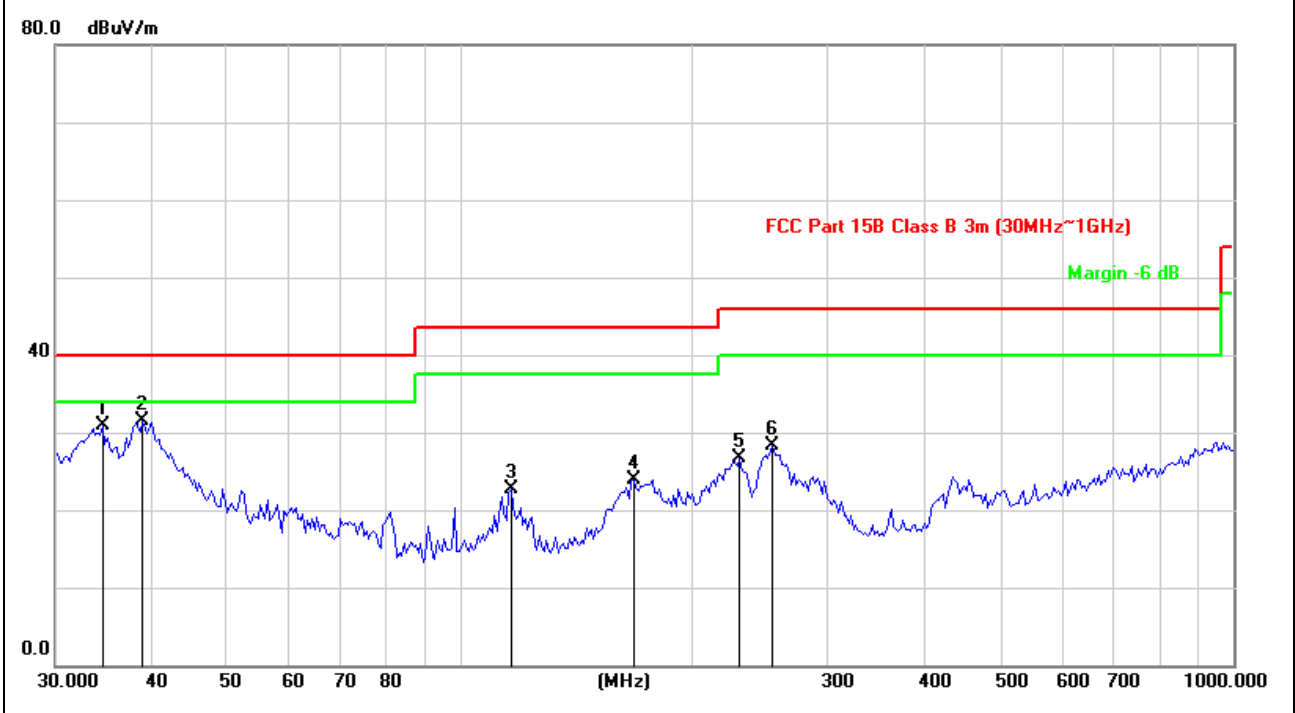

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	34.5270	47.65	-16.78	30.87	40.00	-9.13	peak	100	254
2	38.9081	48.31	-16.74	31.57	40.00	-8.43	peak	200	156
3	116.4476	39.19	-16.40	22.79	43.50	-20.71	peak	100	123
4	167.8136	36.62	-12.73	23.89	43.50	-19.61	peak	200	124
5	230.2295	42.62	-15.84	26.78	46.00	-19.22	peak	200	164
6	254.0312	43.40	-15.17	28.23	46.00	-17.77	peak	100	258


Remarks:

1. Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
2. Margin value = Emission level – Limit value



Above 1GHz Data:
BLE-1Mbps

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

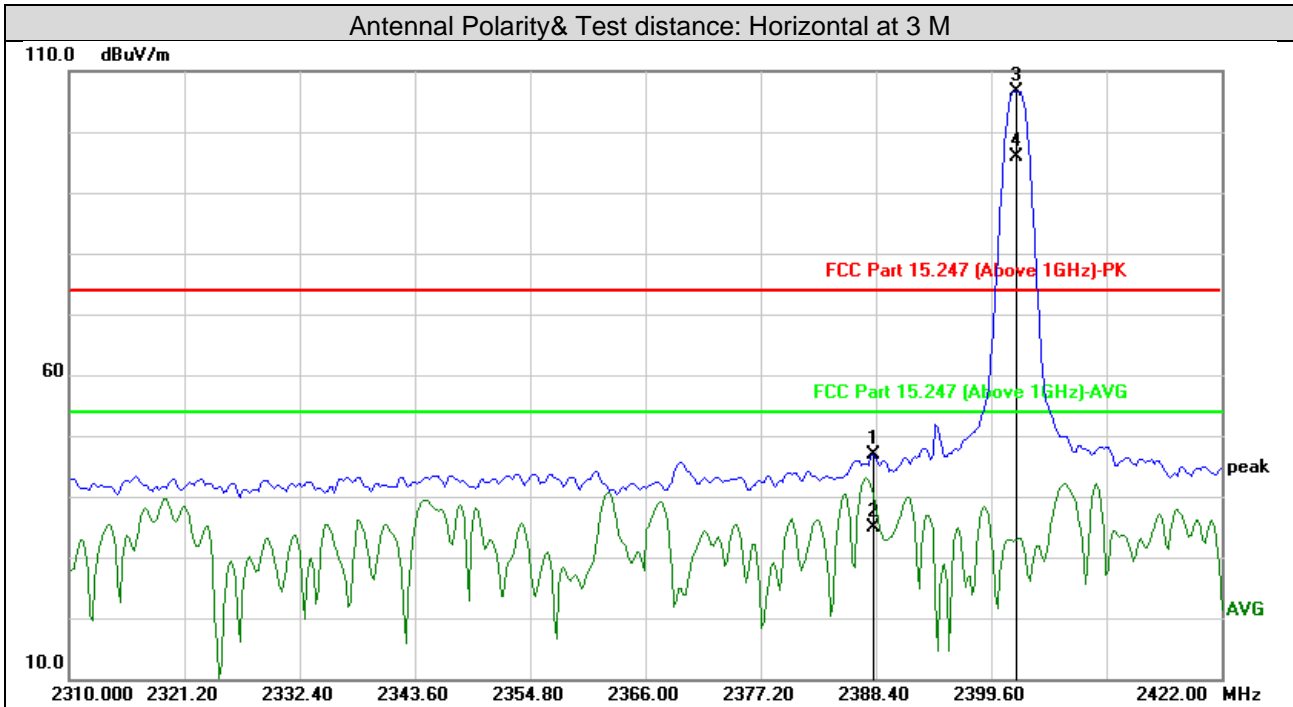


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2388.108	48.20	-1.30	46.90	74.00	-27.10	peak	100	176
2	2388.108	36.13	-1.30	34.83	54.00	-19.17	AVG	100	176
3 #	2402.024	107.96	-1.30	106.66			peak	100	176
4 #	2402.024	97.26	-1.30	95.96			AVG	100	176
5	4804.000	43.41	3.75	47.16	74.00	-26.84	peak	100	213
6	4804.000	35.37	3.75	39.12	54.00	-14.88	AVG	100	213
7	7206.000	46.38	8.14	54.52	74.00	-19.48	peak	198	231
8	7206.000	38.02	8.14	46.16	54.00	-7.84	AVG	198	231

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2402MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

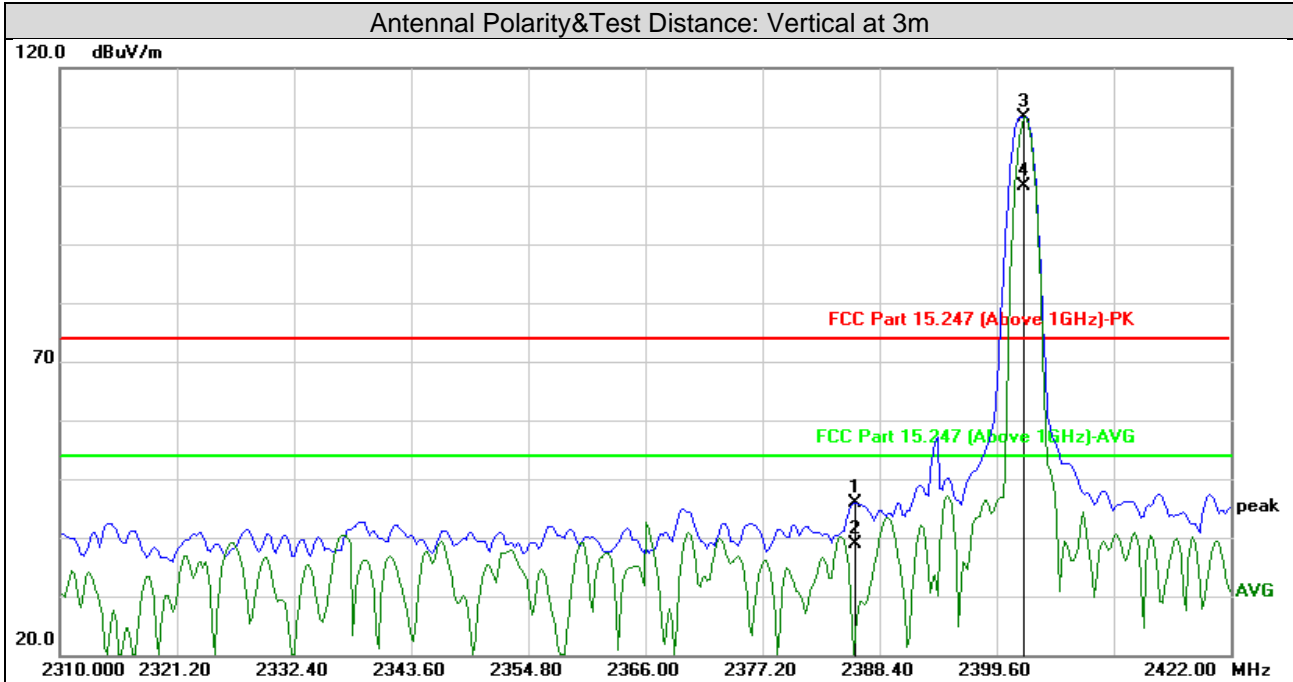

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2386.088	47.14	-1.30	45.84	74.00	-28.16	peak	100	312
2	2386.088	40.27	-1.30	38.97	54.00	-15.03	AVG	100	312
3 #	2402.249	112.97	-1.30	111.67			peak	100	312
4 #	2402.249	101.15	-1.30	99.85			AVG	100	312
5	4804.000	48.72	3.75	52.47	74.00	-21.53	peak	100	193
6	4804.000	41.34	3.75	45.09	54.00	-8.91	AVG	100	193
7	7206.000	45.82	8.14	53.96	74.00	-20.04	peak	100	252
8	7206.000	34.54	8.14	42.68	54.00	-11.32	AVG	100	252

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2402MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Test channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	107.07	-1.71	105.36			peak	164	215
2#	2440.000	76.04	-1.71	74.33			AVG	164	215
3	4880.000	51.21	3.97	55.18	74.00	-18.82	peak	100	146
4	4880.000	41.16	3.97	45.13	54.00	-8.87	AVG	100	146
5	7320.000	49.37	8.29	57.66	74.00	-16.34	peak	100	248
6	7320.000	37.90	8.29	46.19	54.00	-7.81	AVG	100	248


Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	110.97	-1.71	109.26			peak	248	169
2#	2440.000	76.07	-1.71	74.36			AVG	248	169
3	4880.000	50.81	3.97	54.78	74.00	-19.22	peak	100	278
4	4880.000	40.71	3.97	44.68	54.00	-9.32	AVG	100	278
5	7320.000	48.07	8.29	56.36	74.00	-17.64	peak	100	165
6	7320.000	39.36	8.29	47.65	54.00	-6.35	AVG	100	165

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2440MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

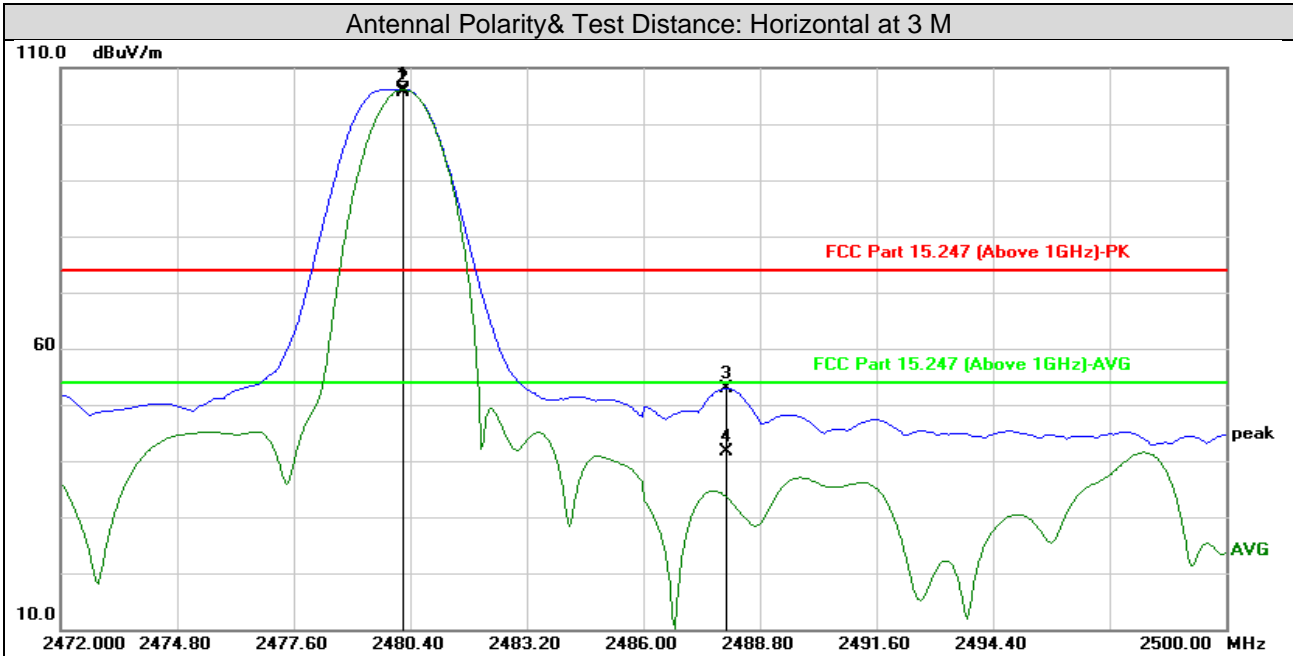


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2480.249	107.38	-1.24	106.14			peak	100	172
2#	2480.249	106.90	-1.24	105.66			AVG	100	172
3	2487.992	54.11	-1.25	52.86	74.00	-21.14	peak	100	172
4	2487.992	42.89	-1.25	41.64	54.00	-12.36	AVG	100	172
5	4960.000	47.92	4.20	52.12	74.00	-21.88	peak	224	224
6	4960.000	40.08	4.20	44.28	54.00	-9.72	AVG	224	224
7	7440.000	45.33	8.43	53.76	74.00	-20.24	peak	207	225
8	7440.000	37.97	8.43	46.40	54.00	-7.60	AVG	207	225

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2480MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

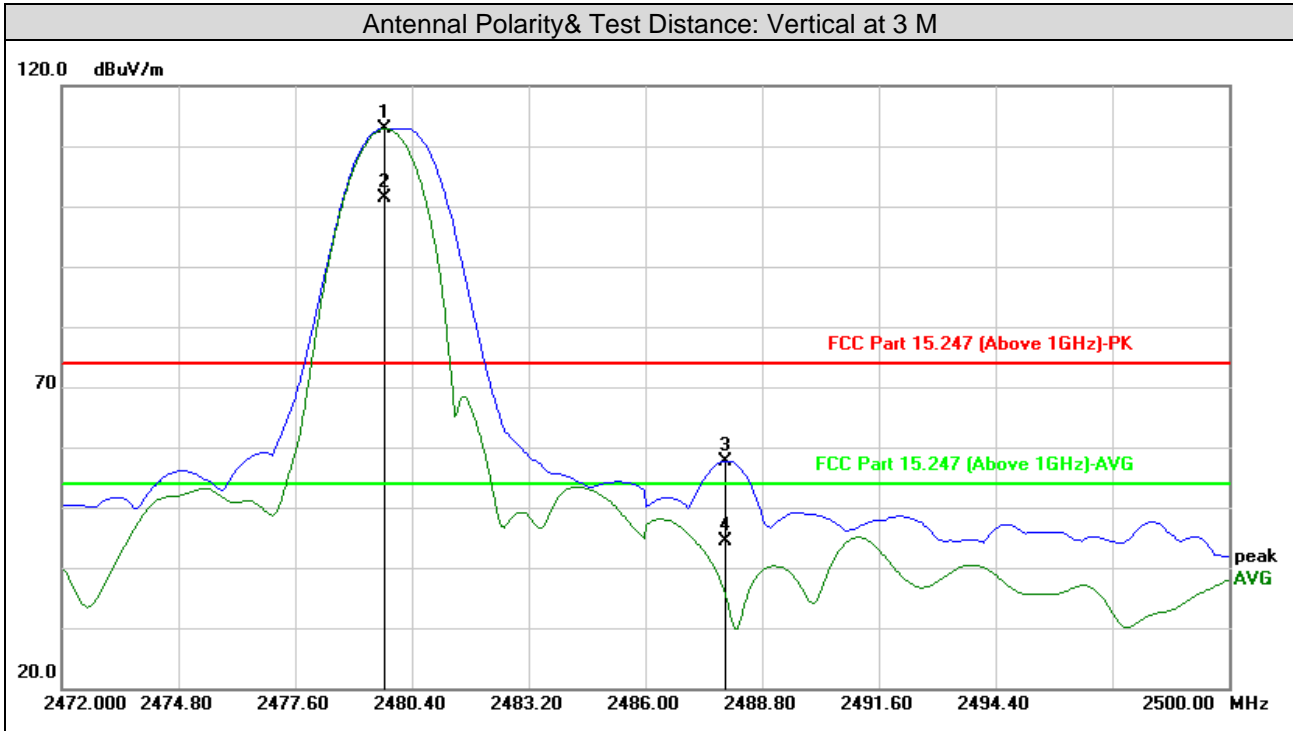

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.744	114.17	-1.24	112.93			peak	100	166
2#	2479.744	102.56	-1.24	101.32			AVG	100	166
3	2487.936	58.99	-1.25	57.74	74.00	-16.26	peak	100	166
4	2487.936	45.56	-1.25	44.31	54.00	-9.69	AVG	100	166
5	4960.000	48.66	4.20	52.86	74.00	-21.14	peak	189	189
6	4960.000	41.34	4.20	45.54	54.00	-8.46	AVG	189	189
7	7440.000	44.24	8.43	52.67	74.00	-21.33	peak	181	166
8	7440.000	35.05	8.43	43.48	54.00	-10.52	AVG	181	166


Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2480MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Above 1GHz Data:
BLE-2Mbps

Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

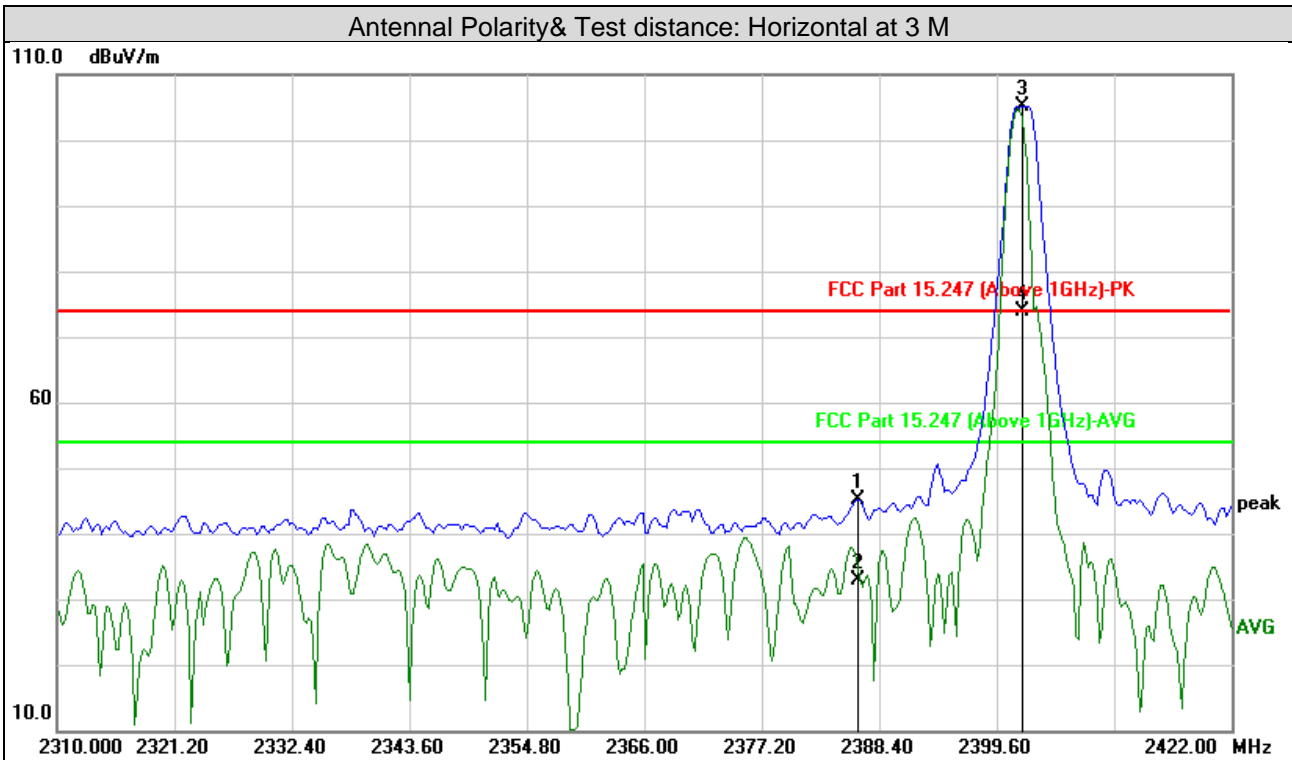


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2386.313	46.93	-1.73	45.20	74.00	-28.80	peak	100	178
2	2386.313	34.54	-1.73	32.81	54.00	-21.19	AVG	100	178
3#	2402.024	106.93	-1.73	105.20			peak	100	178
4#	2402.024	75.71	-1.73	73.98			AVG	100	178
5	4804.000	47.80	3.75	51.55	74.00	-22.45	peak	100	220
6	4804.000	34.48	3.75	38.23	54.00	-15.77	AVG	100	220
7	7206.000	46.63	8.14	54.77	74.00	-19.23	peak	100	192
8	7206.000	32.48	8.14	40.62	54.00	-13.38	AVG	100	192

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2402MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Test channel	Channel 0	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

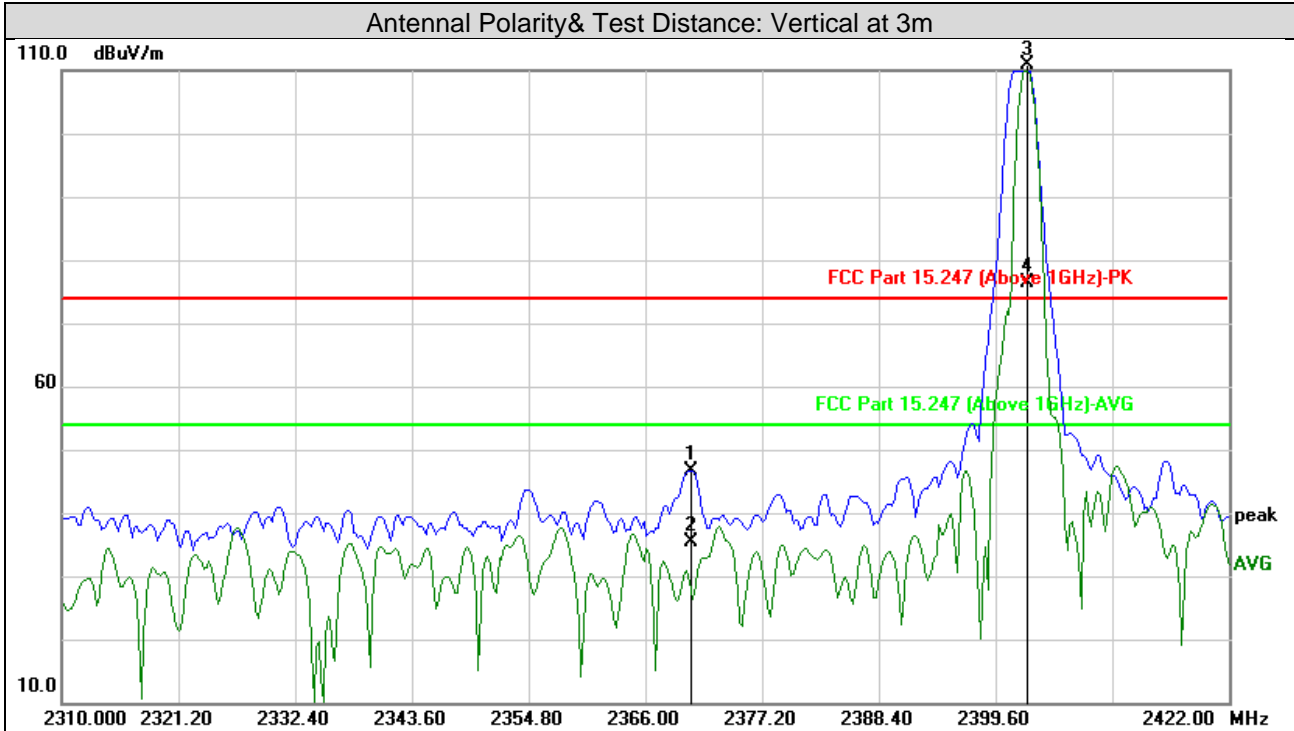

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1	2370.377	48.48	-1.74	46.74	74.00	-27.26	peak	100	312
2	2370.377	37.03	-1.74	35.29	54.00	-18.71	AVG	100	312
3#	2402.697	112.65	-1.73	110.92			peak	100	312
4#	2402.697	78.12	-1.73	76.39			AVG	100	312
5	4804.000	47.03	3.75	50.78	74.00	-23.22	peak	171	199
6	4804.000	34.47	3.75	38.22	54.00	-15.78	AVG	171	199
7	7206.000	44.89	8.14	53.03	74.00	-20.97	peak	100	246
8	7206.000	32.39	8.14	40.53	54.00	-13.47	AVG	100	246

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2402MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Test channel	Channel 19	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

Antennal Polarity& Test Distance: Horizontal at 3m									
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	109.03	-1.71	107.32			peak	211	134
2#	2440.000	76.85	-1.71	75.14			AVG	211	134
3	4880.000	51.00	3.97	54.97	74.00	-19.03	peak	100	285
4	4880.000	42.34	3.97	46.31	54.00	-7.69	AVG	100	285
5	7320.000	47.99	8.29	56.28	74.00	-17.72	peak	100	216
6	7320.000	36.87	8.29	45.16	54.00	-8.84	AVG	100	216


Antennal Polarity& Test Distance: Vertical at 3 M									
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2440.000	112.96	-1.71	111.25			peak	146	78
2#	2440.000	76.40	-1.71	74.69			AVG	146	78
3	4880.000	51.17	3.97	55.14	74.00	-18.86	peak	100	206
4	4880.000	41.01	3.97	44.98	54.00	-9.02	AVG	100	206
5	7320.000	46.93	8.29	55.22	74.00	-18.78	peak	100	174
6	7320.000	38.46	8.29	46.75	54.00	-7.25	AVG	100	174

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2440MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

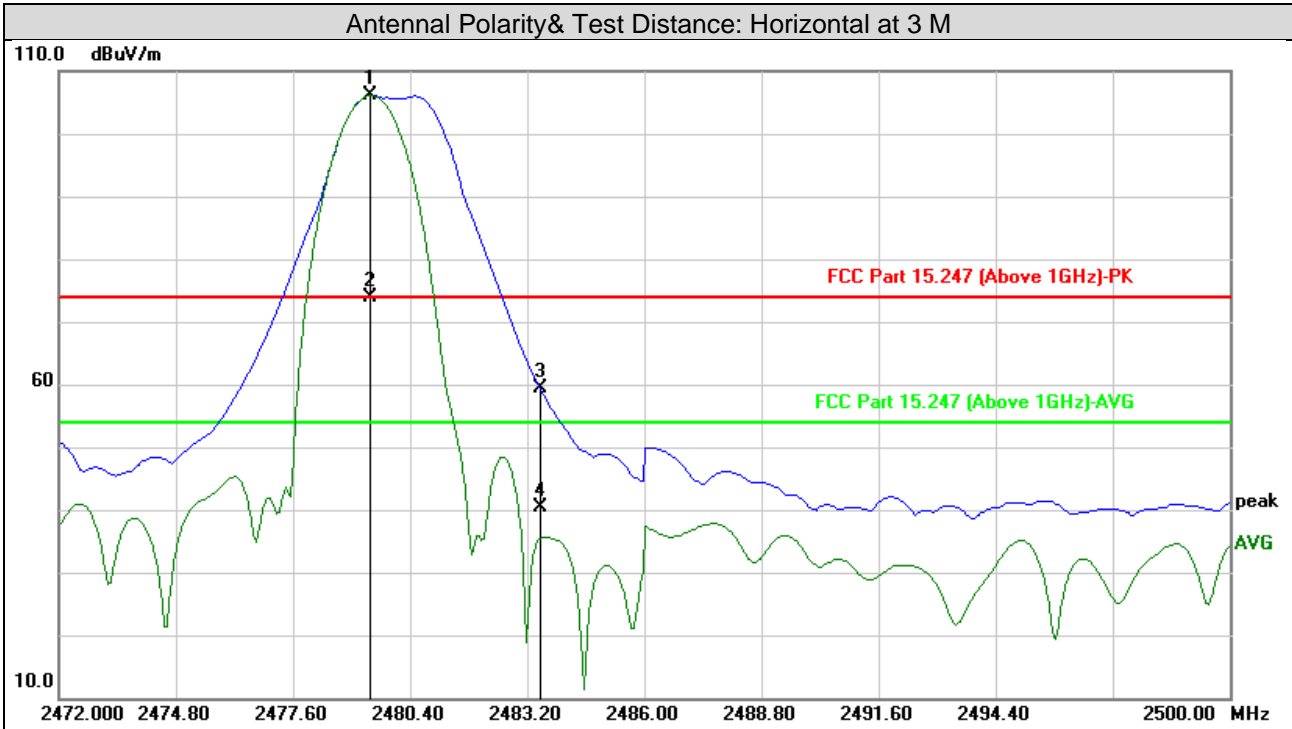


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.463	107.79	-1.68	106.11			peak	100	182
2#	2479.463	75.44	-1.68	73.76			AVG	100	182
3	2483.500	61.11	-1.69	59.42	74.00	-14.58	peak	100	182
4	2483.500	42.17	-1.69	40.48	54.00	-13.52	AVG	100	182
5	4960.000	47.63	4.20	51.83	74.00	-22.17	peak	225	224
6	4960.000	33.97	4.20	38.17	54.00	-15.83	AVG	225	224
7	7440.000	46.57	8.43	55.00	74.00	-19.00	peak	287	245
8	7440.000	33.73	8.43	42.16	54.00	-11.84	AVG	287	245

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2480MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



Test channel	Channel 39	Frequency Range	1GHz ~ 25GHz
Detector Function	Peak (PK) Average (AVG)	Tested By	Jim Xu

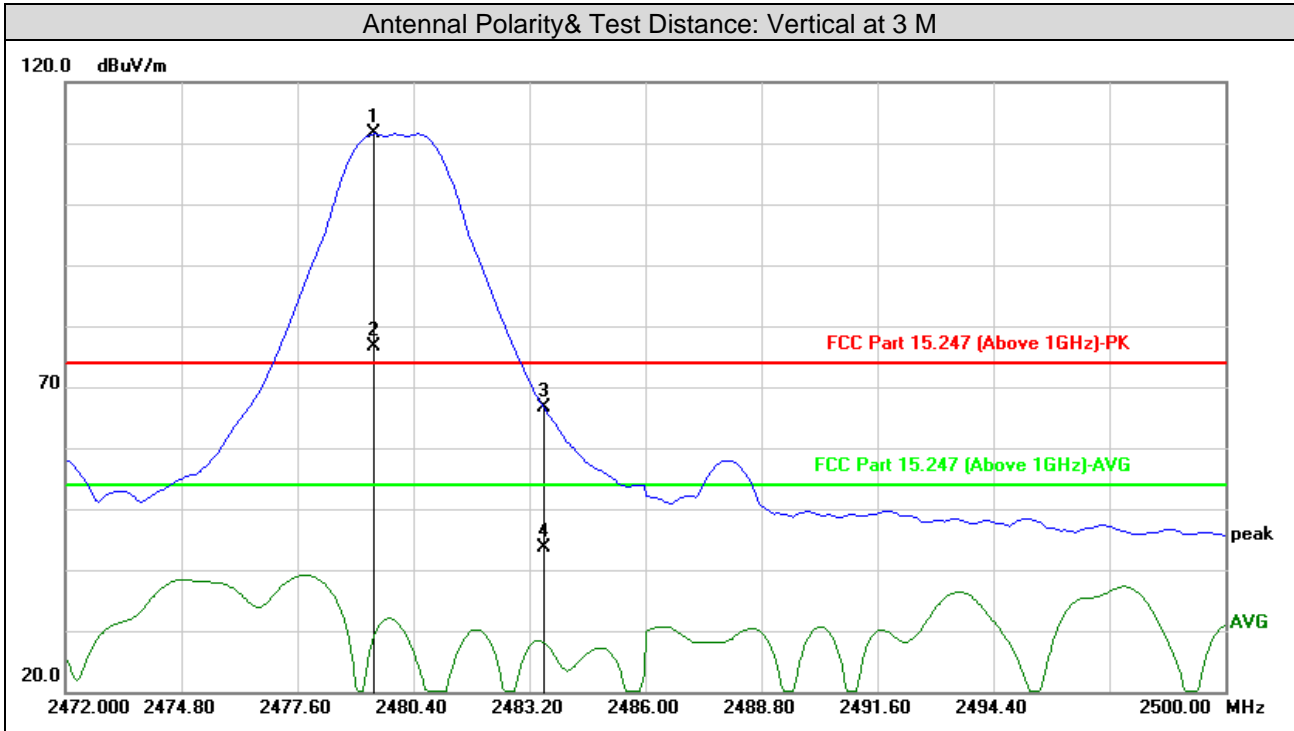

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Antenna Height (cm)	Table Angle (Degree)
1#	2479.463	113.20	-1.68	111.52			peak	180	166
2#	2479.463	78.36	-1.68	76.68			AVG	180	166
3	2483.559	68.21	-1.69	66.52	74.00	-7.48	peak	180	166
4	2483.559	45.30	-1.69	43.61	54.00	-10.39	AVG	180	166
5	4960.000	48.34	4.20	52.54	74.00	-21.46	peak	189	188
6	4960.000	34.81	4.20	39.01	54.00	-14.99	AVG	189	188
7	7440.000	43.60	8.43	52.03	74.00	-21.97	peak	204	168
8	7440.000	34.04	8.43	42.47	54.00	-11.53	AVG	204	168

Remarks:

- Emission Level = Read Level + Factor (Antenna Factor + Cable Loss - Preamp Factor)
Margin value = Emission level – Limit value
- #2480MHz: Fundamental frequency.
- The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.



3.2 Conducted Emission Measurement

3.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

- Note: 1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Due Date of Calibration
EMI Test Receiver Rohde&Schwarz	ESC13	101418	2022/09/12
Artificial Mains Network Rohde&Schwarz	ENV216	3560.6550.15	2022/09/12
Test software FARAD	EZ_EMC V1.1.4.2	N/A	N/A
Hygrothermograph Yuhuaze	HTC-1	NA	2022/09/12
Digital Multimeter FLUKE	15B+	43512617WS	2022/09/12

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.
 2. The test was performed in Shielded Room 1.

3.2.3 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

Note: All modes of operation were investigated and the worst-case emissions are reported.


3.2.4 Deviation from Test Standard

No deviation.



3.2.7 Test Results

Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Power supply	AC120V/60Hz	Environmental Conditions	25°C, 60%RH

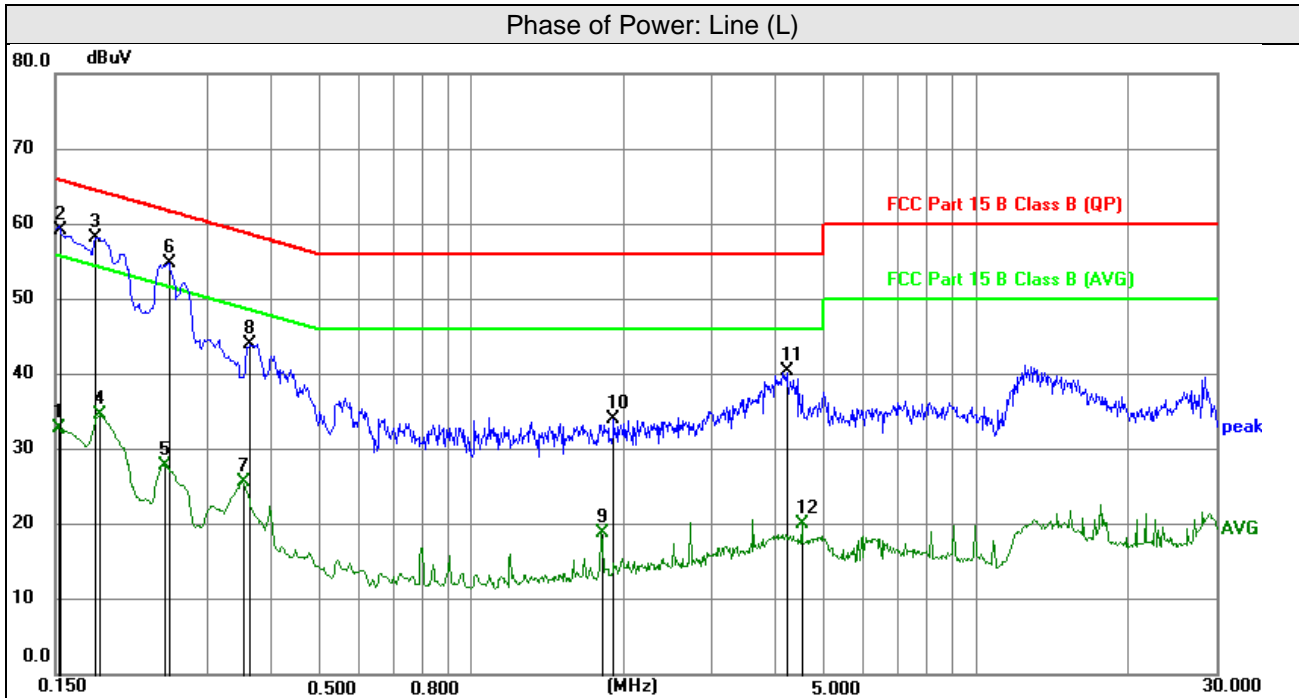


No	Frequency (MHz)	Reading (dBuV)	Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1522	22.69	10.18	32.87	55.88	-23.01	AVG
2	0.1532	49.06	10.18	59.24	65.82	-6.58	peak
3	0.1793	48.07	10.16	58.23	64.52	-6.29	peak
4	0.1836	24.41	10.15	34.56	54.32	-19.76	AVG
5	0.2467	17.62	10.17	27.79	51.87	-24.08	AVG
6	0.2513	44.53	10.17	54.70	61.71	-7.01	peak
7	0.3525	15.45	10.15	25.60	48.90	-23.30	AVG
8	0.3659	33.86	10.14	44.00	58.59	-14.59	peak
9	1.8172	8.71	10.08	18.79	46.00	-27.21	AVG
10	1.9230	23.97	10.09	34.06	56.00	-21.94	peak
11	4.2337	30.21	10.09	40.30	56.00	-15.70	peak
12	4.5420	9.92	10.07	19.99	46.00	-26.01	AVG

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value



Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz
Power supply	AC120V/60Hz	Environmental Conditions	25°C, 60%RH

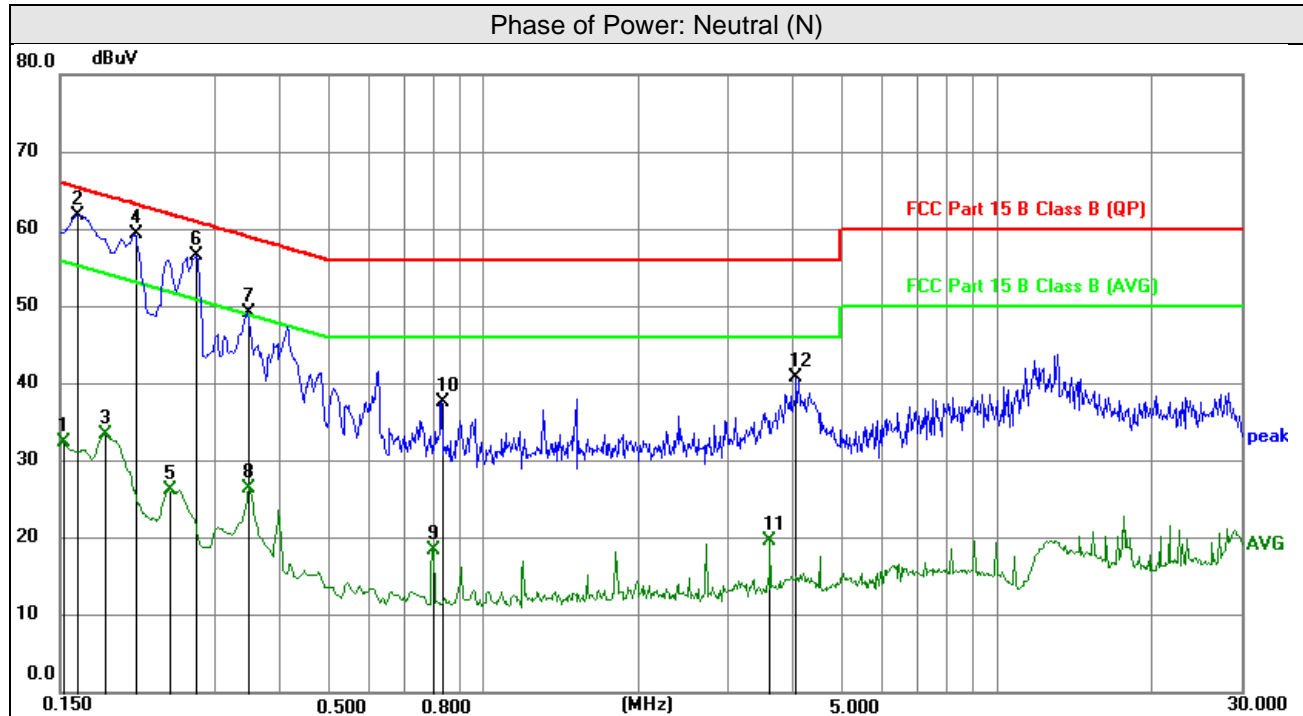

No.	Frequency (MHz)	Reading (dBuV)	Correction Factor (dB)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1522	22.31	10.18	32.49	55.88	-23.39	AVG
2	0.1613	51.63	10.17	61.80	65.40	-3.60	peak
3	0.1836	23.24	10.15	33.39	54.32	-20.93	AVG
4	0.2085	49.21	10.14	59.35	63.26	-3.91	peak
5	0.2445	16.00	10.16	26.16	51.94	-25.78	AVG
6	0.2760	46.32	10.17	56.49	60.94	-4.45	peak
7	0.3478	38.99	10.14	49.13	59.01	-9.88	peak
8	0.3502	16.22	10.13	26.35	48.96	-22.61	AVG
9	0.8002	8.41	10.08	18.49	46.00	-27.51	AVG
10	0.8317	27.55	10.07	37.62	56.00	-18.38	peak
11	3.6330	9.60	10.10	19.70	46.00	-26.30	AVG
12	4.0807	30.63	10.10	40.73	56.00	-15.27	peak

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.




3.3 6dB Bandwidth Measurement

3.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

3.3.2 Test Setup

Subclause 11.8 of ANSI C63.10 is applicable.

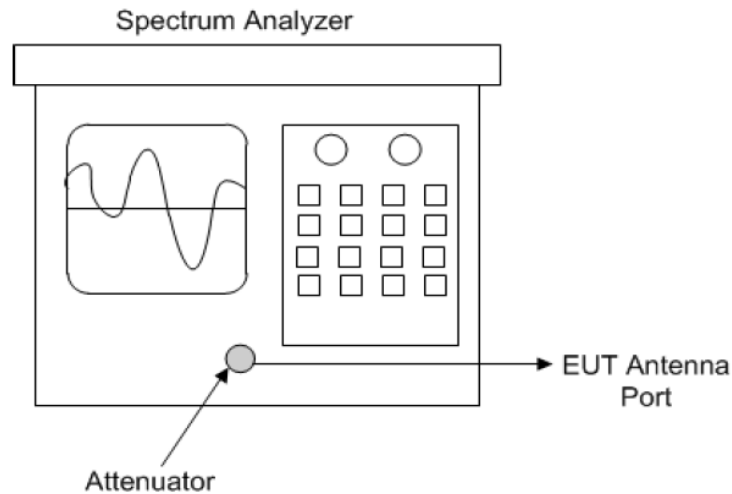

Spectrum analyzer test configuration

3.3.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.3.4 Test Procedure

Option 1:

- a. Set resolution bandwidth (RBW) = 30kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the dB bandwidth mode with X set to 6 dB. if the functionality described in 11.8.1 (i.e. RBW= 100 kHz. VBW $\geq 3 \times$ RBW. and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability. care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB



3.3.5 Deviation from Test Standard

No deviation.

3.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


3.3.7 Test Result

BLE-1Mbps

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	0.764	0.5	Pass
19	2440	0.744	0.5	Pass
39	2480	0.692	0.5	Pass


BLE-2Mbps

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Minimum Limit (MHz)	Pass / Fail
0	2402	1.248	0.5	Pass
19	2440	1.360	0.5	Pass
39	2480	1.268	0.5	Pass

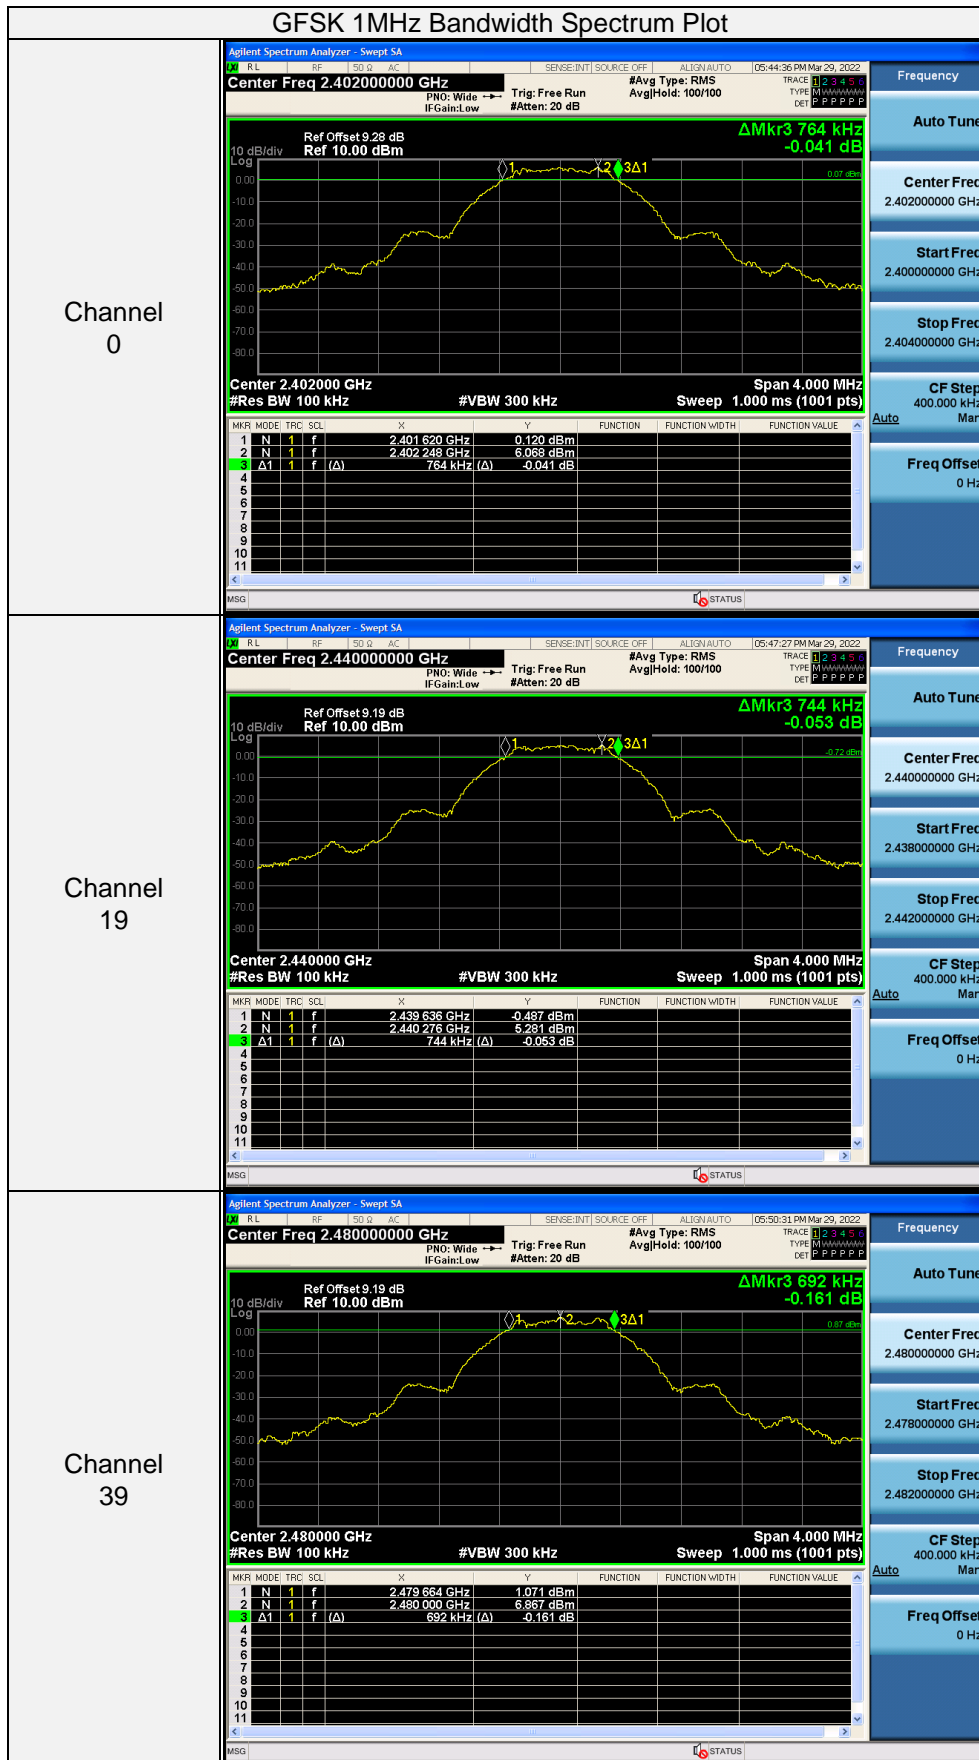




GFSK 2MHz Bandwidth Spectrum Plot

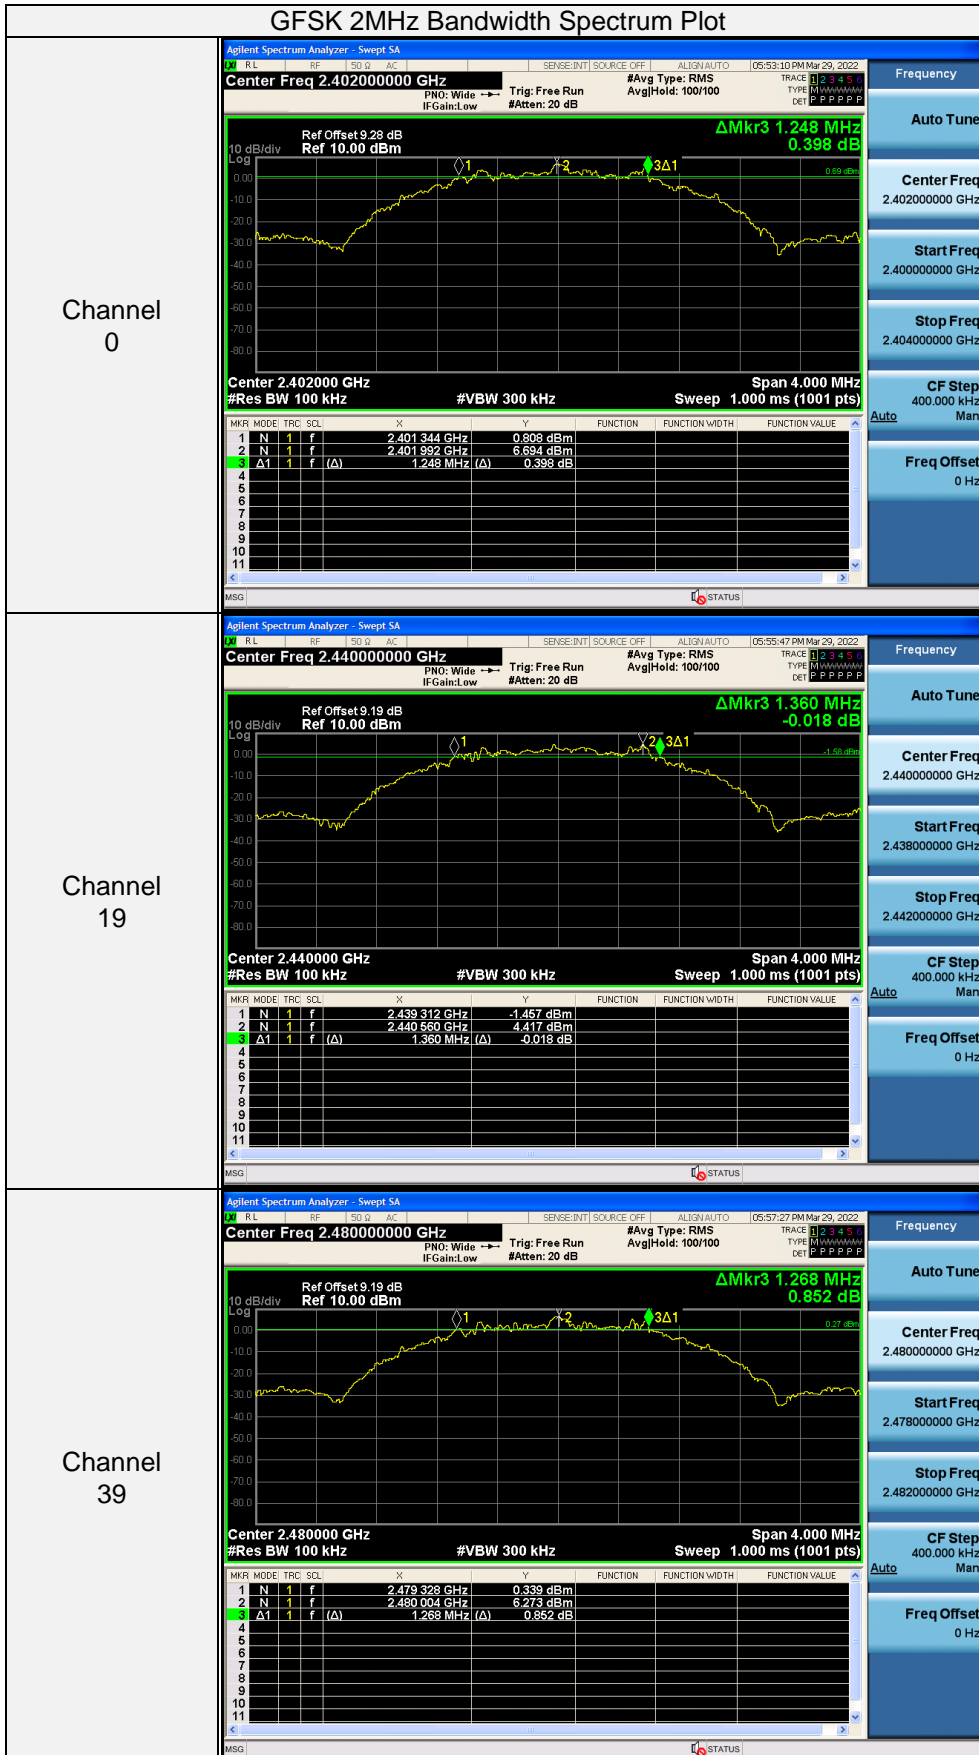



3.4 Occupied Bandwidth Measurement

3.4.1 Test Setup

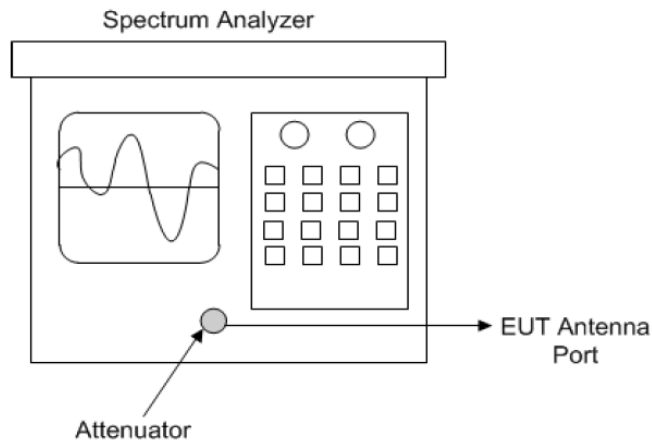

Spectrum analyzer test configuration

3.4.2 Test Instruments

Refer to section 5 to get information of above instrument.

3.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to peak. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

3.4.4 Deviation from Test Standard

No deviation.

3.4.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.4.6 Test Results

BLE-1Mbps

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	1.0515	Pass
19	2440	1.0466	Pass
39	2480	1.0453	Pass

BLE-2Mbps

Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	Pass / Fail
0	2402	2.0654	Pass
19	2440	2.0631	Pass
39	2480	2.0577	Pass





GFSK 2MHz Occupied bandwidth Spectrum Plot






3.5 Conducted Output Power Measurement

3.5.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

3.5.2 Test Setup

- Measurement using a spectrum analyzer (SA) Subclause 11.9.2.2 of ANSI C63.10 is applicable

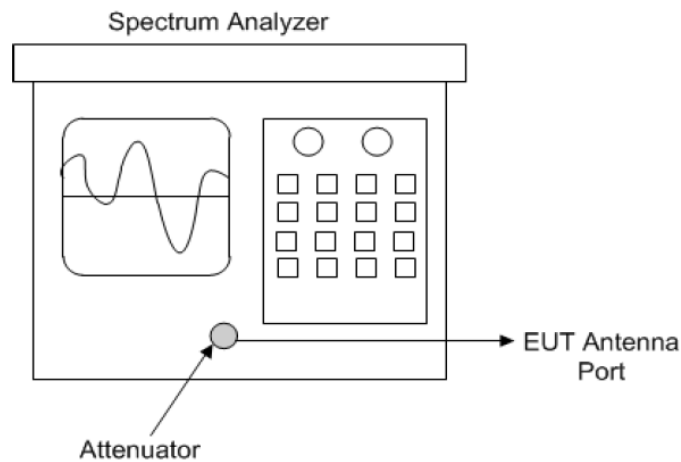

Spectrum analyzer output power test configuration

3.5.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.5.4 Test Procedures

Peak power:

- Set the $RBW \geq DTS$ bandwidth.
- Set $VBW \geq [3 \times RBW]$.
- Set $span \geq [3 \times RBW]$.
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.



Average power:

Measurement using a spectrum analyzer (SA), Selection of test method:

The proper test method is selected based on the following criteria:

- a) **Method AVGSA-1 or method AVGSA-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
 - 1) The EUT transmits continuously (or with a $D > 98\%$).
 - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the instrument configured as in method AVGSA-1) is equal to or shorter than the duration T of each transmission from the EUT, and if those transmissions exhibit full power throughout their durations.
- b) **Method AVGSA-2 or method AVGSA-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than $+2\%$.
- c) **Method AVGSA-3 or method AVGSA-3A (alternative)** shall be applied if the conditions of the preceding item a) and item b) cannot be achieved.

Note: In this project, we selected Method AVGSA-2 for average power test.

Method AVGSA-2:

Set span to at least 1.5 times the OBW.

Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.

Set VBW $\geq [3 \times \text{RBW}]$.

Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (i.e., power averaging), if available. Otherwise, use the sample detector mode.

Do not use sweep triggering. Allow the sweep to "free run."

Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

3.5.5 Deviation from Test Standard

No deviation.

3.5.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.5.7 Test Results

BLE-1Mbps

Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
0	2402	5.06	7.04	30	Pass
19	2440	4.28	6.31	30	Pass
39	2480	5.11	7.08	30	Pass

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
0	2402	2.93	4.673	30	Pass
19	2440	2.60	4.154	30	Pass
39	2480	3.21	5.065	30	Pass

Note: The test result had been added the duty cycle factor.

BLE-2Mbps


Channel	Frequency (MHz)	Peak Power (mW)	Peak Power (dBm)	Limit (dBm)	Pass / Fail
0	2402	4.19	6.225	30	Pass
19	2440	3.60	5.565	30	Pass
39	2480	4.29	6.321	30	Pass

Channel	Frequency (MHz)	Average Power (mW)	Average Power (dBm)	Limit (dBm)	Pass / Fail
0	2402	2.87	4.583	30	Pass
19	2440	2.44	3.879	30	Pass
39	2480	2.96	4.709	30	Pass

Note: The test result had been added the duty cycle factor.



GFSK 1MHz Power Spectrum Plot

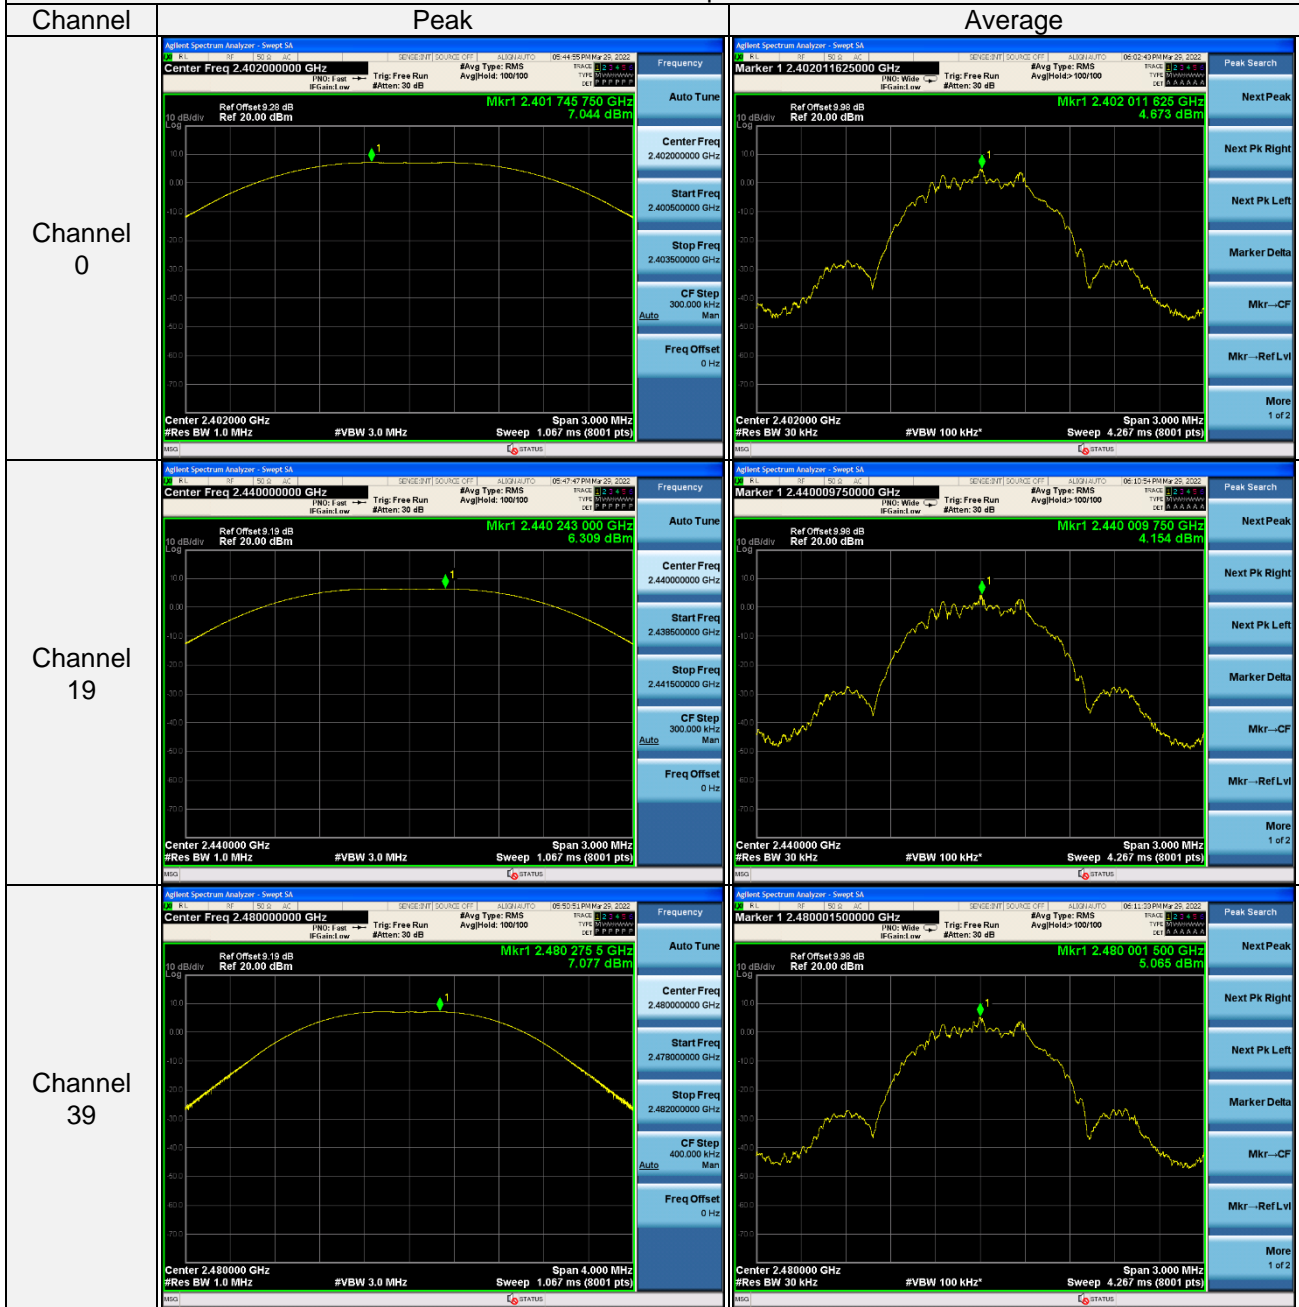



GFSK 2MHz Power Spectrum Plot

Channel	Peak	Average
Channel 0	<p>Center Freq 2.402000000 GHz Mkr1 2.401 431 50 GHz 6.225 dBm</p>	<p>Marker 1 2.402006875000 GHz Mkr1 2.402 006 875 GHz 4.583 dBm</p>
Channel 19	<p>Center Freq 2.440000000 GHz Mkr1 2.439 952 75 GHz 5.585 dBm</p>	<p>Marker 1 2.440003750000 GHz Mkr1 2.440 003 750 GHz 3.879 dBm</p>
Channel 39	<p>Center Freq 2.480000000 GHz Mkr1 2.480 363 75 GHz 6.321 dBm</p>	<p>Marker 1 2.480005000000 GHz Mkr1 2.480 005 000 GHz 4.709 dBm</p>




3.6 Power Spectral Density Measurement

3.6.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm/3kHz.

3.6.2 Test Setup

- DTS maximum power spectral density level in the fundamental emission Subclause 11.10 of ANSI C63.10 is applicable

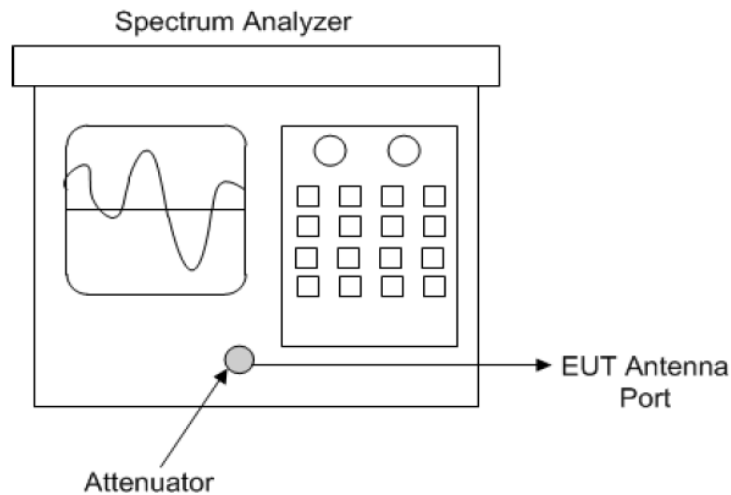

Spectrum analyzer test configuration

3.6.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.6.4 Test Procedure

- Method AVGPS-1 or method AVGPS-1A (alternative)** shall be applied if either of the following conditions can be satisfied:
 - 1) The EUT transmits continuously (or with a $D \geq 98\%$).
 - 2) Sweep triggering can be implemented in such a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep is equal to or shorter than the duration I of each transmission from the EUT, and if those transmissions exhibit full power throughout these durations.
- Method AVGPS-2 or method AVGPS-2A (alternative)** shall be applied if the conditions of the preceding item a) cannot be achieved. and the transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than $\pm 2\%$.
- Method AVGPS-3 or method AVGPS-3A (alternative)** shall be applied if the conditions of the preceding paragraphs a) and b) cannot be achieved.



Method AVGPSD-3:

Method AVGPSD-3 uses mms detection across ON and OFE times of the EUT with max hold. The following procedure is applicable when the EUT cannot be configured to transmit continuously (i.e. $D < 98\%$), when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level. and when the transmission duty cycle is not constant (i.e., duty cycle variations exceed $\pm 2\%$),

SA Setting:

- a. Set the instrument span to a minimum of 1.5 times the OBW.
 - b. Set sweep trigger to "free run."
 - c. Set the RBW = 3 kHz, VBW = 10 kHz,
 - d. Detector = RMS (power averaging).
 - e. Sweep time = Auto couple,
 - f. Allow max hold to run for at least 60 s or longer as needed to allow the trace to stabilize.
 - g. Use the peak marker function to determine the maximum PSD level
- If the measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

3.6.5 Deviation from Test Standard

No deviation.

3.6.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.6.7 Test Results

BLE-1Mbps


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	2402	-7.74	8	Pass
19	2440	-9.41	8	Pass
39	2480	-8.65	8	Pass


BLE-2Mbps

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass / Fail
0	2402	-7.52	8	Pass
19	2440	-10.58	8	Pass
39	2480	-9.74	8	Pass



GFSK 1MHz Power spectral density Spectrum Plot

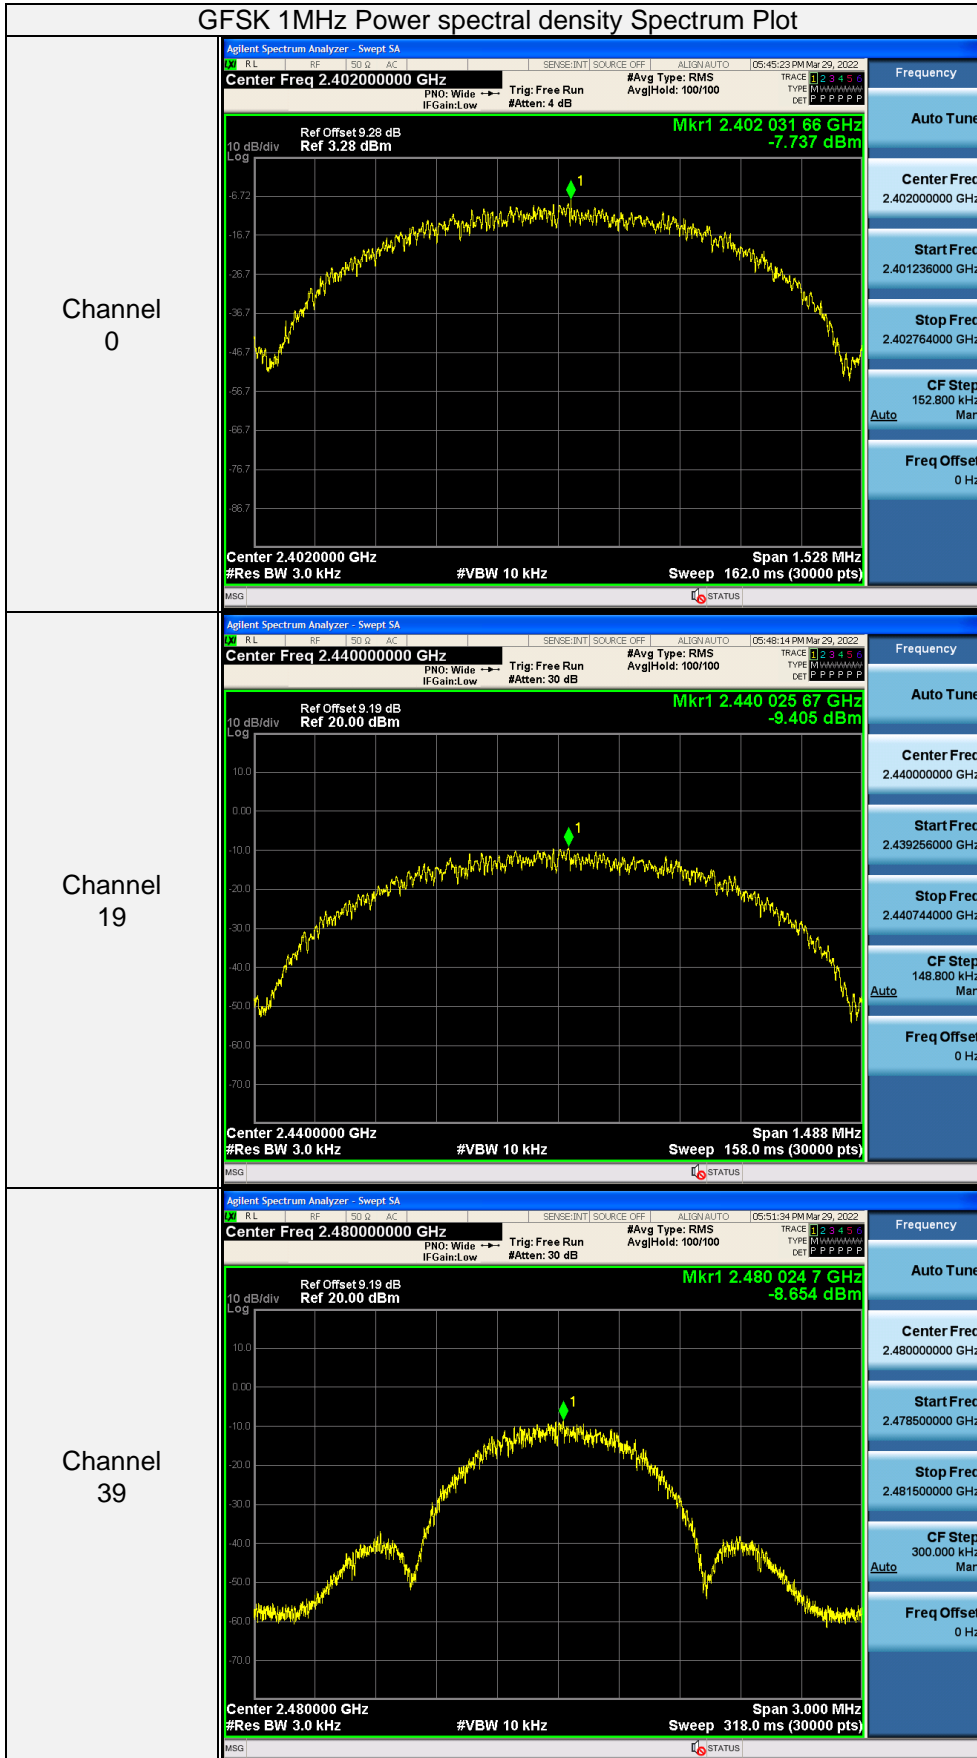

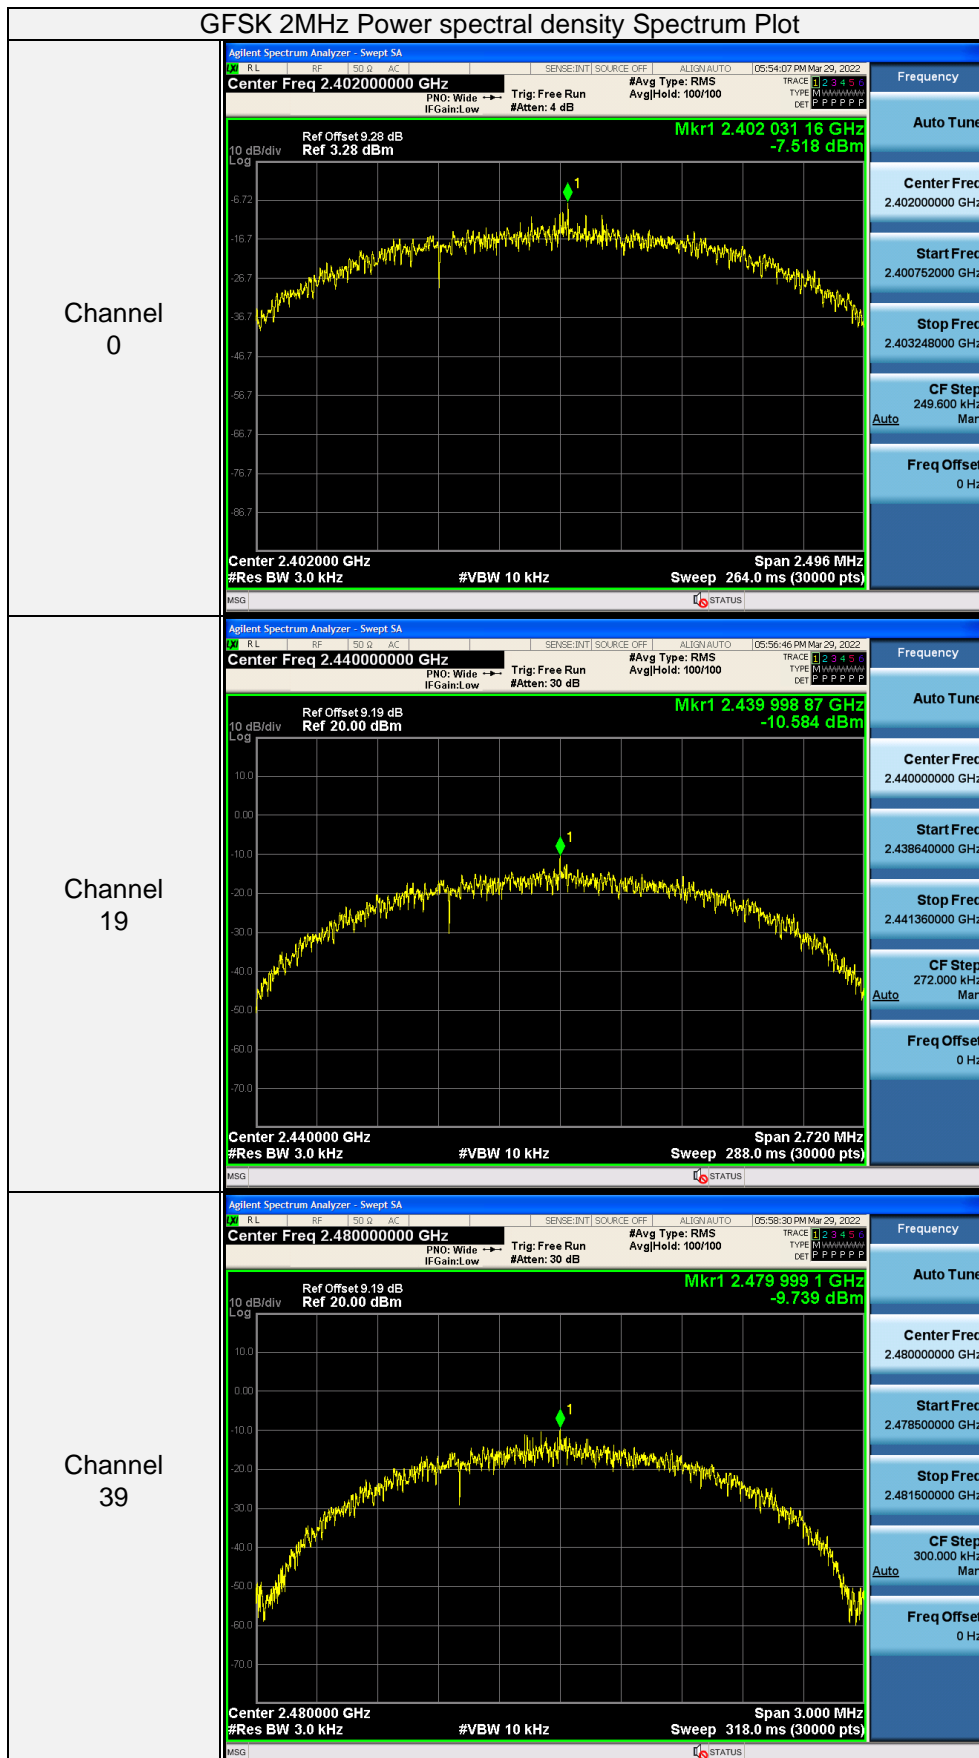




3.7 Conducted Out of Band Emission Measurement

3.7.1 Limits of Conducted Out of Band Emission Measurement

- a. **If the maximum peak conducted output power procedure was used to determine compliance as described in 11.9.1**, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b. **If maximum conducted (average) output power was used to determine compliance as described in 11.9.2**, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).

3.7.2 Test Setup

- DTS emissions in non-restricted frequency bands Subclause 11.11 of ANSI C63.10 is applicable.
- DTS emissions in restricted frequency bands Subclause 11.12 of ANSI C63.10 is applicable

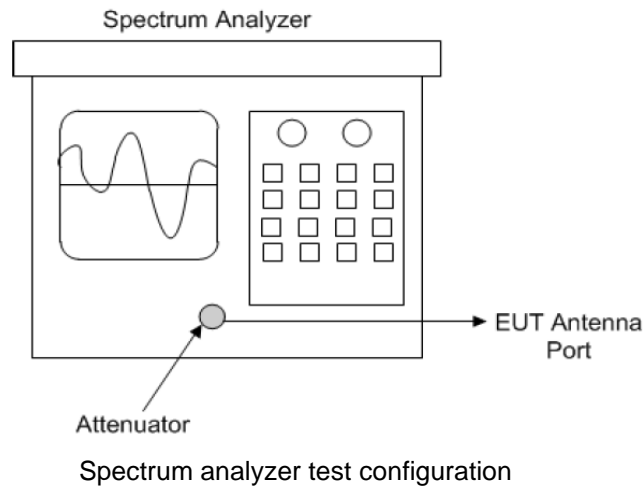

3.7.3 Test Instruments

Refer to section 5 to get information of above instrument.

3.7.4 Test Procedure

- a. Establish a reference level by using the following procedure:
 - 1) Set instrument center frequency to DTS channel center frequency.
 - 2) Set the span to 21.5 times the DTS bandwidth)
 - 3) Set the RBW= 100 kHz)
 - 4) Set the VBW $\geq 3 \times$ RBW
 - 5) Detector = peak
 - 6) Sweep time = auto coupling
 - 7) Trace mode =max hold
 - 8) Allow trace to fully stabilize
 - 9) Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.



b. Establish an emission level by using the following procedure:

- 1) Set the center frequency and span to encompass frequency range to be measured.
- 2) Set the RBW = 100 kHz
- 3) Set the VBW \geq 300 kHz.
- 4) Detector = peak.
- 5) Sweep time = auto couple.
- 6) Trace mode = max hold.
- 7) Allow trace to fully stabilize.
- 8) Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

3.7.5 Deviation from Test Standard


No deviation.


3.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



3.7.7 Test results

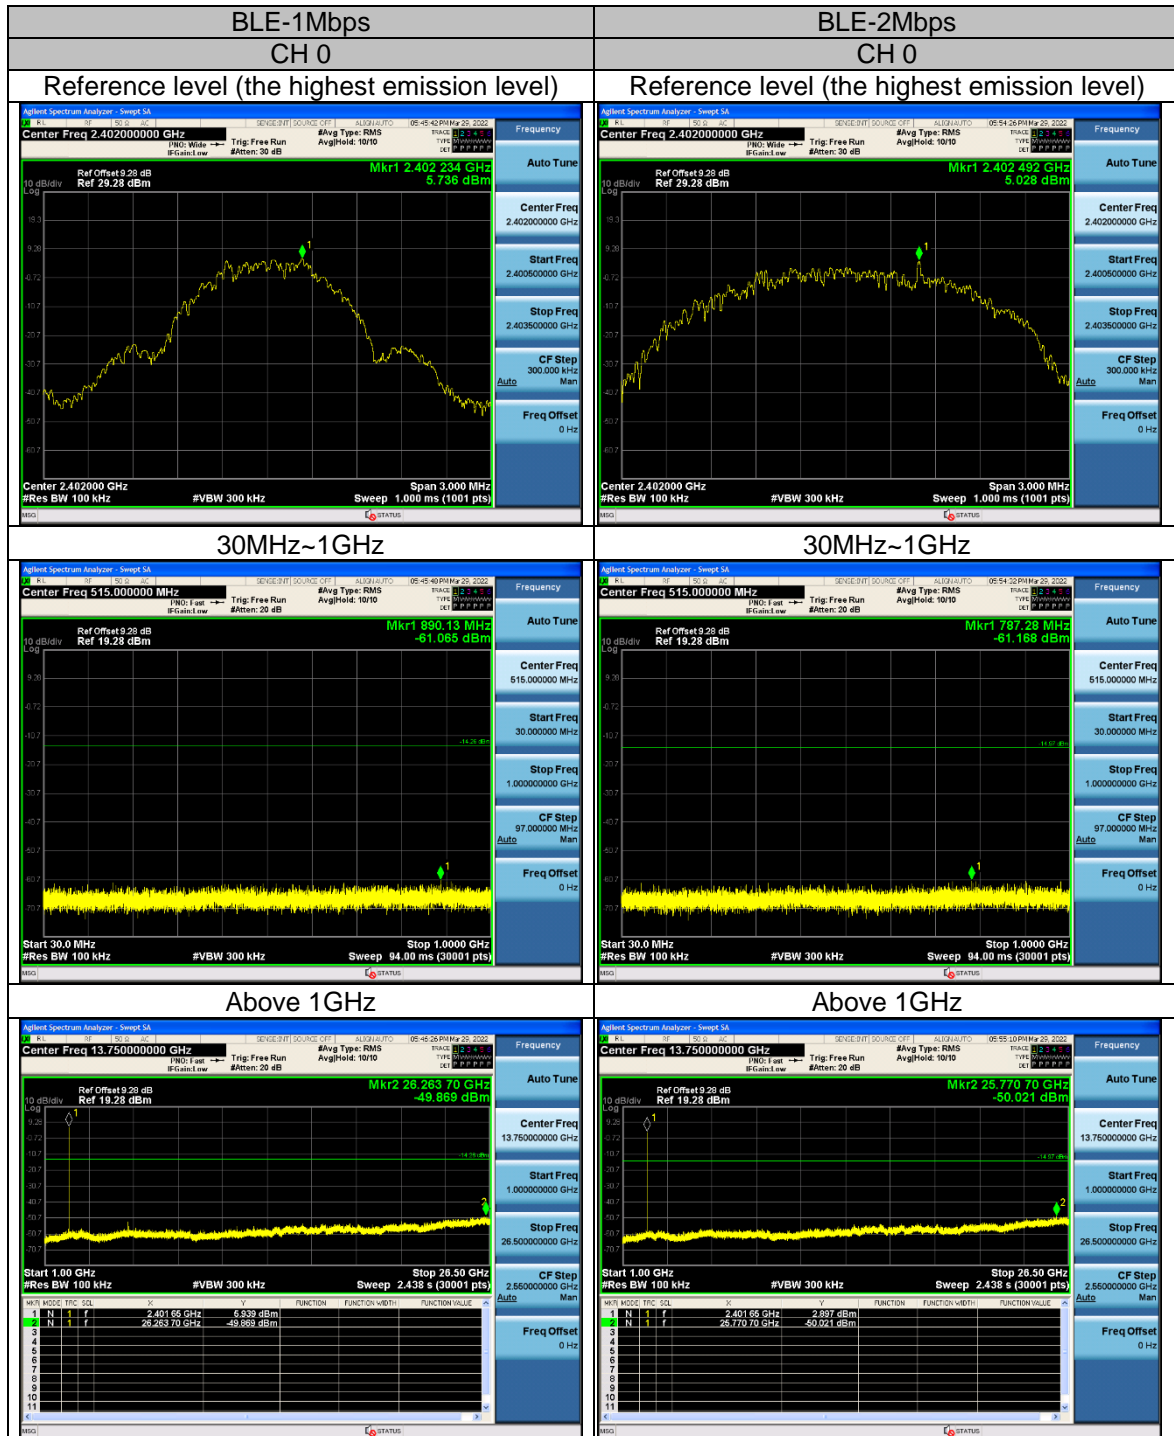

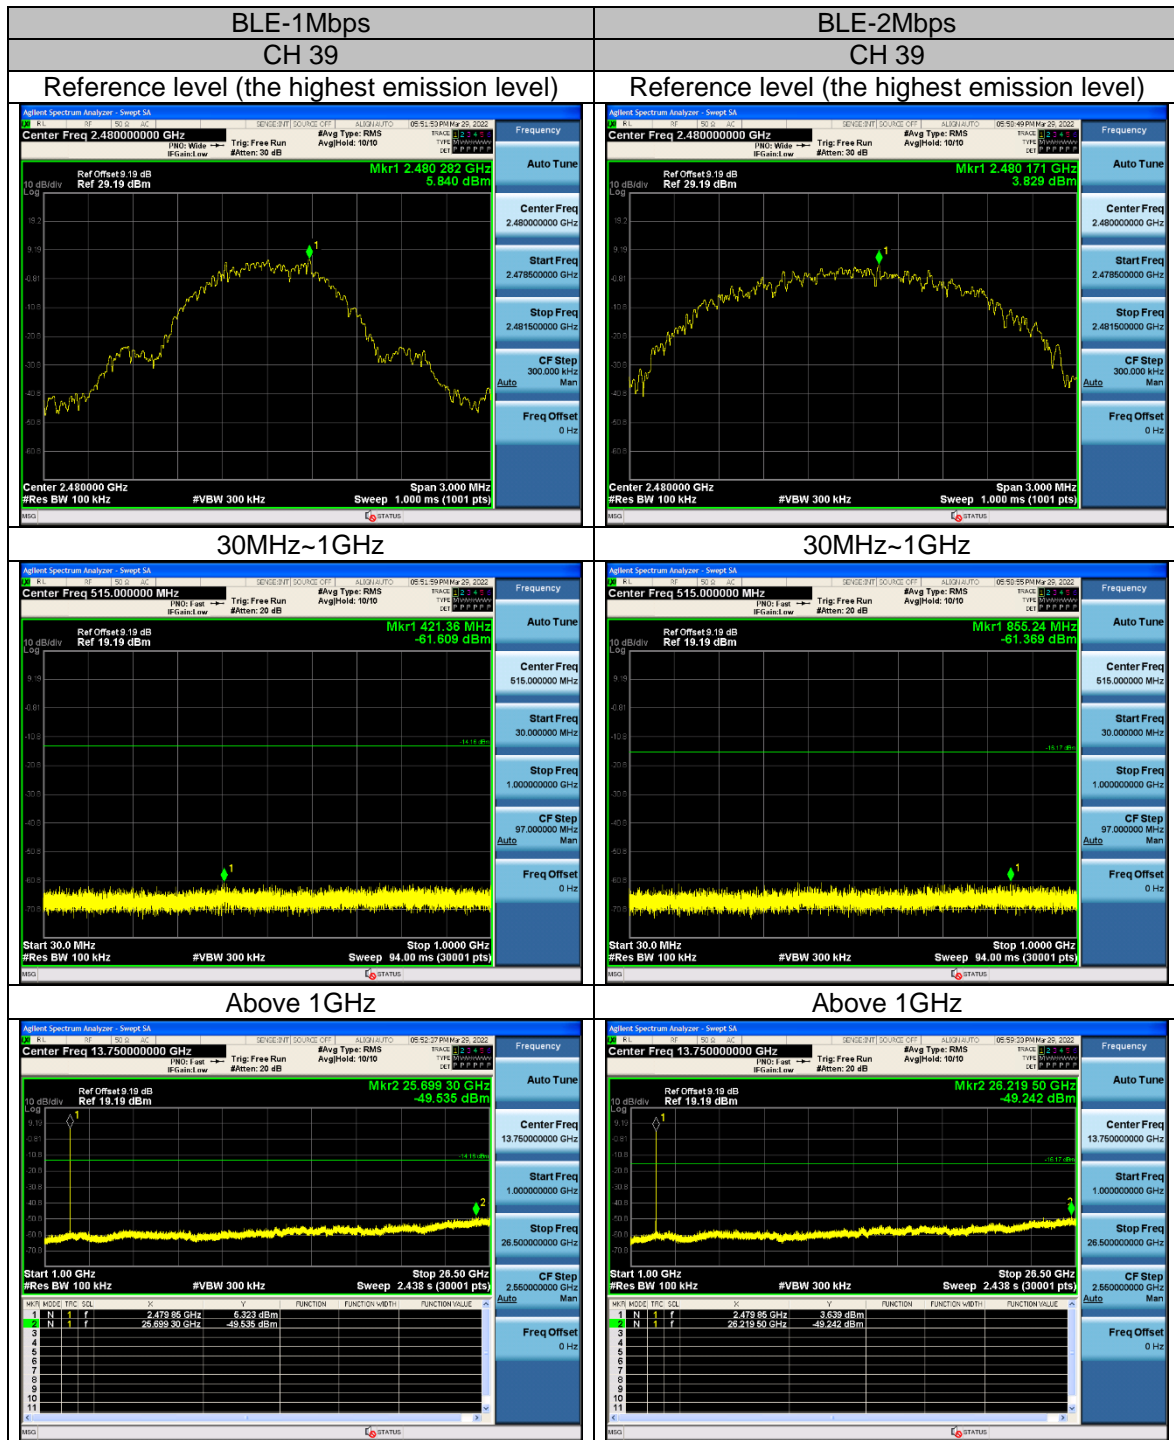



4. Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).



5. Test Instruments

Description & Manufacturer	Model No.	Serial No.	Due Date of Calibration
Spectrum Keysight	N9020A	MY51240612	2022/09/12
Spectrum Analyzer Rohde&Schwarz	FSV-40N	101783	2022/09/12
Power Meter 10Hz~18GHz Tonscend	JS0806-2	188060126	2022/09/12
Signal generator Keysight	E4421B	GB40051020	2022/09/12
Signal generator Keysight	N5182A	MY47420944	2022/09/12
Test Software Tonscend	JS0806-2	N/A	N/A
Hygrothermograph Yuhuaze	HTC-1	N/A	2022/09/12

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA.
2. The test was performed in Chamber 1.



Appendix – Information on The Testing Laboratories

We, [Hwa-Hsing \(Dongguan\) Co., Ltd.](#), A global provider of TESTING and CERTIFICATION services for consumer products, electronic products and wireless information technology products. Adhering to the core values “HONEST and TRUSTWORTHY, OBJECTIVE and IMPARTIALITY, RIGOROUS and AFFICIENT”, commitment to provide professional, perfect and efficient comprehensive ONE-STOP solution of TESTING and CERTIFICATION services for Manufacturers, Buyers, Traders, Brands, Retailers. Assist client to better manage risk, protect their brands, reduce costs and cut time to over 150 markets in global. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lab Address: [No.101, Bld N1, Yuyuan 2Rd, Yuyuan Industrial Park, HuangJiang Town, Dongguan, China](#)

Contact Tel: [0769-83078199](tel:0769-83078199)

Email: Customerservice.dg@hwa-hsing.com

Web Site: www.hwa-hsing.com

--- END ---