

FCC Test Report

(PART 27)

Report No.: RF180521C04C-1

FCC ID: 2AAGMGM01QA

Test Model: GM01Q

Received Date: Mar. 08, 2019

Test Date: May 21 ~ May 22, 2019

Issued Date: Jun. 03, 2019

Applicant: Sequans Communications

Address: 15-55 Boulevard Charles de Gaulle, 92700 Colombes France

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan
(R.O.C)

Test Location: No. 19, Hwa Ya 2nd Rd, Wen Hwa Vil, Kwei Shan Dist., Taoyuan City
33383, Taiwan (R.O.C)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results.....	5
2.1 Measurement Uncertainty.....	6
2.2 Test Site and Instruments	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units	9
3.3 Test Mode Applicability and Tested Channel Detail	9
3.4 EUT Operating Conditions	11
3.5 General Description of Applied Standards.....	11
4 Test Types and Results	12
4.1 Output Power Measurement.....	12
4.1.1 Limits of Output Power Measurement	12
4.1.2 Test Procedures.....	12
4.1.3 Test Setup.....	13
4.1.4 Test Results	14
4.2 Radiated Emission Measurement.....	18
4.2.1 Limits of Radiated Emission Measurement	18
4.2.2 Test Procedure	18
4.2.3 Deviation from Test Standard	18
4.2.4 Test Setup.....	19
4.2.5 Test Results	20
5 Pictures of Test Arrangements.....	52
Appendix – Information of the Testing Laboratories	53

Release Control Record

Issue No.	Description	Date Issued
RF180521C04C-1	Original Release	Jun. 03, 2019

1 Certificate of Conformity

Product: GM01Q-STMOD Cellular Expansion Board

Brand: SEQUANS COMMUNICATIONS

Test Model: GM01Q


Sample Status: Mass Production


Applicant: Sequans Communications

Test Date: May 21 ~ May 22, 2019

Standards: FCC Part 27, Subpart C, H, F, L

This report is issued as a supplementary report to BV CPS report no.: RF180521C04B-1. This report shall be used by combining with its original report.

Prepared by : , **Date:** Jun. 03, 2019
Ivonne Wu / Supervisor

Approved by : , **Date:** Jun. 03, 2019
Dylan Chiou / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 27 & Part 2 (LTE 4)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(d)(4)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1055 27.54	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
27.50(d)(5)	Peak to Average Ratio	N/A	Refer to Note
27.53(h)	Band Edge Measurements	N/A	Refer to Note
2.1051 27.53(h)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 27.53(h)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -21.47 dB at 5197.50 MHz.

Note:

1. Only E.I.R.P. and Radiated Spurious Emissions test had been performed for this addendum. Refer to original report for other test data.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Applied Standard: FCC Part 27 & Part 2 (LTE 12)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(c)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1055 27.54	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
---	Peak to Average Ratio	N/A	Refer to Note
27.53(g)	Band Edge Measurements	N/A	Refer to Note
2.1051 27.53(g)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 27.53(g)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -6.97 dB at 2122.50 MHz.

Note:

1. Only E.R.P. and Radiated Spurious Emissions test had been performed for this addendum. Refer to original report for other test data.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Applied Standard: FCC Part 27 & Part 2 (LTE 13)			
FCC Clause	Test Item	Result	Remarks
2.1046 27.50(b)(10)	Maximum Peak Output Power	Pass	Meet the requirement of limit.
2.1047	Modulation Characteristics	N/A	Refer to Note
2.1055 27.54	Frequency Stability	N/A	Refer to Note
2.1049	Occupied Bandwidth	N/A	Refer to Note
---	Peak to Average Ratio	N/A	Refer to Note
27.53(c)(2)(4)	Band Edge Measurements	N/A	Refer to Note
2.1051 27.53(c)(2)&(f)	Conducted Spurious Emissions	N/A	Refer to Note
2.1053 27.53(c)(2)&(f)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -4.17 dB at 1564.00 MHz.

Note:

1. Only E.R.P. and Radiated Spurious Emissions test had been performed for this addendum. Refer to original report for other test data.
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.04 dB
	30 MHz ~ 200 MHz	2.93 dB
	200 MHz ~ 1000 MHz	2.95 dB
Radiated Emissions above 1 GHz	1 GHz ~ 18 GHz	2.26 dB
	18 GHz ~ 40 GHz	1.94 dB

2.2 Test Site and Instruments

Description & Manufacturer	Model No.	Serial No.	Date of Calibration	Due Date of Calibration
Test Receiver Agilent	N9038A	MY51210203	Mar. 18, 2019	Mar. 17, 2020
Spectrum Analyzer Agilent	N9010A	MY56070348	Sep. 06, 2018	Sep. 05, 2019
Spectrum Analyzer ROHDE & SCHWARZ	FSW26	102023	Oct. 11, 2018	Oct. 10, 2019
HORN Antenna SCHWARZBECK	3115	5619	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Nov. 23, 2018	Nov. 22, 2019
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Nov. 25, 2018	Nov. 24, 2019
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Nov. 23, 2018	Nov. 22, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
MXG Vector signal generator Agilent	N5182B	MY53052658	May 24, 2018	May 23, 2019
Preamplifier EMCI	EMC 012645	980115	Oct. 12, 2018	Oct. 11, 2019
Preamplifier EMCI	EMC 330H	980112	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	EMC104-SM-SM-800 0&3000	140811+170717	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable HUBER+SUHNNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	Oct. 12, 2018	Oct. 11, 2019
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Oct. 12, 2018	Oct. 11, 2019
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Software BV ADT	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller MF	MF-7802	NA	NA	NA
LTE Wireless Communication Test Set Keysight	E7515A	MY57270629	Feb. 22, 2019	Feb. 21, 2020
Wideband Radio Communication Tester R&S	CMW500	151084	Dec. 24, 2018	Dec. 23, 2019
Temperature & Humidity Chamber	GTH-120-40-CP-AR	MAA1306-019	Sep. 05, 2018	Sep. 04, 2019
DC Power Supply Topward	33010D	807748	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 10.

3 General Information


3.1 General Description of EUT

Product	GM01Q-STMOD Cellular Expansion Board	
Brand	SEQUANS COMMUNICATIONS	
Test Model	GM01Q	
Status of EUT	Mass Production	
Power Supply Rating	5.0 Vdc (host equipment) or 3.8 Vdc (form DC power supply)	
Modulation Type	LTE	QPSK, 16QAM
Frequency Range	LTE Band 4 (Channel Bandwidth: 5 MHz)	1712.5 ~ 1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz)	1715.0 ~ 1750.0 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz)	1717.5 ~ 1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz)	1720.0 ~ 1745.0 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz)	701.5 ~ 713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz)	704.0 ~ 711.0 MHz
	LTE Band 13 (Channel Bandwidth: 5 MHz)	779.5 ~ 784.5 MHz
	LTE Band 13 (Channel Bandwidth: 10 MHz)	782.0 MHz
Max. ERP Power	LTE Band 12 (Channel Bandwidth: 5 MHz)	123.59 mW
	LTE Band 12 (Channel Bandwidth: 10 MHz)	125.31 mW
	LTE Band 13 (Channel Bandwidth: 5 MHz)	100.23 mW
	LTE Band 13 (Channel Bandwidth: 10 MHz)	101.62 mW
Max. EIRP Power	LTE Band 4 (Channel Bandwidth: 5 MHz)	242.66 mW
	LTE Band 4 (Channel Bandwidth: 10 MHz)	246.60 mW
	LTE Band 4 (Channel Bandwidth: 15 MHz)	250.03 mW
	LTE Band 4 (Channel Bandwidth: 20 MHz)	252.35 mW
Antenna Type	Dipole Antenna	
Antenna Gain	LTE Band 4	2.95 dBi gain
	LTE Band 12	1.33 dBi gain
	LTE Band 13	-1.11 dBi gain
Accessory Device	Refer to Note as below	
Data Cable Supplied	Refer to Note as below	

Note:

1. This report is issued as a supplementary report to BV CPS report no.: RF180521C04B-1. Change is to add a host: GM01Q-STMOD (Model: GM01Q-STMOD / Brand: Sequans) to certified module which was original granted on 06/21/2019 under FCC ID: 2AAGMGM01QA. RF module is exactly the same chip module (EUT) covered under shielding case with original grant and no RF portion changes. The only change is the antenna traces different. Therefore, only E.I.R.P. and RSE tests had been performed in this report.
2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Configuration of System under Test

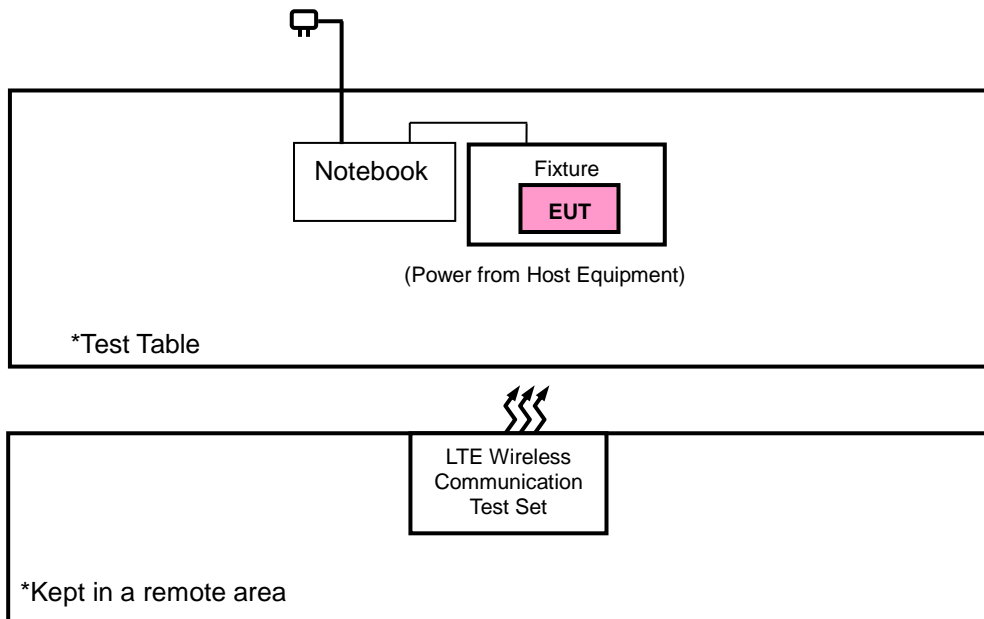

3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Notebook	DELL	E6420	D3T96R1	N/A

No.	Signal Cable Description Of The Above Support Units
1.	N/A

Note:

1. All power cords of the above support units are non-shielded (1.8m).

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis, and antenna ports

The worst case was found when positioned as the table below. Following channel(s) was (were) selected for the final test as listed below:

Band	ERP / EIRP	Radiated Emission
LTE Band 4	Z-plane	Z-axis
LTE Band 12	X-plane	Z-axis
LTE Band 13	X-plane	X-axis

LTE Band 4

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	19975 to 20375	19975, 20175, 20375	5 MHz	QPSK, 16QAM	5 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10 MHz	QPSK, 16QAM	1 RB / 5 RB Offset
		20025 to 20325	20025, 20175, 20325	15 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	19975 to 20375	19975, 20175, 20375	5 MHz	QPSK	5 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation and the worst mode reference report to BV CPS report no.: RF180521C04B-1.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

LTE Band 12

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23035 to 23155	23035, 23095, 23155	5 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK, 16QAM	1 RB / 5 RB Offset
-	Radiated Emission	23035 to 23155	23035, 23095, 23155	5 MHz	QPSK	1 RB / 0 RB Offset
		23060 to 23130	23060, 23095, 23130	10 MHz	QPSK	1 RB / 5 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation and the worst mode reference report to BV CPS report no.: RF180521C04B-1.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

LTE Band 13

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	ERP	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK, 16QAM	1 RB / 5 RB Offset
		23230	23230	10 MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	Radiated Emission	23205 to 23255	23205, 23230, 23255	5 MHz	QPSK	1 RB / 5 RB Offset
		23230	23230	10 MHz	QPSK	1 RB / 0 RB Offset

Note:

1. This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation and the worst mode reference report to BV CPS report no.: RF180521C04B-1.
2. For radiated emission above 1 GHz, according to 3GPP 36.521 Section 6.6.3.1.4, choose the lowest, 5 MHz & highest channel bandwidth for final test.

Test Condition:

Test Item	Environmental Conditions	Input Power	Tested By
ERP / EIRP	25 deg. C, 65 % RH	5 Vdc	Getaz Yang
Radiated Emission	25 deg. C, 65 % RH	5 Vdc	Getaz Yang

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v03r01

ANSI/TIA/EIA-603-E 2016

ANSI 63.26-2015

Note: All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 746-757 MHz, 776-788 MHz and 805-806 MHz band are limited to 3 watts ERP

Portable stations (hand-held device) operating in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

4.1.2 Test Procedures


EIRP / ERP Measurement:

- a. All measurements were done at low, middle and high operational frequency range. RBW and VBW is 10 MHz for LTE mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step b. Record the power level of S.G.
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


4.1.3 Test Setup

EIRP / ERP Measurement:

<Radiated Emission below or equal 1 GHz>

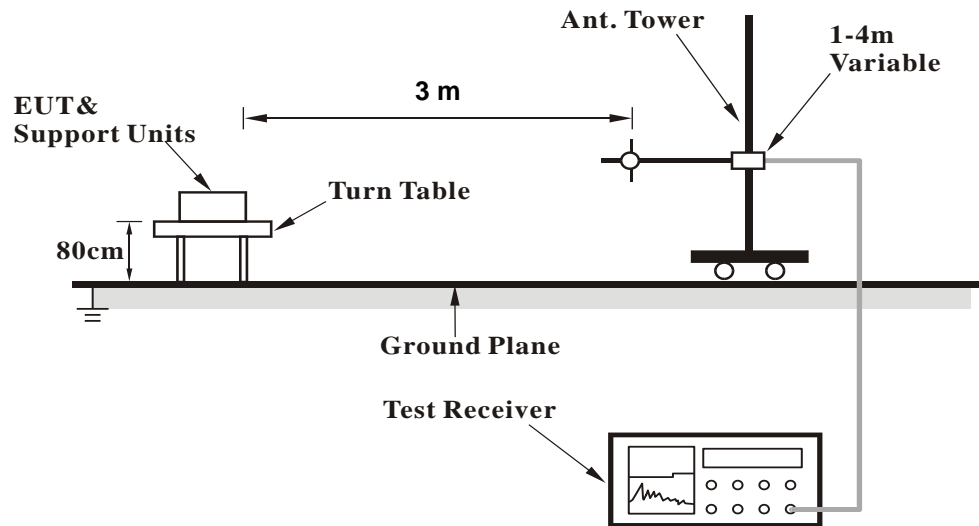

<Radiated Emission above 1 GHz>

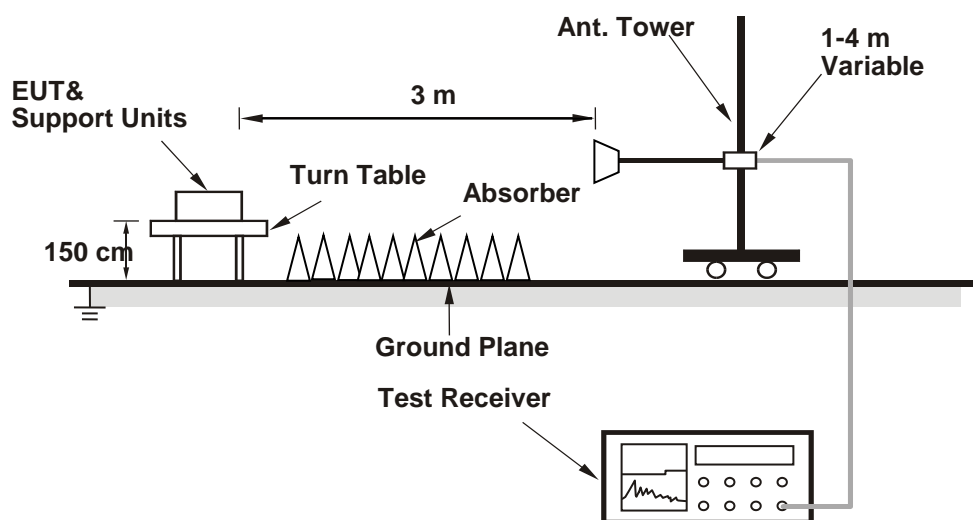

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.4 Test Results

ERP Power (dBm)

LTE Band 12							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23035	701.5	-7.53	30.17	20.49	111.94	H
	23095	707.5	-7.10	30.17	20.92	123.59	
	23155	713.5	-7.98	30.18	20.05	101.16	
	23035	701.5	-15.83	31.96	13.98	25.00	V
	23095	707.5	-15.66	31.98	14.17	26.12	
	23155	713.5	-15.97	32.03	13.91	24.60	
Channel Bandwidth: 5 MHz / 16QAM							
X	23035	701.5	-8.60	30.17	19.42	87.50	H
	23095	707.5	-8.21	30.17	19.81	95.72	
	23155	713.5	-9.09	30.18	18.94	78.34	
	23035	701.5	-16.90	31.96	12.91	19.54	V
	23095	707.5	-16.81	31.98	13.02	20.04	
	23155	713.5	-17.06	32.03	12.82	19.14	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 12							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23060	704.0	-7.48	30.17	20.54	113.24	H
	23095	707.5	-7.04	30.17	20.98	125.31	
	23130	711.0	-7.90	30.18	20.13	103.04	
	23060	704.0	-15.77	31.96	14.04	25.35	V
	23095	707.5	-15.58	31.98	14.25	26.61	
	23130	711.0	-15.90	32.03	13.98	25.00	
Channel Bandwidth: 10 MHz / 16QAM							
X	23060	704.0	-8.56	30.17	19.46	88.31	H
	23095	707.5	-8.09	30.17	19.93	98.40	
	23130	711.0	-8.98	30.18	19.05	80.35	
	23060	704.0	-16.84	31.96	12.97	19.82	V
	23095	707.5	-16.63	31.98	13.20	20.89	
	23130	711.0	-16.92	32.03	12.96	19.77	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 13							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23205	779.5	-10.18	32.24	19.91	97.95	H
	23230	782.0	-10.01	32.17	20.01	100.23	
	23255	784.5	-10.15	32.11	19.81	95.72	
	23205	779.5	-17.78	32.43	12.50	17.78	V
	23230	782.0	-17.35	32.42	12.92	19.59	
	23255	784.5	-18.06	32.46	12.25	16.79	
Channel Bandwidth: 5 MHz / 16QAM							
X	23205	779.5	-11.25	32.24	18.84	76.56	H
	23230	782.0	-11.09	32.17	18.93	78.16	
	23255	784.5	-11.30	32.11	18.66	73.45	
	23205	779.5	-18.85	32.43	11.43	13.90	V
	23230	782.0	-18.47	32.42	11.80	15.14	
	23255	784.5	-19.22	32.46	11.09	12.85	

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

LTE Band 13							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (mW)	Polarization (H/V)
X	23230	782.0	-9.95	32.17	20.07	101.62	H
	23230	782.0	-17.31	32.42	12.96	19.77	V
Channel Bandwidth: 10 MHz / 16QAM							
X	23230	782.0	-10.99	32.17	19.03	79.98	H
	23230	782.0	-18.32	32.42	11.95	15.67	V

Note: ERP (dBm) = Reading (dBm) + Correction Factor (dB) – 2.15

EIRP Power (dBm)

LTE Band 4							
Channel Bandwidth: 5 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	19975	1712.5	-12.60	36.45	23.85	242.66	H
	20175	1732.5	-12.96	36.80	23.84	242.10	
	20375	1752.5	-13.27	36.94	23.67	232.81	
	19975	1712.5	-19.95	37.28	17.33	54.08	V
	20175	1732.5	-20.61	37.63	17.02	50.35	
	20375	1752.5	-20.89	37.64	16.75	47.32	
Channel Bandwidth: 5 MHz / 16QAM							
Z	19975	1712.5	-13.92	36.45	22.53	179.06	H
	20175	1732.5	-14.16	36.80	22.64	183.65	
	20375	1752.5	-14.47	36.94	22.47	176.60	
	19975	1712.5	-21.16	37.28	16.12	40.93	V
	20175	1732.5	-21.81	37.63	15.82	38.19	
	20375	1752.5	-22.21	37.64	15.43	34.91	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 10 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	20000	1715.0	-12.72	36.64	23.92	246.60	H
	20175	1732.5	-12.94	36.80	23.86	243.22	
	20350	1750.0	-13.09	36.80	23.71	234.96	
	20000	1715.0	-20.05	37.44	17.39	54.83	V
	20175	1732.5	-20.50	37.63	17.13	51.64	
	20350	1750.0	-20.86	37.64	16.78	47.64	
Channel Bandwidth: 10 MHz / 16QAM							
Z	20000	1715.0	-13.87	36.64	22.77	189.23	H
	20175	1732.5	-14.07	36.80	22.73	187.50	
	20350	1750.0	-14.29	36.80	22.51	178.24	
	20000	1715.0	-21.23	37.44	16.21	41.78	V
	20175	1732.5	-21.71	37.63	15.92	39.08	
	20350	1750.0	-22.05	37.64	15.59	36.22	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 15 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	20025	1717.5	-12.47	36.45	23.98	250.03	H
	20175	1732.5	-12.88	36.80	23.92	246.60	
	20325	1747.5	-13.15	36.94	23.79	239.33	
	20025	1717.5	-19.84	37.28	17.44	55.46	V
	20175	1732.5	-20.45	37.63	17.18	52.24	
	20325	1747.5	-20.79	37.64	16.85	48.42	
Channel Bandwidth: 15 MHz / 16QAM							
Z	20025	1717.5	-13.57	36.45	22.88	194.09	H
	20175	1732.5	-13.95	36.80	22.85	192.75	
	20325	1747.5	-14.34	36.94	22.60	181.97	
	20025	1717.5	-20.95	37.28	16.33	42.95	V
	20175	1732.5	-21.53	37.63	16.10	40.74	
	20325	1747.5	-21.92	37.64	15.72	37.33	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

LTE Band 4							
Channel Bandwidth: 20 MHz / QPSK							
Plane	Channel	Frequency (MHz)	Reading (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (mW)	Polarization (H/V)
Z	20050	1720.0	-12.43	36.45	24.02	252.35	H
	20175	1732.5	-12.81	36.80	23.99	250.61	
	20300	1745.0	-13.10	36.94	23.84	242.10	
	20050	1720.0	-19.78	37.28	17.50	56.23	V
	20175	1732.5	-20.41	37.63	17.22	52.72	
	20300	1745.0	-20.75	37.64	16.89	48.87	
Channel Bandwidth: 20 MHz / 16QAM							
Z	20050	1720.0	-13.48	36.45	22.97	198.15	H
	20175	1732.5	-13.82	36.80	22.98	198.61	
	20300	1745.0	-14.17	36.94	22.77	189.23	
	20050	1720.0	-20.80	37.28	16.48	44.46	V
	20175	1732.5	-21.48	37.63	16.15	41.21	
	20300	1745.0	-21.81	37.64	15.83	38.28	

Note: EIRP (dBm) = Reading (dBm) + Correction Factor (dB)

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

- a. The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB. The limit of emission is equal to -13 dBm.
- b. For operations in the 775-788 MHz, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz. The limit of emissions is equal to -40 dBm.

4.2.2 Test Procedure

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) and/or 1.5 m (above 1 GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G.
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15 \text{ dB}$.


Note: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

<Radiated Emission below or equal 1 GHz>

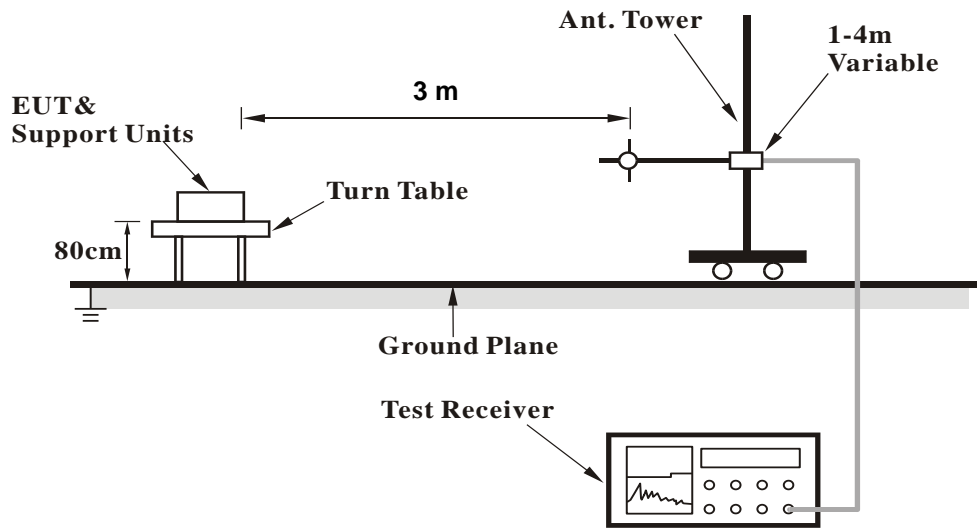

<Radiated Emission above 1 GHz>

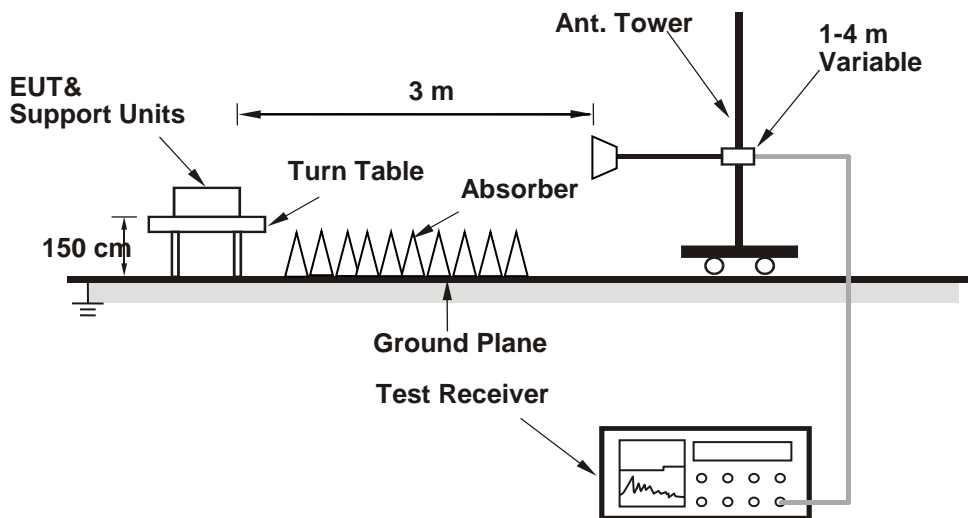

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results

LTE Band 4

Channel Bandwidth: 5 MHz / QPSK

Low Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-21-2019

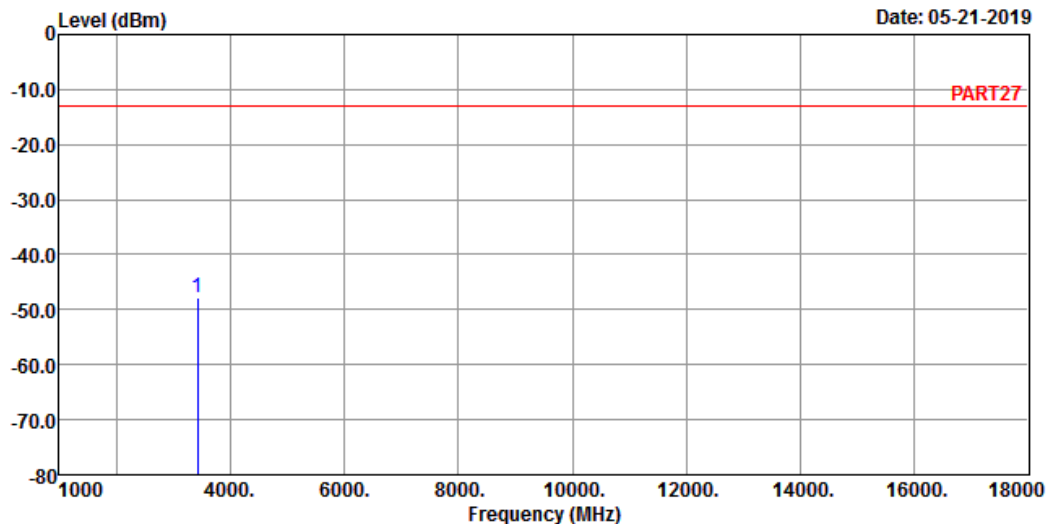

Site : 966 Chamber 5

Condition: PART27 HORIZONTAL

Remak : Cat-M1 Band 4 QPSK_5M Link_L-CH

Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	dB

1 pp 3425.00 -47.75 -39.41 -13.00 -8.34 -34.75 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

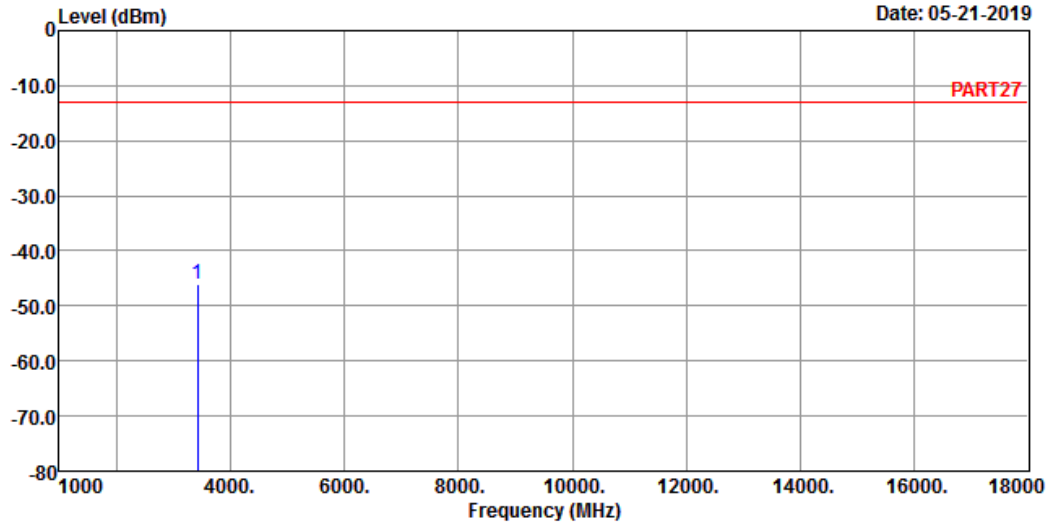

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 4 QPSK_5M Link_L-CH
 Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	
1 pp 3425.00	-46.12	-37.78	-13.00	-8.34 -33.12	Peak


Middle Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

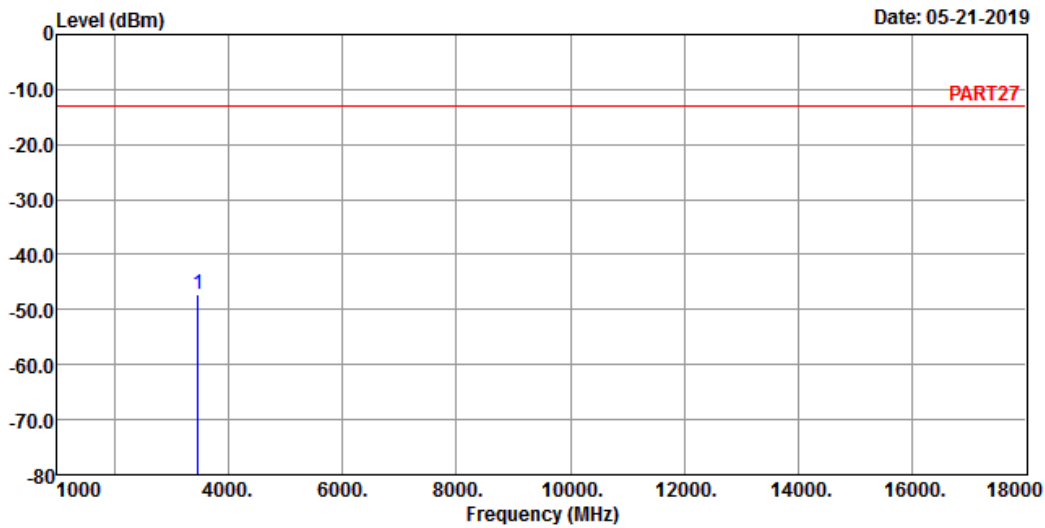

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : Cat-M1 Band 4 QPSK_5M Link_M-CH
 Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 3465.00 -47.19 -39.31 -13.00 -7.88 -34.19 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

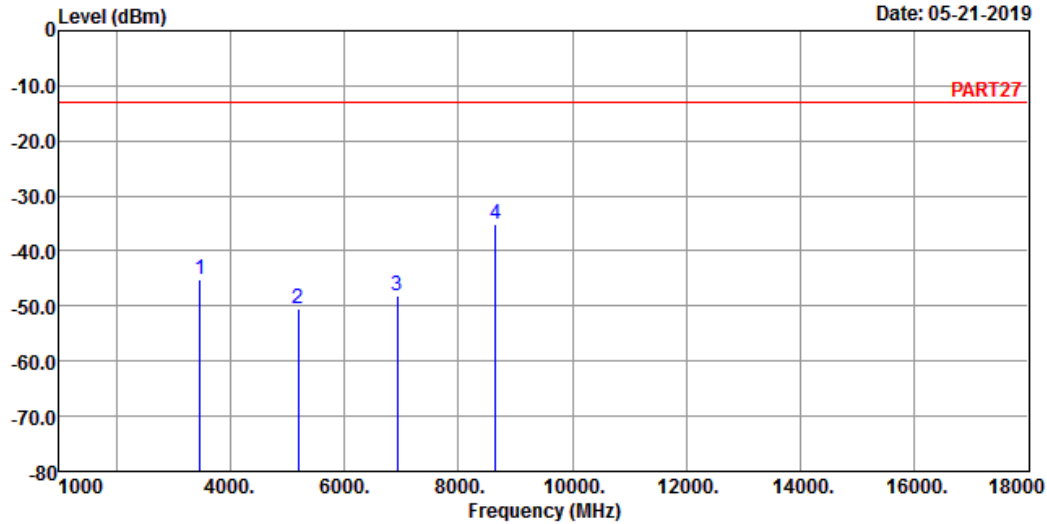

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 4 QPSK_5M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3465.00	-45.11	-37.23	-13.00	-7.88	-32.11	Peak
2	5197.50	-50.40	-48.33	-13.00	-2.07	-37.40	Peak
3	6930.00	-48.18	-50.87	-13.00	2.69	-35.18	Peak
4	8655.00	-35.04	-39.74	-13.00	4.70	-22.04	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-21-2019

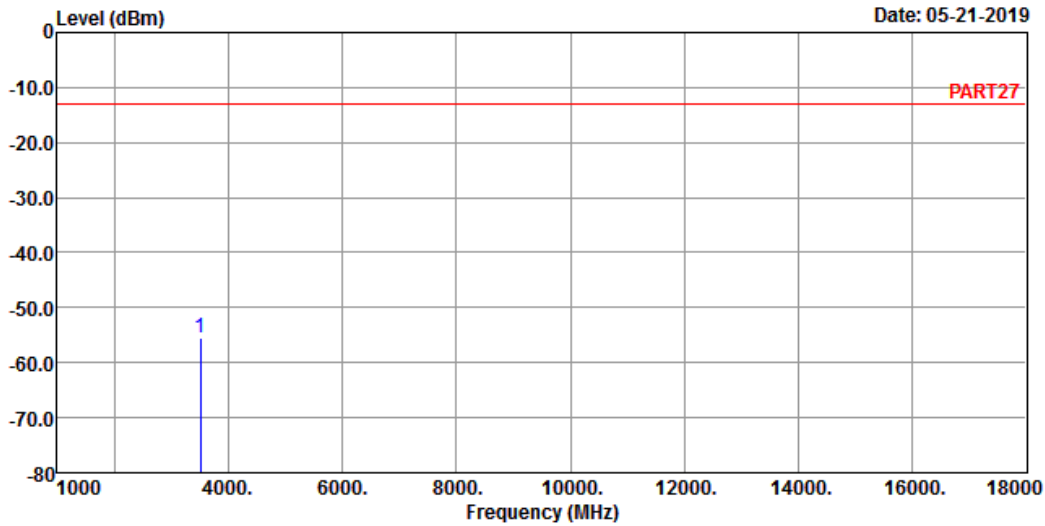

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : Cat-M1 Band 4 QPSK_5M Link_H-CH
 Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	

1 pp 3505.00 -55.50 -48.05 -13.00 -7.45 -42.50 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

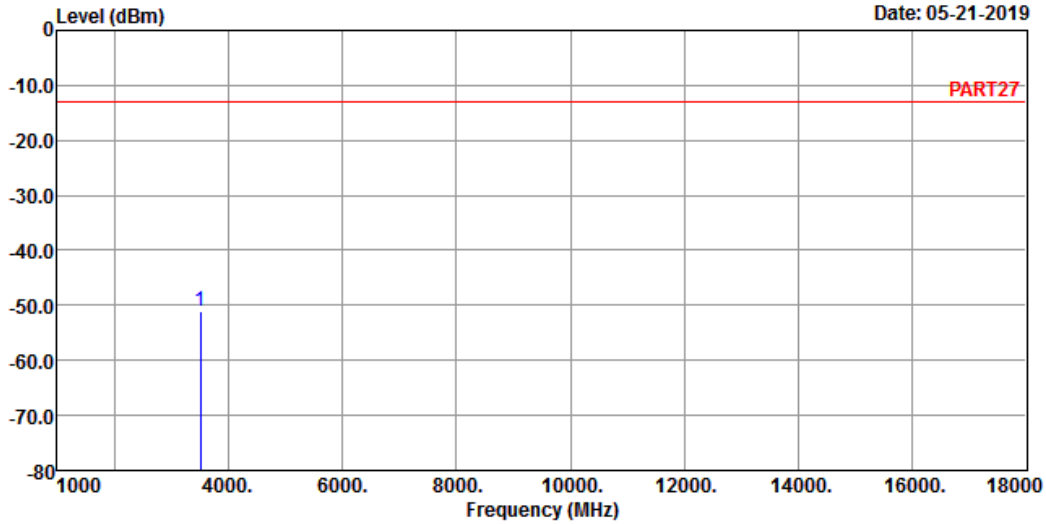

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 4 QPSK_5M Link_H-CH
 Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
MHz	dBm	dBm	dBm	dB	dB	
1 pp 3505.00	-50.98	-43.53	-13.00	-7.45	-37.98	Peak


Channel Bandwidth: 20 MHz / QPSK
 Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

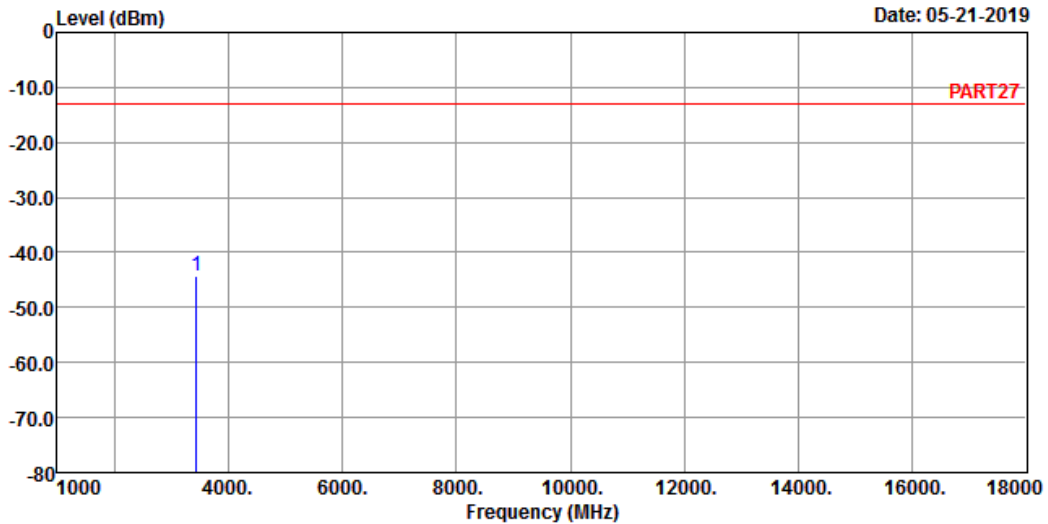

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : Cat-M1 Band 4 QPSK_20M Link_L-CH
 Tested by: Getaz Yang

Freq	Level	Read Level	Limit	Over	Remark
MHz	dBm	dBm	dBm	dB	
1 pp 3440.00	-44.40	-36.18	-13.00	-8.22	-31.40 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

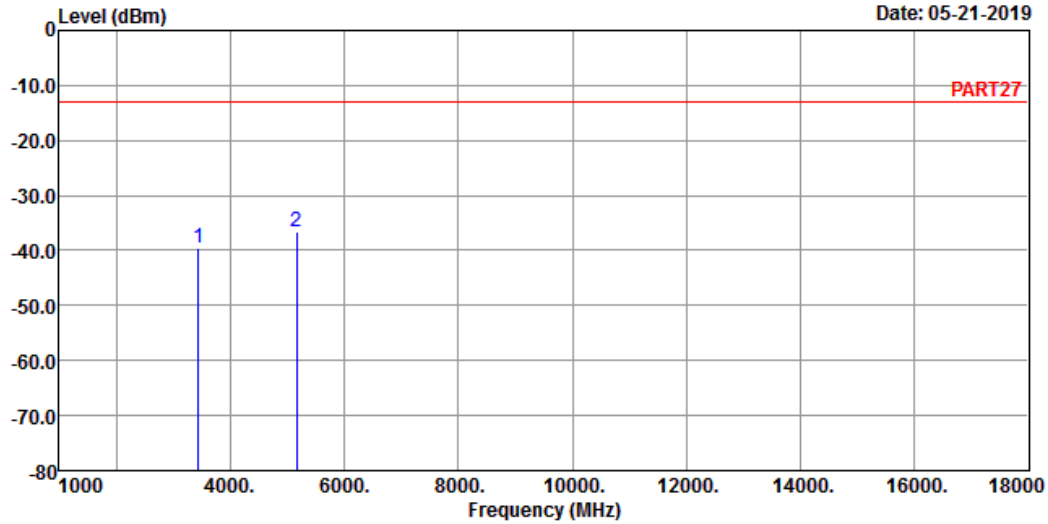

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 4 QPSK_20M Link_L-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3440.00	-39.61	-31.39	-13.00	-8.22	-26.61	Peak
2	5160.00	-36.68	-34.77	-13.00	-1.91	-23.68	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 05-21-2019

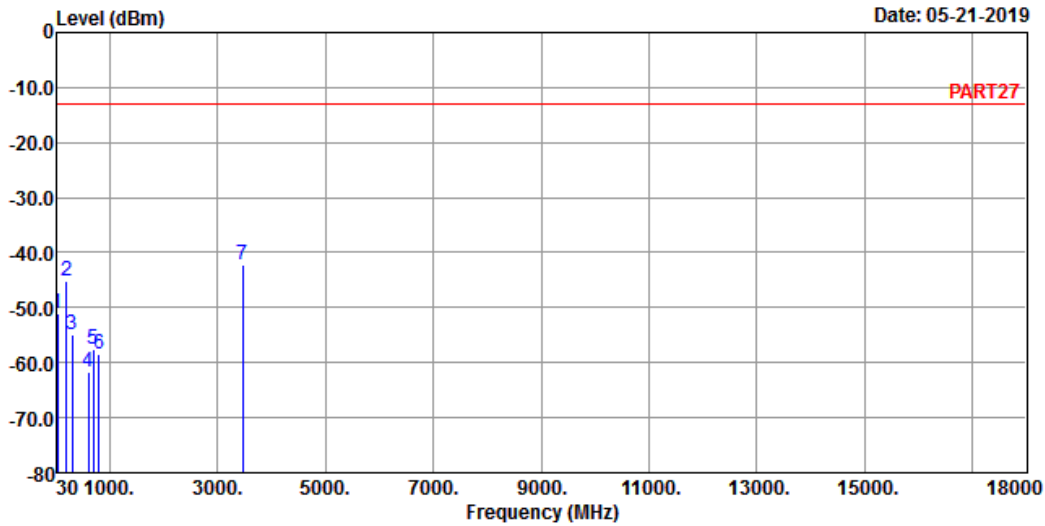

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : Cat-M1 Band 4 QPSK_20M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	30.00	-51.13	-51.51	-13.00	0.38	-38.13	Peak
2	194.90	-45.05	-37.50	-13.00	-7.55	-32.05	Peak
3	305.48	-54.78	-47.86	-13.00	-6.92	-41.78	Peak
4	599.39	-61.74	-60.95	-13.00	-0.79	-48.74	Peak
5	696.39	-57.50	-57.34	-13.00	-0.16	-44.50	Peak
6	799.21	-58.33	-59.07	-13.00	0.74	-45.33	Peak
7 pp	3465.00	-42.27	-34.39	-13.00	-7.88	-29.27	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 05-21-2019

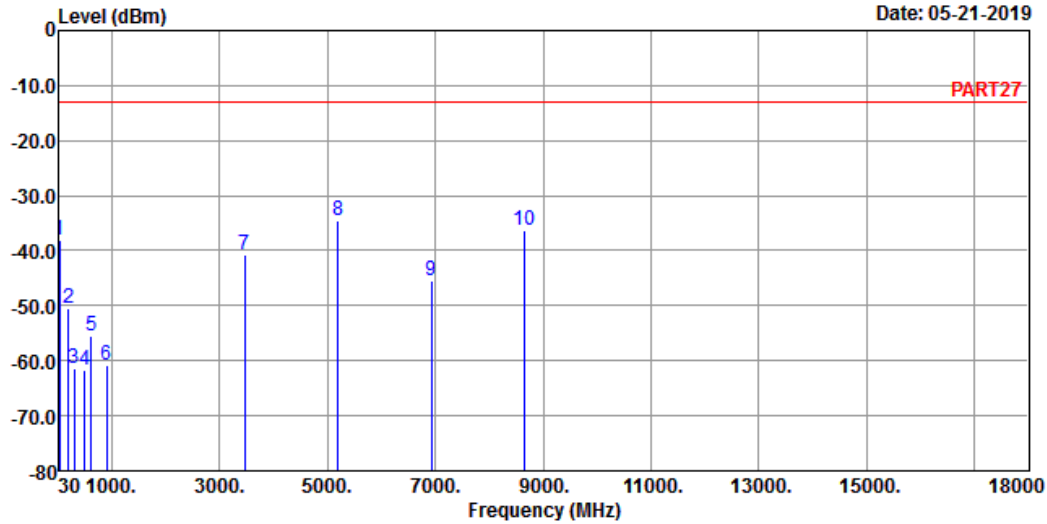

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 4 QPSK_20M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	30.00	-38.07	-38.45	-13.00	0.38	-25.07	Peak
2	193.93	-50.48	-43.02	-13.00	-7.46	-37.48	Peak
3	305.48	-61.33	-54.41	-13.00	-6.92	-48.33	Peak
4	500.45	-61.58	-56.97	-13.00	-4.61	-48.58	Peak
5	626.55	-55.54	-54.72	-13.00	-0.82	-42.54	Peak
6	902.03	-60.72	-61.34	-13.00	0.62	-47.72	Peak
7	3465.00	-40.66	-32.78	-13.00	-7.88	-27.66	Peak
8 pp	5197.50	-34.47	-32.40	-13.00	-2.07	-21.47	Peak
9	6930.00	-45.41	-48.10	-13.00	2.69	-32.41	Peak
10	8662.50	-36.30	-41.04	-13.00	4.74	-23.30	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-21-2019

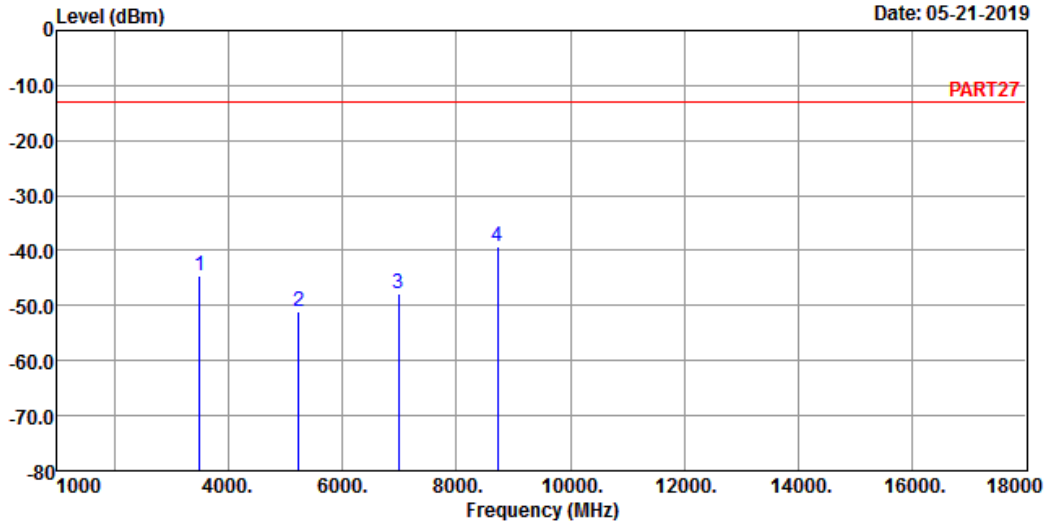

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : Cat-M1 Band 4 QPSK_20M Link_H-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3490.00	-44.43	-36.78	-13.00	-7.65	-31.43	Peak
2	5235.00	-50.95	-48.54	-13.00	-2.41	-37.95	Peak
3	6980.00	-47.70	-50.76	-13.00	3.06	-34.70	Peak
4 pp	8725.00	-39.13	-43.89	-13.00	4.76	-26.13	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

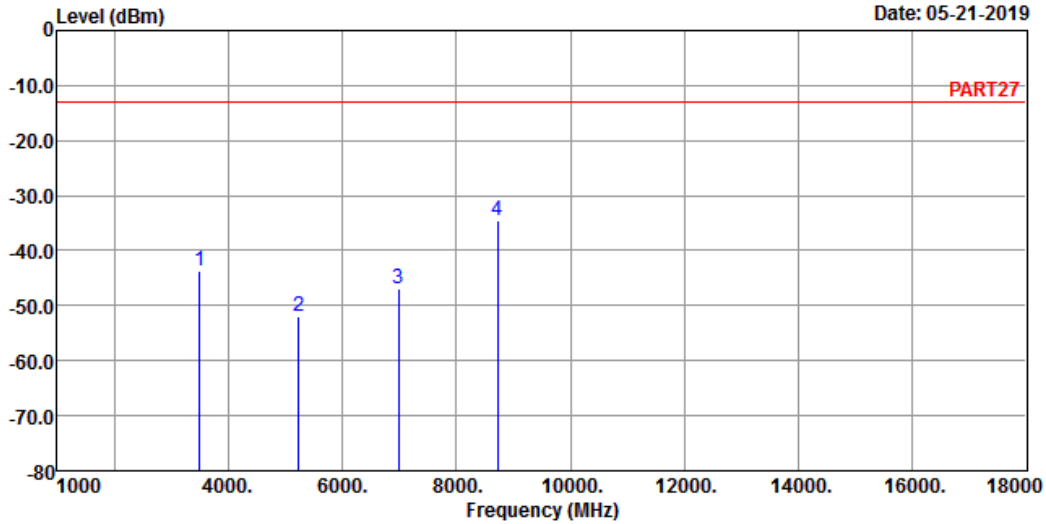

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 4 QPSK_20M Link_H-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit Line	Over Factor	Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	3490.00	-43.63	-35.98	-13.00	-7.65	-30.63	Peak
2	5235.00	-52.08	-49.67	-13.00	-2.41	-39.08	Peak
3	6980.00	-47.04	-50.10	-13.00	3.06	-34.04	Peak
4	8725.00	-34.48	-39.24	-13.00	4.76	-21.48	Peak


LTE Band 12
 Channel Bandwidth: 5 MHz / QPSK
 Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

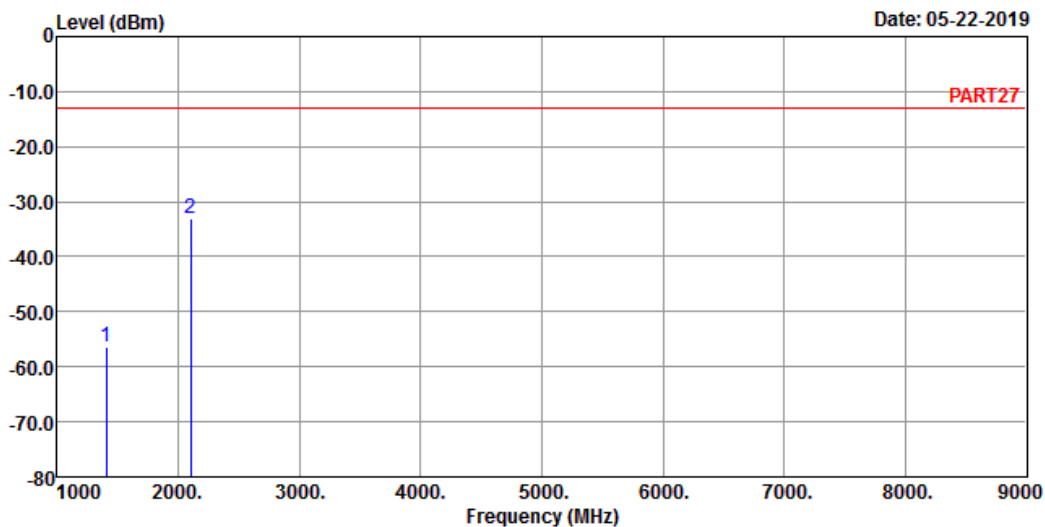

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : Cat-M1 Band 12 QPSK_5M Link_L-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1403.00	-56.35	-44.44	-13.00	-11.91	-43.35	Peak
2	2104.50	-32.97	-22.81	-13.00	-10.16	-19.97	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-22-2019

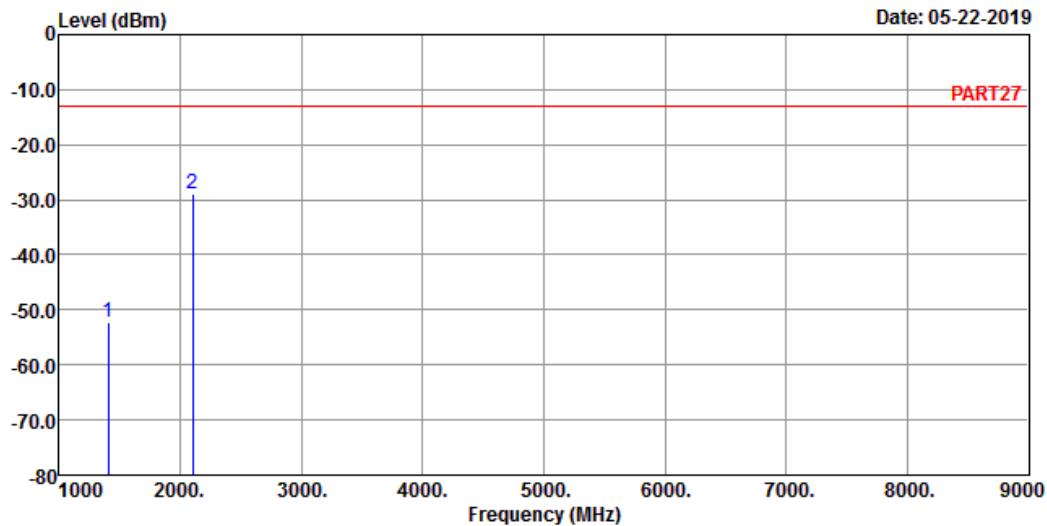

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 12 QPSK_5M Link_L-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1403.00	-52.28	-40.37	-13.00	-11.91	-39.28	Peak
2	2104.50	-28.96	-18.80	-13.00	-10.16	-15.96	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-22-2019

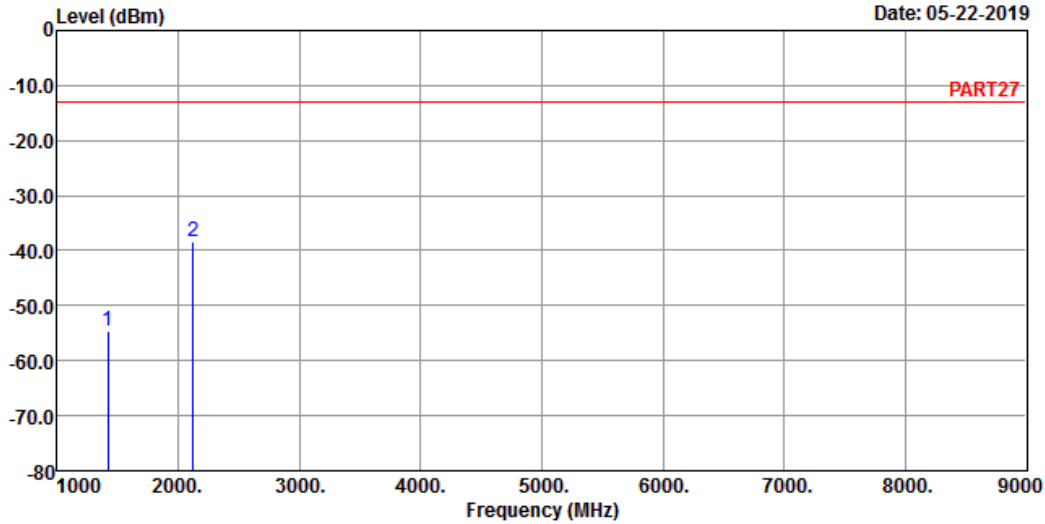

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : Cat-M1 Band 12 QPSK_5M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1415.00	-54.58	-42.50	-13.00	-12.08	-41.58	Peak
2 pp	2122.50	-38.48	-28.61	-13.00	-9.87	-25.48	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-22-2019

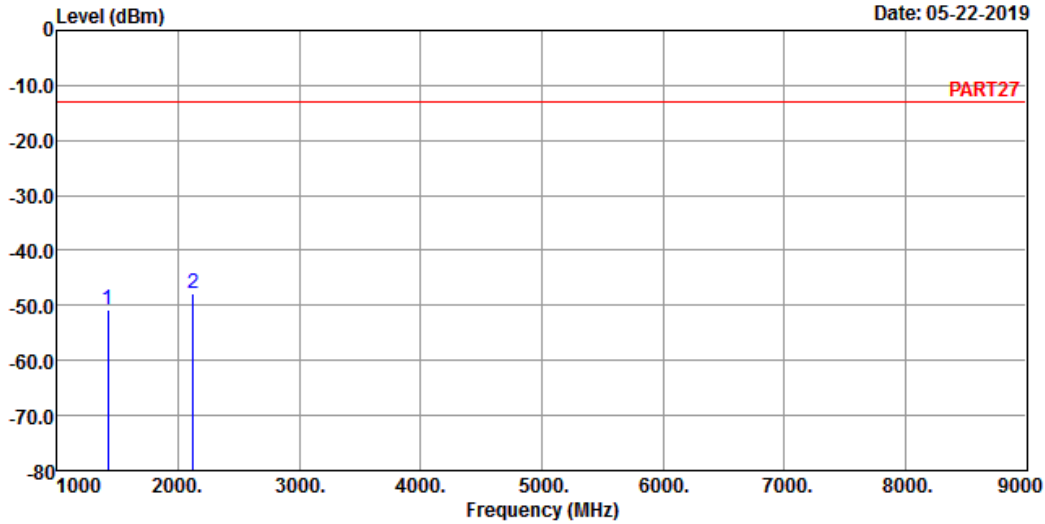

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 12 QPSK_5M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1415.00	-50.68	-38.60	-13.00	-12.08	-37.68	Peak
2	pp 2122.50	-47.83	-37.96	-13.00	-9.87	-34.83	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-22-2019

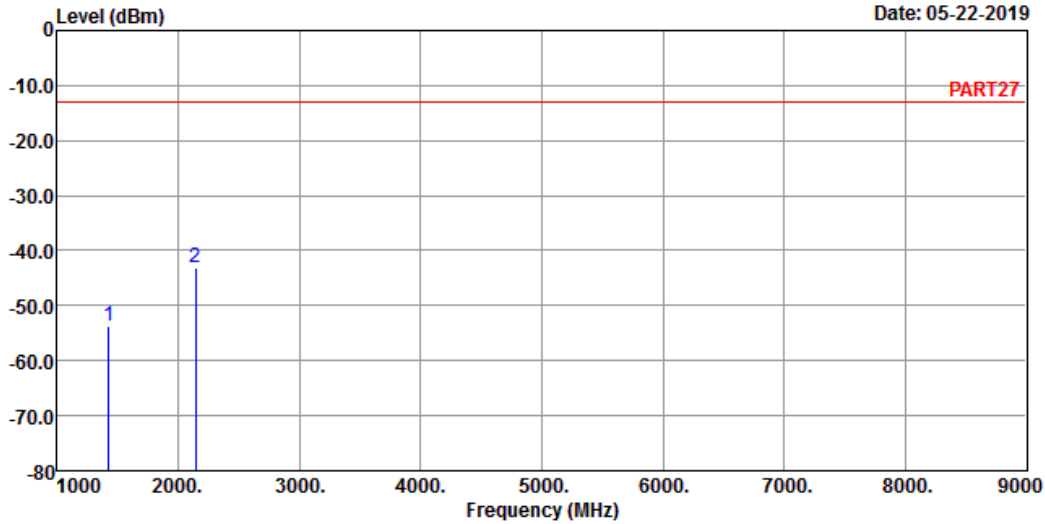

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : Cat-M1 Band 12 QPSK_5M Link_H-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1427.00	-53.59	-41.34	-13.00	-12.25	-40.59	Peak
2 pp	2140.50	-43.13	-33.56	-13.00	-9.57	-30.13	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-22-2019

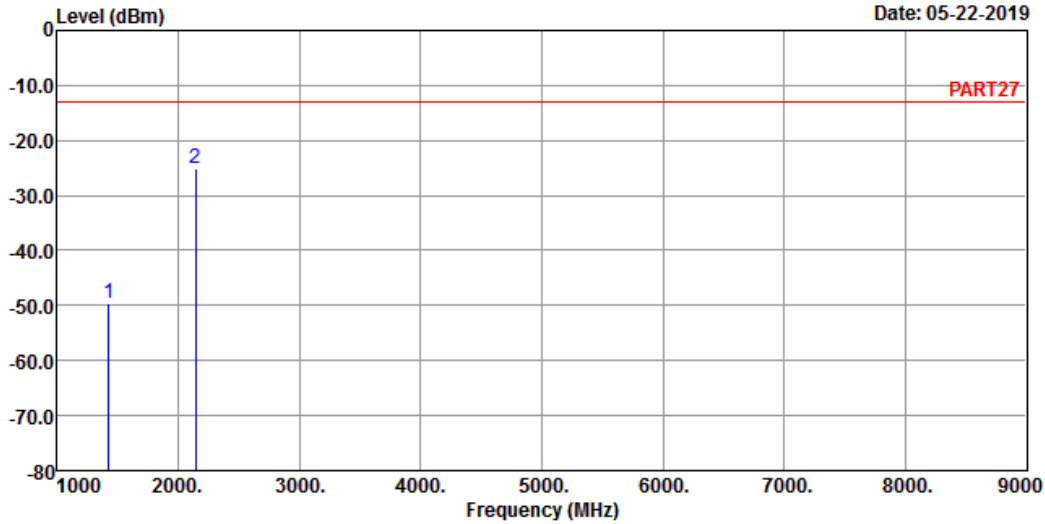

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 12 QPSK_5M Link_H-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1427.00	-49.72	-37.47	-13.00	-12.25	-36.72	Peak
2	pp 2140.50	-25.19	-15.62	-13.00	-9.57	-12.19	Peak


Channel Bandwidth: 10 MHz / QPSK
Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

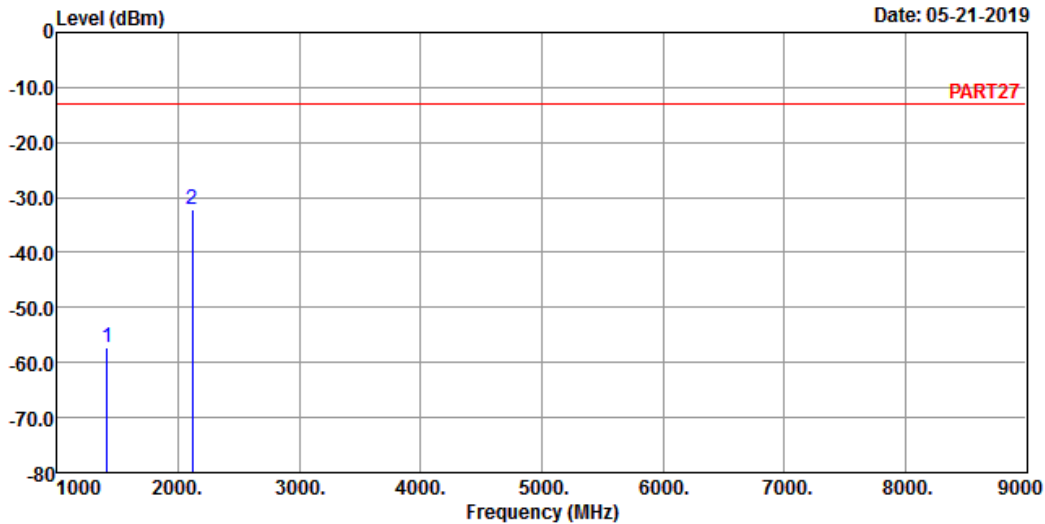

Site : 966 Chamber 5
Condition: PART27 HORIZONTAL
Remak : Cat-M1 Band 12 QPSK_10M Link_L-CH
Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1408.00	-57.13	-45.17	-13.00	-11.96	-44.13	Peak
2 pp	2112.00	-32.32	-22.36	-13.00	-9.96	-19.32	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

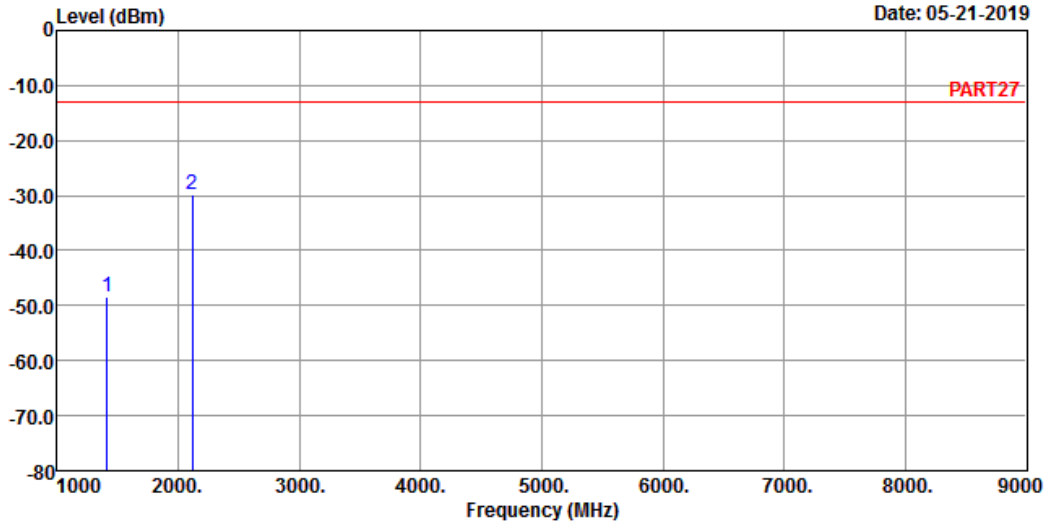

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 12 QPSK_10M Link_L-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1408.00	-48.41	-36.45	-13.00	-11.96	-35.41	Peak
2	pp 2112.00	-29.84	-19.88	-13.00	-9.96	-16.84	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 05-21-2019

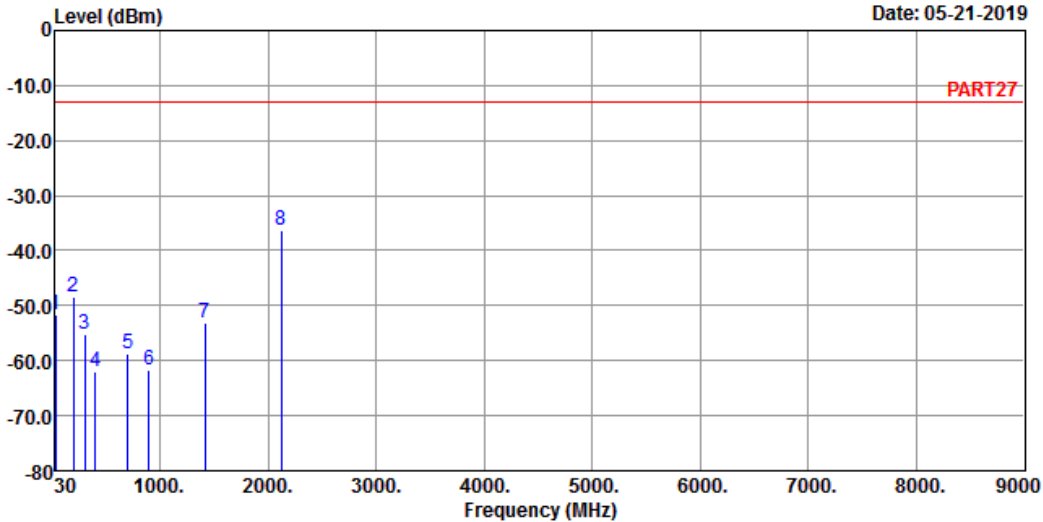

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : Cat-M1 Band 12 QPSK_10M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	30.00	-51.77	-52.15	-13.00	0.38	-38.77	Peak
2	194.90	-48.32	-40.77	-13.00	-7.55	-35.32	Peak
3	305.48	-55.29	-48.37	-13.00	-6.92	-42.29	Peak
4	397.63	-61.85	-55.89	-13.00	-5.96	-48.85	Peak
5	699.30	-58.86	-58.75	-13.00	-0.11	-45.86	Peak
6	898.15	-61.63	-62.19	-13.00	0.56	-48.63	Peak
7	1415.00	-53.19	-41.11	-13.00	-12.08	-40.19	Peak
8 pp	2122.50	-36.36	-26.49	-13.00	-9.87	-23.36	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 05-21-2019

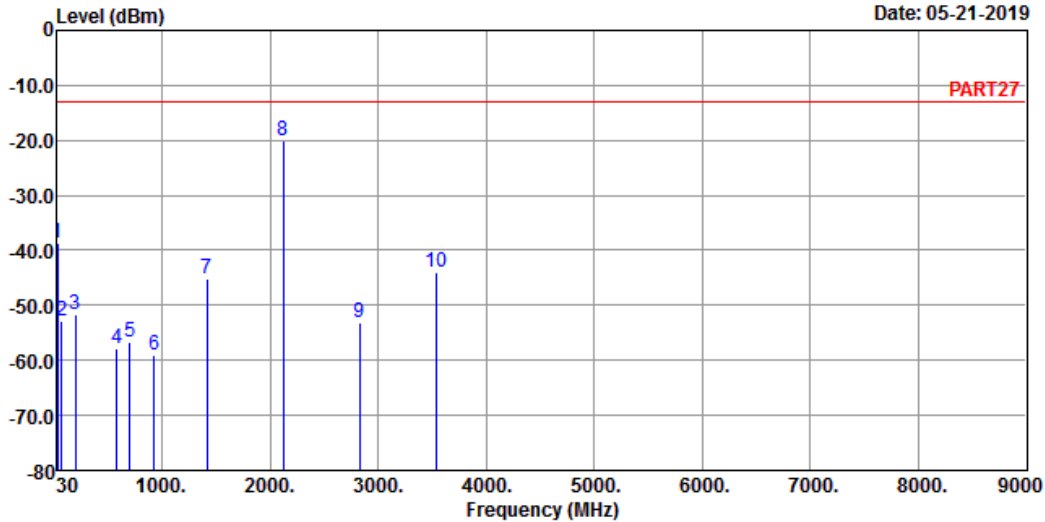

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 12 QPSK_10M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	30.00	-38.71	-39.09	-13.00	0.38	-25.71	Peak
2	67.83	-52.94	-44.69	-13.00	-8.25	-39.94	Peak
3	194.90	-51.72	-44.17	-13.00	-7.55	-38.72	Peak
4	578.05	-57.82	-56.14	-13.00	-1.68	-44.82	Peak
5	698.33	-56.73	-56.60	-13.00	-0.13	-43.73	Peak
6	926.28	-58.94	-60.16	-13.00	1.22	-45.94	Peak
7	1415.00	-45.20	-33.12	-13.00	-12.08	-32.20	Peak
8 pp	2122.50	-19.97	-10.10	-13.00	-9.87	-6.97	Peak
9	2830.00	-53.27	-44.79	-13.00	-8.48	-40.27	Peak
10	3537.50	-43.95	-36.73	-13.00	-7.22	-30.95	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-21-2019

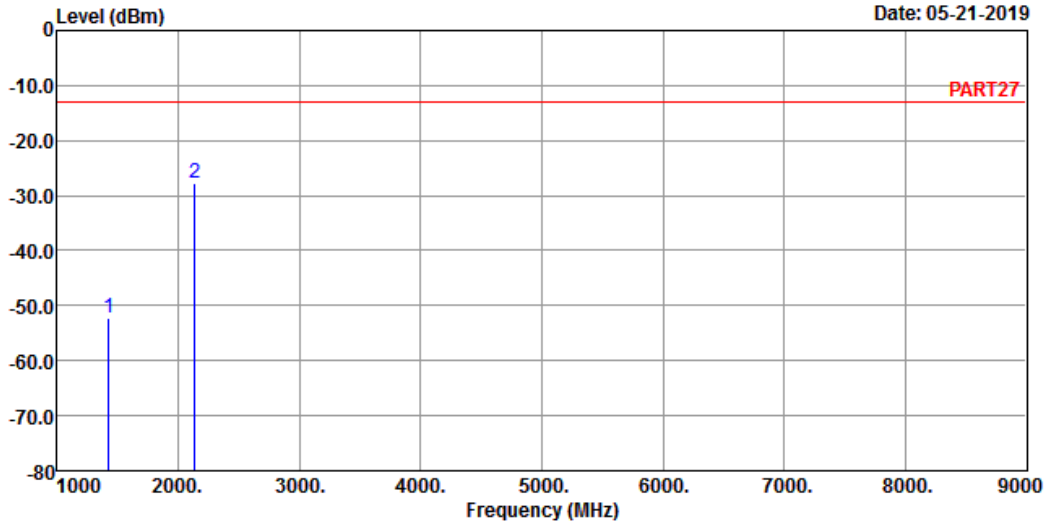

Site : 966 Chamber 5
 Condition: PART27 HORIZONTAL
 Remak : Cat-M1 Band 12 QPSK_10M Link_H-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1422.00	-52.34	-40.15	-13.00	-12.19	-39.34	Peak
2 pp	2133.00	-27.71	-18.04	-13.00	-9.67	-14.71	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-21-2019

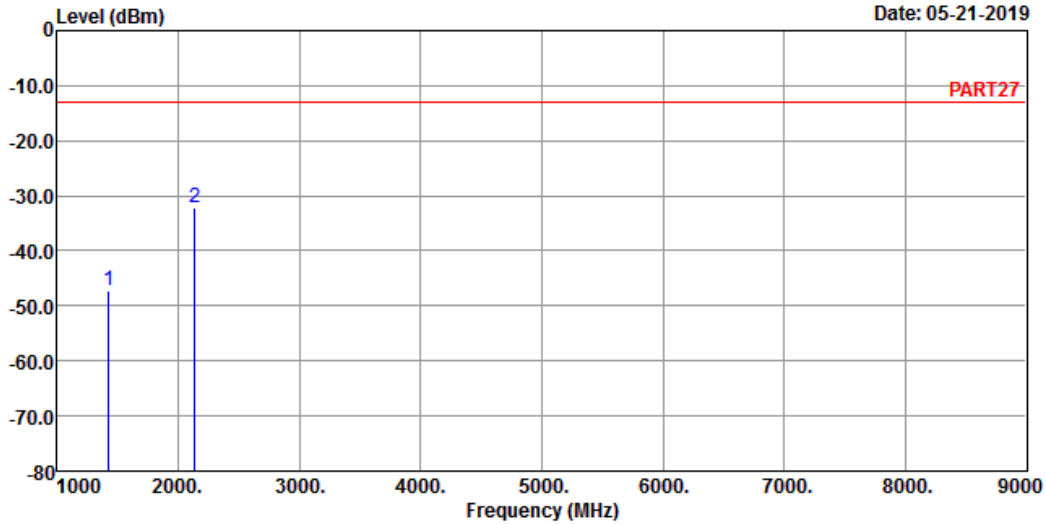

Site : 966 Chamber 5
 Condition: PART27 VERTICAL
 Remak : Cat-M1 Band 12 QPSK_10M Link_H-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1422.00	-47.17	-34.98	-13.00	-12.19	-34.17	Peak
2 pp	2133.00	-32.29	-22.62	-13.00	-9.67	-19.29	Peak


LTE Band 13
 Channel Bandwidth: 5 MHz / QPSK
 Low Channel



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

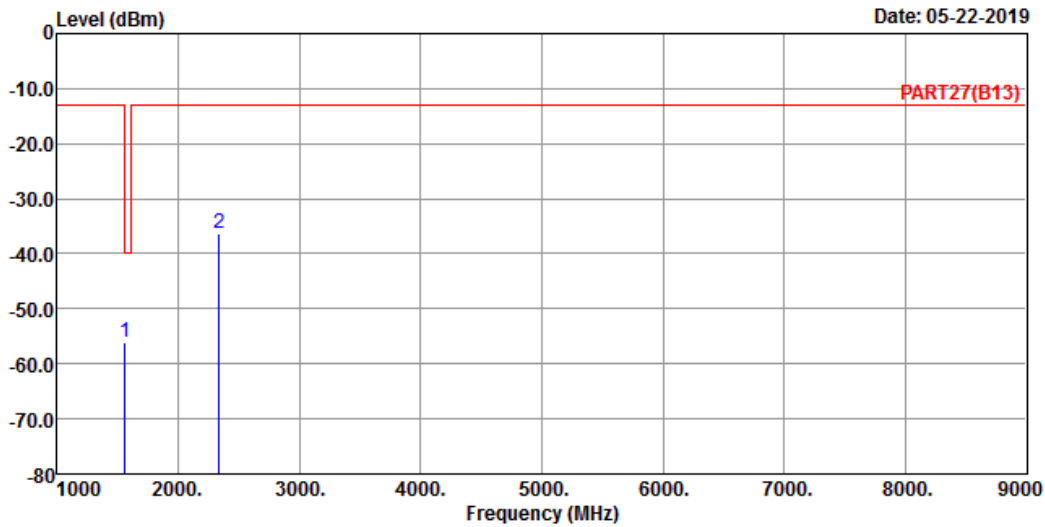

Site : 966 Chamber 5
 Condition: PART27(B13) HORIZONTAL
 Remak : Cat-M1 Band 13 QPSK_5M Link_L-CH
 Tested by: Getaz Yang

	Read	Limit	Over		
Freq	Level	Level	Line	Factor	Limit Remark
MHz	dBm	dBm	dBm	dB	dB
1 pp 1559.00	-56.17	-42.85	-40.00	-13.32	-16.17 Peak
2 2338.50	-36.40	-27.02	-13.00	-9.38	-23.40 Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-22-2019

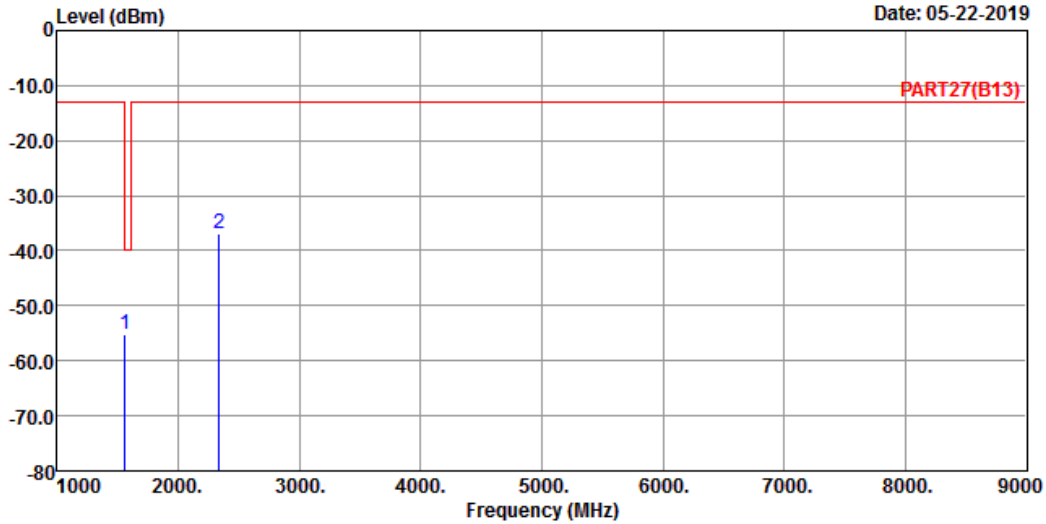

Site : 966 Chamber 5
 Condition: PART27(B13) VERTICAL
 Remak : Cat-M1 Band 13 QPSK_5M Link_L-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1559.00	-55.15	-41.83	-40.00	-13.32	-15.15	Peak
2	2338.50	-37.05	-27.67	-13.00	-9.38	-24.05	Peak

Middle Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-22-2019

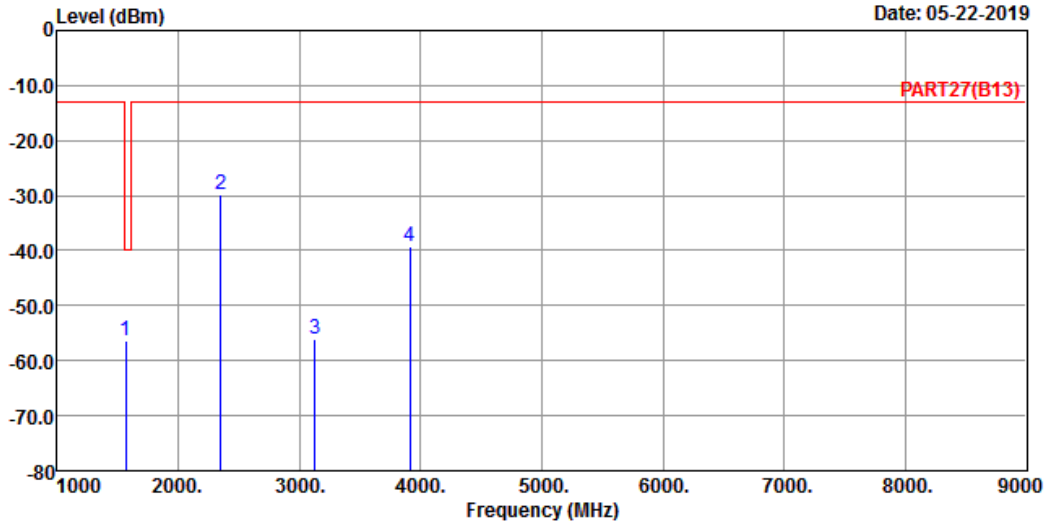

Site : 966 Chamber 5
 Condition: PART27(B13) HORIZONTAL
 Remak : Cat-M1 Band 13 QPSK_5M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1564.00	-56.31	-42.97	-40.00	-13.34	-16.31	Peak
2	2346.00	-29.90	-20.46	-13.00	-9.44	-16.90	Peak
3	3128.00	-56.00	-47.65	-13.00	-8.35	-43.00	Peak
4	3910.00	-39.39	-33.19	-13.00	-6.20	-26.39	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-22-2019

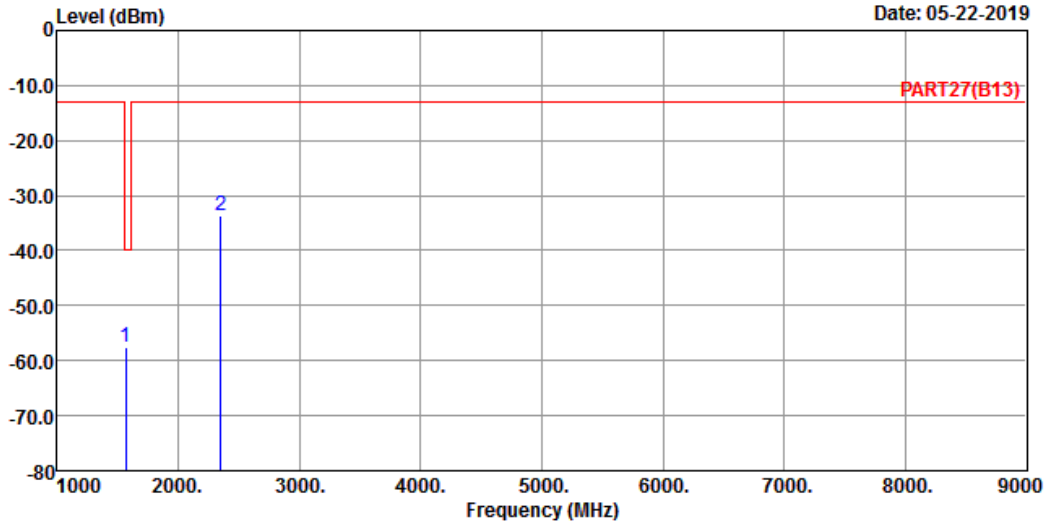

Site : 966 Chamber 5
 Condition: PART27(B13) VERTICAL
 Remak : Cat-M1 Band 13 QPSK_5M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1 pp	1564.00	-57.51	-44.17	-40.00	-13.34	-17.51	Peak
2	2346.00	-33.61	-24.17	-13.00	-9.44	-20.61	Peak

High Channel




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 3

Date: 05-22-2019

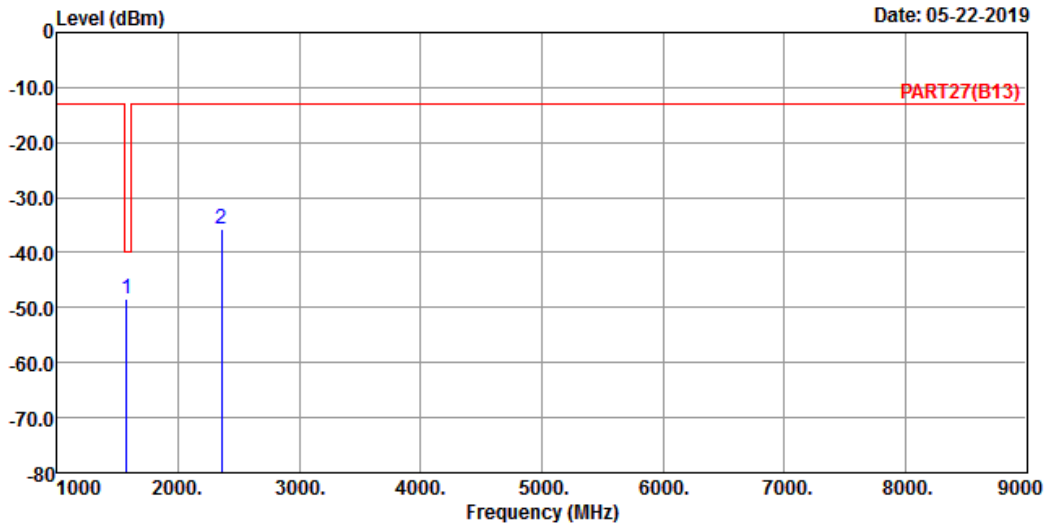

Site : 966 Chamber 5
 Condition: PART27(B13) HORIZONTAL
 Remak : Cat-M1 Band 13 QPSK_5M Link_H-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	pp 1569.00	-48.44	-35.09	-40.00	-13.35	-8.44	Peak
2	2353.50	-35.72	-26.21	-13.00	-9.51	-22.72	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 4

Date: 05-22-2019

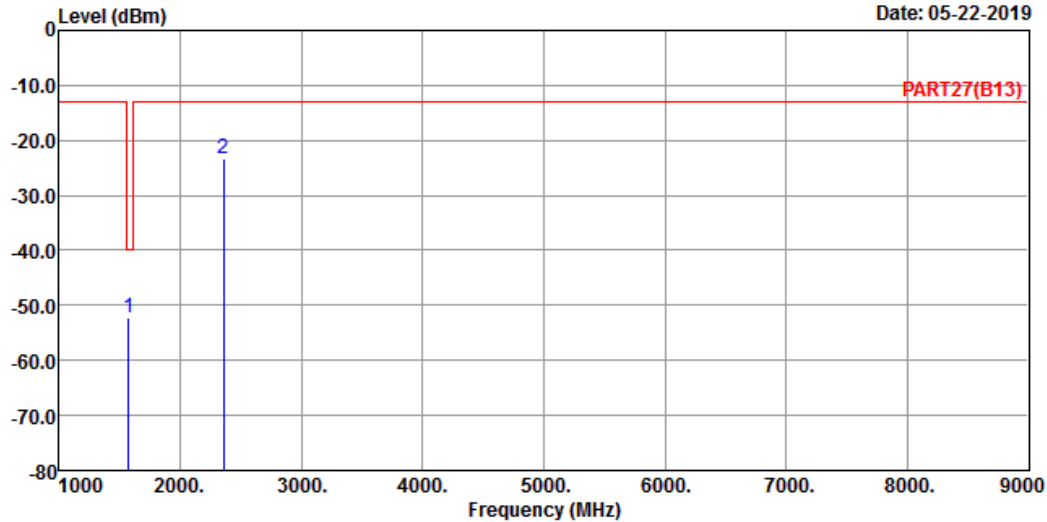

Site : 966 Chamber 5
 Condition: PART27(B13) VERTICAL
 Remak : Cat-M1 Band 13 QPSK_5M Link_H-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	1569.00	-52.35	-39.00	-40.00	-13.35	-12.35	Peak
2	pp 2353.50	-23.25	-13.74	-13.00	-9.51	-10.25	Peak

Channel Bandwidth: 10 MHz / QPSK




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 5

Date: 05-22-2019

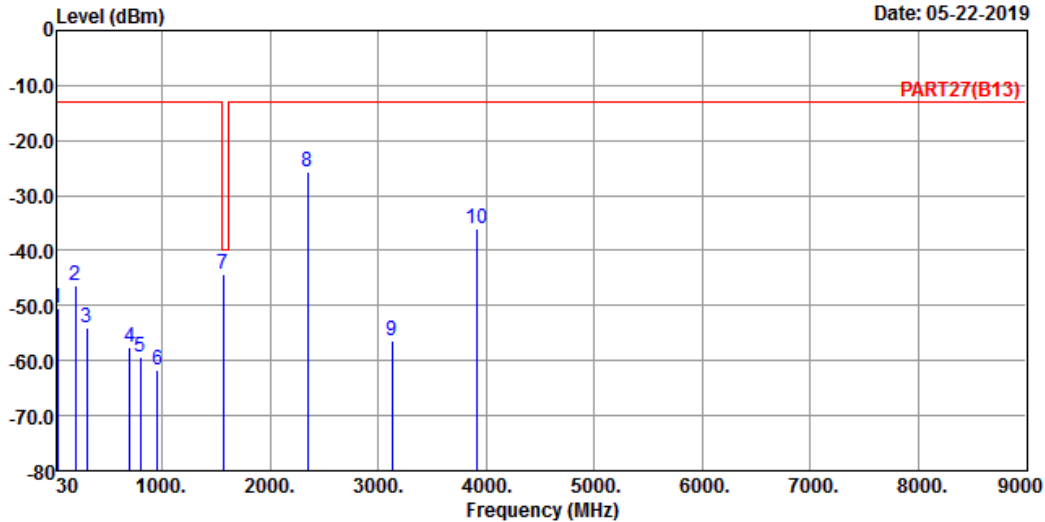

Site : 966 Chamber 5
 Condition: PART27(B13) HORIZONTAL
 Remak : Cat-M1 Band 13 QPSK_10M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	30.97	-50.55	-50.44	-13.00	-0.11	-37.55	Peak
2	194.90	-46.38	-38.83	-13.00	-7.55	-33.38	Peak
3	304.51	-54.02	-47.08	-13.00	-6.94	-41.02	Peak
4	698.33	-57.45	-57.32	-13.00	-0.13	-44.45	Peak
5	797.27	-59.31	-60.05	-13.00	0.74	-46.31	Peak
6	954.41	-61.76	-63.73	-13.00	1.97	-48.76	Peak
7 pp	1554.00	-44.17	-30.83	-40.00	-13.34	-4.17	Peak
8	2346.00	-25.55	-16.11	-13.00	-9.44	-12.55	Peak
9	3128.00	-56.28	-47.93	-13.00	-8.35	-43.28	Peak
10	3910.00	-35.94	-29.74	-13.00	-6.20	-22.94	Peak




Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

A D T

Data: 6

Date: 05-22-2019

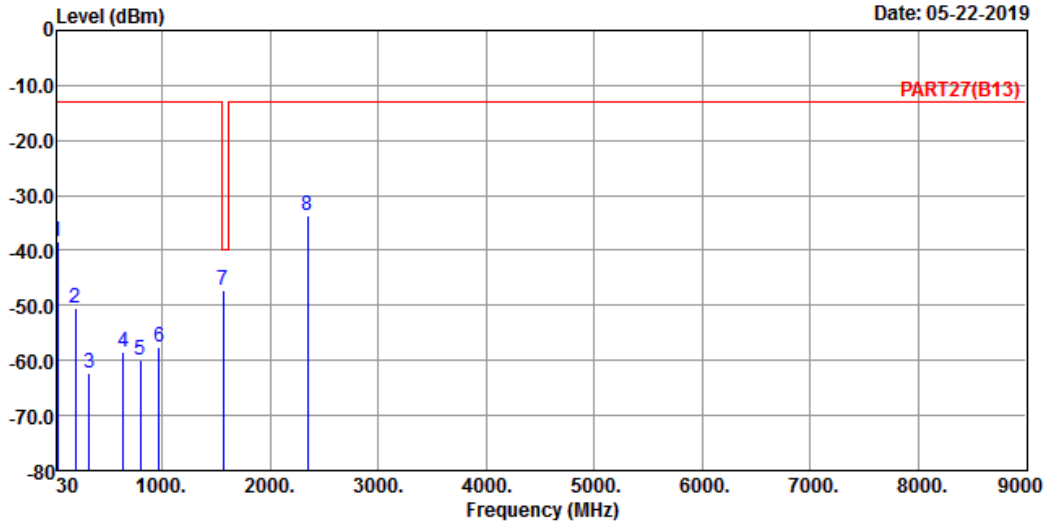

Site : 966 Chamber 5
 Condition: PART27(B13) VERTICAL
 Remak : Cat-M1 Band 13 QPSK_10M Link_M-CH
 Tested by: Getaz Yang

	Freq	Level	Read Level	Limit	Line Factor	Over Limit	Remark
	MHz	dBm	dBm	dBm	dB	dB	
1	30.00	-38.48	-38.86	-13.00	0.38	-25.48	Peak
2	194.90	-50.61	-43.06	-13.00	-7.55	-37.61	Peak
3	325.85	-62.35	-55.74	-13.00	-6.61	-49.35	Peak
4	643.04	-58.38	-57.51	-13.00	-0.87	-45.38	Peak
5	798.24	-60.03	-60.77	-13.00	0.74	-47.03	Peak
6	969.93	-57.53	-60.05	-13.00	2.52	-44.53	Peak
7 pp	1564.00	-47.25	-33.91	-40.00	-13.34	-7.25	Peak
8	2346.00	-33.54	-24.10	-13.00	-9.44	-20.54	Peak

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---