




TEST A.5: SPURIOUS EMISSIONS AT ANTENNA TERMINALS Product standard: FCC Part 22 / IC RSS-132 LIMITS: Test standard: FCC §2.1051 and § 22.917/ RSS-132 Clause 5.5 LIMITS According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts. At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes: Po (dBm) - [43 + 10 log (Po in watts)] = -13 dBm **TEST SETUP** The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-ohm attenuator and a power splitter. The spectrum was investigated from 9 kHz to 18 GHz for LTE Band 26. The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer. For LTE mode the configuration of Resource Blocks and modulation which is the worst case for conducted power was used. Spectrum Analyser Power EUT Attenuator devider Signalling Unit Power supply



TESTED SAMPLES:	S/01				
TESTED CONDITIONS MODES:	TC#01				
TEST RESULTS:	PASS				
Frequency range 9 kHz – 18 GHz					
TE QPSK MODULATION. BW = 1.4 MHz					
Lowest Channel No spurious signal was found at less than 20dE	B respect to the limit in the frequency range.				
Middle Channel No spurious signal was found at less than 20dE	3 respect to the limit in the frequency range.				
Highest Channel No spurious signal was found at less than 20dE	3 respect to the limit in the frequency range.				
LTE QPSK MODULATION. BW = 3 MHz					
Lowest Channel No spurious signal was found at less than 20dE	3 respect to the limit in the frequency range.				
Middle Channel No spurious signal was found at less than 20dB respect to the limit in the frequency range.					
Highest Channel No spurious signal was found at less than 20dB respect to the limit in the frequency range.					
LTE QPSK MODULATION. BW = 5 MHz					
Lowest Channel No spurious signal was found at less than 20dE	3 respect to the limit in the frequency range.				
Middle Channel No spurious signal was found at less than 20dE	3 respect to the limit in the frequency range.				
Highest Channel No spurious signal was found at less than 20dB respect to the limit in the frequency range.					
LTE QPSK MODULATION. BW = 10 MHz					
Lowest Channel No spurious signal was found at less than 20dE	3 respect to the limit in the frequency range.				
Middle Channel No spurious signal was found at less than 20dB respect to the limit in the frequency range.					
Highest Channel No spurious signal was found at less than 20dB respect to the limit in the frequency range.					
LTE QPSK MODULATION. BW = 15 MHz					
Lowest Channel No spurious signal was found at less than 20dE	3 respect to the limit in the frequency range.				
Middle Channel No spurious signal was found at less than 20dE	3 respect to the limit in the frequency range.				
Highest Channel No spurious signal was found at less than 20dE	3 respect to the limit in the frequency range.				




TEST RESULTS (Cont): LTE QPSK MODULATION. BW = 1.4MHz Lowest Channel

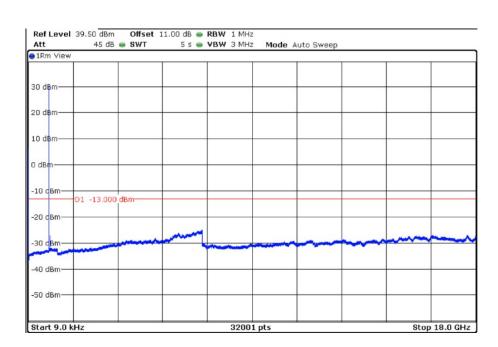


Middle Channel

⊖1Rm Max					 		
30 dBm							
20 dBm							
10 dBm							
0 dBm							
-10 dBm-01 -	13.000 dBm				 		
-20 dBm	13.000 ubin						
-30 dBm		m			 		
-40 dBm							
-50 dBm							
Start 9.0 kHz			32001	L pts		Stop	18.0 G



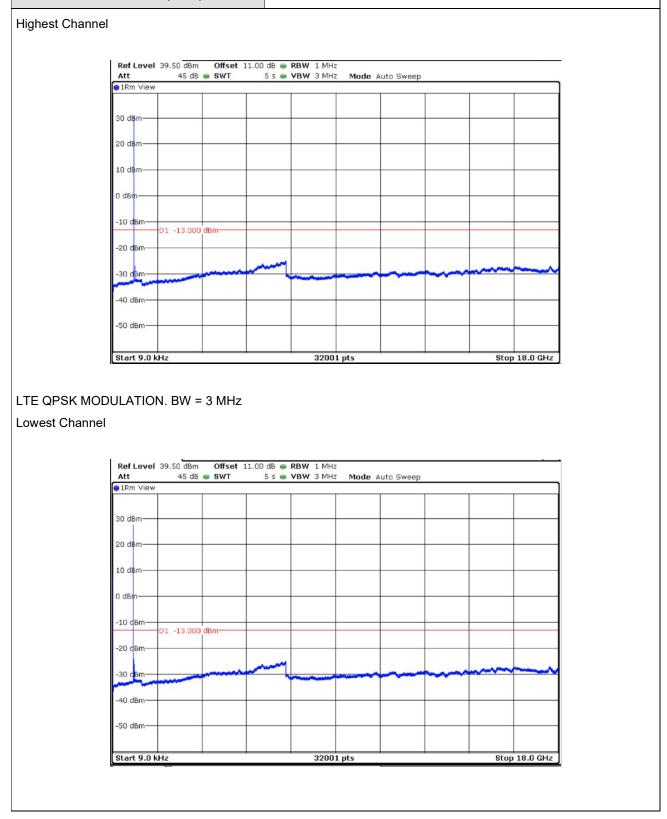



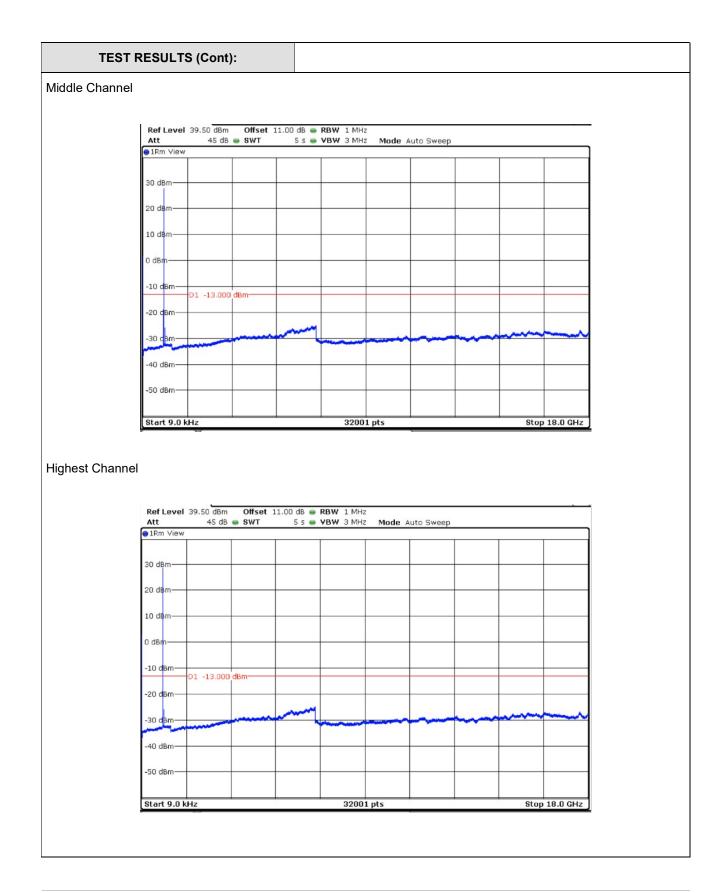





Stop 18.0 GHz

TEST RESULTS (Cont): LTE QPSK MODULATION. BW = 5 MHz Lowest Channel Ref Level 40.50 dBm Offset 12.00 dB - RBW 1 MHz Att 45 dB 🔵 SWT 5 s 👄 VBW 3 MHz Mode Auto Sweep ●1Rm View 30 dBm 20 d**B**I 10 dBm 0 dBm -10 cBm-D1 -13.000 dBm--20 (Bm -30 c<mark>Bm</mark> -40 dBm--50 dBm-Start 9.0 kHz 32001 pts Middle Channel Ref Level 40.50 dBm Offset 12.00 dB 👄 RBW 1 MHz Att 45 dB 👄 SWT 5 s 👄 VBW 3 MHz Mode Auto Sweep ●1Rm View 30 dBm-20 dBn 10 dBm



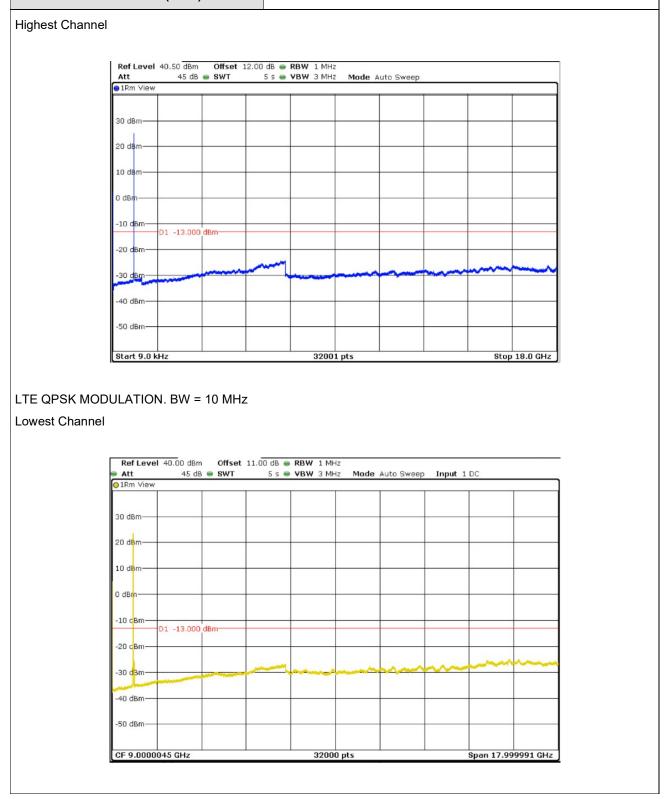





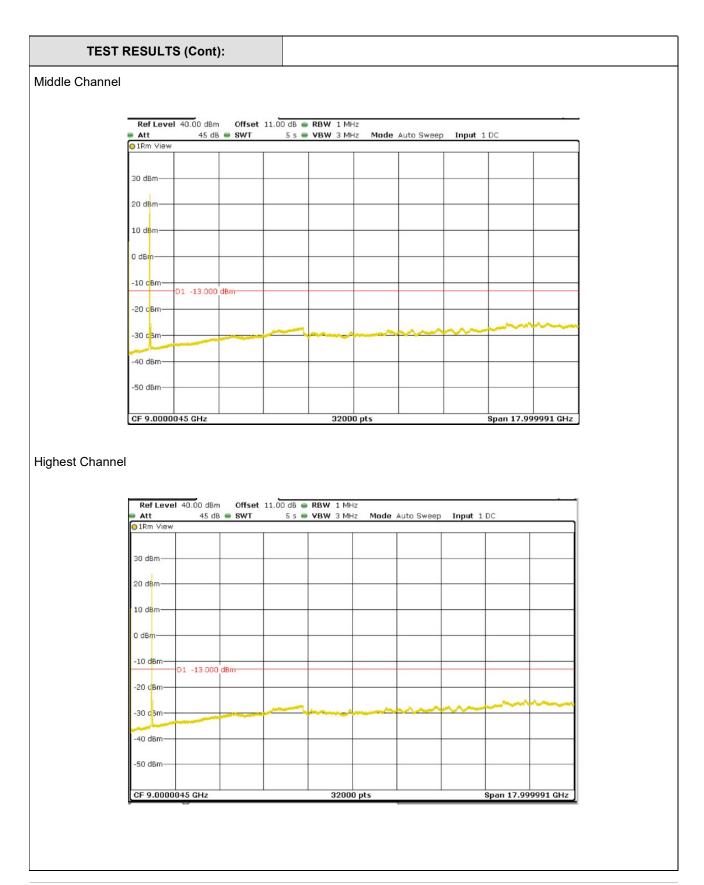








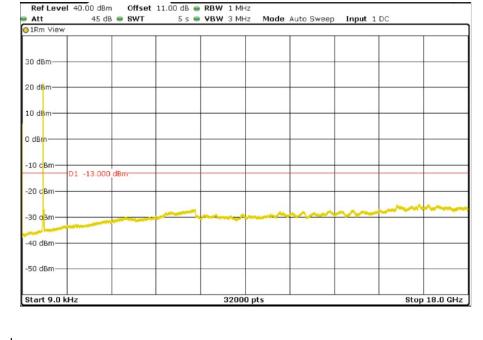

Middle Channel

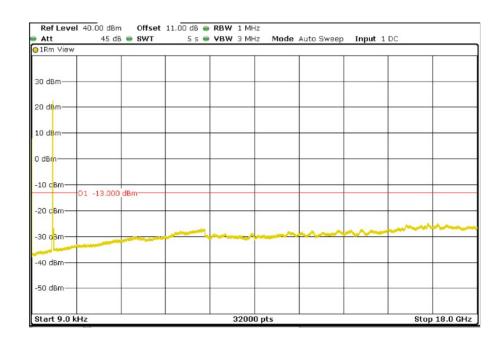




1Rm View				Auto Sweep	
0 dBm					
0 d8m					
0 d <mark>8</mark> m					
dBm					
D1 -13.000 c	lBm				
0 c <mark>B</mark> m		-			
30 cBm					
0 dBm					
JU UBIN					




01	ED SAMPLES:	S/01					
TESTED CO	ONDITIONS MODES:	TC#02					
TES	T RESULTS:	PASS					
Frequency range §) kHz – 18 GHz						
	LATION. BW = 1.4 MHz als were detected more than	10 dB below the limit in the frequency range.					
	LATION. BW = 3 MHz als were detected more than	10 dB below the limit in the frequency range.					
	LATION. BW = 5 MHz als were detected more than	10 dB below the limit in the frequency range.					
	LATION. BW = 10 MHz als were detected more than	10 dB below the limit in the frequency range.					
	TE QPSK MODULATION. BW = 15 MHz The spurious signals were detected more than 10 dB below the limit in the frequency range.						
LTE QPSK MODU	ILATION. BW = 1.4 MHz						
-		d8 ● RBW 1 MHz s ● VBW 3 MHz Mode Auto Sweep Input 1 DC					
)1Rm View						
3	30 dBm						
2	20 dBm						
0) dBm						
	10 dBm						
	20 dBm						
	30 dBm	man					
-	40 dBm						
-	50 dBm						
	Start 9.0 kHz	32000 pts Stop 20.0 GHz					
L.							



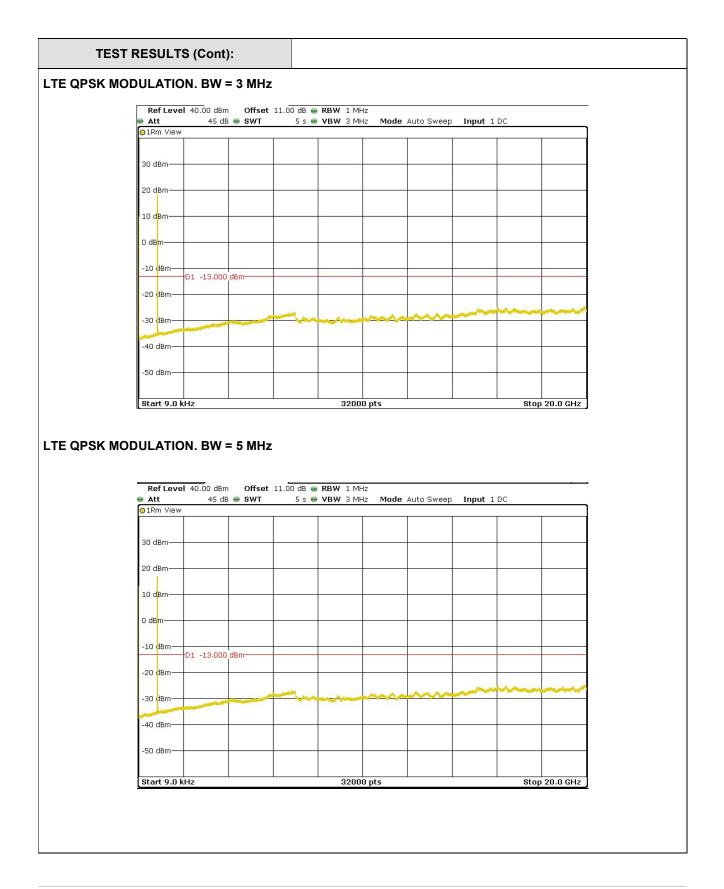



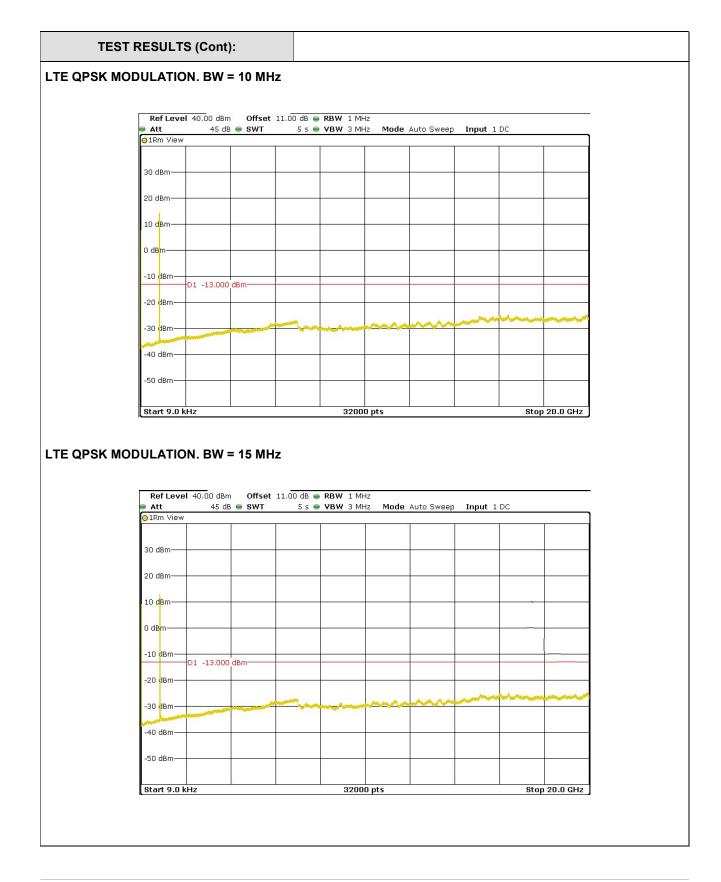




TEST A.6: SPURIOUS EMISSIONS AT ANTENNA TERMINALS AT BLOCK EDGES Product standard: FCC Part 22 / IC RSS-132 LIMITS: Test standard: FCC §22.917/ RSS- Clause 5.5. LIMITS According to specification, the power of emissions shall be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. P in watts. At Po transmitting power of 2 watts (33 dBm), the specified minimum attenuation becomes 43+10log (Po). and the level in dBm relative to Po becomes: Po (dBm) - [43 + 10 log (Po in watts)] = -13 dBm **TEST SETUP** The EUT RF output connector was connected to a spectrum analyzer and to the Universal Radio Communication Tester R&S CMW500 (selecting maximum transmission power of the EUT and different modes of modulation) using a 50-ohm attenuator and a power splitter. The reading of the spectrum analyzer is corrected with the attenuation loss of connection between output terminal of EUT and input of the spectrum analyzer. For LTE mode the configuration of modulation which is the worst case for conducted power was used. As indicated in FCC part 22, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block or band, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Spectrum Analyser Power EUT Attenuator devider Signalling Unit Power supply Report No: 2416ERM.002 Page 97 of 115 04-15-2019



TESTED SAMPLES:				S/01			
TESTED CONDITIONS MODES:				TC#01			
TEST RESULTS:				PASS			
	1				1		
LTE QPSK MODULATION	RB=1.	RB=1.		RB=1.	RB=1.	RB=1.	
	Offset=0.	Offset =0.		Offset =0.	Offset =0.	Offset =0	
	BW=1.4 MHz	BW =	3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 M	
Maximum measured level at lowest Block Edge at antenna port (dBm)	-21.02		18	-20.73	-16.48	-18.74	
LTE QPSK	RB= All	PB	= All.	RB= All.	RB= All.	RB= All.	
MODULATION:			- 711.			ND- All.	
	Offset=0.	Offs	et =0.	Offset =0.	Offset =0.	Offset =0	
	BW=1.4 MHz	BW =	3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 M	
Maximum measured level at lowest Block Edge at antenna port (dBm)	-17.2	-1	7.39	-16.1	-19.4	-16.72	
							
LTE QPSK MODULATION:	RB= 1.	RB= 1.		RB= 1.	RB= 1.	RB= 1.	
	Offset=Max.	Offse	et=Max.	Offset=Max.	Offset=Max.	Offset=Ma	
	BW=1.4 MHz	BW =	3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 M	
Maximum measured level at highest Block Edge at antenna port (dBm)	-19.68	-1	4.37	-18.1	-17.11	-17.57	
			_ AU				
LTE QPSK MODULATION:	RB= All.		= All.	RB= All.	RB= All.	RB= All.	
	Offset=0.	Offset =0.		Offset =0.	Offset =0.	Offset =0	
	BW=1.4 MHz	BW =	3 MHz	BW = 5 MHz	BW = 10 MHz	BW = 15 M	
Maximum measured level at highest Block Edge at antenna port (dBm)	-18.02	-1	5.74	-16.22	-19.87	-19.9	



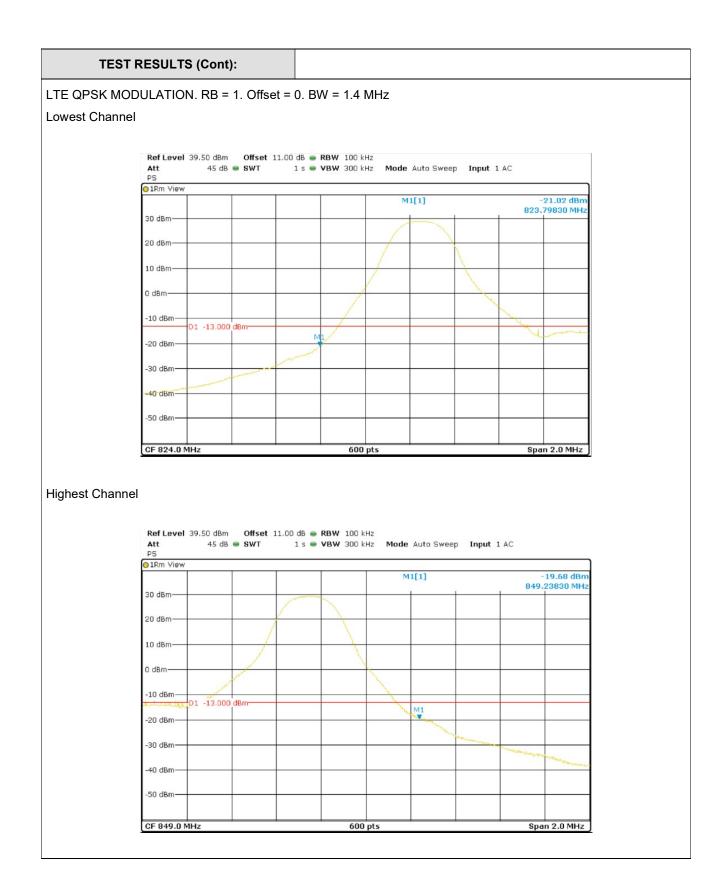




LTE QPSK MODULATION. RB = 6. Offset = 0. BW = 1.4 MHz

Lowest Channel














Lowest Channel

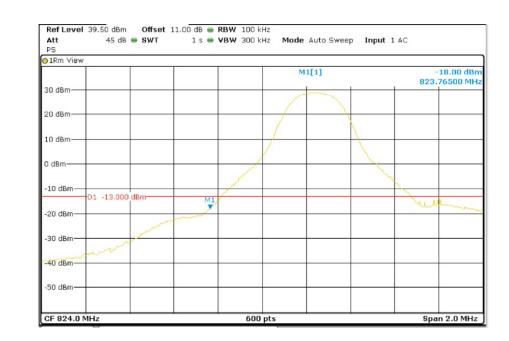

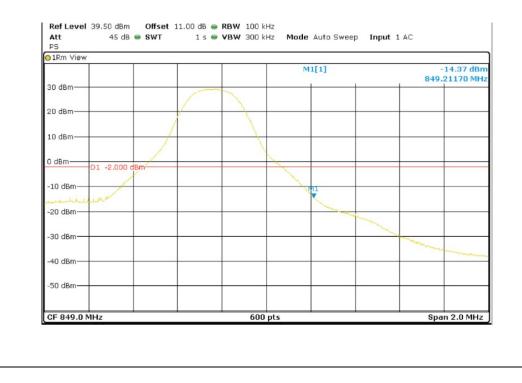





Lowest Channel


Ref Level 39.50 dBm Offset 11.00 dB - RBW 100 kHz 45 dB 👄 SWT 1 s 🖷 VBW 300 kHz Mode Auto Sweep Input 1 AC Att PS 01Rm View -17.39 dBm 823.85500 MHz M1[1] 30 dBm-20 dBm-10 dBm-0 dBm--10 dBm-D1 -13.000 dBm-11 -20 dBm--30 dBm--40 dBm--50 dBm-Span 2.0 MHz CF 824.0 MHz 600 pts













Lowest Channel


Ref Level 39.50 dBm Offset 11.00 dB - RBW 100 kHz 45 dB 👄 SWT Att 1 s 🖷 VBW 300 kHz Mode Auto Sweep Input 1 AC PS 01Rm View -16.10 dBm 823.56500 MHz M1[1] 30 dBm-20 dBm-10 dBm-0 dBm -10 dBm-D1 -13.000 dBm M1 -20 dBm--30 dBm-40 dBm 50 dBm-Span 2.0 MHz CF 824.0 MHz 600 pts

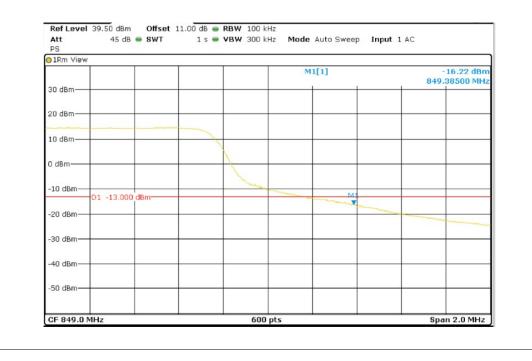



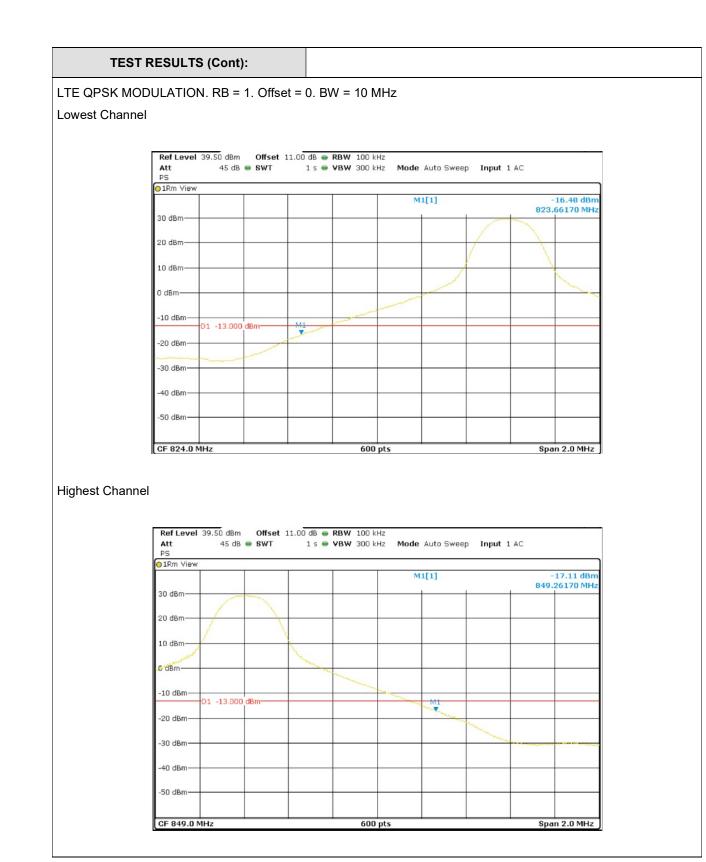





Lowest Channel

Ref Level 39.50 dBm Offset 11.00 dB - RBW 100 kHz Att PS 45 dB 👄 SWT 1 s 👄 VBW 300 kHz Mode Auto Sweep Input 1 AC 01Rm View -19.40 dBm 823.66170 MHz M1[1] 30 dBm-20 dBm-10 dBm 0 dBm--10 dBm-D1 -13.000 dBm-M1 -20 dBm--30 dBm--40 dBm-50 dBm Span 2.0 MHz CF 824.0 MHz 600 pts














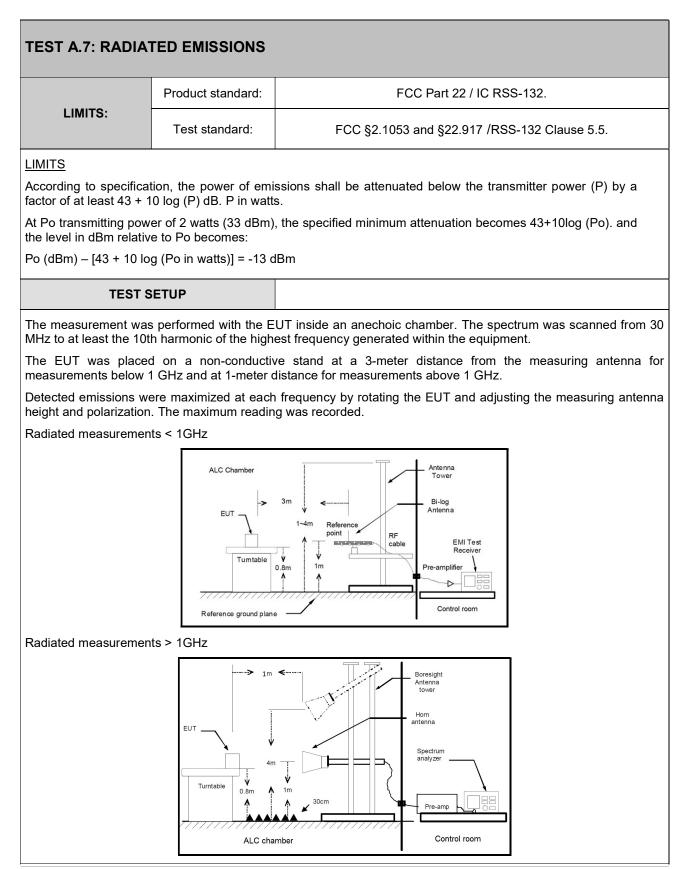



TESTED SAMPLES:	S/01
TESTED CONDITIONS MODES:	TC#01
TEST RESULTS:	PASS

RESULTS

A preliminary scan determined the QPSK 1.4 MHz bandwidth as the worst case. The configuration of Resource Blocks which is the worst case for conducted power was used.

The following plots show the results for this configuration.

No spurious signal was found at less than 20dB respect to the limit in all the frequency ranges.


LTE QPSK MODULATION. RB = 1. Offset = 0. BW = 1.4 MHz

TEST RESULTS (Cont):


Low Channel

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
65.049333	-74.94	-65.17	
94.666667	-73.58	-64.27	
156.197000	-69.33	-59.30	
824.624000	22.37	27.49	Fundamental
869.761333	-26.65	-18.47	

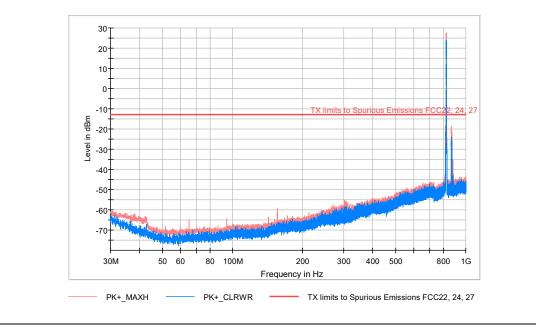



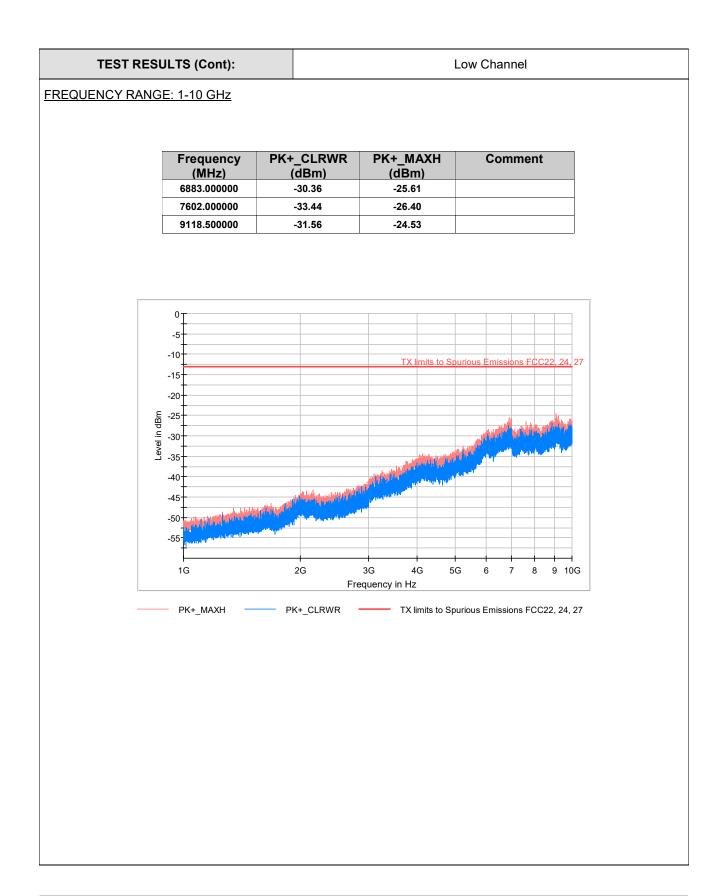





Middle Channel

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
57.192333	-73.60	-59.27	
72.356667	-75.44	-58.47	
95.281000	-70.73	-60.18	
161.661333	-70.12	-58.71	
836.749000	-14.47	-9.56	Fundamental

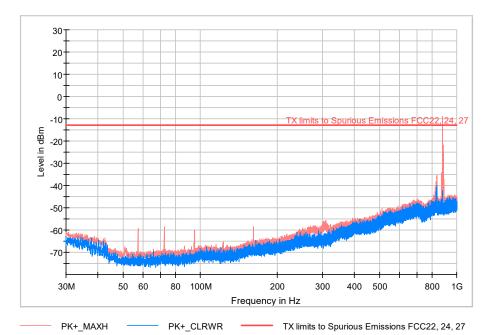



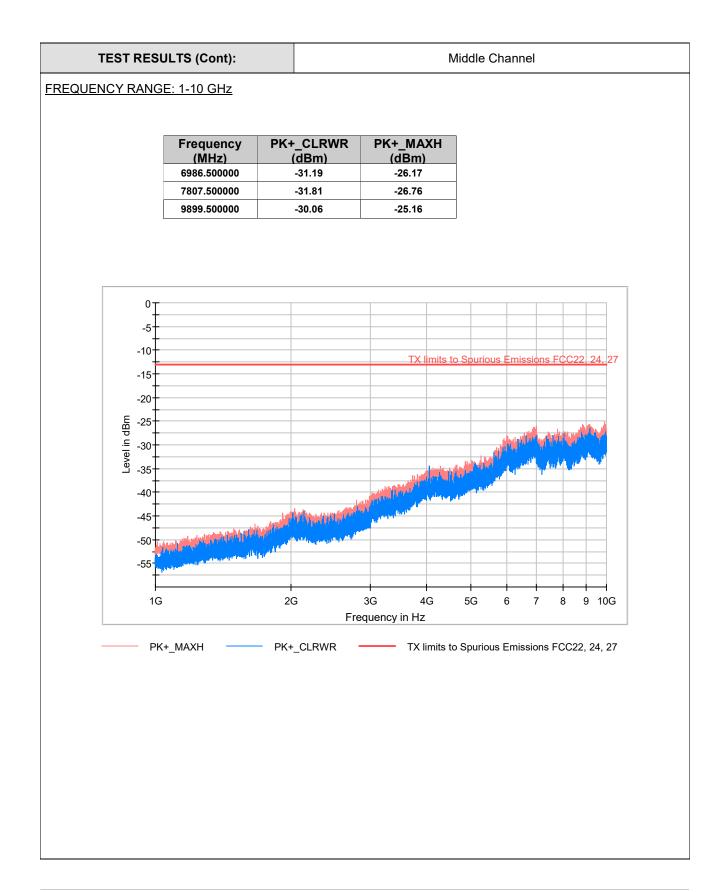



TEST RESULTS(Cont.): High Channel

FREQUENCY RANGE: 30-1000 MHz

Frequency (MHz)	PK+_CLRWR (dBm)	PK+_MAXH (dBm)	Comment
49.658667	-73.03	-58.94	
50.725667	-74.35	-55.24	
61.234000	-72.70	-58.50	
94.666667	-71.42	-63.41	
345.670333	-60.46	-55.32	
848.809333	-14.74	-11.20	Fundamental

