
Moonyboby INSTRUCTION MANUAL


Setup and use your digital video baby monitor

Installing Baby Unit

1 Connect the small plug of power adapter to the Baby unit and push the Micro USB to the end. Only use the enclosed adapter (5V DC 1000mA). Press the "POWER" button to turn on baby unit. You will see green LED is turned on.



2 Place Baby Unit on a flat surface, such as a desk or shelf or mount the camera on a wall.



3 Connect the small plug of power adapter to Parent unit and push the connector the end. Only use the enclosed adapter (5V DC 2000mA). Recommend charging time of at least 3 hours before first time use.


1

Precaution: use of battery for Parent Unit

When battery level is low, the power on off LED flashes red, monitors comes with sound alert and battery icon on LCD display flashes red.

Extend life cycle of battery: Only charge the battery when the battery life indicator is low. Constant recharging of your battery before the low battery indicator light comes on will decrease the life of your batteries.

Optimize battery life: Louder speaker level consume more battery power and shorten battery life. Switch on power saving mode and tune speaker sound level to level 4 to have optimized battery life.

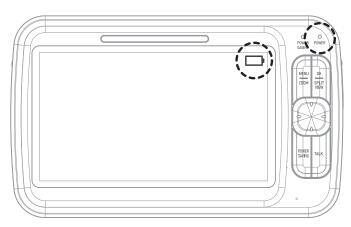


Frequently Asked Questions

- @ Battery not holding a charge/Monitor cannot turn on
- \mathbb{A} Remove battery from battery compartment and reinstall battery.
- Monitor cannot hold camera connection
- Please check whether monitor is selected to <u>CAMERA SCAN</u> mode. Monitor switches between paired cameras around every 10 seconds. When monitor switch the camera which is not powered on, monitor display <u>Lost Link</u>.




You could use **SPLIT VIEW** button to select the camera you want to watch.



Frequently Asked Questions

Q Sound Bar

This sound bar is designed for deaf parents to reflect sound level picked up from camera. You could disable this display in menu.

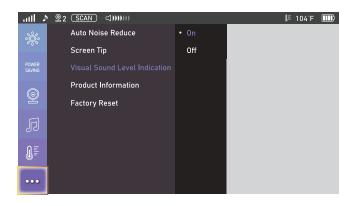




Save more battery energy with ECO mode by switching off both screen and audio


A <u>POWER SAVING</u> button switches off screen and keeps audio on (default setting "SCREEN OFF"). You have another choice of switching off both screen and audio by using <u>ECO</u> mode option.

In <u>ECO</u> mode, both sound and screen is shut off when monitor is entering <u>POWER SAVING</u>. Monitor will be activated when camera detects sound that exceeds the activation sound level you selected (Default level is medium). You could select activation sound level between loud, medium, quiet level in menu.

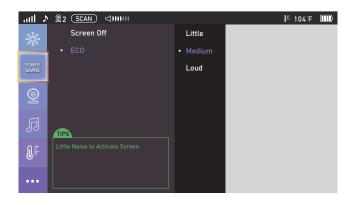

Q Switch off "On screen tips"

We try to explain status and function on screen. When you are familiar with this monitor, you could switch off this on screen tips in menu.




Pairing Camera

A Choose from unpaired cameras in Menu first, you would see <u>pairing</u> message

During the *pairing* message is on screen, press camera pairing button 1 seconds.

When camera and monitor is paired, video is on screen automatically.

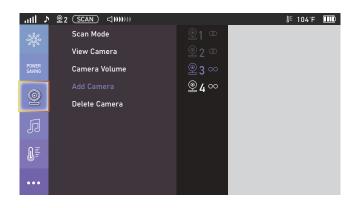



STRANGULATION HAZARD — Children have STRANGLED in cords. Keep this cord out of reach of children (more than 3 feet/1 meter away from the crib). Never use extension cords with AC WARNING adapters. Only use the AC Adapters provided.



Adult assembly required. Keep small parts away from children when assembling.

Warning Information

- * Keep this instruction manual for future reference.
- * For adult use only.

THIS PRODUCT CANNOT REPLACE A WARNING RESPONSIBLE ADULT SUPERVISION

- · When an AC Adapter is plugged into an electrical outlet, do not the exposed end.
- Test baby monitor before first use, periodically, and when changing location of the baby unit(Camera).
- Do not use monitor near water (Such as bathtub, Sink, etc)
- · Keep parent unit away from heat sources (Such as stoves, radiators, etc)
- · Make sure there is proper ventilation around baby unit and parent unit.
- This product is not a toy. Do not allow children to play with it.
- · The mains plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.
- · The baby monitor should not be considered as a medical device. While using the baby monitor, it is strongly recommended to have an adult directly checking on your baby. Premature babies or children considered at risk must be supervised by your pediatrician or other medical staff.

Battery Warning

- Use only the original rechargeable battery provided.
- Do not shot-circuit supply terminals.
- · Remove battery when product is stored for long periods of time or when battery is exhausted.
- Dispose of exhausted battery properly.
- Keep all batteries away from children.
- The apparatus shall not be exposed to dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the apparatus.
- Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type.
- · Batteries (battery pack or batteries installed) shall not be exposed to excessive heat such as sunshine, fire or the like.

Precautions

·Do not overload wall outlets, extension cords, or integral convenience receptacles as this can result in a risk of fire or electrics shock.

·The baby monitor works better in temperature ranging between 0° C and 40° C (32° F and 104° F)

·Do not dismantle the appliance. It does not contain any parts that may be used independently.

Never Expose the baby monitor for long period to sun's direct rays and never place it next to a source of heat, in a damp or very dusty room.

Never push objects of any kind into this product through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. Never spill liquid of any kind on the product.

·Do not attempt to service this product yourself as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.

The product should be mounted to a wall or ceiling inly as recommended by the manufacturer.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- . Reorient or relocate the receiving antenna.
- . Increase the separation between the equipment and receiver.
- . Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- . Consult the dealer or an experienced radio/TV technician for help.

FCC Caution

To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

Moonybaby's baby monitor warranty policy

Moonybaby will repair or replace (at our option) your unit free of charge for 12 months from the date of purchase if the unit is defective in workmanship or materials. To claim your repair/replacement, the product must be returned to Moonybaby together with a copy of the purchase receipt. In the absence of the purchase receipt, the warranty will be 12 months from the date of manufacture. This warranty does not apply to normal wear or damage from misuse, abuse, improper storage and handling, installation, accident, unauthorized repair or alteration. Please contact our Customer service by Facebook Moonybaby or via email for details.

Moonybaby



MIX

Packaging from responsible sources

FSC® C138767