

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM150800498701

Email: ee.shenzhen@sgs.com Page: 1 of 17

## **FCC REPORT**

**Application No.:** SZEM1508004987CR (SGS SZ No.: T51510230034EM)

Applicant: ZHEN CHENG TOYS FACTORY

Manufacturer: SEMTEL (HONGKONG) LTD

Supplier: SEMTEL (HONGKONG) LTD

Importer: SEMTEL (HONGKONG) LTD

Product Name: 7 CH R/C BATTLNG TANKS 2 PK

Model No.(EUT): 130436

**Add Model No.:** 1412F396-1, 333-ZJ01, 333-ZJ01A, 333-ZJ11, 333-ZJ11A, 333-TK01,

333-TK01A, 333-TK11, 333-TK11A

FCC ID: 2AAGPSMLTD1508

Standards: 47 CFR Part 15, Subpart C (2014)

 Date of Receipt:
 2015-08-12

 Date of Test:
 2015-08-20

 Date of Issue:
 2015-08-26

Test Result: PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM150800498701

Page: 2 of 17

## 2 Version

Revision Record								
Version Chapter Date Modifier Remark								
00		2015-08-26		Original				

Authorized for issue by:		
	Eric Fu	2015-08-20
Tested By	(Eric Fu) /Project Engineer	Date
	Hedy Wen.	2015-08-26
Prepared By	(Hedy Wen) /Clerk	Date
	Orven Zhon	0045.00.00
		2015-08-26
Checked By	(Owen Zhou) /Reviewer	Date



Report No.: SZEM150800498701

Page: 3 of 17

## 3 Test Summary

Test Item	Test Requirement	Test method	Result
Radiated Emission	47 CFR Part 15, Subpart C Section 15.227	ANSI C63.10 (2009)	PASS
Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.215	ANSI C63.10 (2009)	PASS

Remark:

Model No.: 130436, 1412F396-1, 333-ZJ01, 333-ZJ01A, 333-ZJ11A, 333-ZJ11A, 333-TK01, 333-TK01A, 333-TK11A.

Only the model 130436 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for all above models. Only different on colors.



Report No.: SZEM150800498701

Page: 4 of 17

### 4 Contents

		P	age
1	C	OVER PAGE	1
2	V	ERSION	2
3	TI	EST SUMMARY	3
4	С	ONTENTS	4
5		ENERAL INFORMATION	
ļ	5.1		
•	5.2	GENERAL DESCRIPTION OF EUT	5
į	5.3	TEST ENVIRONMENT AND MODE	5
•	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6 5.7	TEST FACILITY DEVIATION FROM STANDARDS	
	5.7 5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
		OTHER INFORMATION REQUESTED BY THE CUSTOMER	
į	5.10	EQUIPMENT LIST	7
6	T	EST RESULT & MEASUREMENT DATA	9
6	3.1	ANTENNA REQUIRMENT	9
	3.2	RADIATED EMISSIONS	
(	3.3	OCCUPIED BANDWIDTH	
7	P	HOTOGRAPHS - EUT TEST SETUP	17
-	7.1	RADIATED EMISSION	17
8	Р	HOTOGRAPHS - EUT CONSTRUCTION DETAILS	17



Report No.: SZEM150800498701

Page: 5 of 17

### 5 General Information

#### 5.1 Client Information

Applicant:	ZHEN CHENG TOYS FACTORY				
Address of Applicant:	CHENGHAI DISTRICT, SHANTOU CITY, GUANGDON PROVINCE, CHINA				
Manufacturer:	SEMTEL (HONGKONG) LTD				
Supplier:	SEMTEL (HONGKONG) LTD				
Importer:	SEMTEL (HONGKONG) LTD				

### 5.2 General Description of EUT

Product Name:	7 CH R/C BATTLNG TANKS 2 PK
Model No.:	130436
Country of Origin:	CHINA
Country of Destination:	USA
Request Age Grading:	3+
Sample Type:	Portable production
Operation Frequency:	27.145MHz
Modulation Type:	AM
Antenna Type:	Integral
Antenna Gain:	0dBi
Power Supply:	DC 3.0V (2*1.5V"AAA"Size Batteries) for TX,
	DC 4.5V (3*1.5V"AAA"Size Batteries) for RX.

### 5.3 Test Environment and Mode

Operating Environment:	Operating Environment:				
Temperature:	24.0 °C				
Humidity:	52 % RH				
Atmospheric Pressure:	1010 mbar				
Test mode:					
Transmitting mode:	Keep the EUT in transmitting mode.				

## 5.4 Description of Support Units

The EUT has been tested independent unit.



Report No.: SZEM150800498701

Page: 6 of 17

### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

### 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### • FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2.

### 5.7 Deviation from Standards

None

#### 5.8 Abnormalities from Standard Conditions

None.

### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM150800498701

Page: 7 of 17

## 5.10 Equipment List

RE in Chamber								
Item	Test Equipment	Manufacturer	Manufacturer Model No. Invento No.		Manufacturer Model No.		Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-05-13	2016-05-13		
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2014-09-16	2015-09-16		
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A		
4	Coaxial cable	SGS	N/A	SEL0027	2015-05-13	2016-05-13		
5	Coaxial cable	SGS	N/A	SEL0189	2015-05-13	2016-05-13		
6	Coaxial cable	SGS	N/A	SEL0121	2015-05-13	2016-05-13		
7	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13		
8	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24	2015-10-24		
9	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24	2015-10-24		
10	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-13	2016-05-13		
11	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24	2015-10-24		
12	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13		
13	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	2015-10-24		
14	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24	2015-10-24		
15	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24	2015-10-24		
16	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-13	2016-05-13		
17	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-05-13	2016-05-13		



Report No.: SZEM150800498701

Page: 8 of 17

	RF connected test					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25
8	Band filter	amideon	82346	SEL0094	2015-05-13	2016-05-13
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24	2015-10-24





Report No.: SZEM150800498701

Page: 9 of 17

### 6 Test Result & Measurement Data


### 6.1 Antenna Requirment

Standard Requirement: 47 CFR Part 15C Section 15.203

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **EUT Antenna:**

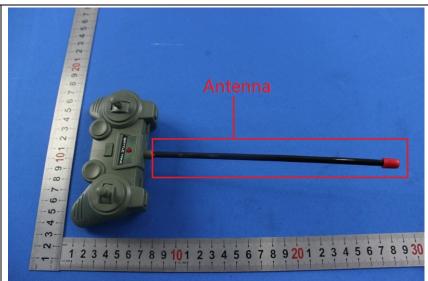



Report No.: SZEM150800498701

Page: 10 of 17

### 6.2 Radiated Emissions

Test Requirement:	47 CFR Part 15C Section 15.227							
Test Method:	ANSI C63.10: 2009							
Test Site:	3m (Semi-Anechoic C	haml	per)					
ERP Limit:	Carrier Power will not	exce	ed 80dBuV/m a	at 3m (Aver	age).			
Receiver Setup:	Frequency		Detector	RBW	VBW		Remark	
	0.009MHz-0.090MH	Ηz	Peak	10kHz	30kHz		Peak	
	0.009MHz-0.090MH	Ηz	Average	10kHz	30kHz		Average	
	0.090MHz-0.110MH	Ηz	Quasi-peak	10kHz	30kHz	G	Quasi-peak	
	0.110MHz-0.490MH	Ηz	Peak	10kHz	30kHz		Peak	
	0.110MHz-0.490MH	Ηz	Average	10kHz	30kHz		Average	
	0.490MHz -30MHz	Z	Quasi-peak	10kHz	30kHz	O	Quasi-peak	
	30MHz-1GHz		Quasi-peak	100 kHz	300kHz	G	Quasi-peak	
	Above 1GHz		Peak	1MHz	3MHz		Peak	
	Above Tariz		Peak	1MHz	10Hz		Average	
Limit:	Frequency		ield strength crovolt/meter)	Limit (dBuV/m)	Remark		Measureme distance (r	
	0.009MHz-0.490MHz	24	400/F(kHz)	-	-		300	
	0.490MHz705MHz	24	000/F(kHz)	-	-		30	
	1.705MHz-30MHz		30	-	-		30	
	30MHz-88MHz		100	40.0	Quasi-pea	ak	3	
	88MHz-216MHz		150	43.5	Quasi-pea	ak	3	
	216MHz-960MHz		200	46.0	Quasi-pea	ak	3	
	960MHz-1GHz		500	54.0	Quasi-pea	ak	3	
	Above 1GHz		500	54.0	Average	)	3	
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							
Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.							
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.							
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.							
	d. For each suspected the antenna was to of below 30MHz,	uned	to heights from	n 1 meter to	4 meters (f	for t	he test frequ	iency




Report No.: SZEM150800498701

Page: 11 of 17

table was turned from 0 degrees to 360 degrees to find the maximum reading.

- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be retested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.

#### **Test Setup:**






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

Test Mode:	Transmitting mode.
Instruments Used:	Refer to section 5.10 for details.
Test Result:	Pass

### 27.145MHz Mode

Test Procedure: For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10: 2009. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

#### **Test Result:**

#### Intentional emission

Test Frequency (MHz)	Peak (d	dBμV/m)	Limits	Margin (dB)		
	Vertical	Horizontal	(dBµV/m)	Vertical	Horizontal	
27.142	57.06	46.29	100.00	42.94	53.71	

	Test Frequency (MHz)	Average	(dBμV/m)	Limits	Margin (dB)		
		Vertical	Horizontal	(dBµV/m)	Vertical	Horizontal	
	27.142	40.06	37.82	80.00	39.94	42.18	




Report No.: SZEM150800498701

Page: 12 of 17

### **Out of Band Emissions**

Vertical

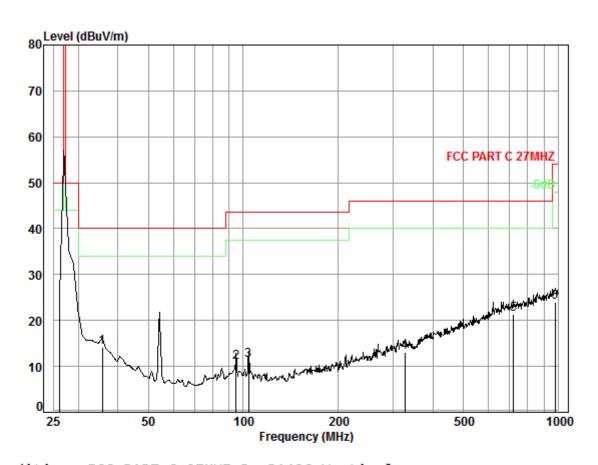

Condition: FCC PART C 27MHZ 3m 3142C Vertical

Job No. : 4987CR

Test mode: TX


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	——dB	dBuV	dBuV/m	dBuV/m	——dB
1	35.76	0.60	15.48	27.33	25.49	14.24	40.00	-25.76
2	95.04	1.15	8.90	27.21	28.05	10.89	43.50	-32.61
3	103.83	1.21	8.91	27.17	28.41	11.36	43.50	-32.14
4	325.82	1.99	14.77	26.60	22.82	12.98	46.00	-33.02
5	720.14	2.97	21.60	27.39	24.22	21.40	46.00	-24.60
6	978.11	3.68	23.42	26.40	23.37	24.07	54.00	-29.93



Report No.: SZEM150800498701

Page: 13 of 17

#### **Horizontal**

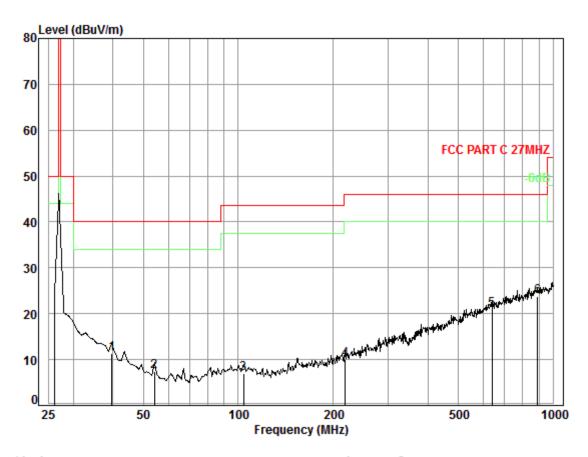

Condition: FCC PART C 27MHZ 3m 3142C Horizontal

Job No. : 4987CR Test mode: TX

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	39.65	0.60	13.30	27.32	24.86	11.44	40.00	-28.56
2	54.25	0.80	8.06	27.28	25.80	7.38	40.00	-32.62
3	103.83	1.21	8.91	27.17	23.99	6.94	43.50	-36.56
4	218.75	1.51	11.18	26.63	23.91	9.97	46.00	-36.03
5	639.96	2.78	20.56	27.49	25.13	20.98	46.00	-25.02
6	891.94	3.57	23.14	26.82	23.78	23.67	46.00	-22.33



Report No.: SZEM150800498701

Page: 14 of 17

#### Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

2) The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.



Report No.: SZEM150800498701

Page: 15 of 17

### 6.3 Occupied Bandwidth

Test Requirement:	47 CFR Part 15C Section 15.215 (C)		
Test Method:	ANSI C63.10: 2009		
Limit:	Operation within the band 26.960 - 27.280 MHz		
Requirement :	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be deomonstrated by measuring the radiated emissions.		
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Test Mode:	Transmitting mode.		
Instruments Used:	Refer to section 5.10 for details.		
Test Result:	Pass		


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM150800498701

Page: 16 of 17

#### **Test Result:**

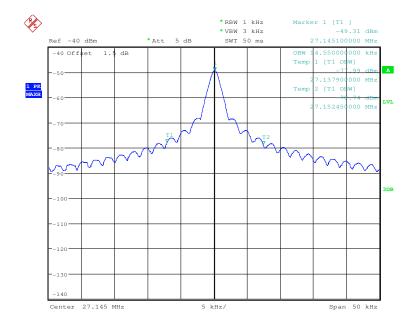



Report No.: SZEM150800498701

Page: 17 of 17

## 7 Photographs - EUT Test Setup

Test model No.: 130436

### 7.1 Radiated Emission



## 8 Photographs - EUT Construction Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1508004987CR.