

# TEST REPORT

Reference No..... : WTX23X02023511W001  
FCC ID..... : 2AAH8-OSIDDV2  
Applicant ..... : Orpyx Medical Technologies Inc.  
Address ..... : Suite 205, 1240 - 20th Avenue S.E. Calgary, AB T2G 1M8 Canada  
Manufacturer ..... : The same as Applicant  
Address ..... : The same as Applicant  
Product Name ..... : Mobile Phone  
Model No..... : OSIDDV2  
Standards ..... : FCC Part 22H, FCC Part 24E, FCC Part 27  
Date of Receipt sample .... : 2023-02-17  
Date of Test..... : 2023-02-17 to 2023-03-10  
Date of Issue ..... : 2023-03-10  
Test Report Form No. .... : WTX\_Part 22\_Part 24\_Part 27W  
Test Result..... : **Pass**

Remarks:


The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of approver.

**Prepared By:**

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Email: sem@waltek.com.cn

Tested by:



Dashan Chen

Approved by:



Silin Chen

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**  
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4  
1.2 TEST STANDARDS.....6  
1.3 TEST METHODOLOGY .....6  
1.4 TEST FACILITY .....6  
1.5 EUT SETUP AND TEST MODE .....7  
1.6 MEASUREMENT UNCERTAINTY .....9  
1.7 TEST EQUIPMENT LIST AND DETAILS .....10

**2. SUMMARY OF TEST RESULTS .....12**

**3. RF OUTPUT POWER .....13**  
3.1 STANDARD APPLICABLE.....13  
3.2 TEST PROCEDURE.....13  
3.3 SUMMARY OF TEST RESULTS/PLOTS .....13

**4. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....16**  
4.1 STANDARD APPLICABLE.....16  
4.2 TEST PROCEDURE.....16  
4.3 SUMMARY OF TEST RESULTS .....16

**5. EMISSION BANDWIDTH.....17**  
5.1 STANDARD APPLICABLE.....17  
5.2 TEST PROCEDURE.....17  
5.3 SUMMARY OF TEST RESULTS/PLOTS .....17

**6. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....18**  
6.1 STANDARD APPLICABLE.....18  
6.2 TEST PROCEDURE.....18  
6.3 SUMMARY OF TEST RESULTS/PLOTS .....18

**7. SPURIOUS RADIATED EMISSIONS.....19**  
7.1 STANDARD APPLICABLE.....19  
7.2 TEST PROCEDURE.....19  
7.3 SUMMARY OF TEST RESULTS/PLOTS .....19

**8. FREQUENCY STABILITY .....33**  
8.1 STANDARD APPLICABLE.....33  
8.2 TEST PROCEDURE.....33  
8.3 SUMMARY OF TEST RESULTS/PLOTS .....33

**9. MODULATION CHARACTERISTICS .....34**  
9.1 STANDARD APPLICABLE.....34  
9.2 TEST PROCEDURE.....34  
9.3 SUMMARY OF TEST RESULTS/PLOTS .....34

**APPENDIX SUMMARY .....35**

**APPENDIX A.....36**

**APPENDIX B.....38**

**APPENDIX C.....39**

**APPENDIX D.....66**

**APPENDIX E.....114**

**APPENDIX F .....118**

**APPENDIX PHOTOGRAPHS.....120**

**Report version**

Version No.	Date of issue	Description
Rev.00	2023-03-10	Original
/	/	/

# 1. GENERAL INFORMATION

---

## 1.1 Product Description for Equipment Under Test (EUT)

General Description of EUT:	
Product Name:	Mobile Phone
Trade Name:	Orpyx
Model No.:	OSIDDV2
Adding Model(s):	/
Rated Voltage:	DC3.85V
Battery capacity:	4000mAh (15.4Wh)
Adapter Model:	TPA-46050200UU INPUT:AC100-240V 50/60Hz 0.3A OUTPUT:DC5V 2.0A
<i>Note: The Antenna Gain is provided by the customer and can affect the validity of results. The test data is gathered from a production sample provided by the manufacturer.</i>	

<b>Technical Characteristics of EUT:</b>	
<b>2G</b>	
Support Networks:	GSM, GPRS
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS 850: 824~849MHz GSM/GPRS 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS 850: 869~894MHz GSM/GPRS 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 32.82dBm, GSM1900: 30.26dBm
Type of Emission:	GSM850: 248KGXW, GSM1900: 248KGXW
Type of Modulation:	GMSK
Type of Antenna:	PIFA Antenna
Antenna Gain:	GSM850: -1.4dBi; GSM1900: -1.9dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 4, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 4: 1710~1755MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 4: 2110~2155MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 23.61dBm, WCDMA Band 4: 21.78dBm WCDMA Band 5: 23.52dBm
Type of Emission:	WCDMA Band 2: 4M20F9W WCDMA Band 4: 4M20F9W WCDMA Band 5: 4M30F9W
Type of Modulation:	BPSK,QPSK
Antenna Type:	PIFA Antenna
Antenna Gain:	WCDMA Band 2: -1.9dBi, WCDMA Band 4: -1.6dBi, WCDMA Band 5: -1.4dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 2:** Frequency Allocations and Radio Treaty Matters; General Rules and Regulations.

**FCC Rules Part 22:** Private Land Mobile Radio Services.

**FCC Rules Part 24:** Public Mobile Services.

**FCC Rules Part 27:** Miscellaneous Wireless Communications Services.

**TIA/EIA 603 E March 2016:** Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

**ANSI C63.26-2015:** American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

**KDB 971168 D01 Power Meas License Digital Systems v03r01:** Measurement Guidance for Certification of Licensed Digital Transmitters.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Block 70 Bao'an District, Shenzhen, Guangdong, China

### FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A and the CAB identifier is CN0057.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	GSM 1900	Low, Middle, High Channels
TM4	GPRS 1900	Low, Middle, High Channels
TM5	WCDMA Band 5	Low, Middle, High Channels
TM6	HSDPA Band 5	Low, Middle, High Channels
TM7	HSUPA Band 5	Low, Middle, High Channels
TM8	WCDMA Band 4	Low, Middle, High Channels
TM9	HSDPA Band 4	Low, Middle, High Channels
TM10	HSUPA Band 4	Low, Middle, High Channels
TM11	WCDMA Band 2	Low, Middle, High Channels
TM12	HSDPA Band 2	Low, Middle, High Channels
TM13	HSUPA Band 2	Low, Middle, High Channels

<b>Testing Configure</b>			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 4	WCDMA/HSDPA/HSUPA	1712.4 MHz	1312
		1732.4 MHz	1412
		1752.6 MHz	1513
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538

Note: the transmitter has been tested on the communications mode of GSM, GPRS, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

<b>Test Conditions</b>	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

<b>EUT Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Special Cable List and Details</b>			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

<b>Auxiliary Equipment List and Details</b>			
Description	Manufacturer	Model	Serial Number
/	/	/	/



### 1.6 Measurement Uncertainty

<b>Measurement uncertainty</b>		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	±1.5%
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	±0.42dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

**1.7 Test Equipment List and Details**

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2022-03-22	2023-03-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2022-03-22	2023-03-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A014 53	2022-03-22	2023-03-21
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY470702 02	2022-03-22	2023-03-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2022-03-22	2023-03-21
SEMT-1132	Attenuator	HP	8491A	MY392644 19	2022-03-22	2023-03-21
SEMT-1325	Band Reject Filter Group	Tonscend	JS0806-F	20180603 19	2022-03-22	2023-03-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-1 0M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.9 2J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.9 2J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/
<input checked="" type="checkbox"/> Chamber A: Below 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2022-03-22	2023-03-21
SEMT-1008	Amplifier	HP	8447F	2805A034 75	2022-12-30	2023-12-29
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-20	2023-03-19
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-20	2023-03-19
<input checked="" type="checkbox"/> Chamber A: Above 1GHz						
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/03 5	2022-03-22	2023-03-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/00 5	2022-03-22	2023-03-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2022-03-22	2023-03-21

SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA917 0582	2021-04-27	2023-04-26
SEMT-1216	Pre-amplifier	Schwarzbeck	BBV 9721	9721-031	2022-03-25	2023-03-24
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber B:Below 1GHz						
SEMT-1068	Trilog Broadband Antenna	Schwarz beck	VULB9163(B)	9163-635	2021-04-09	2023-04-08
SEMT-1067	Amplifier	Agilent	8447D	2944A101 79	2022-03-22	2023-03-21
SEMT-1066	EMI Test Receiver	Rohde & Schwarz	ESPI	101391	2022-03-22	2023-03-21
<input type="checkbox"/> Chamber C:Below 1GHz						
SEMT-1319	EMI Test Receiver	Rohde & Schwarz	ESIB 26	100401	2022-12-30	2023-12-29
SEMT-1343	Trilog Broadband Antenna	Schwarz beck	VULB 9168	1194	2021-05-28	2023-05-27
SEMT-1333	Amplifier	HP	8447F	2944A038 69	2022-03-22	2023-03-21

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing.

## 2. SUMMARY OF TEST RESULTS

---

FCC Rules	Description of Test Item	Result
§22.913(a), §24.232(c), §27.50(d)	RF Output Power	Compliant
§24.51, §27.50	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§22.917(b), §24.238(b), §27.53	Emission Bandwidth	Compliant
§22.917(a), §24.238(a), §27.53(h)	Spurious Emissions at Antenna Terminal	Compliant
§22.917(a), §24.238(a), §27.53(h)	Spurious Radiation Emissions	Compliant
§22.917(a), §24.238(a), §27.53(h)	Out of Band Emissions	Compliant
§22.355, §24.235, §27.54	Frequency Stability	Compliant

### 3. RF Output Power

---

#### 3.1 Standard Applicable


According to §22.913(a)(2), the ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755MHz band and mobile and portable stations operating in the 1695-1710MHz and 1755-1780MHz bands are limited to 1 watt EIRP.

#### 3.2 Test Procedure

- Conducted output power test method:

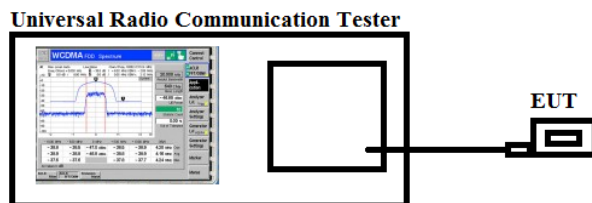

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

#### 3.3 Summary of Test Results/Plots

➤ **Max. Radiated Power**

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GSM850	128	V	28.65	<38.45	Pass
		H	22.37		
	190	V	28.49		
		H	22.53		
	251	V	28.91		
		H	22.36		
GPRS850	128	V	28.48	<38.45	Pass
		H	23.29		
	190	V	28.34		
		H	23.16		
	251	V	28.71		
		H	23.62		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
PCS1900	512	V	26.65	<33.00	Pass
		H	21.32		
	661	V	26.74		
		H	20.23		
	810	V	26.34		
		H	20.26		
GPRS1900	512	V	26.84	<33.00	Pass
		H	20.49		
	661	V	25.87		
		H	20.37		
	810	V	25.69		
		H	20.21		

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	20.97	<38.45	Pass
		H	13.36		
	4183	V	20.85		
		H	13.24		
	4233	V	20.62		
		H	13.46		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band IV	1312	V	20.87	<30.00	Pass
		H	13.35		
	1412	V	20.64		
		H	13.23		
	1513	V	20.74		
		H	13.26		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	20.75	<33.00	Pass
		H	14.36		
	9400	V	20.45		
		H	14.62		
	9538	V	20.38		
		H	14.22		

➤ **Max. Conducted Power (Average power)**

Please refer to Appendix A

## 4. Peak-to-average Ratio (PAR) of Transmitter

---

### 4.1 Standard Applicable

According to §24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51, in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

### 4.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled.
2. Frequency = carrier center frequency.
3. Measurement BW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power.

Test Configuration for the emission bandwidth testing:

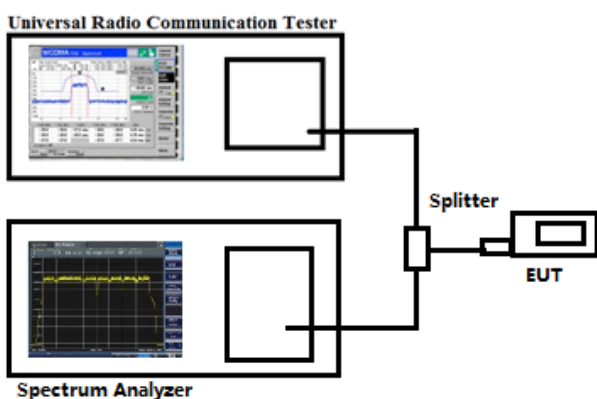

### 4.3 Summary of Test Results

Please refer to Appendix B.

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

Page 16 of 120



## 5. Emission Bandwidth

---

### 5.1 Standard Applicable

According to §22.917(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.


According to §24.238(b), the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

According to §27.53, the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

### 5.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

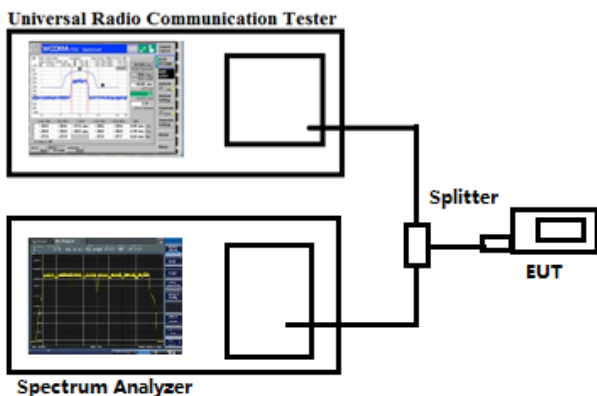

### 5.3 Summary of Test Results/Plots

Please refer to Appendix C.

## 6. Out of Band Emissions at Antenna Terminal

---

### 6.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10<sup>th</sup> harmonic.

Test Configuration for the out of band emissions testing:

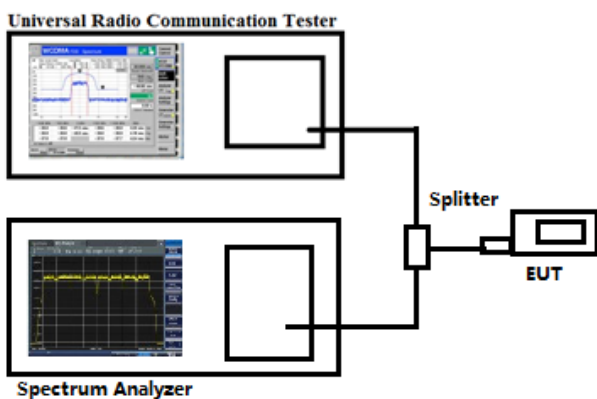

### 6.3 Summary of Test Results/Plots

Please refer to Appendix D.

## 7. Spurious Radiated Emissions

---

### 7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 7.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


$$\text{Spurious attenuation limit in dB} = 43 + 10 \log_{10}(\text{power out in Watts})$$

### 7.3 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


➤ Spurious Emissions Below 1GHz

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

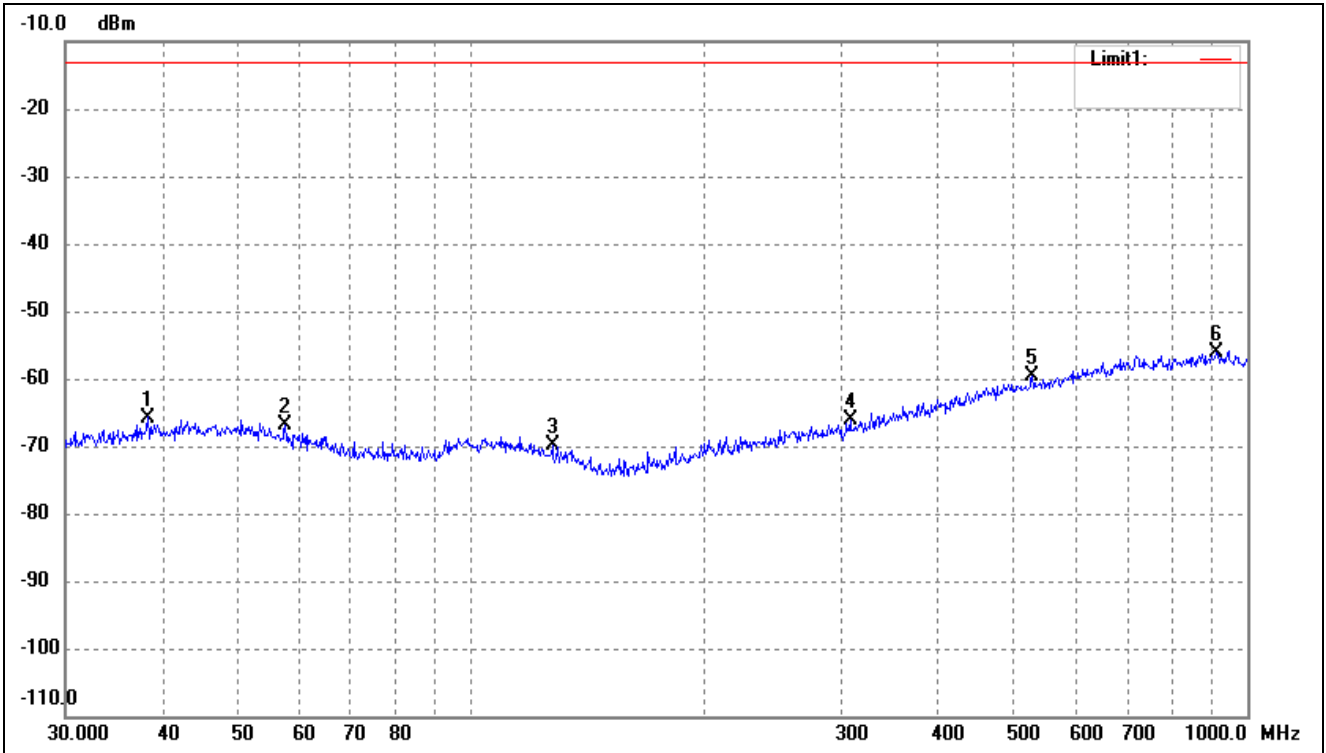


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	38.3462	-70.81	5.06	-65.75	-13.00	-52.75	ERP
2	57.5939	-71.26	4.37	-66.89	-13.00	-53.89	ERP
3	127.2176	-71.17	1.39	-69.78	-13.00	-56.78	ERP
4	307.8313	-71.50	5.43	-66.07	-13.00	-53.07	ERP
5	528.2458	-70.82	11.21	-59.61	-13.00	-46.61	ERP
6	912.8620	-70.77	14.57	-56.20	-13.00	-43.20	ERP

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

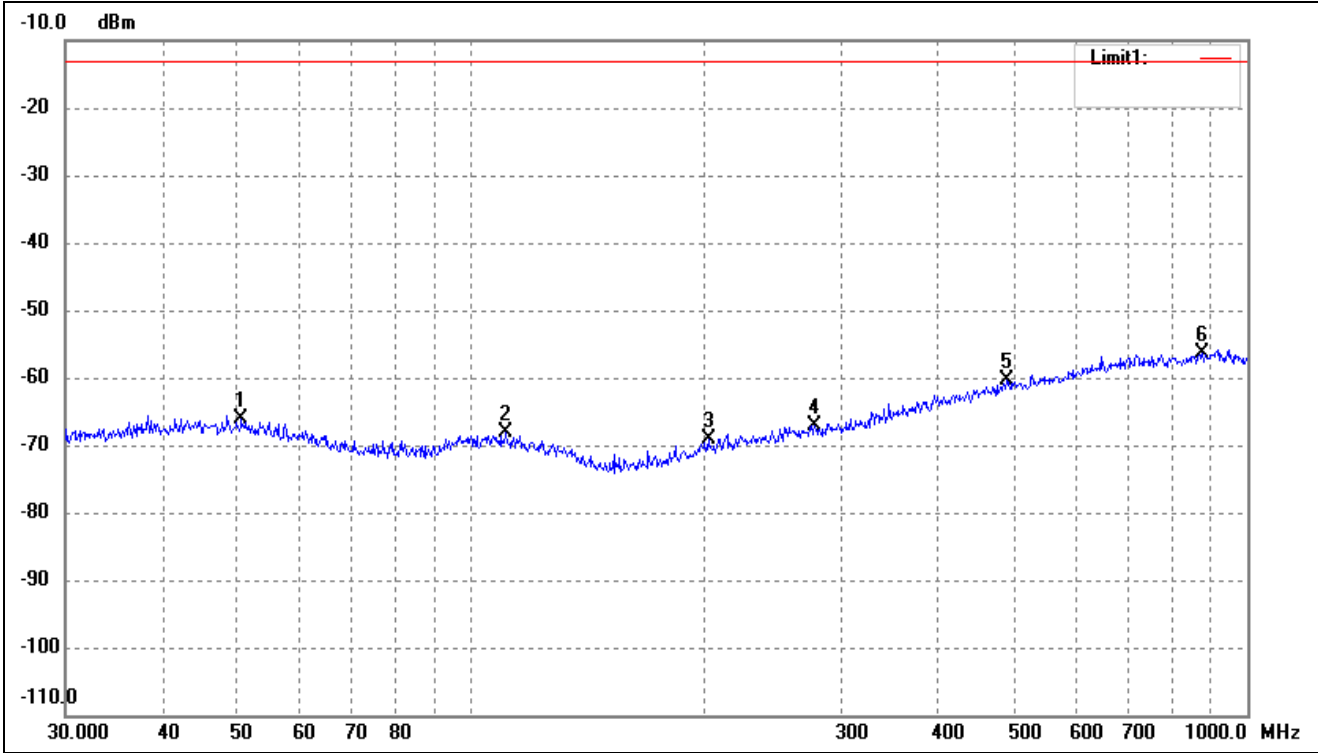


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.5860	-71.44	5.39	-66.05	-13.00	-53.05	ERP
2	110.9571	-71.60	3.41	-68.19	-13.00	-55.19	ERP
3	202.1005	-71.80	2.58	-69.22	-13.00	-56.22	ERP
4	277.0935	-71.72	4.59	-67.13	-13.00	-54.13	ERP
5	489.0269	-70.78	10.43	-60.35	-13.00	-47.35	ERP
6	875.2470	-70.87	14.54	-56.33	-13.00	-43.33	ERP

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

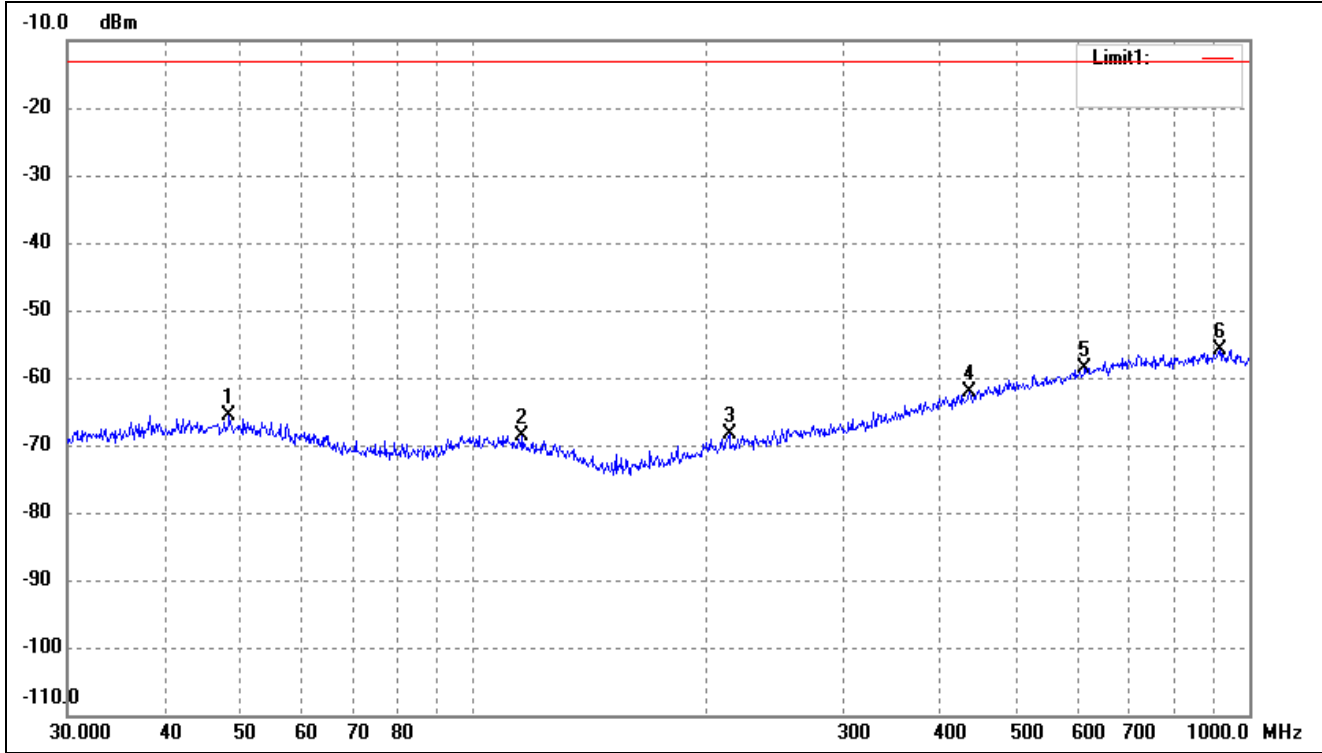

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	48.5016	-71.19	5.47	-65.72	-13.00	-52.72	ERP
2	115.7256	-71.59	3.05	-68.54	-13.00	-55.54	ERP
3	213.7634	-71.40	2.91	-68.49	-13.00	-55.49	ERP
4	435.5898	-71.15	9.09	-62.06	-13.00	-49.06	ERP
5	614.2142	-71.03	12.51	-58.52	-13.00	-45.52	ERP
6	916.0687	-70.45	14.54	-55.91	-13.00	-42.91	ERP


For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

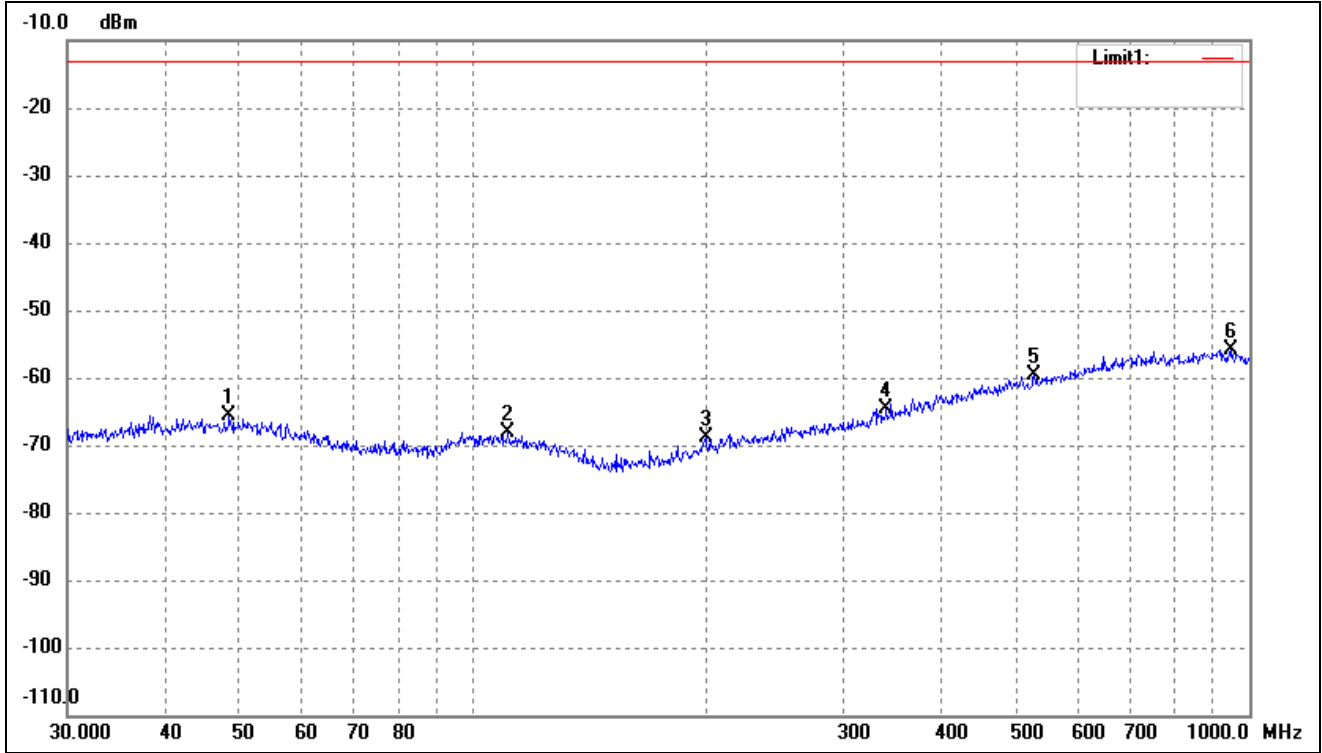

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	48.5016	-71.19	5.47	-65.72	-13.00	-52.72	ERP
2	110.9571	-71.60	3.41	-68.19	-13.00	-55.19	ERP
3	199.2855	-71.31	2.51	-68.80	-13.00	-55.80	ERP
4	340.7817	-70.98	6.44	-64.54	-13.00	-51.54	ERP
5	528.2458	-70.82	11.21	-59.61	-13.00	-46.61	ERP
6	945.4399	-70.07	14.27	-55.80	-13.00	-42.80	ERP

Note: Margin= (Reading+ Correct)- Limit


Test Channel	WCDMA Band V	Polarity:	Horizontal
--------------	--------------	-----------	------------

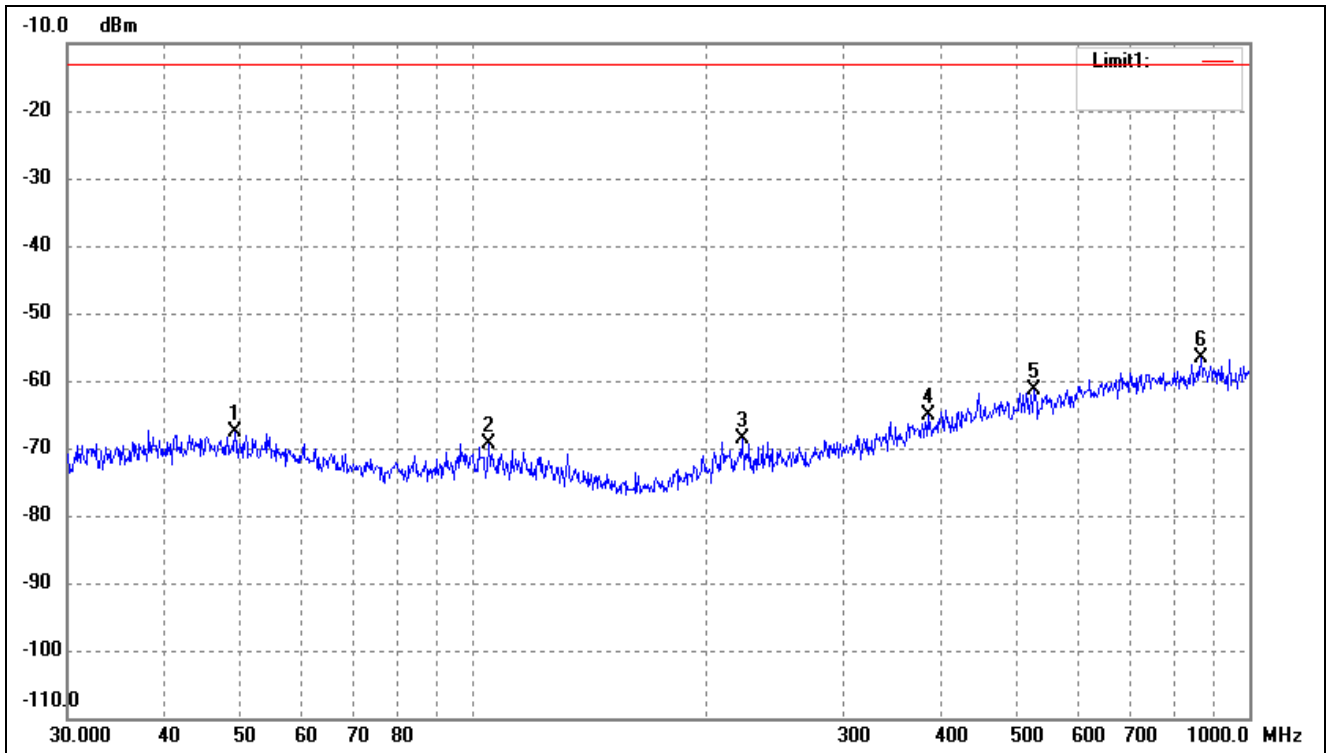

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.3594	-73.21	5.48	-67.73	-13.00	-54.73	ERP
2	104.9033	-73.05	3.56	-69.49	-13.00	-56.49	ERP
3	222.1698	-71.80	3.12	-68.68	-13.00	-55.68	ERP
4	385.2805	-72.98	7.80	-65.18	-13.00	-52.18	ERP
5	528.2458	-72.56	11.21	-61.35	-13.00	-48.35	ERP
6	866.0879	-71.05	14.48	-56.57	-13.00	-43.57	ERP




Test Channel	WCDMA Band V	Polarity:	Vertical
--------------	--------------	-----------	----------

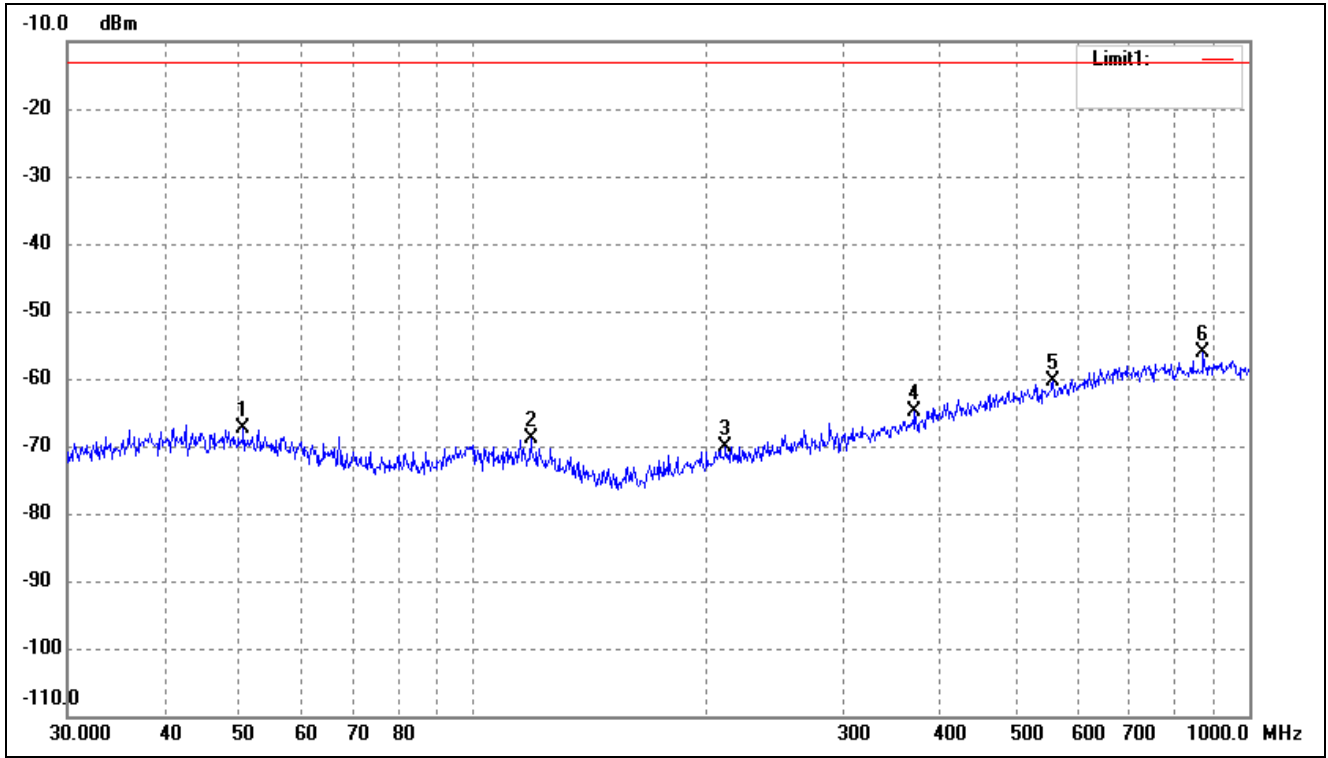


No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.5860	-72.85	5.39	-67.46	-13.00	-54.46	ERP
2	118.6014	-71.75	2.83	-68.92	-13.00	-55.92	ERP
3	211.5265	-72.96	2.84	-70.12	-13.00	-57.12	ERP
4	370.7023	-72.27	7.35	-64.92	-13.00	-51.92	ERP
5	558.7302	-72.01	11.73	-60.28	-13.00	-47.28	ERP
6	872.1832	-70.74	14.52	-56.22	-13.00	-43.22	ERP

Test Channel	WCDMA Band IV	Polarity:	Horizontal
--------------	---------------	-----------	------------

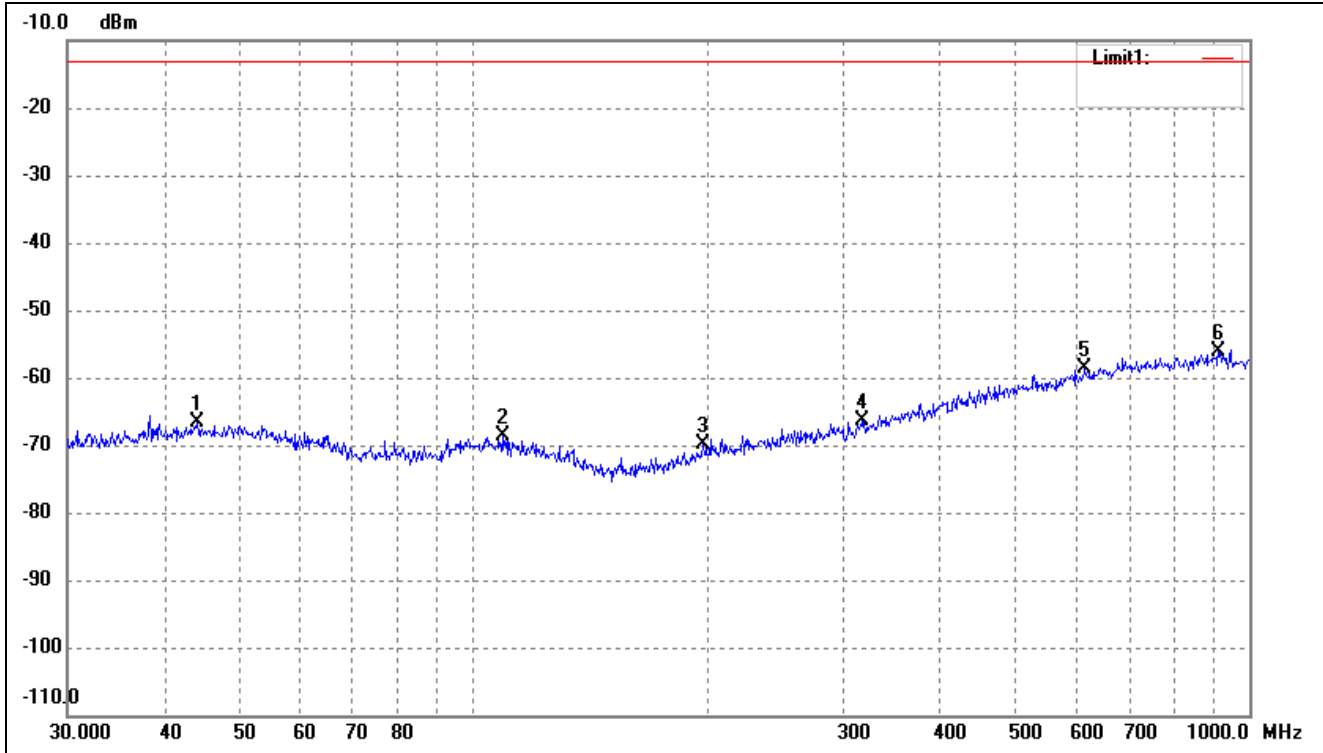

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	44.1202	-72.14	5.47	-66.67	-13.00	-53.67	ERP
2	109.0286	-72.21	3.50	-68.71	-13.00	-55.71	ERP
3	197.8928	-72.28	2.47	-69.81	-13.00	-56.81	ERP
4	316.5890	-72.05	5.69	-66.36	-13.00	-53.36	ERP
5	614.2142	-71.03	12.51	-58.52	-13.00	-45.52	ERP
6	912.8620	-70.77	14.57	-56.20	-13.00	-43.20	ERP


Test Channel	WCDMA Band IV	Polarity:	Vertical
--------------	---------------	-----------	----------

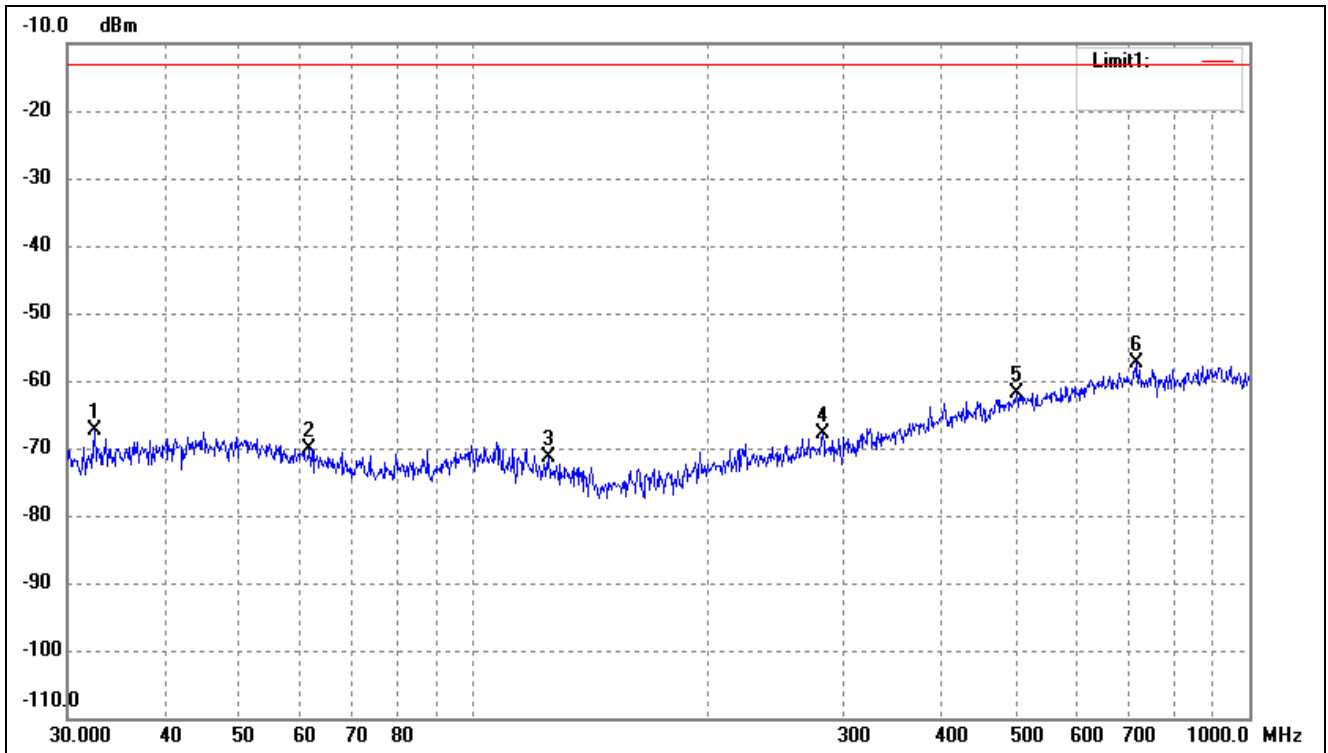

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	32.5198	-70.99	3.64	-67.35	-13.00	-54.35	ERP
2	61.5618	-73.83	3.74	-70.09	-13.00	-57.09	ERP
3	125.0066	-73.24	1.80	-71.44	-13.00	-58.44	ERP
4	281.9946	-72.63	4.73	-67.90	-13.00	-54.90	ERP
5	501.1790	-72.69	10.74	-61.95	-13.00	-48.95	ERP
6	716.6820	-70.81	13.55	-57.26	-13.00	-44.26	ERP


Note: Margin= (Reading+ Correct)- Limit

Test Channel	WCDMA Band II	Polarity:	Horizontal
--------------	---------------	-----------	------------

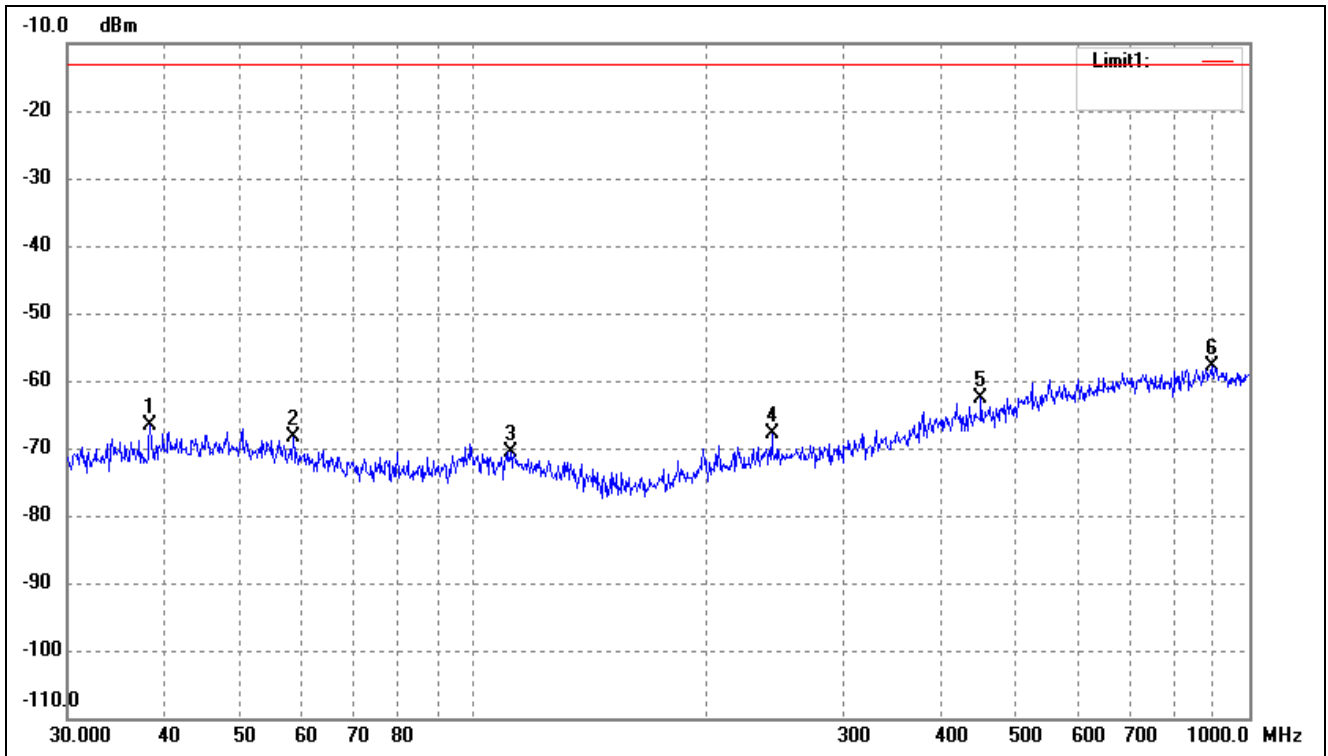

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	38.3462	-71.73	5.06	-66.67	-13.00	-53.67	ERP
2	58.6126	-72.69	4.22	-68.47	-13.00	-55.47	ERP
3	111.7380	-73.86	3.35	-70.51	-13.00	-57.51	ERP
4	242.5253	-71.54	3.66	-67.88	-13.00	-54.88	ERP
5	451.1350	-72.01	9.48	-62.53	-13.00	-49.53	ERP
6	893.8567	-72.40	14.65	-57.75	-13.00	-44.75	ERP

Test Channel	WCDMA Band II	Polarity:	Vertical
--------------	---------------	-----------	----------

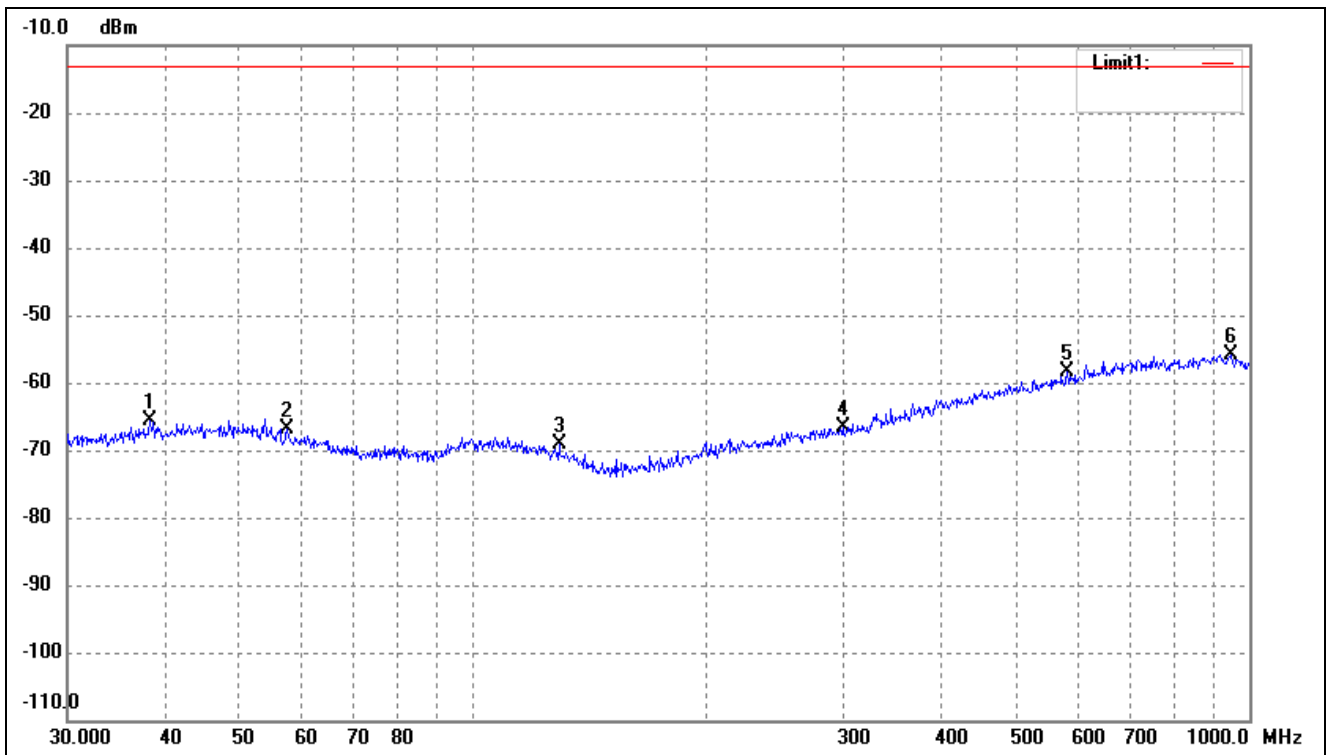

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	38.3462	-70.70	5.06	-65.64	-13.00	-52.64	ERP
2	57.5939	-71.26	4.37	-66.89	-13.00	-53.89	ERP
3	129.0146	-70.16	1.06	-69.10	-13.00	-56.10	ERP
4	299.3158	-71.69	5.16	-66.53	-13.00	-53.53	ERP
5	582.7425	-70.36	12.10	-58.26	-13.00	-45.26	ERP
6	945.4399	-70.07	14.27	-55.80	-13.00	-42.80	ERP

Note: Margin= (Reading+ Correct)- Limit

- Spurious Emissions Above 1GHz
- For Cellular Band\_GSM850 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (824.2MHz)						
1648.4	-42.73	4.94	-37.79	-13	-24.79	H
2472.6	-53.64	8.46	-45.18	-13	-32.18	H
1648.4	-43.64	4.94	-38.70	-13	-25.70	V
2472.6	-43.64	8.46	-35.18	-13	-22.18	V
Middle Channel (836.6MHz)						
1673.2	-45.45	5.11	-40.34	-13	-27.34	H
2509.8	-48.18	8.54	-39.64	-13	-26.64	H
1673.2	-54.55	5.11	-49.44	-13	-36.44	V
2509.8	-54.55	8.54	-46.01	-13	-33.01	V
High Channel (848.8MHz)						
1697.6	-53.64	5.29	-48.35	-13	-35.35	H
2546.4	-54.55	8.59	-45.96	-13	-32.96	H
1697.6	-46.36	5.29	-41.07	-13	-28.07	V
2546.4	-47.27	8.59	-38.68	-13	-25.68	V

- For PCS Band\_GSM1900 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1850.2MHz)						
3700.4	-51.82	10.54	-41.28	-13	-28.28	H
5550.6	-47.27	13.37	-33.90	-13	-20.90	H
3700.4	-42.73	10.54	-32.19	-13	-19.19	V
5550.6	-46.36	13.37	-32.99	-13	-19.99	V
Middle Channel (1880MHz)						
3760.0	-52.73	10.64	-42.09	-13	-29.09	H
5640.0	-45.45	13.54	-31.91	-13	-18.91	H
3760.0	-50.91	10.64	-40.27	-13	-27.27	V
5640.0	-43.64	13.54	-30.10	-13	-17.10	V
High Channel (1909.8MHz)						
3819.6	-43.64	10.74	-32.90	-13	-19.90	H
5729.4	-49.09	13.71	-35.38	-13	-22.38	H
3819.6	-51.82	10.74	-41.08	-13	-28.08	V
5729.4	-47.27	13.71	-33.56	-13	-20.56	V

## ➤ For WCDMA Band V Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (826.4MHz)						
1652.8	-42.73	4.94	-37.79	-13	-24.79	H
2479.2	-52.73	8.46	-44.27	-13	-31.27	H
1652.8	-50.00	4.94	-45.06	-13	-32.06	V
2479.2	-53.64	8.46	-45.18	-13	-32.18	V
Middle Channel (836.6MHz)						
1672.8	-45.45	5.11	-40.34	-13	-27.34	H
2509.2	-45.45	8.54	-36.91	-13	-23.91	H
1672.8	-42.73	5.11	-37.62	-13	-24.62	V
2509.2	-55.45	8.54	-46.91	-13	-33.91	V
High Channel (846.6MHz)						
1693.2	-47.27	5.25	-42.02	-13	-29.02	H
2539.8	-50.00	8.57	-41.43	-13	-28.43	H
1693.2	-53.64	5.25	-48.39	-13	-35.39	V
2539.8	-53.64	8.57	-45.07	-13	-32.07	V

## ➤ For WCDMA Band IV Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1712.4MHz)						
3424.8	-42.73	8.65	-34.08	-13	-21.08	H
5137.2	-46.36	12.03	-34.33	-13	-21.33	H
3424.8	-47.27	8.65	-38.62	-13	-25.62	V
5137.2	-44.55	12.03	-32.52	-13	-19.52	V
Middle Channel (1732.4MHz)						
3466.8	-48.18	8.91	-39.27	-13	-26.27	H
5200.2	-47.27	12.29	-34.98	-13	-21.98	H
3466.8	-45.45	8.91	-36.54	-13	-23.54	V
5200.2	-50.00	12.29	-37.71	-13	-24.71	V
High Channel (1752.6MHz)						
3505.2	-49.09	9.11	-39.98	-13	-26.98	H
5257.8	-55.45	12.56	-42.89	-13	-29.89	H
3505.2	-51.82	9.11	-42.71	-13	-29.71	V
5257.8	-53.64	12.56	-41.08	-13	-28.08	V

## ➤ For WCDMA Band II Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
3704.8	-52.73	10.54	-42.19	-13	-29.19	H
5557.2	-54.55	13.37	-41.18	-13	-28.18	H
3704.8	-50.91	10.54	-40.37	-13	-27.37	V
5557.2	-46.36	13.37	-32.99	-13	-19.99	V
Middle Channel (1880MHz)						
3760.8	-50.91	10.64	-40.27	-13	-27.27	H
5640.0	-49.09	13.54	-35.55	-13	-22.55	H
3760.8	-51.82	10.64	-41.18	-13	-28.18	V
5640.0	-46.36	13.54	-32.82	-13	-19.82	V
High Channel (1907.6MHz)						
3815.2	-48.18	10.74	-37.44	-13	-24.44	H
5722.8	-42.73	13.71	-29.02	-13	-16.02	H
3815.2	-53.64	10.74	-42.90	-13	-29.90	V
5722.8	-48.18	13.71	-34.47	-13	-21.47	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



## **8. Frequency Stability**

---

### **8.1 Standard Applicable**

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

### **8.2 Test Procedure**

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

### **8.3 Summary of Test Results/Plots**

**Please refer to Appendix E**

## 9. Modulation characteristics

---

### 9.1 Standard Applicable

According to §2.1047, measurements required: Modulation characteristics is given below:

(a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.


(b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.

(c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.

(d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

### 9.2 Test Procedure

According to ANSI C63.26-2015 section 5.3.2, the following test setup was performed.

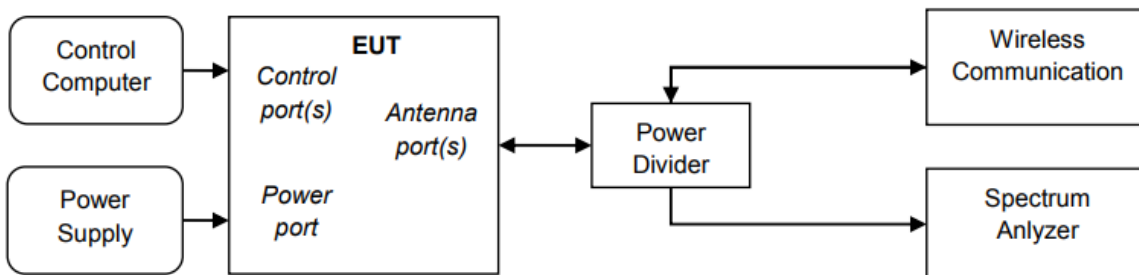

### 9.3 Summary of Test Results/Plots

Please refer to Appendix F

**APPENDIX SUMMARY**

Project No.	WTX23X02023511W	Test Engineer	Timi Huang
Start date	2023/3/8	Finish date	2023/3/8
Temperature	23°C	Humidity	47%
RF specifications	GSM/WCDMA		

<b>APPENDIX</b>	<b>Description of Test Item</b>	<b>Result</b>
A	RF Output Power	Compliant
B	Peak-to-average Ratio (PAR) of Transmitter	Compliant
C	Emission Bandwidth	Compliant
D	Out of Band Emissions at Antenna Terminal	Compliant
E	Frequency Stability	Compliant
F	Modulation characteristics	Compliant

**APPENDIX A****Conducted Average power**

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	32.74	32.74	32.82	29.31	30.02	30.26
GPRS(1Slot)	32.59	32.61	32.68	29.32	29.97	30.11

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	23.52	23.39	23.44	23.44	23.61	23.60
HSDPA Subtest-1	22.47	22.87	22.55	22.42	22.47	22.51
HSDPA Subtest-2	22.43	22.85	22.50	22.35	22.32	22.35
HSDPA Subtest-3	22.35	22.55	22.45	22.12	22.15	22.22
HSDPA Subtest-4	22.28	22.38	22.15	22.18	22.12	22.12
HSUPA Subtest-1	22.47	22.45	22.44	22.41	22.46	22.50
HSUPA Subtest-2	22.35	22.40	22.42	22.38	22.42	22.45
HSUPA Subtest-3	22.32	22.35	22.40	22.35	22.40	22.41
HSUPA Subtest-4	22.28	22.34	22.40	22.32	22.40	22.38
HSUPA Subtest-5	22.25	22.32	22.38	22.30	22.38	22.30

Conducted Average power (dBm)						
Band	WCDMA Band IV					
Channel	1312	1412	1513			
Frequency(MHz)	1712.4	1733.4	1752.6			
RMC 12.2k	21.78	21.63	21.76			
HSDPA Subtest-1	21.61	21.50	21.51			
HSDPA Subtest-2	21.60	22.48	21.50			
HSDPA Subtest-3	21.58	22.45	22.45			
HSDPA Subtest-4	21.50	22.43	22.42			
HSUPA Subtest-1	21.45	21.38	21.40			
HSUPA Subtest-2	21.42	21.35	21.39			
HSUPA Subtest-3	21.40	21.32	21.37			
HSUPA Subtest-4	21.40	21.30	21.35			
HSUPA Subtest-5	21.38	21.28	21.30			

## APPENDIX B

---

### Peak-to-average Ratio (PAR) of Transmitter

PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	661	1850.2	6.86	13
GPRS(1 Slot)	661	1850.2	6.74	13

WCDMA Band IV				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	1312	1712.4	6.29	13
	1412	1733.4	6.47	13
	1513	1752.6	6.12	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	6.34	13
	9400	1880.0	6.95	13
	9538	1907.6	6.84	13

Note: Only the worst case was selected to record.




**APPENDIX C**

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850 (GMSK)	128	824.20	248	320
	190	836.60	246	318
	251	848.80	232	312
GPRS850 (GMSK,1Slot)	128	824.20	242	320
	190	836.60	246	322
	251	848.80	246	318
PCS1900 (GMSK)	512	1850.20	248	320
	661	1880.00	246	318
	810	1909.80	246	322
GPRS1900 (GMSK,1Slot)	512	1850.20	244	324
	661	1880.00	246	326
	810	1909.80	244	328


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
WCDMA Band V	4132	826.40	4300	4720
	4183	836.60	4180	4720
	4233	846.60	4180	4720
HSDPA	4132	826.40	4200	4740
	4183	836.60	4200	4800
	4233	846.60	4200	4760
HSUPA	4132	826.40	4200	4780
	4183	836.60	4200	4760
	4233	846.60	4180	4720
WCDMA Band II	9262	1852.40	4160	4720
	9400	1880.00	4180	4740
	9538	1907.60	4180	4740
HSDPA	9262	1852.40	4200	4720
	9400	1880.00	4180	A
	9538	1907.60	4180	4720
HSUPA	9262	1852.40	4200	4720
	9400	1880.00	4200	4740
	9538	1907.60	4180	4740
WCDMA Band IV	1312	1712.4	4200	4740
	1412	1733.4	4200	4720
	1513	1752.6	4180	4720
HSDPA	1312	1712.4	4200	4780
	1412	1733.4	4200	4700
	1513	1752.6	4200	4720
HSUPA	1312	1712.4	4200	4720
	1412	1733.4	4180	4740
	1513	1752.6	4180	4720



99% Occupy bandwidth (kHz)

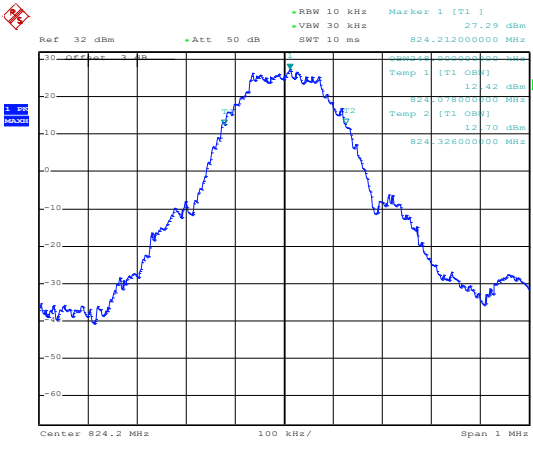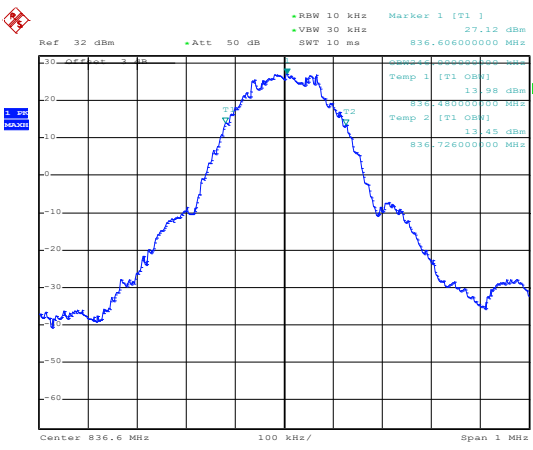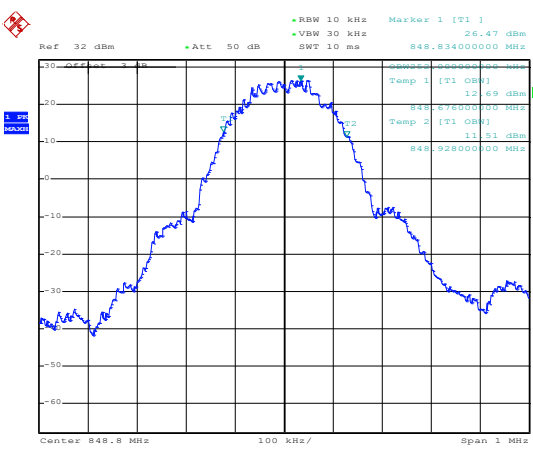
<p>GSM 850 (GMSK)-Low</p>	 <p>Date: 7.MAR.2023 10:34:00</p>
<p>GSM 850 (GMSK)-Middle</p>	 <p>Date: 7.MAR.2023 10:33:30</p>
<p>GSM 850 (GMSK)-High</p>	 <p>Date: 7.MAR.2023 10:32:50</p>

GPRS850  
(GMSK,1Slot)-Low

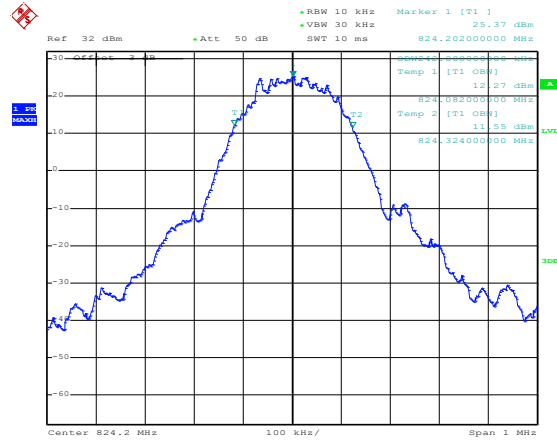


Date: 7.MAR.2023 09:58:46

GPRS850  
(GMSK,1Slot)-Middle

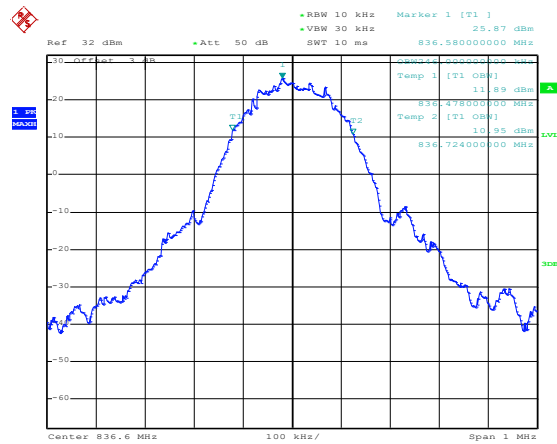


Date: 7.MAR.2023 09:59:14

GPRS850  
(GMSK,1Slot)-High

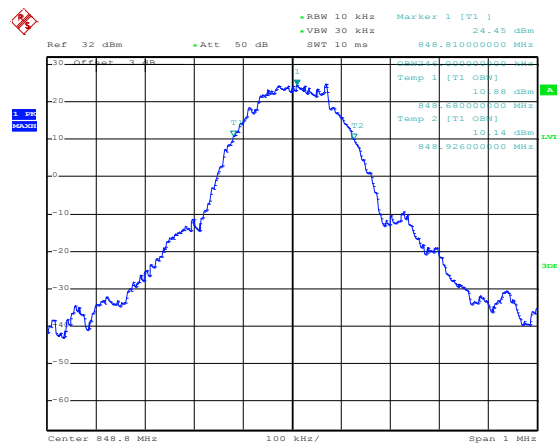


Date: 7.MAR.2023 09:59:38

PCS1900  
(GMSK)-Low

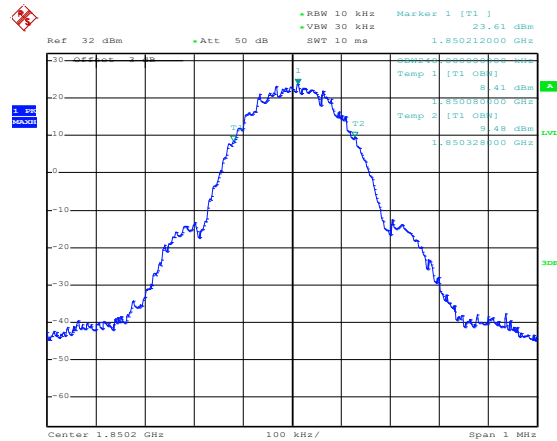


Date: 7.MAR.2023 10:47:42

PCS1900  
(GMSK)-Middle

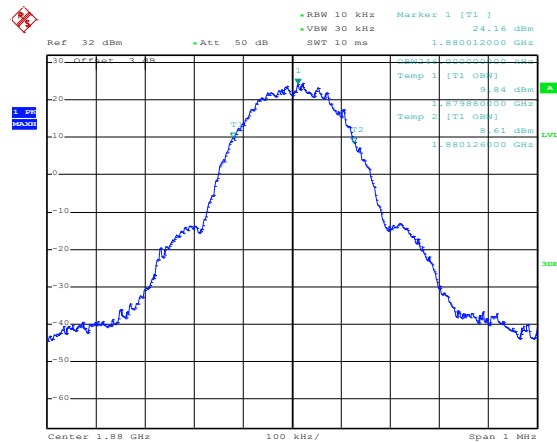

Date: 7.MAR.2023 10:47:03

PCS1900  
(GMSK)-High

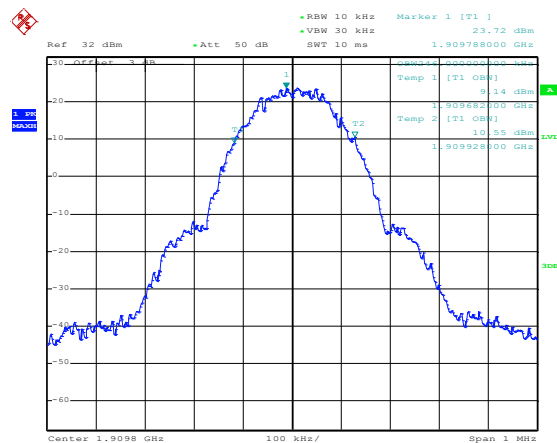


Date: 7.MAR.2023 10:46:24

<p>GPRS1900 (GMSK,1Slot)-Low</p>	<p>Ref 32 dBm    Att 50 dB    RBW 10 kHz    VBW 30 kHz    SWT 10 ms    Marker 1 [T1 ]    20.26 dBm          1.850202000 GHz</p> <p>Temp 1 [T1 OBW]    5.71 dBm          1.850082100 GHz          Temp 2 [T1 OBW]    6.17 dBm          1.850326100 GHz</p> <p>Center 1.8502 GHz    100 kHz/    Span 1 MHz</p> <p>Date: 7.MAR.2023 13:23:54</p>
<p>GPRS1900 (GMSK,1Slot)-Middle</p>	<p>Ref 32 dBm    Att 50 dB    RBW 10 kHz    VBW 30 kHz    SWT 10 ms    Marker 1 [T1 ]    21.44 dBm          1.880008000 GHz</p> <p>Temp 1 [T1 OBW]    7.24 dBm          1.880082100 GHz          Temp 2 [T1 OBW]    6.36 dBm          1.880128100 GHz</p> <p>Center 1.88 GHz    100 kHz/    Span 1 MHz</p> <p>Date: 7.MAR.2023 13:24:37</p>
<p>GPRS1900 (GMSK,1Slot)-High</p>	<p>Ref 32 dBm    Att 50 dB    RBW 10 kHz    VBW 30 kHz    SWT 10 ms    Marker 1 [T1 ]    22.62 dBm          1.909798000 GHz</p> <p>Temp 1 [T1 OBW]    7.22 dBm          1.909682100 GHz          Temp 2 [T1 OBW]    6.73 dBm          1.909926100 GHz</p> <p>Center 1.9098 GHz    100 kHz/    Span 1 MHz</p> <p>Date: 7.MAR.2023 13:25:07</p>


<p>WCDMA Band V-Low</p>	<p>Ref 32 dBm    •Att 50 dB    •RBW 100 kHz    Marker 1 [T1]    15.15 dBm          •VSW 300 kHz    •SWT 2.5 ms    825.280000000 MHz</p> <p>Temp 1 [T1 OBW]    6.84 dBm          823.300000000 MHz          Temp 2 [T1 OBW]    6.78 dBm          828.500000000 MHz</p> <p>Center 826.4 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:28:37</p>
<p>WCDMA Band V-Middle</p>	<p>Ref 32 dBm    •Att 50 dB    •RBW 100 kHz    Marker 1 [T1]    16.11 dBm          •VSW 300 kHz    •SWT 2.5 ms    835.760000000 MHz</p> <p>Temp 1 [T1 OBW]    6.88 dBm          834.300000000 MHz          Temp 2 [T1 OBW]    7.30 dBm          838.680000000 MHz</p> <p>Center 836.6 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:28:14</p>
<p>WCDMA Band V-High</p>	<p>Ref 32 dBm    •Att 50 dB    •RBW 100 kHz    Marker 1 [T1]    15.44 dBm          •VSW 300 kHz    •SWT 2.5 ms    845.860000000 MHz</p> <p>Temp 1 [T1 OBW]    6.61 dBm          843.300000000 MHz          Temp 2 [T1 OBW]    6.88 dBm          849.680000000 MHz</p> <p>Center 846.6 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:27:47</p>

HSDPA-Low

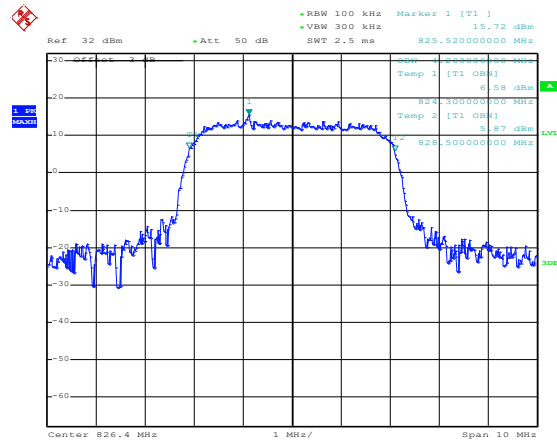


Date: 7.MAR.2023 18:46:54

HSDPA-Middle



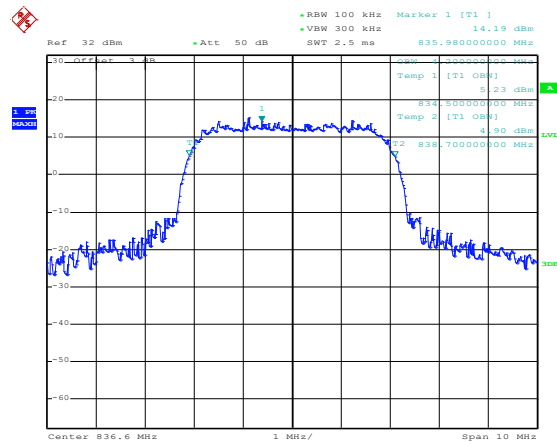





Date: 7.MAR.2023 18:46:15

HSDPA-High



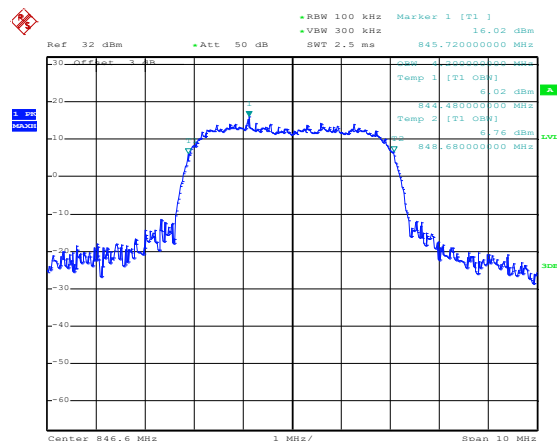


Date: 7.MAR.2023 18:45:36

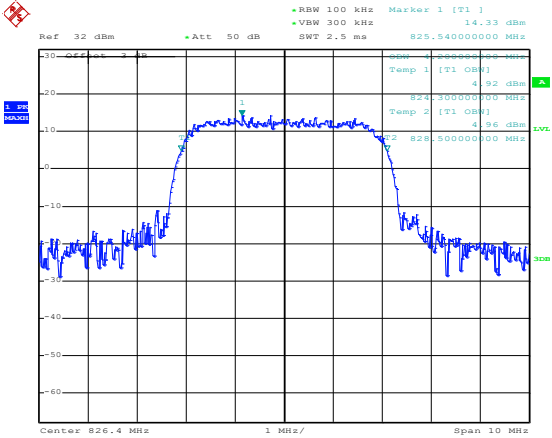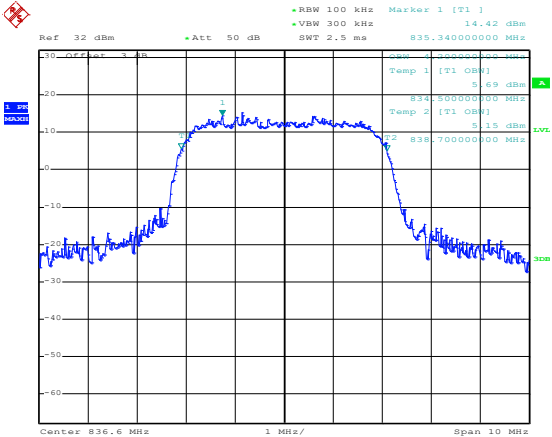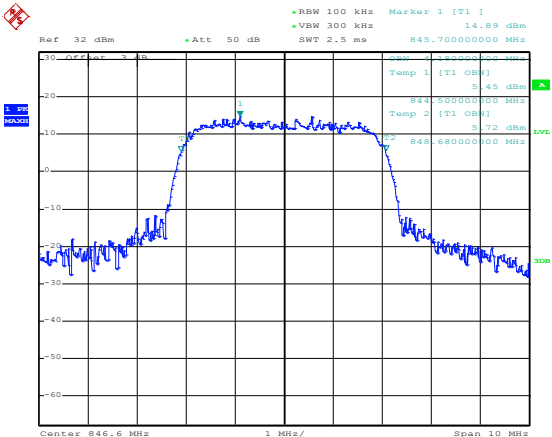
<p>HSUPA-Low</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1]    14.33 dBm    825.540000000 MHz</p> <p>Center 826.4 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 19:02:54</p>
<p>HSUPA-Middle</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1]    14.42 dBm    835.240000000 MHz</p> <p>Center 836.6 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 19:03:36</p>
<p>HSUPA-High</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1]    14.89 dBm    845.700000000 MHz</p> <p>Center 846.6 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 19:04:12</p>
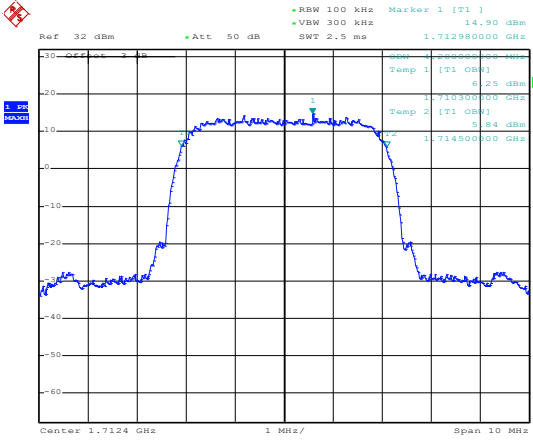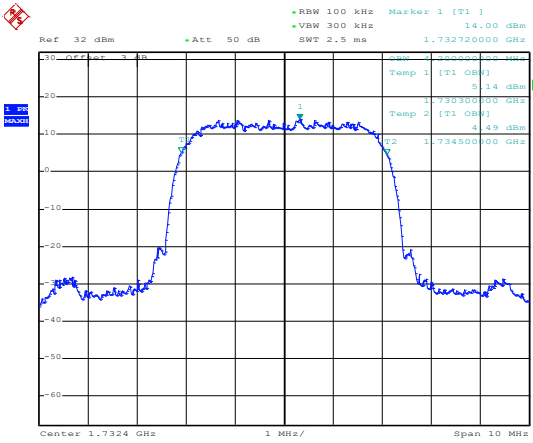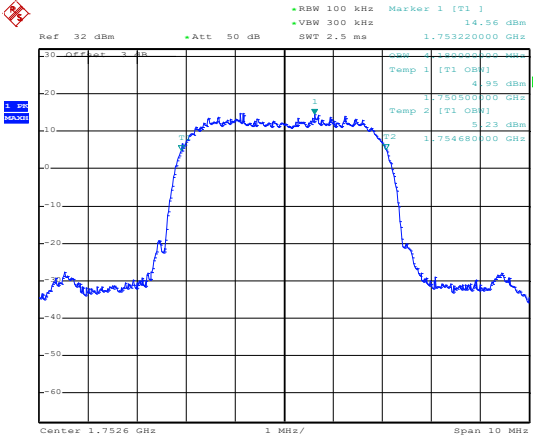
<p>WCDMA Band IV-Low</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1 ]    14.90 dBm    1.712980000 GHz</p> <p>Temp 1 [T1 OBW]    6.25 dBm    1.710300000 GHz</p> <p>Temp 2 [T1 OBW]    5.84 dBm    1.714500000 GHz</p> <p>Center 1.7124 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 17:47:00</p>
<p>WCDMA Band IV-Middle</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1 ]    14.00 dBm    1.732720000 GHz</p> <p>Temp 1 [T1 OBW]    13.34 dBm    1.730300000 GHz</p> <p>Temp 2 [T1 OBW]    4.49 dBm    1.734500000 GHz</p> <p>Center 1.7324 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 17:47:37</p>
<p>WCDMA Band IV-High</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1 ]    14.36 dBm    1.753220000 GHz</p> <p>Temp 1 [T1 OBW]    4.95 dBm    1.750500000 GHz</p> <p>Temp 2 [T1 OBW]    5.23 dBm    1.754680000 GHz</p> <p>Center 1.7526 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 17:48:05</p>

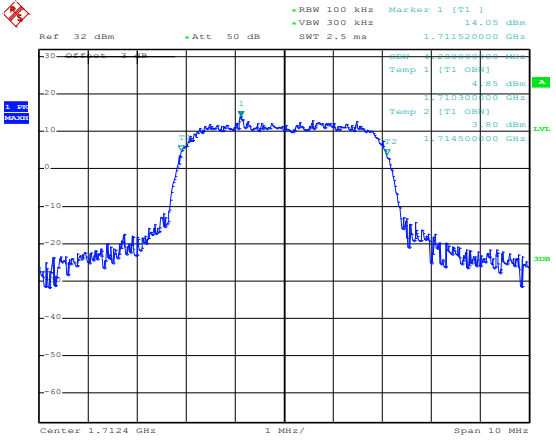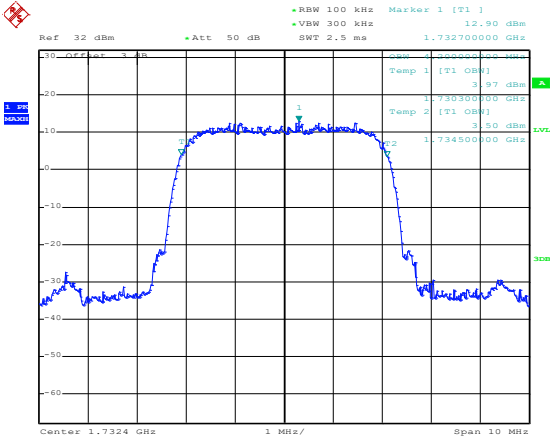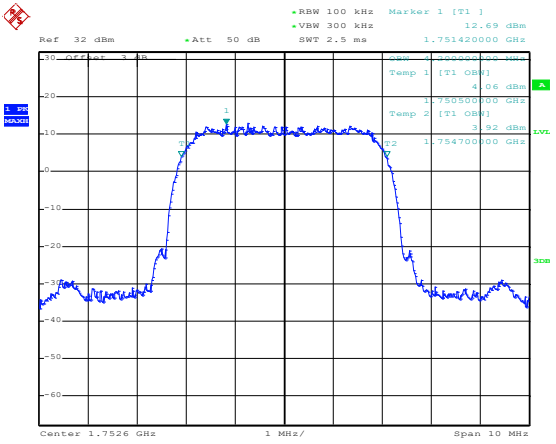


<p>HSDPA-Low</p>	 <p>Date: 7.MAR.2023 17:57:18</p>
<p>HSDPA-Middle</p>	 <p>Date: 7.MAR.2023 17:57:49</p>
<p>HSDPA-High</p>	 <p>Date: 7.MAR.2023 17:58:20</p>

HSUPA-Low

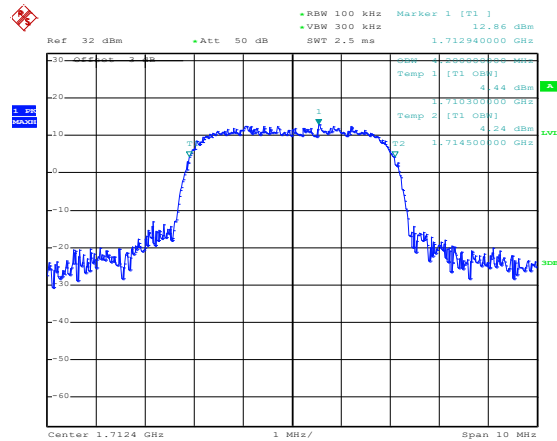


Date: 7.MAR.2023 18:17:36

HSUPA-Middle

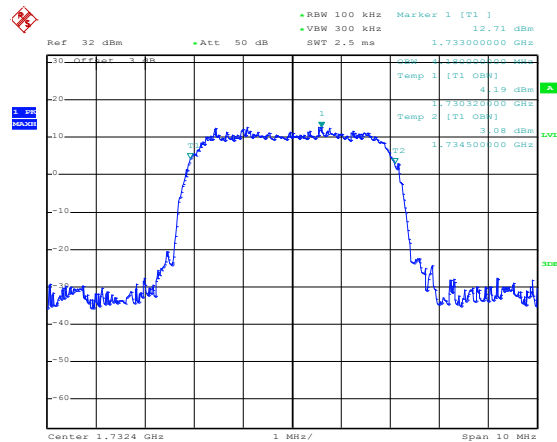


Date: 7.MAR.2023 18:16:56

HSUPA-High

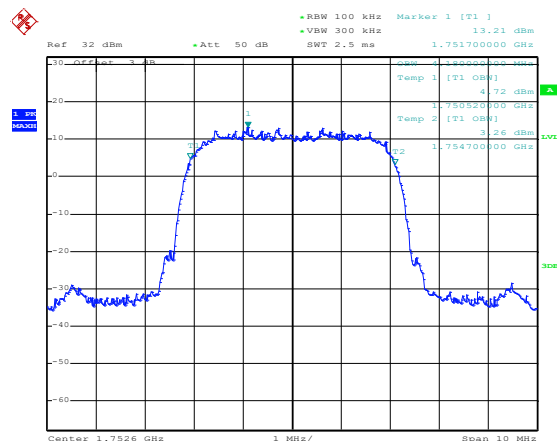


Date: 7.MAR.2023 18:16:29

WCDMA Band II-Low

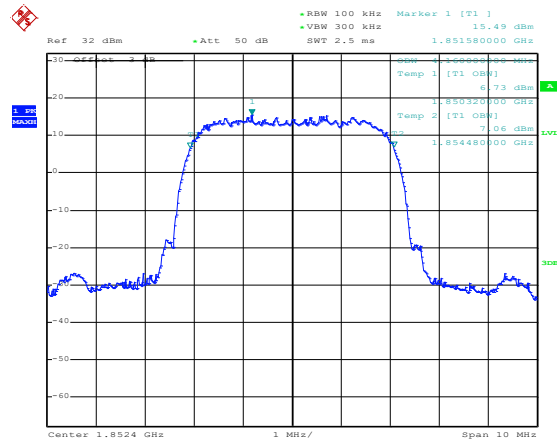


Date: 7.MAR.2023 13:41:20

WCDMA Band II-Middle



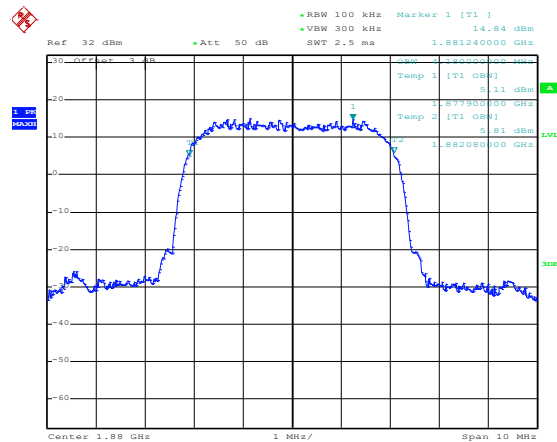


Date: 7.MAR.2023 13:40:18

WCDMA Band II-High

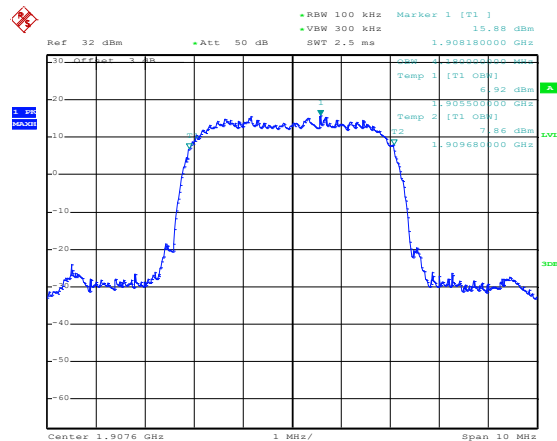

Date: 7.MAR.2023 13:39:33

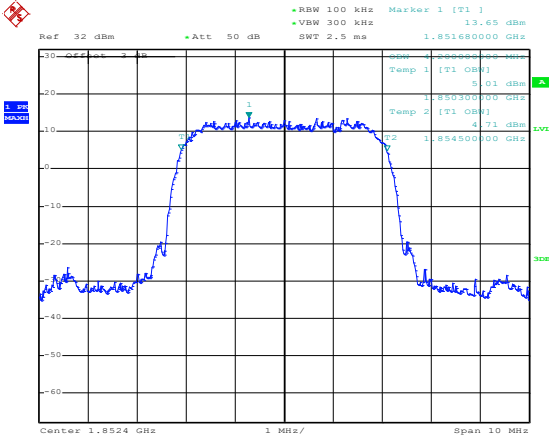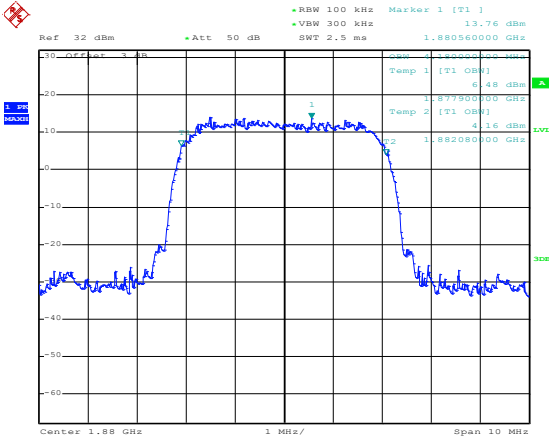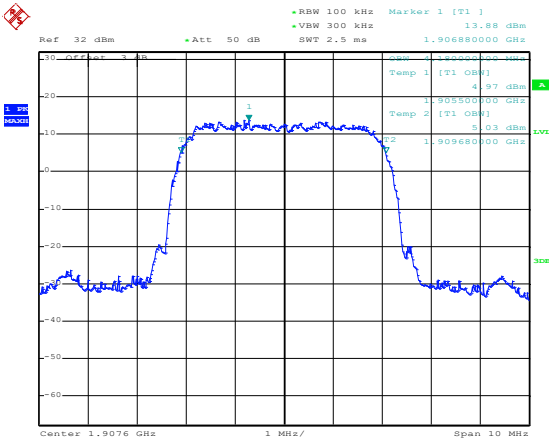
<p>HSDPA-Low</p>	 <p>Date: 7.MAR.2023 13:59:56</p>
<p>HSDPA-Middle</p>	 <p>Date: 7.MAR.2023 13:59:16</p>
<p>HSDPA-High</p>	 <p>Date: 7.MAR.2023 13:58:47</p>

<p>HSUPA-Low</p>	<p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1 ]    12.88 dBm</p> <p>1.852960000 GHz</p> <p>Temp 1 [T1 OBW]    5.29 dBm</p> <p>Temp 2 [T1 OBW]    1.853000000 GHz</p> <p>Temp 2 [T1 OBW]    3.53 dBm</p> <p>Temp 2 [T1 OBW]    1.854500000 GHz</p> <p>Center 1.8534 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 14:09:09</p>
<p>HSUPA-Middle</p>	<p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1 ]    13.72 dBm</p> <p>1.880640000 GHz</p> <p>Temp 1 [T1 OBW]    13.17 dBm</p> <p>Temp 2 [T1 OBW]    1.882000000 GHz</p> <p>Temp 2 [T1 OBW]    5.70 dBm</p> <p>Temp 2 [T1 OBW]    1.882080000 GHz</p> <p>Center 1.88 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 14:08:44</p>
<p>HSUPA-High</p>	<p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1 ]    13.38 dBm</p> <p>1.907280000 GHz</p> <p>Temp 1 [T1 OBW]    4.39 dBm</p> <p>Temp 2 [T1 OBW]    1.908500000 GHz</p> <p>Temp 2 [T1 OBW]    6.48 dBm</p> <p>Temp 2 [T1 OBW]    1.909680000 GHz</p> <p>Center 1.9076 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 14:08:21</p>

-26dB bandwidth (kHz)


<p>GSM 850 (GMSK)-Low</p>	<p>Ref 32 dBm    • Att 50 dB    • RBW 10 kHz    Marker 1 [T1]    28.04 dBm          • VBW 30 kHz    • SWT 10 ms    824.226000000 MHz</p> <p>Center 824.2 MHz    100 kHz/    Span 1 MHz</p> <p>Date: 7.MAR.2023 10:35:40</p>
<p>GSM 850 (GMSK)-Middle</p>	<p>Ref 32 dBm    • Att 50 dB    • RBW 10 kHz    Marker 1 [T1]    28.08 dBm          • VBW 30 kHz    • SWT 10 ms    836.626000000 MHz</p> <p>Center 836.6 MHz    100 kHz/    Span 1 MHz</p> <p>Date: 7.MAR.2023 10:36:07</p>
<p>GSM 850 (GMSK)-High</p>	<p>Ref 32 dBm    • Att 50 dB    • RBW 10 kHz    Marker 1 [T1]    28.85 dBm          • VBW 30 kHz    • SWT 10 ms    848.798000000 MHz</p> <p>Center 848.8 MHz    100 kHz/    Span 1 MHz</p> <p>Date: 7.MAR.2023 10:36:33</p>

GPRS850  
(GMSK,1Slot)-Low

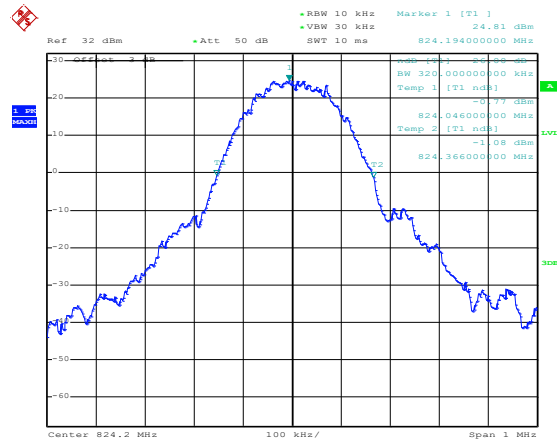


Date: 7.MAR.2023 10:01:31

GPRS850  
(GMSK,1Slot)-Middle

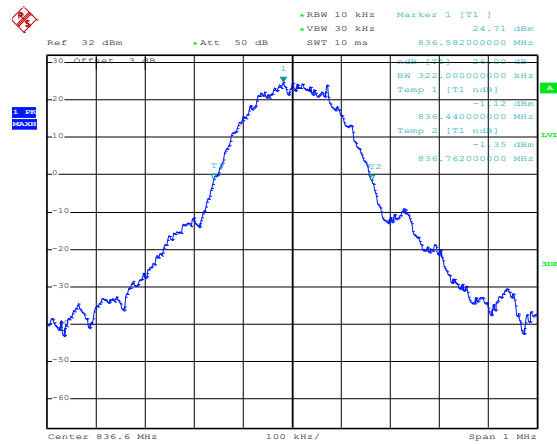


Date: 7.MAR.2023 10:01:09

GPRS850  
(GMSK,1Slot)-High

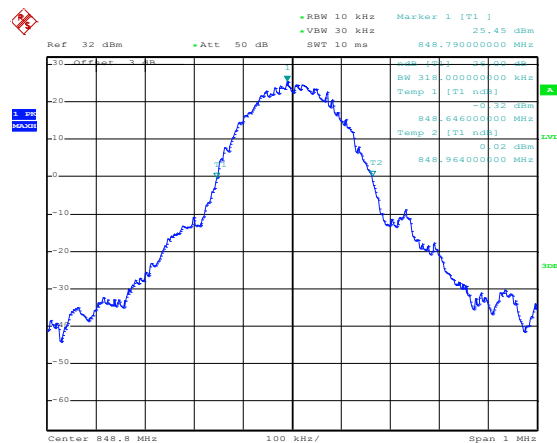


Date: 7.MAR.2023 10:00:45

PCS1900  
(GMSK)-Low

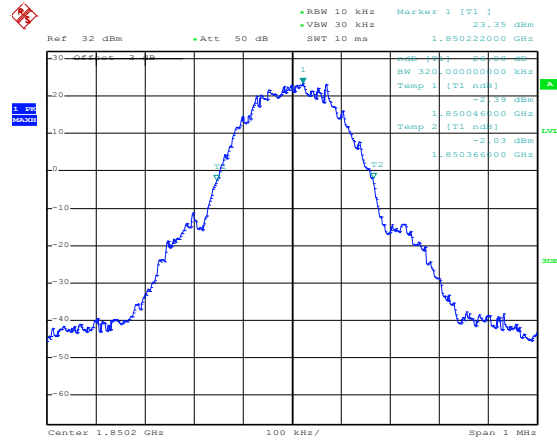


Date: 7.MAR.2023 10:44:38

PCS1900  
(GMSK)-Middle

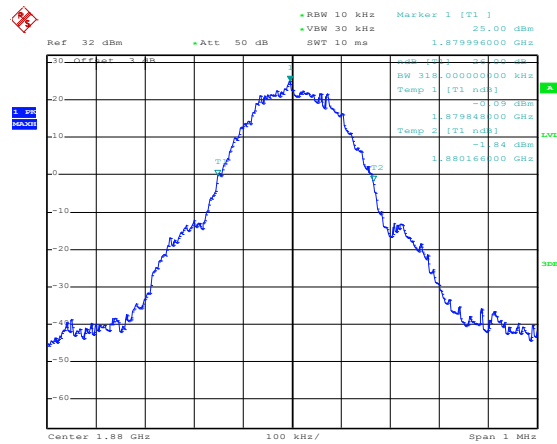

Date: 7.MAR.2023 10:45:02


PCS1900  
(GMSK)-High

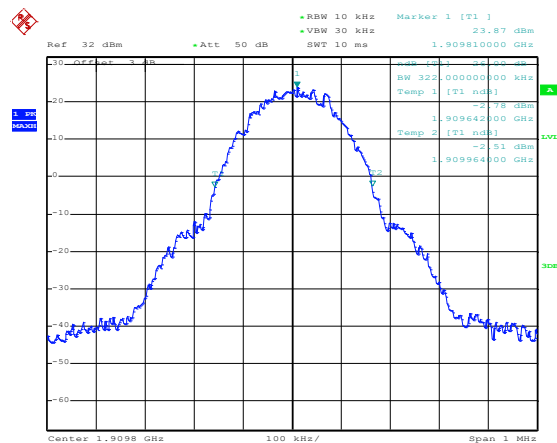

Date: 7.MAR.2023 10:45:29




GPRS1900  
(GMSK,1Slot)-Low

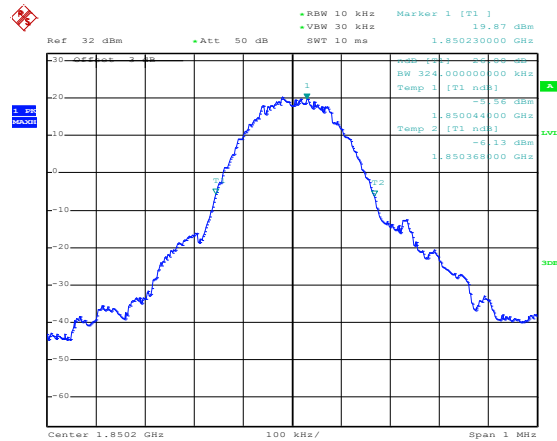


Date: 7.MAR.2023 13:27:34

GPRS1900  
(GMSK,1Slot)-Middle



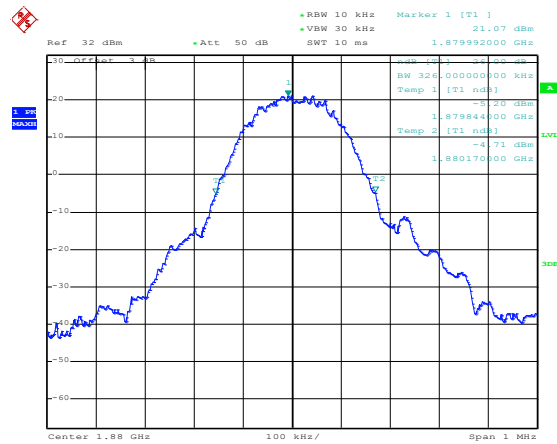


Date: 7.MAR.2023 13:26:43


GPRS1900  
(GMSK,1Slot)-High

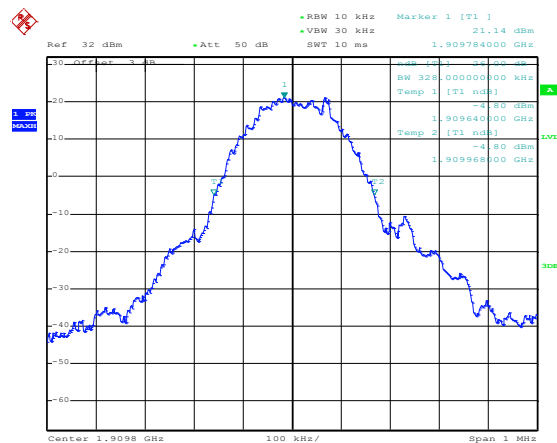

Date: 7.MAR.2023 13:26:07

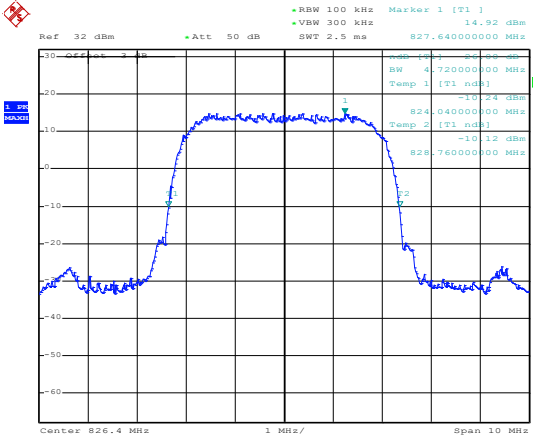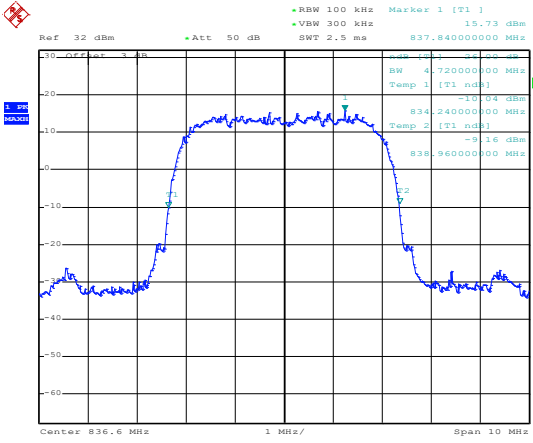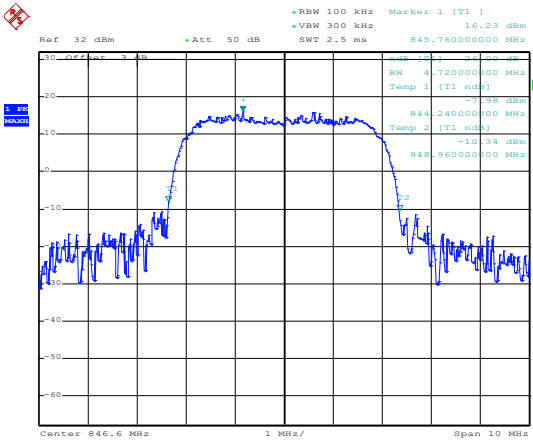
<p>WCDMA Band V-Low</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    Marker 1 [T1]    14.92 dBm          VBW 300 kHz    SWT 2.5 ms    827.64000000 MHz</p> <p>Temp 1 [T1 ndB]    -10.24 dBm          824.04000000 MHz          Temp 2 [T1 ndB]    -10.12 dBm          828.76000000 MHz</p> <p>Center 826.4 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:29:25</p>
<p>WCDMA Band V-Middle</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    Marker 1 [T1]    15.73 dBm          VBW 300 kHz    SWT 2.5 ms    837.84000000 MHz</p> <p>Temp 1 [T1 ndB]    -10.04 dBm          834.24000000 MHz          Temp 2 [T1 ndB]    -9.16 dBm          838.96000000 MHz</p> <p>Center 836.6 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:29:49</p>
<p>WCDMA Band V-High</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    Marker 1 [T1]    16.23 dBm          VBW 300 kHz    SWT 2.5 ms    845.76000000 MHz</p> <p>Temp 1 [T1 ndB]    -9.98 dBm          844.24000000 MHz          Temp 2 [T1 ndB]    -10.34 dBm          848.96000000 MHz</p> <p>Center 846.6 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:30:23</p>

HSDPA-Low

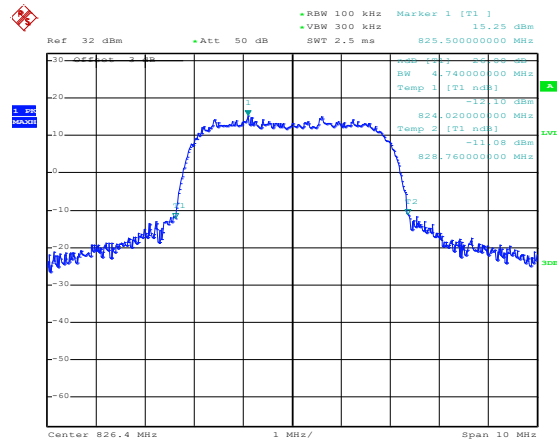


Date: 7.MAR.2023 18:48:30

HSDPA-Middle



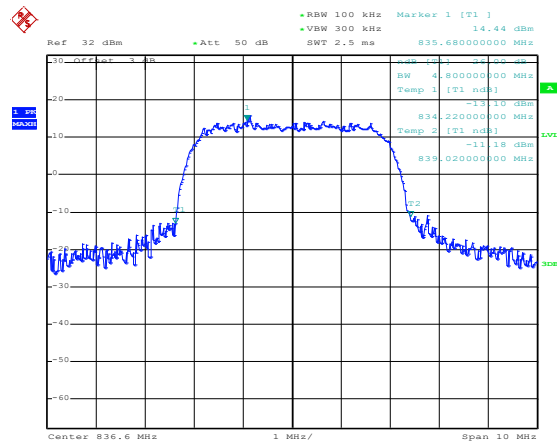


Date: 7.MAR.2023 18:49:17


HSDPA-High

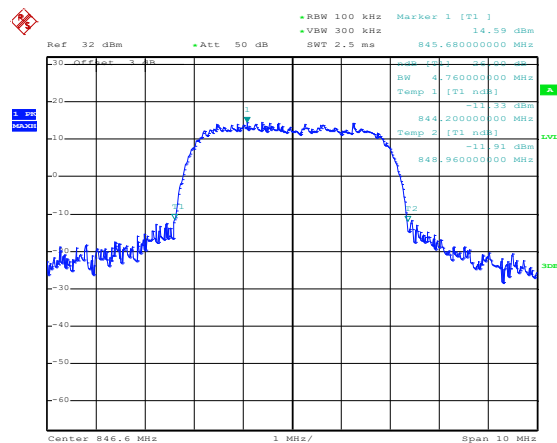

Date: 7.MAR.2023 18:49:56

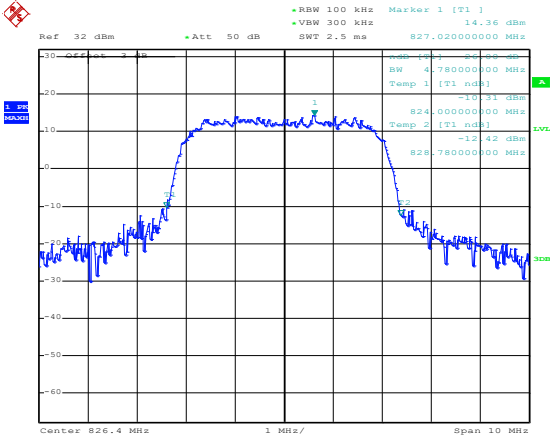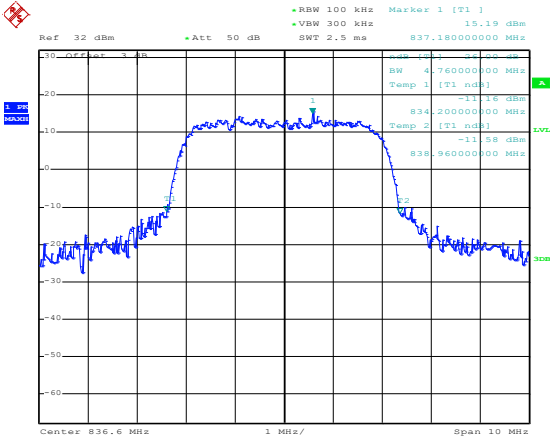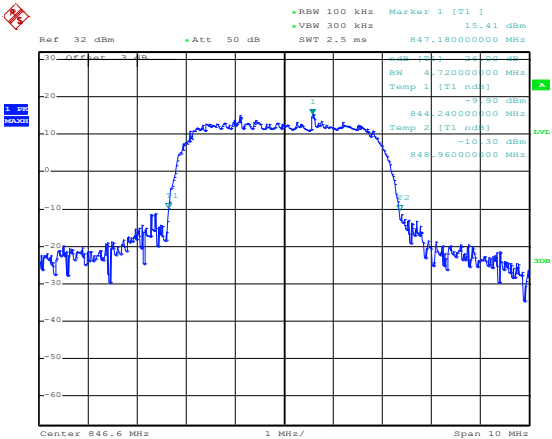
<p>HSUPA-Low</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    Marker 1 [T1]    14.36 dBm          VBW 300 kHz    SWT 2.5 ms    827.02000000 MHz</p> <p>Center 826.4 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 19:01:52</p>
<p>HSUPA-Middle</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    Marker 1 [T1]    15.19 dBm          VBW 300 kHz    SWT 2.5 ms    837.18000000 MHz</p> <p>Center 836.6 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 19:01:10</p>
<p>HSUPA-High</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    Marker 1 [T1]    15.41 dBm          VBW 300 kHz    SWT 2.5 ms    847.18000000 MHz</p> <p>Center 846.6 MHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 19:00:28</p>

WCDMA Band IV-Low

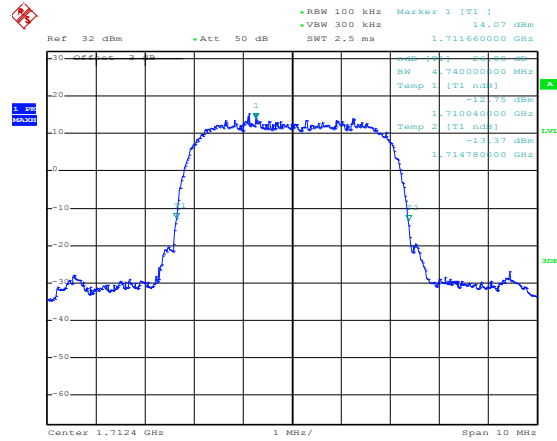


Date: 7.MAR.2023 17:50:26

WCDMA Band IV-Middle



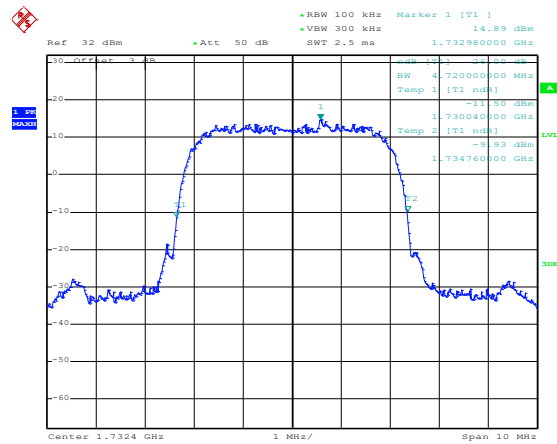





Date: 7.MAR.2023 17:49:57

WCDMA Band IV-High

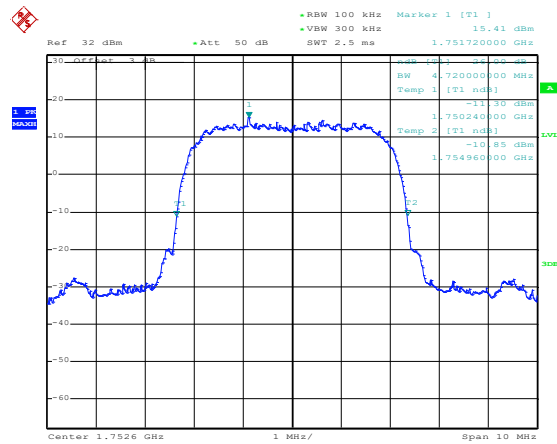


Date: 7.MAR.2023 17:49:18
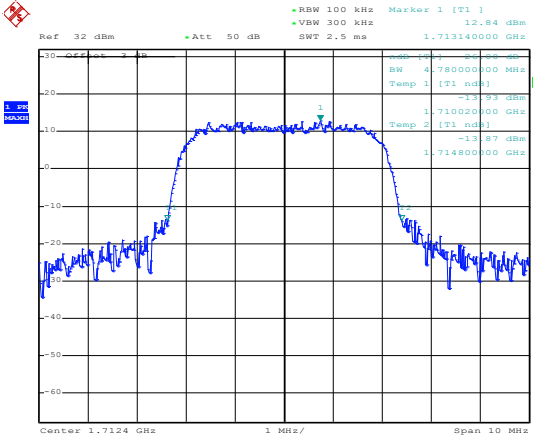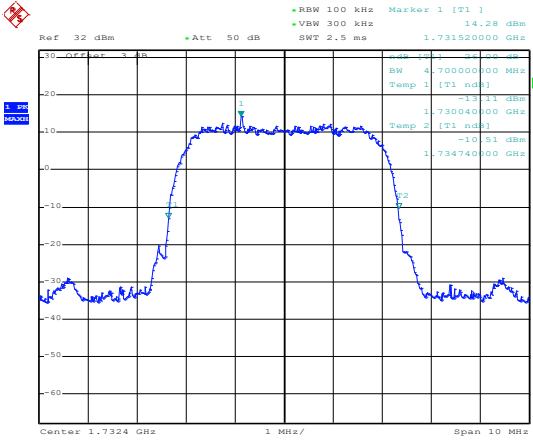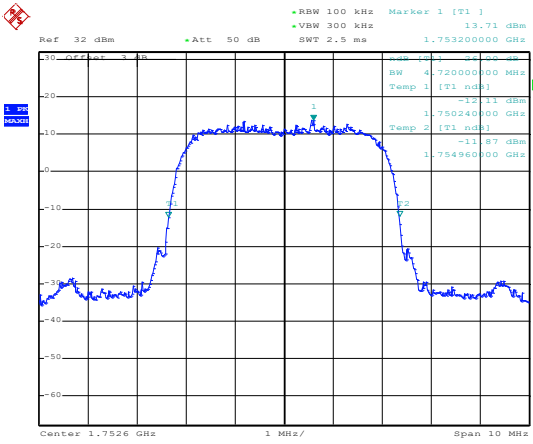
<p>HSDPA-Low</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1]    12.84 dBm</p> <p>Center 1.7124 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:00:17</p>
<p>HSDPA-Middle</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1]    14.28 dBm</p> <p>Center 1.7324 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:00:45</p>
<p>HSDPA-High</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    VBW 300 kHz    SWT 2.5 ms    Marker 1 [T1]    13.71 dBm</p> <p>Center 1.7526 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:01:20</p>

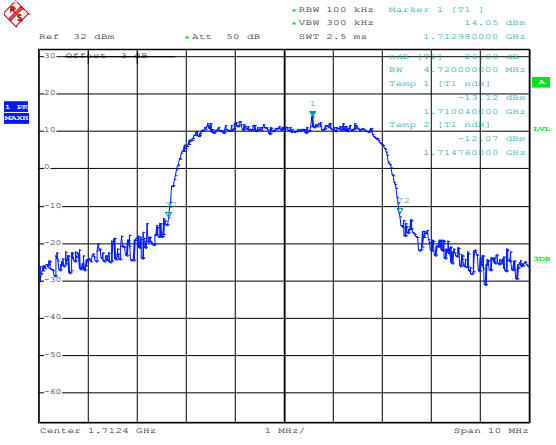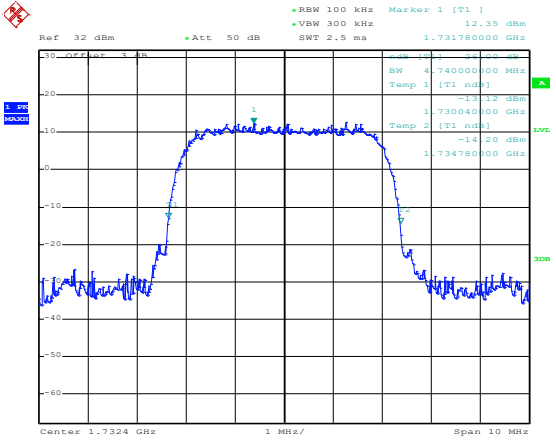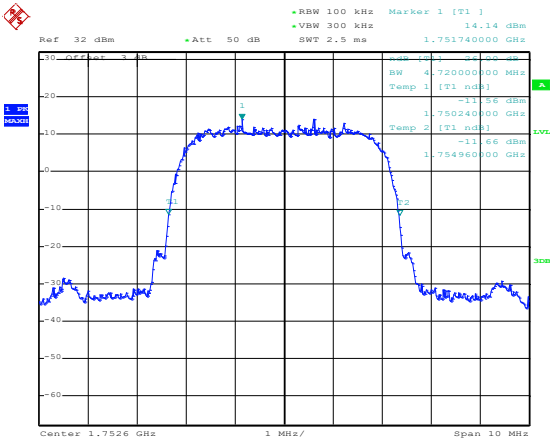
<p>HSUPA-Low</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    Marker 1 [T1]    14.05 dBm          VBW 300 kHz    1.712980000 GHz</p> <p>Temp 1 [T1 ndB]    -13.12 dBm          1.710040000 GHz          Temp 2 [T1 ndB]    -12.07 dBm          1.714760000 GHz</p> <p>Center 1.7124 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:18:52</p>
<p>HSUPA-Middle</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    Marker 1 [T1]    12.35 dBm          VBW 300 kHz    1.731780000 GHz</p> <p>Temp 1 [T1 ndB]    -13.12 dBm          1.730040000 GHz          Temp 2 [T1 ndB]    -14.20 dBm          1.734780000 GHz</p> <p>Center 1.7324 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:19:19</p>
<p>HSUPA-High</p>	 <p>Ref 32 dBm    Att 50 dB    RBW 100 kHz    Marker 1 [T1]    14.14 dBm          VBW 300 kHz    1.751740000 GHz</p> <p>Temp 1 [T1 ndB]    -11.56 dBm          1.750240000 GHz          Temp 2 [T1 ndB]    -11.66 dBm          1.754960000 GHz</p> <p>Center 1.7526 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 18:19:47</p>

WCDMA Band II-Low

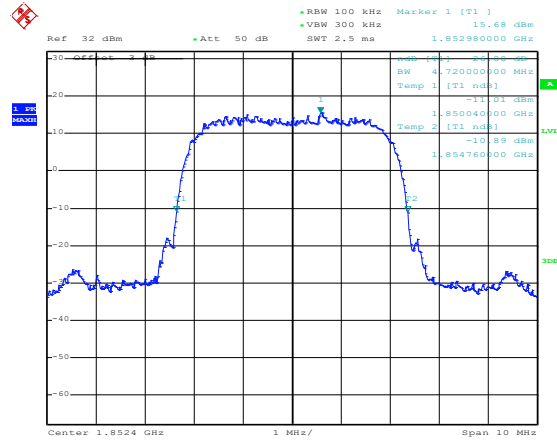


Date: 7.MAR.2023 13:42:32

WCDMA Band II-Middle

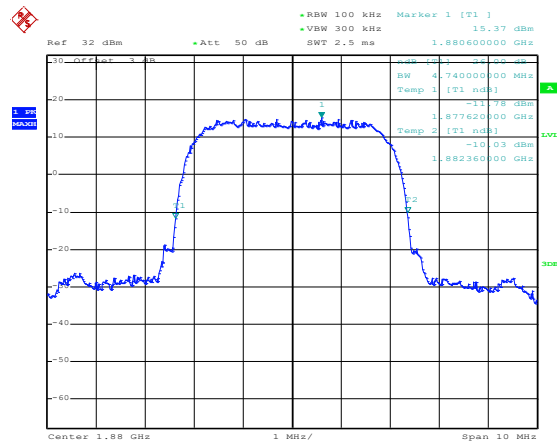

Date: 7.MAR.2023 13:43:21


WCDMA Band II-High

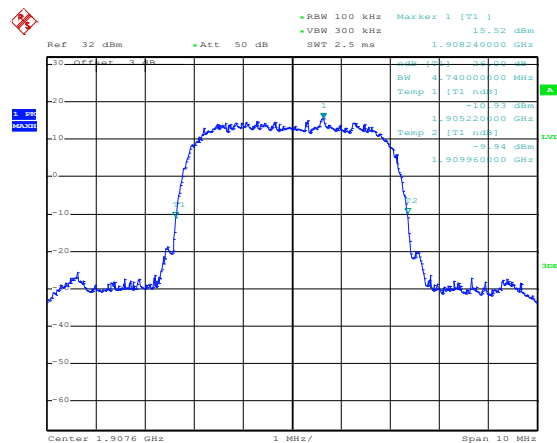

Date: 7.MAR.2023 13:44:09




HSDPA-Low

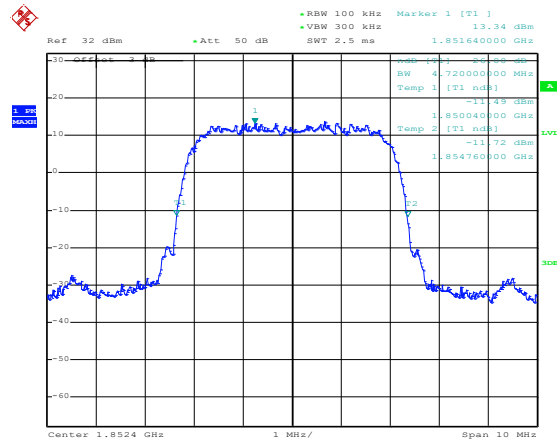


Date: 7.MAR.2023 14:01:00

HSDPA-Middle

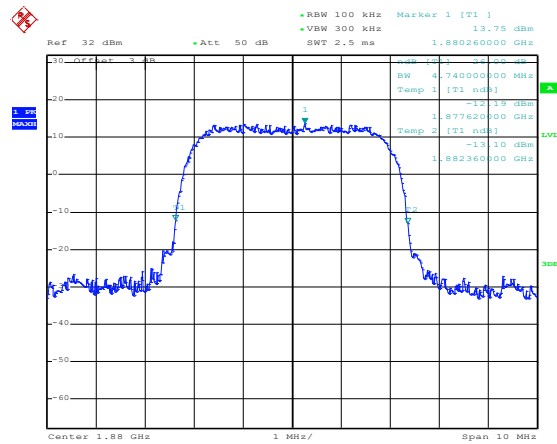

Date: 7.MAR.2023 14:01:36

HSDPA-High

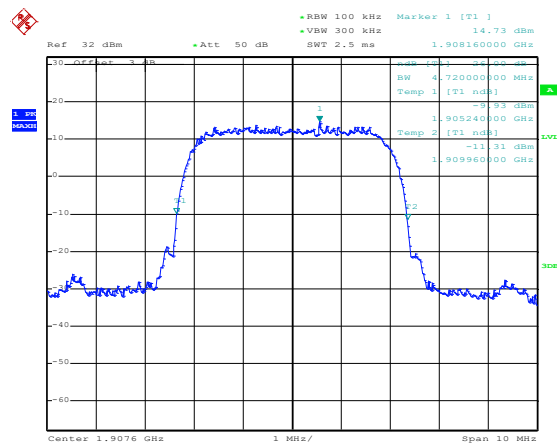



Date: 7.MAR.2023 14:02:19

<p>HSUPA-Low</p>	<p>Ref: 32 dBm    Att: 50 dB    RBW 100 kHz    Marker 1 [T1]    14.34 dBm          VBW 300 kHz    SWT 2.5 ms    1.851520000 GHz</p> <table border="1"> <tr> <td>Temp 1 [T1 ndB]</td> <td>-11.65 dBm</td> </tr> <tr> <td>Temp 2 [T1 ndB]</td> <td>-11.48 dBm</td> </tr> </table> <p>Center 1.8524 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 14:11:09</p>	Temp 1 [T1 ndB]	-11.65 dBm	Temp 2 [T1 ndB]	-11.48 dBm
Temp 1 [T1 ndB]	-11.65 dBm				
Temp 2 [T1 ndB]	-11.48 dBm				
<p>HSUPA-Middle</p>	<p>Ref: 32 dBm    Att: 50 dB    RBW 100 kHz    Marker 1 [T1]    13.06 dBm          VBW 300 kHz    SWT 2.5 ms    1.879560000 GHz</p> <table border="1"> <tr> <td>Temp 1 [T1 ndB]</td> <td>-12.85 dBm</td> </tr> <tr> <td>Temp 2 [T1 ndB]</td> <td>-12.22 dBm</td> </tr> </table> <p>Center 1.88 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 14:11:30</p>	Temp 1 [T1 ndB]	-12.85 dBm	Temp 2 [T1 ndB]	-12.22 dBm
Temp 1 [T1 ndB]	-12.85 dBm				
Temp 2 [T1 ndB]	-12.22 dBm				
<p>HSUPA-High</p>	<p>Ref: 32 dBm    Att: 50 dB    RBW 100 kHz    Marker 1 [T1]    13.35 dBm          VBW 300 kHz    SWT 2.5 ms    1.909180000 GHz</p> <table border="1"> <tr> <td>Temp 1 [T1 ndB]</td> <td>-13.63 dBm</td> </tr> <tr> <td>Temp 2 [T1 ndB]</td> <td>-13.35 dBm</td> </tr> </table> <p>Center 1.9076 GHz    1 MHz/    Span 10 MHz</p> <p>Date: 7.MAR.2023 14:11:57</p>	Temp 1 [T1 ndB]	-13.63 dBm	Temp 2 [T1 ndB]	-13.35 dBm
Temp 1 [T1 ndB]	-13.63 dBm				
Temp 2 [T1 ndB]	-13.35 dBm				


## APPENDIX D


### Out of Band Emissions at Antenna Terminal

GSM 850  
(GMSK)-Low

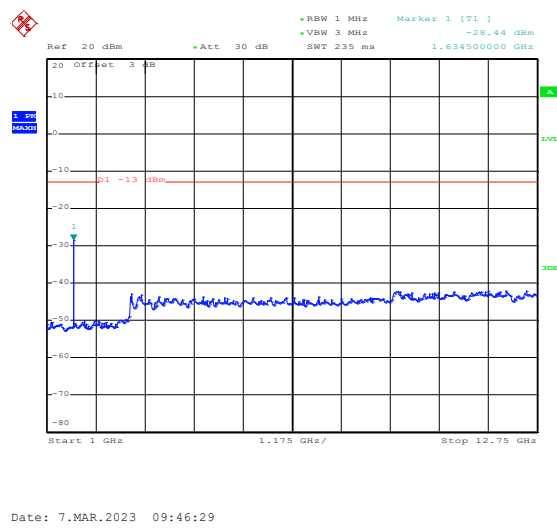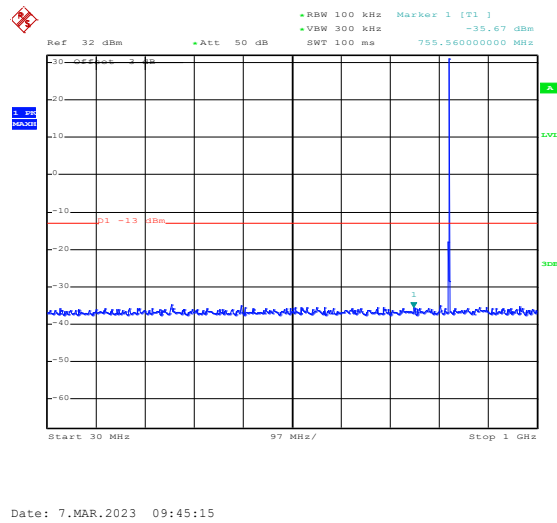


GSM 850  
(GMSK)-Middle

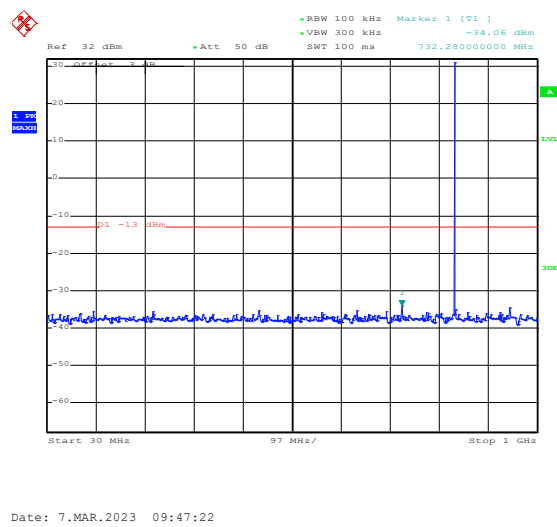


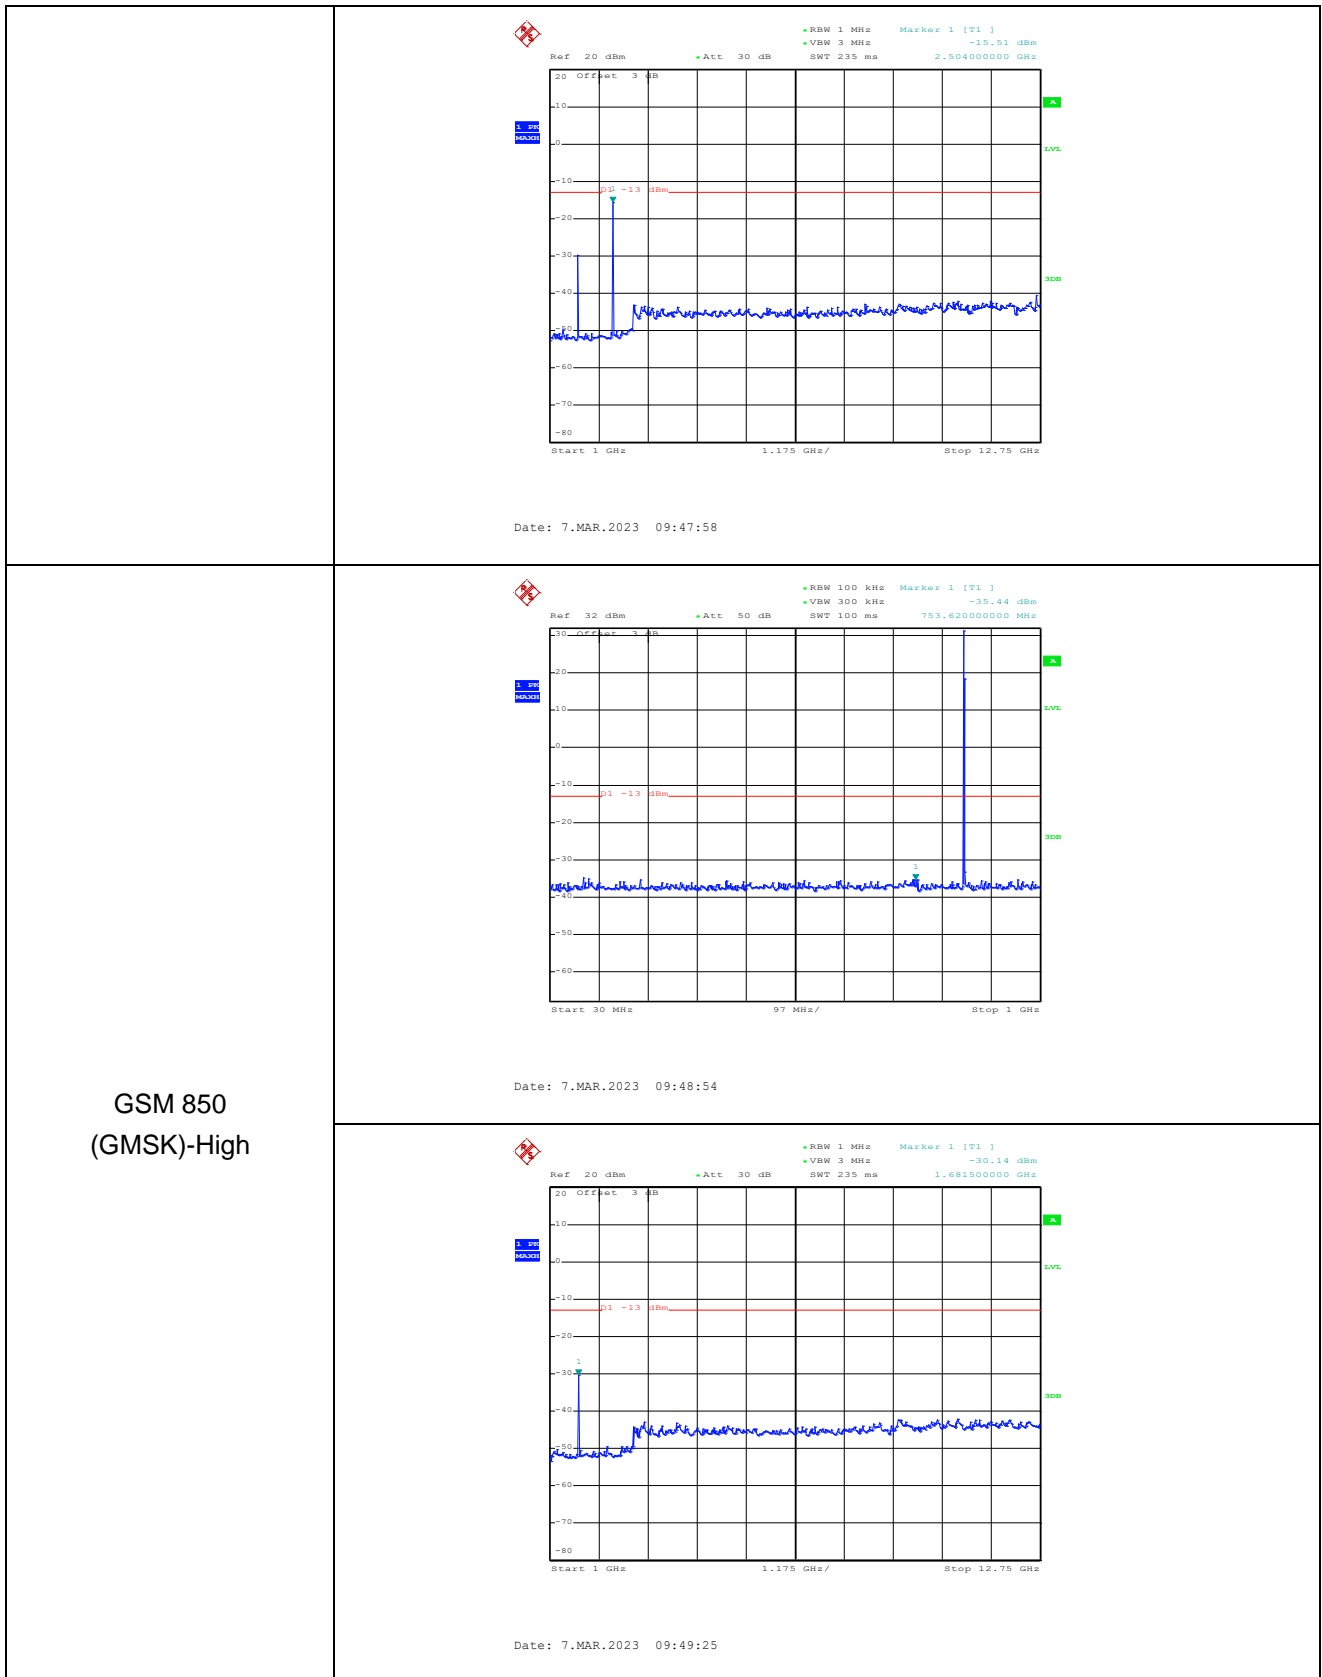

Bandedge

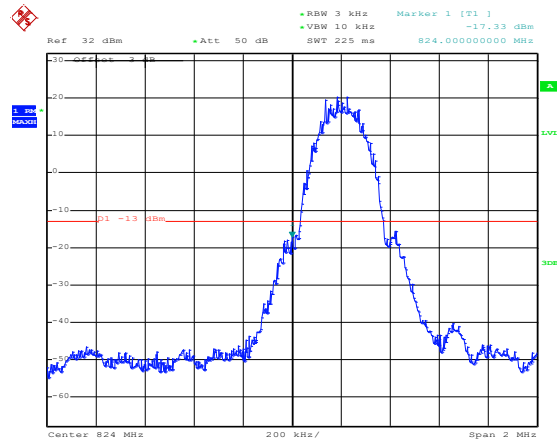


Date: 7.MAR.2023 10:30:40

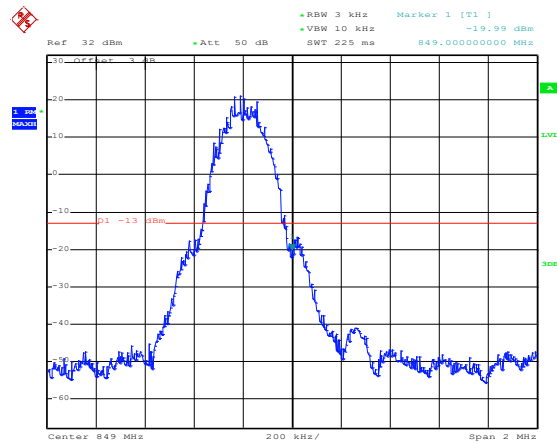


Date: 7.MAR.2023 10:31:14

GPRS850  
(GMSK,1Slot)-Low

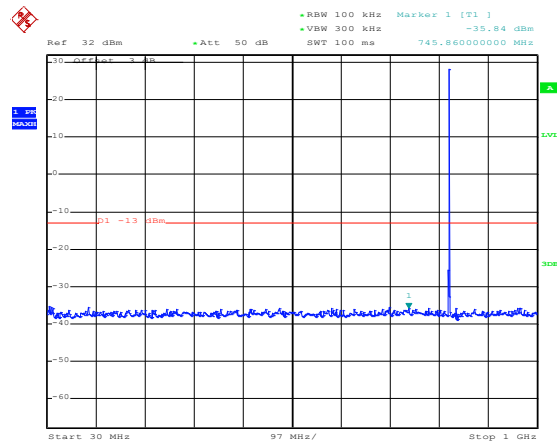


Date: 7.MAR.2023 09:52:47

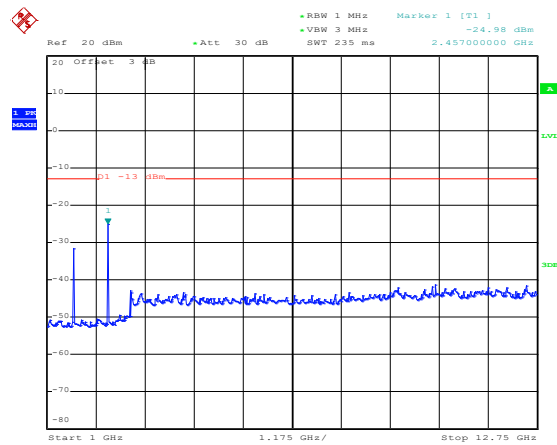

Date: 7.MAR.2023 09:53:15


GPRS850  
(GMSK,1Slot)-Middle

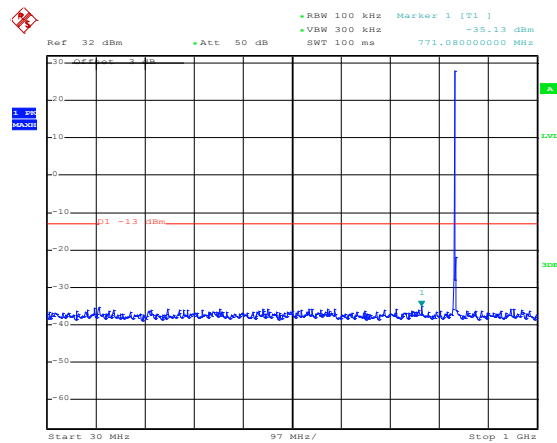


Date: 7.MAR.2023 09:53:56

	<p>Date: 7.MAR.2023 09:54:25</p>
<p>GPRS850 (GMSK)-High</p>	<p>Date: 7.MAR.2023 09:55:21</p>
	<p>Date: 7.MAR.2023 09:55:47</p>

Bandedge

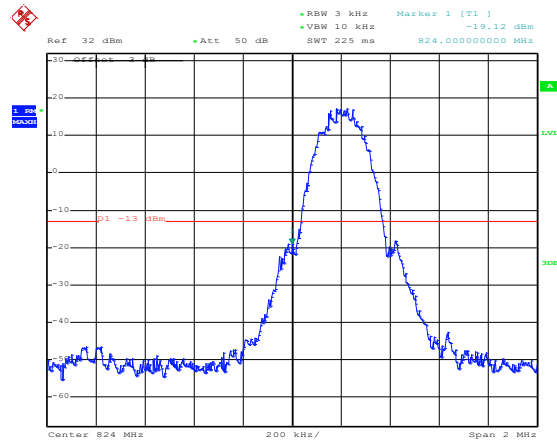




Date: 7.MAR.2023 10:03:22

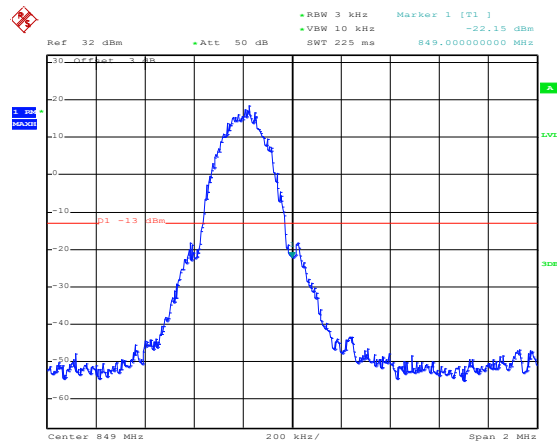


Date: 7.MAR.2023 10:04:00




PCS1900  
(GMSK)-Low

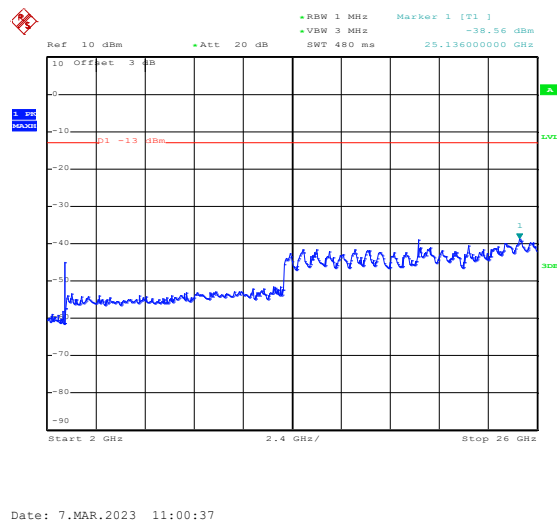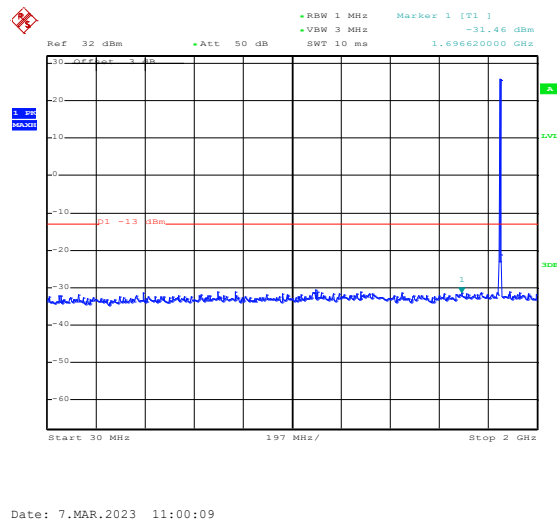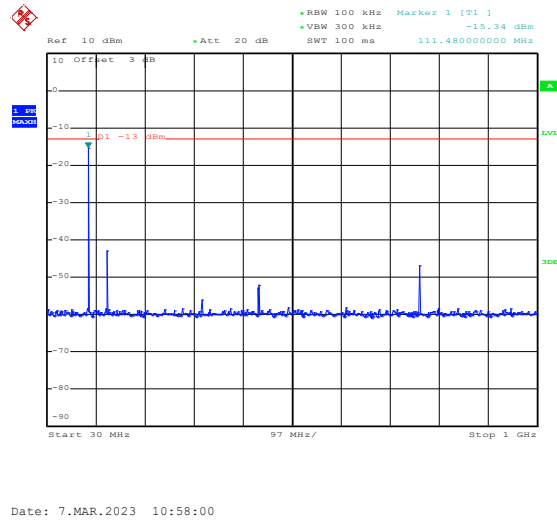


PCS1900  
(GMSK)-Middle

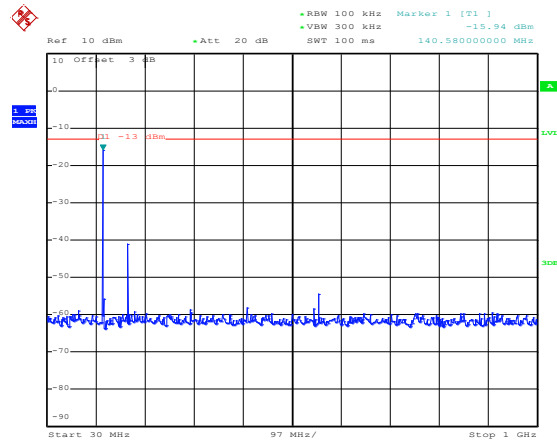

Date: 7.MAR.2023 13:12:12

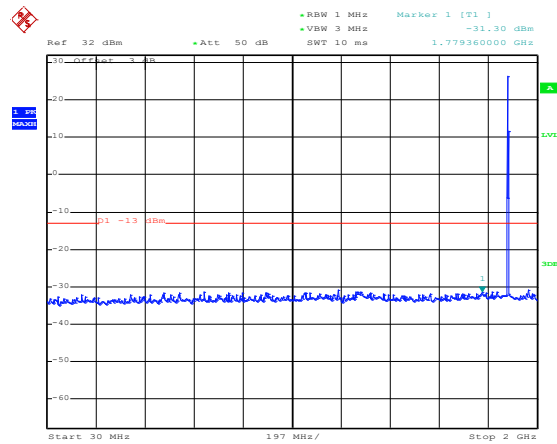


Date: 7.MAR.2023 11:03:14

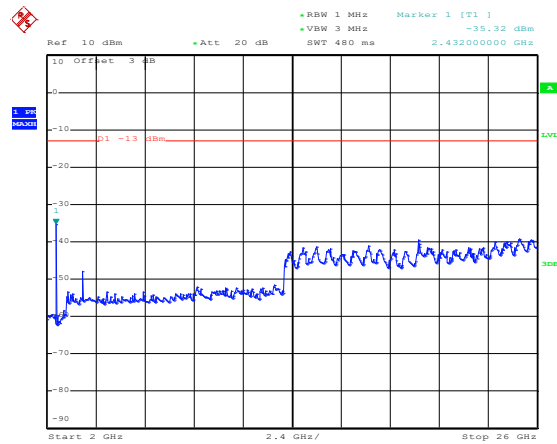


Date: 7.MAR.2023 11:03:36


PCS1900  
(GMSK)-High

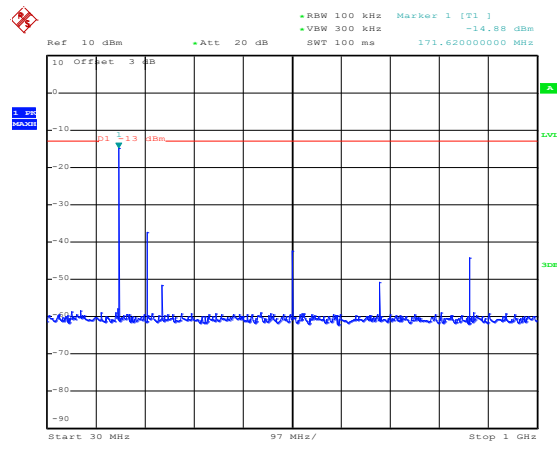

Date: 7.MAR.2023 13:12:45

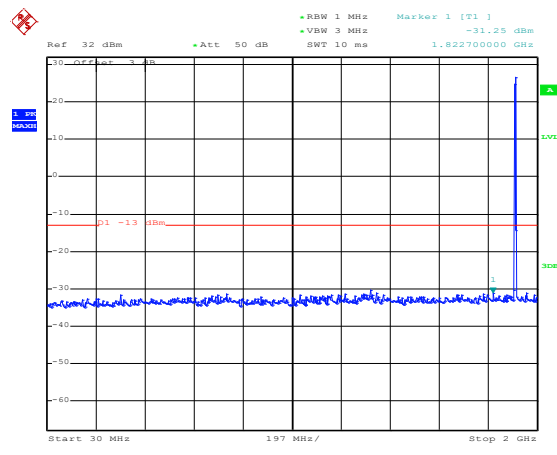


Date: 7.MAR.2023 11:04:37

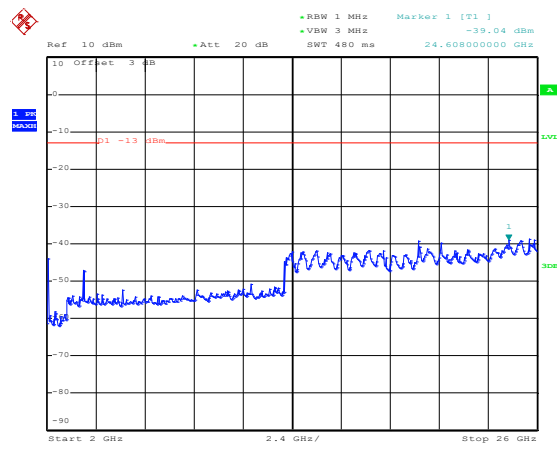


Date: 7.MAR.2023 11:05:00

Bandedge

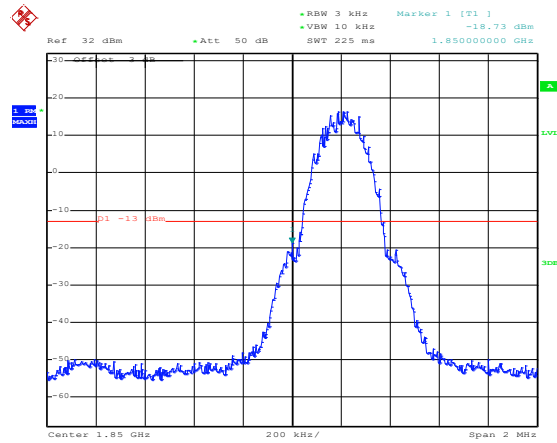


Date: 7.MAR.2023 10:52:21

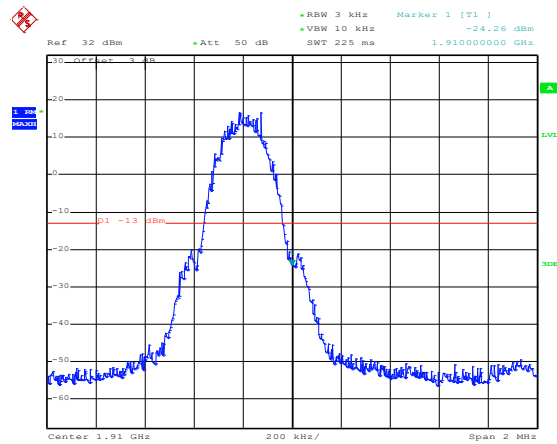


Date: 7.MAR.2023 10:53:24


GPRS1900  
(GMSK,1Slot)-Low

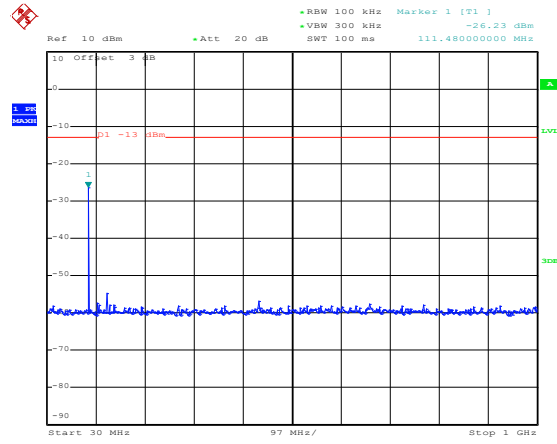

Date: 7.MAR.2023 13:17:16

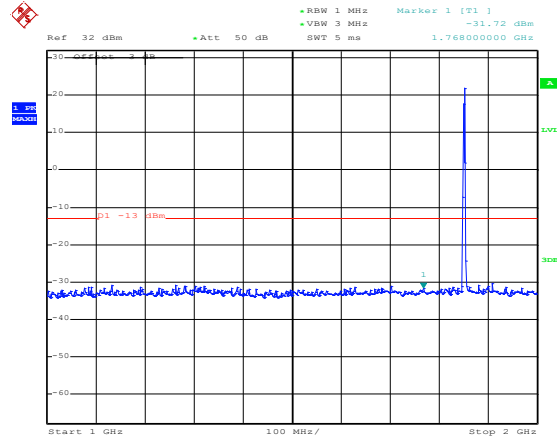


Date: 7.MAR.2023 13:18:40

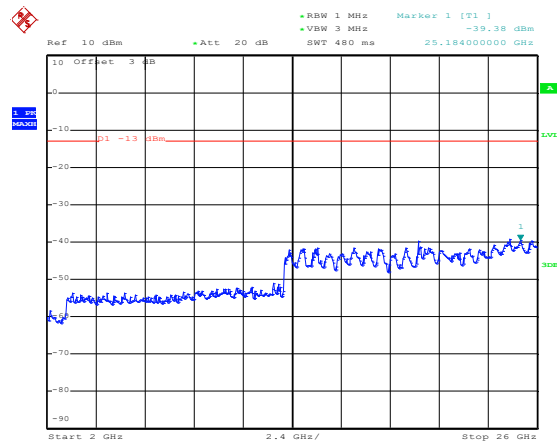


Date: 7.MAR.2023 13:19:58


GPRS1900  
(GMSK,1Slot)-Middle

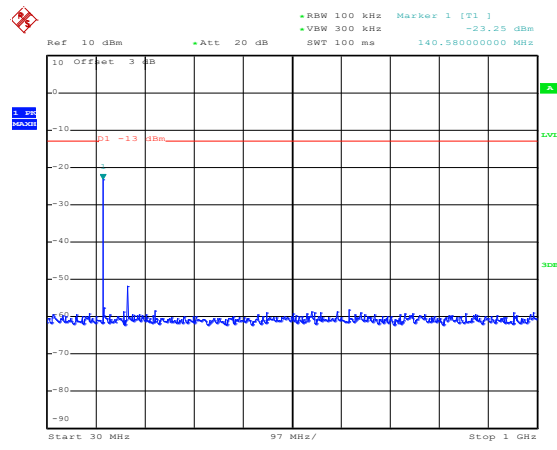

Date: 7.MAR.2023 13:17:37

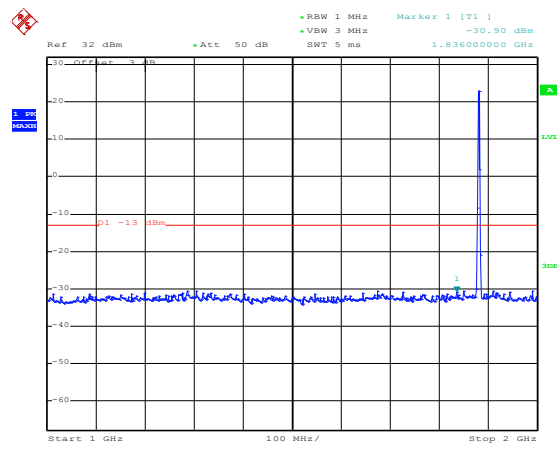


Date: 7.MAR.2023 13:19:08

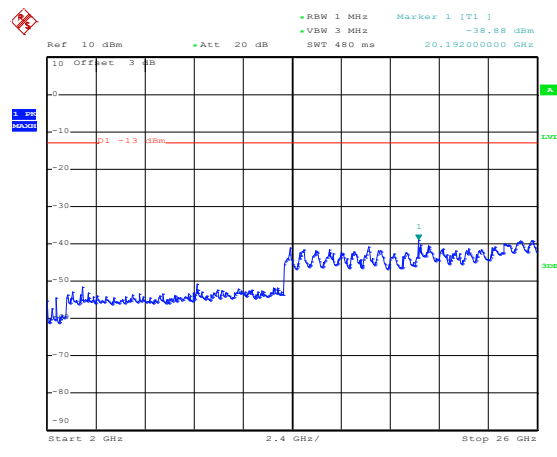


Date: 7.MAR.2023 13:20:20


GPRS1900  
(GMSK,1Slot)-High

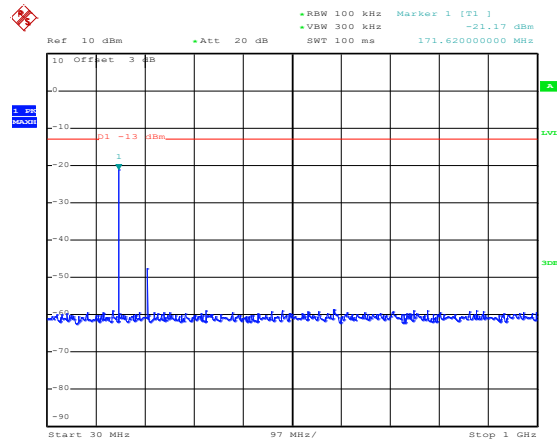

Date: 7.MAR.2023 13:17:50

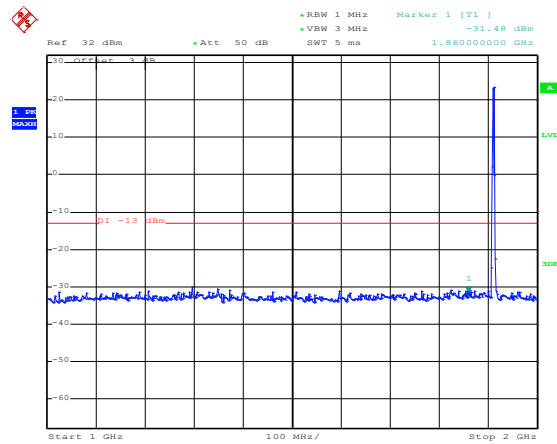


Date: 7.MAR.2023 13:19:28

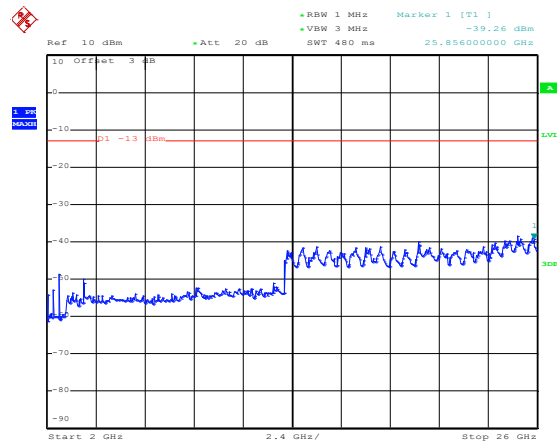


Date: 7.MAR.2023 13:20:32

Bandedge

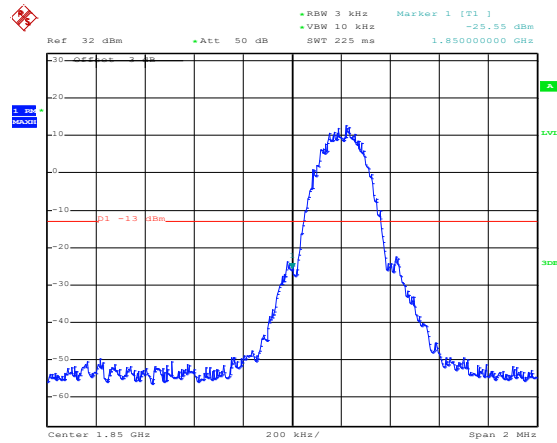



Date: 7.MAR.2023 13:29:04

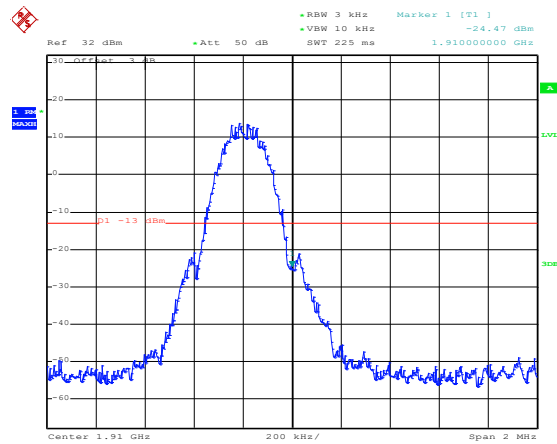


Date: 7.MAR.2023 13:29:41






WCDMA Band V-Low

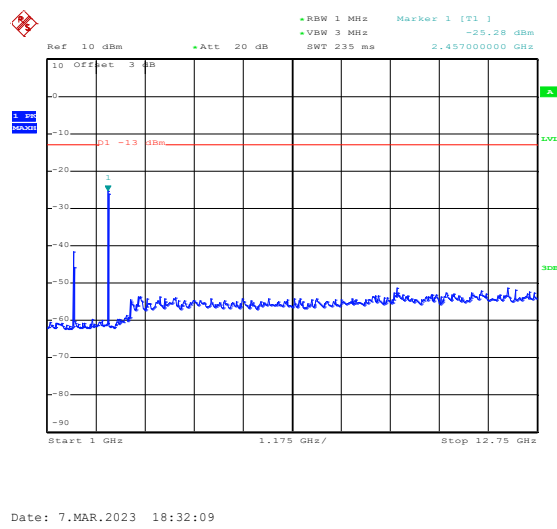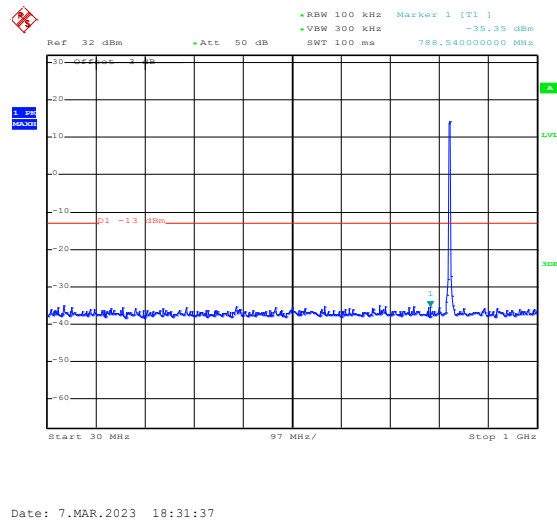


WCDMA Band V-Middle

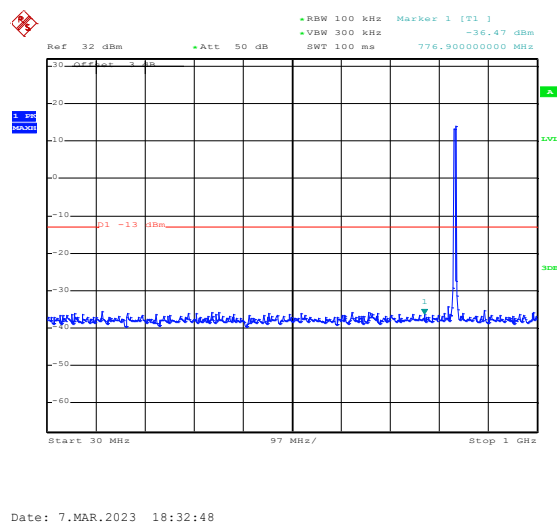


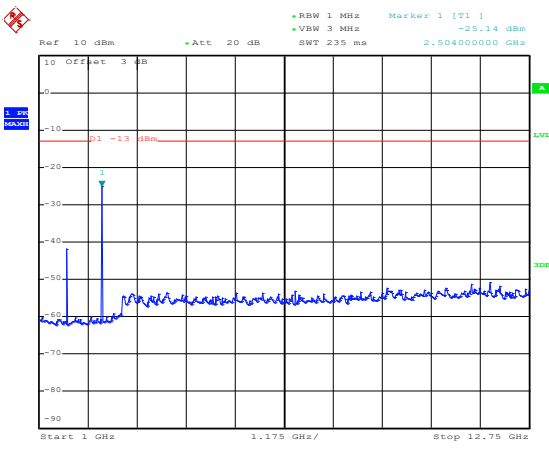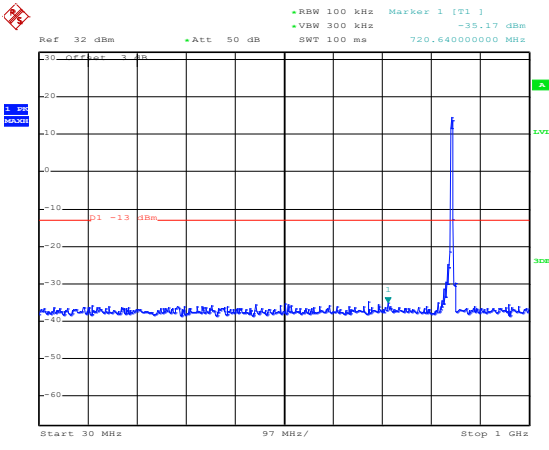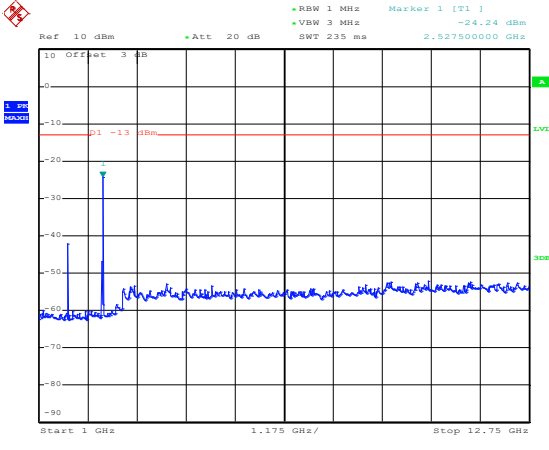	 <p>Date: 7.MAR.2023 18:33:50</p>
<p>WCDMA Band V-High</p>	 <p>Date: 7.MAR.2023 18:33:17</p>
	 <p>Date: 7.MAR.2023 18:34:09</p>

Bandedge

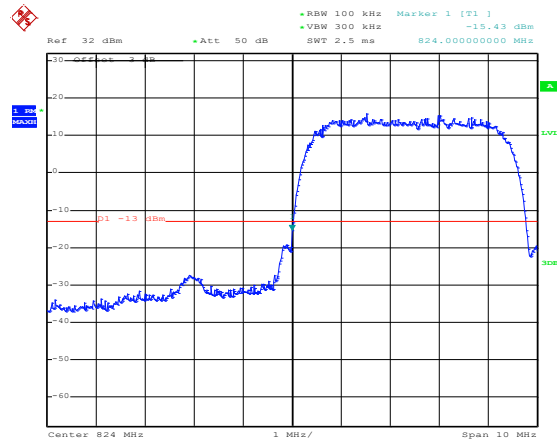


Date: 7.MAR.2023 18:25:28

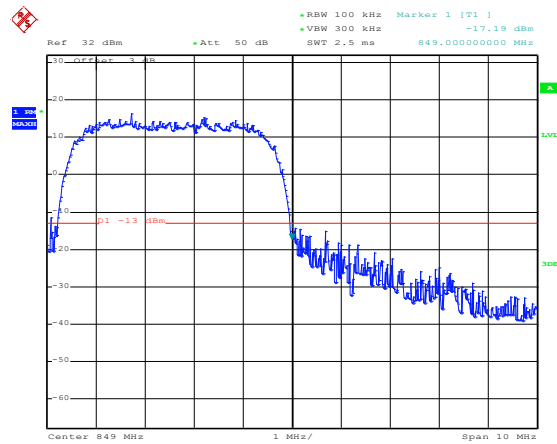


Date: 7.MAR.2023 18:26:26

HSDPA Band V-Low

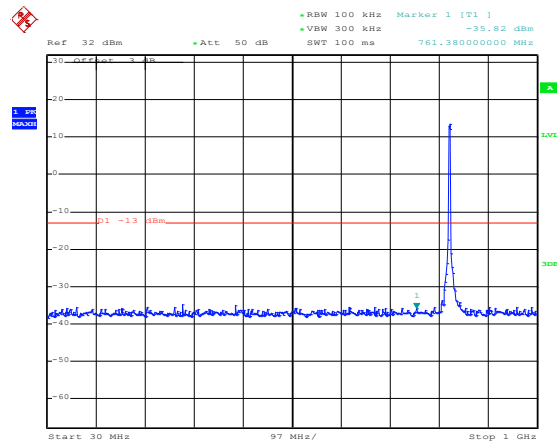


Date: 7.MAR.2023 18:41:01



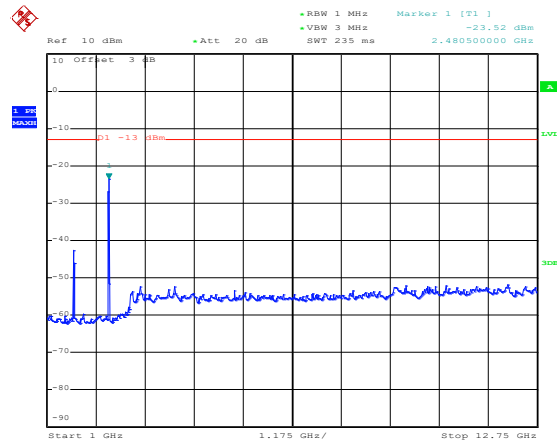


Date: 7.MAR.2023 18:42:43


HSDPA Band V-Middle

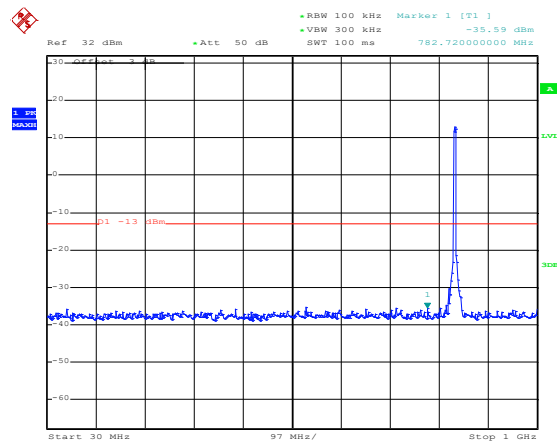


Date: 7.MAR.2023 18:41:30

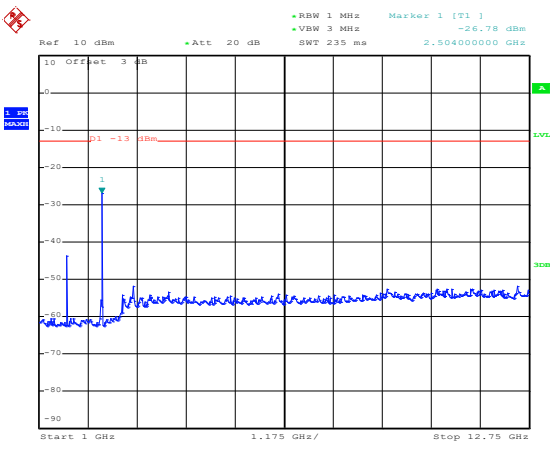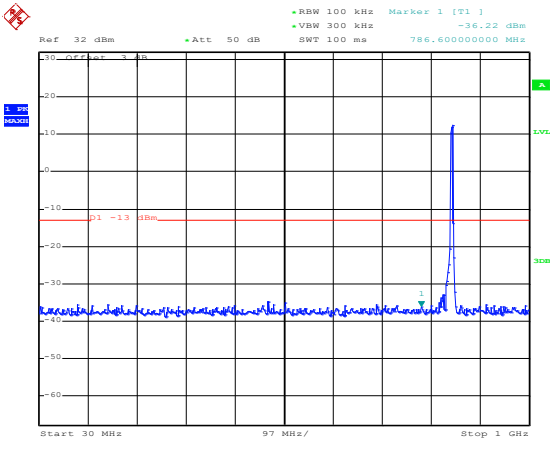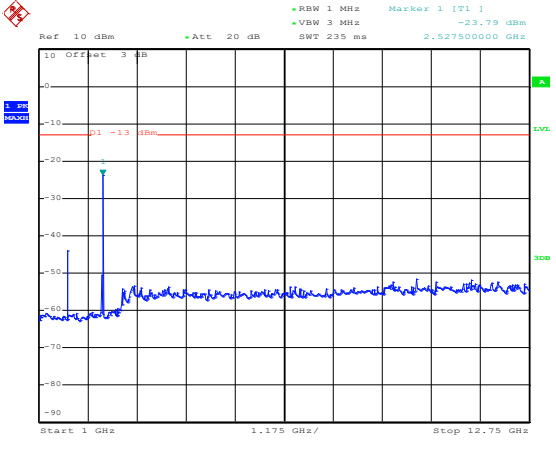	 <p>Date: 7.MAR.2023 18:42:58</p>
<p>HSDPA Band V-High</p>	 <p>Date: 7.MAR.2023 18:41:54</p>
	 <p>Date: 7.MAR.2023 18:43:16</p>

Bandedge

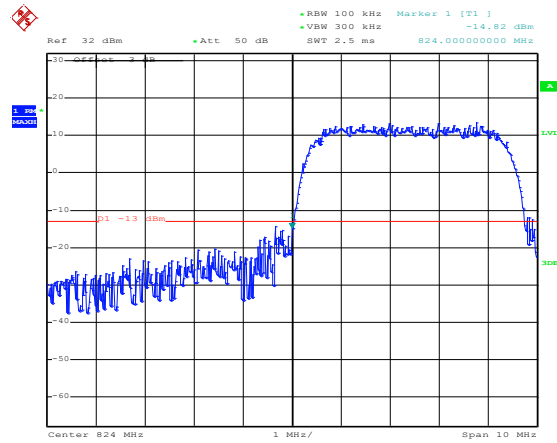


Date: 7.MAR.2023 18:51:51

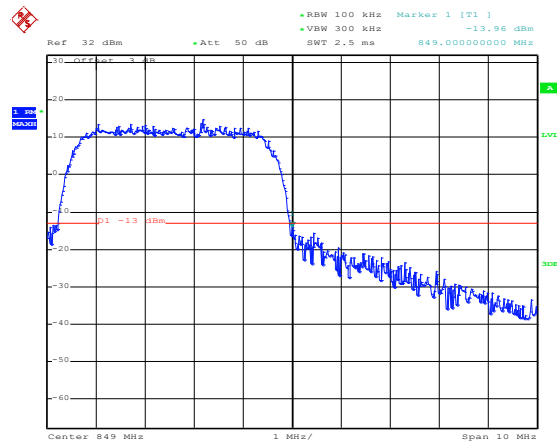


Date: 7.MAR.2023 18:51:17

HSUPA Band V-Low

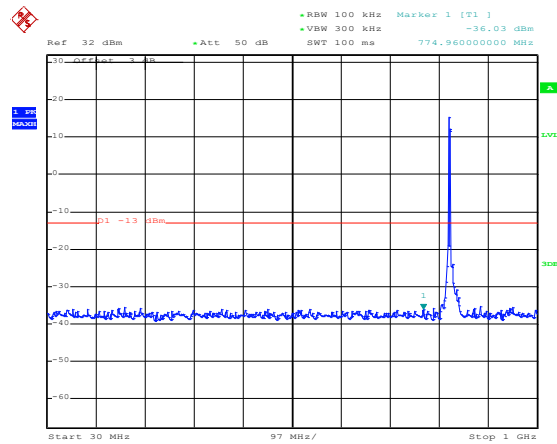


Date: 7.MAR.2023 19:05:43



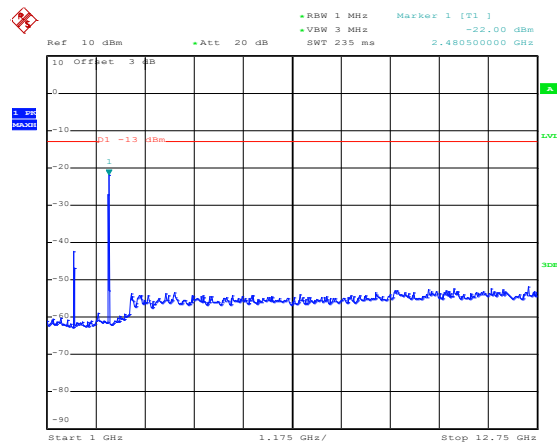


Date: 7.MAR.2023 19:07:06

HSUPA Band V-Middle

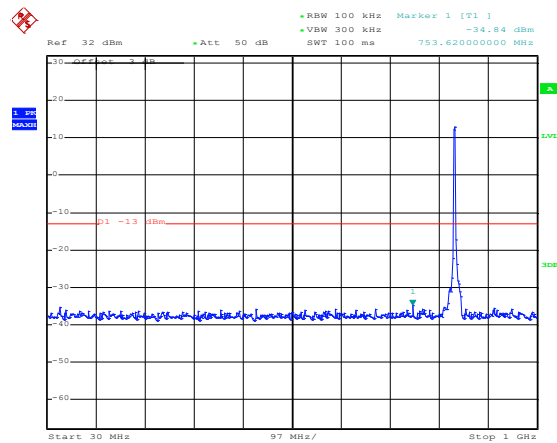


Date: 7.MAR.2023 19:06:09

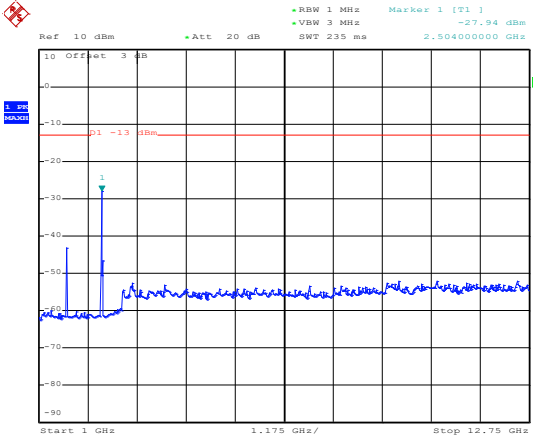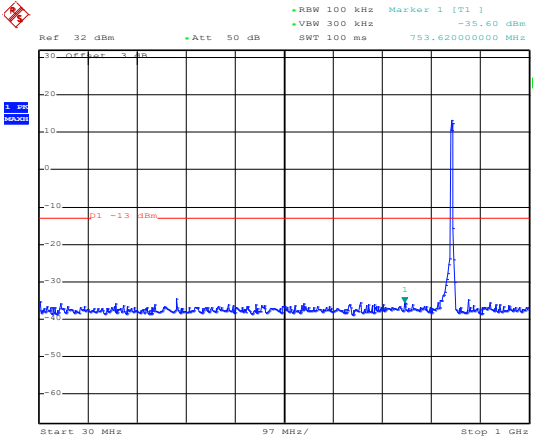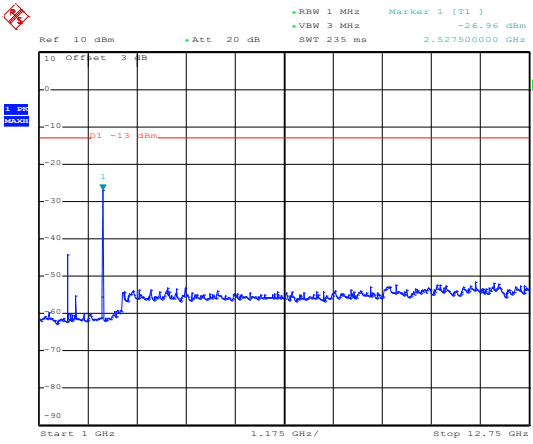
	 <p>Date: 7.MAR.2023 19:07:28</p>
<p>HSUPA Band V-High</p>	 <p>Date: 7.MAR.2023 19:06:31</p>
	 <p>Date: 7.MAR.2023 19:07:54</p>



Bandedge

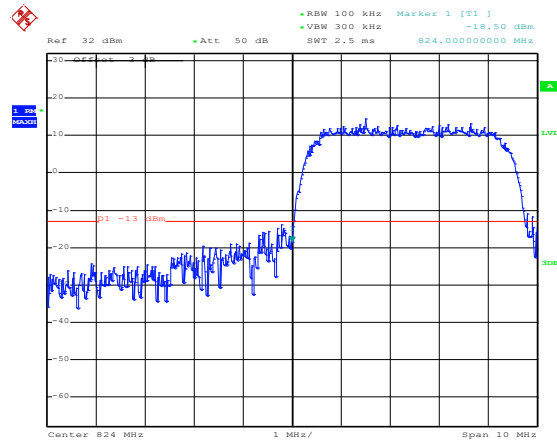


Date: 7.MAR.2023 18:53:41

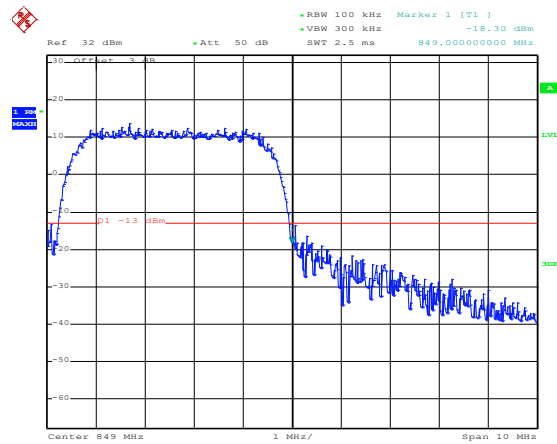


Date: 7.MAR.2023 18:54:10


WCDMA Band IV-Low

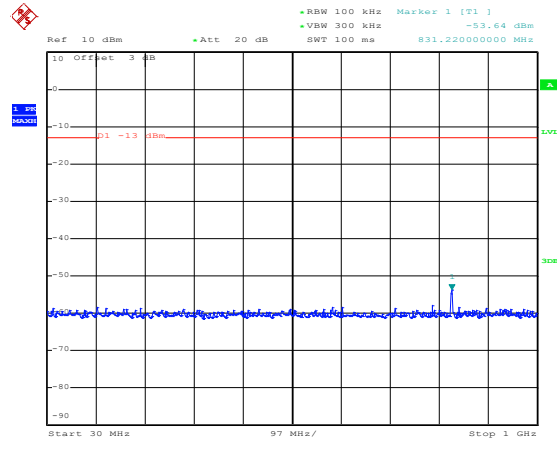

Date: 7.MAR.2023 17:40:07

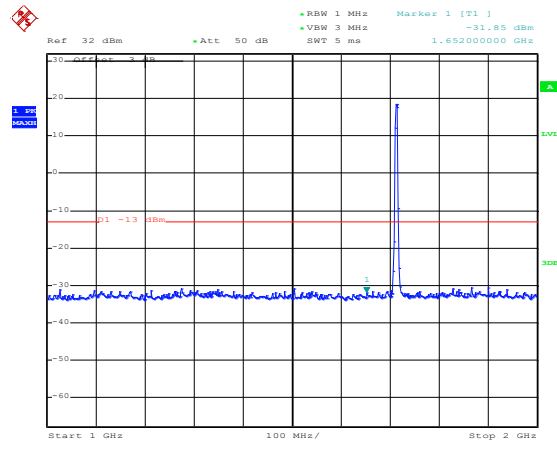


Date: 7.MAR.2023 17:42:42

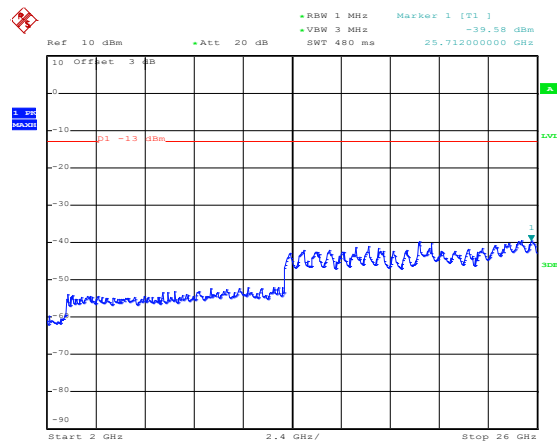


Date: 7.MAR.2023 17:43:57


WCDMA Band IV-Middle

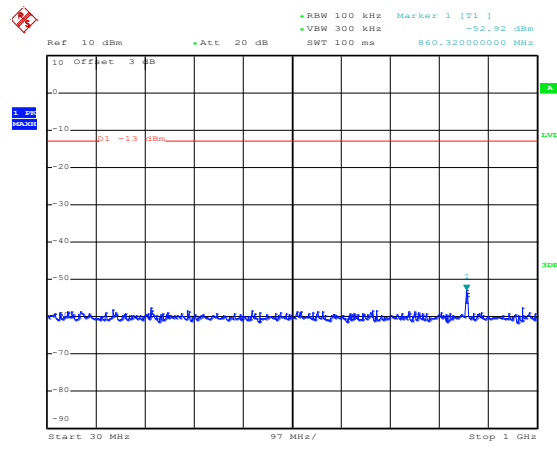

Date: 7.MAR.2023 17:40:49

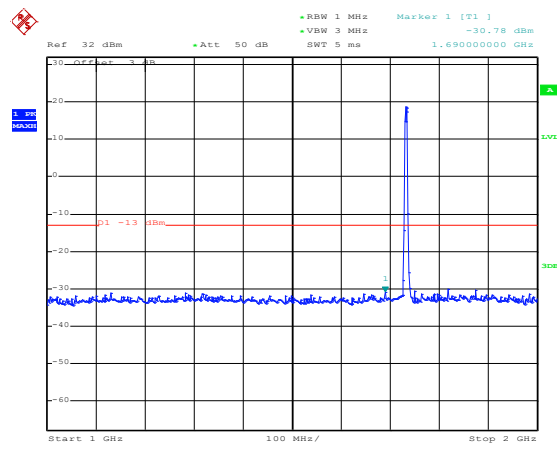


Date: 7.MAR.2023 17:43:05

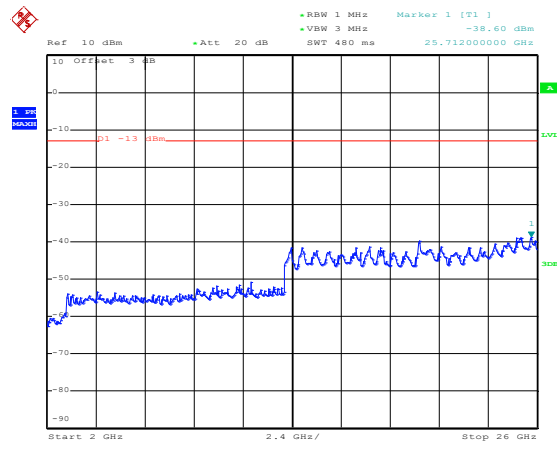


Date: 7.MAR.2023 17:44:16


WCDMA Band IV-High

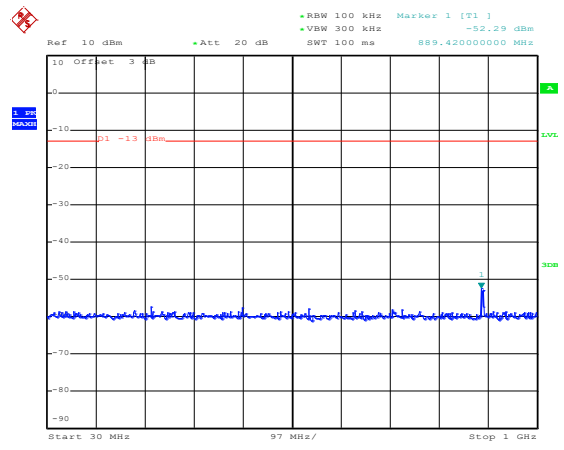

Date: 7.MAR.2023 17:41:40

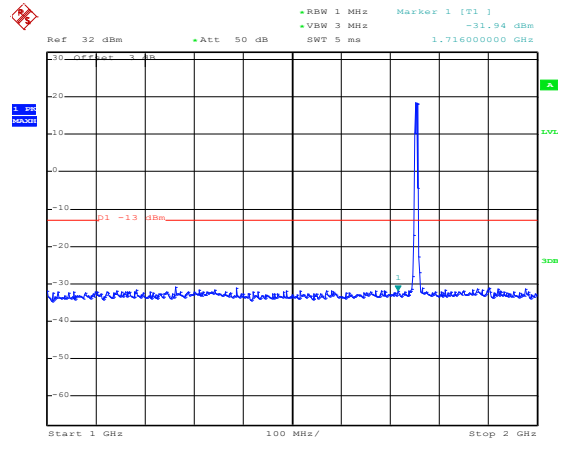


Date: 7.MAR.2023 17:43:24

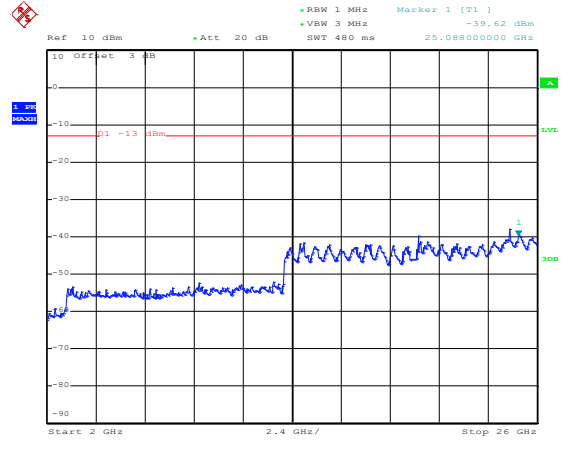


Date: 7.MAR.2023 17:44:31

Bandedge

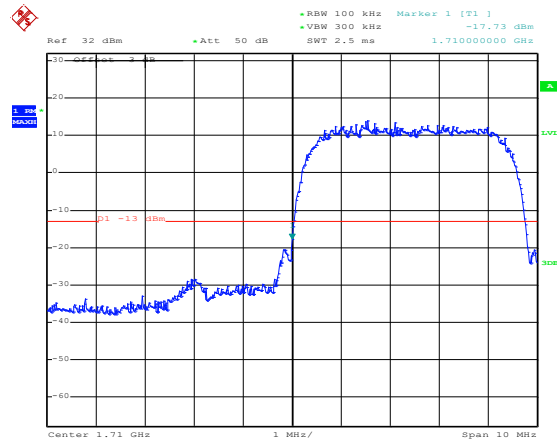


Date: 7.MAR.2023 17:51:33

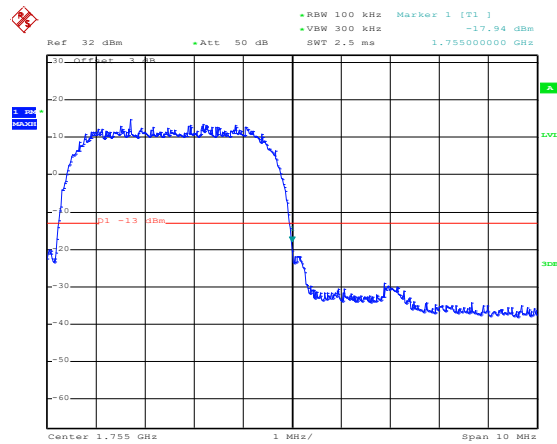


Date: 7.MAR.2023 17:52:08


HSDPA Band IV-Low

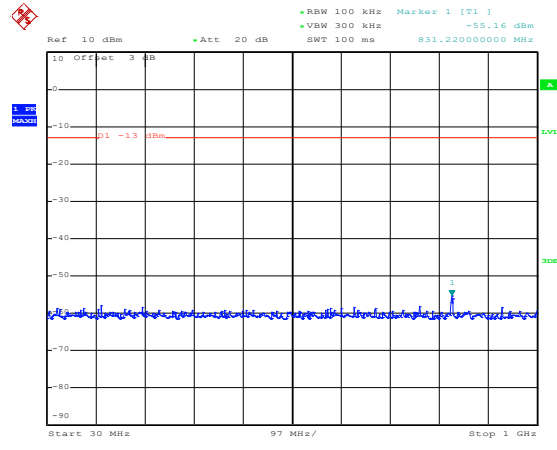


Date: 7.MAR.2023 18:02:37

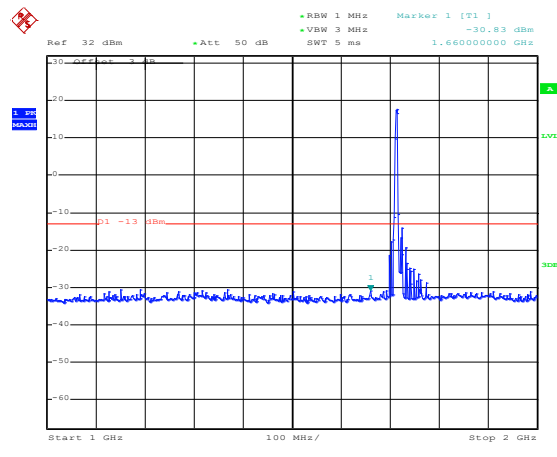


Date: 7.MAR.2023 18:03:59

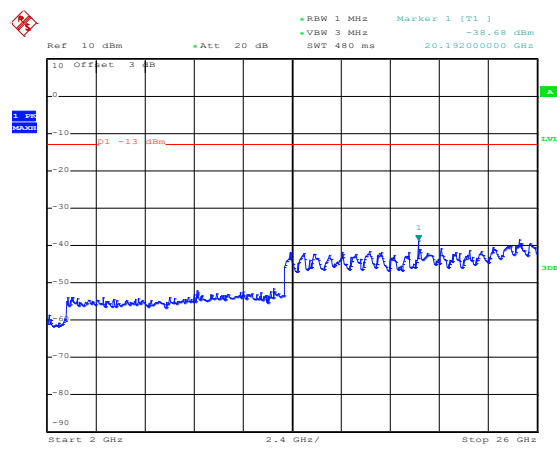


Date: 7.MAR.2023 18:05:28

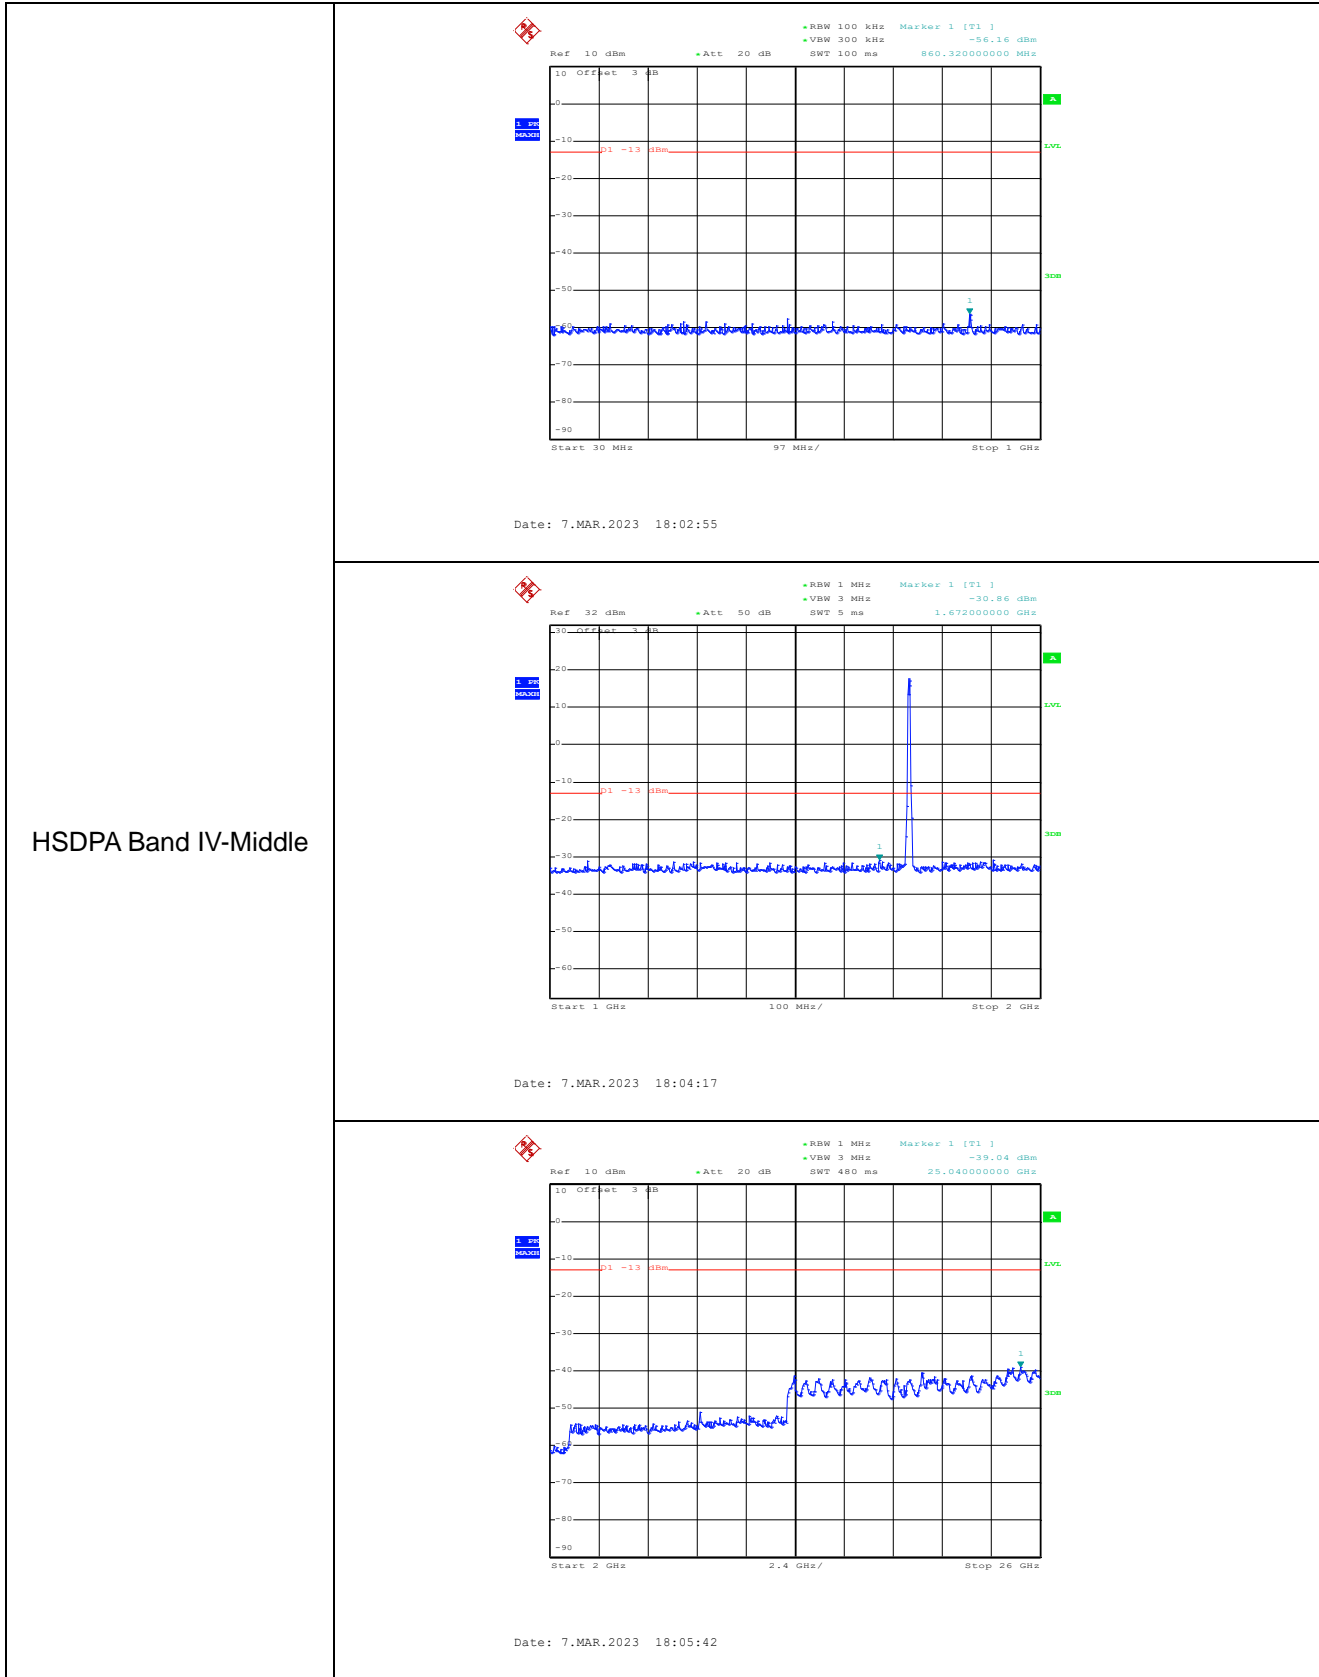


HSDPA Band IV-High

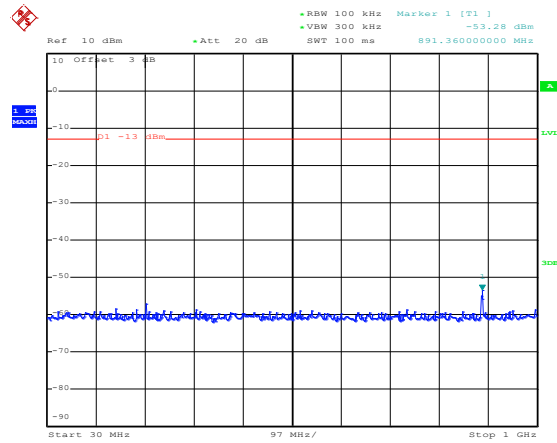

Date: 7.MAR.2023 18:03:15

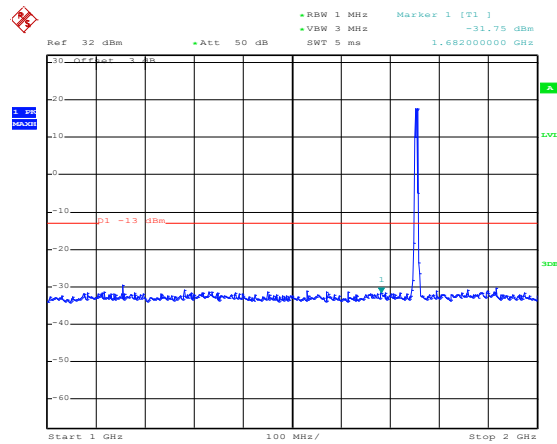


Date: 7.MAR.2023 18:04:43

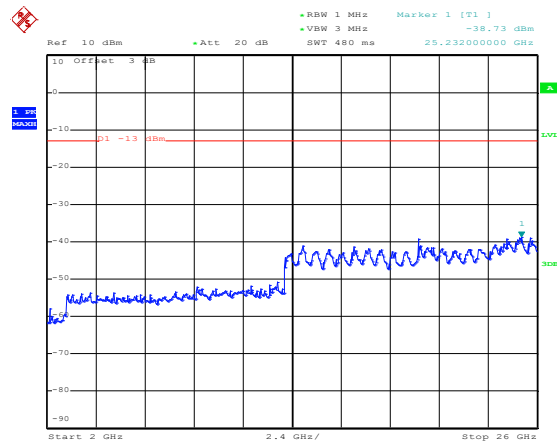


Date: 7.MAR.2023 18:06:16



Bandedge

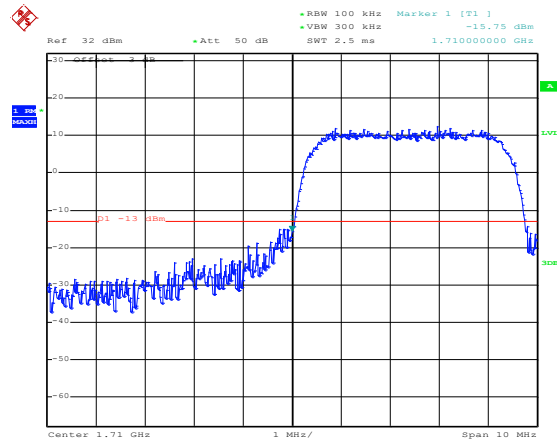


Date: 7.MAR.2023 17:55:40

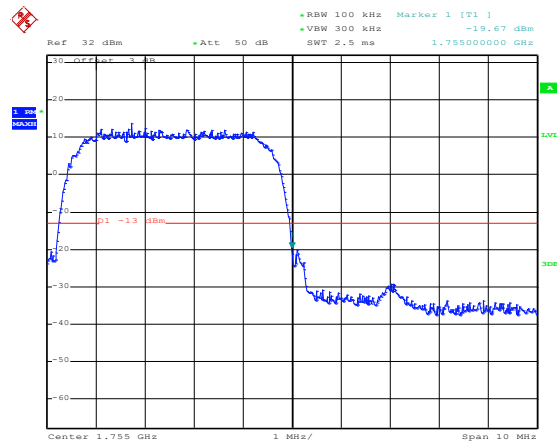


Date: 7.MAR.2023 17:54:08


HSUPA Band IV-Low

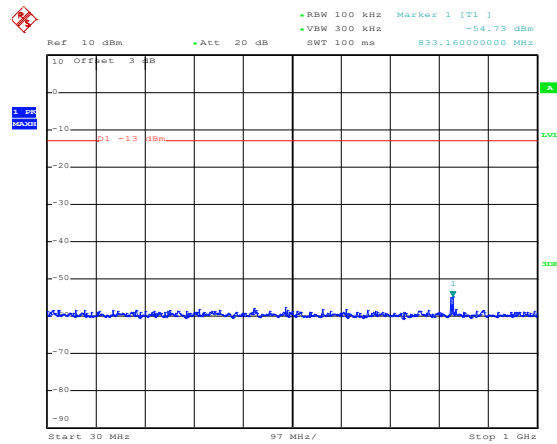


Date: 7.MAR.2023 18:10:32

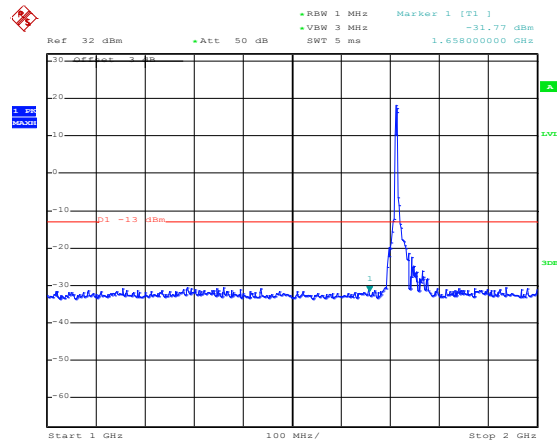


Date: 7.MAR.2023 18:12:31

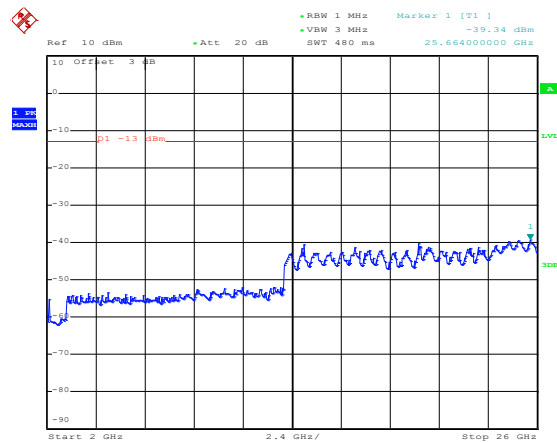


Date: 7.MAR.2023 18:13:49

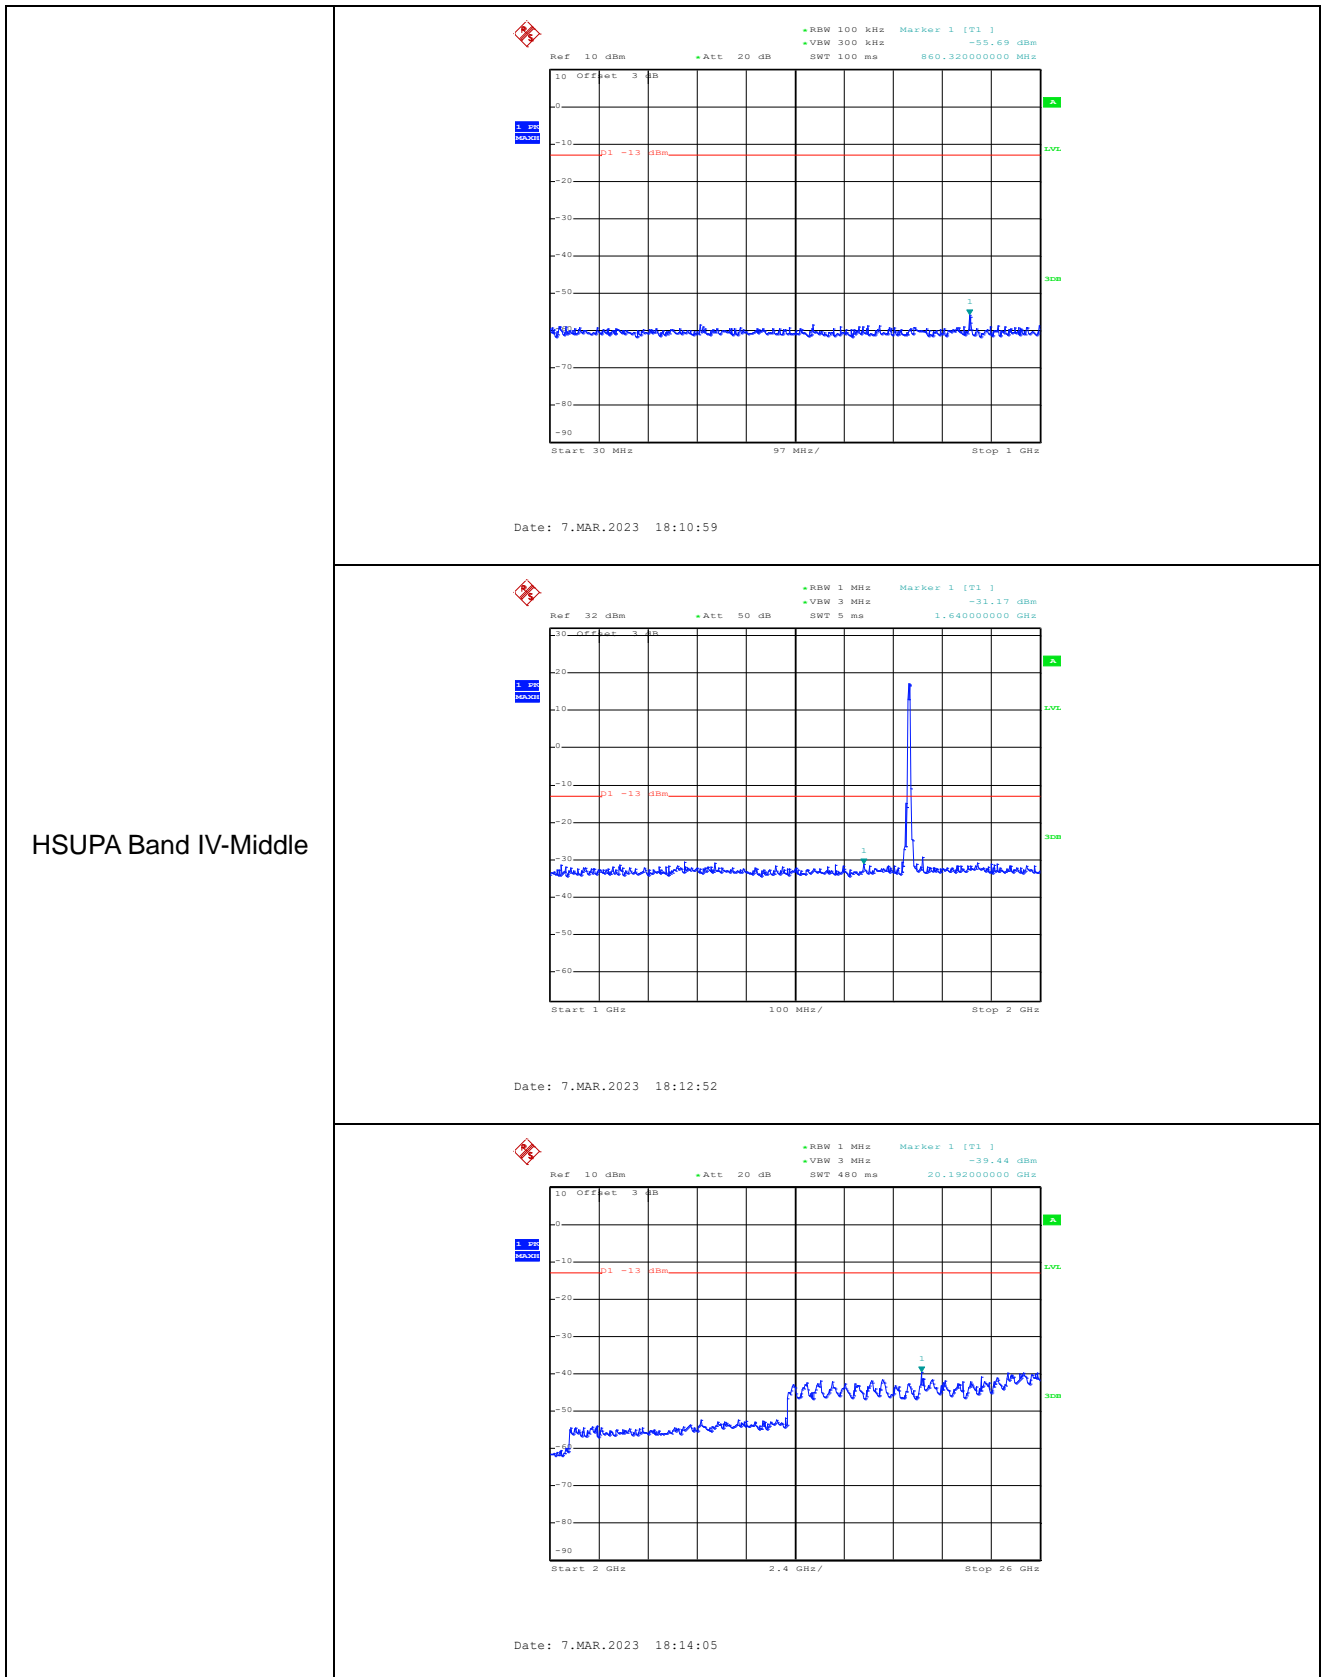


HSUPA Band IV-High

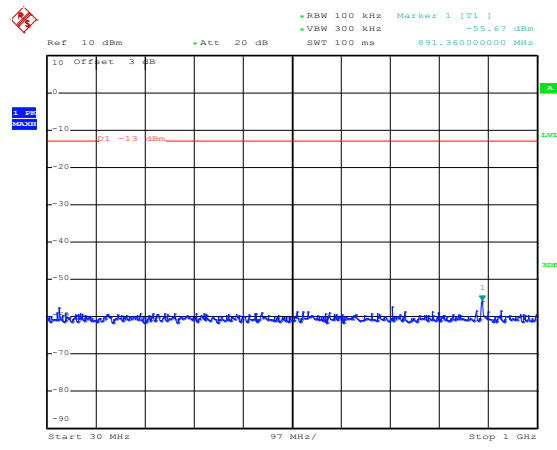

Date: 7.MAR.2023 18:11:32

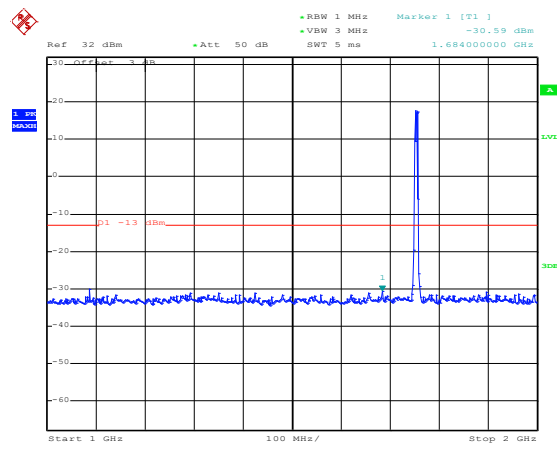


Date: 7.MAR.2023 18:13:11

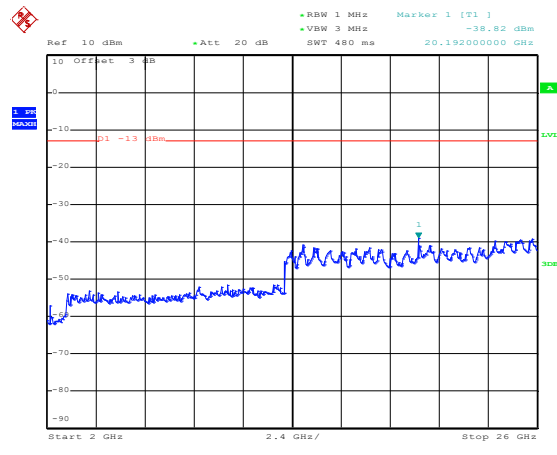


Date: 7.MAR.2023 18:14:24

Bandedge

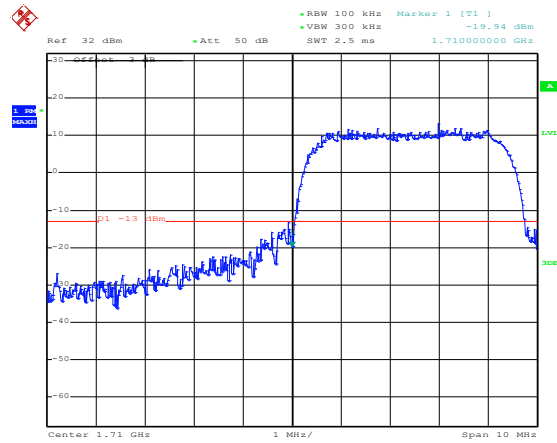


Date: 7.MAR.2023 18:21:39

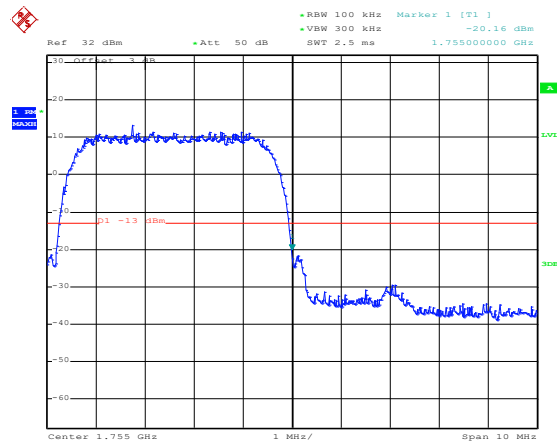


Date: 7.MAR.2023 18:20:56


WCDMA Band II-Low

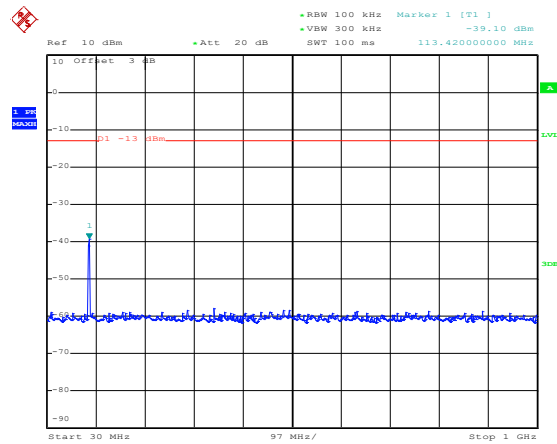

Date: 7.MAR.2023 13:45:42

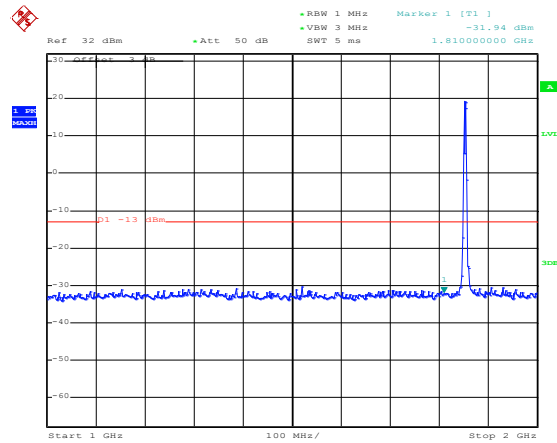


Date: 7.MAR.2023 13:47:16

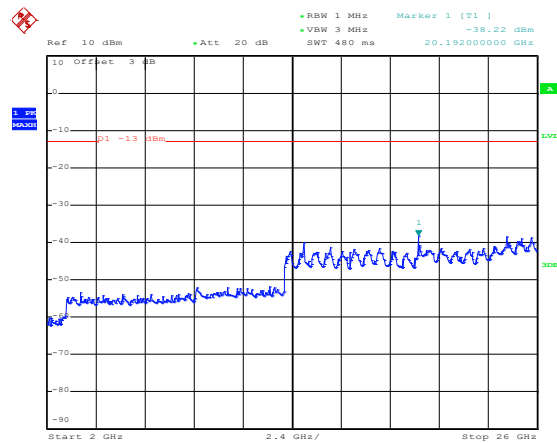


Date: 7.MAR.2023 13:48:46


WCDMA Band II-Low

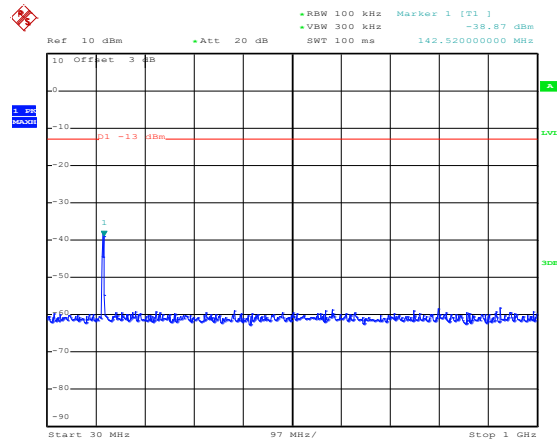

Date: 7.MAR.2023 13:46:06

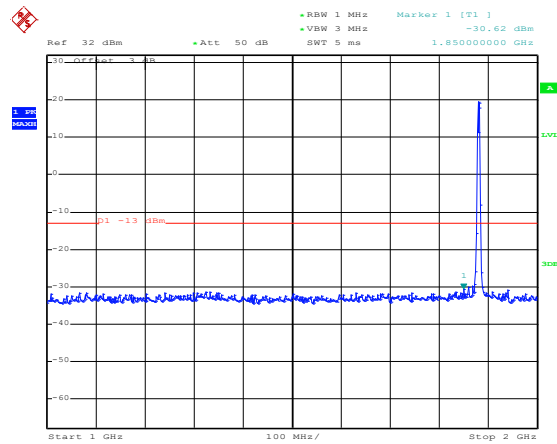


Date: 7.MAR.2023 13:47:50

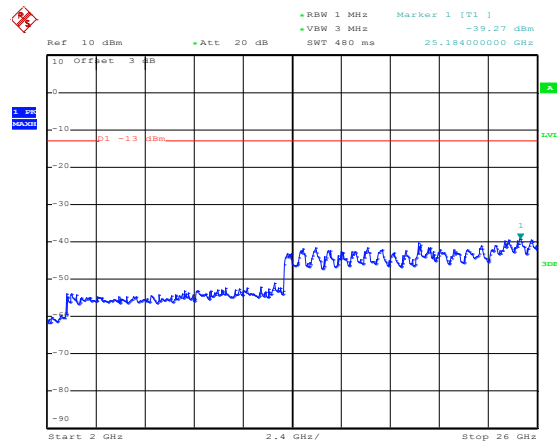


Date: 7.MAR.2023 13:49:03


WCDMA Band II-Low

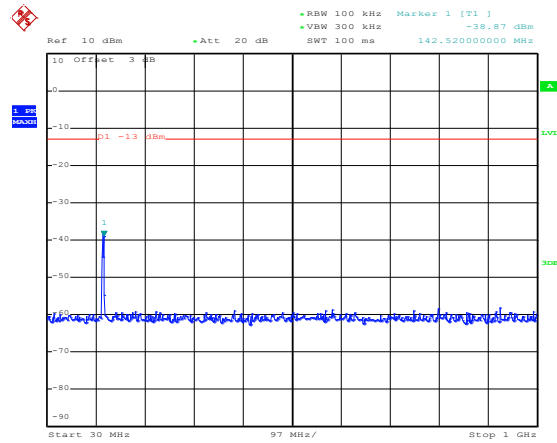

Date: 7.MAR.2023 13:46:06

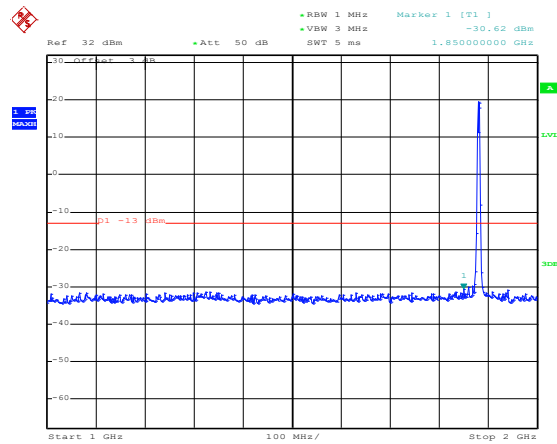


Date: 7.MAR.2023 13:47:50

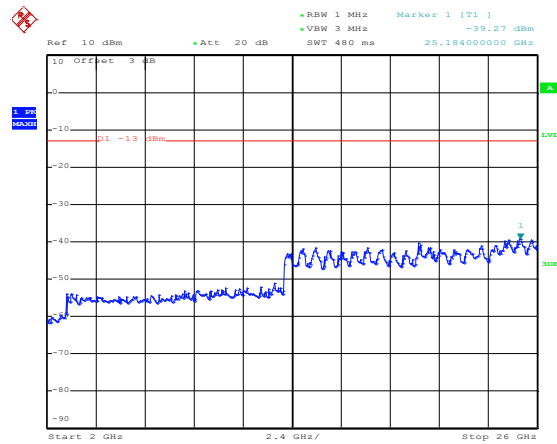


Date: 7.MAR.2023 13:49:03



Bandedge

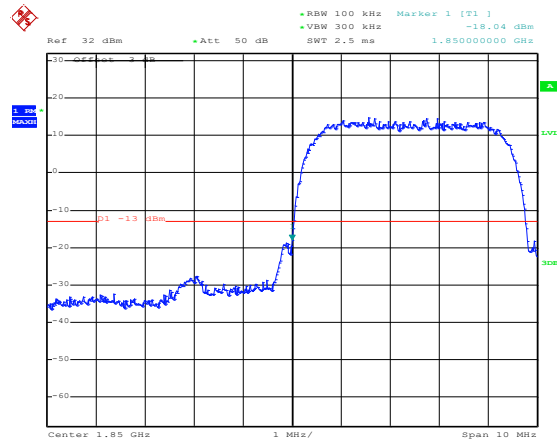


Date: 7.MAR.2023 13:36:16

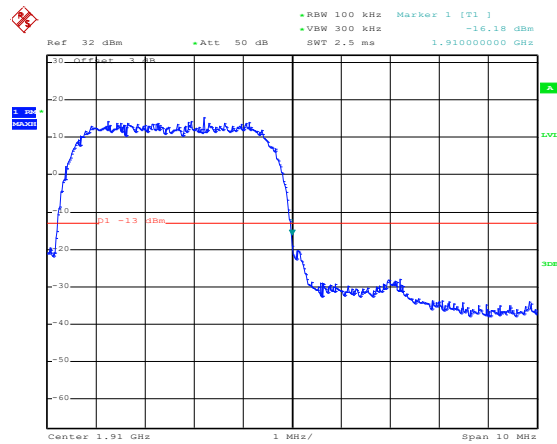


Date: 7.MAR.2023 13:37:03


HSDPA Band II-Low

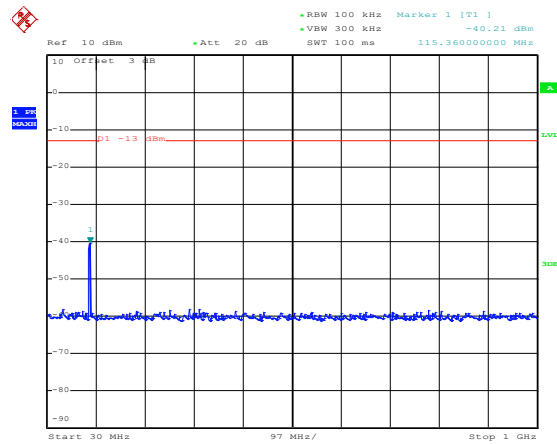

Date: 7.MAR.2023 13:53:10

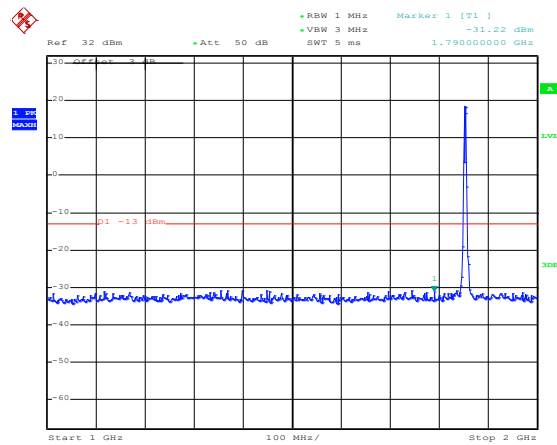


Date: 7.MAR.2023 13:54:24

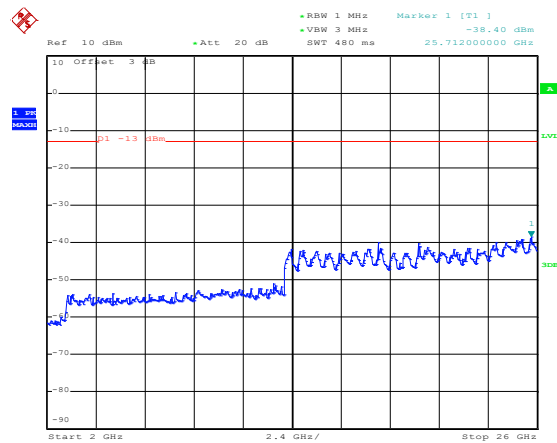


Date: 7.MAR.2023 13:55:53


HSDPA Band II-Low

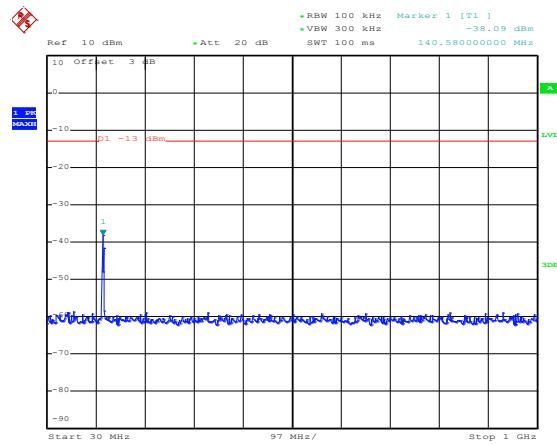

Date: 7.MAR.2023 13:53:31

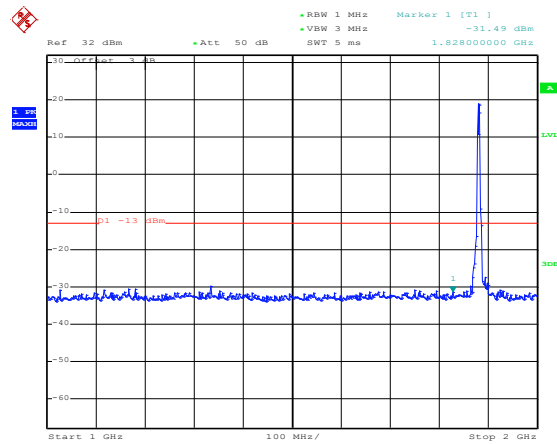


Date: 7.MAR.2023 13:54:50

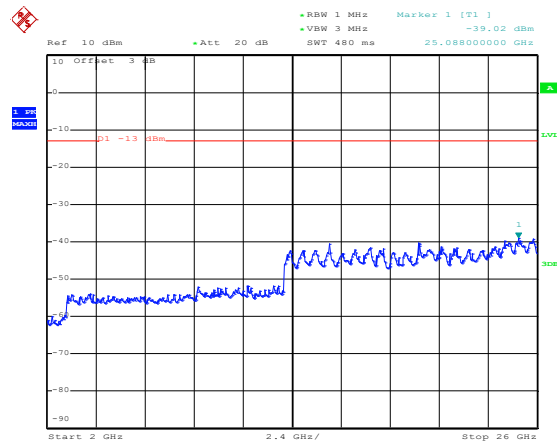


Date: 7.MAR.2023 13:56:11


HSDPA Band II-Low

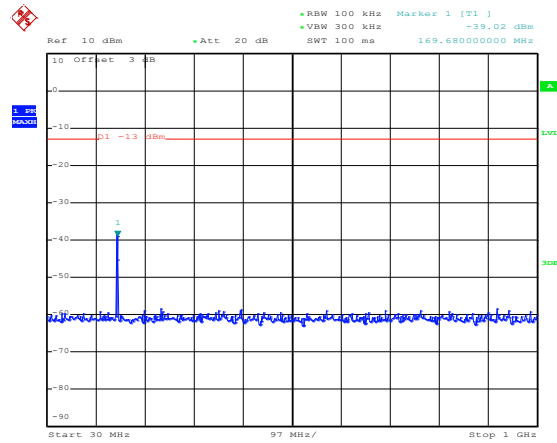

Date: 7.MAR.2023 13:53:47

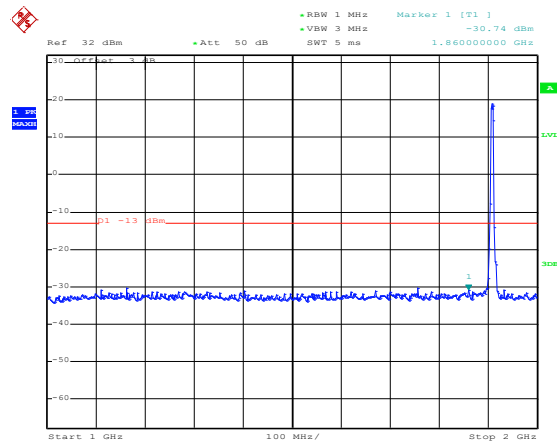


Date: 7.MAR.2023 13:55:18

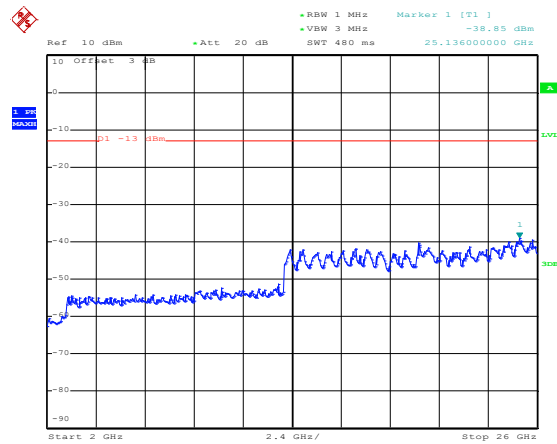


Date: 7.MAR.2023 13:56:23

Bandedge

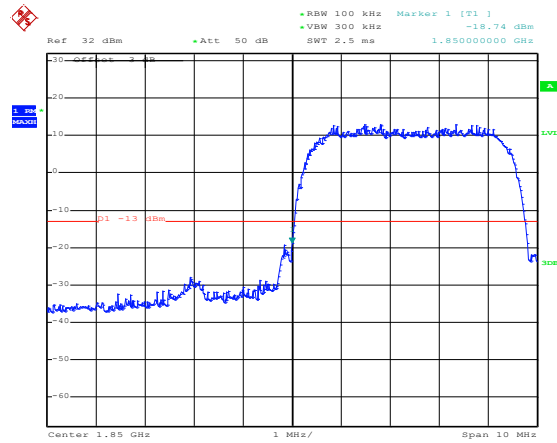


Date: 7.MAR.2023 14:04:22

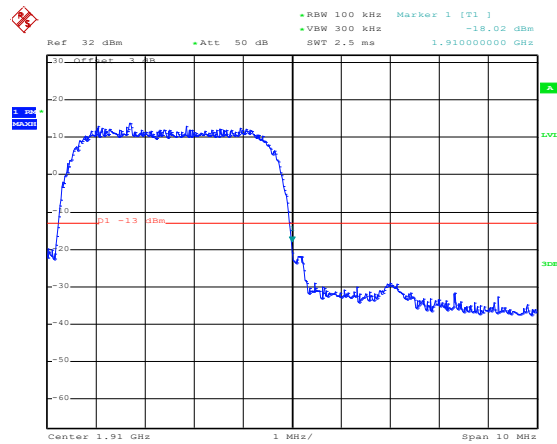


Date: 7.MAR.2023 14:03:48


HSUPA Band II-Low

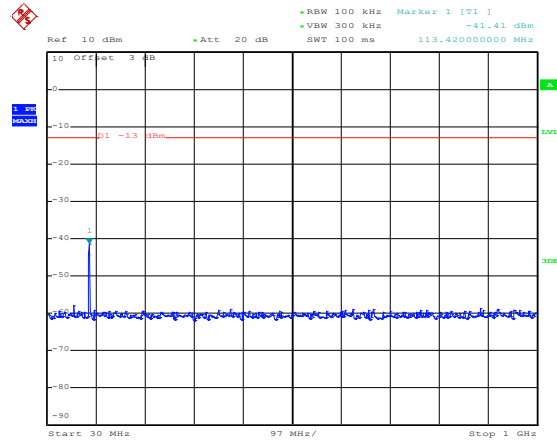

Date: 7.MAR.2023 14:13:24

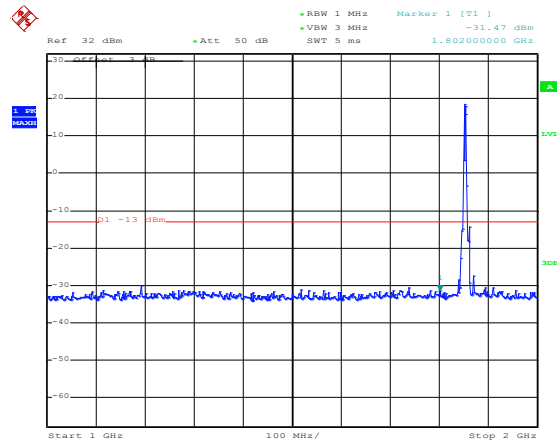


Date: 7.MAR.2023 14:14:38

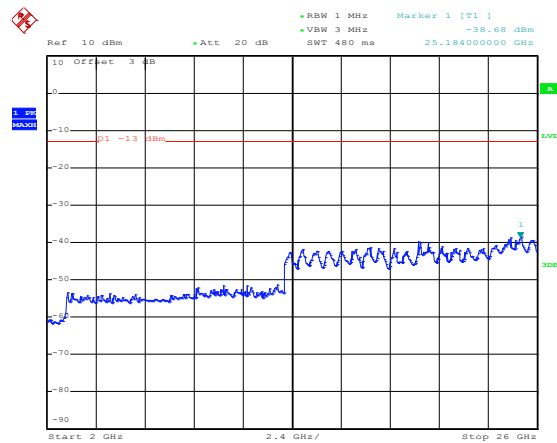


Date: 7.MAR.2023 14:16:03


HSUPA Band II-Low

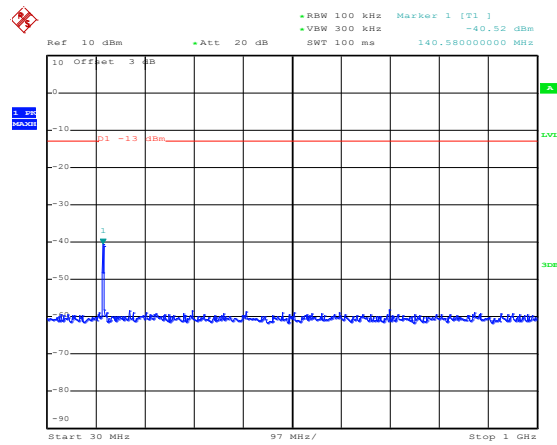

Date: 7.MAR.2023 14:13:42

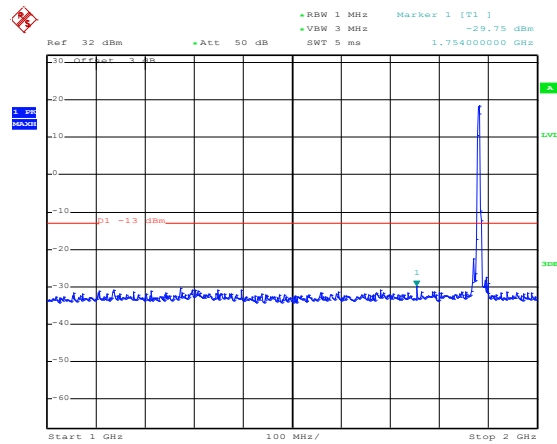


Date: 7.MAR.2023 14:15:04

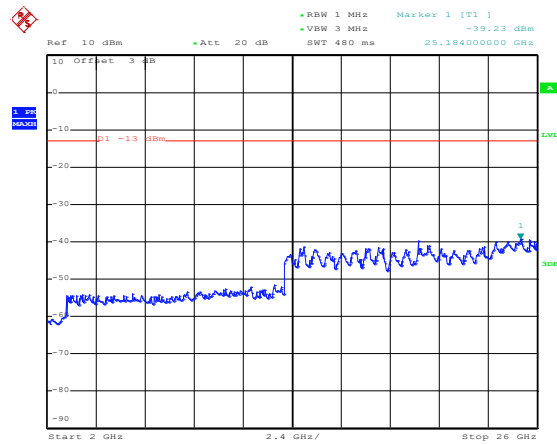


Date: 7.MAR.2023 14:16:16


HSUPA Band II-Low

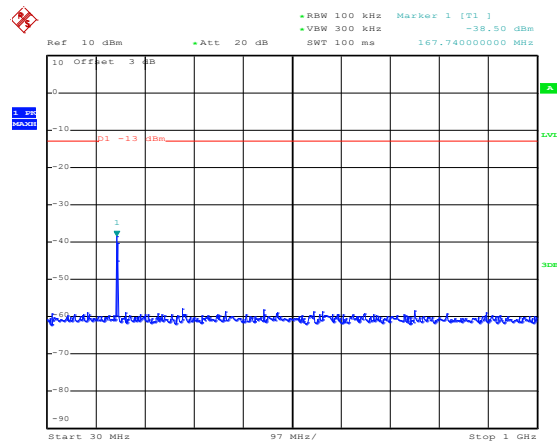

Date: 7.MAR.2023 14:14:03

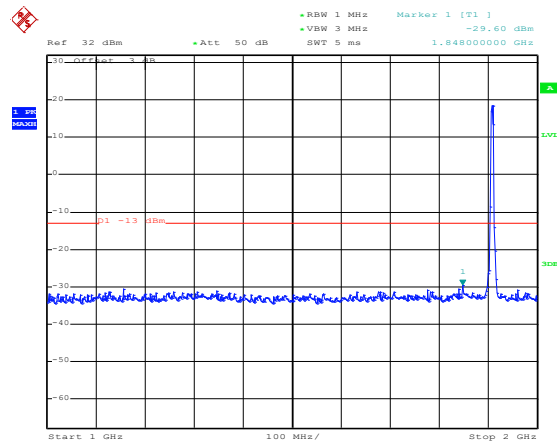


Date: 7.MAR.2023 14:15:22

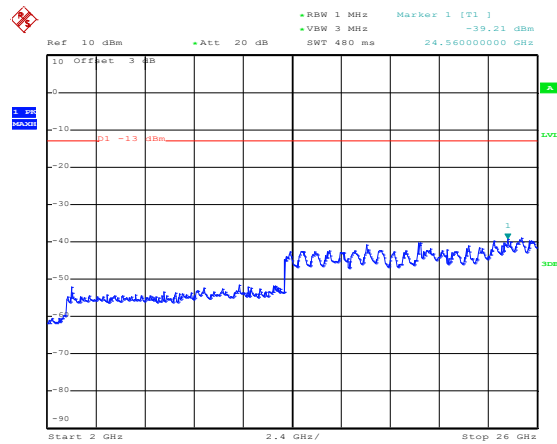


Date: 7.MAR.2023 14:16:32



Bandedge

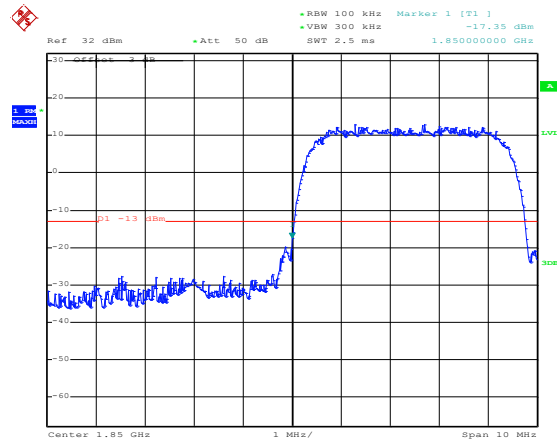

Date: 7.MAR.2023 14:06:27

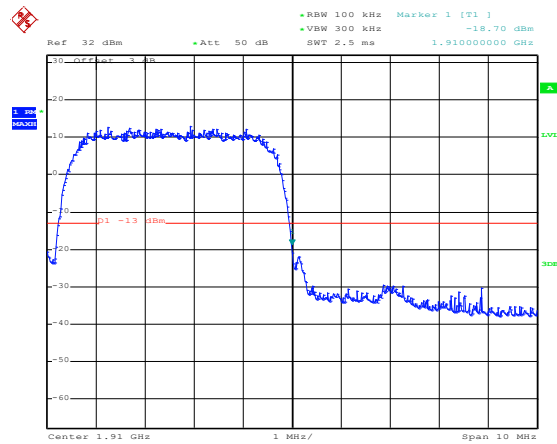

Date: 7.MAR.2023 14:06:59

## APPENDIX E

---

### Frequency Stability

Note: 1. Worst case at GSM850/PCS1900/WCDMA B2/B5 middle channel

2. Normal Voltage NV=DC3.85V; Low Voltage LV=DC3.5V; High Voltage HV=DC4.35V

➤ Frequency stability V.S. Temperature measurement

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	73	0.0873	2.50	Pass
	-20	61	0.0726		
	-10	53	0.0634		
	0	45	0.0542		
	10	40	0.0478		
	20	35	0.0423		
	30	41	0.0487		
	40	48	0.0570		
	50	55	0.0662		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	72	0.0381	2.50	Pass
	-20	56	0.0299		
	-10	46	0.0245		
	0	41	0.0217		
	10	37	0.0196		
	20	32	0.0168		
	30	38	0.0205		
	40	42	0.0225		
	50	46	0.0245		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	62	0.0745	2.50	Pass
	-20	58	0.0699		
	-10	54	0.0644		
	0	48	0.0570		
	10	44	0.0524		
	20	36	0.0432		
	30	43	0.0515		
	40	51	0.0607		
	50	56	0.0671		
Reference Frequency: WCDMA Band IV Middle channel=1412 channel=1733.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	78	0.0413	2.50	Pass
	-20	62	0.0331		
	-10	52	0.0278		
	0	48	0.0254		
	10	42	0.0225		
	20	36	0.0192		
	30	42	0.0225		
	40	48	0.0254		
	50	52	0.0274		

Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	71	0.0376	2.50	Pass
	-20	66	0.0352		
	-10	55	0.0291		
	0	49	0.0262		
	10	42	0.0221		
	20	36	0.0192		
	30	40	0.0213		
	40	47	0.0250		
50	54	0.0286			


➤ Frequency stability V.S. Voltage measurement




Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	32	0.0377	2.50	Pass
	NV	19	0.0230		
	LV	30	0.0359		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	45	0.0241	2.50	Pass
	NV	36	0.0192		
	LV	52	0.0274		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	
		Hz	ppm	Result	
25	HV	44	0.0524	2.50	Pass
	NV	30	0.0359		
	LV	42	0.0497		
Reference Frequency: WCDMA Band IV Middle channel=1412 channel=1733.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	47	0.0250	2.50	Pass
	NV	33	0.0176		
	LV	37	0.0196		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	28	0.0147	2.50	Pass
	NV	24	0.0127		
	LV	35	0.0184		

## APPENDIX F

### Modulation characteristics

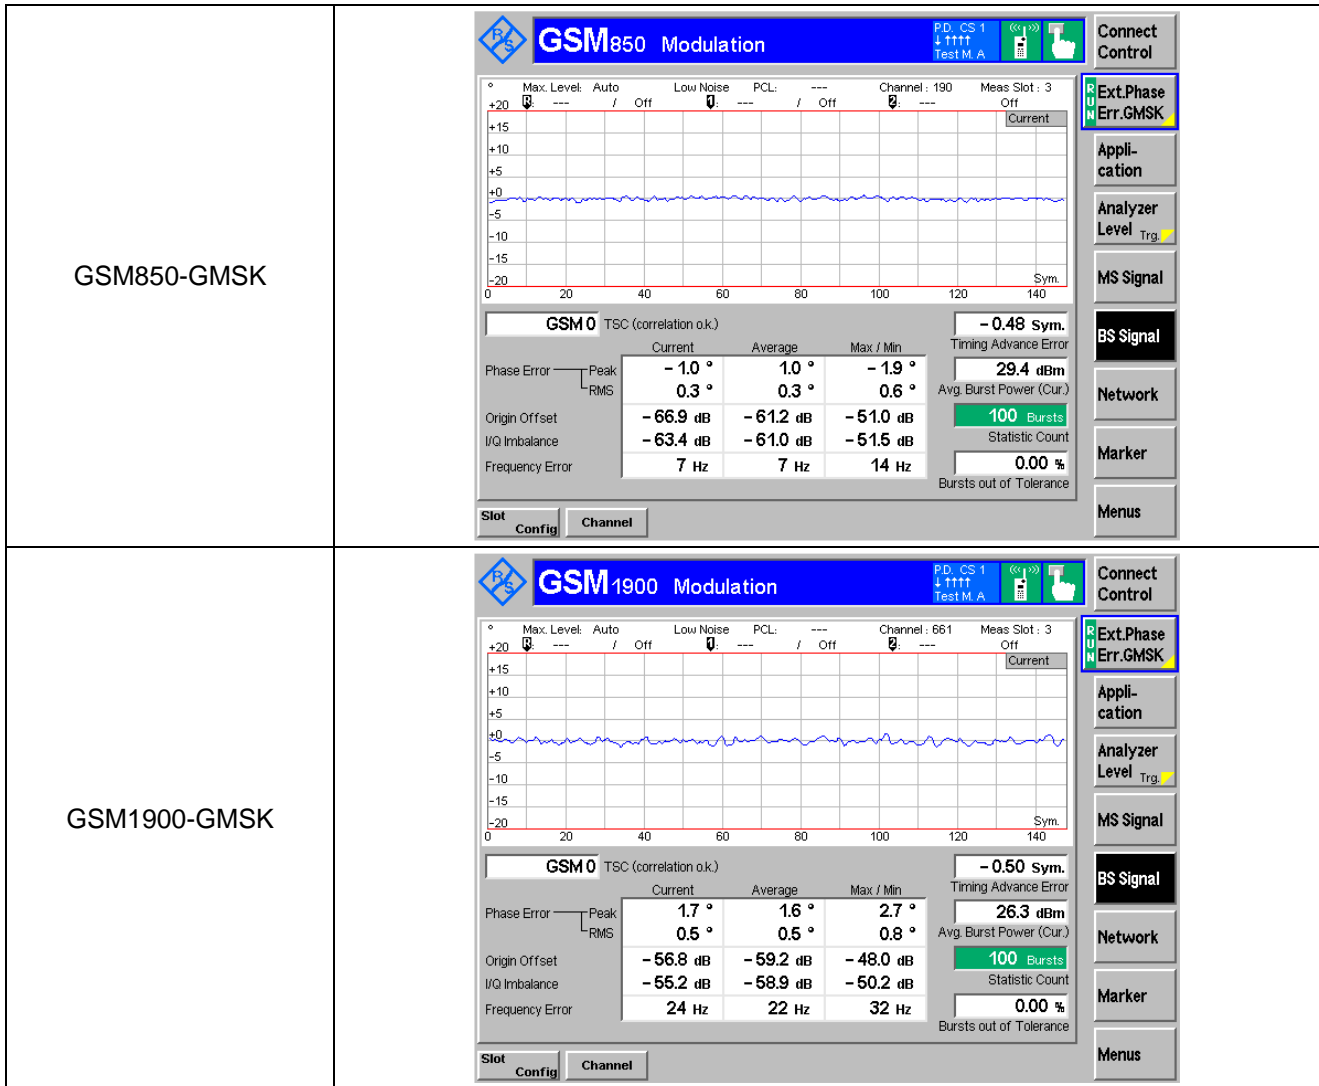
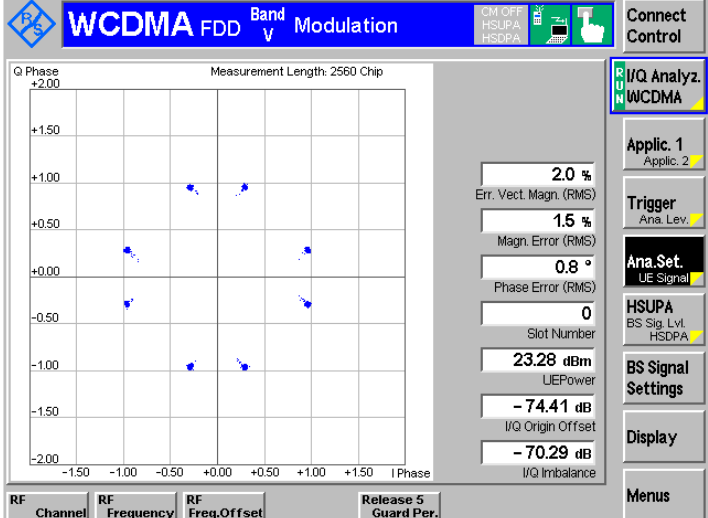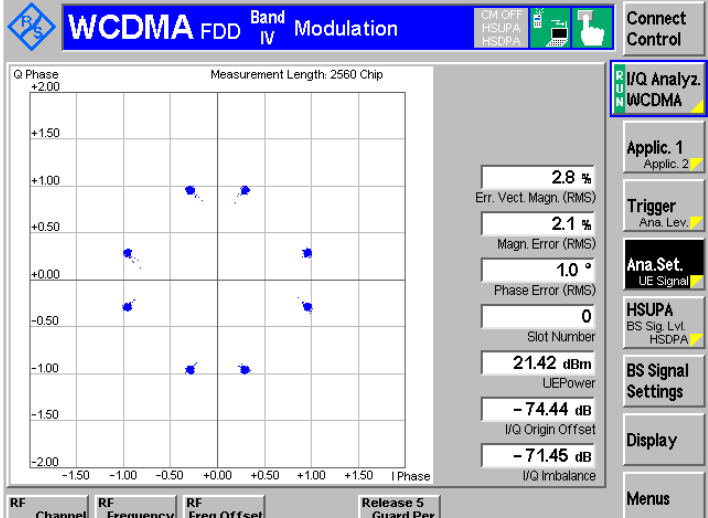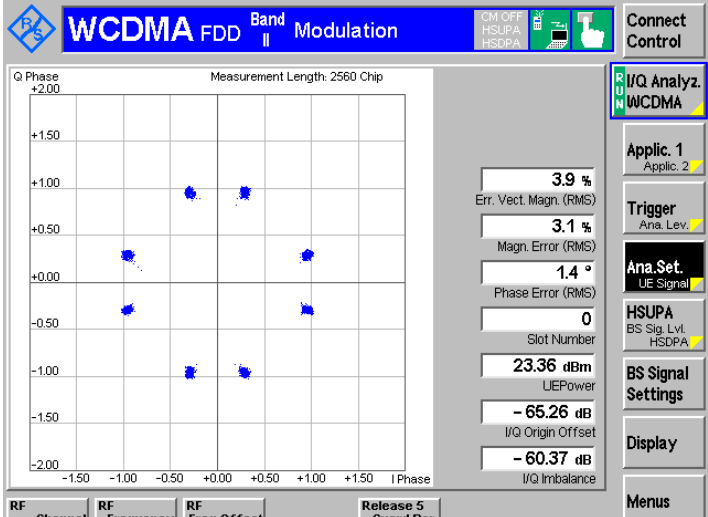
<p>WCDMA B5</p>	 <p>WCDMA FDD Band V Modulation</p> <p>Measurement Length: 2560 Chip</p> <p>Q Phase vs I Phase plot showing constellation points.</p> <p>Key Metrics:</p> <ul style="list-style-type: none"> <li>Err. Vect. Magn. (RMS): 2.0 %</li> <li>Magn. Error (RMS): 1.5 %</li> <li>Phase Error (RMS): 0.8 °</li> <li>Slot Number: 0</li> <li>UE Power: 23.28 dBm</li> <li>I/Q Origin Offset: -74.41 dB</li> <li>I/Q Imbalance: -70.29 dB</li> </ul>
<p>WCDMA B4</p>	 <p>WCDMA FDD Band IV Modulation</p> <p>Measurement Length: 2560 Chip</p> <p>Q Phase vs I Phase plot showing constellation points.</p> <p>Key Metrics:</p> <ul style="list-style-type: none"> <li>Err. Vect. Magn. (RMS): 2.8 %</li> <li>Magn. Error (RMS): 2.1 %</li> <li>Phase Error (RMS): 1.0 °</li> <li>Slot Number: 0</li> <li>UE Power: 21.42 dBm</li> <li>I/Q Origin Offset: -74.44 dB</li> <li>I/Q Imbalance: -71.45 dB</li> </ul>
<p>WCDMA B2</p>	 <p>WCDMA FDD Band II Modulation</p> <p>Measurement Length: 2560 Chip</p> <p>Q Phase vs I Phase plot showing constellation points.</p> <p>Key Metrics:</p> <ul style="list-style-type: none"> <li>Err. Vect. Magn. (RMS): 3.9 %</li> <li>Magn. Error (RMS): 3.1 %</li> <li>Phase Error (RMS): 1.4 °</li> <li>Slot Number: 0</li> <li>UE Power: 23.36 dBm</li> <li>I/Q Origin Offset: -65.26 dB</li> <li>I/Q Imbalance: -60.37 dB</li> </ul>

## APPENDIX PHOTOGRAPHS

---

Please refer to “ANNEX”

\*\*\*\* END OF REPORT \*\*\*\*