



# FCC PART 15B



# TEST REPORT

For

## 3Dconnexion

3/5 Avenue des Citronniers, 98000, Monaco

**FCC ID: 2AAHQ-RV1**

<b>Report Type:</b> Original Report	<b>Product Type:</b> SpaceMouse Wireless Receiver
<b>Test Engineer:</b> Ares Liu	
<b>Report Number:</b> R2XM140126050-00B	
<b>Report Date:</b> 2014-03-25	
<b>Reviewed By:</b> Sula Huang RF Engineer	
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....3**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

    OBJECTIVE .....3

    RELATED SUBMITTAL(S)/GRANT(S).....3

    TEST FACILITY .....3

**SYSTEM TEST CONFIGURATION.....4**

    JUSTIFICATION .....4

    EUT EXERCISE SOFTWARE .....4

    EQUIPMENT MODIFICATIONS .....4

    SUPPORT EQUIPMENT LIST AND DETAILS .....4

    EXTERNAL I/O CABLE.....4

    BLOCK DIAGRAM OF TEST SETUP .....5

**SUMMARY OF TEST RESULTS .....6**

**FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....7**

    MEASUREMENT UNCERTAINTY .....7

    EUT SETUP .....7

    EMI TEST RECEIVER SETUP.....8

    TEST PROCEDURE .....8

    CORRECTED AMPLITUDE & MARGIN CALCULATION .....8

    TEST EQUIPMENT LIST AND DETAILS.....9

    TEST RESULTS SUMMARY .....9

    TEST DATA .....9

**FCC §15.109 - RADIATED EMISSIONS .....12**

    MEASUREMENT UNCERTAINTY .....12

    EUT SETUP .....12

    EMI TEST RECEIVER SETUP.....13

    TEST PROCEDURE .....13

    CORRECTED AMPLITUDE & MARGIN CALCULATION .....13

    TEST EQUIPMENT LIST AND DETAILS.....14

    TEST RESULTS SUMMARY .....14

    TEST DATA .....14

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *3Dconnexion*'s product, model number: *SpaceMouse Wireless Receiver (FCC ID: 2AAHQ-RVI)* (the "EUT") in this report was a *SpaceMouse Wireless Receiver*, which was measured approximately: 1.9 cm (L) x 1.4 cm (W) x 0.6 cm (H), rated input voltage: DC 5.0 V from USB port.

*\* All measurement and test data in this report was gathered from production sample serial number: 140126050 (Assigned by BACL.Dongguan). The EUT was received on 2014-01-27.*

### Objective

This report is prepared on behalf of *3Dconnexion* in accordance with Part 2, Subpart J, Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine compliance with FCC Part 15B, Class B.

### Related Submittal(s)/Grant(s)

FCC Part 15C DXX submissions with FCC ID: *2AAHQ-RVI*.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

### EUT Exercise Software

No exercise software was used.

### Equipment Modifications

No modification was made to the EUT tested.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	PP11L	QDS-BRCM1017
HP	Printer	C3941A	JPTVOB2337
SAST	Modem	AEM-2100	0293
DELL	Keyboard	L100	CNORH656658907BL05D C
3Dconnexion	Mouse	Space Mouse Wireless	N/A

### External I/O Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Parallel Cable	Yes	No	1.2	Parallel Port of Laptop	Printer
Serial Cable	Yes	No	1.2	Serial Port of Laptop	Modem
Keyboard Cable	Yes	Yes	1.5	USB Port of Laptop	Keyboard

**Block Diagram of Test Setup**

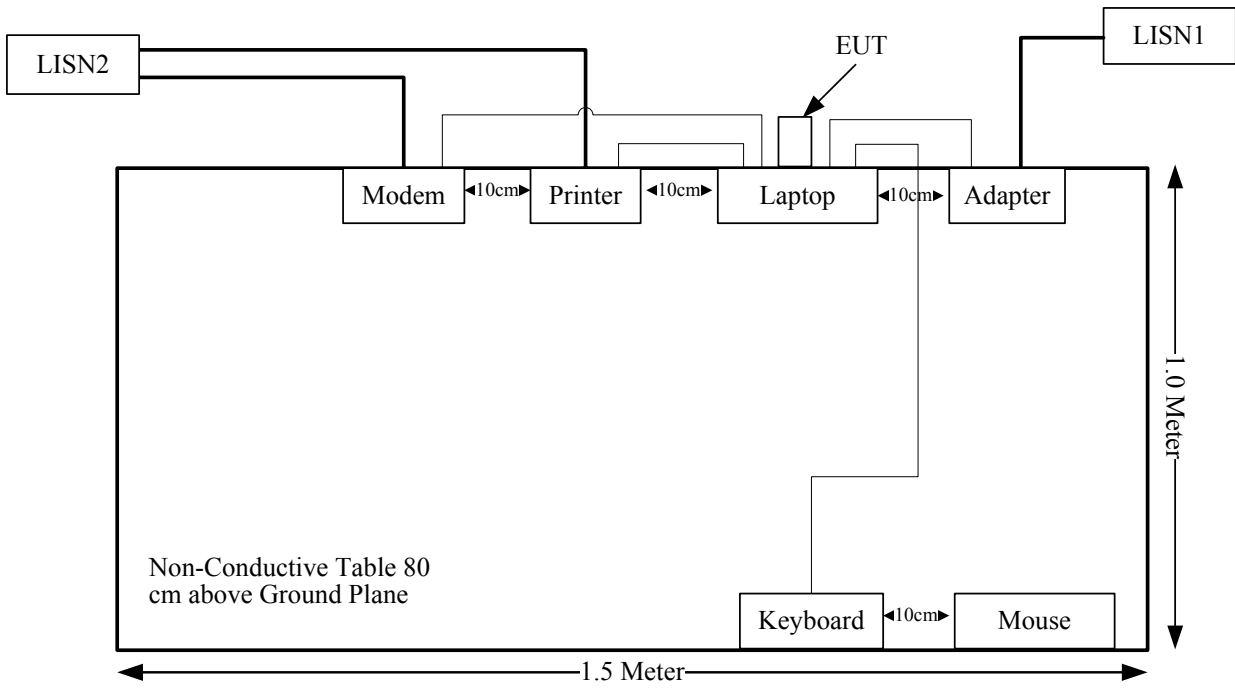

---

## **SUMMARY OF TEST RESULTS**

---

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Results</b>
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Emissions	Compliance

## FCC §15.107 – AC LINE CONDUCTED EMISSIONS

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

### EUT Setup

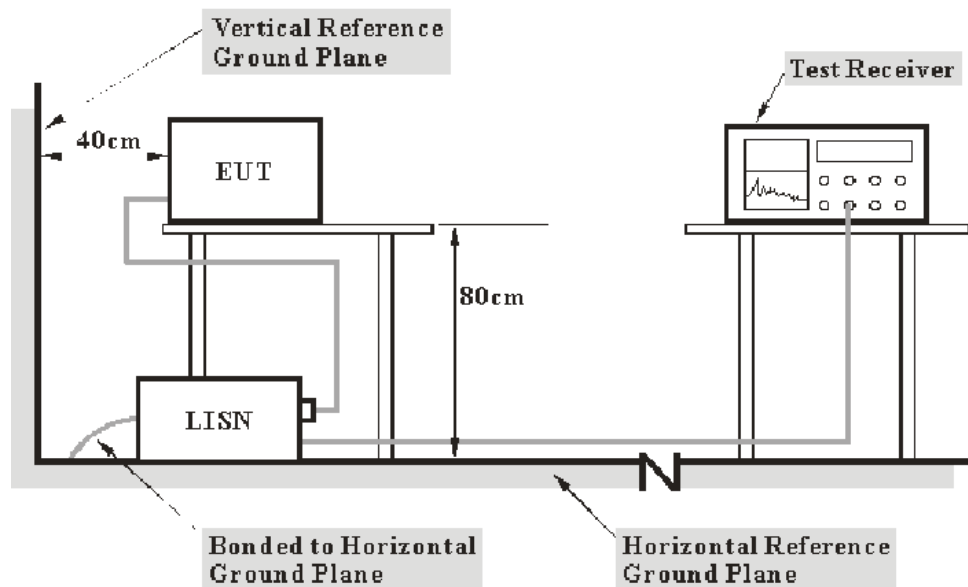

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Class B limits.

The adapter of laptop was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the adapter of laptop was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2013-11-20	2014-11-19
R&S	Two-line V-network	ENV216	3560.6550.12	2014-01-22	2015-01-21
R&S	L.I.S.N	ESH3-Z5	100113	N/A	N/A
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.107, with the worst margin reading of:

**6.55 dB at 0.300 MHz** in the **Line** conducted mode.

### Test Data


#### Environmental Conditions

<b>Temperature:</b>	24.4 °C
<b>Relative Humidity:</b>	49 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Ares Liu on 2014-03-25.*

Test mode: Operating

AC 120 V, 60 Hz, Line:

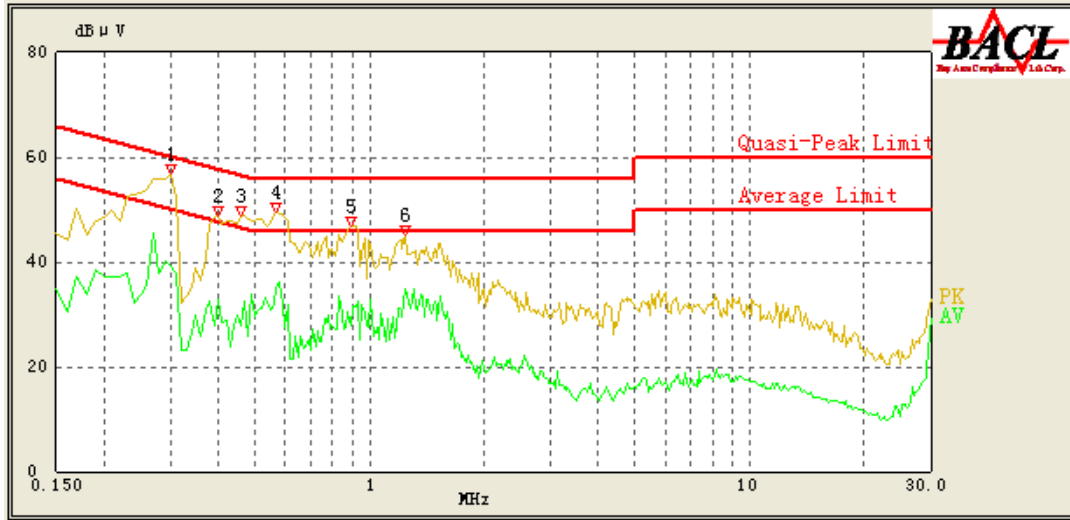

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.300	53.69	10.12	60.24	6.55	QP
0.300	39.03	10.12	50.24	11.21	AV
0.400	46.24	10.03	57.85	11.61	QP
0.400	32.78	10.03	47.85	15.07	AV
0.460	43.10	9.98	56.69	13.59	QP
0.460	27.94	9.98	46.69	18.75	AV
0.570	47.30	9.90	56.00	8.70	QP
0.570	35.02	9.90	46.00	10.98	AV
0.890	40.83	9.76	56.00	15.17	QP
0.890	27.68	9.76	46.00	18.32	AV
1.240	40.25	9.72	56.00	15.75	QP
1.240	34.96	9.72	46.00	11.04	AV

**AC 120 V, 60 Hz, Neutral:**



Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.230	50.94	10.72	62.45	11.51	QP
0.230	34.20	10.72	52.45	18.25	AV
0.270	52.86	10.60	61.12	8.26	QP
0.270	41.58	10.60	51.12	9.54	AV
0.300	53.31	10.52	60.24	6.93	QP
0.300	36.64	10.52	50.24	13.60	AV
0.550	44.46	9.92	56.00	11.54	QP
0.550	31.43	9.92	46.00	14.57	AV
0.910	39.94	9.82	56.00	16.06	QP
0.910	26.24	9.82	46.00	19.76	AV
1.480	39.94	9.77	56.00	16.06	QP
1.480	32.76	9.77	46.00	13.24	AV

## FCC §15.109 - RADIATED EMISSIONS

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


- 30M~200MHz: 5.0 dB
- 200M~1GHz: 6.2 dB
- 1G~6GHz: 4.45 dB
- 6G~18GHz: 5.23 dB

Table 2 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

### EUT Setup

Below 1 GHz:

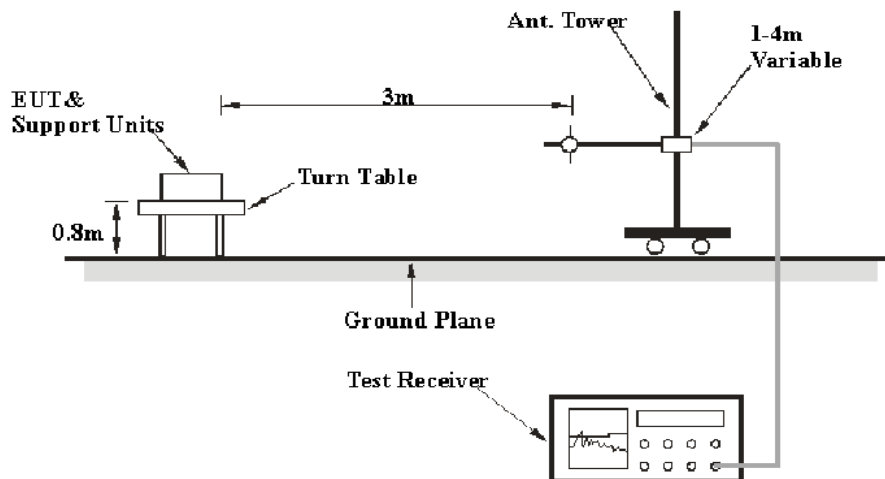

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC Part 15.109, Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter of laptop was connected to a 120 VAC/60 Hz power source.

### EMI Test Receiver Setup

According to FCC 15.33 requirements, the system was measured from 30 MHz to 6 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

### Test Procedure

For the radiated emissions test, the adapter of laptop was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in Quasi-peak detection mode for 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2013-05-06	2014-05-05
Sunol Sciences	Antenna	JB3	A060611-1	2011-09-06	2014-09-05
HP	Amplifier	8447E	2434A02181	2013-09-06	2014-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2013-06-16	2014-06-15
ETS-Lindgren	Horn Antenna	3115	000 527 35	2012-09-06	2015-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2014-02-19	2015-02-18
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Results Summary

According to the data in the following table, the EUT complied with the FCC §15.109, Class B, with the worst margin reading of:

**9.50 dB at 52.3100 MHz in the Vertical polarization**

### Test Data

#### Environmental Conditions


<b>Temperature:</b>	23.1 °C
<b>Relative Humidity:</b>	67 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Ares Liu on 2014-03-25.*

Test mode: Operating


Below 1GHz:

Horizontal:

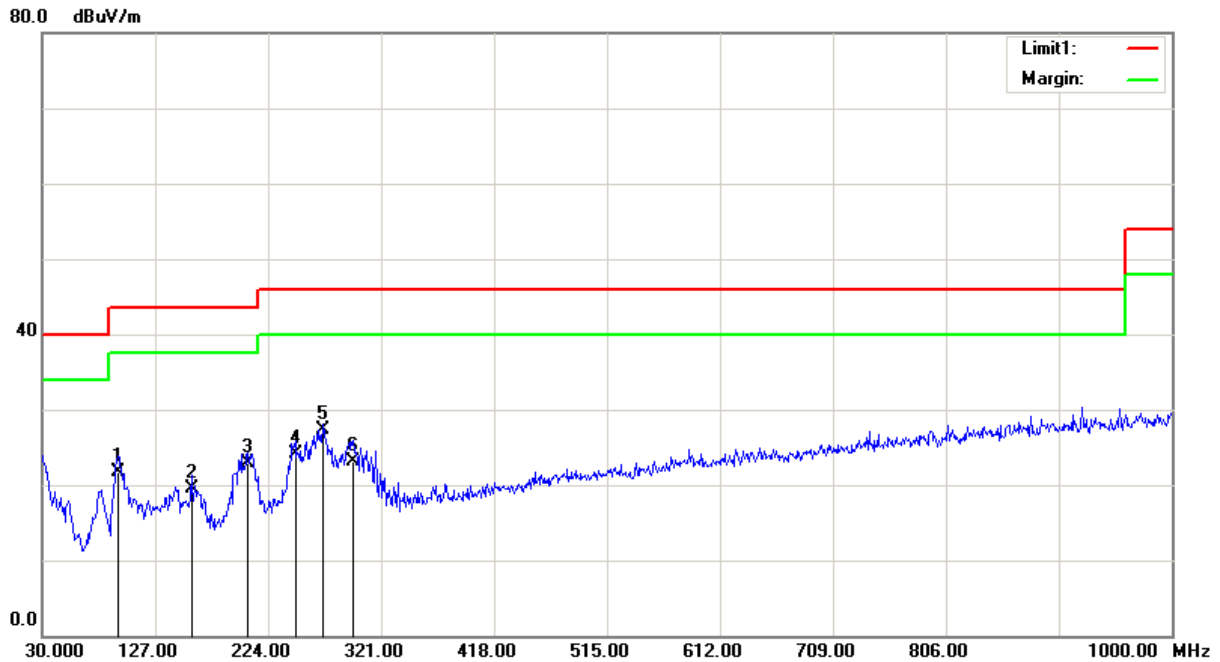

Frequency (MHz)	Receiver Reading (dBµV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
94.9900	33.03	QP	-11.23	21.80	43.50	21.70
158.0400	26.69	QP	-7.09	19.60	43.50	23.90
206.5400	31.41	QP	-8.51	22.90	43.50	20.60
247.2800	31.70	QP	-7.60	24.10	46.00	21.90
271.5300	33.21	QP	-5.91	27.30	46.00	18.70
296.7500	28.80	QP	-5.60	23.20	46.00	22.80

**Vertical:**

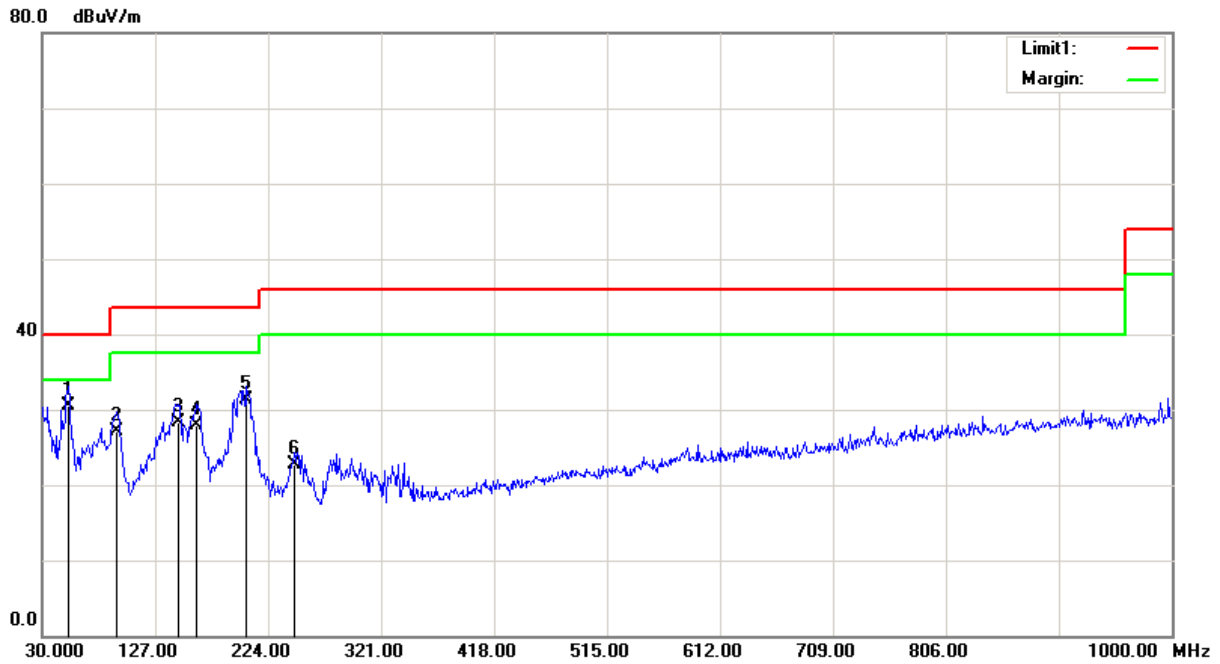


Frequency (MHz)	Receiver Reading (dBµV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
52.3100	42.93	QP	-12.43	30.50	40.00	9.50
94.0200	38.57	QP	-11.47	27.10	43.50	16.40
147.3700	35.73	QP	-7.33	28.40	43.50	15.10
162.8900	35.35	QP	-7.45	27.90	43.50	15.60
205.5700	39.59	QP	-8.29	31.30	43.50	12.20
246.3100	30.40	QP	-7.60	22.80	46.00	23.20




**Above 1GHz:**

**Horizontal:**

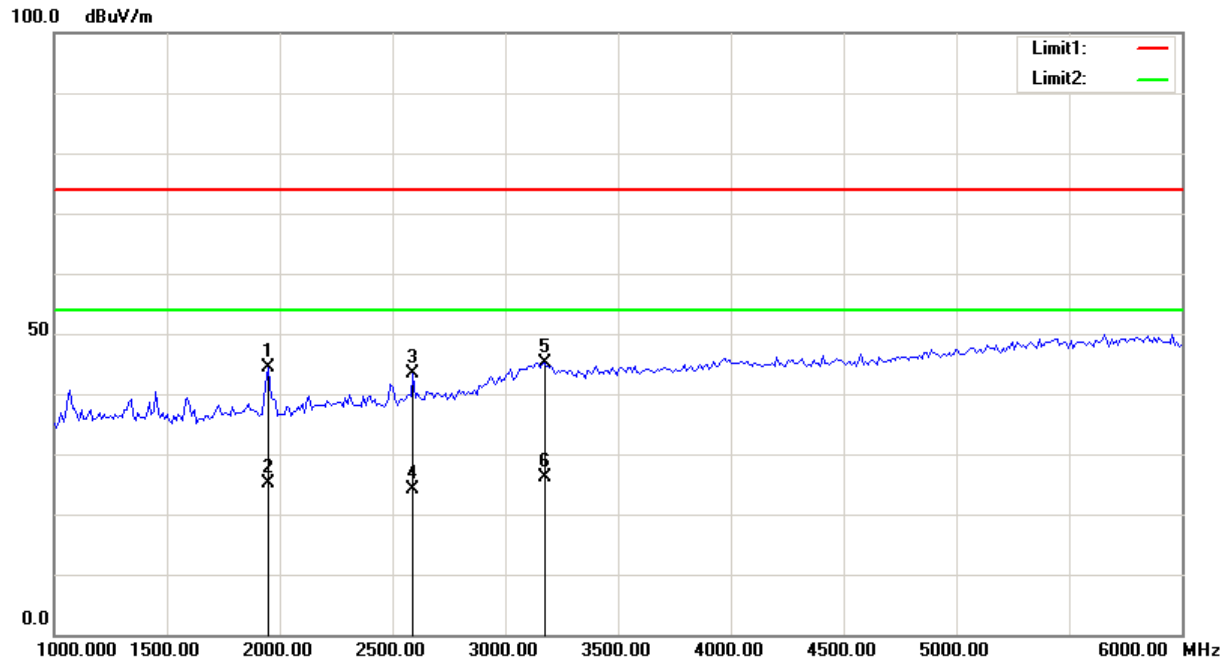

Frequency (MHz)	Receiver Reading (dBµV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
1951.904	43.51	peak	0.80	44.31	74.00	29.69
1951.904	24.34	AVG	0.80	25.14	54.00	28.86
2593.186	40.10	peak	3.35	43.45	74.00	30.55
2593.186	20.87	AVG	3.35	24.22	54.00	29.78
3174.349	37.69	peak	7.52	45.21	74.00	28.79
3174.349	18.57	AVG	7.52	26.09	54.00	27.91

**Vertical:**

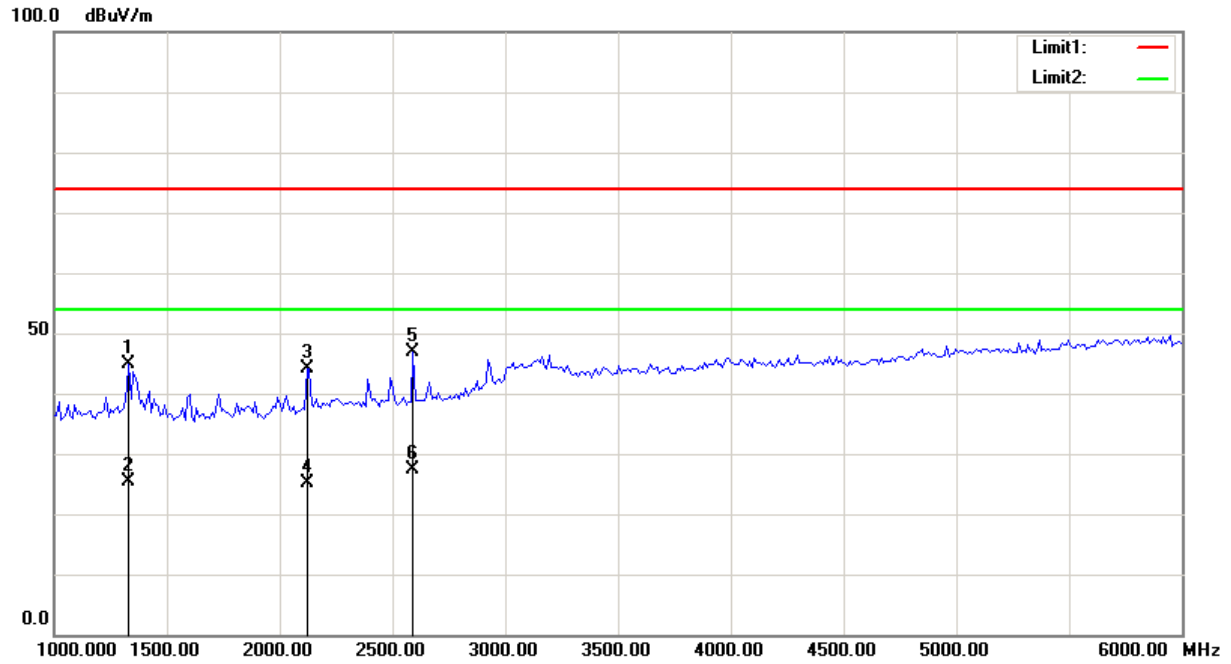

Frequency (MHz)	Receiver Reading (dBμV/m)	Detector (PK/QP/Ave)	Correction Factor (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1330.661	45.62	peak	-0.79	44.83	74.00	29.17
1330.661	26.20	AVG	-0.79	25.41	54.00	28.59
2122.244	42.65	peak	1.57	44.22	74.00	29.78
2122.244	23.62	AVG	1.57	25.19	54.00	28.81
2593.186	43.52	peak	3.35	46.87	74.00	27.13
2593.186	24.09	AVG	3.35	27.44	54.00	26.56

\*\*\*\*\* END OF REPORT \*\*\*\*\*