



# **FCC TEST REPORT**

**FCC ID: 2AAHW-UP300D**

On Behalf of

Beijing TierTime Technology Co., Ltd.

Tiertime UP300D

Model No.: 3DP-25-5F, 3DP-25-5G, 3DP-25-5H, 3DP-25-5I,  
3DP-25-5J, 3DP-25-5K, 3DP-25-5L, 3DP-25-5M, 3DP-25-5N

Prepared for : Beijing TierTime Technology Co., Ltd.  
Address : No.2 Nanyi Street, Yanqi Economic Development Zone, Huairou  
District, Beijing, 101407, P. R. China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.  
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
Shenzhen, Guangdong, China

Report Number : A2004320-C01-R01  
Date of Receipt : August 4, 2020  
Date of Test : August 6-28, 2020  
Date of Report : August 28, 2020  
Version Number : V0

## TABLE OF CONTENTS

Description	Page
<b>1. Summary of Standards And Results-----</b>	<b>6</b>
1.1. Description of Standards and Results -----	6
<b>2. General Information -----</b>	<b>7</b>
2.1. Description of Device (EUT)-----	7
2.2. Accessories of Device (EUT) -----	8
2.3. Tested Supporting System Details-----	8
2.4. Block Diagram of connection between EUT and simulators -----	8
2.5. Test Mode Description -----	9
2.6. Test Conditions -----	10
2.7. Test Facility -----	10
2.8. Measurement Uncertainty -----	10
2.9. Test Equipment List -----	11
<b>3. Spurious Emission -----</b>	<b>12</b>
3.1. Test Limits -----	12
3.2. Test Procedure -----	15
3.3. Test Setup -----	15
3.4. Test Results -----	16
<b>4. Power line Conducted Emission -----</b>	<b>23</b>
4.1. Test Limits -----	23
4.2. Test Procedure -----	23
4.3. Test Setup -----	23
4.4. Test Results -----	23
<b>5. Conducted Maximum Output Power -----</b>	<b>26</b>
5.1. Test limits -----	26
5.2. Test Procedure -----	26
5.3. Test Setup -----	26
5.4. Test Results -----	26
<b>6. Peak Power Spectral Density-----</b>	<b>28</b>
6.1. Test limits -----	28
6.2. Test Procedure -----	28
6.3. Test Setup -----	28
6.4. Test Results -----	29
<b>7. Bandwidth-----</b>	<b>36</b>
7.1. Test limits -----	36
7.2. Test Procedure -----	36
7.3. Test Setup -----	36
7.4. Test Results -----	36
<b>8. Band Edge Check-----</b>	<b>49</b>
8.1. Test limits -----	49
8.2. Test Procedure -----	49
8.3. Test Setup -----	49
8.4. Test Results -----	49
<b>9. Frequency stability -----</b>	<b>56</b>
9.1. Test limit -----	56
9.2. Test Procedure -----	56
9.3. Test Setup -----	56
9.4. Test Results -----	56

**10. Antenna Requirement ----- 57**  
    10.1. Standard Requirement----- 57  
    10.2. Antenna Connected Construction----- 57  
    10.3. Results ----- 57  
**11. Test setup photo----- 58**  
**12. Photos of EUT ----- 60**

### TEST REPORT DECLARATION

Applicant : Beijing TierTime Technology Co., Ltd.  
 Address : No.2 Nanyi Street, Yanqi Economic Development Zone, Huairou District, Beijing, 101407, P. R. China  
 Manufacturer : Beijing TierTime Technology Co., Ltd.  
 Address : No.2 Nanyi Street, Yanqi Economic Development Zone, Huairou District, Beijing, 101407, P. R. China  
 EUT Description : Tiertime UP300D  
 (A) Model No. : 3DP-25-5F, 3DP-25-5G, 3DP-25-5H, 3DP-25-5I, 3DP-25-5J, 3DP-25-5K, 3DP-25-5L, 3DP-25-5M, 3DP-25-5N  
 (B) Trademark : N/A

Measurement Standard Used:

**FCC Rules and Regulations Part 15 Subpart C Section 15.247**  
**RSS-247 Issue 2, RSS-Gen Issue 5, ANSI C63.10, CISPR 16-1-4**

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Lucas Pang  
 Project Engineer



Approved by (name + signature).....: Simple Guan  
 Project Manager



Date of issue..... : August 28, 2020

**Revision History**

Revision	Issue Date	Revisions	Revised By
V0	August 28, 2020	Initial released Issue	Lucas Pang

# 1. SUMMARY OF STANDARDS AND RESULTS

## 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Conducted Emission	FCC Part 15: 15.207 RSS-GEN(8.8) ANSI C63.10	P
6dB Bandwidth	FCC PART 15:15.247(a)(2) RSS-247(5.2 a) ANSI C63.10	P
Output Power	FCC Part 15: 15.247(b)(3) RSS-247(5.4 d) ANSI C63.10	P
Radiated Spurious Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10	P
Conducted Spurious & Band Edge Emission	FCC Part 15: 15.247(d) RSS-Gen(8.9), RSS-247(5.5) ANSI C63.10	P
Power Spectral Density	FCC PART 15:15.247(e) RSS-247(5.2 b) ANSI C63.10	P
Radiated Band Edge Emission	FCC Part 15: 15.247(d) RSS-GEN(6.13) ANSI C63.10	P
Frequency stability	RSS-GEN(6.11)	N/A
Antenna Requirement	FCC Part 15: 15.203 RSS-GEN(6.8)	P
Note:	1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.	

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT Name	:	Tiertime UP300D
Trademark	:	N/A
Model No.	:	3DP-25-5F, 3DP-25-5G, 3DP-25-5H, 3DP-25-5I, 3DP-25-5J, 3DP-25-5K, 3DP-25-5L, 3DP-25-5M, 3DP-25-5N
DIFF.	:	All model's the function, software and electric circuit are the same, only with a product model named different. The test mode is 3DP-25-5F.
Power supply	:	DC 24V from adapter.

#### 2.4G WIFI :

Operation frequency	:	2412MHz-2462MHz for IEEE 802.11 b, g, n/HT20 2422MHz~2452MHz for IEEE802.11n/HT40
Channel No.	:	802.11b/802.11g /802.11n(HT20): 11CH 802.11(HT40): 7CH
Modulation type	:	IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Antenna Type	:	Internal antenna, Maximum Gain is 2dBi
Software version	:	V1.0
Hardware version	:	V1.0
Intend use environment	:	Residential, commercial and light industrial environment
Note	:	The printer is equipped with two printing nozzles and two power adapters. The high-power printing nozzle is used with the power adapter FSP330-AAAN3, and the low-power printing nozzle is used with the power adapter FSP230-AAAN3.


## 2.2. Accessories of Device (EUT)

Accessories 1	:	AC ADAPTER
Manufacturer	:	FSP GROUP INC.
Model	:	FSP330-AAAN3
Input	:	100-240V~, 4.2A, 50/60Hz
Output	:	24V=13.75A
Accessories 2	:	AC ADAPTER
Manufacturer	:	FSP GROUP INC.
Model	:	FSP230-AAAN3
Input	:	100-240V~, 3A, 50/60Hz
Output	:	24V=9.58A
Accessories 3	:	USB Cable
Manufacturer	:	Beijing TierTime Technology Co., Ltd.
Model	:	/
Specification:	:	1.5m long, shielded wire with magnetic ring

## 2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDOC
1	Notebook PC	Lenovo	E490	/	/

## 2.4. Block Diagram of connection between EUT and simulators

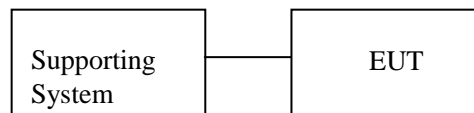



## 2.5. Test Mode Description

Duty cycle :100% Keeping TX			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40	13	Low :CH3	2422
	13	Middle: CH6	2437
	13	High: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate. so those data rate were used for all test.

Channel list:					
For IEEE 802.11b, g, n/HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		
For IEEE 802.11 n/HT40 with 2.4G					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2422	CH5	2442		
CH2	2427	CH6	2447		
CH3	2432	CH7	2452		
CH4	2437				

Setting output power (Max)			
802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
9dBm	9dBm	9dBm	9dBm

## 2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	98kPa

## 2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd  
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,  
 Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission  
 Registration Number: 293961  
 Designation Number: CN1236

July 15, 2019 Certificated by IC  
 Registration Number: 12135A

## 2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	2.74dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	2.13 dB(Polarize: V)
	2.57dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.13dB(Polarize: H)
	4.16dB(Polarize: V)
Uncertainty for radio frequency	$5.4 \times 10^{-8}$
Uncertainty for conducted RF Power	0.37dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

## 2.9. Test Equipment List

Equipment	Manufacture	Model No.	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	N/A	2019.09.06	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	102137	2019.09.05	1 Year
Spectrum analyzer	Agilent	N9020A	MY499100060	2019.09.05	1 Year
Receiver	ROHDE&SCHWARZ	ESR	1316.3003K03-10208 2-Wa	2019.09.06	1 Year
Receiver	R&S	ESCI	101165	2019.09.05	1 Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2019.09.07	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D(1201)	2020.04.12	2Year
Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00059	2019.09.07	2Year
Cable	Resenberger	N/A	No.1	2019.09.05	1 Year
Cable	Resenberger	N/A	No.2	2019.09.05	1 Year
Cable	Resenberger	N/A	No.3	2019.09.05	1 Year
Pre-amplifier	HP	HP8347A	2834A00455	2019.09.05	1 Year
Pre-amplifier	Agilent	8449B	3008A02664	2019.09.05	1 Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2019.09.05	1 Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2019.09.05	1 Year
20db Attenuator	ICPROBING	IATS1	82347	2019.08.26	1 Year
Horn Antenna	SCHWARZBECK	BBHA9170	00946	2019.09.07	2 Year
Preamplifier	SKET	LNPA_1840-50	SK2018101801	2019.09.06	1 Year
Power Meter	Agilent	E9300A	MY41496625	2019.09.06	1 Year
Temp. & Humid. Chamber	Wei Huang	WHTH-1000-40-80	100631	2019.09.06	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	20140927-6	2019.09.05	1 Year

### 3. SPURIOUS EMISSION

#### 3.1. Test Limits

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### RSS-GEN Restricted frequency band

**Table 7 – Restricted frequency bandsNote 1**

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 – 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12

6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 – 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

## 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	
Note 1: The peak limit is 20 dB higher than the average limit			
Note 2: Peak limit applies (AVG limit + 20 dB) as well as RSS-247 Section 5.5			

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ( $\mu\text{V}/\text{m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ( $\mu\text{A}/\text{m}$ )	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

### 3.2. Test Procedure

The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz. The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above 1GHz testing, the table was rotated 360 degrees to determine the position of the highest radiation

The Test antenna shall vary between 1m and 4m, both Horizontal and Vertical antenna are set of make measurement.


The initial step in collecting radiated emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Quasi Peak Detector mode premeasured

If Peak value comply with QP limit below 1GHz, the EUT deemed to comply with QP limit.


But the Peak value and average value both need to comply with applicable limit above 1GHz.

For the actual test configuration, please see the test setup photo.


### 3.3. Test Setup

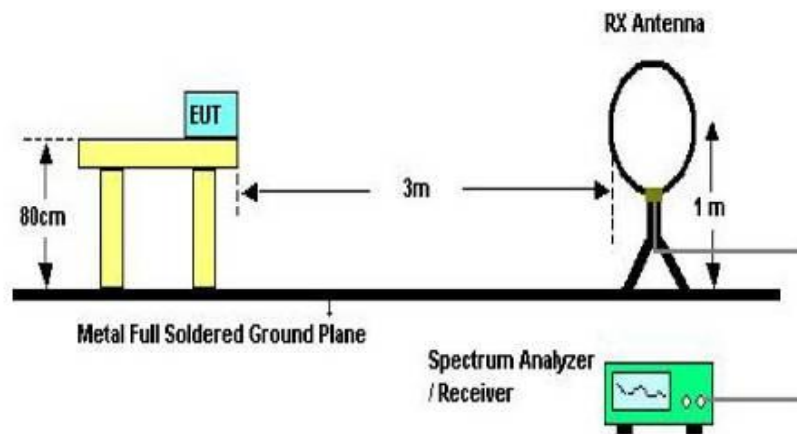

Below 30MHz Test Setup

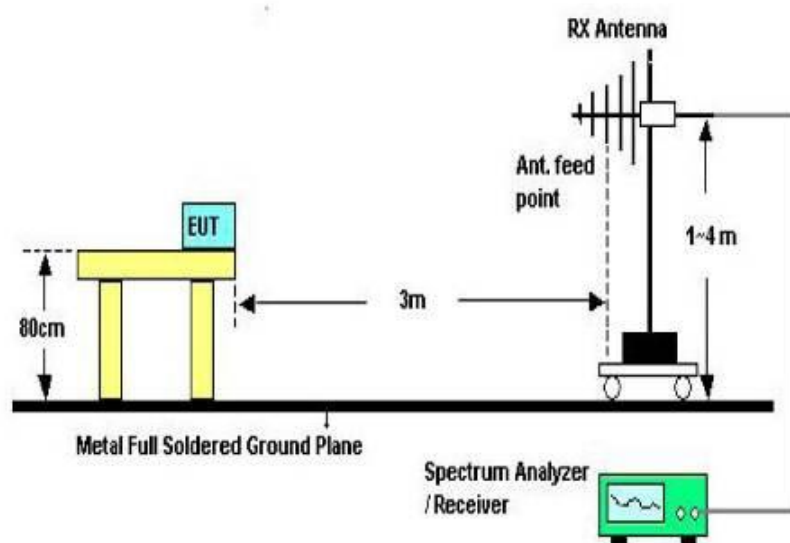

Above 30MHz Test Setup

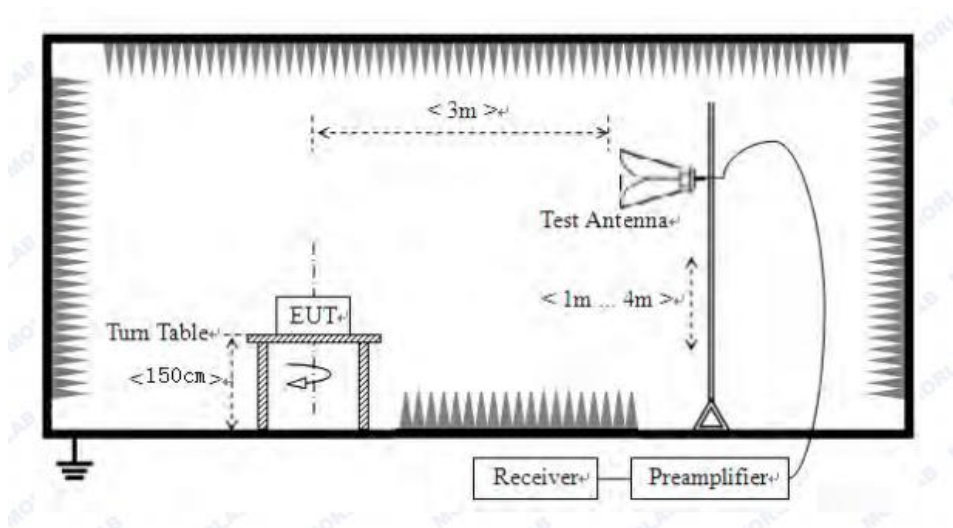

Above 1GHz Test Setup

### 3.4. Test Results

#### Test Condition

Continual Transmitting in maximum power.

9KHz~150KHz	RBW200Hz	VBW1KHz
150KHz~30MHz	RBW9KHz	VBW 30KHz
30MHz~1GHz	RBW120KHz	VBW 300KHz
Above1GHz	RBW1MHz	VBW 3MHz

We have scanned the EUT from 9kHz up to the 10th harmonic of the fundamental.

Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS


Note: 1.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

2.Only show the test data of the worst Channel in this report.




From 30MHz to 1000MHz: Conclusion: PASS

<b>EUT Description</b>	Tiertime UP300D	<b>Temperature</b>	24°C
<b>Model No.</b>	3DP-25-5F	<b>Humidity</b>	56%
<b>Pol</b>	Vertical	<b>Test mode</b>	802.11b 2412MHz
<b>Test Voltage</b>	DC 24V	<b>Adapter Model</b>	FSP330-AAAN3

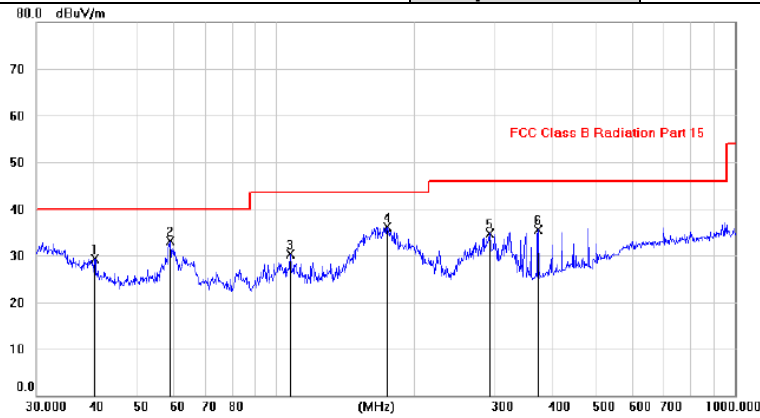

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		40.1910	14.91	14.44	29.35	40.00	-10.65	peak		
2	*	58.7772	19.73	13.29	33.02	40.00	-6.98	peak		
3		107.3970	18.82	11.57	30.39	43.50	-13.11	peak		
4		174.9139	22.69	13.39	36.08	43.50	-7.42	peak		
5		291.5466	20.77	13.91	34.68	46.00	-11.32	peak		
6		372.0045	19.80	15.70	35.50	46.00	-10.50	peak		

**Pol** Horizontal

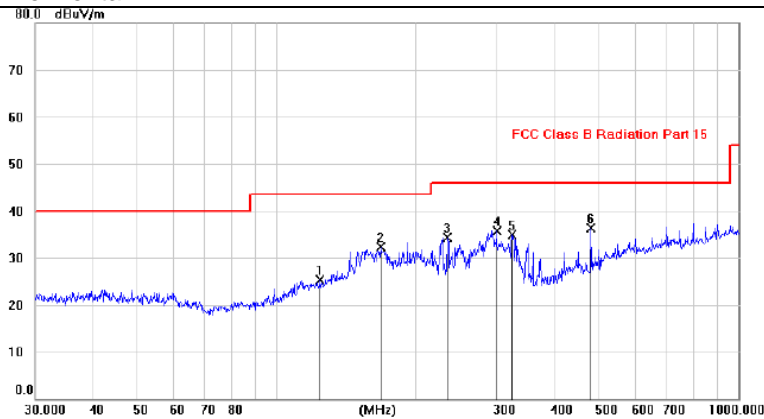


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		124.2200	12.09	13.27	25.36	43.50	-18.14	peak		
2		168.0004	18.04	14.27	32.31	43.50	-11.19	peak		
3		234.6613	21.85	12.42	34.27	46.00	-11.73	peak		
4		300.0514	21.69	14.10	35.79	46.00	-10.21	peak		
5		324.0013	20.13	14.71	34.84	46.00	-11.16	peak		
6	*	480.0221	18.37	17.95	36.32	46.00	-9.68	peak		

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable


From 30MHz to 1000MHz: Conclusion: PASS

<b>EUT Description</b>	Tiertime UP300D	<b>Temperature</b>	24°C
<b>Model No.</b>	3DP-25-5F	<b>Humidity</b>	56%
<b>Pol</b>	Vertical	<b>Test mode</b>	802.11b 2412MHz
<b>Test Voltage</b>	DC 24V	<b>Adapter Model</b>	FSP230-AAAN3

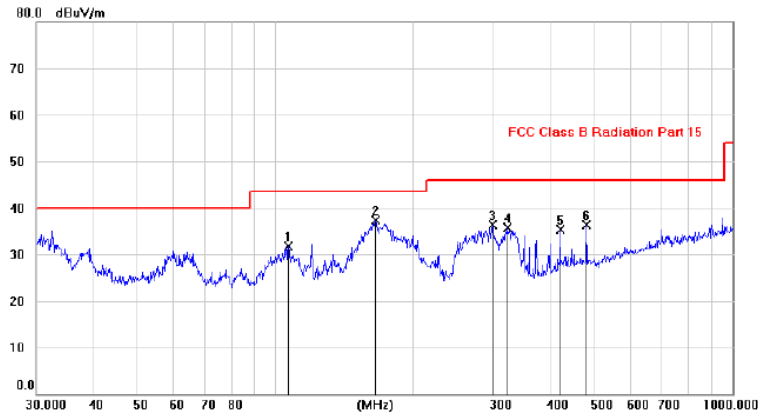

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		106.8336	20.20	11.52	31.72	43.50	-11.78			peak
2	*	165.7187	22.85	14.49	37.34	43.50	-6.16			peak
3		298.2681	22.30	14.06	36.36	46.00	-9.64			peak
4		321.7369	21.11	14.66	35.77	46.00	-10.23			peak
5		419.9907	18.67	16.73	35.40	46.00	-10.60			peak
6		480.0221	18.33	17.95	36.28	46.00	-9.72			peak

<b>Pol</b>	Horizontal
------------	------------

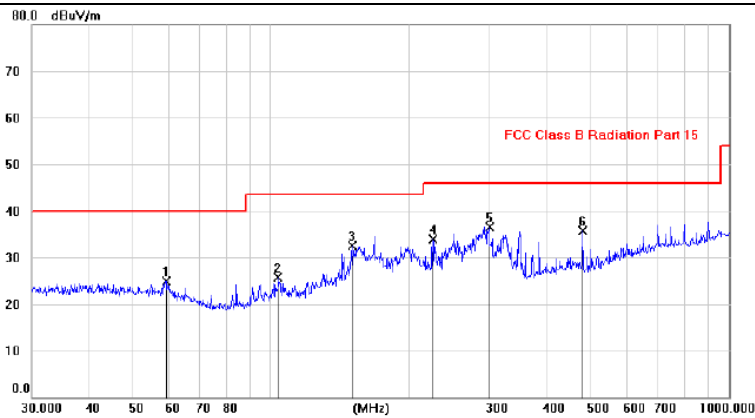

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		58.8185	11.61	13.28	24.89	40.00	-15.11			peak
2		103.5147	14.50	11.19	25.69	43.50	-17.81			peak
3		150.0107	17.48	15.06	32.54	43.50	-10.96			peak
4		225.8616	21.81	12.07	33.88	46.00	-12.12			peak
5	*	300.0514	22.43	14.10	36.53	46.00	-9.47			peak
6		480.0221	17.74	17.95	35.69	46.00	-10.31			peak

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

Remark: All modes have been tested, and only worst data was listed in this report.

From 1G-25GHz

Test Mode: IEEE 802.11b TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	42.69	V	33.98	10.22	34.25	52.64	74	21.36	PK
4824	33.08	V	33.98	10.22	34.25	43.03	54	10.97	AV
7236	/	V	33.98	10.22	34.25	/	74	/	/
9648	/	V	33.98	10.22	34.25	/	74	/	/
4824	41.94	H	33.98	10.22	34.25	51.89	74	22.11	PK
4824	31.87	H	33.98	10.22	34.25	41.82	54	12.18	AV
7236	/	H	33.98	10.22	34.25	/	74	/	/
9648	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode: IEEE 802.11b TX Mid									
4874	42.41	V	33.98	10.22	34.25	52.36	74	21.64	PK
4874	32.72	V	33.98	10.22	34.25	42.67	54	11.33	AV
7311	/	V	33.98	10.22	34.25	/	74	/	/
9748	/	V	33.98	10.22	34.25	/	74	/	/
4874	42.70	H	33.98	10.22	34.25	52.65	74	21.35	PK
4874	32.04	H	33.98	10.22	34.25	41.99	54	12.01	AV
7311	/	H	33.98	10.22	34.25	/	74	/	/
9748	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode: IEEE 802.11b TX High									
4924	41.93	V	33.98	10.22	34.25	51.88	74	22.12	PK
4924	32.52	V	33.98	10.22	34.25	42.47	54	11.53	AV
7386	/	V	33.98	10.22	34.25	/	74	/	/
9848	/	V	33.98	10.22	34.25	/	74	/	/
4924	42.62	H	33.98	10.22	34.25	52.57	74	21.43	PK
4924	31.56	H	33.98	10.22	34.25	41.51	54	12.49	AV
7386	/	H	33.98	10.22	34.25	/	74	/	/
9848	/	H	33.98	10.22	34.25	/	74	/	/

Note:

- 1, Result = Read level + Antenna factor + cable loss-Amp factor
- 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Test Mode: IEEE 802.11g TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	42.58	V	33.98	10.22	34.25	52.53	74	21.47	PK
4824	32.72	V	33.98	10.22	34.25	42.67	54	11.33	AV
7236	/	V	33.98	10.22	34.25	/	74	/	/
9648	/	V	33.98	10.22	34.25	/	74	/	/
4824	42.60	H	33.98	10.22	34.25	52.55	74	21.45	PK
4824	31.40	H	33.98	10.22	34.25	41.35	54	12.65	AV
7236	/	H	33.98	10.22	34.25	/	74	/	/
9648	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode: IEEE 802.11g TX Mid									
4874	42.25	V	33.98	10.22	34.25	52.20	74	21.80	PK
4874	32.77	V	33.98	10.22	34.25	42.72	54	11.28	AV
7311	/	V	33.98	10.22	34.25	/	74	/	/
9748	/	V	33.98	10.22	34.25	/	74	/	/
4874	42.02	H	33.98	10.22	34.25	51.97	74	22.03	PK
4874	31.51	H	33.98	10.22	34.25	41.46	54	12.54	AV
7311	/	H	33.98	10.22	34.25	/	74	/	/
9748	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode: IEEE 802.11g TX High									
4924	42.56	V	33.98	10.22	34.25	52.51	74	21.49	PK
4924	32.64	V	33.98	10.22	34.25	42.59	54	11.41	AV
7386	/	V	33.98	10.22	34.25	/	74	/	/
9848	/	V	33.98	10.22	34.25	/	74	/	/
4924	42.31	H	33.98	10.22	34.25	52.26	74	21.74	PK
4924	31.53	H	33.98	10.22	34.25	41.48	54	12.52	AV
7386	/	H	33.98	10.22	34.25	/	74	/	/
9848	/	H	33.98	10.22	34.25	/	74	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Test Mode:IEEE 802.11n HT20 TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4824	42.08	V	33.98	10.22	34.25	52.03	74	21.97	PK
4824	32.75	V	33.98	10.22	34.25	42.70	54	11.30	AV
7236	/	V	33.98	10.22	34.25	/	74	/	/
9648	/	V	33.98	10.22	34.25	/	74	/	/
4824	41.92	H	33.98	10.22	34.25	51.87	74	22.13	PK
4824	31.78	H	33.98	10.22	34.25	41.73	54	12.27	AV
7236	/	H	33.98	10.22	34.25	/	74	/	/
9648	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode:IEEE 802.11n HT20 TX Mid									
4874	42.68	V	33.98	10.22	34.25	52.63	74	21.37	PK
4874	32.71	V	33.98	10.22	34.25	42.66	54	11.34	AV
7311	/	V	33.98	10.22	34.25	/	74	/	/
9748	/	V	33.98	10.22	34.25	/	74	/	/
4874	41.89	H	33.98	10.22	34.25	51.84	74	22.16	PK
4874	32.10	H	33.98	10.22	34.25	42.05	54	11.95	AV
7311	/	H	33.98	10.22	34.25	/	74	/	/
9748	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode:IEEE 802.11n HT20 TX High									
4924	42.24	V	33.98	10.22	34.25	52.19	74	21.81	PK
4924	32.95	V	33.98	10.22	34.25	42.90	54	11.10	AV
7386	/	V	33.98	10.22	34.25	/	74	/	/
9848	/	V	33.98	10.22	34.25	/	74	/	/
4924	42.43	H	33.98	10.22	34.25	52.38	74	21.62	PK
4924	32.10	H	33.98	10.22	34.25	42.05	54	11.95	AV
7386	/	H	33.98	10.22	34.25	/	74	/	/
9848	/	H	33.98	10.22	34.25	/	74	/	/
Note:									
1, Result = Read level + Antenna factor + cable loss-Amp factor									
2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Test Mode:IEEE 802.11n HT40 TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4844	42.05	V	33.98	10.22	34.25	52.00	74	22.00	PK
4844	32.17	V	33.98	10.22	34.25	42.12	54	11.88	AV
7266	/	V	33.98	10.22	34.25	/	74	/	/
9688	/	V	33.98	10.22	34.25	/	74	/	/
4844	42.73	H	33.98	10.22	34.25	52.68	74	21.32	PK
4844	32.18	H	33.98	10.22	34.25	42.13	54	11.87	AV
7266	/	H	33.98	10.22	34.25	/	74	/	/
9688	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode:IEEE 802.11n HT40 TX Mid									
4874	42.60	V	33.98	10.22	34.25	52.55	74	21.45	PK
4874	32.44	V	33.98	10.22	34.25	42.39	54	11.61	AV
7311	/	V	33.98	10.22	34.25	/	74	/	/
9748	/	V	33.98	10.22	34.25	/	74	/	/
4874	42.85	H	33.98	10.22	34.25	52.80	74	21.20	PK
4874	32.22	H	33.98	10.22	34.25	42.17	54	11.83	AV
7311	/	H	33.98	10.22	34.25	/	74	/	/
9748	/	H	33.98	10.22	34.25	/	74	/	/
Test Mode:IEEE 802.11n HT40 TX High									
4904	42.07	V	33.98	10.22	34.25	52.02	74	21.98	PK
4904	33.06	V	33.98	10.22	34.25	43.01	54	10.99	AV
7356	/	V	33.98	10.22	34.25	/	74	/	/
9808	/	V	33.98	10.22	34.25	/	74	/	/
4904	41.90	H	33.98	10.22	34.25	51.85	74	22.15	PK
4904	31.53	H	33.98	10.22	34.25	41.48	54	12.52	AV
7356	/	H	33.98	10.22	34.25	/	74	/	/
9808	/	H	33.98	10.22	34.25	/	74	/	/

Note:

1, Result = Read level + Antenna factor + cable loss-Amp factor

2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 4. POWER LINE CONDUCTED EMISSION

### 4.1. Test Limits

Frequency MHz	Limits dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50


- Notes: 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.  
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

### 4.2. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10:2013 on Conducted Emission Measurement.


The bandwidth of test receiver is set at 9 kHz.

### 4.3. Test Setup

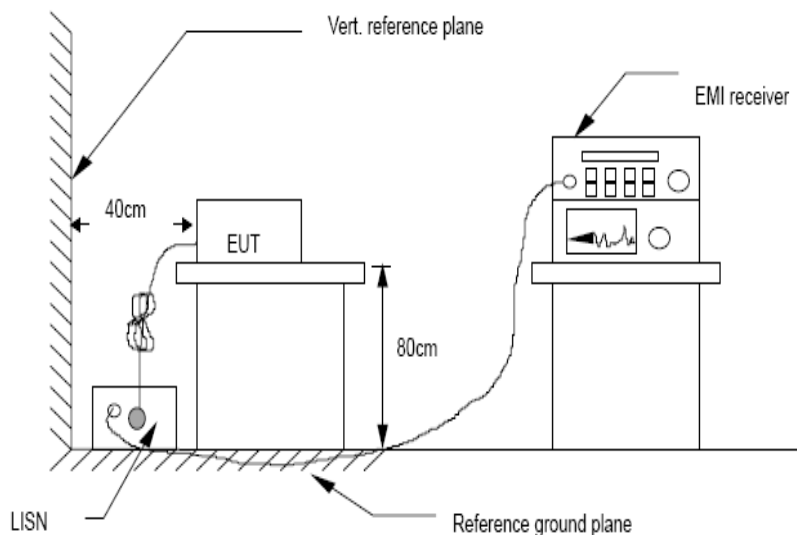


### 4.4. Test Results

<b>EUT Description</b>	Tier1time UP300D	<b>Model No.</b>	3DP-25-5F
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Line	<b>Test mode</b>	802.11b 2412MHz
<b>Test Voltage</b>	AC 120V/60Hz	<b>Adapter Model</b>	FSP330-AAAN3

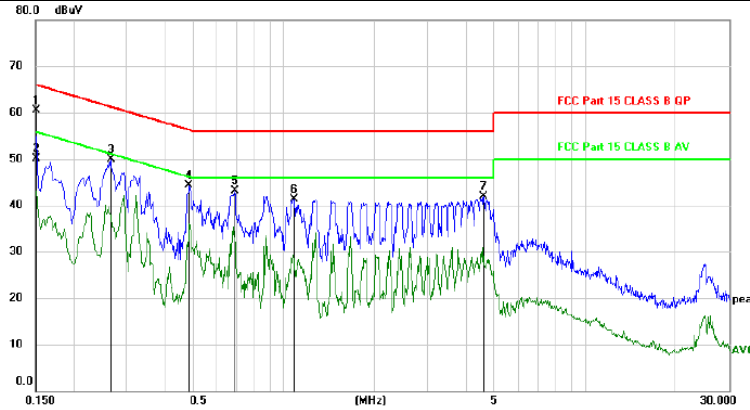

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1 *	0.1500	50.48	9.94	60.42	66.00	-5.58	QP	
2	0.1500	40.13	9.94	50.07	56.00	-5.93	AVG	
3	0.2670	39.99	9.95	49.94	61.21	-11.27	peak	
4	0.4860	34.40	9.96	44.36	56.24	-11.88	peak	
5	0.6870	33.15	9.93	43.08	56.00	-12.92	peak	
6	1.0770	31.39	9.91	41.30	56.00	-14.70	peak	
7	4.5990	31.95	10.01	41.96	56.00	-14.04	peak	

<b>Pol</b>	Neutral
------------	---------

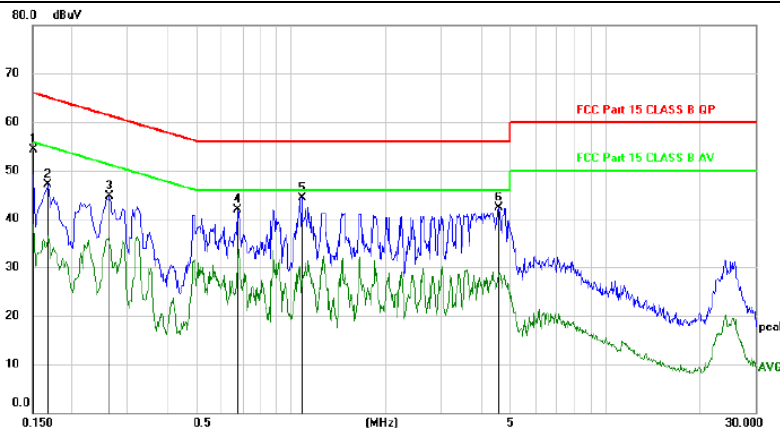


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1 *	0.1500	44.46	9.94	54.40	66.00	-11.60	peak	
2	0.1680	37.08	9.93	47.01	65.06	-18.05	peak	
3	0.2640	34.70	9.96	44.66	61.30	-16.64	peak	
4	0.6750	31.88	9.93	41.81	56.00	-14.19	peak	
5	1.0800	34.47	9.91	44.38	56.00	-11.62	peak	
6	4.5570	32.29	10.01	42.30	56.00	-13.70	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable




<b>EUT Description</b>	Tier1time UP300D	<b>Model No.</b>	3DP-25-5F
<b>Temperature</b>	24°C	<b>Humidity</b>	56%
<b>Pol</b>	Line	<b>Test mode</b>	802.11b 2412MHz
<b>Test Voltage</b>	AC 120V/60Hz	<b>Adapter Model</b>	FSP230-AAAN3

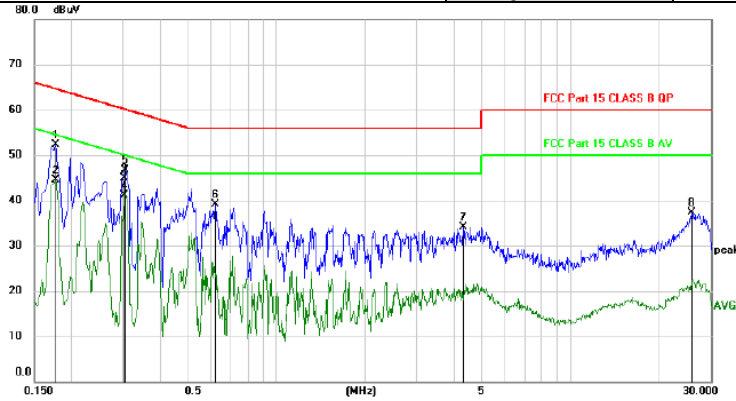

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1770	42.42	9.93	52.35	64.63	-12.28	peak	
2		0.1770	34.62	9.93	44.55	64.63	-10.08	AVG	
3		0.3030	34.93	9.92	44.85	60.16	-15.31	QP	
4	*	0.3030	31.11	9.92	41.03	50.16	-9.13	AVG	
5		0.3060	36.87	9.92	46.79	60.08	-13.29	peak	
6		0.6180	29.21	9.92	39.13	56.00	-16.87	peak	
7		4.3260	24.10	9.99	34.09	56.00	-21.91	peak	
8		25.8060	26.78	10.48	37.26	60.00	-22.74	peak	

<b>Pol</b>	Neutral
------------	---------

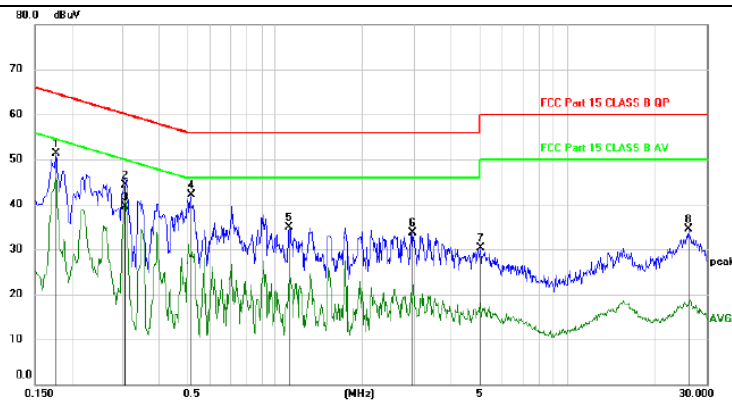

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1770	41.41	9.93	51.34	64.63	-13.29	peak	
2		0.3060	34.43	9.92	44.35	60.08	-15.73	QP	
3	*	0.3060	29.58	9.92	39.50	50.08	-10.58	AVG	
4		0.5130	32.23	9.95	42.18	56.00	-13.82	peak	
5		1.1160	25.04	9.90	34.94	56.00	-21.06	peak	
6		2.9520	23.69	9.95	33.64	56.00	-22.36	peak	
7		5.0460	20.22	10.04	30.26	60.00	-29.74	peak	
8		25.9560	24.04	10.48	34.52	60.00	-25.48	peak	

\*:Maximum data x:Over limit !:over margin

Note: Measurement=Reading Level+Correc Factor. Factor=(LISN or ISN or PLC or Current Probe)Factor+Cable

## 5. CONDUCTED MAXIMUM OUTPUT POWER

### 5.1. Test limits

Please refer RSS-247 & FCC PART 15: 15.247.

Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1 W(30dBm)

### 5.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02


5.2.1 Place the EUT on the table and set it in transmitting mode.

5.2.2 Connected the EUT's antenna port to peak power meter by 20dB attenuator.

5.2.3 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

### 5.3. Test Setup

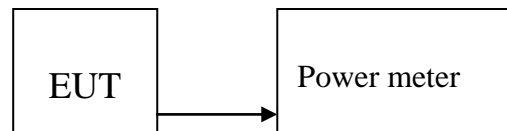

### 5.4. Test Results

PASS

Detailed information please see the following page.

Mode	Frequency (MHz)	PK Output power(dBm)	Limit (dBm)	Result
IEEE 802.11 b	CH1: 2412	7.335	30	PASS
	CH6: 2437	7.560	30	PASS
	CH11: 2462	7.614	30	PASS
IEEE 802.11 g	CH1: 2412	7.578	30	PASS
	CH6: 2437	<b>7.705</b>	30	PASS
	CH11: 2462	7.413	30	PASS
IEEE 802.11 n/HT20	CH1: 2412	6.594	30	PASS
	CH6: 2437	7.140	30	PASS
	CH11: 2462	7.051	30	PASS
IEEE 802.11 n/HT40	CH3: 2422	6.976	30	PASS
	CH6: 2437	6.916	30	PASS
	CH9: 2452	7.223	30	PASS

## 6. PEAK POWER SPECTRAL DENSITY

### 6.1. Test limits

6.1.1 Please refer RSS-247 & FCC PART 15: 15.247.

6.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

6.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### 6.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

6.2.1 Place the EUT on the table and set it in transmitting mode.


6.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

6.2.3 Set the spectrum analyzer as  $RBW = 3\text{kHz}$  (Set the  $RBW$  to:  $3\text{ kHz} \leq RBW \leq 100\text{ kHz}$ .),  $VBW = 10\text{kHz}$  (Set the  $VBW \geq 3 \times RBW$ ),  $span \geq 1.5 \times DTS$  bandwidth., detail see the test plot.

6.2.4 Record the max reading.

6.2.5 Repeat the above procedure until the measurements for all frequencies are completed.


### 6.3. Test Setup

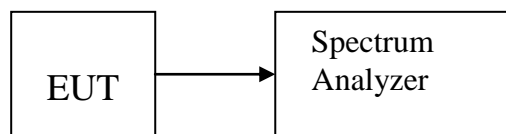

### 6.4. Test Results


Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	802.11b	2412	Ant 1	-18.648	8	Pass
NVNT	802.11b	2437	Ant 1	-18.591	8	Pass
NVNT	802.11b	2462	Ant 1	-18.957	8	Pass
NVNT	802.11g	2412	Ant 1	-25.458	8	Pass
NVNT	802.11g	2437	Ant 1	-25.067	8	Pass
NVNT	802.11g	2462	Ant 1	-24.341	8	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-26.652	8	Pass
NVNT	802.11n(HT20)	2437	Ant 1	-25.683	8	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-26.154	8	Pass
NVNT	802.11n(HT40)	2422	Ant 1	-16.950	8	Pass
NVNT	802.11n(HT40)	2437	Ant 1	-25.349	8	Pass
NVNT	802.11n(HT40)	2452	Ant 1	-24.446	8	Pass

PSD NVNT 802.11b 2412MHz Ant1

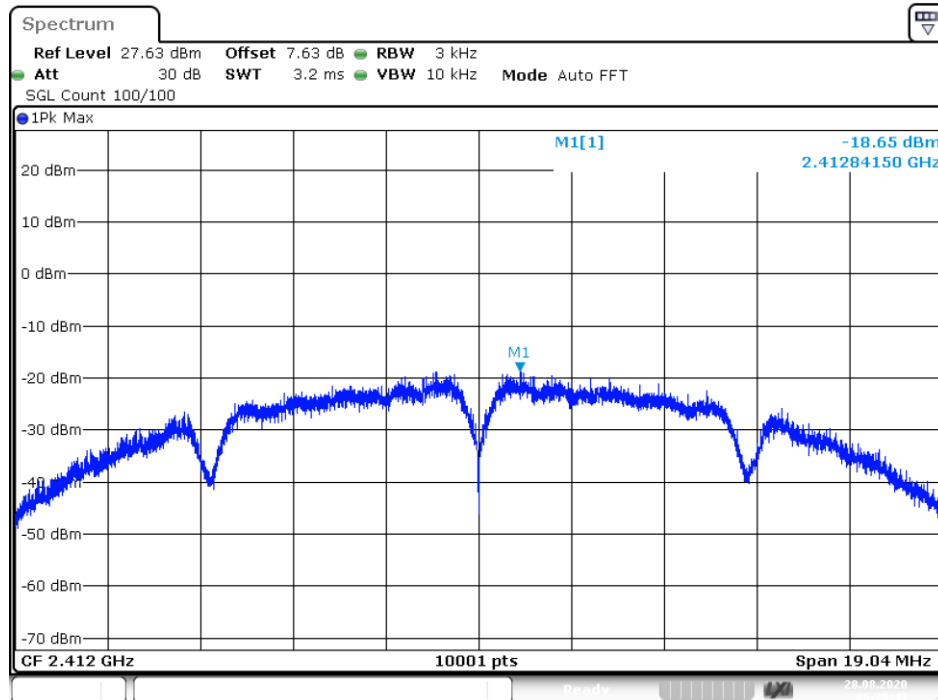


Date: 28.AUG.2020 06:29:49

PSD NVNT 802.11b 2437MHz Ant1

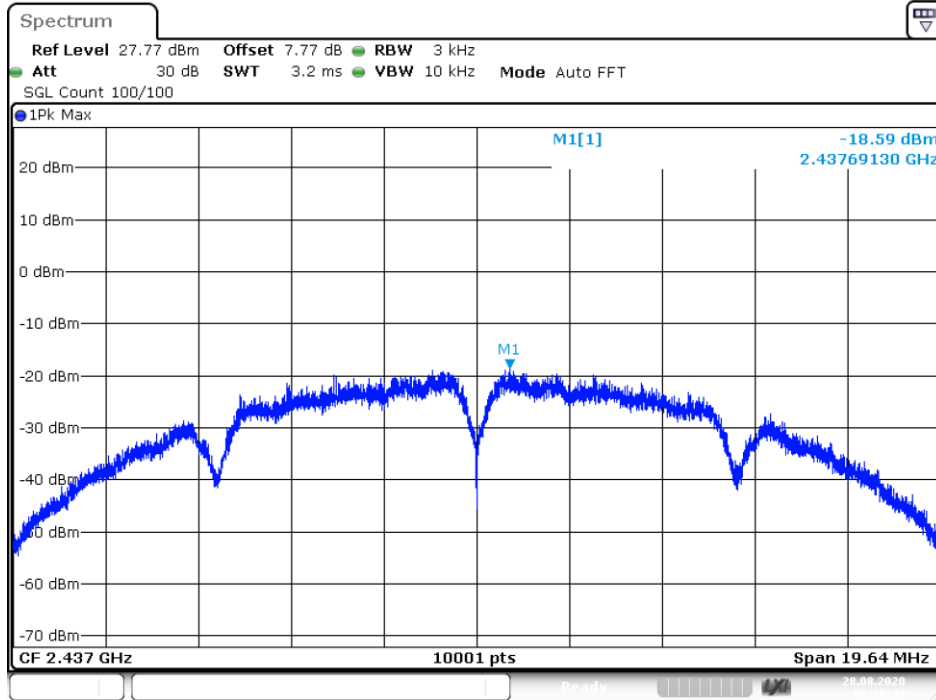


Date: 28.AUG.2020 06:36:12

PSD NVNT 802.11b 2462MHz Ant1

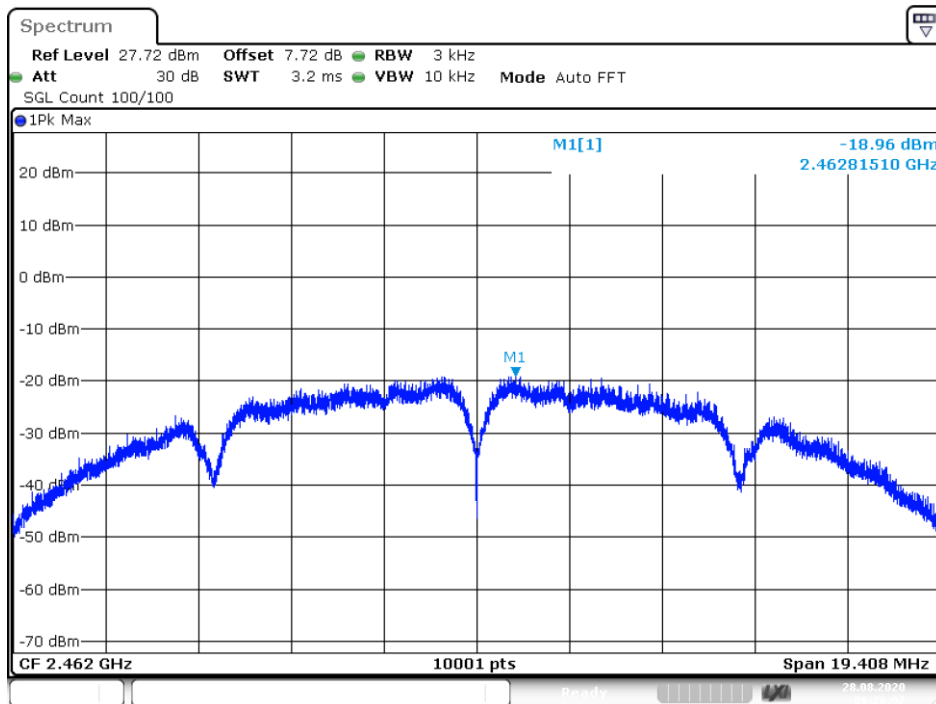


Date: 28.AUG.2020 06:26:07

### PSD NVNT 802.11g 2412MHz Ant1

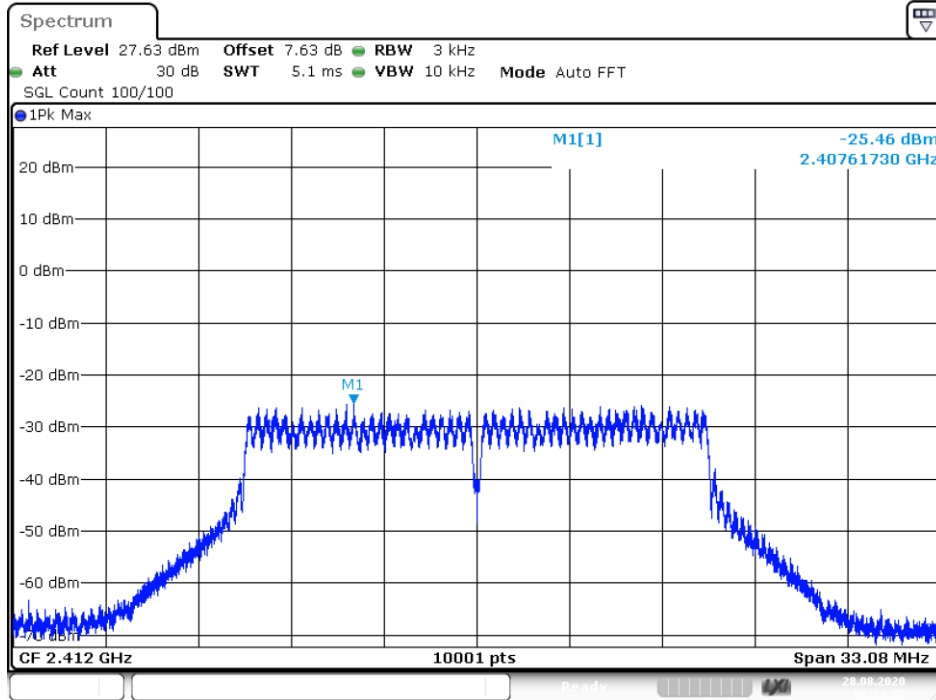


Date: 28.AUG.2020 06:14:55

### PSD NVNT 802.11g 2437MHz Ant1

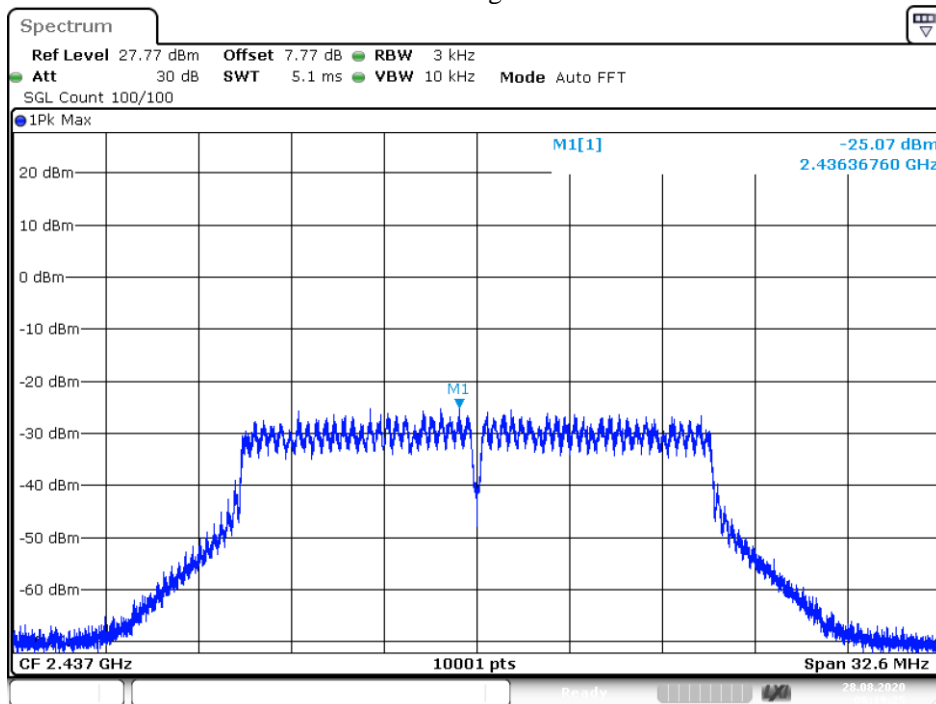


Date: 28.AUG.2020 06:19:25

PSD NVNT 802.11g 2462MHz Ant1

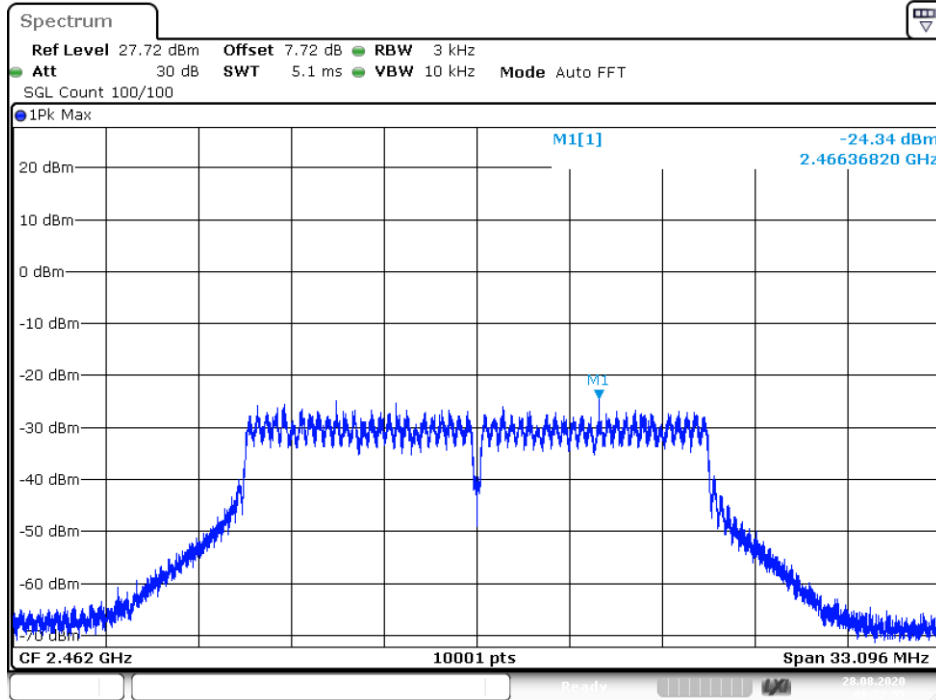

Date: 28.AUG.2020 06:22:54


PSD NVNT 802.11n(HT20) 2412MHz Ant1

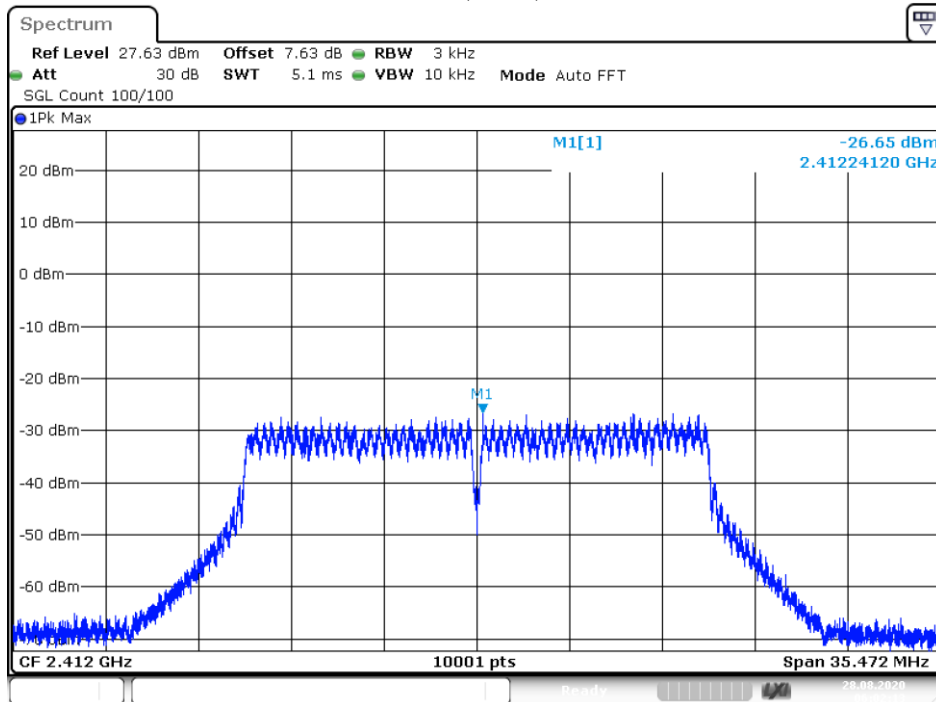

Date: 28.AUG.2020 06:02:13




PSD NVNT 802.11n(HT20) 2437MHz Ant1

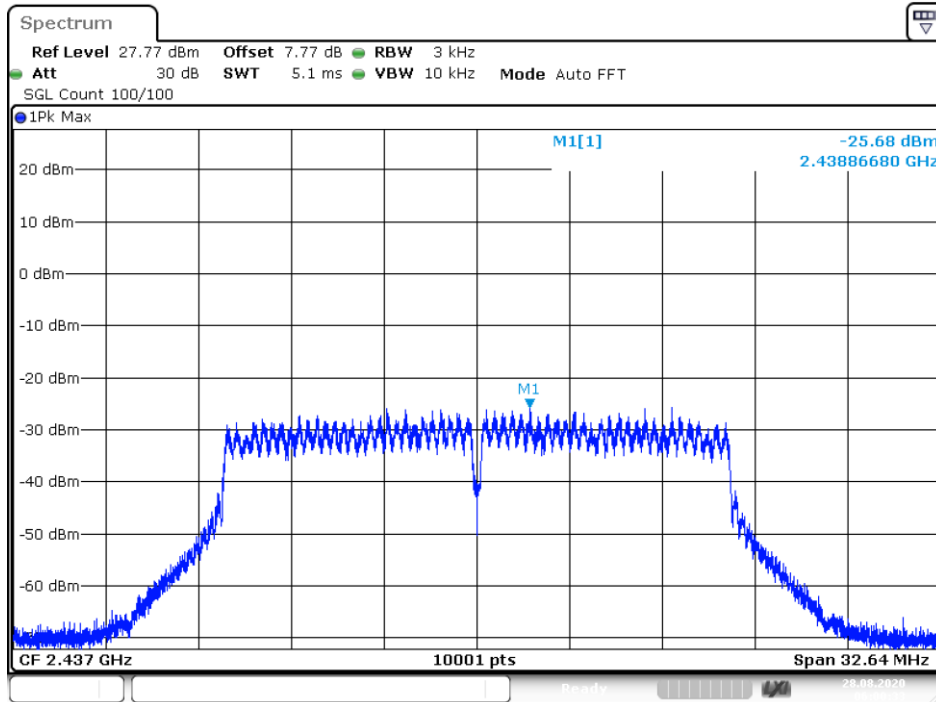


Date: 28.AUG.2020 06:00:33

PSD NVNT 802.11n(HT20) 2462MHz Ant1

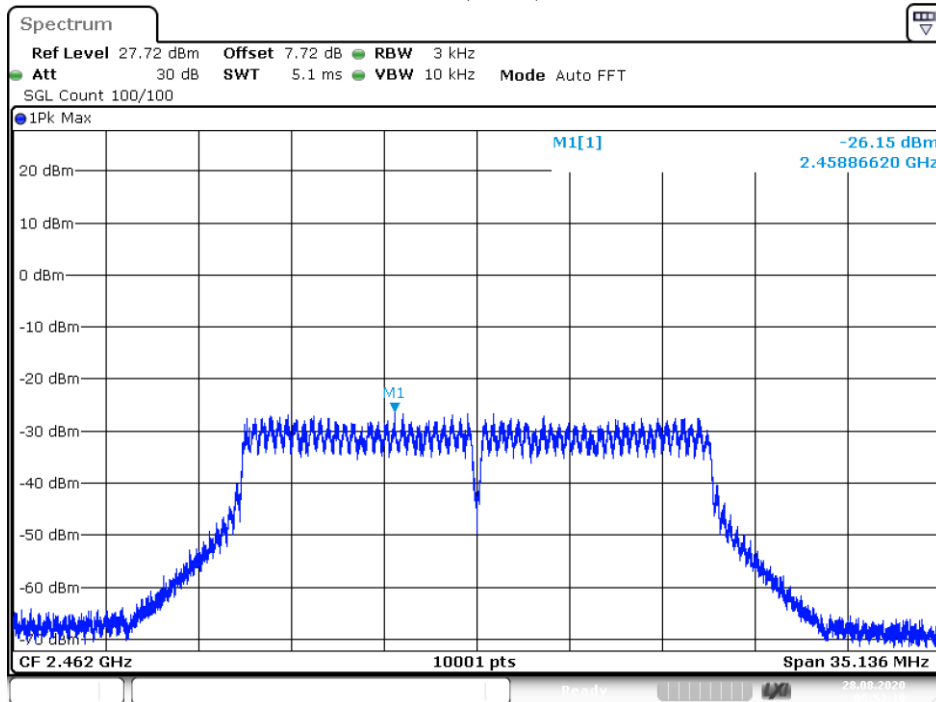


Date: 28.AUG.2020 05:53:18

PSD NVNT 802.11n(HT40) 2422MHz Ant1

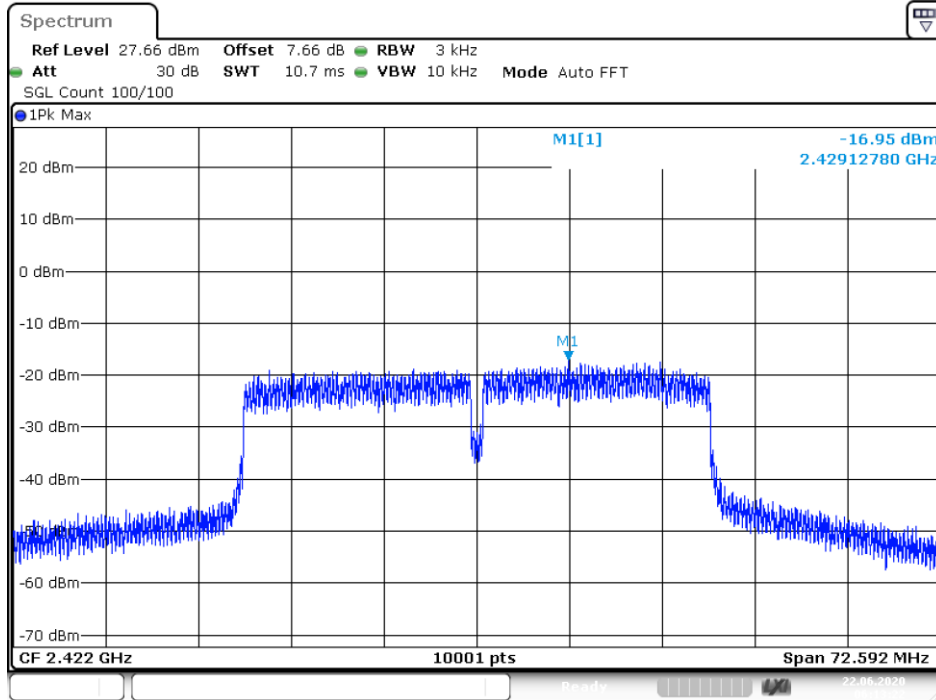


Date: 28.AUG.2020 06:05:56

PSD NVNT 802.11n(HT40) 2437MHz Ant1

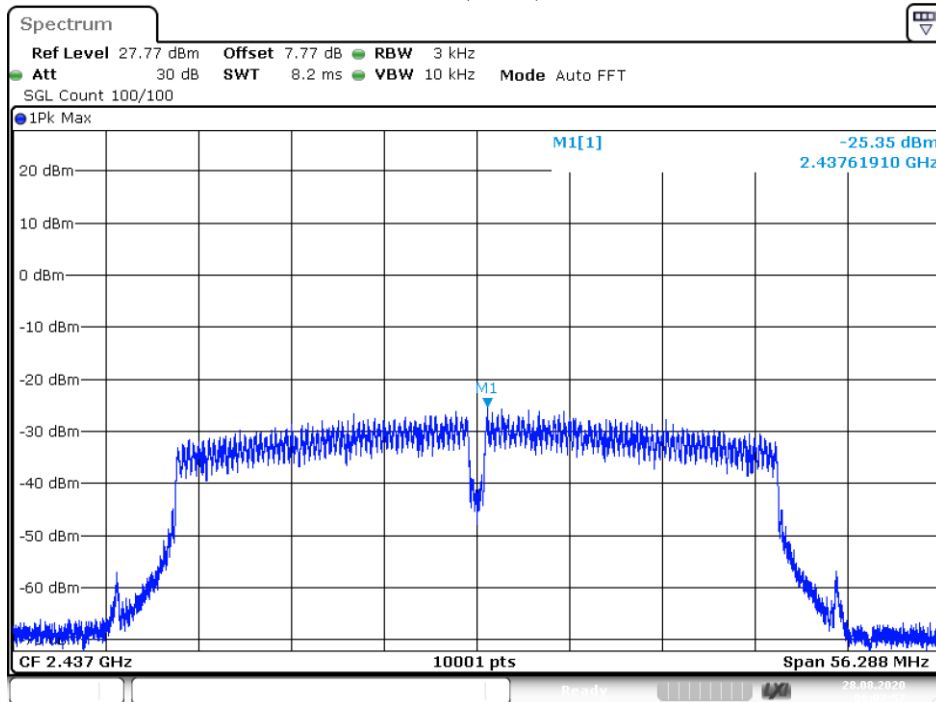

Date: 28.AUG.2020 06:07:57

PSD NVNT 802.11n(HT40) 2452MHz Ant1

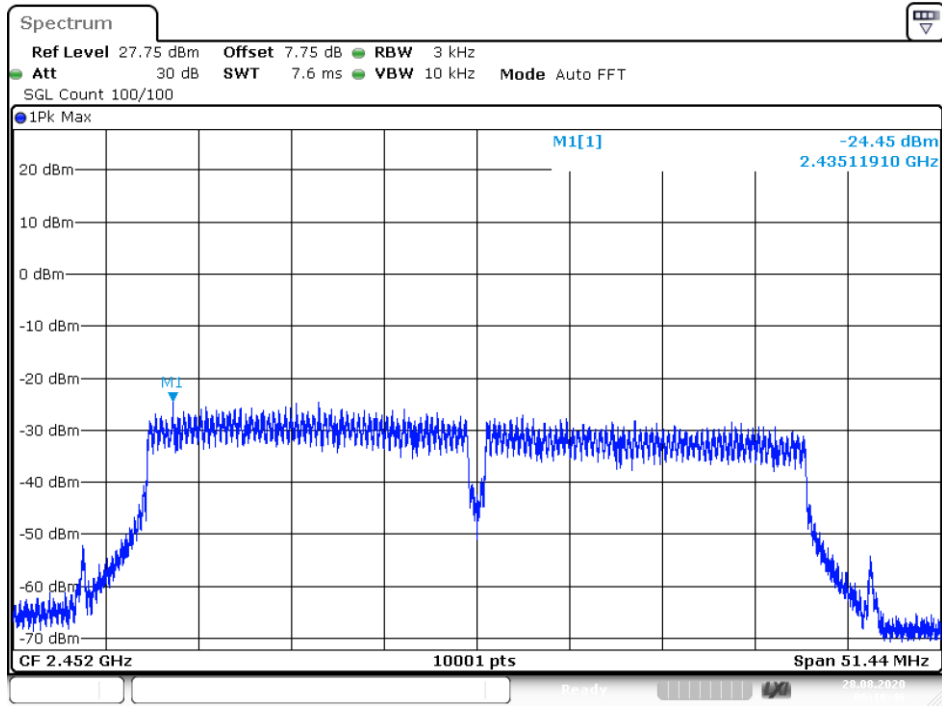

Date: 28.AUG.2020 06:10:45

## 7. BANDWIDTH

### 7.1. Test limits

Please refer RSS-247 & FCC PART 15: 15.247


For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 7.2. Test Procedure

Details see the KDB558074 D01 Meas Guidance v05r02

- a) The bandwidth is measured at an amplitude level reduced 6dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver set RBW = 100kHz, VBW  $\geq 3 * RBW = 300kHz$ ., Peak Detector, Sweep time set auto, detail see the test plot.


### 7.3. Test Setup

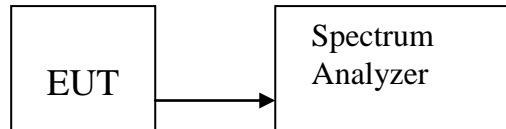

### 7.4. Test Results


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11b	2412	Ant 1	15.5184	9.52	0.5	Pass
NVNT	802.11b	2437	Ant 1	14.5905	9.82	0.5	Pass
NVNT	802.11b	2462	Ant 1	15.4105	9.704	0.5	Pass
NVNT	802.11g	2412	Ant 1	16.5663	16.54	0.5	Pass
NVNT	802.11g	2437	Ant 1	16.8263	16.3	0.5	Pass
NVNT	802.11g	2462	Ant 1	16.9263	16.548	0.5	Pass
NVNT	802.11n(HT20)	2412	Ant 1	17.8382	17.736	0.5	Pass
NVNT	802.11n(HT20)	2437	Ant 1	17.5542	16.32	0.5	Pass
NVNT	802.11n(HT20)	2462	Ant 1	18.1742	17.568	0.5	Pass
NVNT	802.11n(HT40)	2422	Ant 1	36.0204	14.464	0.5	Pass
NVNT	802.11n(HT40)	2437	Ant 1	35.6524	28.144	0.5	Pass
NVNT	802.11n(HT40)	2452	Ant 1	36.0124	25.72	0.5	Pass

OBW NVNT 802.11b 2412MHz Ant1

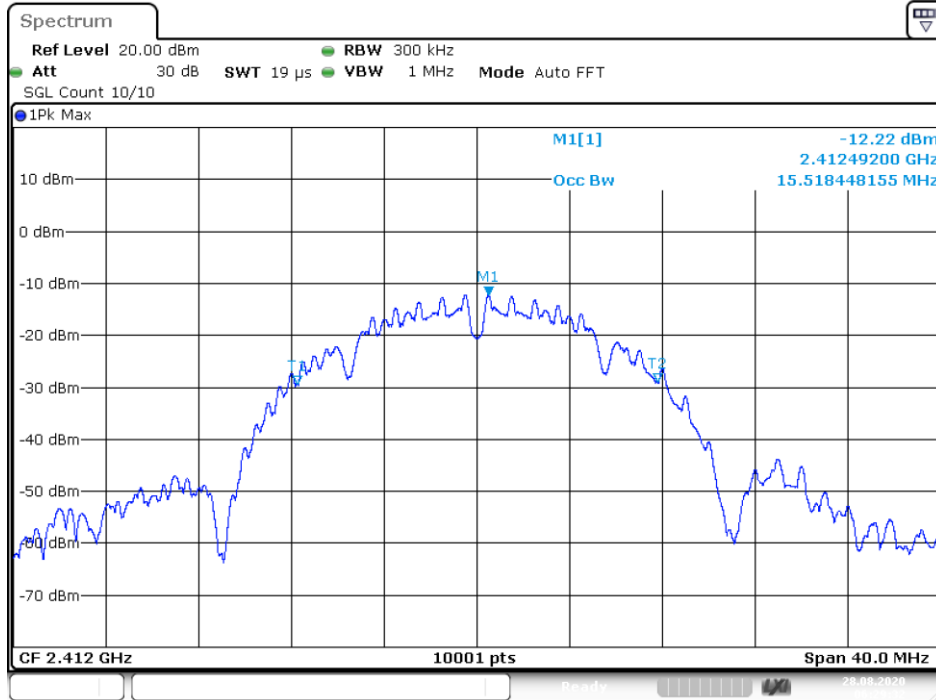


Date: 28.AUG.2020 06:29:32

-6 dB BW NVNT 802.11b 2412MHz Ant1

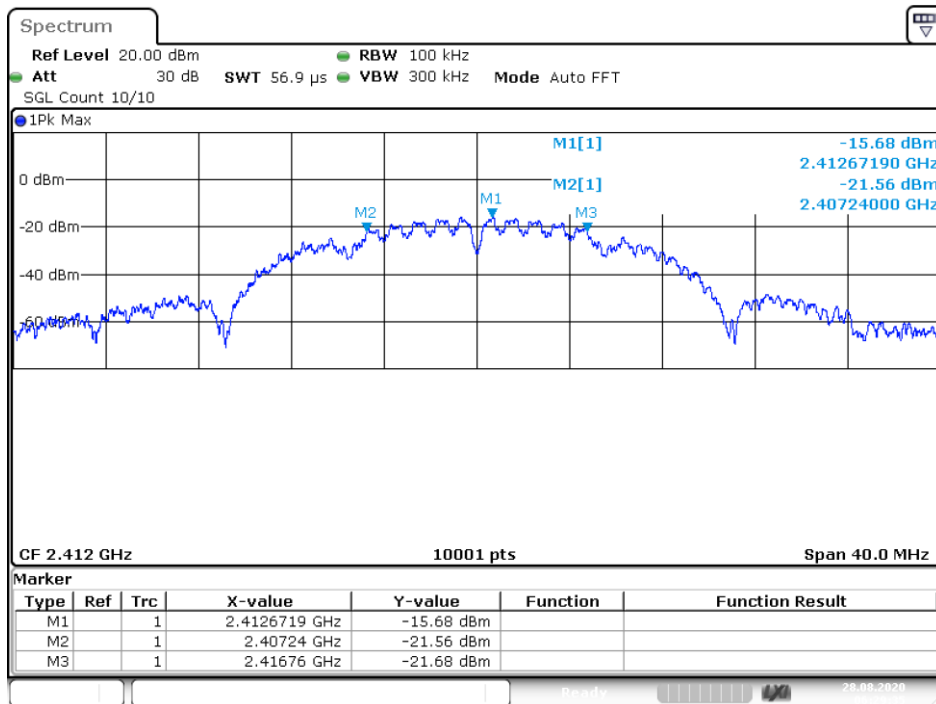


Date: 28.AUG.2020 06:29:35


OBW NVNT 802.11b 2437MHz Ant1

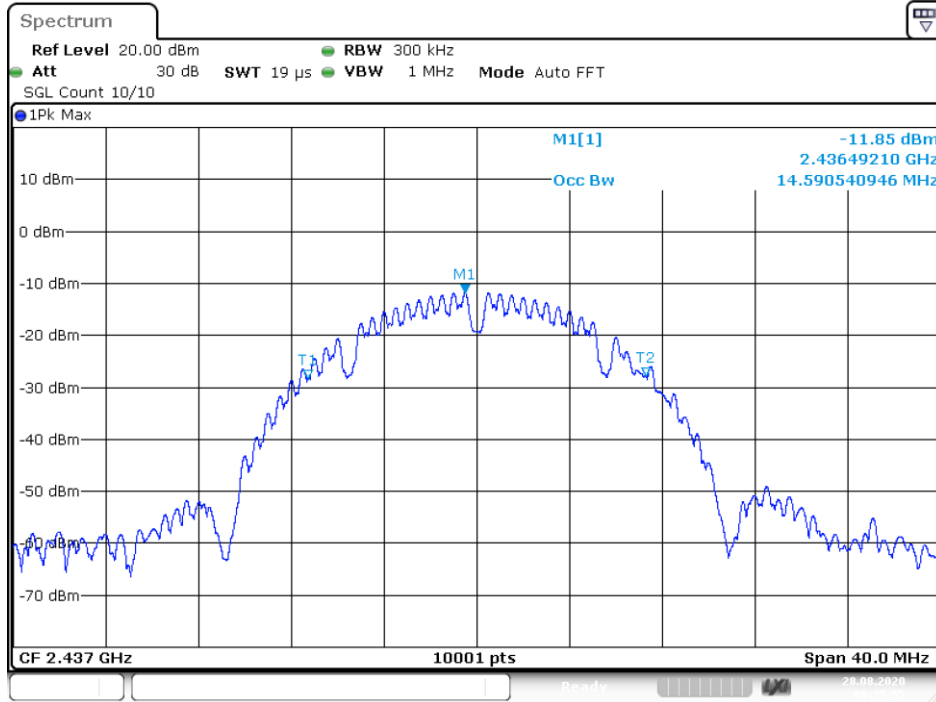

-6 dB BW NVNT 802.11b 2437MHz Ant1

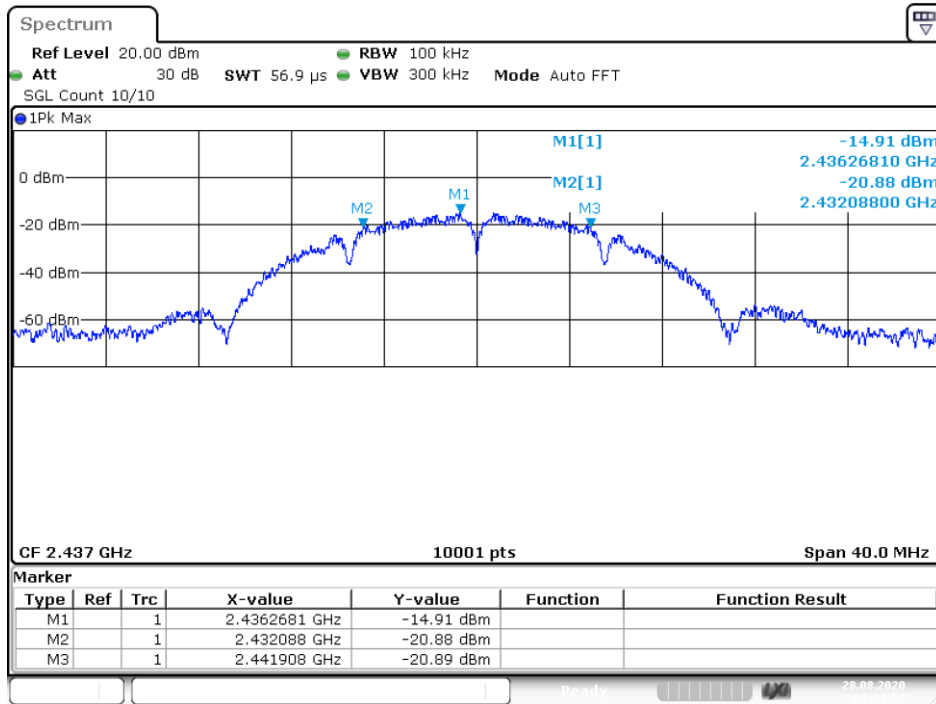


OBW NVNT 802.11b 2462MHz Ant1

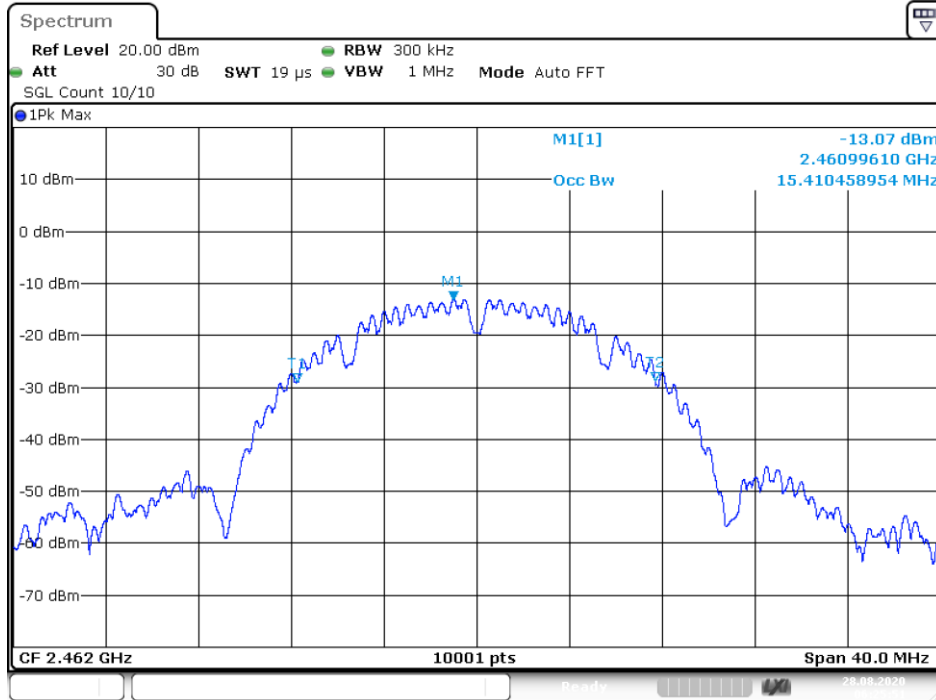


Date: 28.AUG.2020 06:25:50

-6 dB BW NVNT 802.11b 2462MHz Ant1

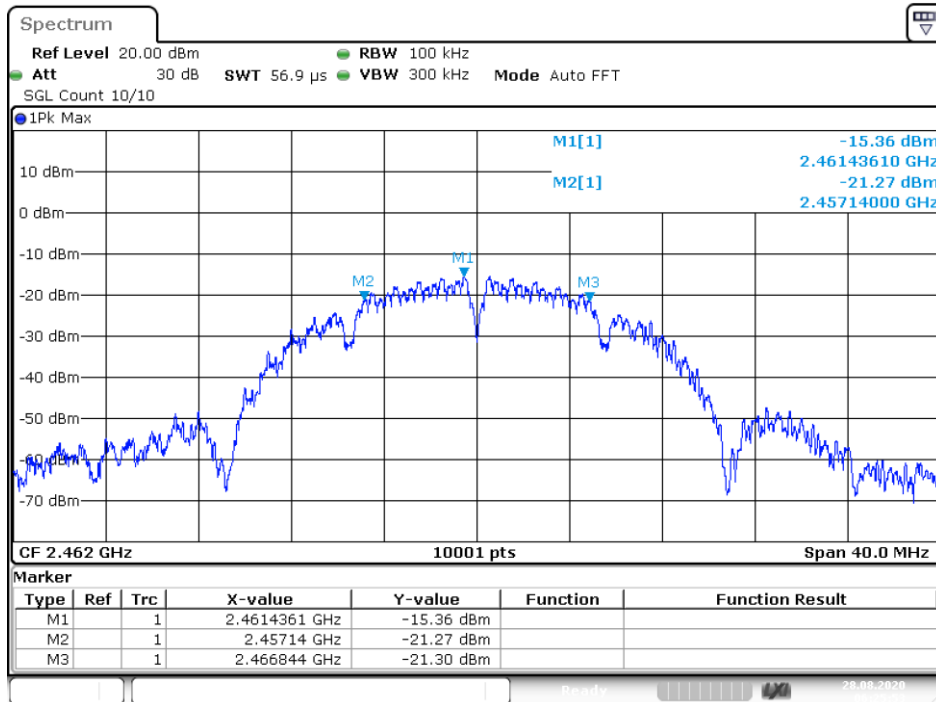


Date: 28.AUG.2020 06:25:53

OBW NVNT 802.11g 2412MHz Ant1

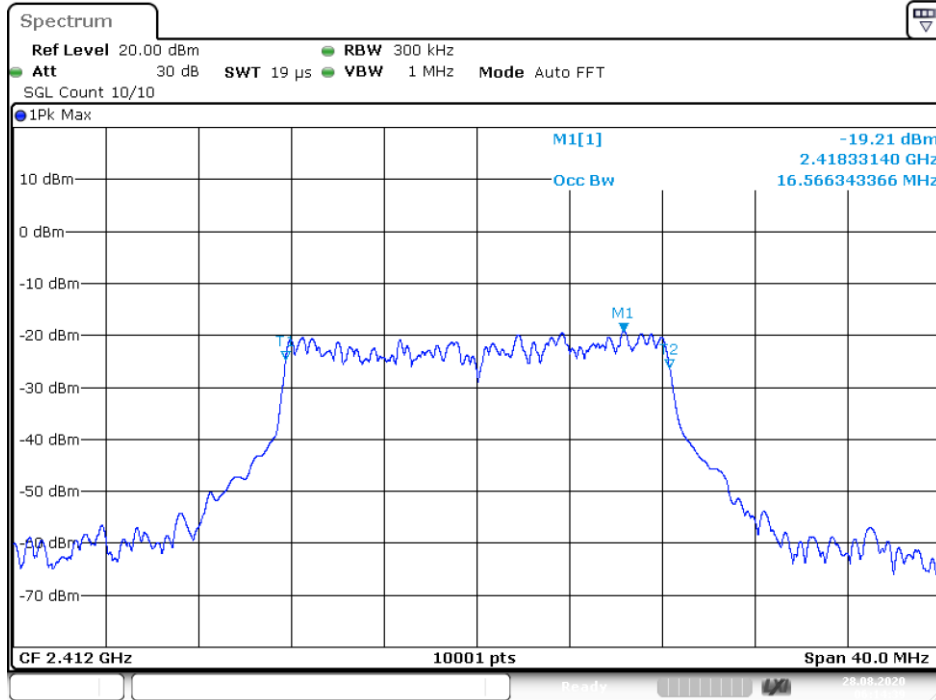


-6 dB BW NVNT 802.11g 2412MHz Ant1

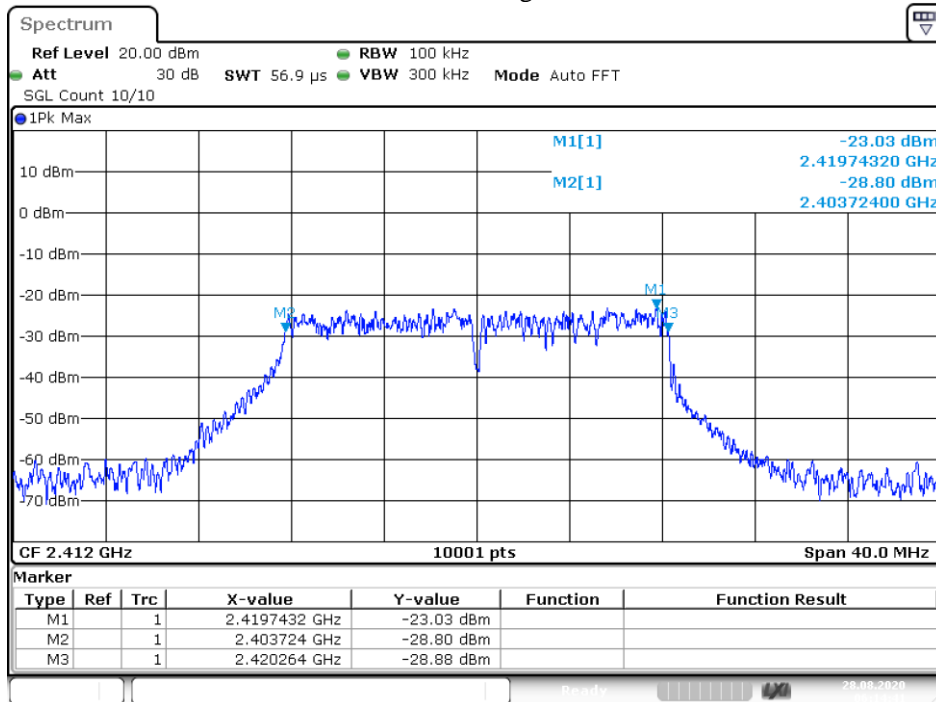





OBW NVNT 802.11g 2437MHz Ant1

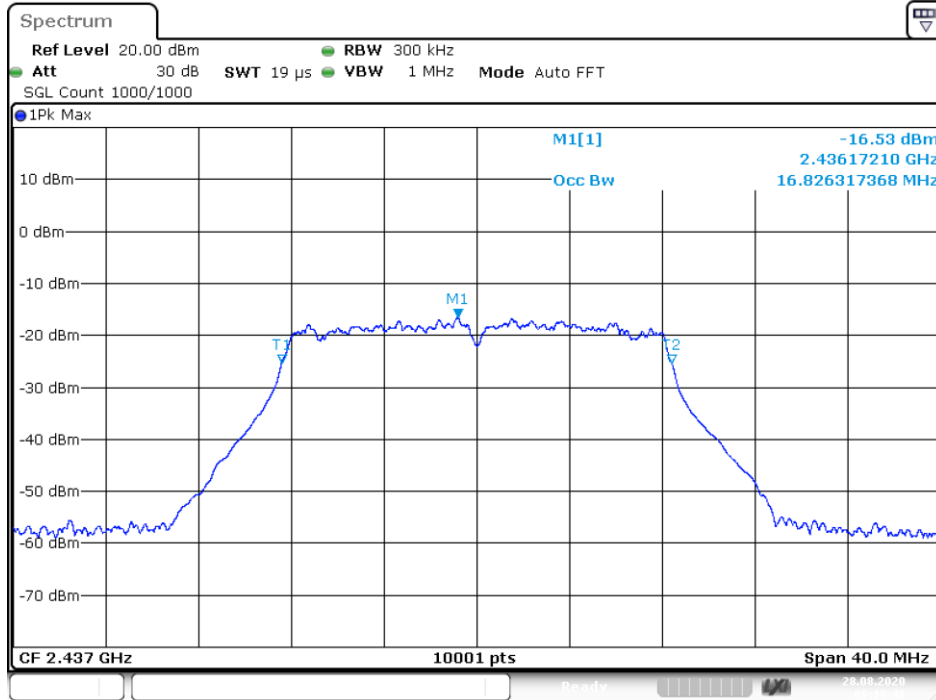

-6 dB BW NVNT 802.11g 2437MHz Ant1

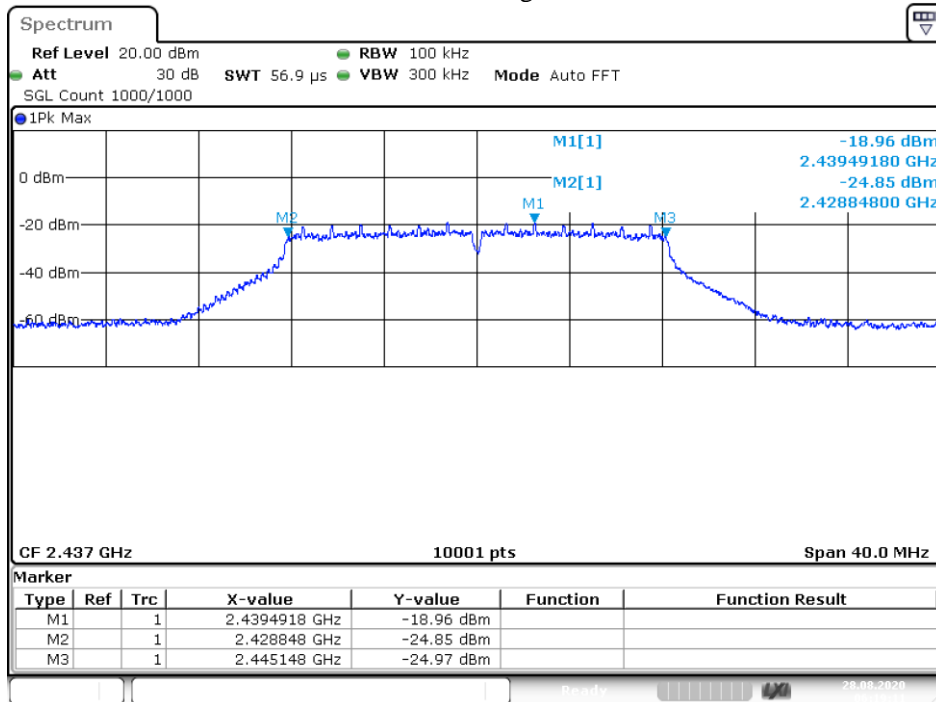


OBW NVNT 802.11g 2462MHz Ant1

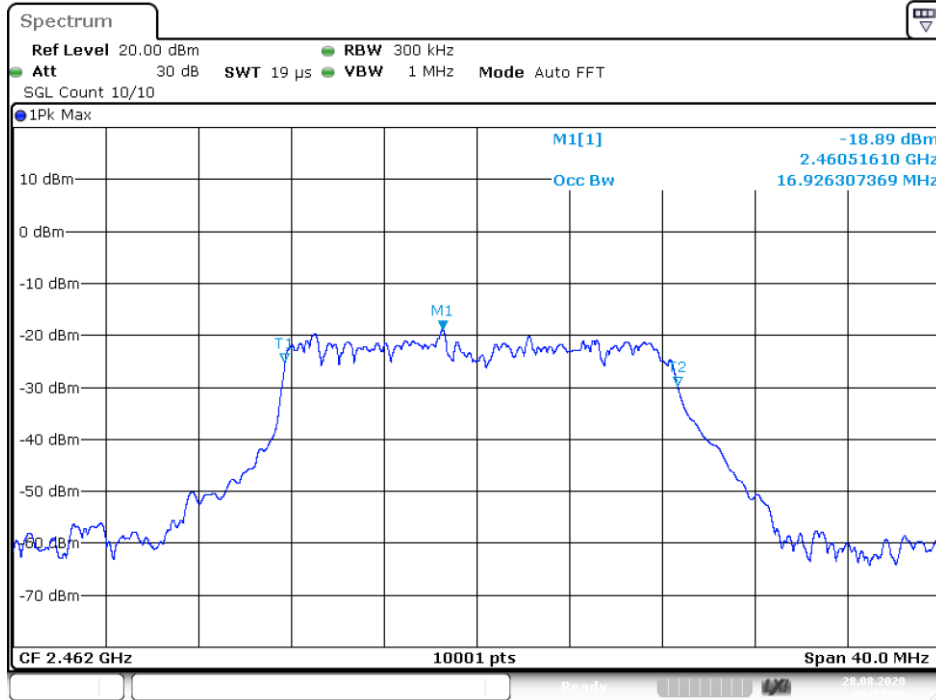


Date: 28.AUG.2020 06:22:37

-6 dB BW NVNT 802.11g 2462MHz Ant1

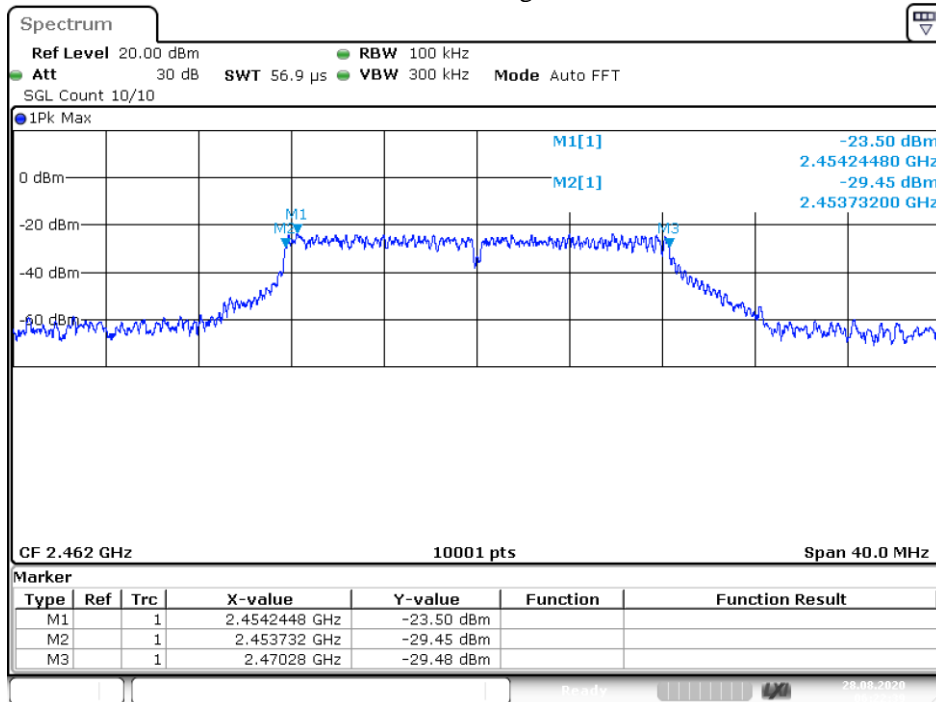


Date: 28.AUG.2020 06:22:39


OBW NVNT 802.11n(HT20) 2412MHz Ant1

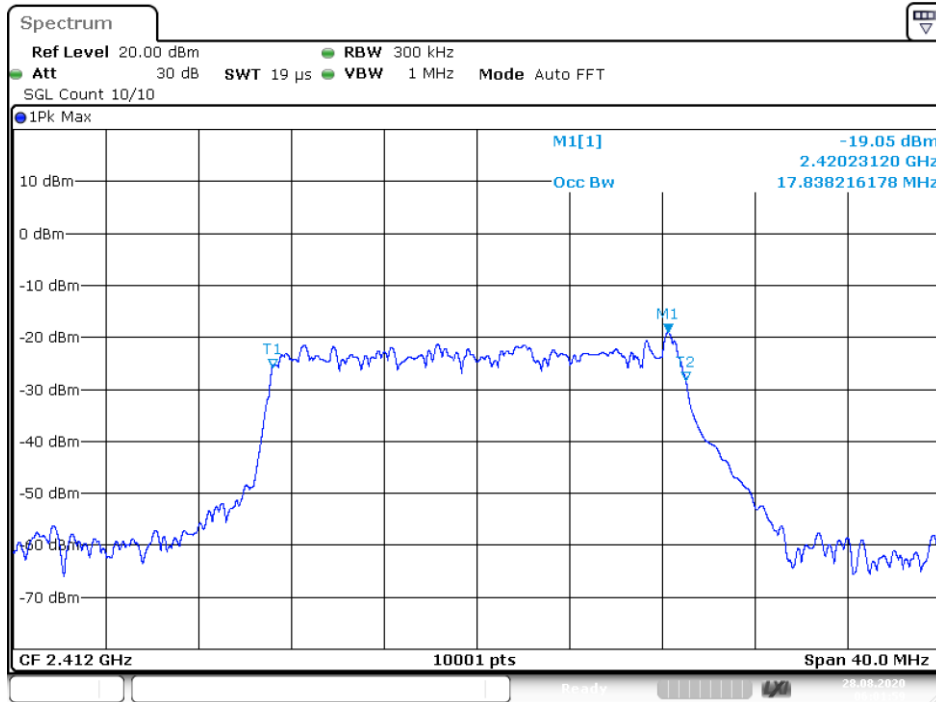


-6 dB BW NVNT 802.11n(HT20) 2412MHz Ant1

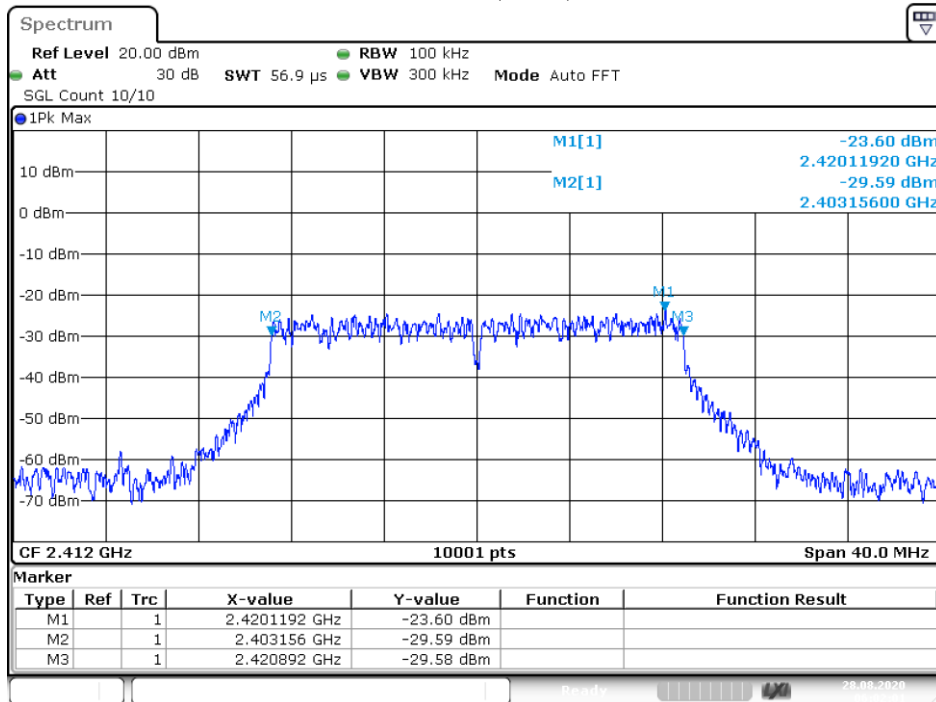


OBW NVNT 802.11n(HT20) 2437MHz Ant1

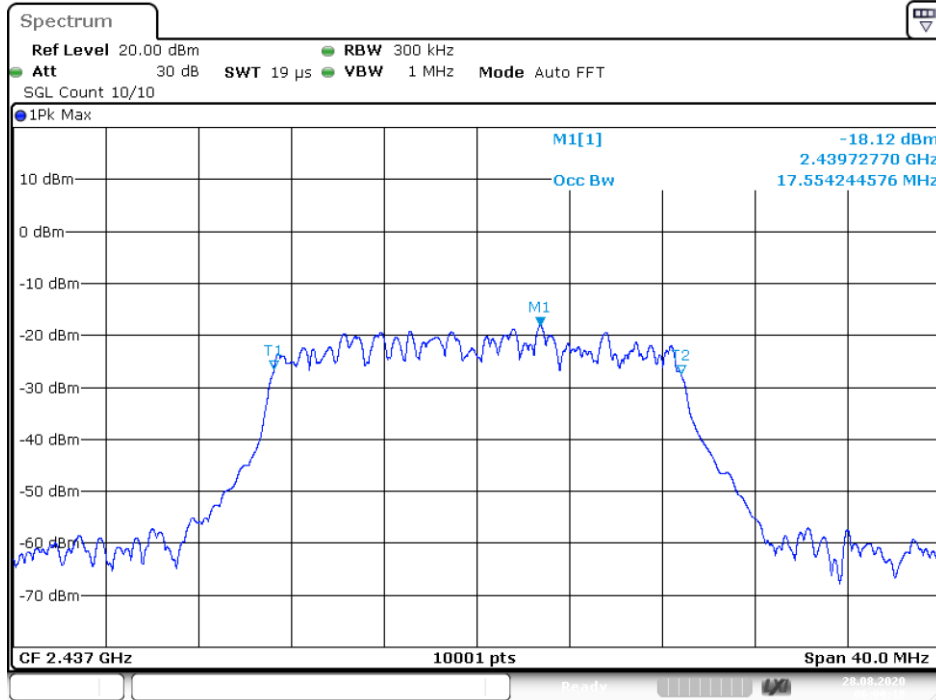


-6 dB BW NVNT 802.11n(HT20) 2437MHz Ant1

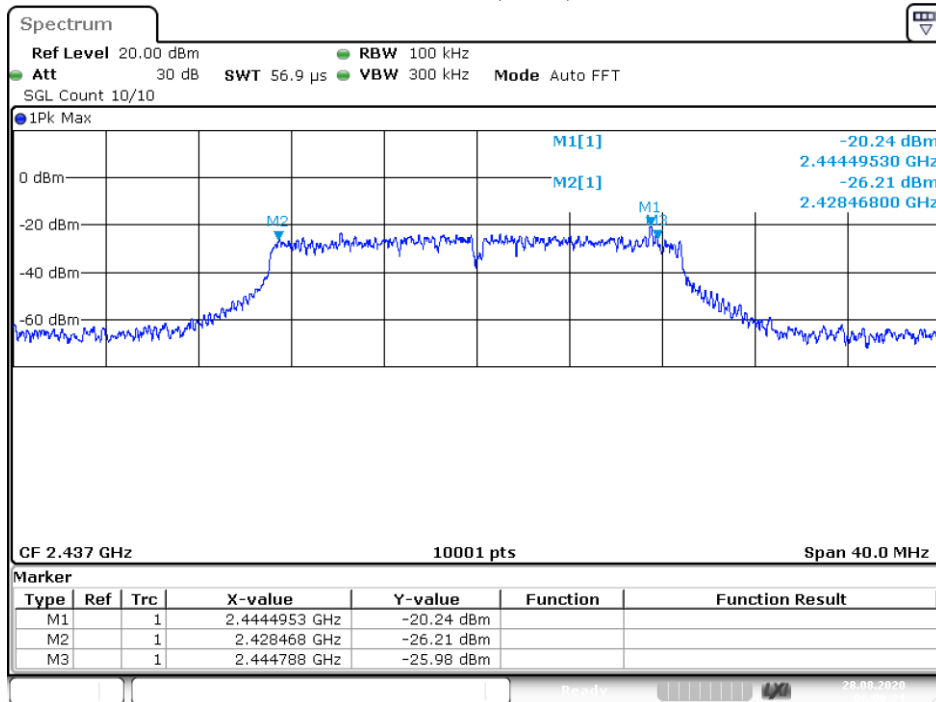


OBW NVNT 802.11n(HT20) 2462MHz Ant1

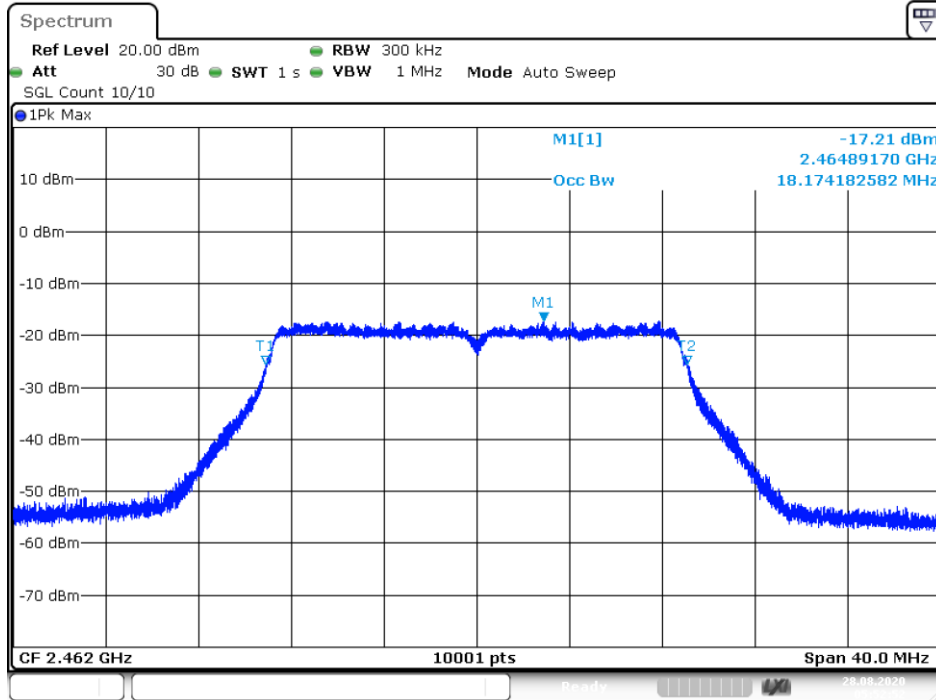

-6 dB BW NVNT 802.11n(HT20) 2462MHz Ant1

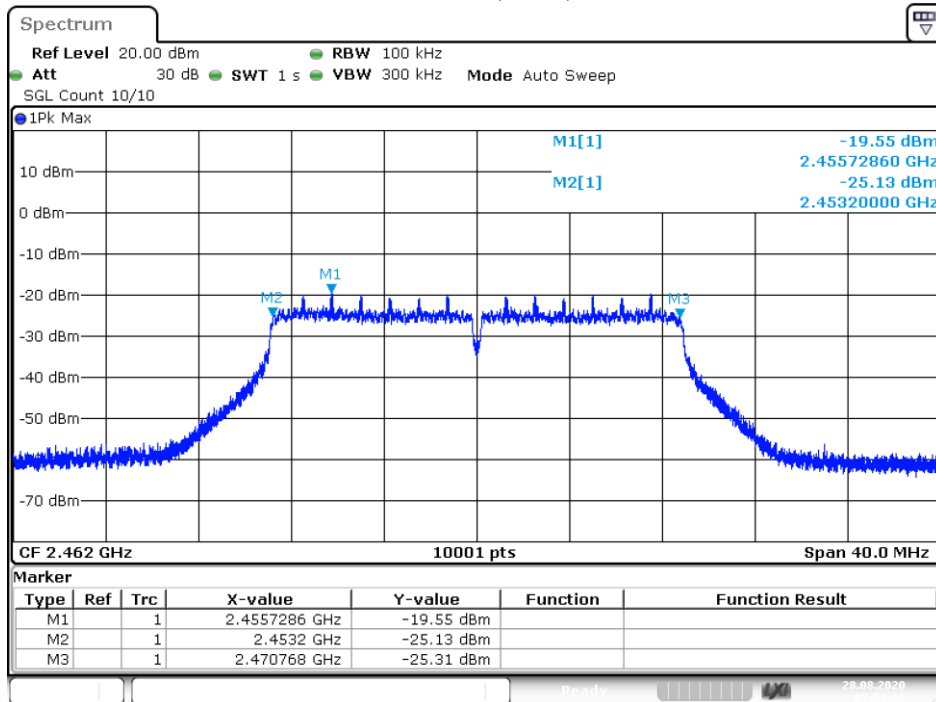


OBW NVNT 802.11n(HT40) 2422MHz Ant1

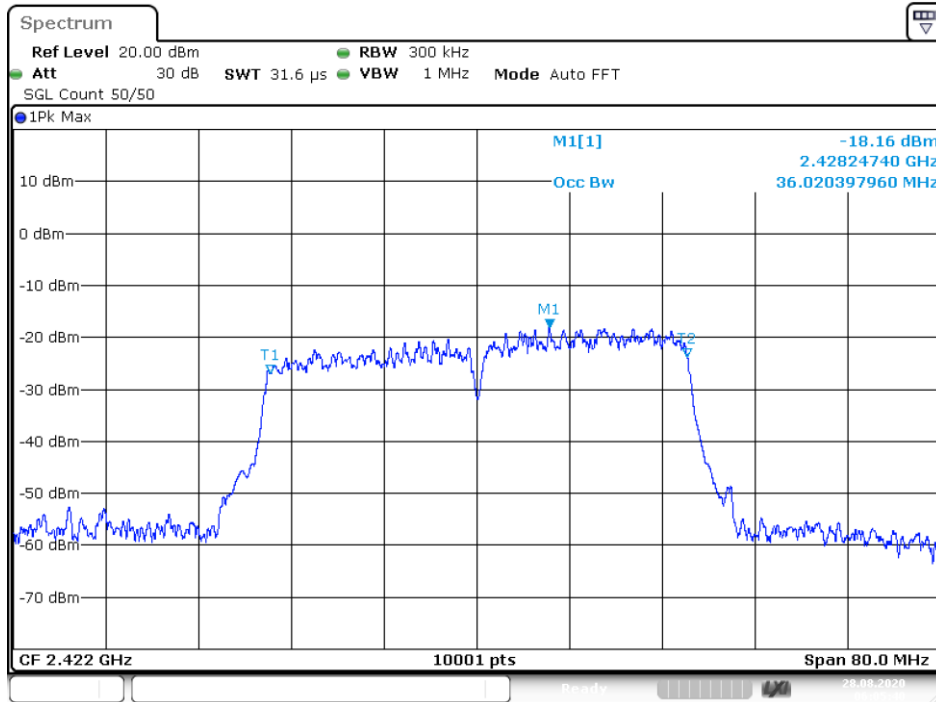


Date: 28.AUG.2020 06:05:40

-6 dB BW NVNT 802.11n(HT40) 2422MHz Ant1

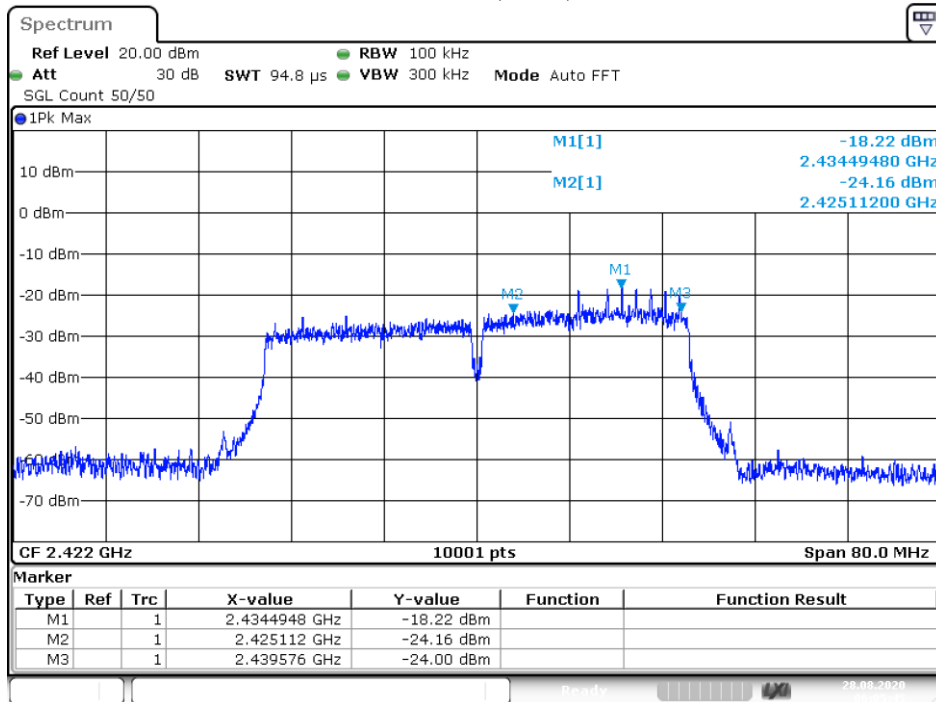


Date: 28.AUG.2020 06:05:44

OBW NVNT 802.11n(HT40) 2437MHz Ant1

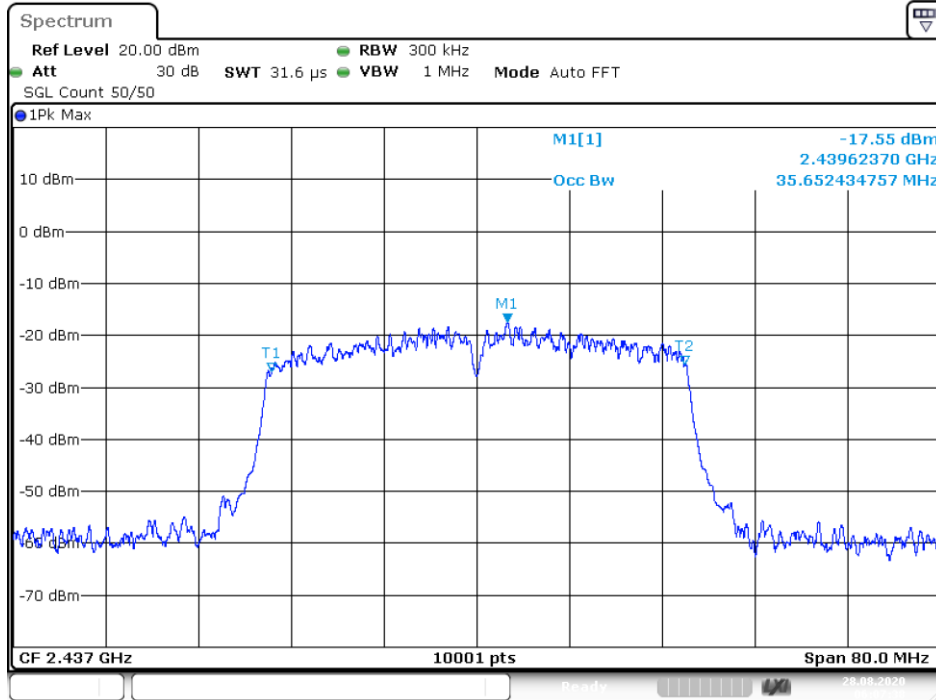


Date: 28.AUG.2020 06:07:38

-6 dB BW NVNT 802.11n(HT40) 2437MHz Ant1

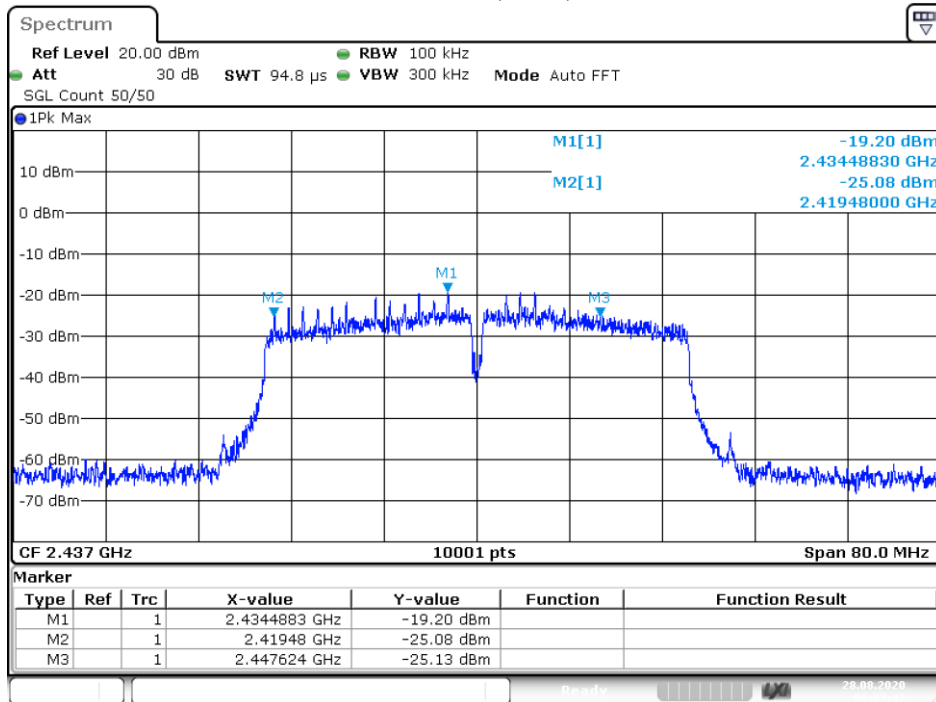


Date: 28.AUG.2020 06:07:42

OBW NVNT 802.11n(HT40) 2452MHz Ant1

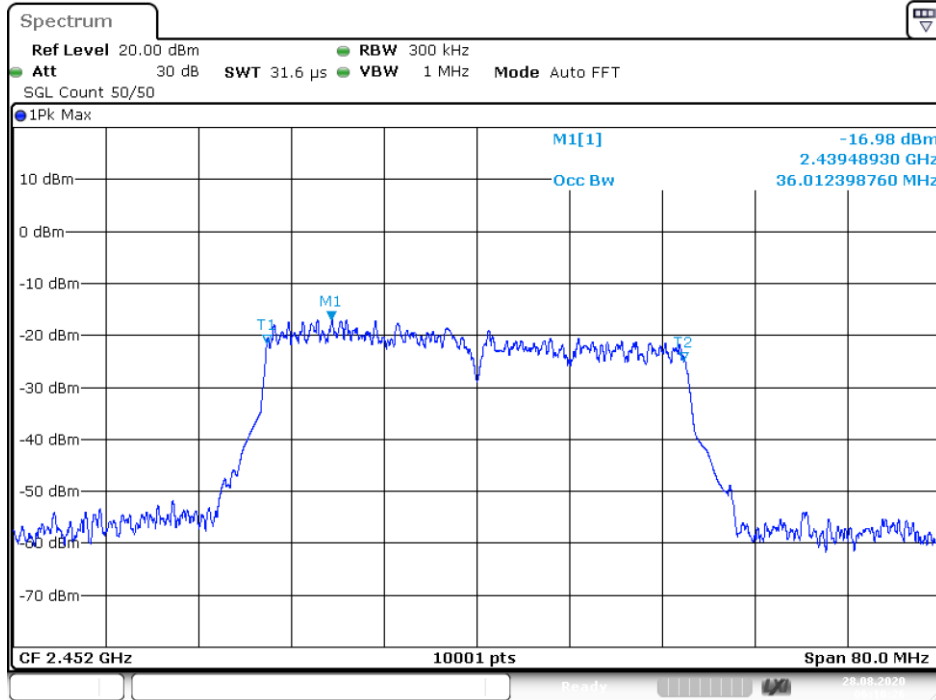

Date: 28.AUG.2020 06:10:26

-6 dB BW NVNT 802.11n(HT40) 2452MHz Ant1

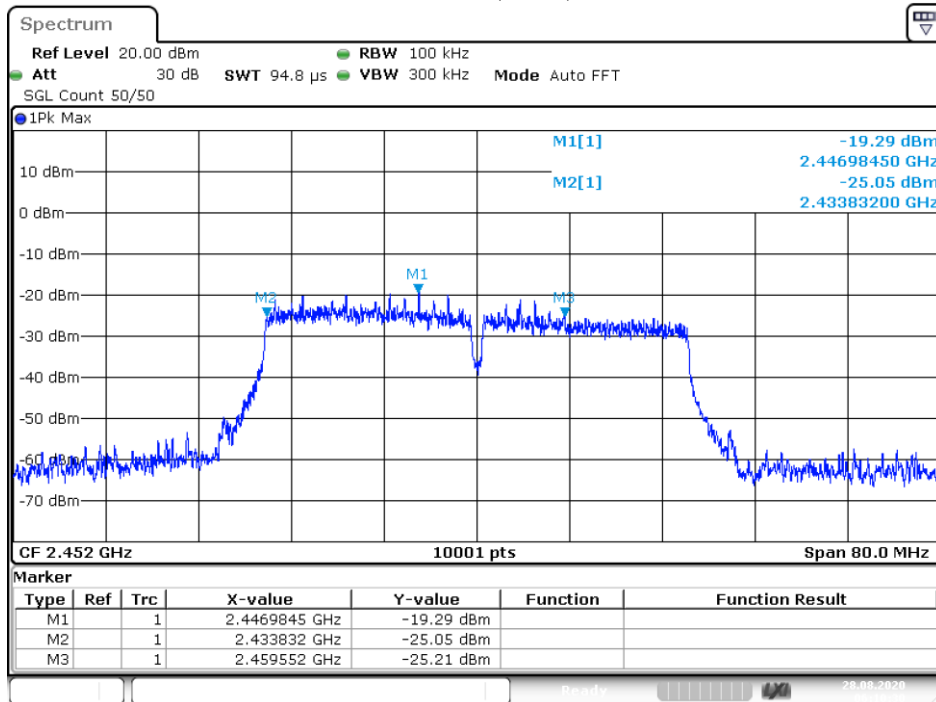

Date: 28.AUG.2020 06:10:30



## **8. BAND EDGE CHECK**

### **8.1. Test limits**

Please refer RSS-GEN & FCC PART 15: 15.247

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits and RSS-GEN limits.

### **8.2. Test Procedure**

Details see the KDB558074 D01 Meas Guidance v05r02

8.2.1 Put the EUT on a 1.5m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

8.2.2 Check the spurious emissions out of band.

8.2.3 RBW 1MHz, VBW 3MHz, peak detector for peak value , RBW 1MHz ,VBW 10Hz , RMS detector for AV value.

### **8.3. Test Setup**


Same as 5.2.2.

### **8.4. Test Results**

PASS.


Detailed information please see the following page.

Test Mode: IEEE 802.11b-Low  
Polarization: Vertical

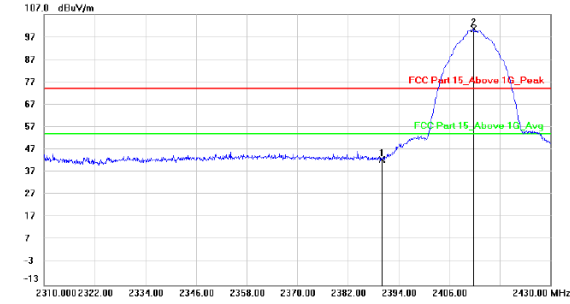


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2390.000	46.20	-3.40	42.80	74.00	-31.20			peak
2	*	2411.760	103.95	-3.40	100.55	74.00	26.55			peak

Polarization: Horizontal

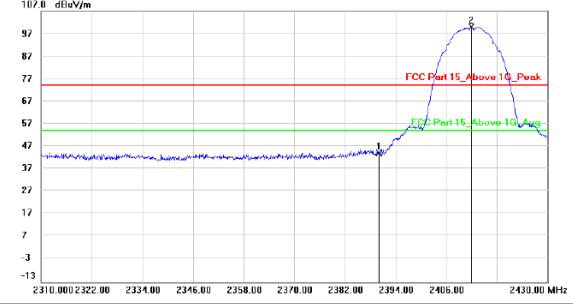


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		2390.000	47.49	-3.40	44.09	74.00	-29.91			peak
2	*	2412.000	103.32	-3.40	99.92	74.00	25.92			peak

Test Mode: IEEE 802.11b-High  
Polarization: Vertical

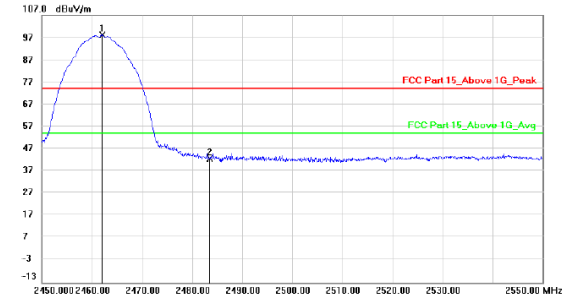


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2462.000	101.53	-3.40	98.13	74.00	24.13			peak
2		2483.500	45.93	-3.38	42.55	74.00	-31.45			peak

Polarization: Horizontal

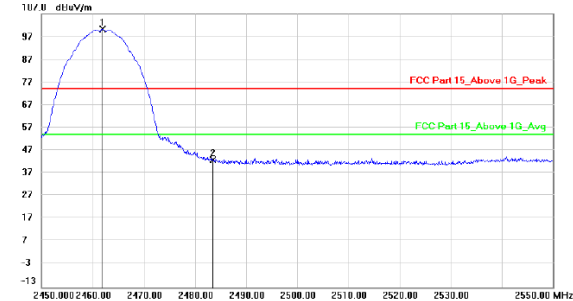


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2461.900	103.74	-3.40	100.34	74.00	26.34			peak
2		2483.500	46.19	-3.38	42.81	74.00	-31.19			peak

Test Mode: IEEE 802.11g-Low  
Polarization: Vertical

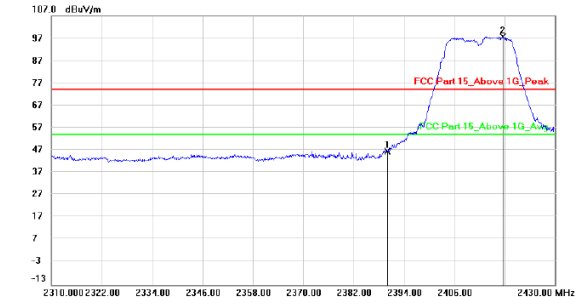


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2390.000	49.85	-3.40	46.45	74.00	-27.55	peak		
2	*	2417.520	101.05	-3.41	97.64	74.00	23.64	peak		

Polarization: Horizontal

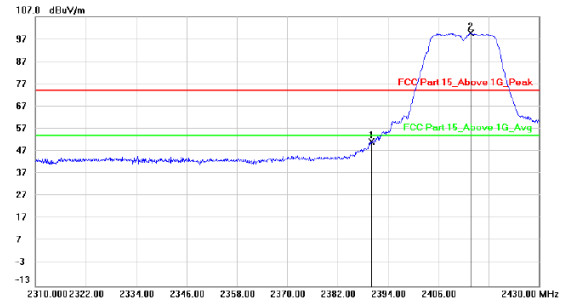


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2390.000	54.82	-3.40	51.42	74.00	-22.58	peak		
2	*	2413.680	102.96	-3.41	99.55	74.00	25.55	peak		

Test Mode: IEEE 802.11g-High  
Polarization: Vertical

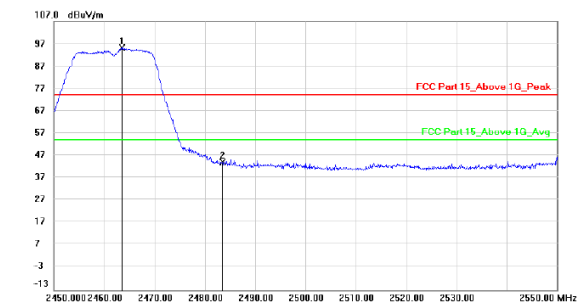


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2463.500	98.56	-3.40	95.16	74.00	21.16	peak		
2		2483.500	47.60	-3.38	44.22	74.00	-29.78	peak		

Polarization: Horizontal

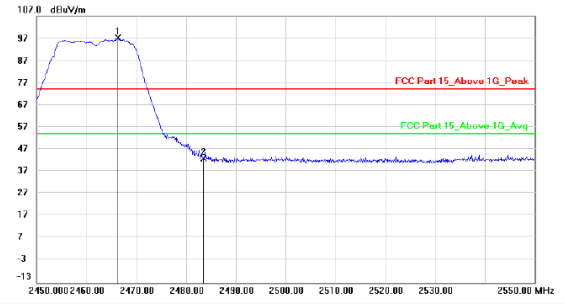


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2466.300	100.77	-3.39	97.38	74.00	23.38	peak		
2		2483.500	46.37	-3.38	42.99	74.00	-31.01	peak		

Test Mode: IEEE 802.11n20-Low  
Polarization: Vertical

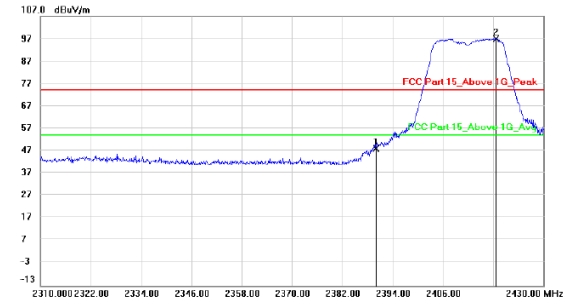


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2390.000	51.56	-3.40	48.16	74.00	-25.84	peak		
2	*	2418.720	100.26	-3.41	96.85	74.00	22.85	peak		

Polarization: Horizontal

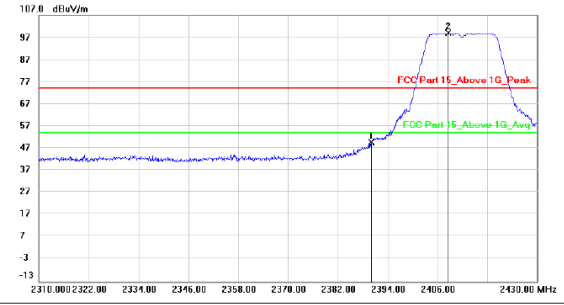


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2390.000	53.36	-3.40	49.96	74.00	-24.04	peak		
2	*	2408.640	102.36	-3.40	98.96	74.00	24.96	peak		

Test Mode: IEEE 802.11n20-High  
Polarization: Vertical

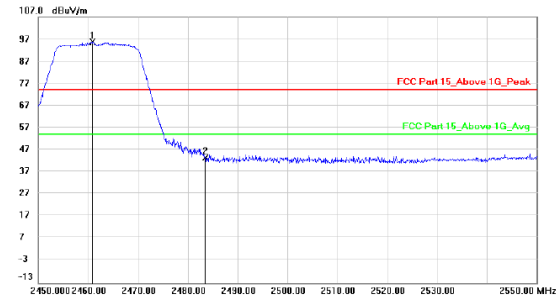


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2460.900	99.00	-3.39	95.61	74.00	21.61	peak		
2	*	2483.500	47.07	-3.38	43.69	74.00	-30.31	peak		

Polarization: Horizontal

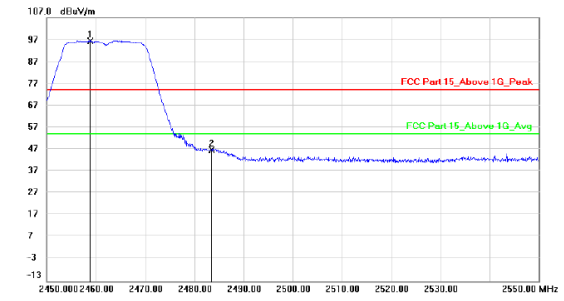


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	2458.800	99.89	-3.39	96.50	74.00	22.50	peak		
2	*	2483.500	50.08	-3.38	46.70	74.00	-27.30	peak		

Test Mode: IEEE 802.11n40-Low  
Polarization: Vertical

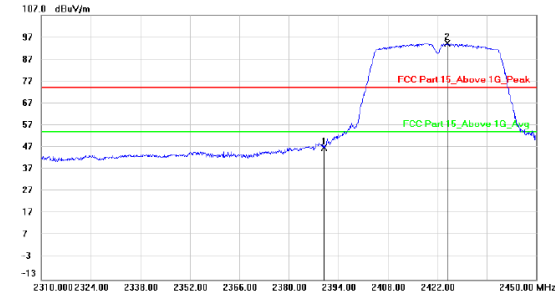


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	2390.000	50.28	-3.40	46.88	74.00	-27.12			peak
2 *	2424.940	97.53	-3.40	94.13	74.00	20.13			peak

Polarization: Horizontal

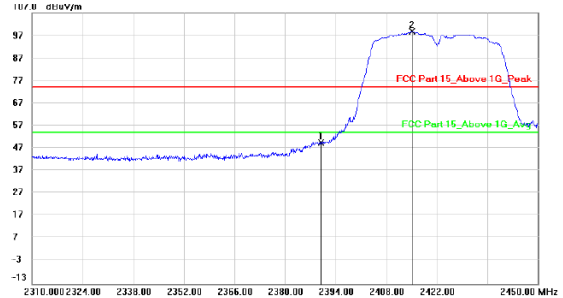


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1	2390.000	52.92	-3.40	49.52	74.00	-24.48			peak
2 *	2415.140	102.27	-3.41	98.86	74.00	24.86			peak

Test Mode: IEEE 802.11n40-High  
Polarization: Vertical

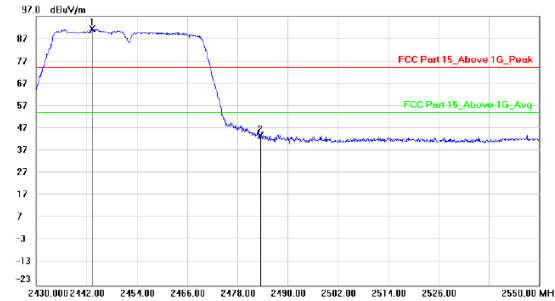

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1 *	2443.320	94.75	-3.40	91.35	74.00	17.35			peak
2	2483.500	47.01	-3.38	43.63	74.00	-30.37			peak


Polarization: Horizontal

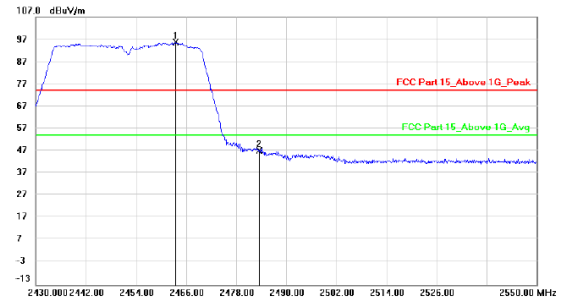

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Comment
1 *	2463.480	99.15	-3.40	95.75	74.00	21.75			peak
2	2483.500	50.53	-3.38	47.15	74.00	-26.85			peak

Note: 1. \*:Maximum data; x:Over limit; !:over margin.  
2. Measurement=Reading Level + Correct Factor; Correct Factor=Antenna Factor + Cable Loss.

Test mode: 802.11b

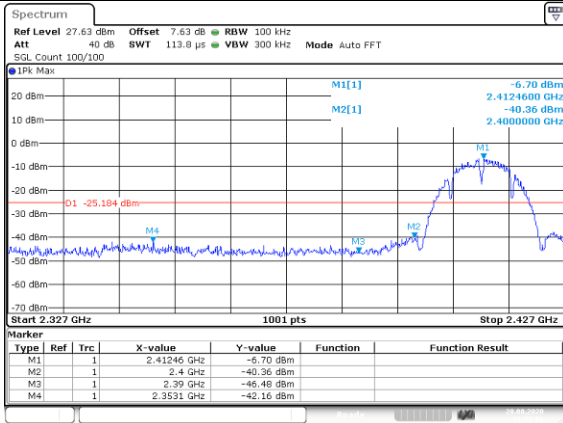


Lowest channel




Highest channel

Test mode: 802.11g

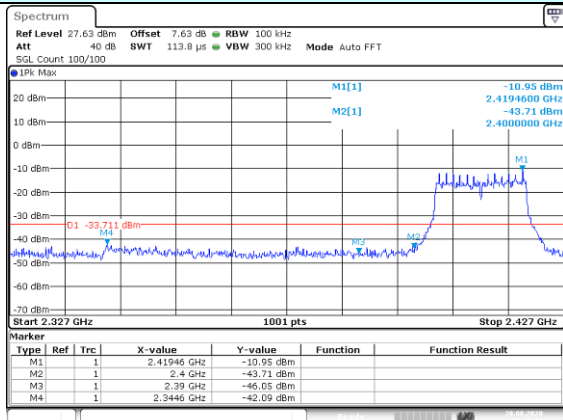


Lowest channel

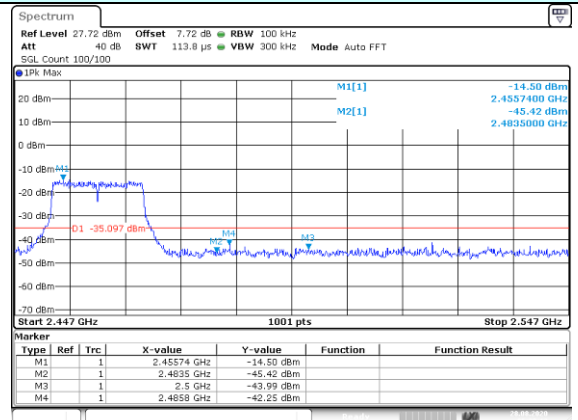


Highest channel

Test mode: 802.11n(HT20)

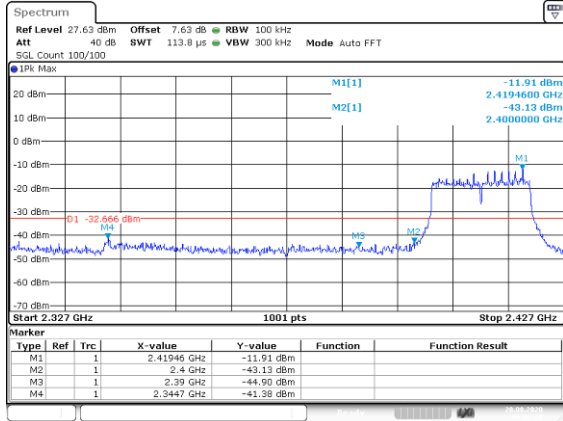


Lowest channel

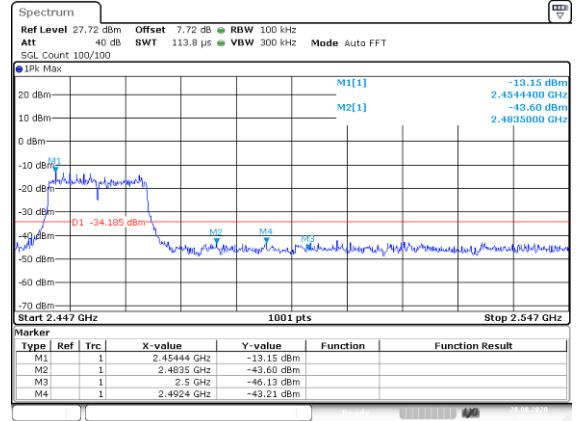


Highest channel

Test mode: 802.11n(HT40)

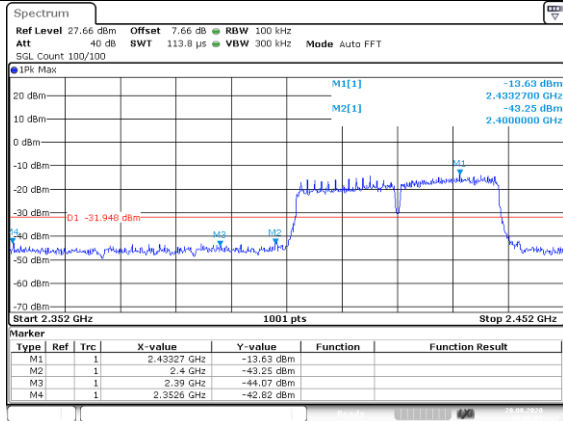

Lowest channel

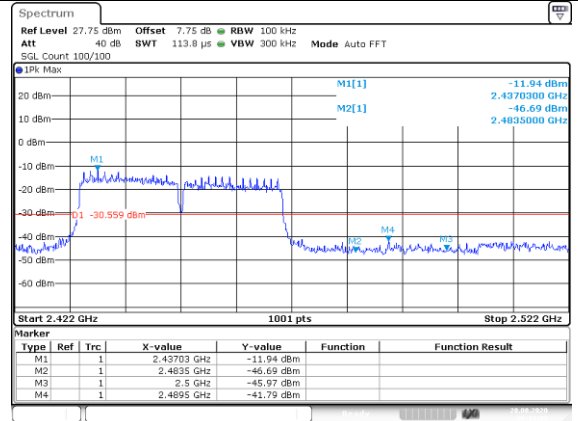

Highest channel

Date: 28.AUG.2020 06:10:09

Date: 28.AUG.2020 06:11:00

## 9. FREQUENCY STABILITY

### 9.1. Test limit


Please refer section RSS-Gen.

Regulation RSS-Gen If the frequency stability of the licence-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80% of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 54-72 MHz, 76-88 MHz, 174-216 MHz, and 470-602 MHz, unless otherwise indicated.

### 9.2. Test Procedure

The following equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 9.3. Test Setup

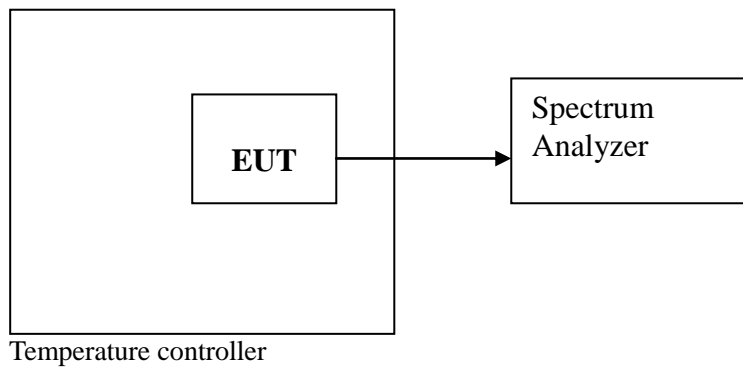

### 9.4. Test Results

Not applicable.



## **10. ANTENNA REQUIREMENT**

### **10.1. Standard Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **10.2. Antenna Connected Construction**

The antenna connector is unique antenna and no consideration of replacement. Please see EUT photo for details.

### **10.3. Results**

The EUT antenna is integrated antenna. It complies with the standard requirement.

## 11. TEST SETUP PHOTO


### Photos of Radiated emission



**Photos of Power Line Conducted Emission Test**



## 12.PHOTOS OF EUT

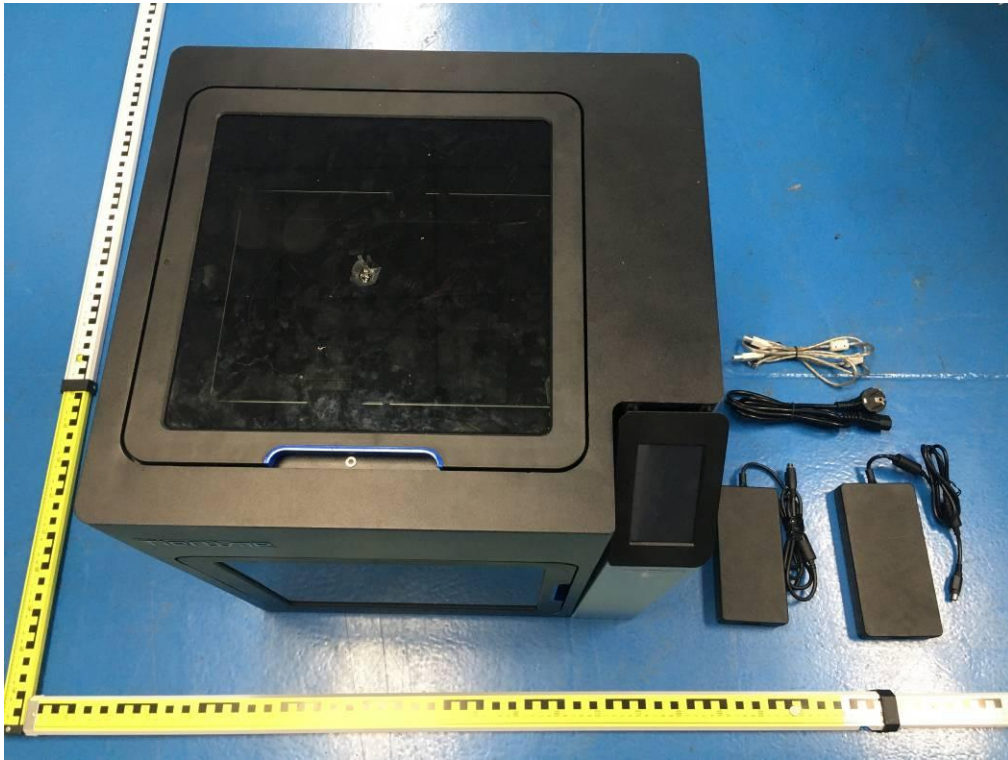

For more detailed photos, please refer to: external photos and internal photos.

-----THE END OF REPORT-----