

## FCC TEST REPORT

For

Trackimo LLC.

GPS Tracker

Test Model: TRKM010

Additional Model No.: TRKM011, TRKM012, TRKM013

Prepared for : Trackimo LLC.  
Address : 350NE 24th Street, Unit 104, Miami, Florida 33137, United States

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,  
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : Oct 12, 2015  
Number of tested samples : 1  
Sample Number : 15101205  
Date of Test : Oct 12, 2015~Apr 01, 2017  
Date of Report : Apr 01, 2017

FCC TEST REPORT

FCC CFR 47 PART 15 C(15.247)

Report Reference No. .... : LCS1511110869E

Date of Issue ..... : Apr 01, 2017

Testing Laboratory Name ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address ..... : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure..... : Full application of Harmonised standards ■
Partial application of Harmonised standards □
Other standard testing method □

Applicant's Name..... : Trackimo LLC.

Address ..... : 350NE 24th Street, Unit 104, Miami, Florida 33137, United States

Test Specification

Standard ..... : FCC CFR 47 PART 15 C(15.247) / ANSI C63.10: 2013

Test Report Form No..... : LCSEMC-1.0

TRF Originator ..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description..... : GPS Tracker

Trade Mark ..... : trackimo always there

Test Model..... : TRKM010

Ratings ..... : DC 3.70V by Li-ion Battery(600mAh)
Recharge Voltage: DC 5V/0.5A

Result ..... : Positive

Compiled by:

Leo Lee

Leo Lee/ File administrators

Supervised by:

Glin Lu

Glin Lu/ Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager

# FCC -- TEST REPORT

<b>Test Report No. :</b> <b>LCS151110869E</b>	<u>Apr 01, 2017</u> Date of issue
---	--------------------------------------

Test Model.....	: TRKM010
EUT.....	: GPS Tracker
<b>Applicant.....</b>	<b>: Trackimo LLC.</b>
Address.....	: 350NE 24th Street, Unit 104, Miami, Florida 33137, United States
Telephone.....	: /
Fax.....	: /
<b>Manufacturer.....</b>	<b>: Huizhou Light Of Science Technology Co.,LTD</b>
Address.....	: 5/F., 85# Yangli Xincun, Zhongkai High Tech Development Zones, Huizhou City, Guangdong, China.
Telephone.....	: /
Fax.....	: /
<b>Factory.....</b>	<b>: Huizhou Light Of Science Technology Co.,LTD</b>
Address.....	: 5/F., 85# Yangli Xincun, Zhongkai High Tech Development Zones, Huizhou City, Guangdong, China.
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. DESCRIPTION OF DEVICE (EUT) .....	5
1.2. SUPPORT EQUIPMENT LIST .....	5
1.3. EXTERNAL I/O .....	5
1.4. DESCRIPTION OF TEST FACILITY .....	5
1.5. STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	6
1.6. MEASUREMENT UNCERTAINTY .....	6
1.5. LIST OF MEASURING EQUIPMENT .....	7
1.8. DESCRIPTION OF TEST MODES .....	8
<b>2. TEST METHODOLOGY .....</b>	<b>9</b>
2.1. EUT CONFIGURATION .....	9
2.2. EUT EXERCISE .....	9
2.3. GENERAL TEST PROCEDURES .....	9
<b>3. SYSTEM TEST CONFIGURATION .....</b>	<b>10</b>
3.1. JUSTIFICATION .....	10
3.2. EUT EXERCISE SOFTWARE .....	10
3.3. SPECIAL ACCESSORIES .....	10
3.4. BLOCK DIAGRAM/SCHEMATICS .....	10
3.5. EQUIPMENT MODIFICATIONS .....	10
3.6. TEST SETUP .....	10
<b>4. SUMMARY OF TEST RESULTS.....</b>	<b>11</b>
<b>5. TEST RESULT .....</b>	<b>12</b>
5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT.....	12
5.2. POWER SPECTRAL DENSITY MEASUREMENT .....	13
5.3. 6 dB SPECTRUM BANDWIDTH MEASUREMENT .....	16
5.4. RADIATED EMISSIONS MEASUREMENT.....	18
5.5. CONDUCTED SPURIOUS EMISSIONS AND BAND EDGES TEST.....	27
5.6. POWER LINE CONDUCTED EMISSIONS .....	30
5.7. BAND-EDGE MEASUREMENTS FOR RESTRICTED BAND.....	33
5.8. ANTENNA REQUIREMENTS.....	36
<b>6. TEST SETUP PHOTOGRAPHS .....</b>	<b>38</b>
<b>7. EXTERIOR PHOTOGRAPHS OF THE EUT.....</b>	<b>38</b>
<b>8. INTERIOR PHOTOGRAPHS OF THE EUT .....</b>	<b>38</b>

# 1. GENERAL INFORMATION

## 1.1. Description of Device (EUT)

Name of EUT	GPS Tracker
Model Number	TRKM010, TRKM011, TRKM012, TRKM013
Modulation Type	GMSK for GSM/GPRS, 8-PSK only support downlink for EDGE
Antenna Gain	1dBi (max.) For GSM 850; 1dBi (max.) For GSM 900 1dBi (max.) For DCS 1800; 1dBi (max.) For PCS 1900 1dBi (max.) For WCDMA Band II 1dBi (max.) For WCDMA Band V -3dBi (max.) For BT
Hardware version	/
Software version	/
GSM/EDGE/GPRS Operation Frequency Band	GSM850/PCS1900/GPRS850/GPRS1900
UMTS Operation Frequency Band	UMTS FDD Band II/V
GSM/EDGE/GPRS	Supported GSM/GPRS
GSM Release Version	R99
GSM/EDGE/GPRS Power Class	GSM850:Power Class 4/ PCS1900:Power Class 1
GPRS/EDGE Multislot Class	GPRS: Multi-slot Class 12
GPRS operation mode	Class B
WCDMA Release Version	R99
HSDPA Release Version	Release 8
HSUPA Release Version	Release 6
DC-HSUPA Release Version	Not Supported
UMTS Power Class	Level 3
Bluetooth Operation frequency	2402-24802MHz
Antenna Type	Integral Antenna
BT Modulation Type	GFSK (BT V4.0)
Extreme temp. Tolerance	-30°C to +50°C
GPS function	Support and only RX
NFC Function	Not Support
Extreme vol. Limits	3.40VDC to 4.2VDC (nominal: 3.70VDC)

## 1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	Notebook	B470	WB05067151	DOC
Lenovo	AC/DC ADAPTER	ADP-90DD B	36001941	VOC

## 1.3. External I/O

I/O Port Description	Quantity	Cable
USB Port	1	1.0m, unshielded

## 1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

There is one 3m semi-anechoic chamber and one line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4: 2014, CISPR 22/EN 55022 and CISPR16-1-4 SVSWR requirements.

## 1.5. Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

## 1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.5. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Jun 18, 2016	Jun 17, 2017
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz-40GHz	Jul 16, 2016	Jul 15, 2017
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	Jun 18, 2016	Jun 17, 2017
LISN	EMCO	3819/2NM	9703-1839	9KHz-30MHz	Jun 18, 2016	Jun 17, 2017
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	Jun 18, 2016	Jun 17, 2017
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	Jun 18, 2016	Jun 17, 2017
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-18GHz	Jun 18, 2016	Jun 17, 2017
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	Apr 18, 2016	Apr 17, 2017
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	Apr 18, 2016	Apr 17, 2017
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	Apr 18, 2016	Apr 17, 2017
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	Apr 18, 2016	Apr 17, 2017
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	Apr 18, 2016	Apr 17, 2017
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	Apr 18, 2016	Apr 17, 2017
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	Apr 18, 2016	Apr 17, 2017
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	Jun 18, 2016	Jun 17, 2017
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	Jun 18, 2016	Jun 17, 2017
Power Meter	R&S	NRVS	100444	DC-40GHz	Jun 18, 2016	Jun 17, 2017
Power Sensor	R&S	NRV-Z81	100458	DC-18GHz	Jun 18, 2016	Jun 17, 2017
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	Jun 18, 2016	Jun 17, 2017
AC Power Source	HPC	HPA-500E	HPA-9100024	AC 0-300V	Jun 18, 2016	Jun 17, 2017
DC power Source	GW	GPC-6030D	C671845	DC 1V-60V	Jun 18, 2016	Jun 17, 2017
Temp. and Humidify Chamber	Giant Force	GTH-225-20-S	MAB0103-00	N/A	Jun 18, 2016	Jun 17, 2017
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	Jun 18, 2016	Jun 17, 2017
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	Jun 18, 2016	Jun 17, 2017
Signal Generator	R&S	SMR40	10016	10MHz-40GHz	Jul 16, 2016	Jul 15, 2017
Universal Radio Communication Tester	R&S	CMU200	112012	N/A	Oct 27, 2016	Oct 26, 2017
Wideband Radia Communication Tester	R&S	CMW500	1201.0002K50	N/A	Nov 19, 2016	Nov 18, 2017
PSG Analog Signal Generator	Agilent	N8257D	MY46520521	250KHz-20GHz	Nov 19, 2016	Nov 18, 2017
MXA Signal Analyzer	Agilent	N9020A	MY50510140	10Hz-26.5GHz	Oct 27, 2016	Oct 26, 2017
RF Control Unit	Tonscend	JS0806-1	/	/	Nov 19, 2016	Nov 18, 2017
LTE Test Software	Tonscend	JS1120-1	/	Version: 2.5.7.0	N/A	N/A
Test Software	Ascentest	AT890-SW	20141230	Version: 20160630	N/A	N/A
Splitter/Combiner(Qty: 2)	Mini-Circuits	ZAPD-50W 4.2-6.0 GHz	NN256400424	/	Oct 27, 2016	Oct 26, 2017
Splitter/Combine(Qty: 2)	MCLI	PS3-7	4463/4464	/	Oct 27, 2016	Oct 26, 2017
ATT (Qty: 1)	Mini-Circuits	VAT-30+	30912	/	Oct 27, 2016	Oct 26, 2017
EMC Test Software	Audix	E3	/	/	/	/

## 1.8. Description of Test Modes

Bluetooth operates in the unlicensed ISM Band at 2.4GHz. The EUT was set to transmit at 100% duty cycle. The test was performed with EUT in X, Y, Z position and the worst case was found when EUT in X position. The following operating modes were applied for the related test items. All test modes were tested, only the result of the worst case was recorded in the report.

Mode of Operations	Frequency Range (MHz)	Data Rate (Mbps)
GFSK	2402	1
	2440	1
	2480	1
For Conducted Emission		
Test Mode	TX Mode	
For Radiated Emission		
Test Mode	TX Mode	

Pre-test AC conducted emission at charge from PC mode, recorded worst case.

Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded worst case.

Worst-case mode and channel used for 150 KHz-30 MHz power line conducted emissions was determined to be TX-Middle Channel (2440MHz, GFSK).

Worst-case mode and channel used for 9 KHz-1000 MHz radiated emissions was determined to be TX-Middle Channel (2440MHz, GFSK).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

BT LE: 1 Mbps.

\*\*\*Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.



## 2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

### 2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure KDB558074 D01 DTS Meas. Guidance is required to be used for this kind of FCC 15.247 digital modulation device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

### 2.3. General Test Procedures

#### 2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013.

### **3. SYSTEM TEST CONFIGURATION**

#### **3.1. Justification**

The system was configured for testing in a continuous transmit condition controlled by test software provided by manufacturer.

#### **3.2. EUT Exercise Software**

The system was configured for testing in a continuous transmits condition and change test channels by software (MP\_kit\_RF TOOL) provided by application.

#### **3.3. Special Accessories**

N/A

#### **3.4. Block Diagram/Schematics**

Please refer to the related document

#### **3.5. Equipment Modifications**

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### **3.6. Test Setup**

Please refer to the test setup photo.

#### 4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart C		
FCC Rules	Description of Test	Result
§15.247(b)	Maximum Conducted Output Power	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	6dB Bandwidth	Compliant
§15.247(a)	Occupied Bandwidth	Compliant
§15.209, §15.247(d)	Radiated and Conducted Spurious Emissions	Compliant
§15.205	Emissions at Restricted Band	Compliant
§15.207(a)	Conducted Emissions	N/A
§15.203	Antenna Requirements	Compliant
§15.247(i)§2.1093	RF Exposure	Compliant

## 5. TEST RESULT

### 5.1. Maximum Conducted Output Power Measurement

#### 5.1.1. Standard Applicable

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


#### 5.1.2. Test Procedures

The transmitter output (antenna port) was connected to the spectrum analyzer.

According to 558074 D01 DTS Measurement Guidance Section 9.1 Maximum peak conducted output power 9.1.2.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

#### 5.1.3. Test Setup Layout

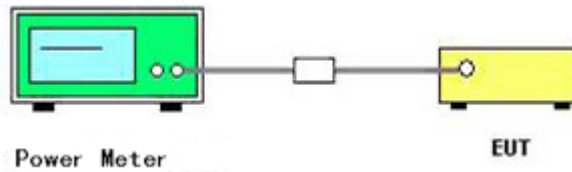

#### 5.1.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.1.5. Test Result of Maximum Conducted Output Power

Test Mode	Channel	Frequency (MHz)	Measured Maximum Peak Power (dBm)	Limits (dBm)	Verdict
GFSK-BLE	0	2402	-4.15	30	PASS
	19	2440	-3.62		
	39	2480	-3.92		

**Remark:**

1. Measured output power at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;

## 5.2. Power Spectral Density Measurement

### 5.2.1. Standard Applicable

According to §15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


### 5.2.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

### 5.2.3. Test Procedures

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
3. Set the RBW = 3 KHz.
4. Set the VBW  $\geq 3 \times$  RBW
5. Set the span to 1.5 times the DTS channel bandwidth.
6. Detector = peak.
7. Sweep time = auto couple.
8. Trace mode = max hold.
9. Allow trace to fully stabilize.
10. Use the peak marker function to determine the maximum power level.
11. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
12. The resulting peak PSD level must be 8 dBm.

### 5.2.4. Test Setup Layout

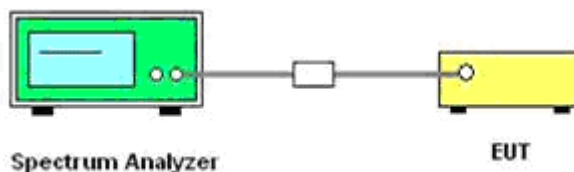

### 5.2.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 5.2.6. Test Result of Power Spectral Density


Test Mode	Channel	Frequency (MHz)	Measured Peak Power Spectral Density (dBm/3KHz)	Limits (dBm/3KHz)	Verdict
GFSK-BLE	0	2402	-19.368	8	PASS
	19	2440	-18.959		
	39	2480	-19.344		

*Remark:*

1. Measured peak power spectrum density at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Please refer to following plots;

Peak Power Spectral Density

GFSK – BT LE

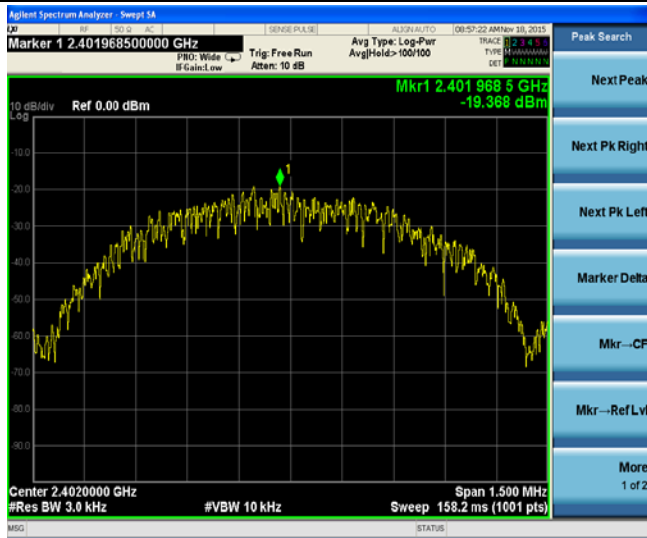

Peak Search

Next Peak

Next Pk Right

Next Pk Left


Marker Delta

Mkr--CF

Mkr--Ref Lvl

More 1 of 2

Channel 0 / 2402 MHz

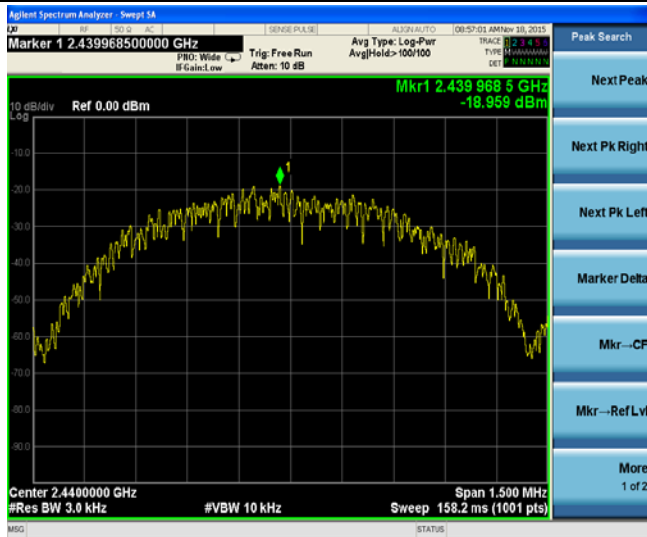

Peak Search

Next Peak

Next Pk Right

Next Pk Left


Marker Delta

Mkr--CF

Mkr--Ref Lvl

More 1 of 2

Channel 19 / 2440 MHz

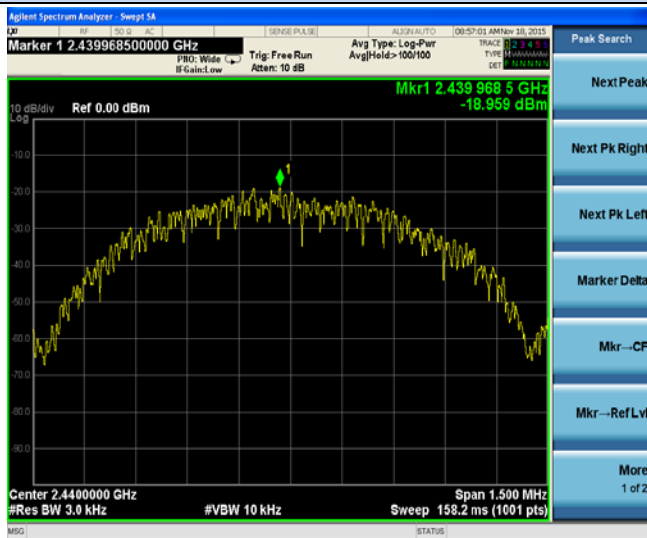

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More 1 of 2

Channel 39 / 2480 MHz

### 5.3. 6 dB Spectrum Bandwidth Measurement

#### 5.3.1. Standard Applicable

According to §15.247(a) (2): For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### 5.3.2. Measuring Instruments and Setting


Please refer to section 6 of equipment list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	100ms

#### 5.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth and the video bandwidth were set according to 558074.
3. Measured the spectrum width with power higher than 6dB below carrier.

#### 5.4.4. Test Setup Layout

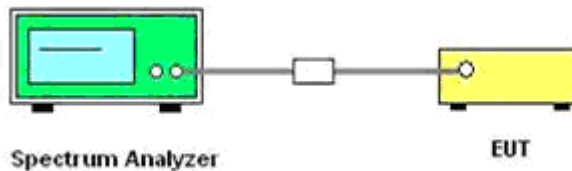

#### 5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 5.3.6. Test Result of 6dB Spectrum Bandwidth

Test Mode	Channel	Frequency (MHz)	6dB Bandwidth (KHz)	Limits (KHz)	Verdict
GFSK-BLE	0	2402	693.70	500	PASS
	19	2440	683.90		
	39	2480	679.60		

**Remark:**

1. Measured 6dB Bandwidth at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. Please refer to following plots;




6dB Bandwidth


GFSK – BT LE



Channel 0 / 2402 MHz

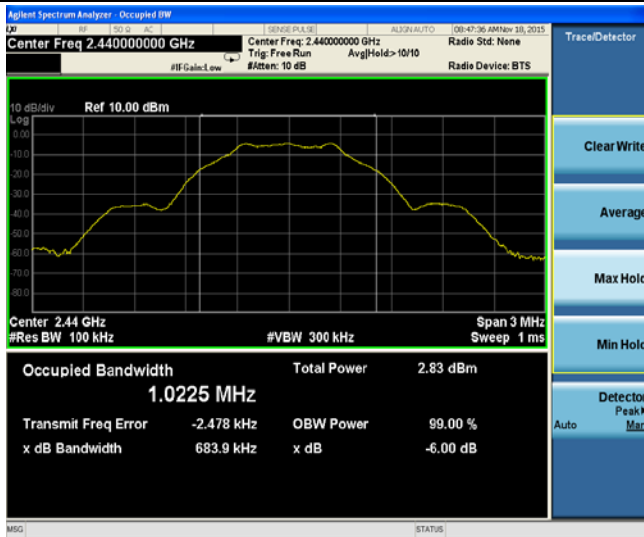

Channel 19 / 2440 MHz

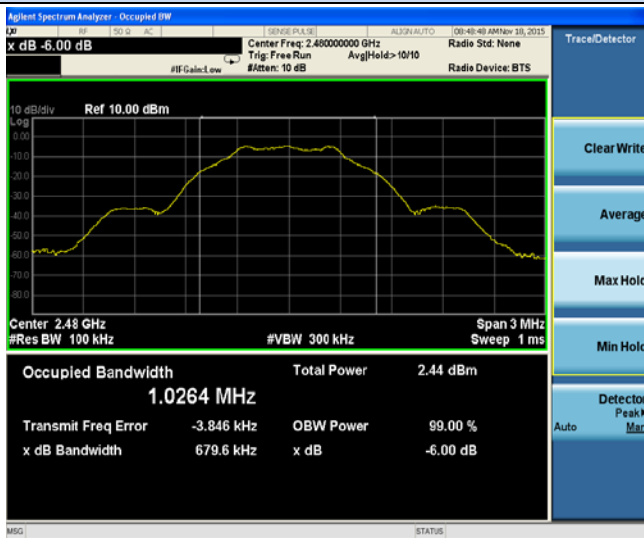

Channel 39 / 2480 MHz

### 5.4. Radiated Emissions Measurement

#### 5.4.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 5.4.2. Measuring Instruments and Setting

Please refer to section 6 of equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 <sup>th</sup> carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

### 5.4.3. Test Procedures

#### 1) Sequence of testing 9 kHz to 30 MHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

##### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

##### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

## 2) Sequence of testing 30 MHz to 1 GHz

### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

### 3) Sequence of testing 1 GHz to 18 GHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

#### Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

#### 4) Sequence of testing above 18 GHz

##### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


##### Premeasurement:

- The antenna is moved spherical over the EUT in different polarizations of the antenna.

##### Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.4.4. Test Setup Layout

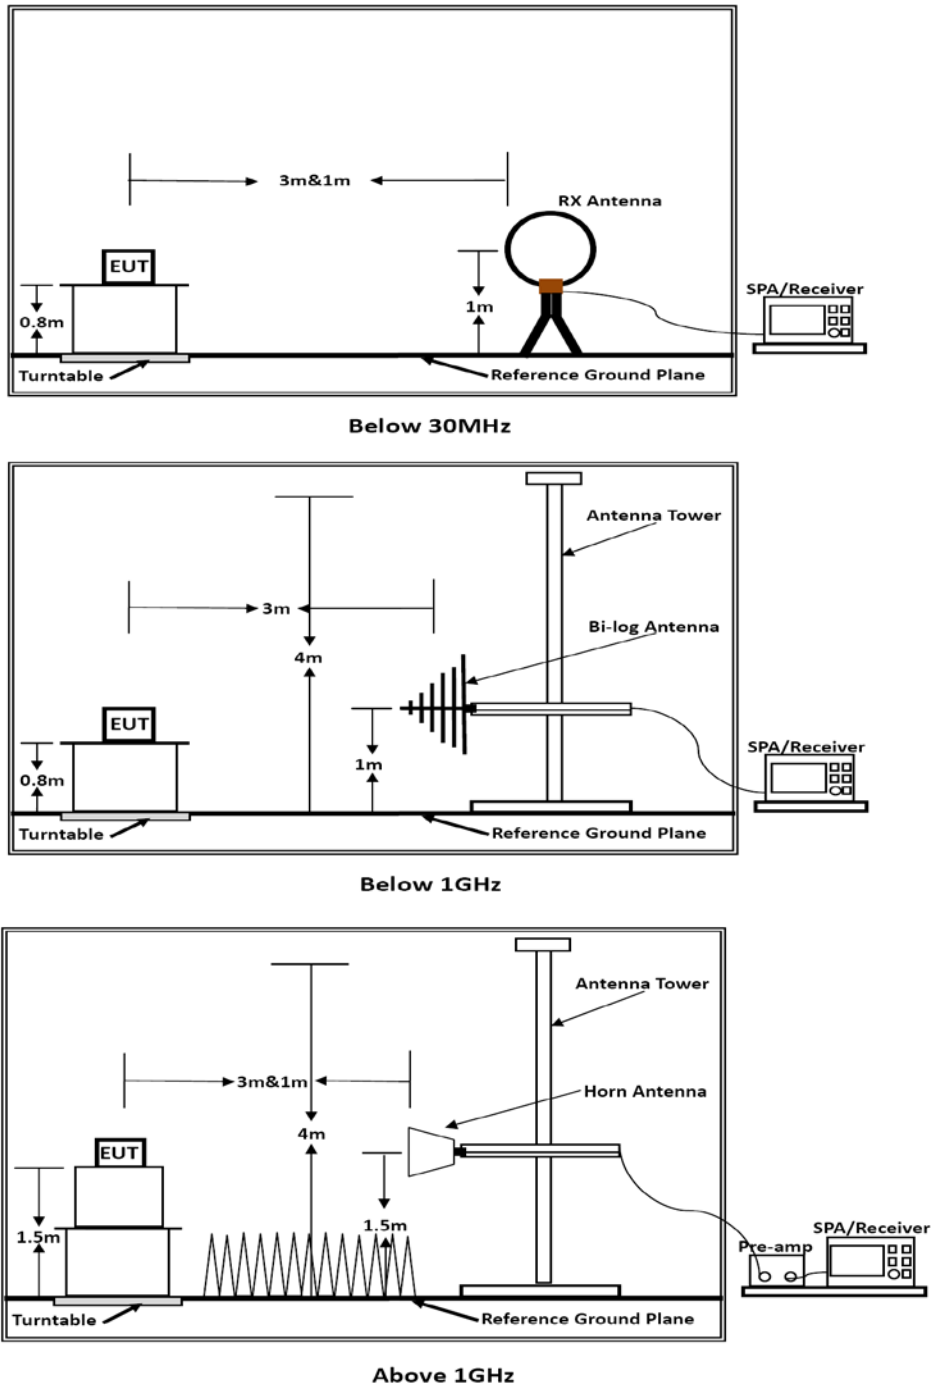

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1 m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB);  
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.5.6. Results of Radiated Emissions (9 KHz~30 MHz)

Temperature	24.6°C	Humidity	51.5%
Test Engineer	Jayden Zhuo	Configurations	BT LE

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = 40 log (specific distance / test distance) (dB);  
 Limit line = specific limits (dBuV) + distance extrapolation factor.

5.5.7. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25.5°C	Humidity	43%
Test Engineer	Jayden Zhuo	Configurations	BT LE (Middle CH)

**Test result for BT LE (Middle Channel)**

Horizontal

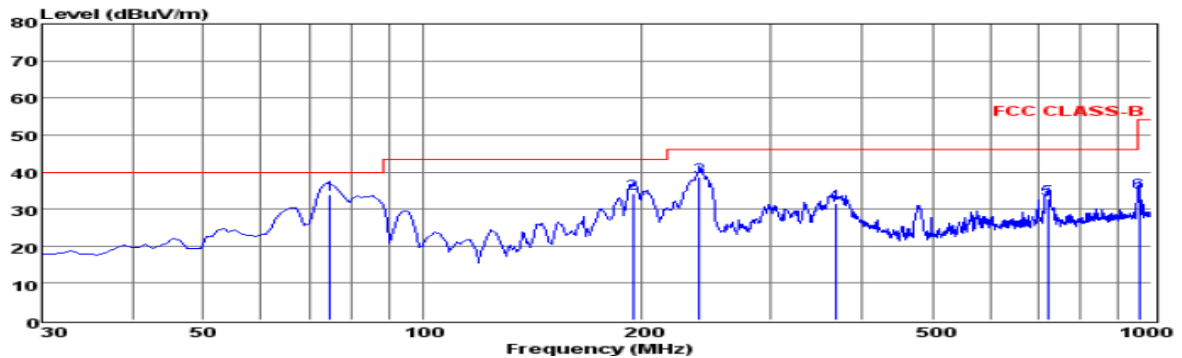

```


Env./Ins:      24°C/56%
EUT:          GPS Tracker
M/N:         TRKM010
Power Rating: DC 3.7V
Test Mode:   TX-Middle Channel (GFSK)
Operator:    Leo
Memo:
pol:        HORIZONTAL
    
```

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	74.62	25.51	0.54	7.86	33.91	40.00	-6.09	QP
2	193.93	23.00	0.76	10.56	34.32	43.50	-9.18	QP
3	239.52	25.46	1.01	12.07	38.54	46.00	-7.46	QP
4	368.53	15.71	1.22	14.50	31.43	46.00	-14.57	QP
5	720.64	11.93	1.63	19.07	32.63	46.00	-13.37	QP
6	960.23	11.08	1.90	21.48	34.46	54.00	-19.54	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured= Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20dB below the official limit are not reported



Vertical

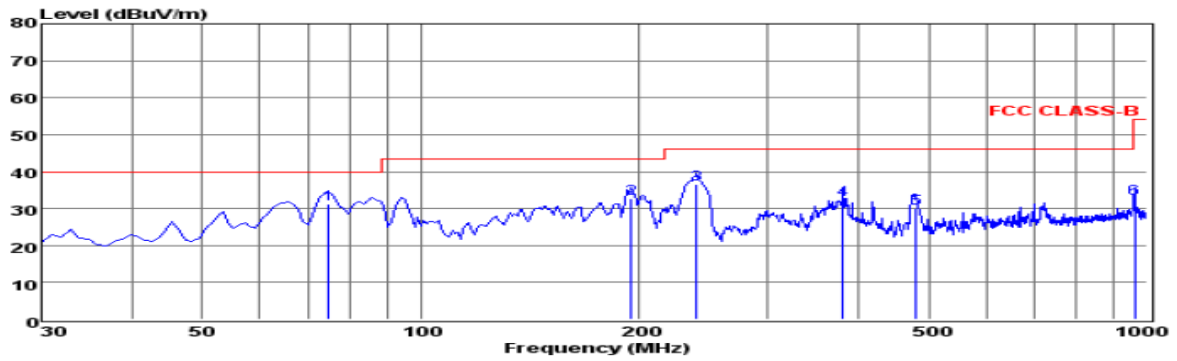

Env./Ins: 24°C / 56%  
 EUT: GPS Tracker  
 M/N: TRKM010  
 Power Rating: DC 3.7V  
 Test Mode: TX-Middle Channel (GFSK)  
 Operator: Leo  
 Memo:  
 pol: VERTICAL

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	74.62	22.70	0.54	7.86	31.10	40.00	-8.90	QP
2	194.90	21.11	0.96	10.56	32.63	43.50	-10.87	QP
3	239.52	23.54	1.01	12.07	36.62	46.00	-9.38	QP
4	381.14	16.75	1.18	14.62	32.55	46.00	-13.45	QP
5	480.08	12.58	1.31	16.07	29.96	46.00	-16.04	QP
6	961.20	9.31	2.01	21.49	32.81	54.00	-21.19	QP

Note: 1. All readings are Quasi-peak values.  
 2. Measured = Reading + Antenna Factor + Cable Loss  
 3. The emission that are 20db below the official limit are not reported

Note:

- 1). Pre-scan all modes and recorded the worst case results in this report (BT LE (Middle Channel)). Emission level (dBuV/m) = 20 log Emission level (uV/m).
- 2). Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 5.4.8. Results for Radiated Emissions (Above 1GHz)

## BT LE

## Channel 0 / 2402 MHz

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4804.0	55.09	33.06	35.04	3.94	57.05	74.00	-16.95	Peak	Horizontal
4804.0	40.19	33.06	35.04	3.94	42.15	54.00	-11.85	Average	Horizontal
4804.0	59.29	33.06	35.04	3.94	61.25	74.00	-12.75	Peak	Vertical
4804.0	41.76	33.06	35.04	3.94	43.72	54.00	-10.28	Average	Vertical

## Channel 19 / 2440 MHz

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4880.0	54.66	33.16	35.15	3.96	56.63	74.00	-17.37	Peak	Horizontal
4880.0	43.67	33.16	35.15	3.96	45.64	54.00	-8.36	Average	Horizontal
4880.0	58.87	33.16	35.15	3.96	60.84	74.00	-13.16	Peak	Vertical
4880.0	42.18	33.16	35.15	3.96	44.15	54.00	-9.85	Average	Vertical

## Channel 39 / 2480 MHz

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
4960.0	54.85	33.26	35.14	3.98	56.95	74.00	-17.05	Peak	Horizontal
4960.0	42.77	33.26	35.14	3.98	44.87	54.00	-9.13	Average	Horizontal
4960.0	59.38	33.26	35.14	3.98	61.48	74.00	-12.52	Peak	Vertical
4960.0	41.76	33.26	35.14	3.98	43.86	54.00	-10.14	Average	Vertical

## Notes:

- 1). Measuring frequencies from 9k~10th harmonic or 26.5GHz (which is less), No emission found between lowest internal used/generated frequency to 30MHz.
- 2). Radiated emissions measured in frequency range from 9k~10th harmonic or 26.5GHz (which is less) were made with an instrument using Peak detector mode.
- 3). Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

## 5.5. Conducted Spurious Emissions and Band Edges Test

### 5.5.1. Standard Applicable

According to §15.247 (d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 5.5.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
RB / VB (Emission in restricted band)	100KHz/300KHz
RB / VB (Emission in non-restricted band)	100KHz/300KHz

### 5.5.3. Test Procedures

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz

The spectrum from 9 kHz to 26.5GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

### 5.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 5.4.4.

### 5.5.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



### 5.5.6. Test Results of Conducted Spurious Emissions

Test Mode	Channel	Frequency (MHz)	Spurious RF Conducted Emission (dBc)	Limits (dBc)	Verdict
GFSK - BLE	0	2402	<-20	-20	PASS
	19	2440	<-20		
	39	2480	<-20		

#### Remark:

1. Measured RF conducted spurious emissions at difference data rate for each mode and recorded worst case for each mode.
2. Test results including cable loss;
3. “---“means that the fundamental frequency not for 15.209 limits requirement.
4. Please refer to following plots;



### RF Conducted Spurious Emissions Channel 0 / 2402 MHz

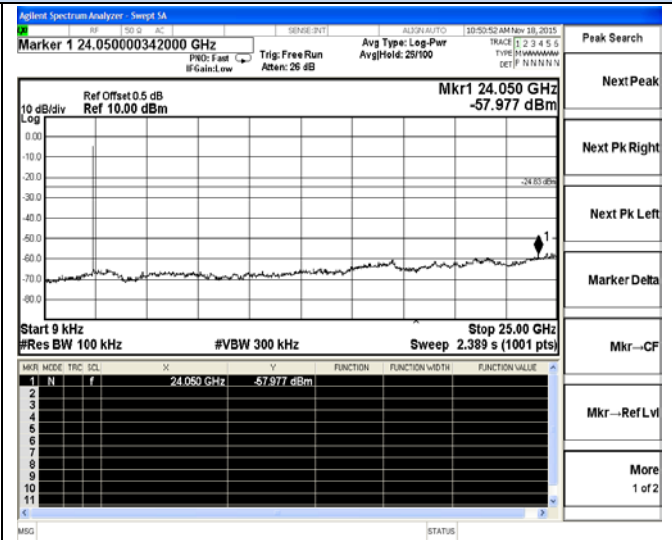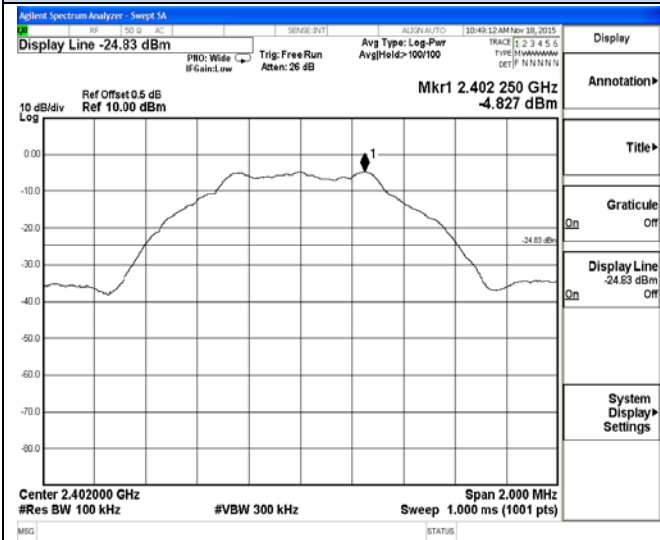

2401 – 2403 MHz

9 KHz – 26.5 GHz



### Channel 19 / 2440 MHz

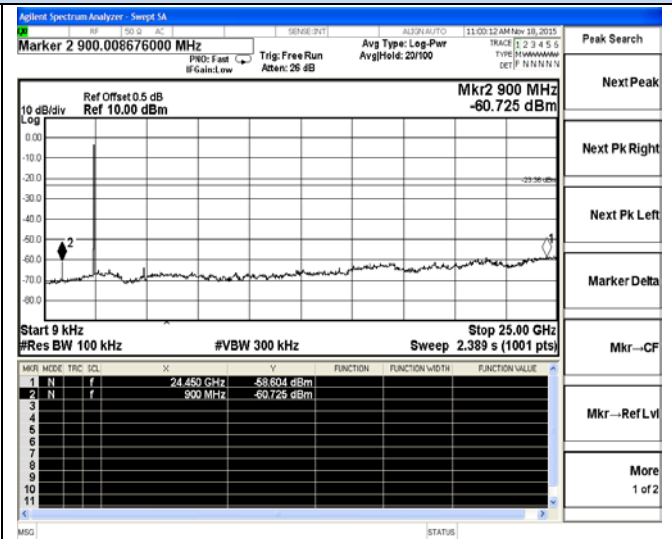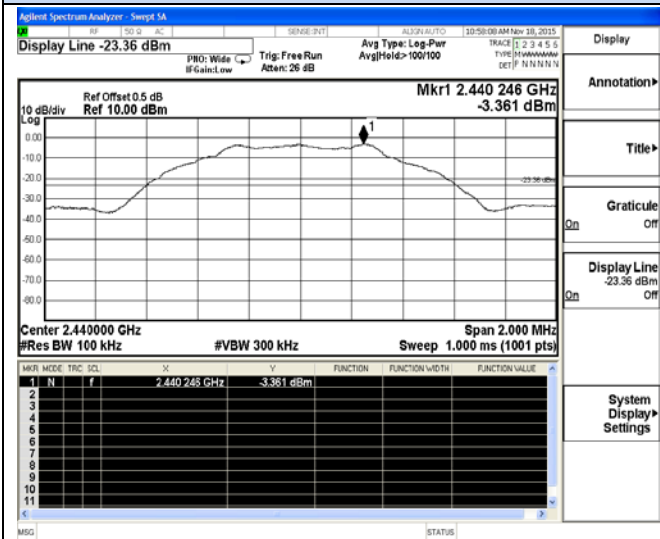

2439 – 2411 MHz

9 KHz – 26.5 GHz


### Channel 39 / 2480 MHz

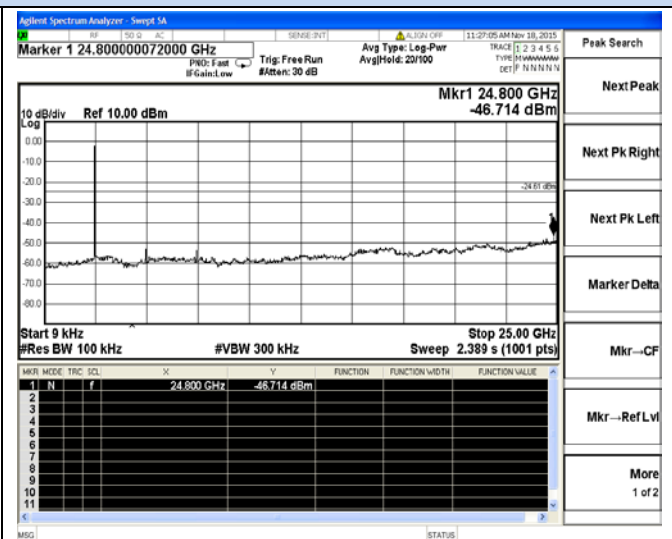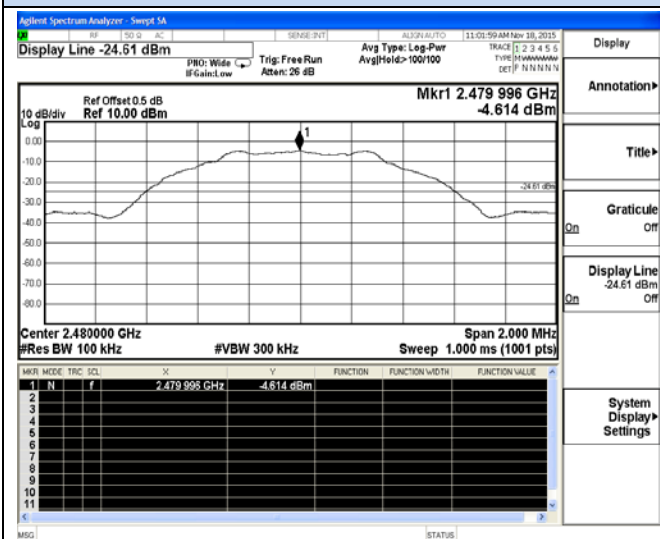


2479 – 2481 MHz

9 KHz – 26.5 GHz


Band-edge measurements for conducted emissions

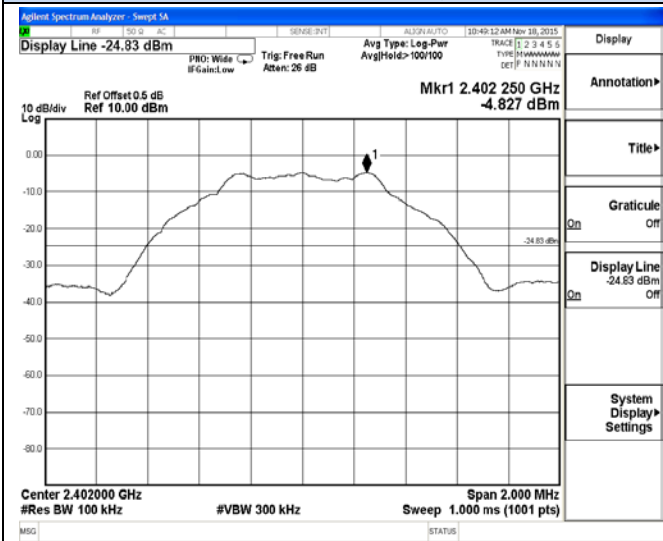


2401 – 2403 MHz

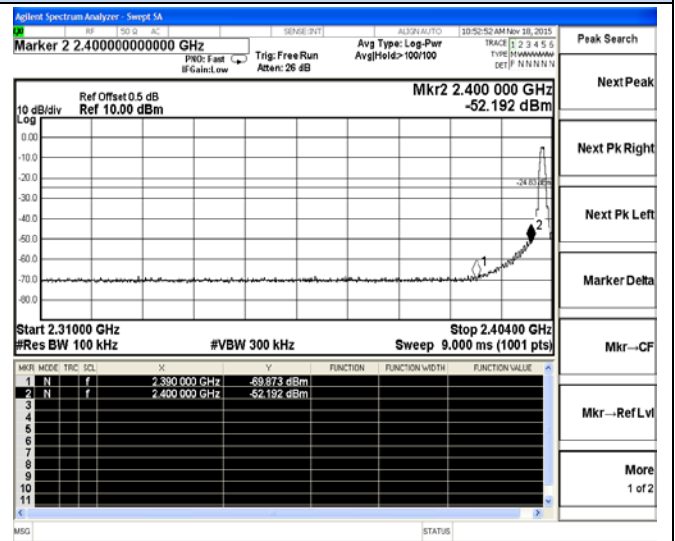

Channel 0 / 2402 MHz

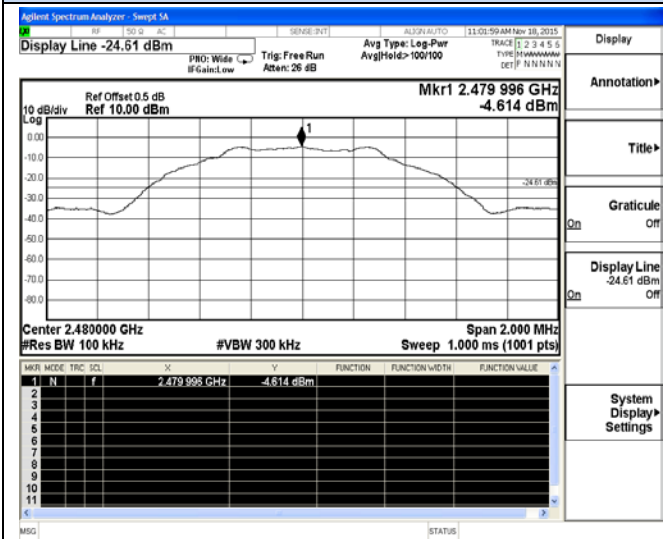

2479 - 2481 MHz

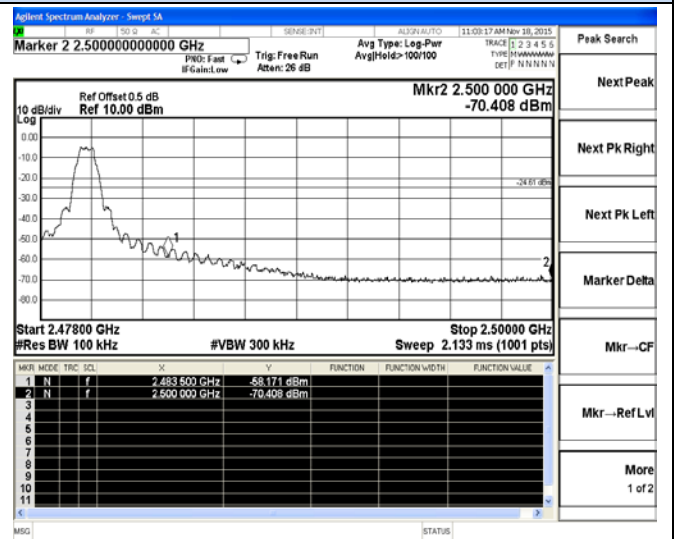

Channel 39 / 2480 MHz

## 5.6. Power line conducted emissions


### 5.6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 5.6.2 Block Diagram of Test Setup

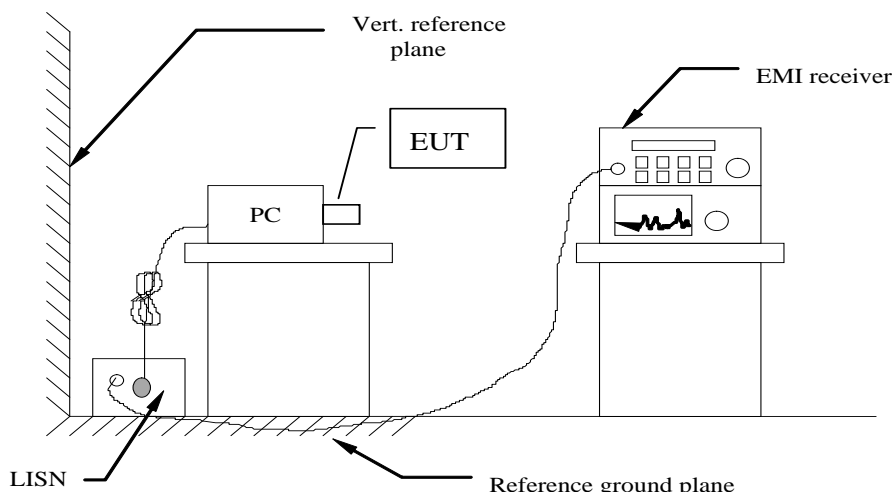


### 5.6.3 Test Results

The test data please refer to following page.

**Test Results for AC 120V/60Hz @ GFSK (worst case)**

Line

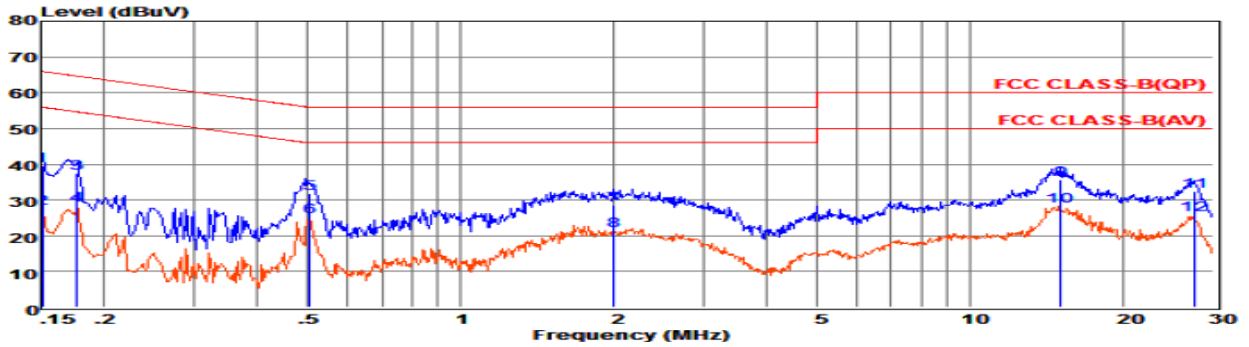


Env. Ins: 24\*/56%  
 EUT: GPS Tracker  
 M/N: TRKM010  
 Power Rating: AC 240/60Hz  
 Test Mode: TX-Middle Channel (GFSK)  
 Operator: Leo  
 Memo:  
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15080	20.01	9.57	0.02	10.00	39.60	65.96	-26.36	QP
2 0.15081	8.11	9.57	0.02	10.00	27.70	55.96	-28.26	Average
3 0.17678	17.80	9.60	0.02	10.00	37.42	64.64	-27.22	QP
4 0.17679	8.90	9.60	0.02	10.00	28.52	54.64	-26.12	Average
5 0.50469	12.22	9.62	0.04	10.00	31.88	56.00	-24.12	QP
6 0.50470	5.47	9.62	0.04	10.00	25.13	46.00	-20.87	Average
7 2.00122	8.77	9.64	0.05	10.00	28.46	56.00	-27.54	QP
8 2.00152	1.64	9.64	0.05	10.00	21.33	46.00	-24.67	Average
915.06563	16.01	9.71	0.10	10.00	35.82	60.00	-24.18	QP
1015.06653	8.43	9.71	0.10	10.00	28.24	50.00	-21.76	Average
1127.56162	12.60	9.71	0.14	10.00	32.45	60.00	-27.55	QP
1227.56262	5.95	9.71	0.14	10.00	25.80	50.00	-24.20	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

Neutral

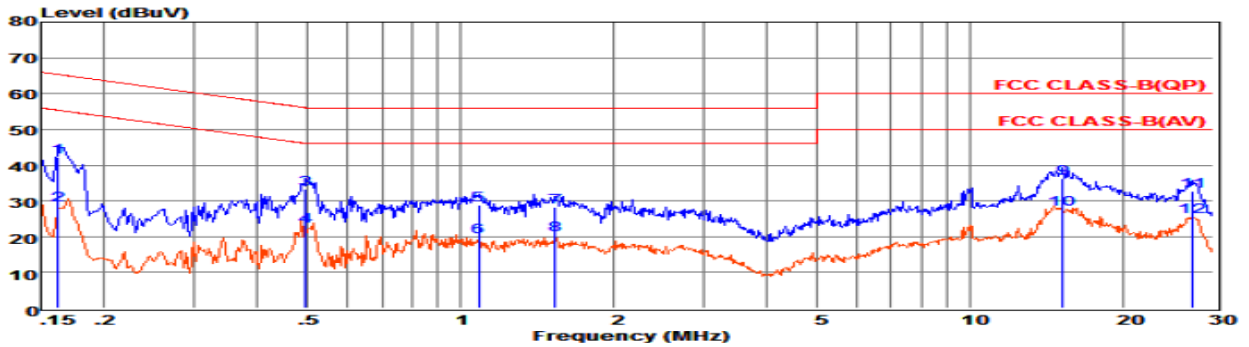

Env. Ins: 24\*/56%  
 EUT: GPS Tracker  
 M/N: TRKM010  
 Power Rating: AC 240/60Hz  
 Test Mode: TX-Middle Channel (GFSK)  
 Operator: Leo  
 Memo:  
 Pol: NEUTRAL


Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.16241	22.41	9.67	0.02	10.00	42.10	65.34	-23.24	QP
2 0.16242	9.12	9.67	0.02	10.00	28.81	55.34	-26.53	Average
3 0.49673	13.62	9.62	0.04	10.00	33.28	56.05	-22.77	QP
4 0.49674	3.20	9.62	0.04	10.00	22.86	46.05	-23.19	Average
5 1.08237	9.20	9.63	0.05	10.00	28.88	56.00	-27.12	QP
6 1.08257	0.30	9.63	0.05	10.00	19.98	46.00	-26.02	Average
7 1.53548	8.47	9.63	0.05	10.00	28.15	56.00	-27.85	QP
8 1.53558	0.72	9.63	0.05	10.00	20.40	46.00	-25.60	Average
915.22613	16.39	9.74	0.10	10.00	36.23	60.00	-23.77	QP
1015.22653	7.83	9.74	0.10	10.00	27.67	50.00	-22.33	Average
1127.41598	12.85	9.83	0.14	10.00	32.82	60.00	-27.18	QP
1227.41668	5.46	9.83	0.14	10.00	25.43	50.00	-24.57	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.



**Test Results for AC 240V/50Hz @ GFSK (worst case)**

Line

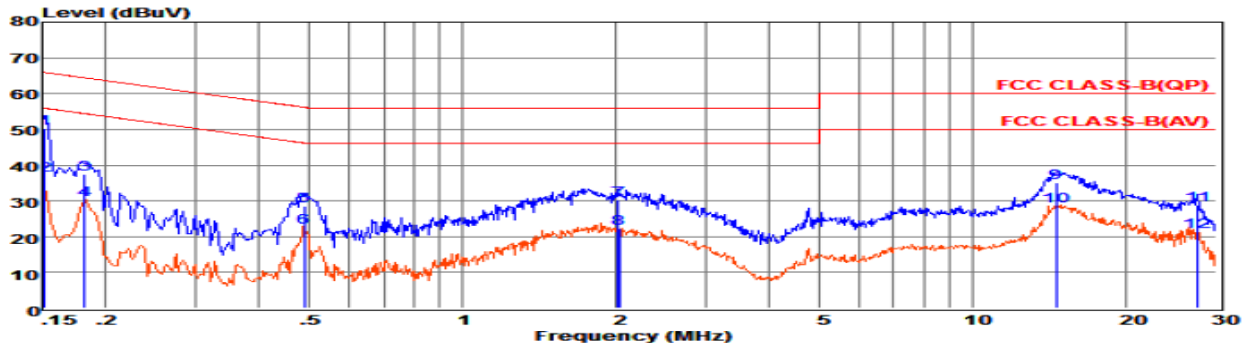


Env. Ins: 24\*/56%  
 EUT: GPS Tracker  
 M/N: TRKM010  
 Power Rating: AC 120V/60Hz  
 Test Mode: TX-Middle Channel (GFSK)  
 Operator: Leo  
 Memo:  
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15160	30.65	9.57	0.02	10.00	50.24	65.91	-15.67	QP
2 0.15161	17.52	9.57	0.02	10.00	37.11	55.91	-18.80	Average
3 0.18152	17.88	9.61	0.02	10.00	37.51	64.42	-26.91	QP
4 0.18153	10.78	9.61	0.02	10.00	30.41	54.42	-24.01	Average
5 0.48890	8.79	9.62	0.04	10.00	28.45	56.19	-27.74	QP
6 0.48891	2.91	9.62	0.04	10.00	22.57	46.19	-23.62	Average
7 2.02254	10.66	9.64	0.05	10.00	30.35	56.00	-25.65	QP
8 2.02354	2.53	9.64	0.05	10.00	22.22	46.00	-23.78	Average
914.59423	15.18	9.71	0.10	10.00	34.99	60.00	-25.01	QP
1014.59453	8.85	9.71	0.10	10.00	28.66	50.00	-21.34	Average
1127.56162	9.11	9.71	0.14	10.00	28.96	60.00	-31.04	QP
1227.56262	1.59	9.71	0.14	10.00	21.44	50.00	-28.56	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

Neutral

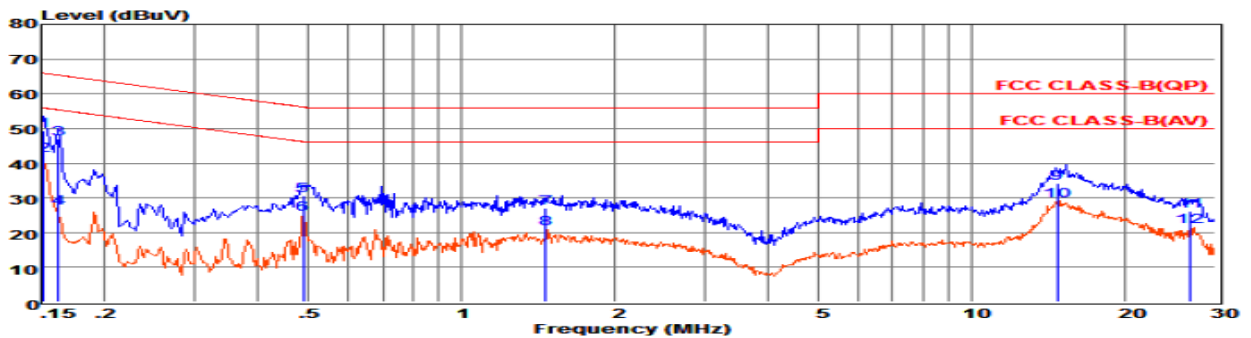

Env. Ins: 24\*/56%  
 EUT: GPS Tracker  
 M/N: TRKM010  
 Power Rating: AC 120V/60Hz  
 Test Mode: TX-Middle Channel (GFSK)  
 Operator: Leo  
 Memo:  
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15160	29.64	9.70	0.02	10.00	49.36	65.91	-16.55	QP
2 0.15161	22.43	9.70	0.02	10.00	42.15	55.91	-13.76	Average
3 0.16241	27.34	9.67	0.02	10.00	47.03	65.34	-18.31	QP
4 0.16242	7.43	9.67	0.02	10.00	27.12	55.34	-28.22	Average
5 0.48890	11.05	9.62	0.04	10.00	30.71	56.19	-25.48	QP
6 0.48891	5.50	9.62	0.04	10.00	25.16	46.19	-21.03	Average
7 1.46398	7.43	9.63	0.05	10.00	27.11	56.00	-28.89	QP
8 1.46458	1.34	9.63	0.05	10.00	21.02	46.00	-24.98	Average
914.67176	14.43	9.74	0.10	10.00	34.27	60.00	-25.73	QP
1014.67256	9.29	9.74	0.10	10.00	29.13	50.00	-20.87	Average
1126.84106	6.29	9.83	0.13	10.00	26.25	60.00	-33.75	QP
1226.84151	1.84	9.83	0.13	10.00	21.80	50.00	-28.20	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten\_Fac.  
 2. The emission levels that are 20dB below the official limit are not reported.

\*\*\*Note: Pre-scan all modes and recorded the worst case results in this report (BT LE).




## 5.7. Band-edge measurements for Restricted Band

### 5.7.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.7.2. Test Setup Layout

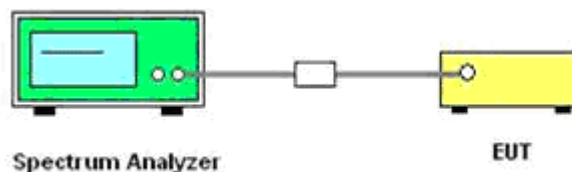

### 5.7.3. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of Spectrum Analyzer.

### 5.7.4. Test Procedures

According to KDB 558074 D01 for Antenna-port conducted measurement. Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=1/B for Peak detector.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.
6. Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency (see 12.2.2, 12.2.3, and 12.2.4 for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
7. Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
8. Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
9. For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
10. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

Where:

E = electric field strength in dB $\mu$ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

11. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.
12. Compare the resultant electric field strength level to the applicable regulatory limit.
13. Perform radiated spurious emission test duress until all measured frequencies were complete.


#### 5.7.5 Test Results

<b>GFSK – BLE</b>							
Frequency (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	Ground Reflection Factor (dB)	Covert Radiated E Level At 3m (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
2310.00	-59.450	2.000	0.000	37.778	Peak	74.00	PASS
2329.34	-58.007	2.000	0.000	39.221	Peak	74.00	PASS
2390.00	-59.221	2.000	0.000	38.007	Peak	74.00	PASS
2483.50	-58.663	2.000	0.000	38.565	Peak	74.00	PASS
2489.42	-57.009	2.000	0.000	40.219	Peak	74.00	PASS
2500.00	-59.632	2.000	0.000	37.596	Peak	74.00	PASS


#### Remark:

1. Test results including cable loss;
2. “---“means that the fundamental frequency not for 15.209 limits requirement.
3. Average Values = Average Reading Values - Duty Cycle Factor
4. Please refer to following plots;
5. Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

Band-edge measurements for radiated emissions

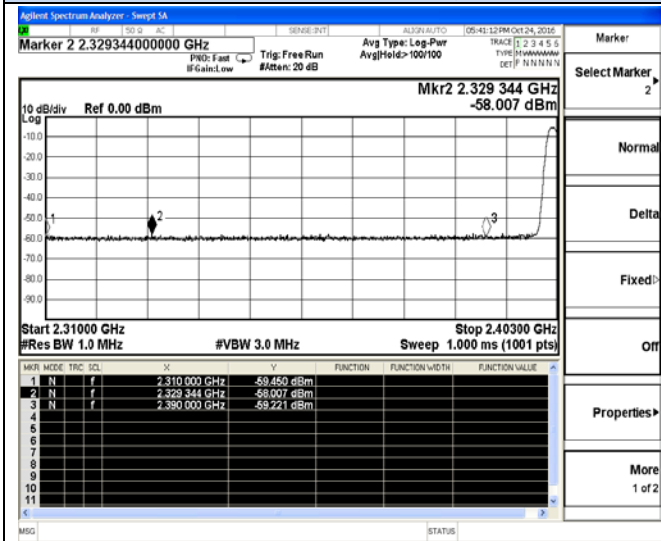

Channel 0 / 2402 MHz – Peak

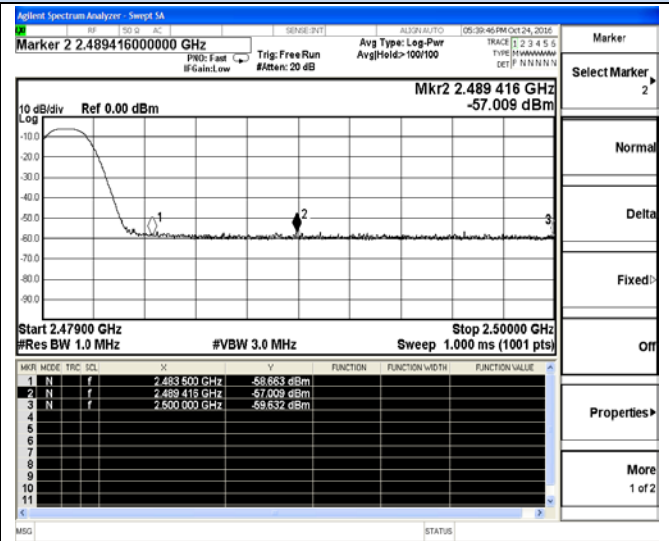

Channel 39 / 2480 MHz – Peak

## 5.8. Antenna Requirements

### 5.8.1 Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

And according to §15.247(4)(1), system operating in the 2400-2483.5MHz bands that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### 5.8.2 Antenna Connected Construction

#### 5.8.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

#### 5.8.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is -3.0 dBi, and the antenna is an internal antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

#### 5.8.2.3. Results: Compliance.

##### Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refers ANSI C63.10:2013 Output power test procedure for DTS devices.

Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

##### Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep Time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

**Limits**

FCC	ISED
Antenna Gain	
6 dBi	

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

T <sub>nom</sub>	V <sub>nom</sub>	Lowest Channel 2402 MHz	Middle Channel 2440 MHz	Highest Channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		-4.261	-3.603	-3.937
Radiated power [dBm] Measured with GFSK modulation		-7.875	-6.799	-7.344
Gain [dBi] Calculated		-3.614	-3.196	-3.407
Measurement uncertainty			± 1.6 dB (cond.) / ± 3.8 dB (rad.)	

## 6. TEST SETUP PHOTOGRAPHS

Please refer to separated files for Test Setup Photos of the EUT.

## 7. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Test Setup Photos of the EUT.

## 8. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Test Setup Photos of the EUT

-----THE END OF REPORT-----