

S

T

S

L

A

B



FCC SAR TEST REPORT

Report No.: STS2109174H02

Issued for

Trackimo INC.

450 Seventh Avenue, Suite 1408, New York, United States


Product Name:	GPS Tracker
Brand Name:	Trackimo
Model Name:	TRKM010B
Series Model:	N/A
FCC ID:	2AAI6-TRKM010B
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Body: 1.125 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail: sts@stsapp.com





Test Report Certification

Applicant's name : Trackimo INC.

Address : 450 Seventh Avenue, Suite 1408, New York, United States

Manufacturer's Name : Trackimo INC.

Address : 450 Seventh Avenue, Suite 1408, New York, United States

Product description

Product name : GPS Tracker

Brand name : Trackimo

Model name : TRKM010B

Series Model..... : N/A

Standards..... : ANSI/IEEE Std. C95.1-1992
FCC 47 CFR Part 2 (2.1093)
IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test..... :

Date (s) of performance of tests..... : 12 Oct. 2021 ~ 19 Oct. 2021

Date of Issue..... : 22 Oct. 2021

Test Result..... : **Pass**

Testing Engineer :

Shi fan-long

(Shifan. Long)

Technical Manager :

Sean She

(Sean she)

Authorized Signatory :

Vita Li

(Vita Li)





Table of Contents

1. General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2. Test Standards and Limits	8
3. SAR Measurement System	9
3.1 Definition of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	15
5.1 Validation System	15
5.2 Validation Result	15
6. SAR Evaluation Procedures	16
7. EUT Test Position	17
8. Uncertainty	18
8.1 Measurement Uncertainty	18
8.2 System validation Uncertainty	19
9. Conducted Power Measurement	20
9.1 Test Result	20
9.2 SAR Test Exclusions Applied	48
10. EUT and Test Setup Photo	49
10.1 EUT Photo	49
10.2 Setup Photo	52
11. SAR Result Summary	56
11.1 Body-worn SAR	56
11.2 Repeated SAR measurement	61
12. Equipment List	64
Appendix A. System Validation Plots	65
Appendix B. SAR Test Plots	75
Appendix C. Probe Calibration and Dipole Calibration Report	89

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	22 Oct. 2021	STS2109174H02	ALL	Initial Issue





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	GPS Tracker		
Brand Name	Trackimo		
Model Name	TRKM010B		
Series Model	N/A		
Model Difference	N/A		
Battery	Rated Voltage: 3.7V Charge Limit Voltage: 4.2V Capacity: 600mAh		
Device Category	Portable		
Product stage	Production unit		
RF Exposure Environment	General Population / Uncontrolled		
Hardware Version	UB11 W307 V0.4		
Software Version	0.3		
Frequency Range	GSM 850: 824 MHz ~ 849 MHz PCS1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1820 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz WLAN802.11b/g/n20: 2412 MHz ~ 2462 MHz(Receive only) WLAN 802.11n40: 2422 MHz ~ 2452 MHz(Receive only) Bluetooth: 2402 MHz to 2480 MHz		
Max. Reported SAR(1g): (Limit:1.6W/kg)	Band	Mode	Body Worn (W/kg)
	PCB	GSM 850	0.071
	PCB	GSM 1900	0.716
	PCB	WCDMA Band II	1.125
	PCB	WCDMA Band V	0.042
	PCB	LTE Band 2	0.887
	PCB	LTE Band 4	0.254



	PCB	LTE Band 5	0.072
	PCB	LTE Band 7	0.250
	PCB	LTE Band 12	0.477
	PCB	LTE Band 13	0.107
	PCB	LTE Band 17	1.086
	PCB	LTE Band 25	0.090
	PCB	LTE Band 26	0.434
	PCB	LTE Band 41	0.108
	DTS	Bluetooth ^{Note}	0.002
1-g Sum SAR		1.127	
FCC Equipment Class	PCS Licensed Transmitter (PCB) Digital Transmission System (DTS)		
Operating Mode:	GSM: GPRS/EGPRS Class 12 WCDMA: RMC, HSDPA, HSUPA Release 6 LTE: QPSK, 16QAM WLAN: 802.11 a/b/g/n20/n40 BLE: 4.2 (GFSK)		
Antenna Specification:	GSM/WCDMA/LTE: PIFA Antenna Bluetooth: PCB Antenna WLAN: PCB Antenna		
SIM Card	Only support single SIM card		
Hotspot Mode	Not Support		
DTM Mode	Not Support		
Note: 1. Bluetooth SAR was estimated 2. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power			



1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01





2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
7	FCC KDB 941225 D01 v03r01	SAR Measurement Procedures for 3G Devices
8	FCC KDB 941225 D05 v02r05	SAR for LTE Devices
9	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

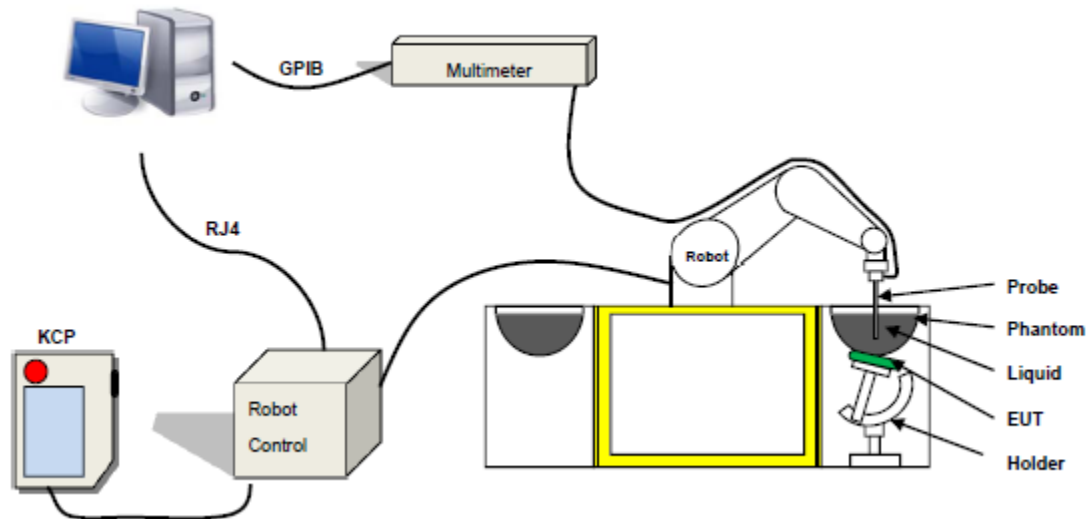

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 07/21 EPG0352 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 450 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.


SN 32/14 SAM115



SN 32/14 SAM116



3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

4. Tissue Simulating Liquids



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Head Tissue

Frequency (MHz)	cellulose %	DGBE %	HEC %	NaCl %	Preventol %	Sugar %	X100 %	Water %	Conductivity σ	Permittivity ϵ_r
750	0.2	/	/	1.4	0.2	57.0	/	41.1	0.89	41.9
835	0.2	/	/	1.4	0.2	57.9	/	40.3	0.90	41.5
900	0.2	/	/	1.4	0.2	57.9	/	40.3	0.97	41.5
1800	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
1900	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
2000	/	44.5	/	0.3	/	/	/	55.2	1.4	40.0
2450	/	44.9	/	0.1	/	/	/	55.0	1.80	39.2
2600	/	45.0	/	0.1	/	/	/	54.9	1.96	39.0

Body Tissue

Frequency (MHz)	cellulose %	DGBE %	HEC %	NaCl %	Preventol %	Sugar %	X100 %	Water %	Conductivity σ	Permittivity ϵ_r
750	0.2	/	/	0.9	0.1	47.2	/	51.7	0.96	55.5
835	0.2	/	/	0.9	0.1	48.2	/	50.8	0.97	55.2
900	0.2	/	/	0.9	0.1	48.2	/	50.8	1.05	55.0
1800	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
1900	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
2000	/	29.4	/	0.4	/	/	/	70.2	1.52	53.3
2450	/	31.3	/	0.1	/	/	/	68.6	1.95	52.7
2600	/	31.7	/	0.1	/	/	/	68.2	2.16	52.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ S/m	
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	56.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00

**LIQUID MEASUREMENT RESULTS**

Date	Ambient		Simulating Liquid		Parameters	Target	Measured	Deviation %	Limited %
	Temp. [°C]	Humidity %	Frequency	Temp. [°C]					
2021-10-12	23.5	50	707.5 MHz	23.2	Permittivity	42.13	41.63	-1.19	±5
					Conductivity	0.89	0.88	-1.12	±5
2021-10-12	23.5	50	709 MHz	23.2	Permittivity	42.12	43.09	2.30	±5
					Conductivity	0.89	0.89	0.00	±5
2021-10-12	23.5	50	710 MHz	23.2	Permittivity	42.11	41.70	-0.97	±5
					Conductivity	0.89	0.91	2.25	±5
2021-10-12	23.5	50	711 MHz	23.2	Permittivity	42.11	41.80	-0.74	±5
					Conductivity	0.89	0.90	1.12	±5
2021-10-12	23.5	50	750 MHz	23.2	Permittivity	41.9	43.15	2.98	±5
					Conductivity	0.89	0.88	-1.12	±5
2021-10-13	23.8	48	782MHz	23.5	Permittivity	41.75	41.24	-1.22	±5
					Conductivity	0.89	0.88	-1.12	±5
2021-10-13	23.8	48	824.2 MHz	23.5	Permittivity	41.55	41.52	-0.07	±5
					Conductivity	0.9	0.90	0.00	±5
2021-10-13	23.8	48	831.5 MHz	23.5	Permittivity	41.52	42.34	1.97	±5
					Conductivity	0.9	0.89	-1.11	±5
2021-10-13	23.8	48	835 MHz	23.5	Permittivity	41.5	41.24	-0.63	±5
					Conductivity	0.9	0.89	-1.11	±5
2021-10-13	23.8	48	841.5 MHz	23.5	Permittivity	41.5	41.85	0.84	±5
					Conductivity	0.9	0.87	-3.33	±5
2021-10-13	23.8	48	844 MHz	23.5	Permittivity	41.5	41.16	-0.82	±5
					Conductivity	0.91	0.89	-2.20	±5
2021-10-13	23.8	48	846.6 MHz	23.5	Permittivity	41.5	42.67	2.82	±5
					Conductivity	0.91	0.89	-2.20	±5
2021-10-15	23.2	51	1732.5 MHz	22.8	Permittivity	40.1	39.44	-1.65	±5
					Conductivity	1.36	1.37	0.74	±5
2021-10-15	23.2	51	1800 MHz	22.8	Permittivity	40	39.70	-0.75	±5
					Conductivity	1.4	1.40	0.00	±5
2021-10-15	23.2	51	1852.4 MHz	22.8	Permittivity	40	40.65	1.63	±5
					Conductivity	1.4	1.42	1.43	±5
2021-10-16	22.9	50	1860 MHz	22.7	Permittivity	40	39.26	-1.85	±5
					Conductivity	1.4	1.42	1.43	±5
2021-10-16	22.9	50	1880 MHz	22.7	Permittivity	40	41.06	2.65	±5
					Conductivity	1.4	1.39	-0.71	±5
2021-10-16	22.9	50	1900 MHz	22.7	Permittivity	40	40.22	0.55	±5
					Conductivity	1.4	1.40	0.00	±5



2021-10-16	22.9	50	1905 MHz	22.7	Permittivity	40	38.76	-3.10	±5
					Conductivity	1.4	1.36	-2.86	±5
2021-10-16	22.7	51	1907.6 MHz	22.4	Permittivity	40	38.75	-3.13	±5
					Conductivity	1.4	1.37	-2.14	±5
2021-10-19	23.5	56	2535 MHz	23.2	Permittivity	39.09	37.65	-3.68	±5
					Conductivity	1.89	1.90	0.53	±5
2021-10-19	23.5	56	2560 MHz	23.2	Permittivity	39.05	39.69	1.64	±5
					Conductivity	1.92	1.95	1.56	±5
2021-10-19	23.5	56	2600 MHz	23.2	Permittivity	39	39.34	0.87	±5
					Conductivity	1.96	2.02	3.06	±5
2021-10-19	23.5	56	2680 MHz	23.2	Permittivity	39.1	39.03	-0.18	±5
					Conductivity	2.05	2.06	0.49	±5




5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

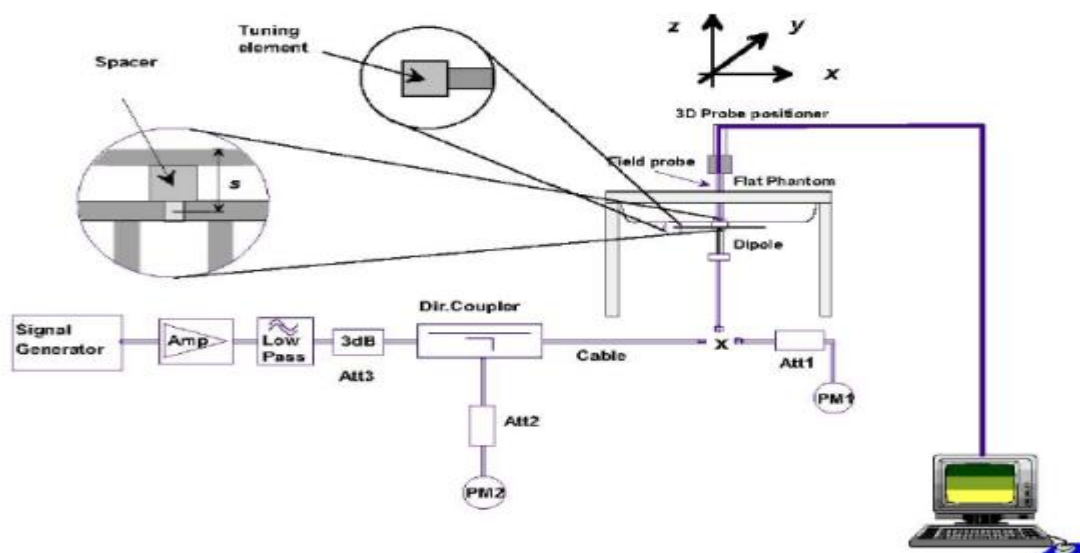

5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Freq.(MHz)	Power(mW)	Tested Value (W/Kg)	Normalized SAR (W/kg/W)	Target (W/Kg/W)	Tolerance(%)	Date
750	100	0.833	8.33	8.49	-1.94	2021-10-12
835	100	0.976	9.76	9.56	2.14	2021-10-13
1800	100	3.891	38.91	38.40	1.32	2021-10-15
1900	100	4.089	40.89	39.70	2.99	2021-10-16
2600	100	5.649	56.49	55.30	2.16	2021-10-19

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

➤ Area Scan& Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Test Position

This EUT was tested in Right Cheek, Right Titled, Left Cheek, Left Titled, Front Face and Rear Face.

Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.





8. Uncertainty

8.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Uncertainty Component	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	v_i
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.28	0.28	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.6	2.6	∞
Device holder uncertainty	3	N	1	1	1	3	3	∞
SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and tissue parameters								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.79	9.59	
Expanded Uncertainty (95% Confidence interval)		K=2				19.58	19.18	



8.2 System validation Uncertainty

Uncertainty Component	Tol (+ - %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	1	1	0.40	0.40	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-Processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
System validation source								
Deviation of experimental dipole from numerical dipole	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up								
Phantom uncertainty (shape and thickness uncertainty)	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.718	9.517	
Expanded Uncertainty (95% Confidence interval)		K=2				19.44	19.04	



9. Conducted Power Measurement

9.1 Test Result

Burst Average Power (dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GPRS (GMSK, 1-Slot)	32.24	32.22	32.18	29.35	29.38	29.10
GPRS (GMSK, 2-Slot)	31.80	31.75	31.74	28.86	28.93	28.62
GPRS (GMSK, 3-Slot)	31.32	31.27	31.30	28.36	28.51	28.16
GPRS (GMSK, 4-Slot)	30.90	30.86	30.86	27.89	28.01	27.66
EGPRS(8PSK, 1-Slot)	28.69	29.27	28.96	27.53	27.42	27.01
EGPRS(8PSK, 2-Slot)	27.89	28.55	28.20	26.74	26.67	26.24
EGPRS(8PSK, 3-Slot)	27.16	27.84	27.43	26.02	25.91	25.47
EGPRS(8PSK, 4-Slot)	26.42	27.10	26.66	25.30	25.15	24.77
Remark: GPRS, CS4 coding scheme. EGPRS, MCS5 coding scheme. Multi-Slot Class 8, Support Max 4 downlink, 1 uplink, 5 working link Multi-Slot Class 10, Support Max 4 downlink, 2 uplink, 5 working link Multi-Slot Class 12, Support Max 4 downlink, 4 uplink, 5 working link						

Fram- Average Power(dBm)						
Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
GPRS (GMSK, 1-Slot)	23.21	23.19	23.15	20.32	20.35	20.07
GPRS (GMSK, 2-Slot)	25.78	25.73	25.72	22.84	22.91	22.60
GPRS (GMSK, 3-Slot)	27.06	27.01	27.04	24.10	24.25	23.90
GPRS (GMSK, 4-Slot)	27.89	27.85	27.85	24.88	25.00	24.65
EGPRS(8PSK, 1-Slot)	19.66	20.24	19.93	18.50	18.39	17.98
EGPRS(8PSK, 2-Slot)	21.87	22.53	22.18	20.72	20.65	20.22
EGPRS(8PSK, 3-Slot)	22.90	23.58	23.17	21.76	21.65	21.21
EGPRS(8PSK, 4-Slot)	23.41	24.09	23.65	22.29	22.14	21.76
Remark : 1. SAR testing was performed on the maximum frame-averaged power mode. 2. The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum Burst - averaged power based on time slots. The calculated method is shown as below: Frame-averaged power = Burst averaged power (1 TX Slot) – 9.03 dB Frame-averaged power = Burst averaged power (2 TX Slots) – 6.02 dB Frame-averaged power = Burst averaged power (3 TX Slots) - 4.26 dB Frame-averaged power = Burst averaged power (4 TX Slots) – 3.01 dB						

**WCDMA**

Band	WCDMA Band II			WCDMA Band V		
Channel	9262	9400	9538	4132	4183	4233
Frequency (MHz)	1852.4	1880.0	1907.6	826.4	836.6	846.6
RMC 12.2Kbps	22.68	22.31	22.48	22.14	22.83	23.05
HSDPA Subtest-1	22.62	22.29	22.40	21.73	22.63	22.96
HSDPA Subtest-2	22.20	21.84	21.94	21.25	22.19	22.52
HSDPA Subtest-3	21.72	21.43	21.63	20.81	21.75	22.09
HSDPA Subtest-4	21.25	20.93	21.23	20.47	21.37	21.62
HSUPA Subtest-1	22.56	22.14	22.31	21.55	22.53	22.90
HSUPA Subtest-2	21.70	21.22	21.33	20.65	21.54	21.94
HSUPA Subtest-3	21.68	20.74	20.95	20.62	21.08	21.62
HSUPA Subtest-4	21.28	20.27	20.53	20.26	20.73	21.18
HSUPA Subtest-5	19.86	18.78	19.12	18.81	19.31	19.72

According to 3GPP 25.101 sub-clause 6.2.2, the maximum output power is allowed to be reduced by following the table.

Table 6.1A: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_{cd}/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

**BLE**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	-15.50
	19	2440	-16.41
	39	2480	-17.32





LTE Conducted Power

General Note:

1. Anritsu CMW500 base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05, 16QAM output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05, Smaller bandwidth output power for each RB allocation configuration is $> \text{not } \frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05, smaller bandwidth SAR testing is not required.



LTE Band 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.94	23.20	22.59
1.4	1	2		23.69	22.91	22.34
1.4	1	5		23.49	22.62	22.08
1.4	3	0		23.28	22.38	21.84
1.4	3	1		23.03	22.17	21.59
1.4	3	3		22.81	21.88	21.34
1.4	6	0		22.56	21.60	21.09
1.4	1	0	16-QAM	23.69	22.90	22.30
1.4	1	2		23.48	22.69	22.04
1.4	1	5		23.21	22.41	21.75
1.4	3	0		22.94	22.13	21.49
1.4	3	1		22.64	21.84	21.25
1.4	3	3		22.39	21.63	21.04
1.4	6	0		22.12	21.34	20.76
3	1	0	QPSK	23.93	23.26	23.62
3	1	7		23.65	23.00	23.34
3	1	14		23.42	22.77	23.08
3	8	0		23.21	22.56	22.83
3	8	3		22.91	22.32	22.60
3	8	7		22.69	22.08	22.31
3	15	0		22.39	21.84	22.08
3	1	0	16-QAM	23.69	22.97	23.35
3	1	7		23.43	22.76	23.07
3	1	14		23.23	22.54	22.85
3	8	0		22.95	22.34	22.60
3	8	3		22.72	22.05	22.34
3	8	7		22.48	21.75	22.13
3	15	0		22.28	21.49	21.92



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.95	23.32	23.66
5	1	12		23.70	23.05	23.44
5	1	24		23.48	22.84	23.14
5	12	0		23.24	22.61	22.85
5	12	6		23.03	22.40	22.64
5	12	13		22.81	22.18	22.43
5	25	0		22.59	21.95	22.23
5	1	0	16-QAM	23.75	23.05	23.46
5	1	12		23.46	22.81	23.24
5	1	24		23.25	22.58	22.95
5	12	0		22.99	22.29	22.69
5	12	6		22.78	22.05	22.46
5	12	13		22.54	21.83	22.21
5	25	0		22.30	21.61	21.99
10	1	0	QPSK	23.98	23.45	23.75
10	1	24		23.76	23.24	23.52
10	1	49		23.49	23.00	23.23
10	25	0		23.21	22.79	22.97
10	25	12		22.96	22.57	22.69
10	25	25		22.74	22.28	22.42
10	50	0		22.47	22.00	22.19
10	1	0	16-QAM	23.73	23.17	23.47
10	1	24		23.51	22.96	23.23
10	1	49		23.25	22.76	22.94
10	25	0		23.02	22.49	22.68
10	25	12		22.76	22.21	22.47
10	25	25		22.47	21.94	22.19
10	50	0		22.27	21.69	21.94



LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	24.02	23.65	23.81
15	1	37		23.78	23.41	23.54
15	1	74		23.54	23.18	23.26
15	36	0		23.31	22.93	23.04
15	36	18		23.06	22.70	22.83
15	36	39		22.86	22.47	22.54
15	75	0		22.63	22.23	22.34
15	1	0	16-QAM	23.76	23.40	23.54
15	1	38		23.52	23.14	23.27
15	1	74		23.23	22.92	22.98
15	36	0		23.02	22.69	22.70
15	36	18		22.75	22.40	22.48
15	36	39		22.51	22.12	22.25
15	75	0		22.24	21.89	21.98
20	1	0	QPSK	24.23	24.03	24.12
20	1	50		24.00	23.82	23.82
20	1	99		23.70	23.52	23.57
20	50	0		23.41	23.31	23.30
20	50	25		23.16	23.10	23.08
20	50	50		22.88	22.87	22.81
20	100	0		22.60	22.62	22.55
20	1	0	16-QAM	24.03	23.74	23.86
20	1	50		23.82	23.45	23.65
20	1	99		23.58	23.24	23.43
20	50	0		23.35	22.97	23.14
20	50	25		23.10	22.74	22.92
20	50	50		22.87	22.49	22.64
20	100	0		22.62	22.24	22.38



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.89	23.78	23.92
1.4	1	2		23.63	23.55	23.71
1.4	1	5		23.43	23.33	23.46
1.4	3	0		23.15	23.07	23.26
1.4	3	1		22.95	22.80	23.05
1.4	3	3		22.67	22.60	22.80
1.4	6	0		22.45	22.31	22.52
1.4	1	0	16-QAM	23.65	23.54	23.67
1.4	1	2		23.43	23.27	23.41
1.4	1	5		23.22	22.97	23.16
1.4	3	0		22.94	22.72	22.88
1.4	3	1		22.66	22.47	22.65
1.4	3	3		22.41	22.23	22.38
1.4	6	0		22.16	22.03	22.09
3	1	0	QPSK	23.95	23.86	23.95
3	1	7		23.70	23.61	23.72
3	1	14		23.41	23.37	23.52
3	8	0		23.14	23.14	23.28
3	8	3		22.87	22.93	23.07
3	8	7		22.64	22.67	22.87
3	15	0		22.35	22.43	22.64
3	1	0	16-QAM	23.68	23.57	23.74
3	1	7		23.45	23.32	23.47
3	1	14		23.21	23.02	23.22
3	8	0		22.97	22.75	22.93
3	8	4		22.69	22.47	22.69
3	8	7		22.44	22.20	22.45
3	15	0		22.15	21.96	22.15



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.02	23.96	23.99
5	1	12		23.74	23.67	23.70
5	1	24		23.52	23.44	23.46
5	12	0		23.30	23.20	23.20
5	12	6		23.07	22.97	22.93
5	12	13		22.79	22.75	22.72
5	25	0		22.55	22.47	22.49
5	1	0	16-QAM	23.74	23.73	23.75
5	1	12		23.46	23.48	23.55
5	1	24		23.17	23.25	23.33
5	12	0		22.96	22.98	23.04
5	12	6		22.67	22.72	22.75
5	12	13		22.42	22.48	22.45
5	25	0		22.16	22.25	22.22
10	1	0	QPSK	24.23	24.12	24.13
10	1	24		23.98	23.92	23.93
10	1	49		23.78	23.71	23.64
10	25	0		23.57	23.41	23.36
10	25	12		23.35	23.11	23.09
10	25	25		23.05	22.85	22.80
10	50	0		22.78	22.58	22.60
10	1	0	16-QAM	24.03	23.83	23.93
10	1	24		23.81	23.58	23.63
10	1	49		23.53	23.36	23.37
10	25	0		23.25	23.15	23.10
10	25	12		23.00	22.91	22.80
10	25	25		22.80	22.65	22.51
10	50	0		22.51	22.41	22.28



LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	24.32	24.26	24.29
15	1	37		24.10	24.00	24.01
15	1	74		23.83	23.71	23.75
15	36	0		23.58	23.44	23.50
15	36	19		23.31	23.21	23.30
15	36	39		23.03	23.01	23.09
15	75	0		22.73	22.71	22.84
15	1	0	16-QAM	24.09	23.99	24.00
15	1	38		23.82	23.71	23.79
15	1	75		23.57	23.43	23.56
15	36	0		23.36	23.15	23.35
15	36	19		23.08	22.88	23.12
15	36	39		22.80	22.62	22.84
15	75	0		22.54	22.39	22.56
20	1	0	QPSK	24.85	24.88	24.76
20	1	50		24.62	24.59	24.49
20	1	99		24.39	24.39	24.21
20	50	0		24.09	24.11	23.93
20	50	25		23.82	23.87	23.72
20	50	50		23.57	23.59	23.42
20	100	0		23.29	23.38	23.12
20	1	0	16-QAM	24.63	24.62	24.53
20	1	50		24.37	24.34	24.24
20	1	99		24.15	24.10	23.97
20	50	0		23.89	23.83	23.73
20	50	25		23.60	23.63	23.50
20	50	50		23.36	23.37	23.20
20	100	0		23.09	23.14	22.92



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.89	23.78	23.88
1.4	1	2		23.65	23.57	23.61
1.4	1	5		23.41	23.33	23.35
1.4	3	0		23.20	23.08	23.06
1.4	3	1		22.97	22.79	22.79
1.4	3	2		22.76	22.51	22.59
1.4	6	0		22.48	22.28	22.33
1.4	1	0	16-QAM	23.66	23.58	23.61
1.4	1	2		23.41	23.34	23.34
1.4	1	5		23.21	23.10	23.13
1.4	3	0		22.98	22.80	22.84
1.4	3	1		22.72	22.53	22.58
1.4	3	2		22.45	22.26	22.36
1.4	6	0		22.17	22.03	22.13
3	1	0	QPSK	23.98	23.86	23.95
3	1	7		23.74	23.63	23.74
3	1	14		23.51	23.34	23.49
3	8	0		23.29	23.13	23.20
3	8	4		23.00	22.89	22.98
3	8	7		22.77	22.61	22.75
3	15	0		22.49	22.36	22.46
3	1	0	16-QAM	23.72	23.58	23.67
3	1	7		23.51	23.36	23.38
3	1	14		23.26	23.07	23.10
3	8	0		23.05	22.83	22.88
3	8	4		22.77	22.53	22.67
3	8	7		22.53	22.27	22.39
3	15	0		22.32	21.99	22.17



LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.12	24.06	24.23
5	1	12		23.88	23.84	23.99
5	1	24		23.63	23.64	23.69
5	12	0		23.35	23.42	23.49
5	12	6		23.12	23.15	23.21
5	12	11		22.92	22.85	22.91
5	25	0		22.69	22.56	22.67
5	1	0	16-QAM	23.85	23.82	23.95
5	1	12		23.59	23.58	23.68
5	1	24		23.34	23.33	23.39
5	12	0		23.06	23.03	23.09
5	12	6		22.83	22.82	22.80
5	12	11		22.63	22.58	22.52
5	25	0		22.34	22.29	22.22
10	1	0	QPSK	24.56	24.62	24.68
10	1	24		24.27	24.37	24.40
10	1	49		24.01	24.08	24.17
10	25	0		23.80	23.81	23.90
10	25	12		23.51	23.54	23.69
10	25	24		23.29	23.32	23.39
10	50	0		23.00	23.10	23.16
10	1	0	16-QAM	24.27	24.36	24.38
10	1	24		24.03	24.16	24.14
10	1	49		23.74	23.93	23.90
10	25	0		23.49	23.69	23.66
10	25	12		23.26	23.45	23.44
10	25	24		23.02	23.25	23.17
10	50	0		22.81	22.99	22.95



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.56	22.62	22.68
5	1	12		22.36	22.36	22.38
5	1	24		22.11	22.10	22.18
5	12	0		21.83	21.86	21.92
5	12	6		21.58	21.61	21.71
5	12	11		21.33	21.34	21.49
5	25	0		21.07	21.09	21.26
5	1	0	16-QAM	22.31	22.40	22.45
5	1	12		22.05	22.17	22.20
5	1	24		21.81	21.94	21.91
5	12	0		21.58	21.66	21.67
5	12	6		21.35	21.46	21.46
5	12	11		21.13	21.20	21.21
5	25	0		20.91	20.96	21.01
10	1	0	QPSK	22.75	22.78	22.86
10	1	24		22.47	22.52	22.65
10	1	49		22.21	22.23	22.36
10	25	0		22.00	21.94	22.10
10	25	12		21.73	21.71	21.90
10	25	24		21.43	21.42	21.64
10	50	0		21.17	21.13	21.37
10	1	0	16-QAM	22.50	22.53	22.63
10	1	24		22.21	22.32	22.41
10	1	49		21.96	22.10	22.15
10	25	0		21.74	21.82	21.94
10	25	12		21.51	21.59	21.65
10	25	24		21.27	21.35	21.37
10	50	0		21.01	21.05	21.14



LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.12	23.23	23.18
15	1	37		22.87	23.02	22.95
15	1	74		22.62	22.76	22.69
15	36	0		22.33	22.51	22.47
15	36	19		22.08	22.21	22.18
15	36	39		21.85	21.95	21.92
15	75	0		21.59	21.66	21.63
15	1	0	16-QAM	22.87	22.96	22.93
15	1	38		22.61	22.68	22.66
15	1	75		22.31	22.45	22.44
15	36	0		22.06	22.17	22.17
15	36	19		21.80	21.92	21.94
15	36	39		21.57	21.70	21.74
15	75	0		21.28	21.46	21.54
20	1	0	QPSK	23.89	23.95	23.94
20	1	50		23.67	23.65	23.67
20	1	99		23.46	23.36	23.47
20	50	0		23.20	23.10	23.23
20	50	25		22.91	22.81	22.96
20	50	50		22.64	22.56	22.75
20	100	0		22.36	22.30	22.50
20	1	0	16-QAM	23.60	23.70	23.68
20	1	50		23.36	23.44	23.43
20	1	99		23.12	23.18	23.22
20	50	0		22.85	22.95	22.97
20	50	25		22.88	22.75	22.88
20	50	50		22.59	22.51	22.61
20	100	0		22.25	22.22	22.42



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	24.89	24.62	24.88
1.4	1	2		24.60	24.35	24.66
1.4	1	5		24.33	24.12	24.36
1.4	3	0		24.08	23.88	24.09
1.4	3	1		23.81	23.59	23.81
1.4	3	2		23.54	23.33	23.51
1.4	6	0		23.31	23.13	23.22
1.4	1	0	16-QAM	24.68	24.33	24.60
1.4	1	2		24.42	24.03	24.39
1.4	1	5		24.16	23.74	24.17
1.4	3	0		23.88	23.48	23.96
1.4	3	1		23.64	23.24	23.71
1.4	3	2		23.35	23.00	23.43
1.4	6	0		23.09	22.78	23.18
3	1	0	QPSK	24.92	24.85	24.96
3	1	7		24.70	24.56	24.73
3	1	14		24.44	24.31	24.47
3	8	0		24.16	24.07	24.19
3	8	4		23.86	23.78	23.97
3	8	7		23.61	23.55	23.72
3	15	0		23.32	23.27	23.44
3	1	0	16-QAM	24.64	24.56	24.72
3	1	7		24.37	24.35	24.43
3	1	14		24.17	24.12	24.23
3	8	0		23.90	23.84	23.98
3	8	4		23.67	23.56	23.72
3	8	7		23.43	23.31	23.45
3	15	0		23.17	23.01	23.20



LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.93	24.92	24.96
5	1	12		24.66	24.63	24.69
5	1	24		24.42	24.37	24.46
5	12	0		24.13	24.13	24.20
5	12	6		23.90	23.85	23.96
5	12	11		23.67	23.55	23.76
5	25	0		23.41	23.34	23.55
5	1	0	16-QAM	24.72	24.72	24.73
5	1	12		24.50	24.44	24.52
5	1	24		24.27	24.18	24.27
5	12	0		23.99	23.97	24.00
5	12	6		23.69	23.77	23.76
5	12	11		23.47	23.50	23.50
5	25	0		23.19	23.21	23.28
10	1	0	QPSK	25.02	25.12	25.06
10	1	24		24.79	24.92	24.84
10	1	49		24.55	24.71	24.55
10	25	0		24.27	24.48	24.29
10	25	12		23.98	24.21	24.01
10	25	24		23.70	24.00	23.78
10	50	0		23.44	23.70	23.52
10	1	0	16-QAM	24.72	24.89	24.82
10	1	24		24.52	24.67	24.57
10	1	49		24.32	24.44	24.34
10	25	0		24.09	24.16	24.05
10	25	12		23.83	23.92	23.79
10	25	24		23.53	23.71	23.59
10	50	0		23.33	23.49	23.30



LTE BAND 13

LTE Band 13 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.23	23.26	23.35
5	1	12		22.96	23.02	23.09
5	1	24		22.75	22.78	22.82
5	12	0		22.46	22.51	22.54
5	12	6		22.21	22.30	22.31
5	12	11		21.99	22.04	22.03
5	25	0		21.78	21.76	21.83
5	1	0	16-QAM	23.00	23.06	23.11
5	1	12		22.80	22.77	22.85
5	1	24		22.55	22.51	22.55
5	12	0		22.33	22.28	22.27
5	12	6		22.09	22.07	22.01
5	12	11		21.86	21.86	21.75
5	25	0		21.58	21.58	21.49
10	1	0	QPSK	N/A	24.23	N/A
10	1	24		N/A	23.96	N/A
10	1	49		N/A	23.67	N/A
10	25	0		N/A	23.45	N/A
10	25	12		N/A	23.19	N/A
10	25	24		N/A	22.90	N/A
10	50	0		N/A	22.66	N/A
10	1	0	16-QAM	N/A	23.95	N/A
10	1	24		N/A	23.70	N/A
10	1	49		N/A	23.44	N/A
10	25	0		N/A	23.21	N/A
10	25	12		N/A	22.96	N/A
10	25	24		N/A	22.71	N/A
10	50	0		N/A	22.42	N/A



LTE BAND 17

LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.56	23.62	23.68
5	1	12		23.34	23.40	23.40
5	1	24		23.06	23.14	23.17
5	12	0		22.79	22.89	22.93
5	12	6		22.57	22.65	22.66
5	12	11		22.35	22.36	22.37
5	25	0		22.14	22.13	22.07
5	1	0	16-QAM	23.28	23.33	23.44
5	1	12		23.01	23.05	23.24
5	1	24		22.74	22.83	23.02
5	12	0		22.46	22.53	22.78
5	12	6		22.23	22.30	22.53
5	12	11		21.99	22.08	22.23
5	25	0		21.72	21.85	21.98
10	1	0	QPSK	24.03	24.12	24.23
10	1	24		23.77	23.89	23.95
10	1	49		23.56	23.64	23.65
10	25	0		23.35	23.41	23.36
10	25	12		23.05	23.19	23.08
10	25	24		22.82	22.98	22.87
10	50	0		22.57	22.69	22.57
10	1	0	16-QAM	23.80	23.89	24.03
10	1	24		23.54	23.60	23.75
10	1	49		23.26	23.33	23.49
10	25	0		22.99	23.04	23.28
10	25	12		22.73	22.76	23.04
10	25	24		22.44	22.50	22.81
10	50	0		22.16	22.26	22.53



LTE BAND 25

LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.32	23.45	23.56
1.4	1	2		23.10	23.21	23.36
1.4	1	5		22.82	22.92	23.06
1.4	3	0		22.58	22.67	22.84
1.4	3	1		22.37	22.40	22.58
1.4	3	2		22.09	22.19	22.32
1.4	6	0		21.85	21.91	22.07
1.4	1	0	16-QAM	23.05	23.19	23.34
1.4	1	2		22.83	22.90	23.05
1.4	1	5		22.62	22.64	22.78
1.4	3	0		22.39	22.36	22.51
1.4	3	1		22.17	22.09	22.23
1.4	3	2		21.89	21.87	21.99
1.4	6	0		21.59	21.59	21.73
3	1	0	QPSK	23.56	23.62	23.68
3	1	7		23.28	23.33	23.39
3	1	14		22.99	23.09	23.17
3	8	0		22.78	22.88	22.90
3	8	4		22.58	22.59	22.64
3	8	7		22.33	22.31	22.36
3	15	0		22.11	22.07	22.10
3	1	0	16-QAM	23.30	23.39	23.47
3	1	7		23.05	23.15	23.19
3	1	14		22.80	22.92	22.97
3	8	0		22.58	22.66	22.68
3	8	4		22.37	22.42	22.41
3	8	7		22.09	22.22	22.20
3	15	0		21.86	22.01	21.96



LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.85	23.89	23.92
5	1	12		23.58	23.64	23.64
5	1	24		23.33	23.37	23.41
5	12	0		23.12	23.12	23.12
5	12	6		22.83	22.90	22.85
5	12	11		22.55	22.61	22.59
5	25	0		22.33	22.39	22.37
5	1	0	16-QAM	23.57	23.62	23.63
5	1	12		23.33	23.40	23.34
5	1	24		23.09	23.10	23.12
5	12	0		22.88	22.85	22.85
5	12	6		22.65	22.58	22.64
5	12	11		22.45	22.36	22.37
5	25	0		22.17	22.14	22.10
10	1	0	QPSK	23.95	23.96	23.99
10	1	24		23.72	23.68	23.76
10	1	49		23.51	23.39	23.48
10	25	0		23.27	23.10	23.25
10	25	12		23.03	22.84	22.97
10	25	24		22.75	22.59	22.73
10	50	0		22.46	22.36	22.53
10	1	0	16-QAM	23.69	23.72	23.70
10	1	24		23.45	23.43	23.46
10	1	49		23.19	23.15	23.16
10	25	0		22.90	22.89	22.90
10	25	12		22.69	22.61	22.66
10	25	24		22.42	22.35	22.46
10	50	0		22.16	22.13	22.22



LTE Band 25 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	24.13	24.23	24.32
15	1	37		23.90	23.94	24.04
15	1	74		23.69	23.69	23.77
15	36	0		23.48	23.43	23.48
15	36	18		23.21	23.22	23.18
15	36	39		22.98	22.94	22.93
15	75	0		22.71	22.74	22.72
15	1	0	16-QAM	23.87	23.99	24.09
15	1	38		23.58	23.72	23.88
15	1	75		23.30	23.49	23.68
15	36	0		23.09	23.26	23.48
15	36	18		22.80	22.96	23.22
15	36	39		22.54	22.73	22.97
15	75	0		22.30	22.51	22.76
20	1	0	QPSK	24.56	24.62	24.66
20	1	49		24.35	24.34	24.36
20	1	99		24.08	24.07	24.14
20	50	0		23.85	23.78	23.91
20	50	24		23.58	23.49	23.68
20	50	49		23.29	23.21	23.40
20	100	0		23.06	22.94	23.15
20	1	0	16-QAM	24.33	24.35	24.44
20	1	49		24.07	24.06	24.20
20	1	99		23.82	23.81	23.95
20	50	0		23.57	23.57	23.74
20	50	24		23.32	23.32	23.46
20	50	49		23.07	23.09	23.17
20	100	0		22.83	22.81	22.88



LTE BAND 26 Part22

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	24.85	24.89	24.92
1.4	1	2		24.65	24.66	24.70
1.4	1	5		24.42	24.41	24.49
1.4	3	0		24.15	24.21	24.26
1.4	3	1		23.85	23.98	24.04
1.4	3	2		23.63	23.72	23.79
1.4	6	0		23.40	23.51	23.53
1.4	1	0	16-QAM	24.58	24.63	24.64
1.4	1	2		24.32	24.40	24.37
1.4	1	5		24.05	24.17	24.16
1.4	3	0		23.76	23.93	23.94
1.4	3	1		23.50	23.67	23.65
1.4	3	2		23.29	23.43	23.37
1.4	6	0		23.06	23.18	23.13
3	1	0	QPSK	24.86	24.92	24.96
3	1	7		24.57	24.62	24.69
3	1	14		24.27	24.34	24.40
3	8	0		24.06	24.13	24.13
3	8	4		23.80	23.86	23.83
3	8	7		23.60	23.62	23.59
3	15	0		23.32	23.40	23.38
3	1	0	16-QAM	24.66	24.66	24.72
3	1	7		24.43	24.44	24.49
3	1	14		24.22	24.22	24.28
3	8	0		24.01	23.93	24.06
3	8	4		23.76	23.68	23.83
3	8	7		23.47	23.43	23.62
3	15	0		23.26	23.20	23.38



LTE BAND 26 Part22

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.93	24.96	24.99
5	1	12		24.72	24.72	24.76
5	1	24		24.43	24.48	24.53
5	12	0		24.16	24.19	24.30
5	12	6		23.91	23.91	24.04
5	12	11		23.62	23.69	23.81
5	25	0		23.39	23.40	23.56
5	1	0	16-QAM	24.69	24.73	24.76
5	1	12		24.47	24.49	24.50
5	1	24		24.26	24.25	24.25
5	12	0		23.96	24.00	24.03
5	12	6		23.67	23.74	23.75
5	12	11		23.41	23.45	23.49
5	25	0		23.16	23.17	23.27
10	1	0	QPSK	24.99	25.01	25.03
10	1	24		24.77	24.71	24.74
10	1	49		24.48	24.47	24.52
10	25	0		24.23	24.22	24.23
10	25	12		24.01	24.00	24.00
10	25	24		23.80	23.80	23.79
10	50	0		23.59	23.54	23.59
10	1	0	16-QAM	24.70	24.77	24.73
10	1	24		24.41	24.54	24.53
10	1	49		24.19	24.30	24.28
10	25	0		23.99	24.03	24.02
10	25	12		23.71	23.80	23.75
10	25	24		23.47	23.54	23.53
10	50	0		23.17	23.29	23.24



LTE BAND 26 Part22

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	25.12	25.19	25.23
15	1	37		24.83	24.90	24.94
15	1	74		24.58	24.67	24.70
15	36	0		24.29	24.42	24.44
15	36	18		24.03	24.16	24.23
15	36	39		23.73	23.95	23.95
15	75	0		23.52	23.70	23.70
15	1	0	16-QAM	24.91	24.92	24.95
15	1	38		24.65	24.70	24.68
15	1	75		24.39	24.49	24.47
15	36	0		24.16	24.24	24.17
15	36	18		23.88	24.04	23.93
15	36	39		23.67	23.75	23.68
15	75	0		23.44	23.45	23.45



LTE BAND 26 Part90

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	24.35	24.89	24.93
1.4	1	2		24.06	24.61	24.65
1.4	1	5		23.78	24.38	24.40
1.4	3	0		23.49	24.14	24.11
1.4	3	1		23.27	23.92	23.82
1.4	3	2		23.02	23.63	23.59
1.4	6	0		22.74	23.40	23.35
1.4	1	0	16-QAM	24.08	24.66	24.71
1.4	1	2		23.78	24.42	24.49
1.4	1	5		23.51	24.21	24.21
1.4	3	0		23.23	23.98	23.91
1.4	3	1		22.98	23.75	23.66
1.4	3	2		22.74	23.49	23.43
1.4	6	0		22.54	23.28	23.22
3	1	0	QPSK	24.55	24.93	24.98
3	1	7		24.32	24.72	24.74
3	1	14		24.07	24.44	24.45
3	8	0		23.81	24.18	24.23
3	8	4		23.57	23.94	23.96
3	8	7		23.29	23.70	23.72
3	15	0		22.99	23.41	23.44
3	1	0	16-QAM	24.34	24.73	24.71
3	1	7		24.10	24.52	24.50
3	1	14		23.86	24.26	24.21
3	8	0		23.61	24.03	23.91
3	8	4		23.41	23.79	23.63
3	8	7		23.19	23.58	23.38
3	15	0		22.96	23.36	23.12



LTE BAND 26 Part90

LTE Band 26 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	24.89	25.02	25.06
5	1	12		24.66	24.73	24.77
5	1	24		24.46	24.44	24.49
5	12	0		24.17	24.18	24.28
5	12	6		23.90	23.95	24.06
5	12	11		23.66	23.73	23.85
5	25	0		23.39	23.51	23.57
5	1	0	16-QAM	24.67	24.75	24.79
5	1	12		24.38	24.49	24.57
5	1	24		24.14	24.22	24.37
5	12	0		23.86	24.00	24.07
5	12	6		23.63	23.70	23.86
5	12	11		23.36	23.47	23.61
5	25	0		23.12	23.18	23.34
10	1	0	QPSK	N/A	25.23	N/A
10	1	24		N/A	24.93	N/A
10	1	49		N/A	24.67	N/A
10	25	0		N/A	24.40	N/A
10	25	12		N/A	24.15	N/A
10	25	24		N/A	23.92	N/A
10	50	0		N/A	23.65	N/A
10	1	0	16-QAM	N/A	24.94	N/A
10	1	24		N/A	24.64	N/A
10	1	49		N/A	24.41	N/A
10	25	0		N/A	24.14	N/A
10	25	12		N/A	23.86	N/A
10	25	24		N/A	23.61	N/A
10	50	0		N/A	23.37	N/A



LTE BAND 41

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.35	23.42	23.52
5	1	12		23.08	23.13	23.26
5	1	24		22.81	22.90	22.99
5	12	0		22.53	22.64	22.73
5	12	6		22.24	22.39	22.43
5	12	13		21.98	22.17	22.20
5	25	0		21.70	21.96	21.96
5	1	0	16-QAM	23.09	23.16	23.26
5	1	12		22.83	22.94	23.02
5	1	24		22.57	22.64	22.82
5	12	0		22.31	22.43	22.53
5	12	6		22.11	22.22	22.33
5	12	13		21.83	21.98	22.12
5	25	0		21.55	21.69	21.89
10	1	0	QPSK	23.52	23.59	23.69
10	1	24		23.23	23.32	23.49
10	1	49		22.98	23.06	23.23
10	25	0		22.71	22.85	22.94
10	25	12		22.46	22.59	22.69
10	25	25		22.17	22.29	22.41
10	50	0		21.90	22.08	22.13
10	1	0	16-QAM	23.28	23.30	23.41
10	1	24		23.04	23.09	23.16
10	1	49		22.76	22.89	22.86
10	25	0		22.56	22.67	22.66
10	25	12		22.28	22.45	22.45
10	25	25		22.08	22.25	22.18
10	50	0		21.87	22.03	21.93



LTE BAND 41

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.72	23.75	23.88
15	1	37		23.48	23.52	23.64
15	1	74		23.25	23.23	23.37
15	36	0		23.03	23.01	23.15
15	36	19		22.76	22.72	22.90
15	36	39		22.52	22.43	22.63
15	75	0		22.25	22.17	22.41
15	1	0	16-QAM	23.48	23.47	23.62
15	1	38		23.27	23.27	23.37
15	1	75		23.07	23.05	23.10
15	36	0		22.82	22.81	22.89
15	36	19		22.56	22.52	22.61
15	36	39		22.34	22.27	22.36
15	75	0		22.07	22.05	22.06
20	1	0	QPSK	24.22	24.23	24.35
20	1	50		23.98	23.94	24.10
20	1	99		23.70	23.65	23.80
20	50	0		23.42	23.44	23.55
20	50	25		23.20	23.21	23.26
20	50	50		22.95	23.00	23.01
20	100	0		22.70	22.72	22.79
20	1	0	16-QAM	23.98	23.93	24.09
20	1	50		23.72	23.65	23.86
20	1	99		23.43	23.35	23.57
20	50	0		23.22	23.07	23.30
20	50	25		22.96	22.83	23.02
20	50	50		22.67	22.61	22.73
20	100	0		22.45	22.38	22.46



9.2 SAR Test Exclusions Applied

Per FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where:

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$


Based on the maximum conducted power of **Bluetooth Body** (rounded to the nearest mW) and the antenna to user separation distance,

Bluetooth Body SAR was not required; $[(0.04/5) * \sqrt{2.402}] = 0.012 < 3.0$.


10. EUT and Test Setup Photo

10.1 EUT Photo


Front side

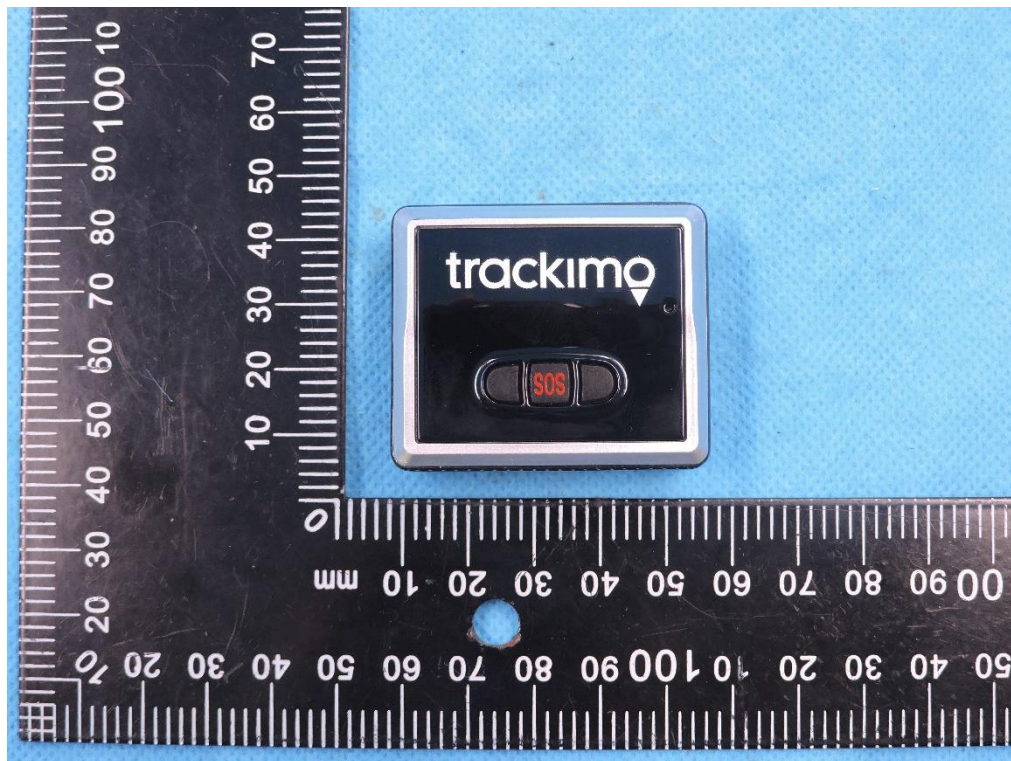


Back side

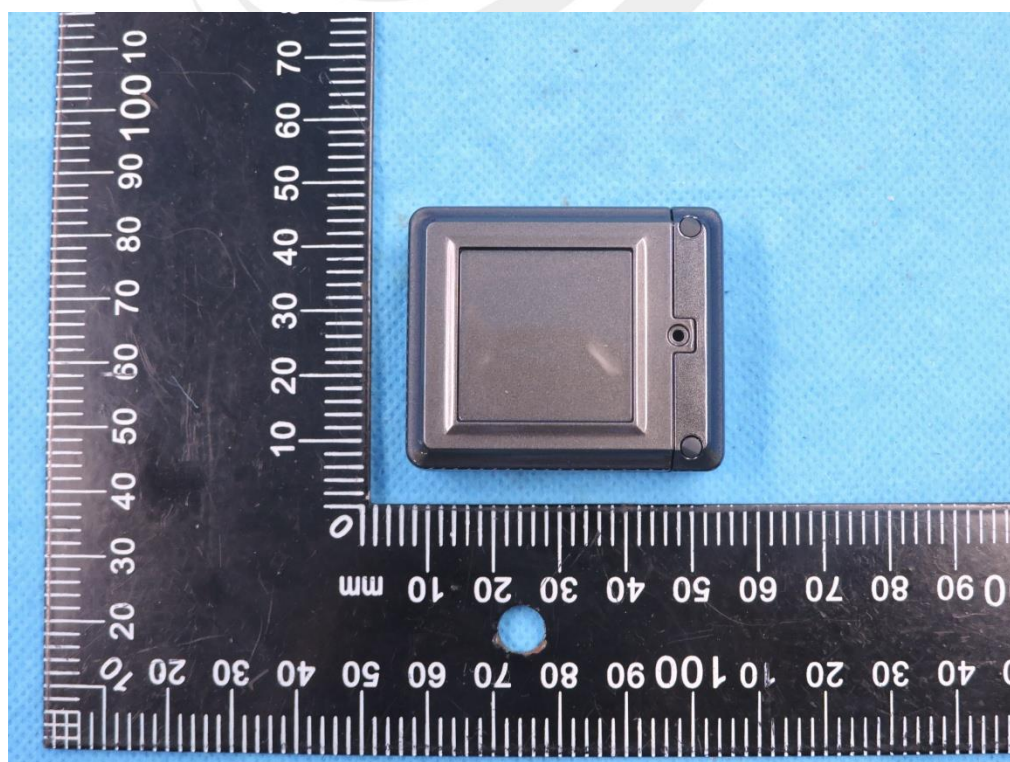


Left Edge

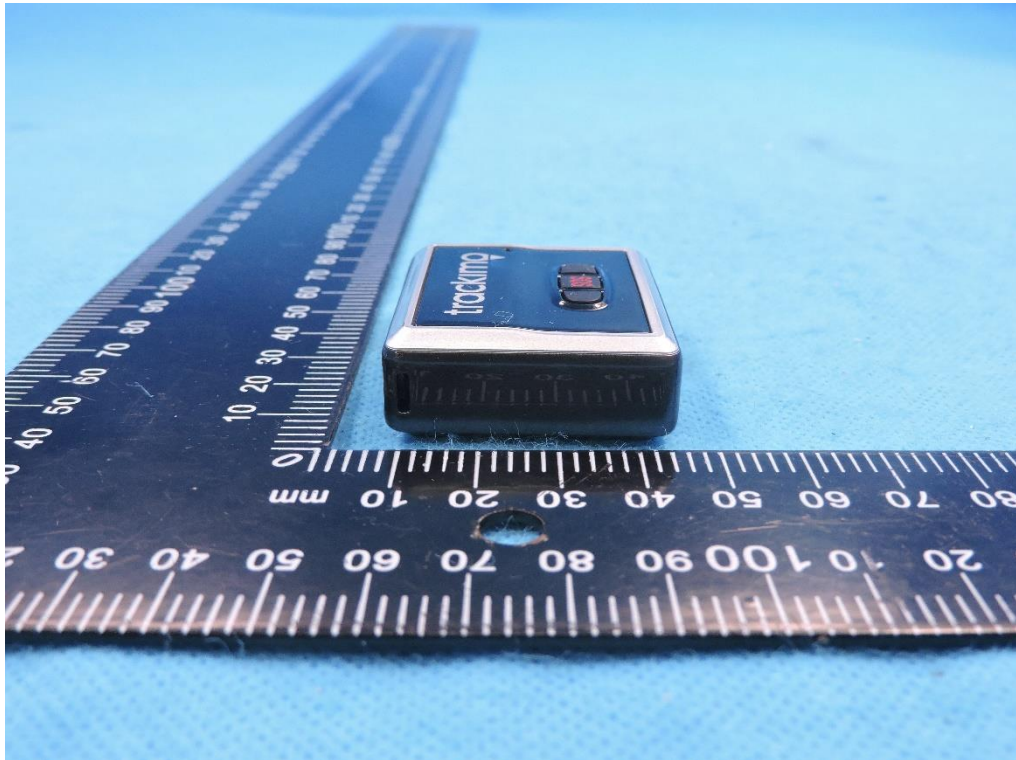


Right Edge

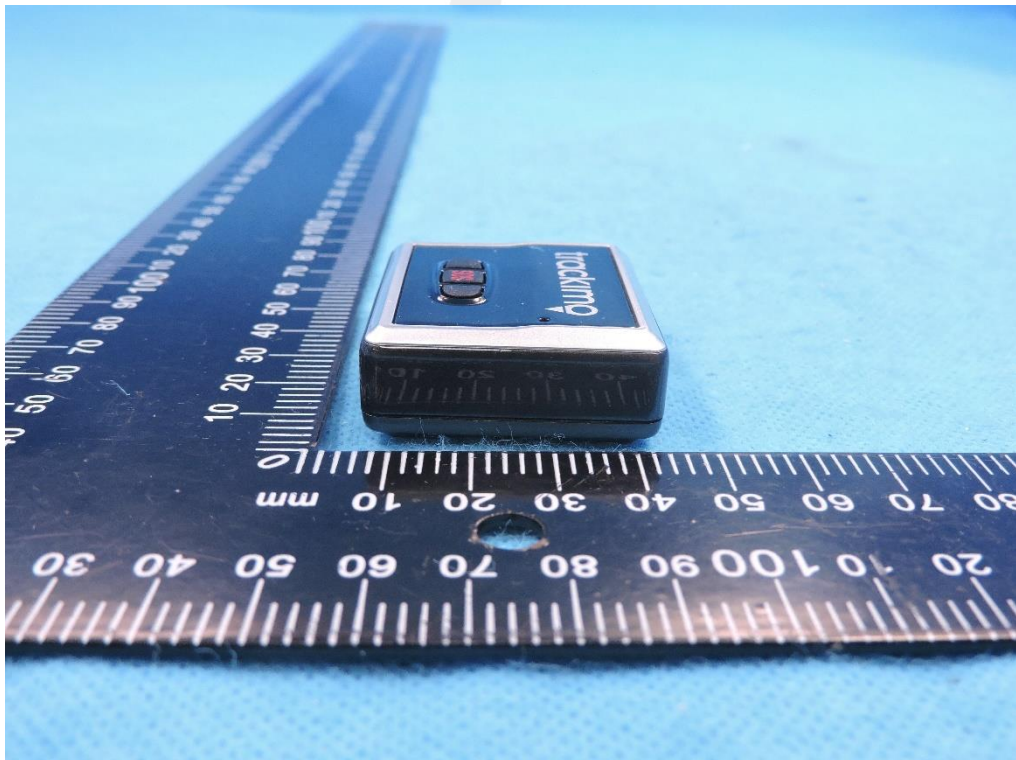

Top Edge

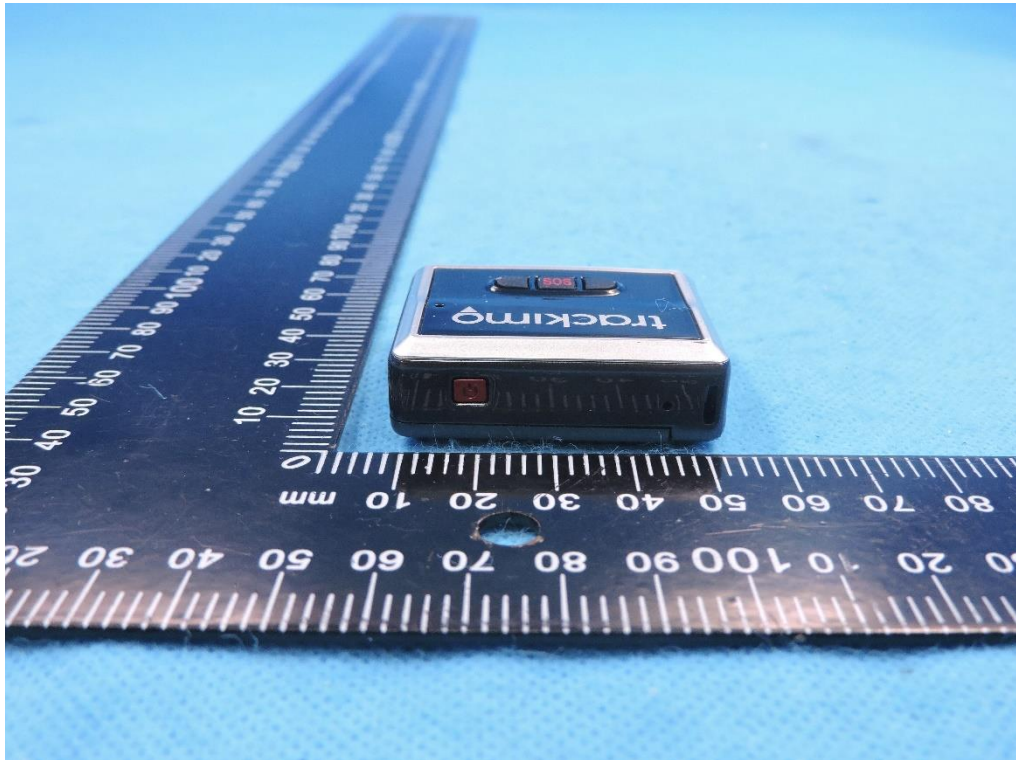


Bottom Edge

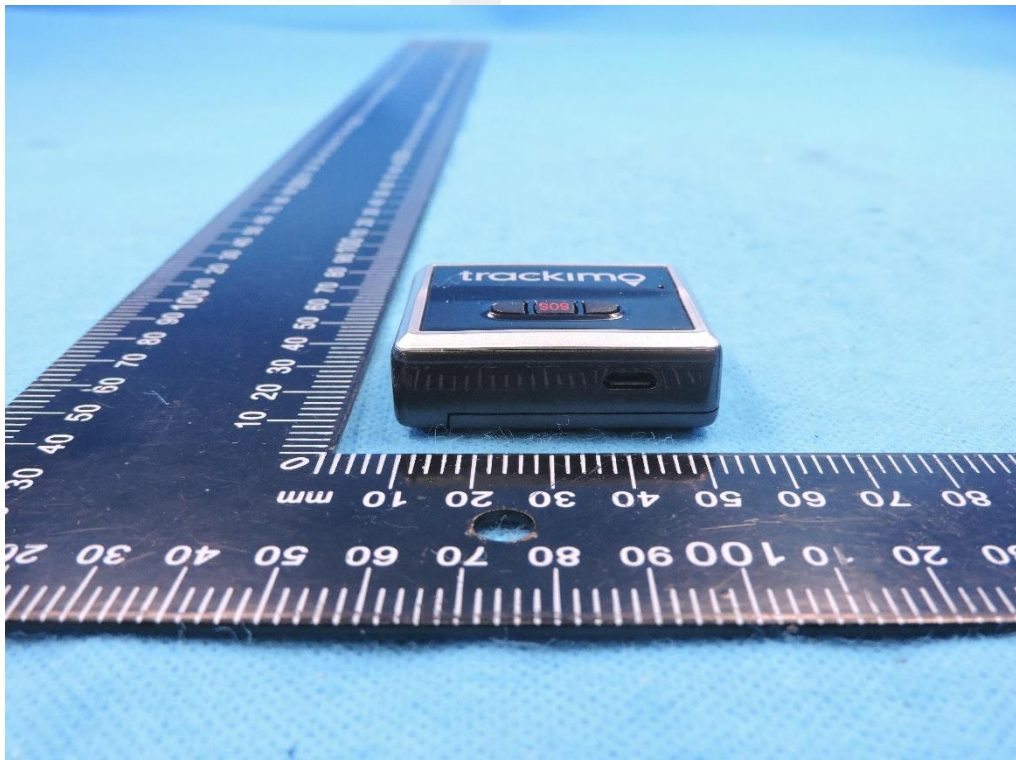

10.2 Setup Photo

Front Side

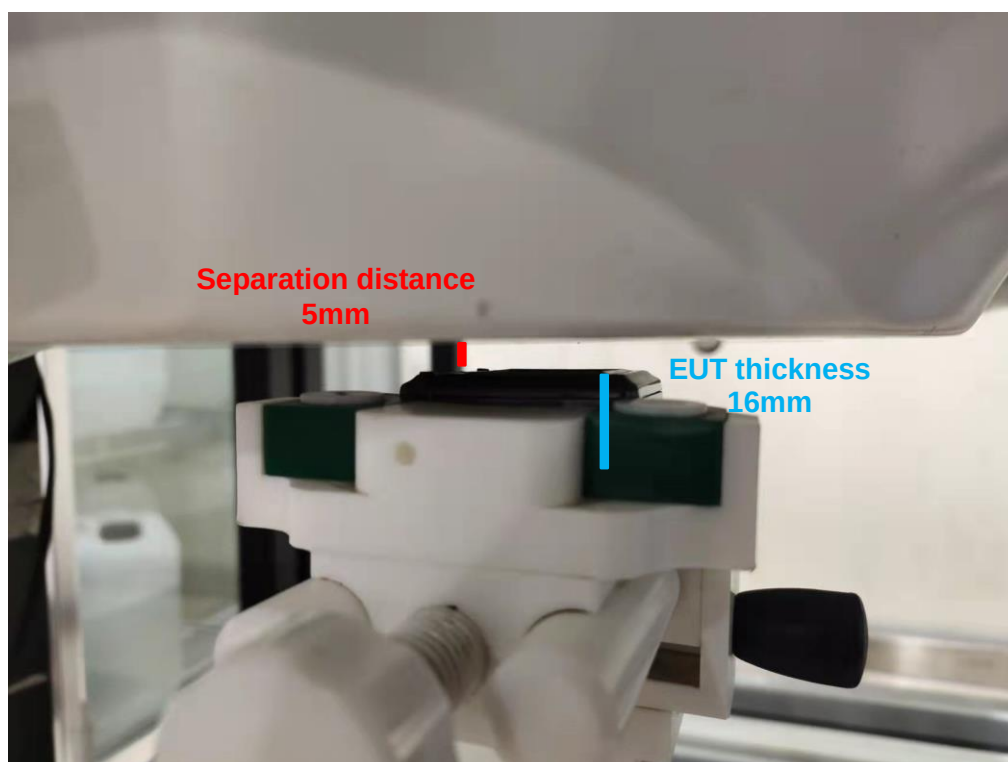


Back Side



Left Edge



Right Edge

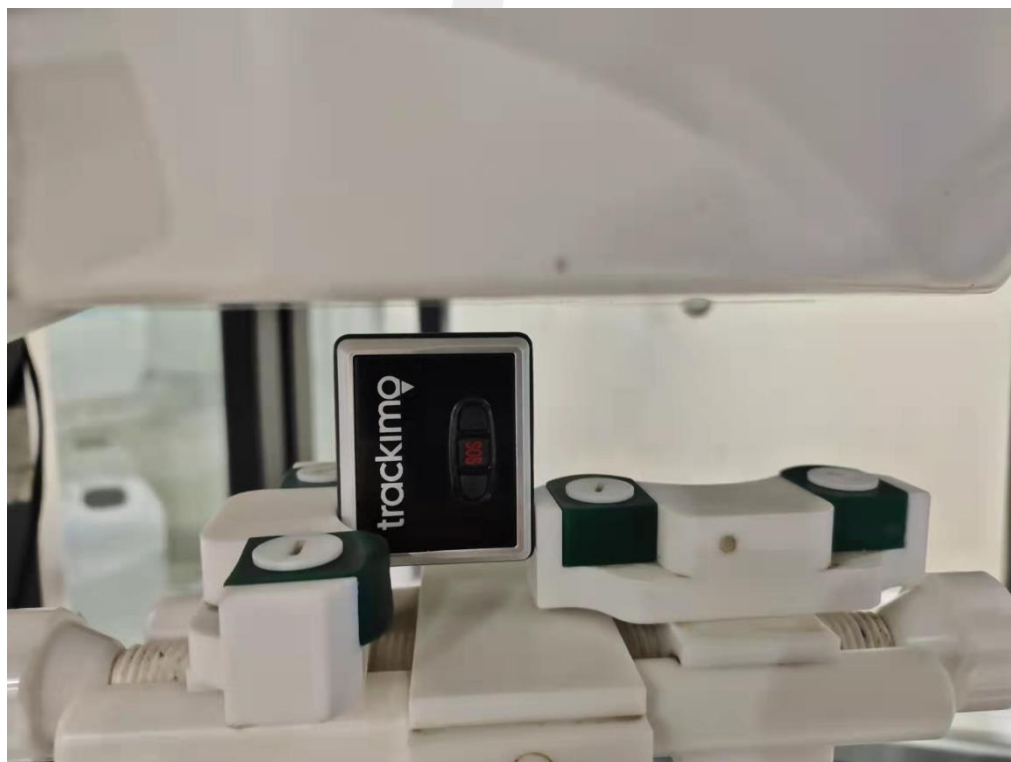


Top Edge



Bottom Edge



Liquid depth (15 cm)

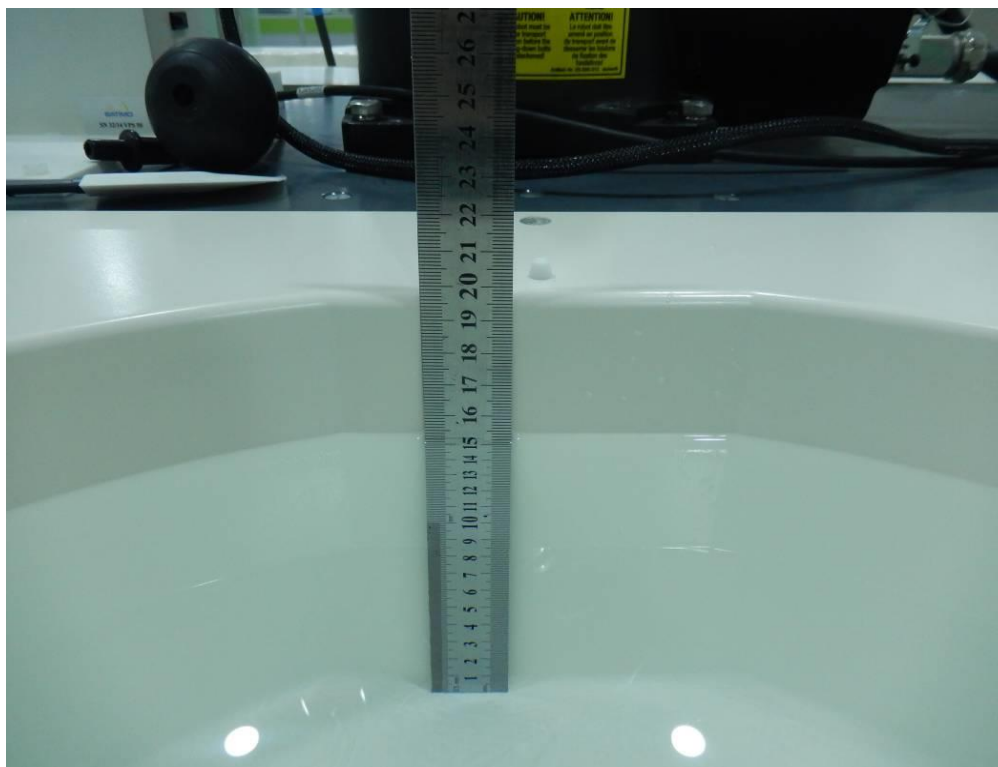



11. SAR Result Summary

11.1 Body-worn SAR

Band	Mode	Test Position	Fre. (MHz)	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
GSM 850	GPRS Data-4 Slot	Front Side	824.2	0.028	2.72	31.00	30.90	0.029	/
		Back Side	824.2	0.023	-1.50	31.00	30.90	0.024	/
		Left Edge	824.2	0.069	3.07	31.00	30.90	0.071	1
		Right Edge	824.2	0.036	2.59	31.00	30.90	0.037	/
		Top Edge	824.2	0.011	-3.00	31.00	30.90	0.011	/
		Bottom Edge	824.2	0.041	1.88	31.00	30.90	0.042	/
GSM1900	GPRS Data-4 Slot	Front Side	1880	0.454	2.24	28.50	28.01	0.508	/
		Back Side	1880	0.354	1.35	28.50	28.01	0.396	/
		Left Edge	1880	0.640	0.56	28.50	28.01	0.716	2
		Right Edge	1880	0.534	1.23	28.50	28.01	0.598	/
		Top Edge	1880	0.324	-3.62	28.50	28.01	0.363	/
		Bottom Edge	1880	0.411	2.31	28.50	28.01	0.460	/
WCDMA II	RMC	Front Side	1852.4	0.523	1.92	23.00	22.68	0.563	/
		Back Side	1852.4	0.544	-0.50	23.00	22.68	0.586	/
		Left Edge	1880	0.927	1.05	23.00	22.68	0.998	/
		Left Edge	1907.6	0.958	0.84	23.00	22.68	1.031	/
		Left Edge	1852.4	1.045	0.36	23.00	22.68	1.125	3
		Right Edge	1852.4	0.811	-2.76	23.00	22.68	0.873	/
		Top Edge	1852.4	0.457	-3.33	23.00	22.68	0.492	/
		Bottom Edge	1852.4	0.736	-3.76	23.00	22.68	0.792	/
WCDMA V	RMC	Front Side	846.6	0.028	2.78	23.10	23.05	0.028	/
		Back Side	846.6	0.033	-1.64	23.10	23.05	0.033	/
		Left Edge	846.6	0.042	-2.55	23.10	23.05	0.042	4
		Right Edge	846.6	0.014	1.41	23.10	23.05	0.014	/
		Top Edge	846.6	0.019	-0.04	23.10	23.05	0.019	/
		Bottom Edge	846.6	0.019	-0.09	23.10	23.05	0.019	/



Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Fre. (MHz)	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Front side	1860	0.541	0.09	24.50	24.23	0.576	/
			50	0	Front side	1860	0.471	-2.99	23.50	23.41	0.481	/
			1	0	Back Side	1860	0.532	-0.06	24.50	24.23	0.566	/
			50	0	Back Side	1860	0.467	-0.59	23.50	23.41	0.477	/
			1	0	Left Side	1860	0.834	-1.48	24.50	24.23	0.887	5
			50	0	Left Side	1860	0.748	1.54	23.50	23.41	0.764	/
			100	0	Left Side	1860	0.676	-1.39	23.00	22.60	0.741	/
			1	0	Left Side	1880	0.759	-3.49	24.50	24.03	0.846	/
			50	0	Left Side	1880	0.713	-1.51	23.50	23.31	0.745	/
			100	0	Left Side	1880	0.681	2.85	23.00	22.62	0.743	/
			1	0	Left Side	1900	0.743	-2.06	24.50	24.12	0.811	/
			50	0	Left Side	1900	0.701	1.04	23.50	23.30	0.734	/
			100	0	Left Side	1900	0.659	1.02	23.00	22.55	0.731	/
			1	0	Right Side	1860	0.710	-3.94	24.50	24.23	0.756	/
			50	0	Right Side	1860	0.680	-3.08	23.50	23.41	0.694	/
			1	0	Top Edge	1860	0.531	-0.93	24.50	24.23	0.565	/
			50	0	Top Edge	1860	0.511	3.60	23.50	23.41	0.522	/
			1	0	Bottom Side	1860	0.655	1.62	24.50	24.23	0.697	/
			50	0	Bottom Side	1860	0.600	0.50	23.50	23.41	0.613	/
LTE Band 4	20M	QPSK	1	0	Front side	1732.5	0.187	2.86	25.00	24.88	0.192	/
			50	0	Front side	1732.5	0.171	3.53	24.50	24.11	0.187	/
			1	0	Back Side	1732.5	0.174	-1.37	25.00	24.88	0.179	/
			50	0	Back Side	1732.5	0.161	3.81	24.50	24.11	0.176	/
			1	0	Left Side	1732.5	0.247	-3.86	25.00	24.88	0.254	6
			50	0	Left Side	1732.5	0.222	-2.40	24.50	24.11	0.243	/
			1	0	Right Side	1732.5	0.151	-1.39	25.00	24.88	0.156	/
			50	0	Right Side	1732.5	0.138	-0.28	24.50	24.11	0.151	/
			1	0	Top Edge	1732.5	0.098	1.60	25.00	24.88	0.101	/
			50	0	Top Edge	1732.5	0.091	-1.18	24.50	24.11	0.100	/
			1	0	Bottom Side	1732.5	0.177	-1.18	25.00	24.88	0.182	/
			50	0	Bottom Side	1732.5	0.162	1.12	24.50	24.11	0.177	/
LTE Band 5	10M	QPSK	1	0	Front side	844	0.041	1.98	25.00	24.68	0.044	/
			25	0	Front side	844	0.034	3.94	24.00	23.90	0.035	/
			1	0	Back Side	844	0.035	2.03	25.00	24.68	0.038	/
			25	0	Back Side	844	0.028	-3.19	24.00	23.90	0.029	/
			1	0	Left Side	844	0.067	-1.87	25.00	24.68	0.072	7
			25	0	Left Side	844	0.061	-3.12	24.00	23.90	0.062	/
			1	0	Right Side	844	0.055	3.83	25.00	24.68	0.059	/
			25	0	Right Side	844	0.050	2.15	24.00	23.90	0.051	/



			1	0	Top Edge	844	0.016	-2.41	25.00	24.68	0.017	/
			25	0	Top Edge	844	0.012	-2.94	24.00	23.90	0.012	/
			1	0	Bottom Side	844	0.041	2.31	25.00	24.68	0.044	/
			25	0	Bottom Side	844	0.036	1.22	24.00	23.90	0.037	/
LTE Band 7	20M	QPSK	1	0	Front side	2535	0.123	-1.47	24.00	23.95	0.124	/
			50	0	Front side	2560	0.111	-3.53	23.50	23.23	0.118	/
			1	0	Back Side	2535	0.146	-3.00	24.00	23.95	0.148	/
			50	0	Back Side	2560	0.135	-3.78	23.50	23.23	0.144	/
			1	0	Left Side	2535	0.247	1.23	24.00	23.95	0.250	8
			50	0	Left Side	2560	0.212	0.63	23.50	23.23	0.226	/
			1	0	Right Side	2535	0.174	-1.48	24.00	23.95	0.176	/
			50	0	Right Side	2560	0.162	-3.33	23.50	23.23	0.172	/
			1	0	Top Edge	2535	0.087	-2.20	24.00	23.95	0.088	/
			50	0	Top Edge	2560	0.073	-0.11	23.50	23.23	0.078	/
			1	0	Bottom Side	2535	0.111	2.87	24.00	23.95	0.112	/
			50	0	Bottom Side	2560	0.096	0.46	23.50	23.23	0.102	/
LTE Band 12	10M	QPSK	1	0	Front side	707.5	0.333	1.14	25.50	25.12	0.363	/
			25	0	Front side	707.5	0.300	-1.29	24.50	24.48	0.301	/
			1	0	Back Side	707.5	0.246	-0.55	25.50	25.12	0.268	/
			25	0	Back Side	707.5	0.223	-2.98	24.50	24.48	0.224	/
			1	0	Left Side	707.5	0.437	-3.21	25.50	25.12	0.477	9
			25	0	Left Side	707.5	0.390	-3.17	24.50	24.48	0.392	/
			1	0	Right Side	707.5	0.241	0.92	25.50	25.12	0.263	/
			25	0	Right Side	707.5	0.230	-1.87	24.50	24.48	0.231	/
			1	0	Top Edge	707.5	0.139	-3.13	25.50	25.12	0.152	/
			25	0	Top Edge	707.5	0.124	0.00	24.50	24.48	0.125	/
			1	0	Bottom Side	707.5	0.351	3.98	25.50	25.12	0.383	/
			25	0	Bottom Side	707.5	0.322	-3.72	24.50	24.48	0.323	/
LTE Band 13	10M	QPSK	1	0	Front side	782	0.065	-1.16	24.50	24.23	0.069	/
			25	0	Front side	782	0.052	3.84	23.50	23.45	0.053	/
			1	0	Back Side	782	0.050	-0.32	24.50	24.23	0.053	/
			25	0	Back Side	782	0.047	-0.79	23.50	23.45	0.048	/
			1	0	Left Side	782	0.101	-3.34	24.50	24.23	0.107	10
			25	0	Left Side	782	0.084	-1.50	23.50	23.45	0.085	/
			1	0	Right Side	782	0.042	2.34	24.50	24.23	0.045	/
			25	0	Right Side	782	0.022	0.93	23.50	23.45	0.022	/
			1	0	Top Edge	782	0.090	-1.02	24.50	24.23	0.096	/
			25	0	Top Edge	782	0.040	-2.32	23.50	23.45	0.040	/
			1	0	Bottom Side	782	0.064	-0.66	24.50	24.23	0.068	/
			25	0	Bottom Side	782	0.051	3.23	23.50	23.45	0.052	/



LTE Band 17	10M	QPSK	1	0	Front side	711	0.747	-1.91	24.50	24.23	0.795	/
			25	0	Front side	710	0.715	-0.16	23.50	23.41	0.730	/
			1	0	Back Side	711	0.659	-1.98	24.50	24.23	0.701	/
			25	0	Back Side	710	0.614	2.61	23.50	23.41	0.627	/
			1	0	Left Side	709	0.961	-2.51	24.50	24.03	1.071	/
			25	0	Left Side	709	0.865	-3.28	23.50	23.30	0.906	/
			50	0	Left Side	709	0.795	-1.53	23.00	22.57	0.878	/
			1	0	Left Side	710	0.952	0.06	24.50	24.12	1.039	/
			25	0	Left Side	710	0.917	2.10	23.50	23.41	0.936	/
			50	0	Left Side	710	0.786	0.99	23.00	22.69	0.844	/
			1	0	Left Side	711	1.021	2.98	24.50	24.23	1.086	11
			25	0	Left Side	711	0.901	-3.30	23.50	23.36	0.931	/
			50	0	Left Side	711	0.827	2.31	23.00	22.57	0.913	/
			1	0	Right Side	711	0.065	-1.28	24.50	24.23	0.069	/
			25	0	Right Side	710	0.055	3.54	23.50	23.41	0.056	/
			1	0	Top Edge	711	0.123	0.57	24.50	24.23	0.131	/
			25	0	Top Edge	710	0.111	-3.91	23.50	23.41	0.113	/
			1	0	Bottom Side	711	0.354	1.90	24.50	24.23	0.377	/
			25	0	Bottom Side	710	0.300	-0.23	23.50	23.41	0.306	/
LTE Band 25	20M	QPSK	1	0	Front side	1905	0.071	-3.02	25.00	24.66	0.077	/
			50	0	Front side	1905	0.068	0.03	24.00	23.91	0.070	/
			1	0	Back Side	1905	0.066	-3.57	25.00	24.66	0.071	/
			50	0	Back Side	1905	0.060	-1.98	24.00	23.91	0.061	/
			1	0	Left Side	1905	0.083	1.55	25.00	24.66	0.090	12
			50	0	Left Side	1905	0.061	-1.47	24.00	23.91	0.062	/
			1	0	Right Side	1905	0.055	3.40	25.00	24.66	0.059	/
			50	0	Right Side	1905	0.045	1.30	24.00	23.91	0.046	/
			1	0	Top Edge	1905	0.053	-3.70	25.00	24.66	0.057	/
			50	0	Top Edge	1905	0.044	3.78	24.00	23.91	0.045	/
			1	0	Bottom Side	1905	0.050	-0.21	25.00	24.66	0.054	/
			50	0	Bottom Side	1905	0.036	0.15	24.00	23.91	0.037	/
LTE Band 26	15M	QPSK	1	0	Front side	841.5	0.355	3.73	25.50	25.23	0.378	/
			36	0	Front side	831.5	0.310	-3.84	24.50	24.42	0.316	/
			1	0	Back Side	841.5	0.364	0.08	25.50	25.23	0.387	/
			36	0	Back Side	831.5	0.332	2.21	24.50	24.42	0.338	/
			1	0	Left Side	841.5	0.408	0.10	25.50	25.23	0.434	13
			36	0	Left Side	831.5	0.341	0.17	24.50	24.42	0.347	/
			1	0	Right Side	841.5	0.256	-3.90	25.50	25.23	0.272	/
			36	0	Right Side	831.5	0.200	2.50	24.50	24.42	0.204	/
			1	0	Top Edge	841.5	0.123	-2.05	25.50	25.23	0.131	/
			36	0	Top Edge	831.5	0.101	1.89	24.50	24.42	0.103	/
			1	0	Bottom Side	841.5	0.336	0.84	25.50	25.23	0.358	/
			36	0	Bottom Side	831.5	0.311	-0.76	24.50	24.42	0.317	/



LTE Band 41	20M	QPSK	1	0	Front side	2680	0.066	-3.84	24.50	24.35	0.068	/
			50	0	Front side	2680	0.053	1.84	24.00	23.55	0.059	/
			1	0	Back Side	2680	0.061	-2.23	24.50	24.35	0.063	/
			50	0	Back Side	2680	0.046	1.68	24.00	24.35	0.042	/
			1	0	Left Side	2680	0.104	3.28	24.50	24.35	0.108	14
			50	0	Left Side	2680	0.071	-1.21	24.00	24.35	0.066	/
			1	0	Right Side	2680	0.057	-3.21	24.50	24.35	0.059	/
			50	0	Right Side	2680	0.050	3.67	24.00	24.35	0.046	/
			1	0	Top Edge	2680	0.032	-3.17	24.50	24.35	0.033	/
			50	0	Top Edge	2680	0.029	-0.49	24.00	24.35	0.027	/
			1	0	Bottom Side	2680	0.077	-2.06	24.50	24.35	0.080	/
			50	0	Bottom Side	2680	0.070	-1.86	24.00	24.35	0.065	/

Note:

- The test separation of all above table is 5mm.
- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor

Repeated SAR

Band	Mode	Test Position	Fre. (MHz)	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
WCDMA II	RMC	Left Edge	1880	0.918	-0.48	23.00	22.31	1.076	/
			1907.6	0.945	-3.60	23.00	22.48	1.065	/
			1852.4	1.015	0.01	23.00	22.68	1.093	/

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Fre. (MHz)	Result 1g (W/Kg)	Power Drift(%)	Max. Turn-up Power(dBm)	Meas. Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
LTE Band 2	20M	QPSK	1	0	Left Side	1860	0.800	0.45	24.50	24.23	0.851	/
			1	0	Left Side	1880	0.749	3.60	24.50	24.03	0.835	/
			1	0	Left Side	1900	0.724	2.94	24.50	24.12	0.790	/
LTE Band 17	10M	QPSK	1	0	Left Side	709	0.951	-1.37	24.50	24.03	1.060	/
			25	0	Left Side	709	0.857	-1.44	23.50	23.30	0.897	/
			50	0	Left Side	709	0.760	-1.87	23.00	22.57	0.839	/
			1	0	Left Side	710	0.907	0.53	24.50	24.12	0.990	/
			25	0	Left Side	710	0.908	2.08	23.50	23.41	0.927	/
			50	0	Left Side	710	0.778	-3.27	23.00	22.69	0.836	/
			1	0	Left Side	711	0.997	0.70	24.50	24.23	1.061	/
			25	0	Left Side	711	0.883	-0.58	23.50	23.36	0.912	/
			50	0	Left Side	711	0.795	3.51	23.00	22.57	0.878	/



11.2 Repeated SAR measurement

Band	Mode	Test Position	Fre. (MHz)	Original Measured SAR 1g(mW/g)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
WCDMA II	RMC	Left Edge	1880	0.927	0.918	1.010	-	-	-
			1907.6	0.958	0.945	1.014	-	-	-
			1852.4	1.045	1.015	1.030	-	-	-

Band	BW (MHz)	Mod.	RB Size	RB offset	Test Position	Fre. (MHz)	Original Measured SAR 1g(mW/g)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
LTE Band 2	20M	QPSK	1	0	Left Side	1860	0.834	0.800	1.043	-	-	-
			1	0	Left Side	1880	0.759	0.749	1.013	-	-	-
			1	0	Left Side	1900	0.743	0.724	1.026	-	-	-
LTE Band 17	10M	QPSK	1	0	Left Side	709	0.961	0.951	1.011	-	-	-
			25	0	Left Side	709	0.865	0.857	1.009	-	-	-
			50	0	Left Side	709	0.795	0.760	1.046	-	-	-
			1	0	Left Side	710	0.952	0.907	1.050	-	-	-
			25	0	Left Side	710	0.917	0.908	1.010	-	-	-
			50	0	Left Side	710	0.786	0.778	1.010	-	-	-
			1	0	Left Side	711	1.021	0.997	1.024	-	-	-
			25	0	Left Side	711	0.901	0.883	1.020	-	-	-
			50	0	Left Side	711	0.827	0.795	1.040	-	-	-

Note:

1. Per KDB 865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/Kg}$.
2. Per KDB 865664 D01, if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/Kg}$, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{W/Kg}$.
4. The ratio is the difference in percentage between original and repeated measured SAR.

**Simultaneous Multi-band Transmission Evaluation:**

Application Simultaneous Transmission information:

Position	Simultaneous State
Body	1. GSM + Bluetooth
	2. WCDMA + Bluetooth
	3. LTE + Bluetooth

NOTE:

- For simultaneous transmission at body exposure position, 2 transmitters simultaneous transmission was the worst state.
- Based upon KDB 447498 D01, BT SAR is excluded as below table.
- If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
- For minimum test separation distance $\leq 50\text{mm}$, Bluetooth standalone SAR is excluded according to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} (\text{GHz}) / x] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
- The reported SAR summation is calculated based on the same configuration and test position.
- KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is $>50\text{mm}$.


Estimated SAR		Maximum Power		Antenna to user(mm)	Frequency(GHz)	Stand Alone SAR(1g) [W/kg]
		dBm	mW			
BT	Body	-14	0.04	≤ 5	2.402	0.002



Simultaneous Mode	Position	Mode	Max. 1-g SAR (W/kg)	1-g Sum SAR (W/kg)
GSM + Bluetooth	Body	GSM	0.716	0.718
		Bluetooth	0.002	
WCDMA + Bluetooth	Body	WCDMA	1.125	1.127
		Bluetooth	0.002	
LTE + Bluetooth	Body	LTE	1.086	1.088
		Bluetooth	0.002	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

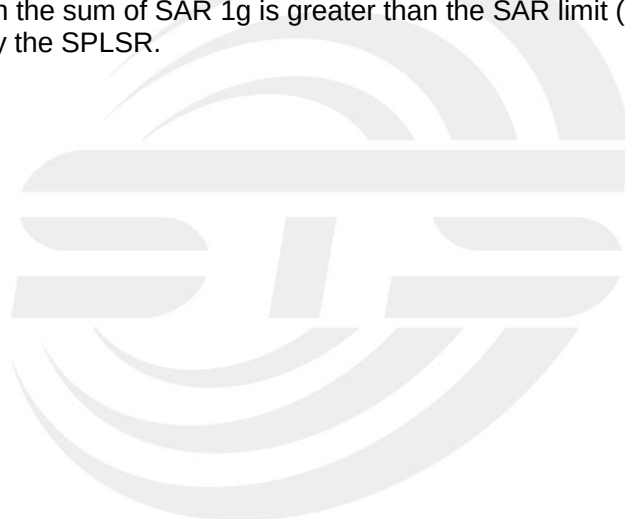



12. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
750MHz Dipole	MVG	SID750	SN 30/14 DIP0G750-331	2020.07.14	2023.07.13
835MHz Dipole	MVG	SID835	SN 30/14 DIP0G835-332	2020.07.14	2023.07.13
1800MHz Dipole	MVG	SID1800	SN 30/14 DIP1G800-329	2020.07.14	2023.07.13
1900MHz Dipole	MVG	SID1900	SN 30/14 DIP1G900-333	2020.07.14	2023.07.13
2600MHz Dipole	MVG	SID2600	SN 30/14 DIP2G600-336	2020.07.14	2023.07.13
E-Field Probe	MVG	SSE2	SN 07/21 EPOG352	2021.03.01	2022.02.28
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2020.11.24	2021.11.23
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	MVG	SAM	SN 32/14 SAM116	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	99899	DC-18GHz	N/A	N/A
Directional coupler	Narda	4226-20	3305	N/A	N/A
Network Analyzer	Agilent	8753ES	US38432810	2021.09.29	2022.09.28
Multi Meter	Keithley	Multi Meter 2000	4050073	2021.10.08	2022.10.07
Signal Generator	Agilent	N5182A	MY50140530	2021.09.30	2022.09.29
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2021.09.30	2022.09.29
Wireless Communication Test Set	R&S	CMW500	117239	2021.09.30	2022.09.29
Power Amplifier	DESAY	ZHL-42W	9638	2021.10.09	2022.10.08
Power Meter	R&S	NRP	100510	2021.09.29	2022.09.28
Power Sensor	R&S	NRP-Z11	101919	2021.09.29	2022.09.28
Temperature hygrometer	SuWei	SW-108	N/A	2021.10.09	2022.10.08
Thermograph	Elitech	RC-4	S/N EF7176501537	2021.10.09	2022.10.08

Note:

Per KDB 865664 D01, Dipole SAR Validation Verification, STS LAB has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
2. System validation with specific dipole is within 10% of calibrated value Return-loss is within 20% of calibrated measurement



Appendix A. System Validation Plots

System Performance Check Data (750MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-10-12

Experimental conditions




Phantom	Validation plane
Device Position	-
Band	750MHz
Channels	-
Signal	CW
Frequency (MHz)	750MHz
Relative permittivity	43.15
Conductivity (S/m)	0.88
Probe	SN 07/21 EPG0352
ConvF	1.58
Crest factor	1:1

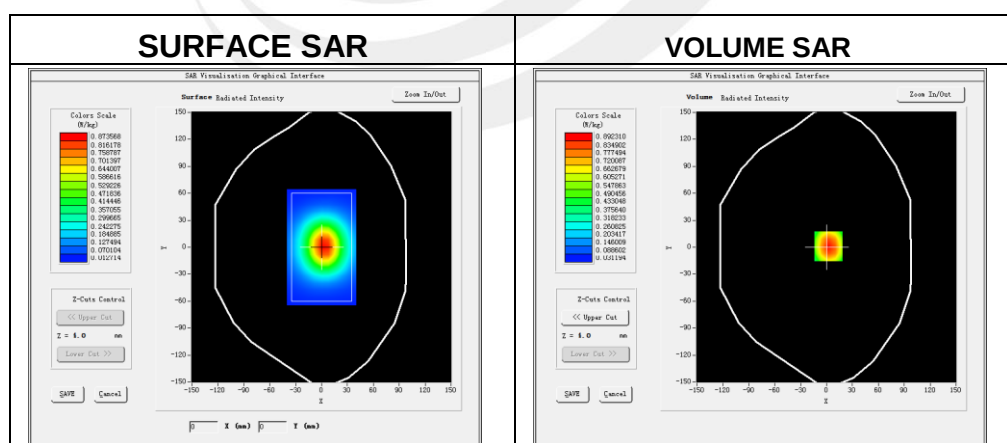

Maximum location: X=2.00, Y=1.00

SAR 10g (W/Kg)	0.557218
SAR 1g (W/Kg)	0.832546

Z Axis Scan

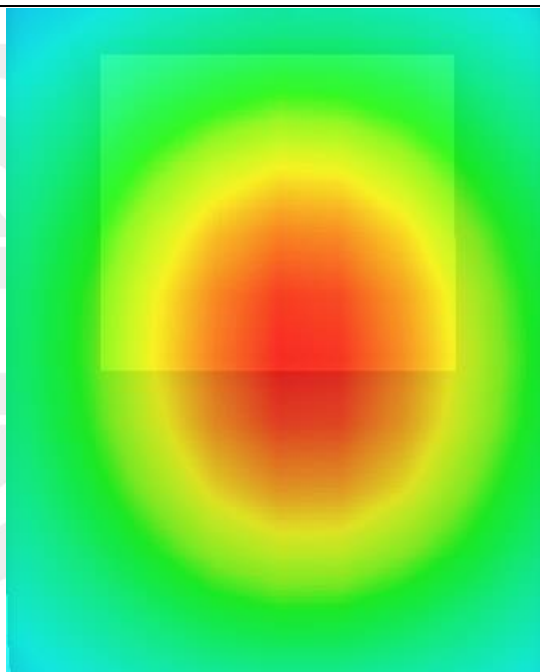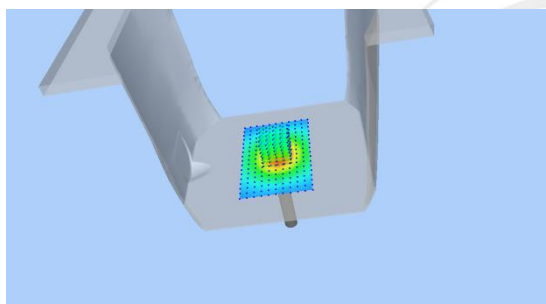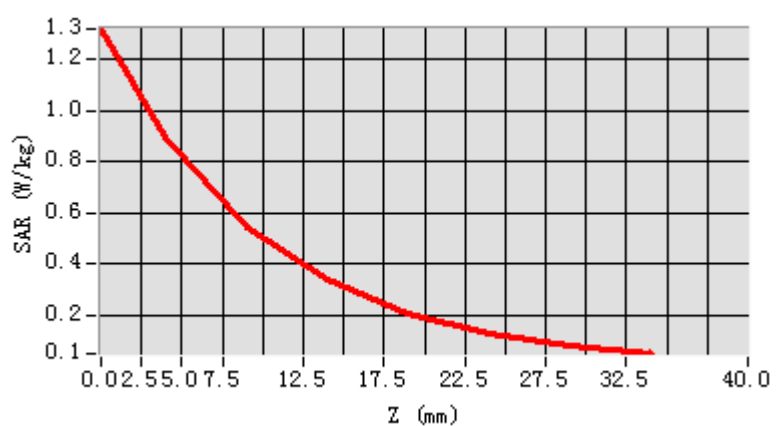

**System Performance Check Data (835MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-10-13




Experimental conditions

Phantom	Validation plane
Device Position	-
Band	835MHz
Channels	-
Signal	CW
Frequency (MHz)	835MHz
Relative permittivity	41.24
Conductivity (S/m)	0.89
Probe	SN 07/21 EPG0352
ConvF:	1.57
Crest factor:	1:1

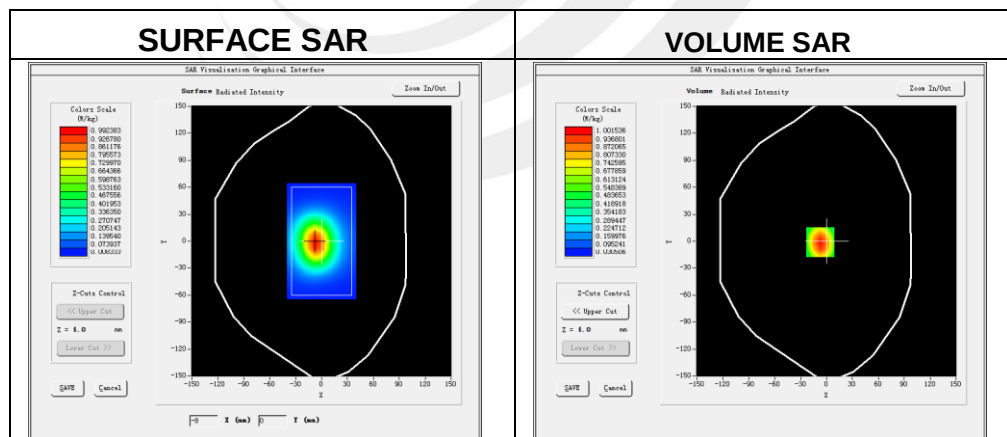**Maximum location: X=-6.00, Y=-2.00**

SAR 10g (W/Kg)	0.621254
SAR 1g (W/Kg)	0.976426

Z Axis Scan

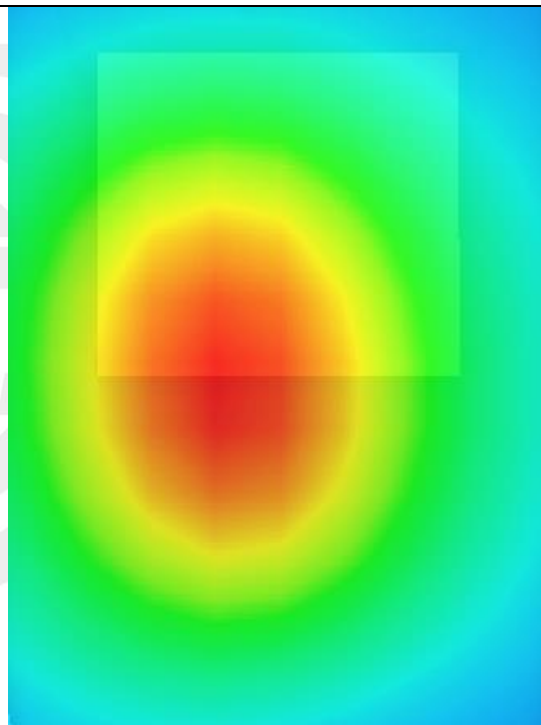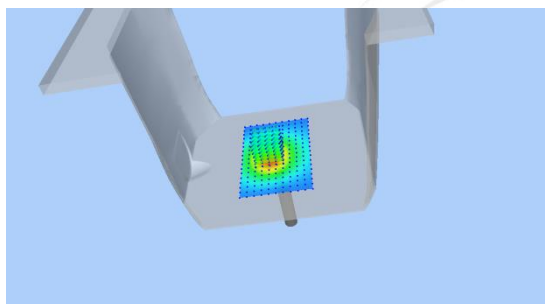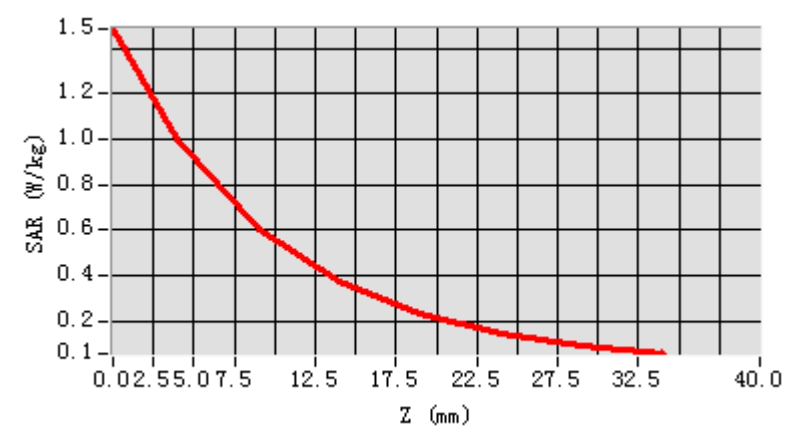

**System Performance Check Data(1800MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-10-15




Experimental conditions.

Phantom	Validation plane
Device Position	-
Band	1800MHz
Channels	-
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	39.70
Conductivity (S/m)	1.40
Probe	SN 07/21 EPGO352
ConvF	1.60
Crest factor:	1:1

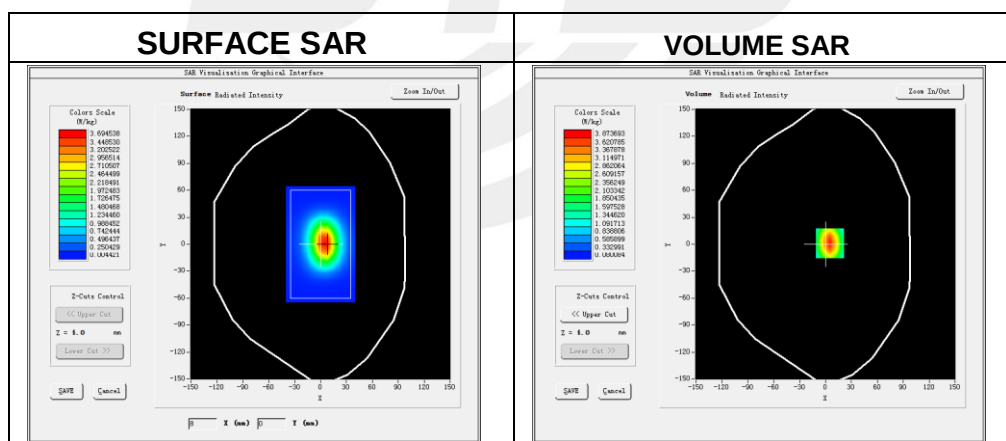**Maximum location: X=2.00, Y=-3.00**

SAR 10g (W/Kg)	2.072468
SAR 1g (W/Kg)	3.890701

Z Axis Scan

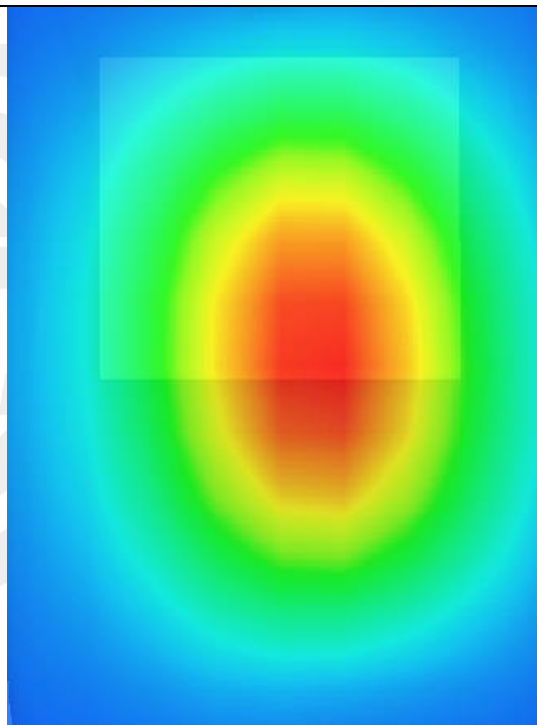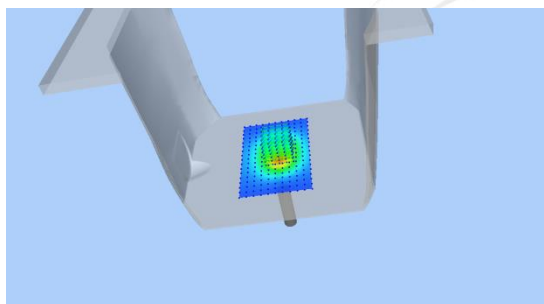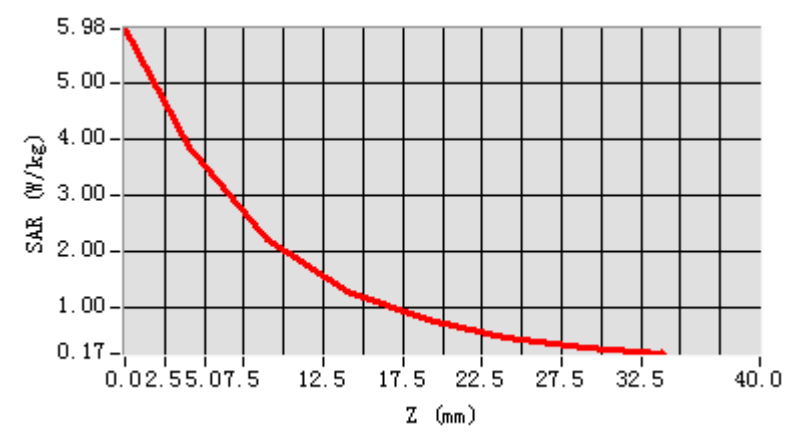



System Performance Check Data (1900MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-10-16

Experimental conditions.




Phantom	Validation plane
Device Position	-
Band	1900MHz
Channels	-
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity	40.22
Conductivity (S/m)	1.40
Probe	SN 07/21 EPG0352
ConvF:	1.78
Crest factor:	1:1

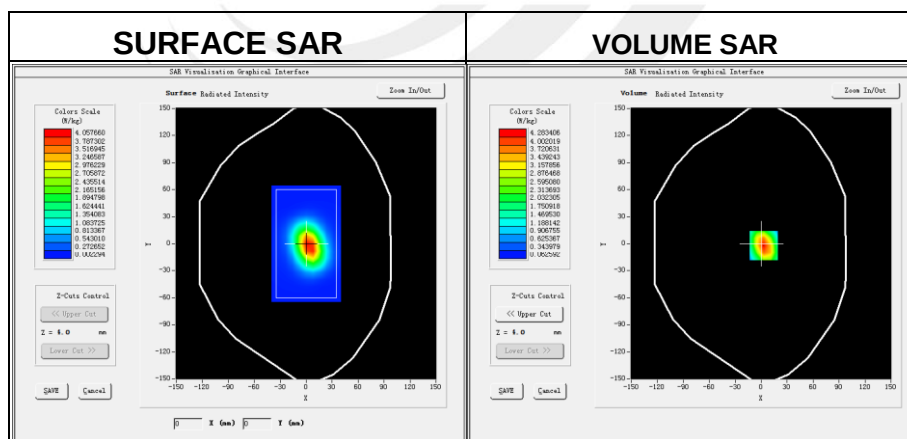

Maximum location: X=5.00, Y=-3.00

SAR 10g (W/Kg)	2.069458
SAR 1g (W/Kg)	4.088603

Z Axis Scan

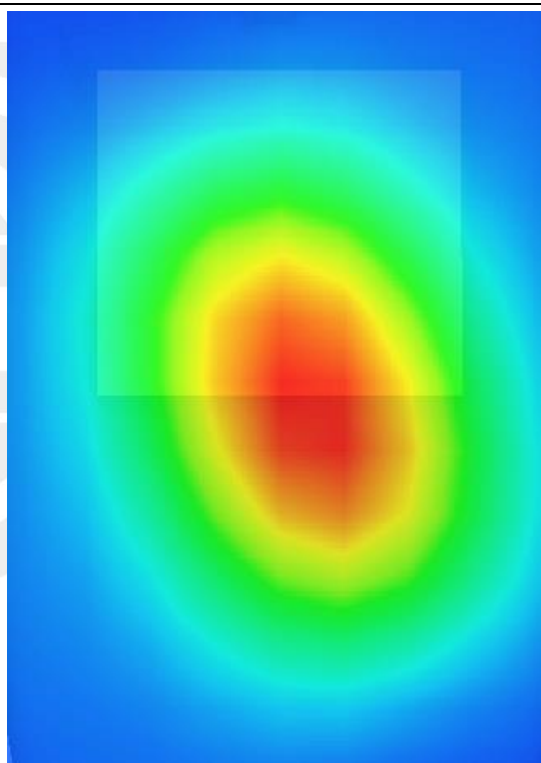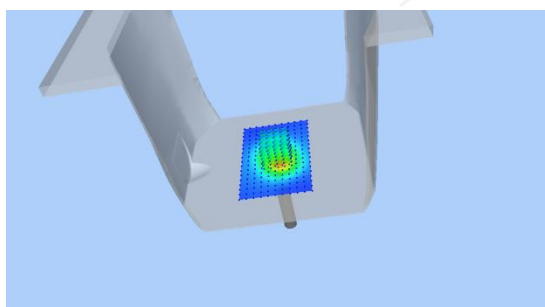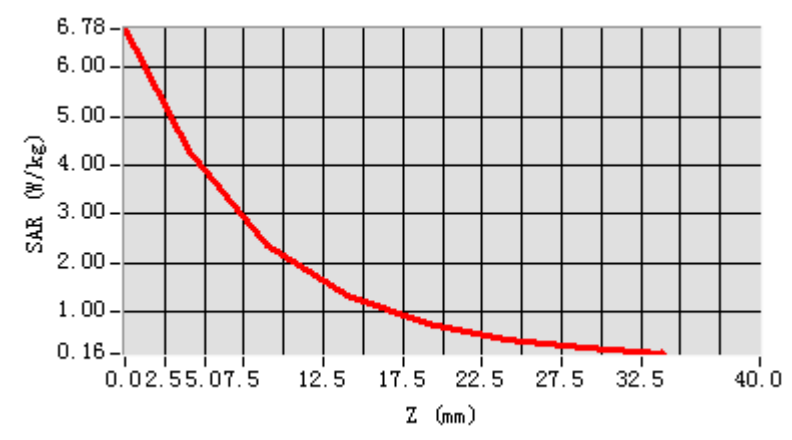



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2021-10-19

Experimental conditions.




Device Position	Validation plane
Band	2600 MHz
Channels	-
Signal	CW
Frequency (MHz)	2600
Relative permittivity	39.34
Conductivity (S/m)	2.02
Probe	SN 07/21 EPGO352
ConvF	1.63
Crest factor:	1:1

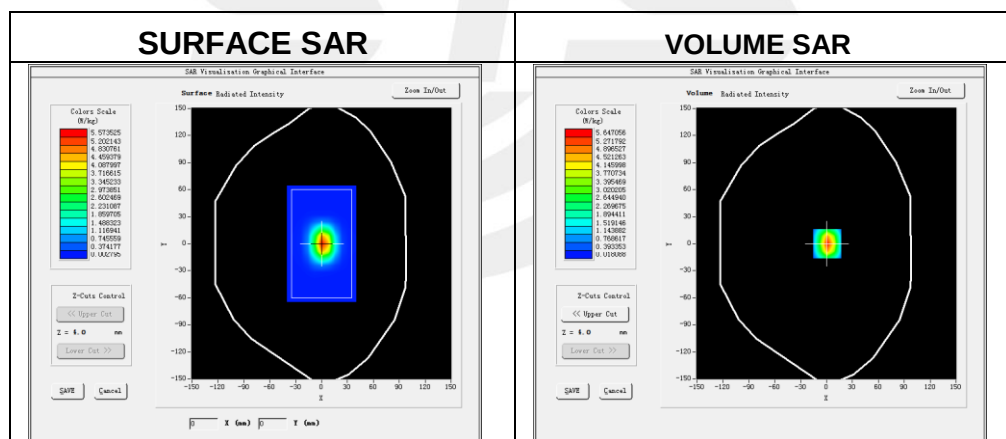

Maximum location: X=3.00, Y=-1.00

SAR 10g (W/Kg)	2.490248
SAR 1g (W/Kg)	5.649251

Z Axis Scan

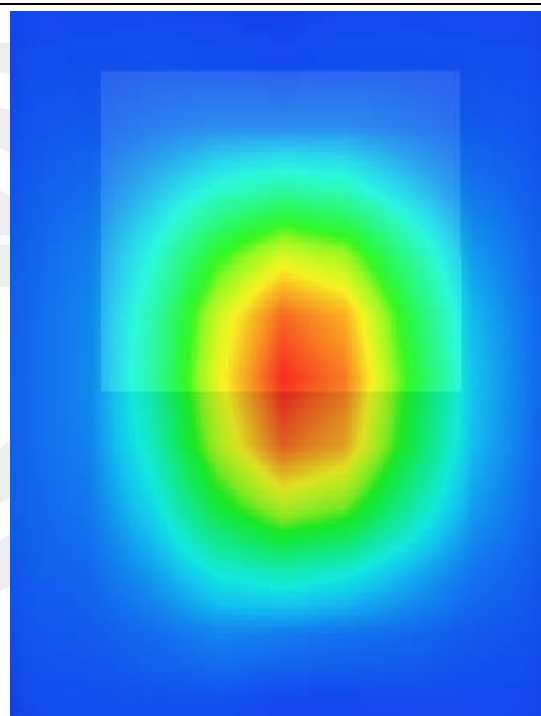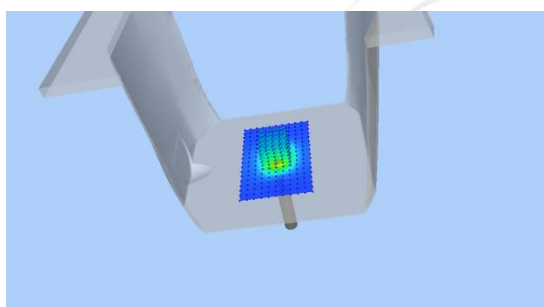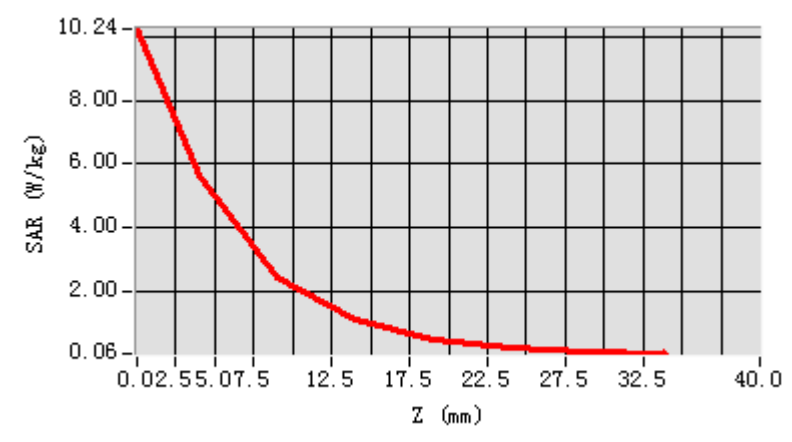

Appendix B. SAR Test Plots


Plot 1: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-13
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Edge
Band	GPRS 850
Channels	Low
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	824.2
Relative permittivity (real part)	41.52
Conductivity (S/m)	0.90

Maximum location: X=-24.00, Y=-39.00

SAR Peak: 0.11 W/kg

SAR 10g (W/Kg)	0.041571
SAR 1g (W/Kg)	0.069350

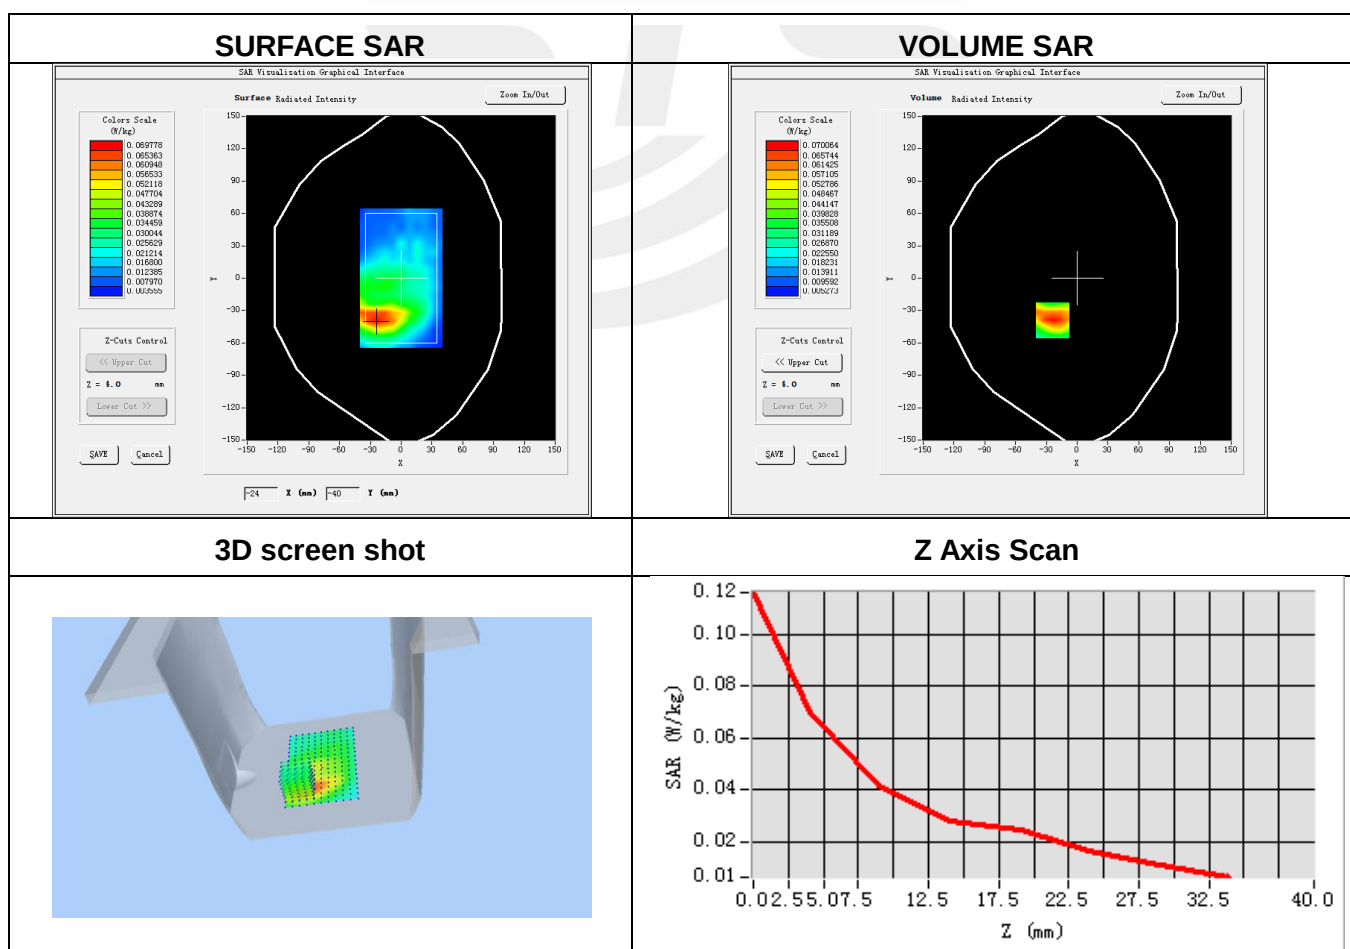



Plot 2: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-16
Probe	SN 07/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Edge
Band	GPRS 1900
Channels	Mid
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1880
Relative permittivity (real part)	41.06
Conductivity (S/m)	1.39

Maximum location: X=-1.00, Y=40.00

SAR Peak: 1.16 W/kg

SAR 10g (W/Kg)	0.324070
SAR 1g (W/Kg)	0.640168

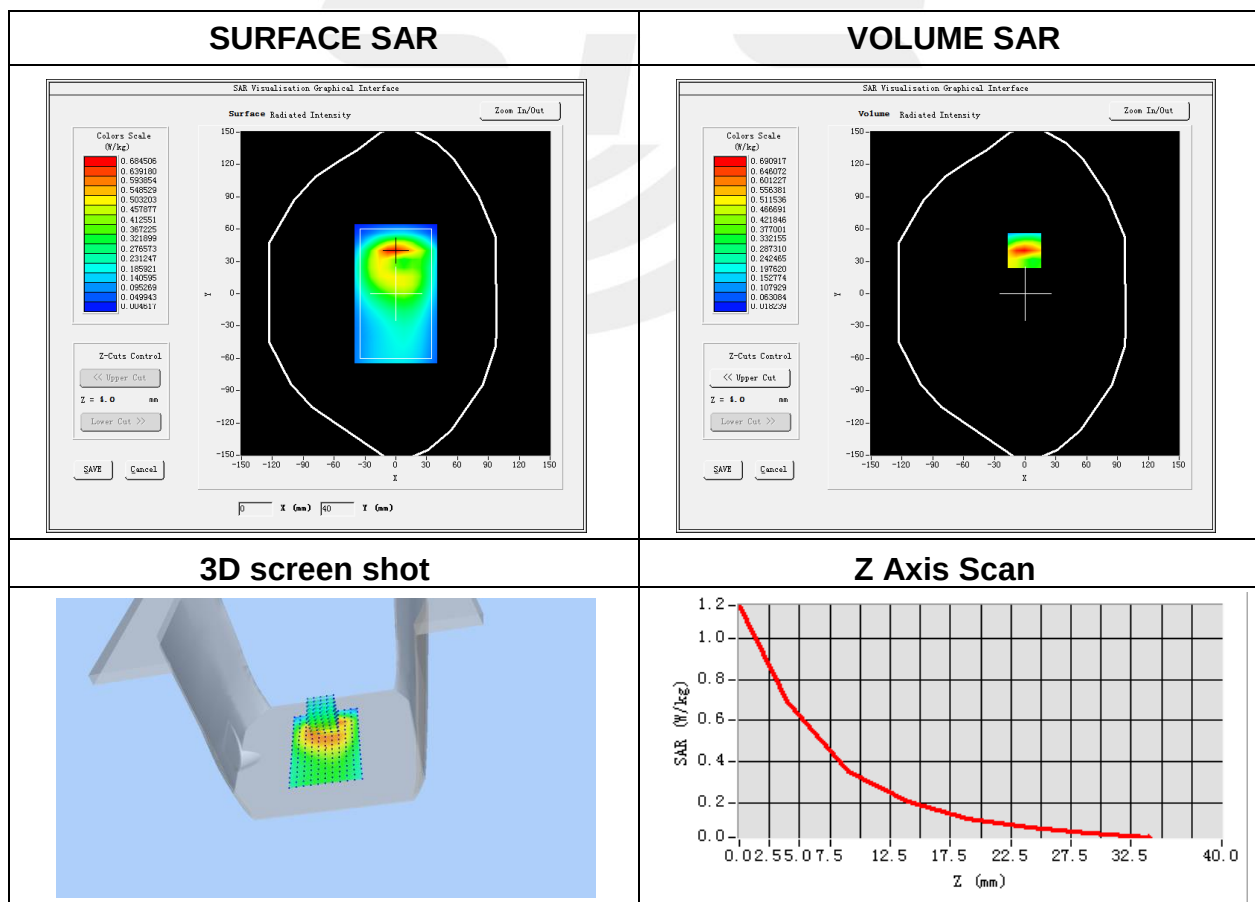


Plot 3: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2020-10-16
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Edge
Band	WCDMA II
Channels	Low
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1852.4
Relative permittivity (real part)	40.65
Conductivity (S/m)	1.42

Maximum location: X=-2.00, Y=3.00

SAR Peak: 1.97 W/kg

SAR 10g (W/Kg)	0.479861
SAR 1g (W/Kg)	1.044817

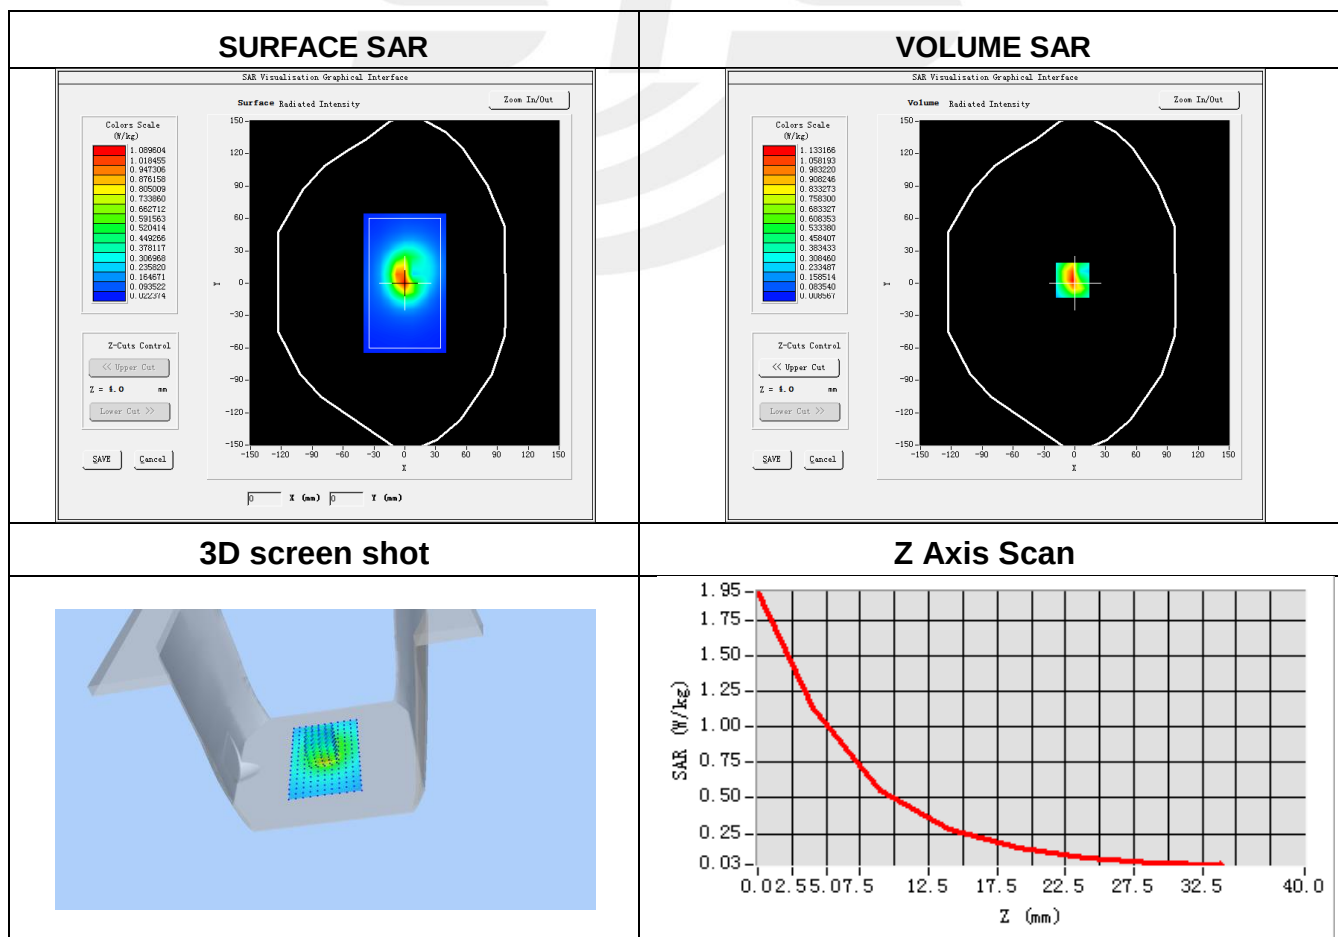


Plot 4: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-13
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Edge
Band	WCDMA V
Channels	High
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	846.6
Relative permittivity (real part)	42.67
Conductivity (S/m)	0.89

Maximum location: X=0.00, Y=8.00

SAR Peak: 0.08 W/kg

SAR 10g (W/Kg)	0.025824
SAR 1g (W/Kg)	0.041771

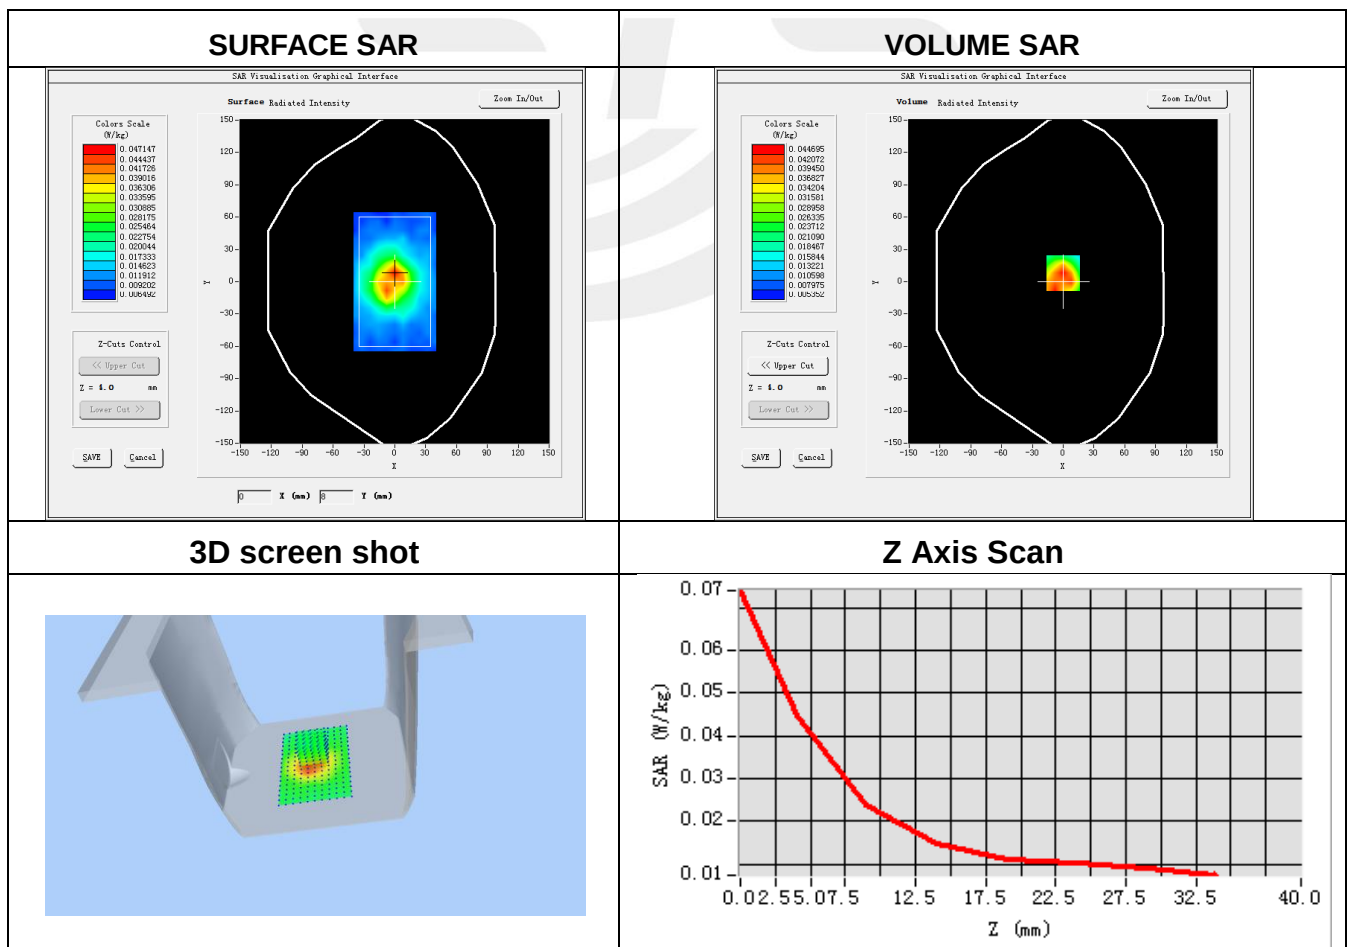


Plot 5: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-16
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE Band 2(RB 1)
Channels	Low
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1860
Relative permittivity (real part)	39.26
Conductivity (S/m)	1.42

Maximum location: X=-2.00, Y=2.00

SAR Peak: 1.58 W/kg

SAR 10g (W/Kg)	0.384088
SAR 1g (W/Kg)	0.833853

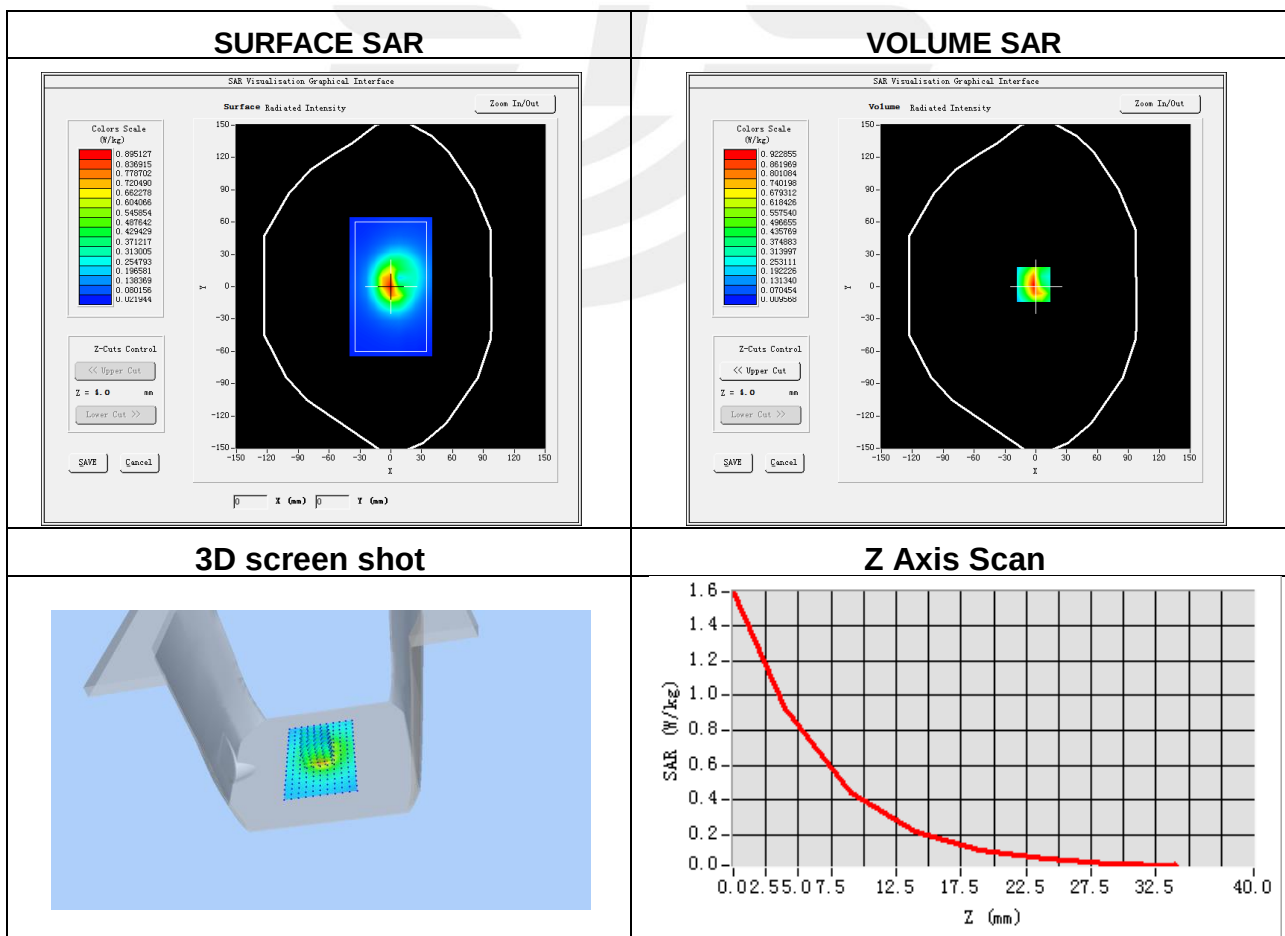


Plot 6: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-15
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE Band 4 (RB 1)
Channels	Mid
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1732.5
Relative permittivity (real part)	39.44
Conductivity (S/m)	1.37

Maximum location: X=1.00, Y=2.00

SAR Peak: 0.45 W/kg

SAR 10g (W/Kg)	0.117215
SAR 1g (W/Kg)	0.246813

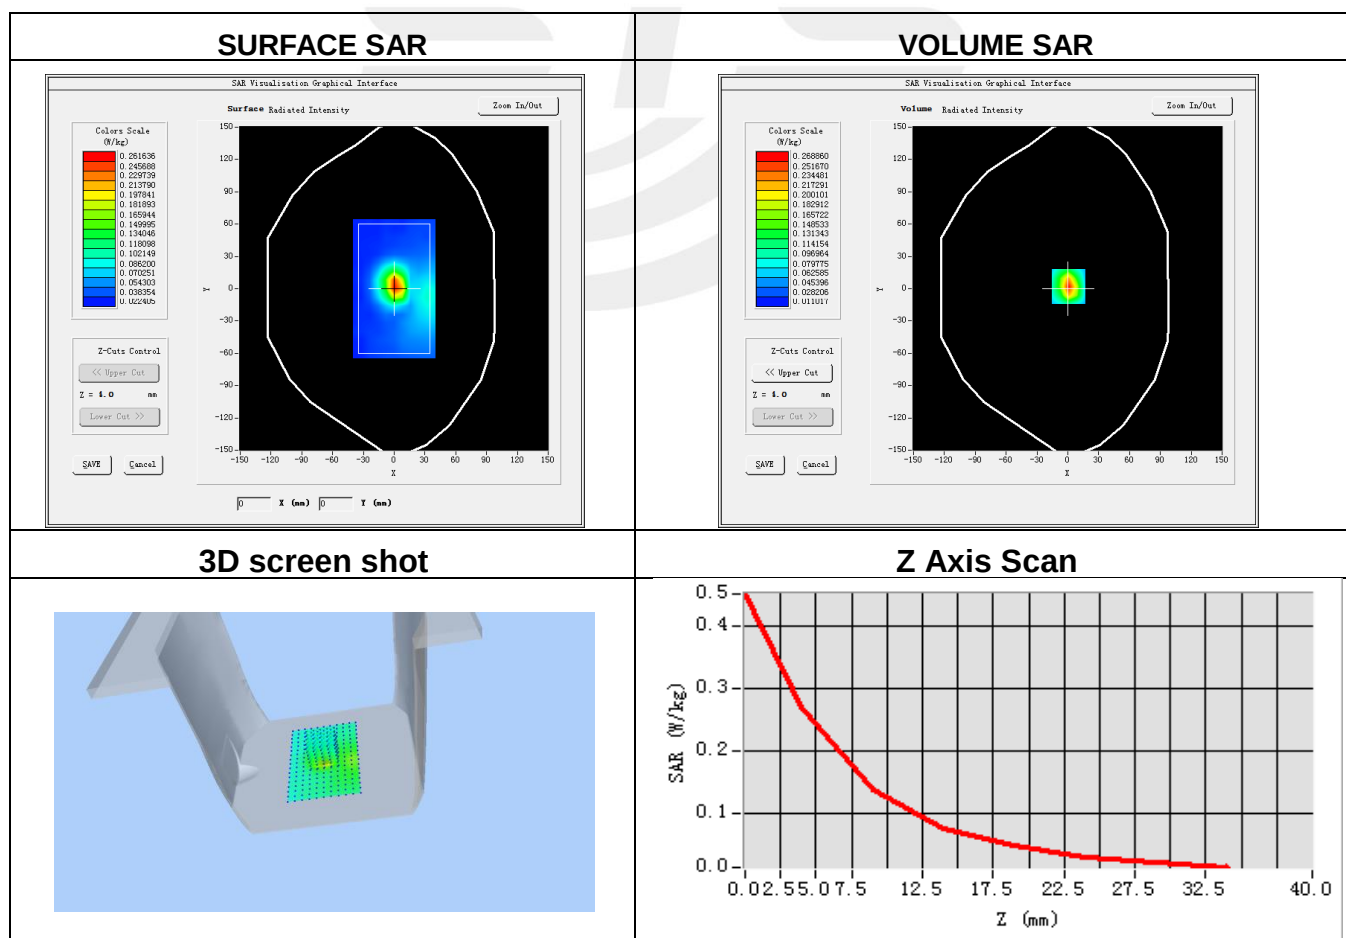


Plot 7: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-13
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE Band 5 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844
Relative permittivity (real part)	41.16
Conductivity (S/m)	0.89

Maximum location: X=8.00, Y=15.00

SAR Peak: 0.12 W/kg

SAR 10g (W/Kg)	0.037041
SAR 1g (W/Kg)	0.066609

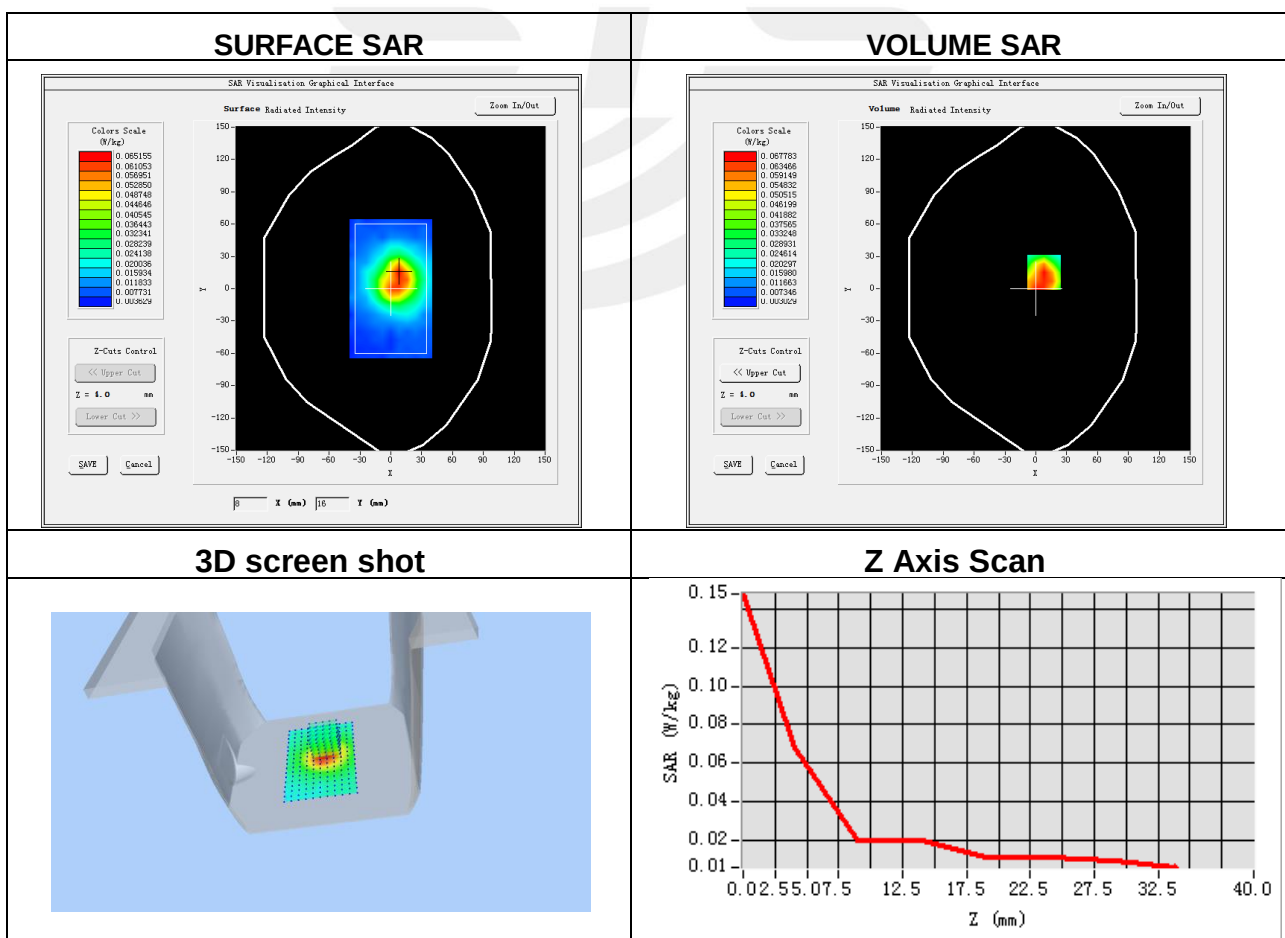


Plot 8: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-19
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE Band 7 (RB 1)
Channels	Mid
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2535
Relative permittivity (real part)	37.65
Conductivity (S/m)	1.90

Maximum location: X=9.00, Y=-10.00

SAR Peak: 0.43 W/kg

SAR 10g (W/Kg)	0.128957
SAR 1g (W/Kg)	0.246820

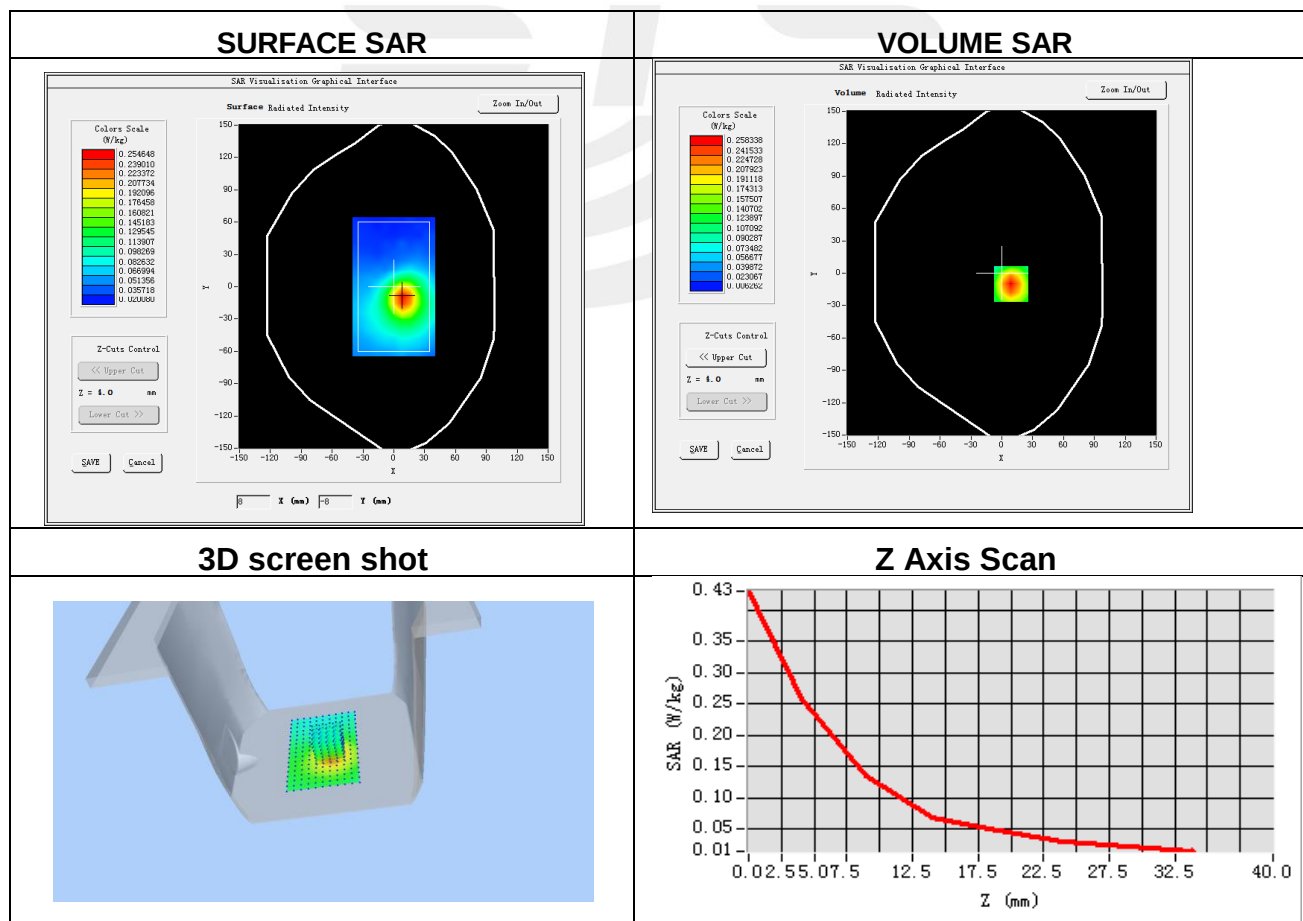


Plot 9: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE Band 12 (RB 1)
Channels	Mid
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	707.5
Relative permittivity (real part)	41.63
Conductivity (S/m)	0.88

Maximum location: X=0.00, Y=-1.00

SAR Peak: 0.78 W/kg

SAR 10g (W/Kg)	0.206510
SAR 1g (W/Kg)	0.437304

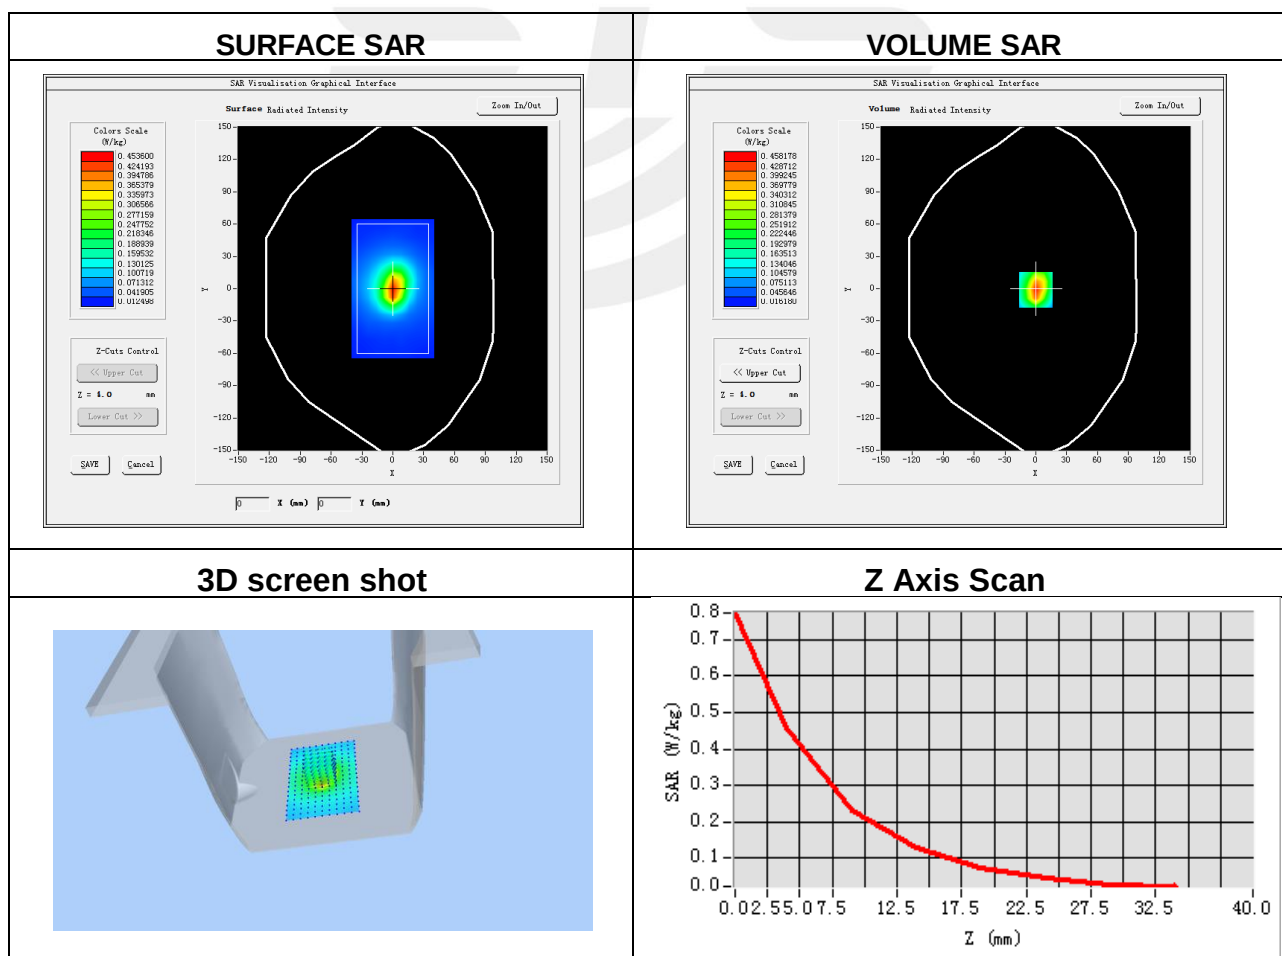


Plot 10: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE Band 13 (RB 1)
Channels	Mid
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	782
Relative permittivity (real part)	41.24
Conductivity (S/m)	0.88

Maximum location: X=0.00, Y=-2.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.050697
SAR 1g (W/Kg)	0.100508

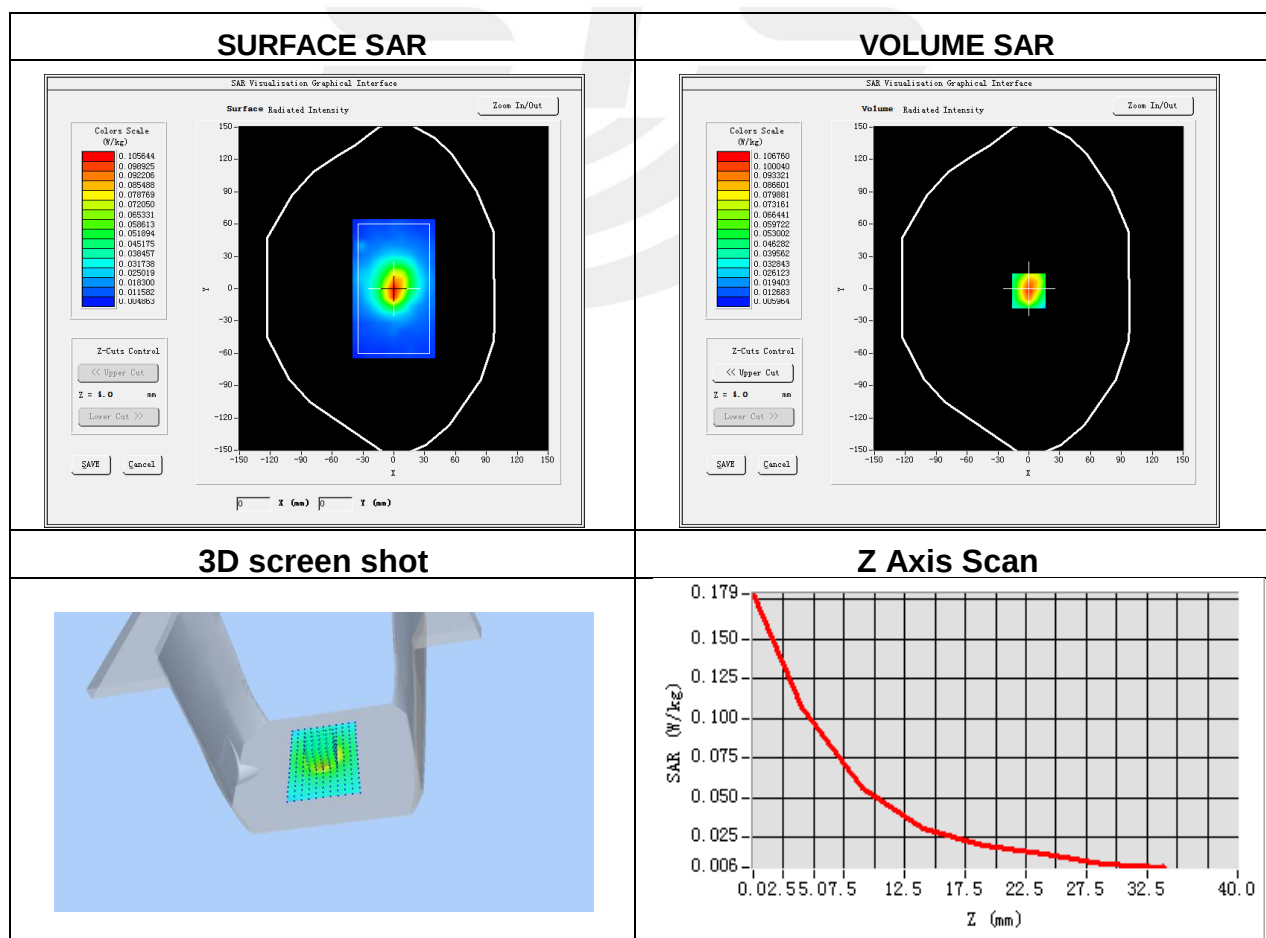


Plot 11: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-12
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE Band 17 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	711
Relative permittivity (real part)	41.80
Conductivity (S/m)	0.90

Maximum location: X=0.00, Y=5.00

SAR Peak: 1.86 W/kg

SAR 10g (W/Kg)	0.471314
SAR 1g (W/Kg)	1.020902

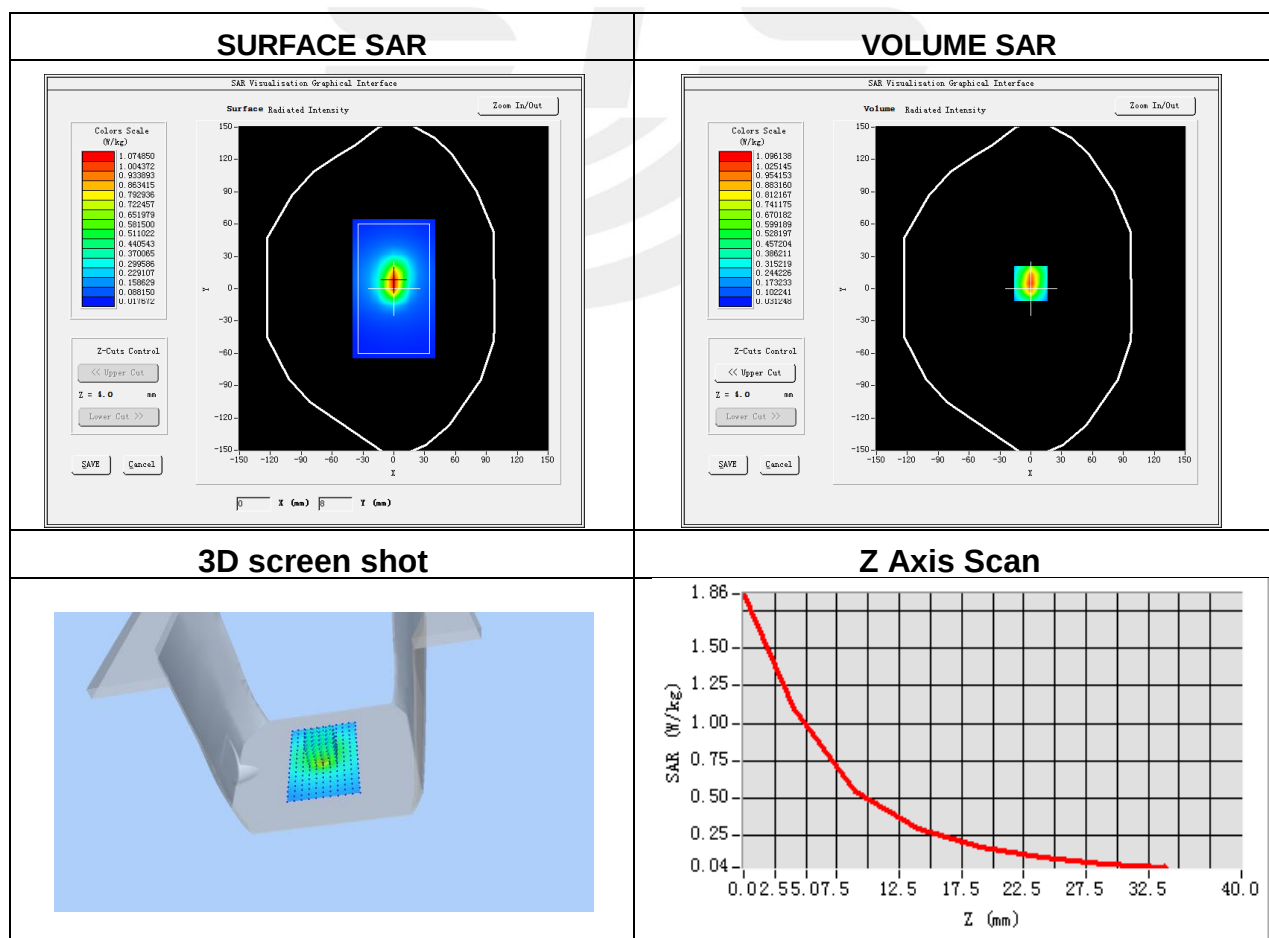




Plot 12: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-16
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE Band 25 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1905
Relative permittivity (real part)	38.76
Conductivity (S/m)	1.36

Maximum location: X=7.00, Y=-8.00

SAR Peak: 0.14 W/kg

SAR 10g (W/Kg)	0.050263
SAR 1g (W/Kg)	0.082674

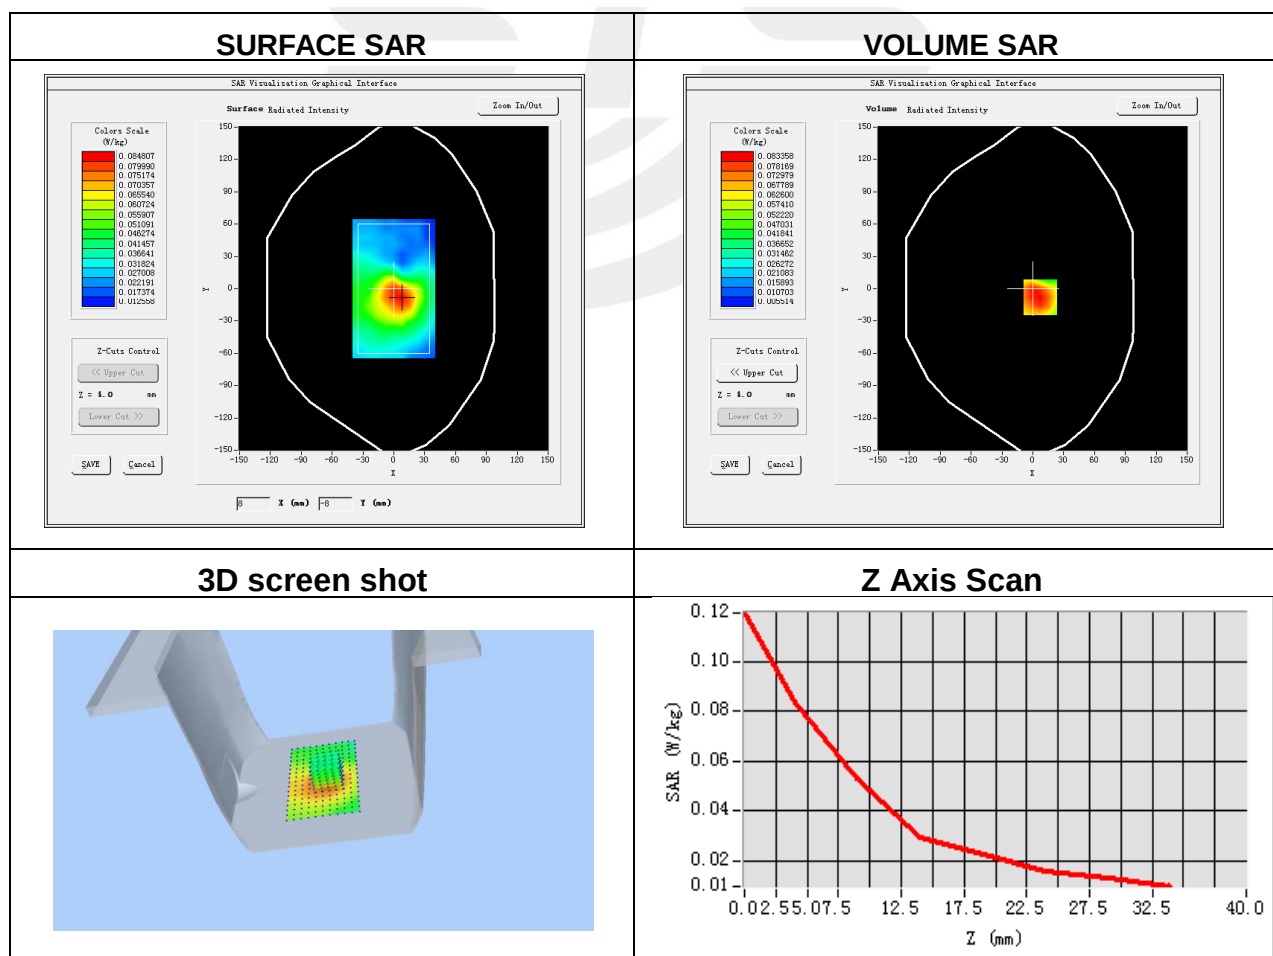


Plot 13: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-13
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE Band 26 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	841.5
Relative permittivity (real part)	41.85
Conductivity (S/m)	0.87

Maximum location: X=0.00, Y=23.00

SAR Peak: 0.55 W/kg

SAR 10g (W/Kg)	0.257109
SAR 1g (W/Kg)	0.397353

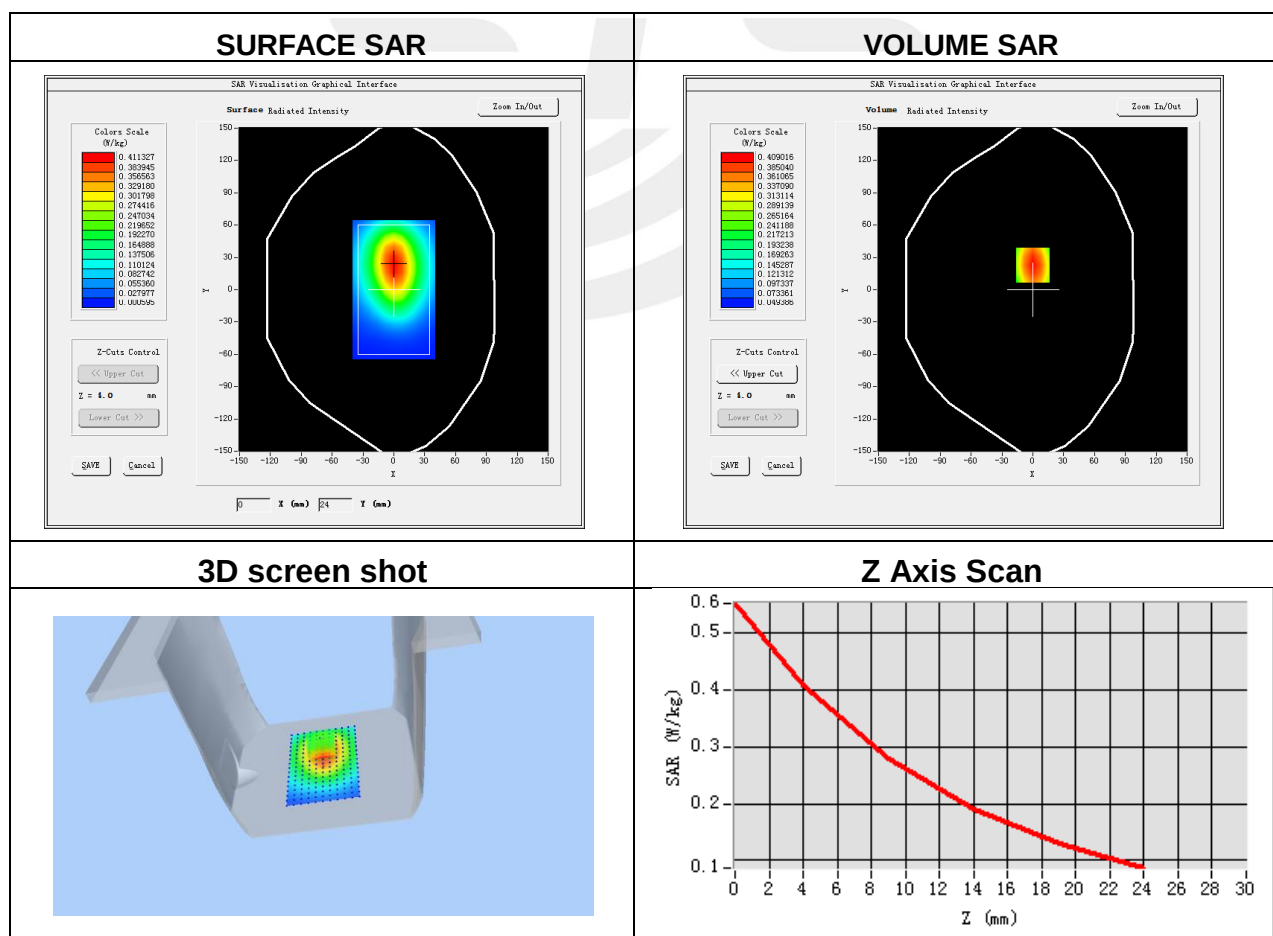


Plot 14: DUT: GPS Tracker; EUT Model: TRKM010B

Test Date	2021-10-19
Probe	SN 07/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm, Complete/ndx=8mm, dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Left Side
Band	LTE Band 41 (RB 1)
Channels	High
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2680
Relative permittivity (real part)	39.03
Conductivity (S/m)	2.06

Maximum location: X=5.00, Y=-10.00

SAR Peak: 0.18 W/kg

SAR 10g (W/Kg)	0.056995
SAR 1g (W/Kg)	0.104340

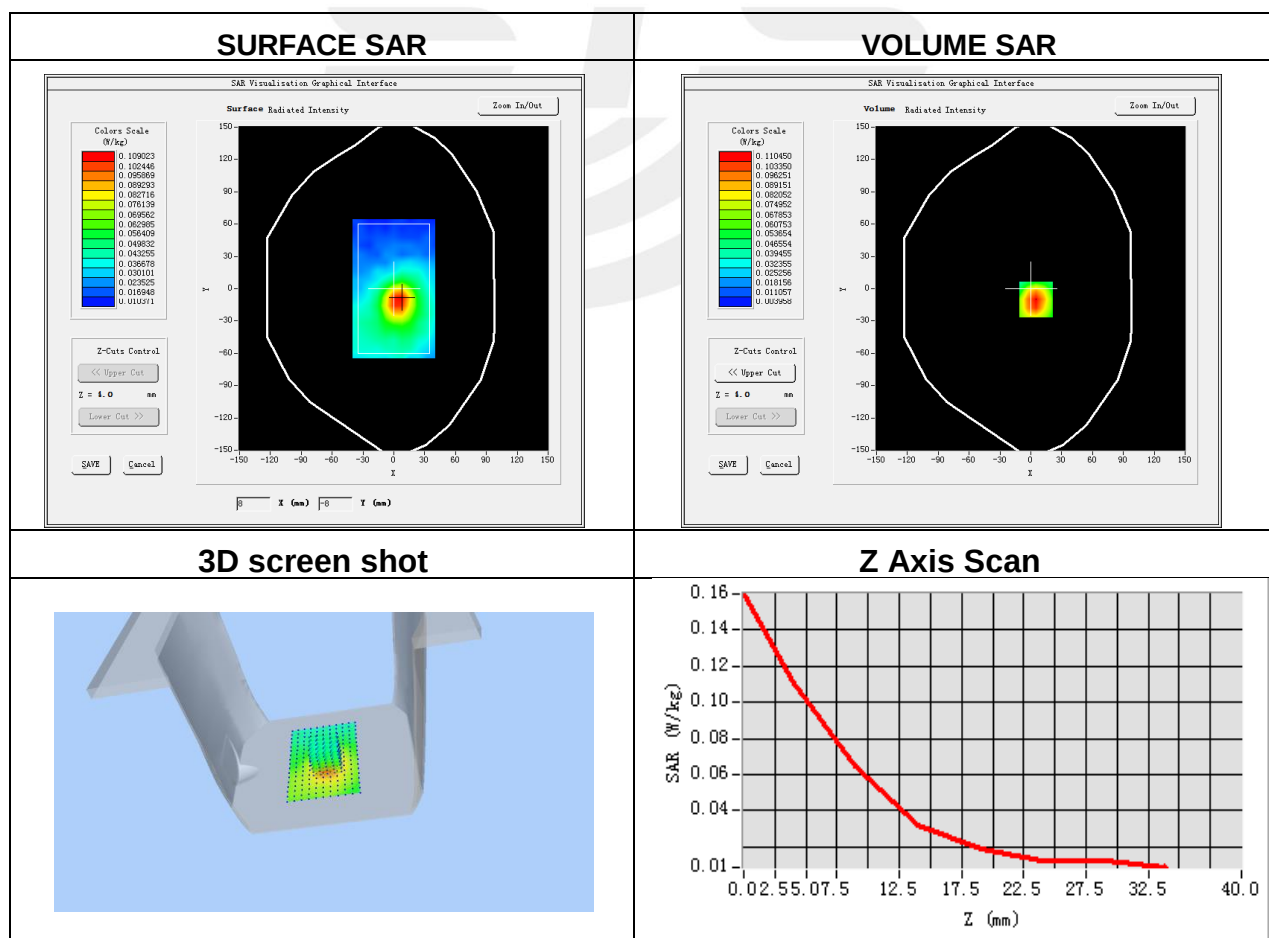



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

