

Panasonic**Mr. HISAMATSU**

Panasonic Industrial Company
Division of Matsushita Electric
Corporation of America

1707 N. Randall Road
E-Zip: 1F-2
Elgin, IL 60123-7847

Diversified Technologies Group
Magnetron Tube Department
TEL : (847) 488-5744
Fax : (847) 488-5773

18-Nov-99

ELECTROMAGNETIC RADIATION TEST OF MICROWAVE OVEN

Report No. CALR-FCC-103

Page. 1

This is to certify that the MICROWAVE OVEN from which the following data have been derived through the required measurements in Panasonic's test facility that have been filed with FCC file No. 31010/EQU 4-3-0A.

Oven Model :
Magnetron Model : 2M167

1. Power Density Safety Check

Condition	Load - Water 275cc center
Equipment	Narda 8110B
Power density	0.10 (mW/cm ²)

2. Input Power

Line Volt (V)	Input I (A)	Input Power (W)	Load Condition
120	15.8	1760	1500cc / 20 degC

3. Output Power

Condition	Water load : 750cc x 2 / 20 deg C, Tim : 120sec		
Temp 1 (deg C)	Temp 2 (deg C)	T2 - T1 (deg C)	Output Power(W)
19.25	36.60	17.35	906.1
19.25	36.55	17.30	

4. Harmonics

Harmonics	Frequency (MHz)	Load Condition	FIS(uV/m) @300m
2nd	4953	1050cc center	8.32
3rd	7412	450cc center	7.76
4th	9893	1050cc center	4.84

Note : 2nd and 3rd Harmonics are measured with load 450cc and 1050cc in the center or right front position.

5. Permissible

Formula	$SQR(906/500) \times 25 \mu V/m$ @300m
Permissible	33.65

Report No. CALR-FCC-103

Page. 2

6. Side Band

Frequency (MHz)	FIS(μ V/m) @300	Load Condition
2400	0.83	1050cc center
2500	0.36	1050cc center

7. Frequency Run

(1) Frequency VS Line Voltage Variation Test

Test Results (Room Temperature : 20 deg C)

Line Voltage Variation (V)	Frequency (MHz)	Deviation for ISM Frequency (MHz)
150 (125%)	2473	23
135 (112.5%)	2473	23
120 (Nominal)	2475	25
108 (90%)	2475	25
96 (80%)	2474	24

Load : 750 cc water in 800 cc glass beaker $\times$ 2

(2) Frequency VS Load Variation Test

Test Results (Room Temperature : 20 deg C)

Volume of water (cc)	Frequency (MHz)	Deviation for ISM Frequency (MHz)
1000	2475	25
800	2477	27
600	2473	23
400	2474	24
200	2475	25

Load : 750 cc water in 800 cc glass beaker $\times$ 2


8. Fundamental Level

Frequency (MHz)	FIS(dBuV/m) @3m	Load condition
2474	108	1050cc center

9. Spurious any emission < 2400MHz & > 2500MHz excluding Harmonics

Frequency (MHz)	FIS(dBuV/m) @3m	Load condition
2388	80.7	1050cc center

Tested By

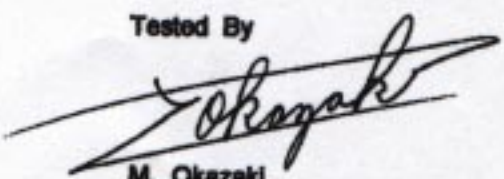
 M. Okazaki

 Applications Manager of Magnetron
 Panasonic Industrial Company

18-Nov-99

Report No. CALR-FCC-103

Page. 3

Description of Instrumentation and calculation

(1) Measurement equipment

a. Field Strength Meter : Electro-Metrics Model EMC-50

Bandwidth Setting : 1 MHz

Detector Function : Linear Average Detection

b. Receiving Antenna : Electro-Metrics Model RGA-180

Frequency Range : 1 - 18 GHz

c. Microwave Survey Meter : Narda Model 8110B

(2) Test Condition

a. Antenna Height Variation : 1.0 - 1.5 m

b. Distance of Antenna to Test unit : 3.0 m

c. Test Unit Height : 1.0 m

(3) Calculation Formula

Field Strength at 3 m (dBuV/m)

$$= \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Loss}$$

(dBuV) (dB/m) (dB)

Field Strength at 300 m (dBuV/m)

$$= K * 10^{\frac{\text{Field Strength at 3 m (dBuV/m)}}{20}}$$

K : Conversion Factor for 3 m to 300 m

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Conv. Factor K
2400	29.0	0.7	0.0061
Fundamental	29.3	0.7	0.0062
2500	29.5	0.7	0.0063
4900	33.4	0.9	0.01
7350	36.5	1.2	0.01
9800	38.2	1.4	0.01

Example : 2nd Harmonics

Receiver Reading = 20 dB @ 3 m

$$\text{FIS} = 0.01 * 10^{\frac{20 + 33.4 + 0.9}{20}} = 5.19 (\mu\text{V/m})$$

@ 300 m

Fig. 1 Physical Description of Test Site

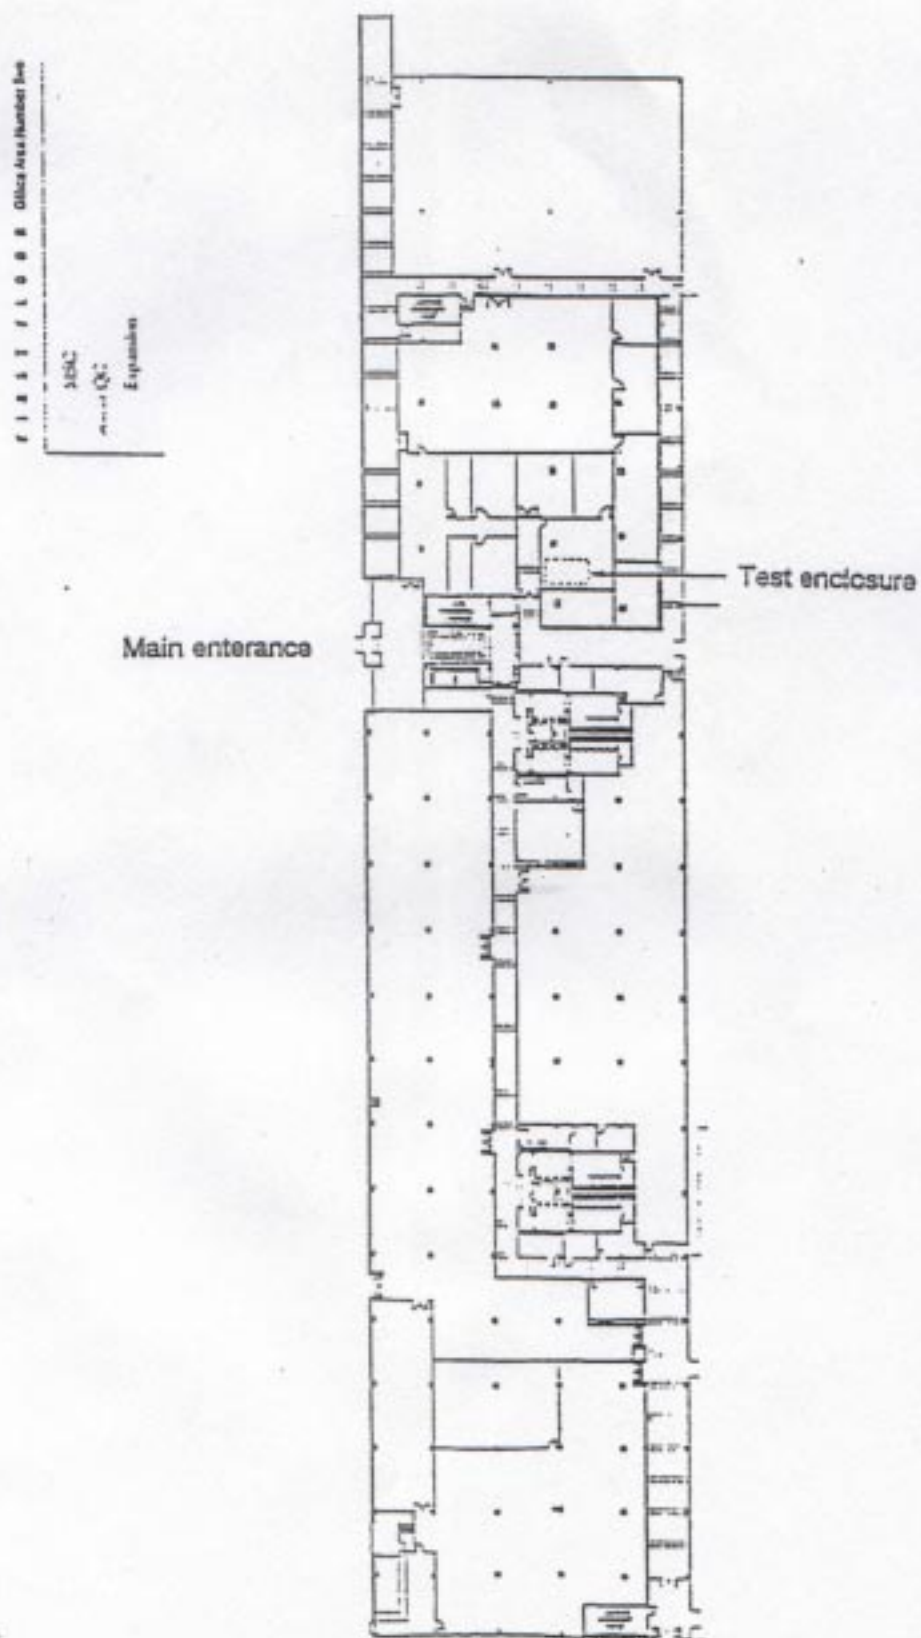


Fig. 2 Physical Dimensions of Test Site (Unit mm)

