


# TEST REPORT

Reference No..... : WTX21X05052589W-4  
FCC ID ..... : 2AAIN-MNRR2702  
Applicant ..... : ACOUSTMAX INTERNATIONAL CO.,LTD  
Address ..... : Unit D16/F Cheuk Nang Plaza 250 Hennessy Road WanchaiHongKong,  
HongKong, China.  
Product Name ..... : ROCKIN' ROLLER 270 X  
Test Model. .... : MNRR270  
Standards ..... : KDB 680106 D01 V03  
Date of Receipt sample .... : Oct.23, 2020  
Date of Test..... : Oct.23, 2020 to Nov.30, 2020  
Date of Issue ..... : May.12, 2021  
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



Prepared By:

**Waltek Testing Group (Shenzhen) Co., Ltd.**

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,  
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Reviewed By:

Approved & Authorized By:

Mike Shi/ Project Engineer

Lion Cai / RF Manager

Silin Chen / Manager

**TABLE OF CONTENTS**

**1. GENERAL INFORMATION.....4**  
    1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....4  
    1.2 TEST EQUIPMENT LIST AND DETAILS .....5  
**2. RF EXPOSURE TEST REPORT .....6**  
    2.1 STANDARD APPLICABLE.....6  
    2.2 TEST CONDITIONS .....6  
    2.3 TEST PROCEDURE.....7  
    2.4 TEST RESULT.....7  
    2.5 TEST PHOTOS .....9  
**APPENDIX PHOTOGRAPHS.....10**

**Report version**

Version No.	Date of issue	Description
Rev.00	Nov.30, 2020	Original report WTX20X10077642W-4.
Rev.01	May.12, 2021	Refer the old report WTX20X10077642W-4, updated the product name, but the circuit and the electronic construction do not change, declared by the manufacturer. So the test data from the original report.
Rev.02	Jun. 1, 2021	Refer the old report WTX21X05043704W-4; added photos of model MNRR270-X, Compared with the test model: MNRR270, there is only a difference in appearance; the circuit and the electronic construction do not change, declared by the manufacturer. So the test data from the original report.
/	/	/

## 1. GENERAL INFORMATION


---

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: ACOUSTMAX INTERNATIONAL CO.,LTD  
 Address of applicant: Unit D16/F Cheuk Nang Plaza 250 Hennessy Road  
 WanchaiHongKong, HongKong, China.

Manufacturer: Monster, Inc.  
 Address of manufacturer: Nevada City, California.

General Description of EUT	
Product Name:	ROCKIN' ROLLER 270 X
Trade Name:	 MONSTER®
Model No.:	MNRR270
Adding Model(s):	MNRR270-X, MNRR270C, MNRR270-EU
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model MNRR270, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

Technical Characteristics of EUT	
Frequency Range:	110~205KHz
Modulation Type:	ASK
Antenna Type:	Coil Antenna
Input:	AC120V/60Hz
Wireless output:	5W
Battery:	DC12V

**1.2 Test Equipment List and Details**

<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal Date</b>	<b>Due Date</b>
MPE Measuring Instrument	Narda	ELT-400	M-0155/M-0170	2020-07-15	2021-07-14
Broadband Field Meter	Narda	NBM-520	D-1699	2020-06-21	2021-06-20

## 2. RF Exposure Test Report

---

### 2.1 Standard Applicable

According to § 1.1310 system operating under the provisions of this section shall be operating in a manner that the public is not exposed to radio frequency energy level in excess limit for maximum permissible exposure.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)


Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposure</b>				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz \* = Plane-wave equivalent power density

### 2.2 Test Conditions

Test Mode	Description	Remark
TM1	Wireless charging	Transmit (Input AC120V/60Hz; Wireless output: 5W)
<b>Measurement Distance:</b>		
		15 cm

## 2.3 Test Procedure

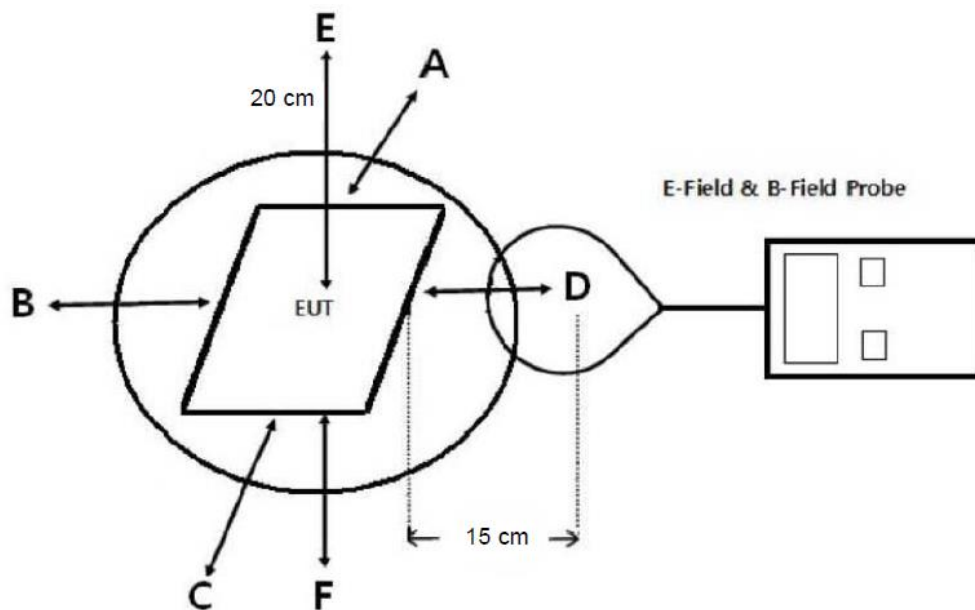

- The measurement probe was placed at test distance (15 cm for A, B, C, D, F and 20 cm for E) which is between the edge of the charger and the geometric center of probe.
- The highest emission level was recorded at the measurement points (A, B, C, D, E, F).
- The EUT was measured according to the distance of KDB 680106 D01 V03.

## 2.4 Test Result

The EUT dose comply with item 5.2 of KDB 680106 D01V03

- Power transfer frequency is less than 1 MHz  
Yes, the device operate in the frequency range from 110kHz to 205kHz.
- Output power from each primary coil is less than or equal to 15 watts  
Yes, the maximum output power of the primary coil is less than 15W.
- The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils  
Yes, the client device includes only single primary coils.
- Client device is inserted in or placed directly in contact with the transmitter  
Yes, Client device is placed directly in contact with the transmitter.
- Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

Yes, It is mobile exposure conditions only.

6. The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Yes, The EUT field strength levels are less than 50% of the MPE limit, refer to test TM1 list, and the coils can't transmitted simultaneous.

*Test Mode: TM1*

<b>Electric Field Emissions</b>			
<b>Test Position</b>	<b>Measure Value (V/m)</b>	<b>Limit(V/m)</b>	<b>50% Limit (V/m)</b>
Top	9.06	614	307
Bottom	4.66	614	307
Side 1	5.55	614	307
Side 2	6.45	614	307
Side 3	6.17	614	307
Side 4	5.72	614	307
<b>Magnetic Field Emissions</b>			
<b>Test Position</b>	<b>Measure Value (A/m)</b>	<b>Limit(A/m)</b>	<b>50% Limit (A/m)</b>
Top	0.93	1.63	0.815
Bottom	0.75	1.63	0.815
Side 1	0.47	1.63	0.815
Side 2	0.34	1.63	0.815
Side 3	0.84	1.63	0.815
Side 4	0.91	1.63	0.815



**2.5 Test Photos**



## **APPENDIX PHOTOGRAPHS**

---

**Please refer to “ANNEX”**

**\*\*\*\*\* END OF REPORT \*\*\*\*\***