

Report No.: SZEM141200670501

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 42

FCC REPORT

Application No: SZEM1412006705CR

Applicant/Manufacturer: SHENZHEN HEALTHCARE ELECTRONIC TECHNOLOGY

CO., LTD.

Factory: SHENZHEN HEALTHCARE ELECTRONIC TECHNOLOGY

CO., LTD.

Product Name: Bluetooth Diagnostic Scale

Model No.(EUT): 2AAJ7-AICDSCALE1

Trade Mark: Crane

Test sample SN: AICDSCALE1-PP-A1, 1-021

FCC ID: 2AAJ7-AICDSCALE1

Standards: 47 CFR Part 15, Subpart C (2013)

Date of Receipt: 2014-12-05

Date of Test: 2014-12-08 to 2014-12-11

Date of Issue: 2014-12-24

Test Result: PASS *

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM141200670501

Page: 2 of 42

2 Version

	Revision Record					
Version	Chapter	Date	Modifier	Remark		
00		2014-12-24		Original		

Authorized for issue by:		
Tested By	Eric Fu	2014-12-11
	(Eric Fu)/Project Engineer	Date
Prepared By	Sade Luo.	2014-12-24
	(Sade Luo) /Clerk	Date
Checked By	Samper	2014-12-25
	(Kevin Feng) /Reviewer	Date



Report No.: SZEM141200670501

Page: 3 of 42

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2009	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2009	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2009	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2009	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2009	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS



Report No.: SZEM141200670501

Page: 4 of 42

4 Contents

			Page
1	CO	OVER PAGE	1
2	VE	RSION	2
3		ST SUMMARY	
4		ONTENTS	
5	GE	NERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	7
	5.6	TEST FACILITY	8
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TE	ST RESULTS AND MEASUREMENT DATA	11
	6.1	Antenna Requirement	11
	6.2	CONDUCTED PEAK OUTPUT POWER	
	6.3	6DB OCCUPY BANDWIDTH	
	6.4	Power Spectral Density	18
	6.5	BAND-EDGE FOR RF CONDUCTED EMISSIONS	21
	6.6	Spurious RF Conducted Emissions	23
	6.7	RADIATED SPURIOUS EMISSION	30
	6.7	7.1 Spurious Emissions	30
	6.8	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	37-42



Report No.: SZEM141200670501

Page: 5 of 42

5 General Information

5.1 Client Information

Applicant:	SHENZHEN HEALTHCARE ELECTRONIC TECHNOLOGY CO., LTD.
Address of Applicant:	B Zone, 2F/B, Tsinghua Information Terminal, North Zone of Hi-Tech Industrial Park, Keyuan Road, NanShan District, Shenzhen
Manufacturer:	SHENZHEN HEALTHCARE ELECTRONIC TECHNOLOGY CO., LTD.
Address of Manufacturer:	B Zone, 2F/B, Tsinghua Information Terminal, North Zone of Hi-Tech Industrial Park, Keyuan Road, NanShan District, Shenzhen
Factory:	SHENZHEN HEALTHCARE ELECTRONIC TECHNOLOGY CO., LTD.
Address of Factory:	Block 48, Changxing Industrial Zone, ChangZhen, Gongming Town, Guangming District, Shenzhen, Guangdong, China 518132

5.2 General Description of EUT

Product Name:	Bluetooth Diagnostic Scale
Model No.:	2AAJ7-AICDSCALE1
Trade Mark:	Crane
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.0
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Fixed production
Test Power Grade:	0(manufacturer declare)
Test Software of EUT:	Smart RF Studio7 (manufacturer declare)
Antenna Type:	Integral
Antenna Gain:	0dBi
Battery:	3*1.5V AAA size battery
Power Supply:	DC 4.5V



Report No.: SZEM141200670501

Page: 6 of 42

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2440MHz
The Highest channel	2480MHz



Report No.: SZEM141200670501

Page: 7 of 42

5.3 Test Environment

Operating Environment:		
Temperature:	23.0 °C	
Humidity:	56 % RH	
Atmospheric Pressure:	1020mbar	

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab, No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM141200670501

Page: 8 of 42

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM141200670501

Page: 9 of 42

5.10 Equipment List

	RE in Chamber				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04



Report No.: SZEM141200670501

Page: 10 of 42

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R&S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM141200670501

Page: 11 of 42

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement:

47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

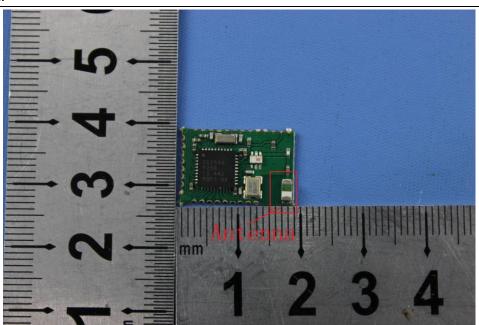


The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0dBi.



Report No.: SZEM141200670501

Page: 12 of 42

6.2 Conducted Peak Output Power

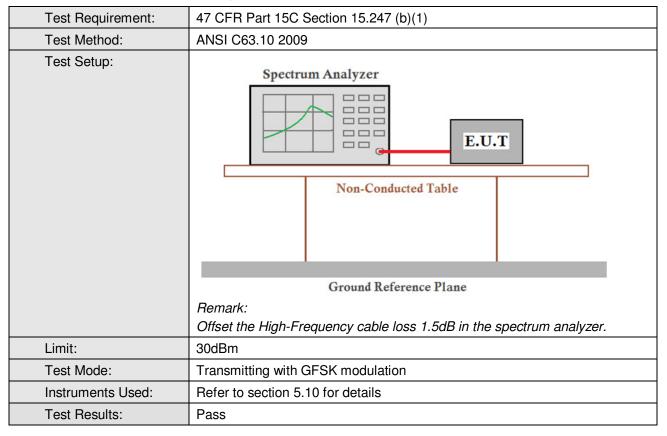

Measurement Data

	GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	1.27	30.00	Pass			
Middle	0.35	30.00	Pass			
Highest	-0.25	30.00	Pass			






Report No.: SZEM141200670501


Page: 13 of 42

Test plot as follows:

Test mode: GFSK Test channel: Lowest

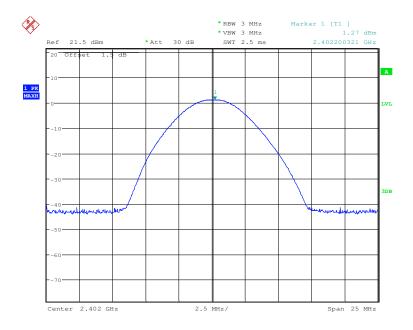

Test mode: GFSK Test channel: Middle

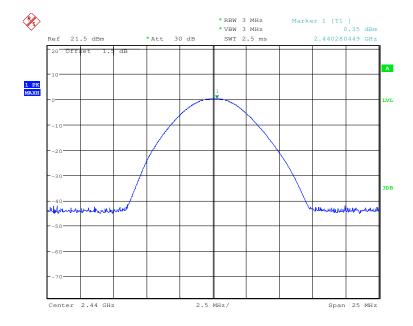




Report No.: SZEM141200670501

Page: 14 of 42

Test mode: GFSK Test channel: Highest

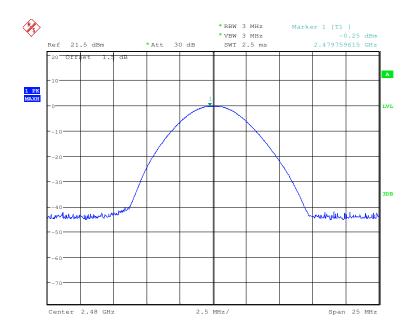




Report No.: SZEM141200670501

Page: 15 of 42

6.3 6dB Occupy Bandwidth

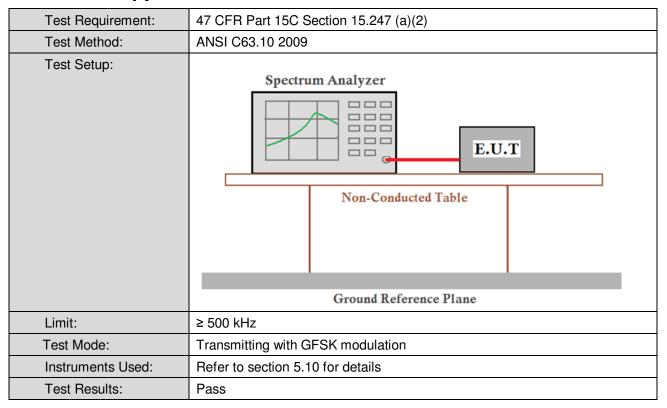

Measurement Data

Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.688	≥500	Pass
Middle	0.683	≥500	Pass
Highest	0.688	≥500	Pass




Report No.: SZEM141200670501


Page: 16 of 42

Test plot as follows:

Test mode: GFSK Test channel: Lowest

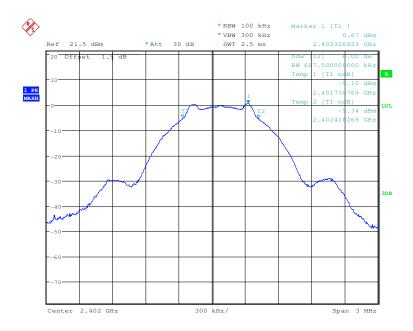

Test mode: GFSK Test channel: Middle

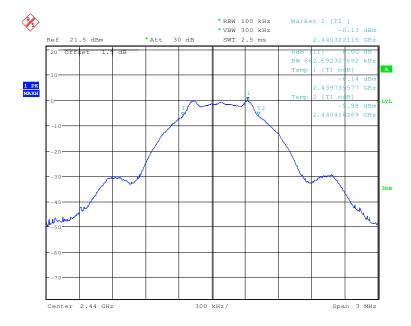




Report No.: SZEM141200670501

Page: 17 of 42

Test mode: GFSK Test channel: Highest

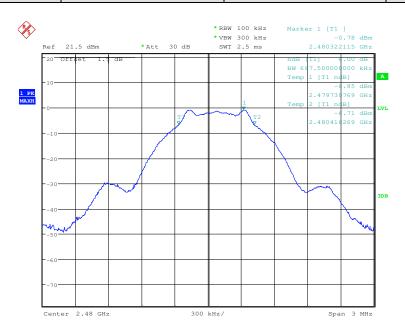




Report No.: SZEM141200670501

Page: 18 of 42

6.4 Power Spectral Density

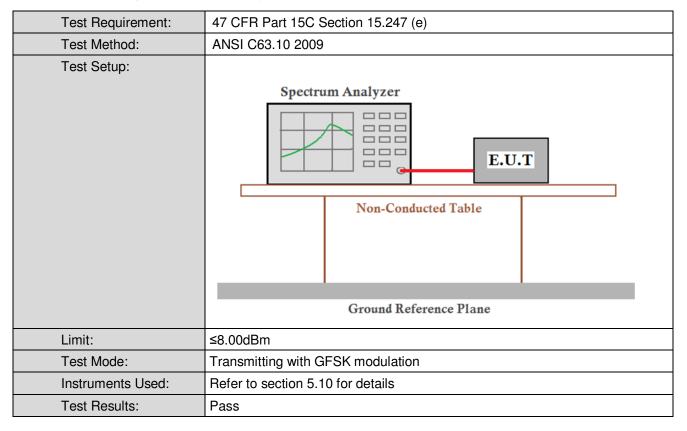

Measurement Data

GFSK mode									
Test channel	Power Spectral Density (dBm)	Limit (dBm)	Result						
Lowest	0.59	≤8.00	Pass						
Middle	-0.26	≤8.00	Pass						
Highest	-0.80	≤8.00	Pass						




Report No.: SZEM141200670501


Page: 19 of 42

Test plot as follows:

Test mode: GFSK Test channel: Lowest

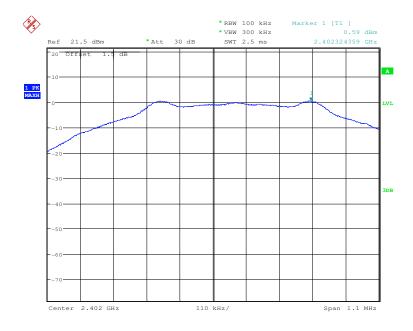

Test mode: GFSK Test channel: Middle

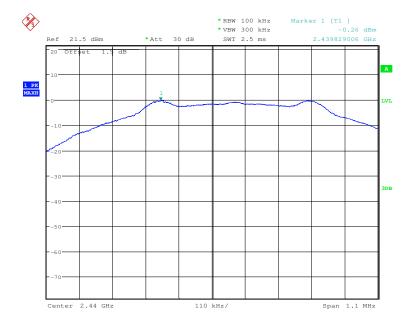




Report No.: SZEM141200670501

Page: 20 of 42

Test mode: GFSK Test channel: Highest

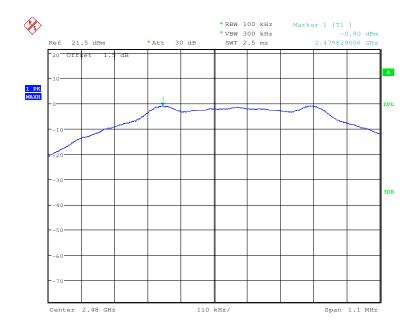




Report No.: SZEM141200670501

Page: 21 of 42

6.5 Band-edge for RF Conducted Emissions

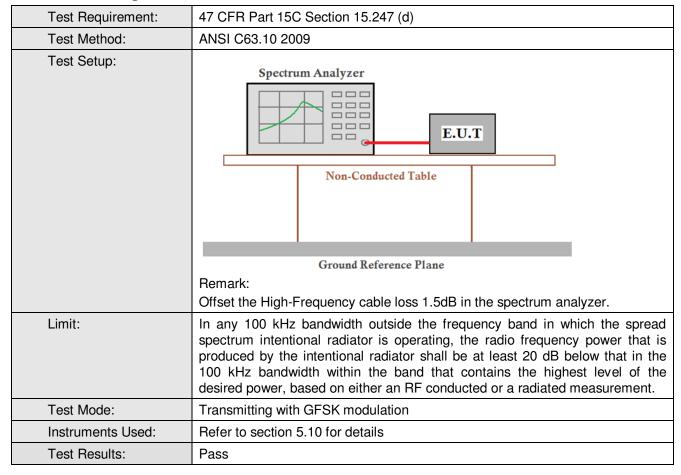




Report No.: SZEM141200670501


Page: 22 of 42

Test plot as follows:

Test mode: GFSK Test channel: Lowest

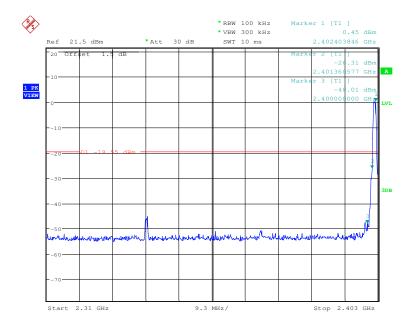

Test mode: GFSK Test channel: Highest

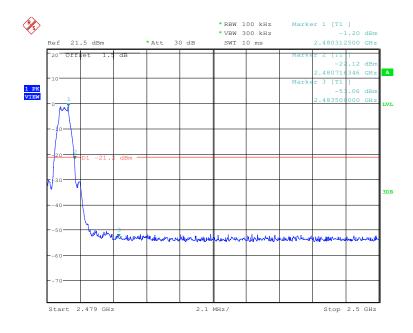





Report No.: SZEM141200670501

Page: 23 of 42

6.6 Spurious RF Conducted Emissions


Test Requirement:	47 CFR Part 15C Section 15.247 (d)					
Test Method:	ANSI C63.10 2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:					
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test Mode:	Transmitting with GFSK modulation					
Instruments Used:	Refer to section 5.10 for details					
Test Results:	Pass					




Report No.: SZEM141200670501

Page: 24 of 42

Test mode: GFSK Test channel: Lowest

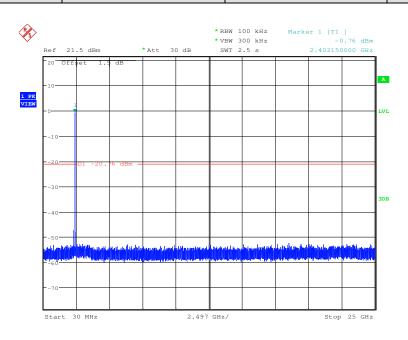


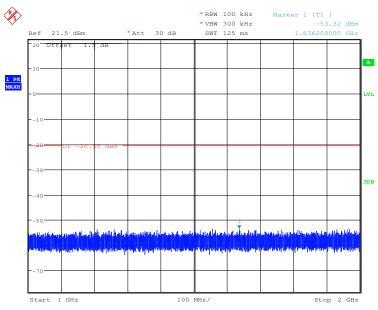




Report No.: SZEM141200670501

Page: 25 of 42

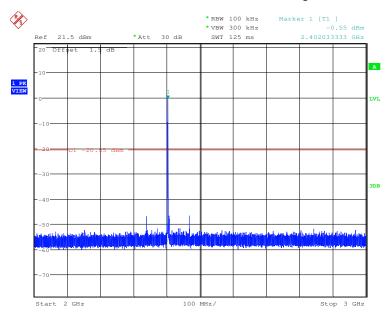

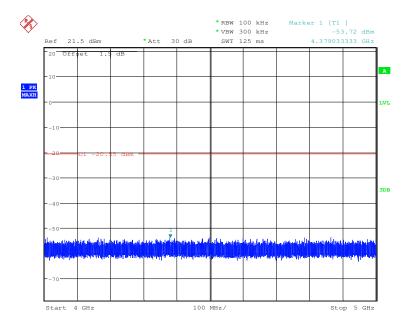





Report No.: SZEM141200670501

Page: 26 of 42

Test mode: GFSK Test channel: Middle

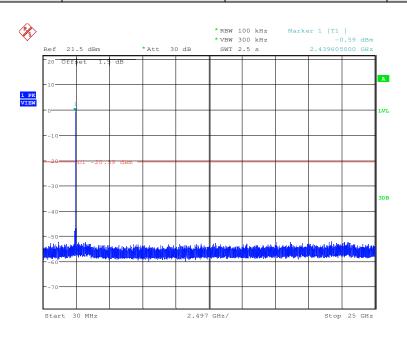


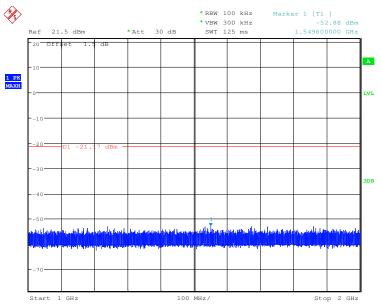




Report No.: SZEM141200670501

Page: 27 of 42

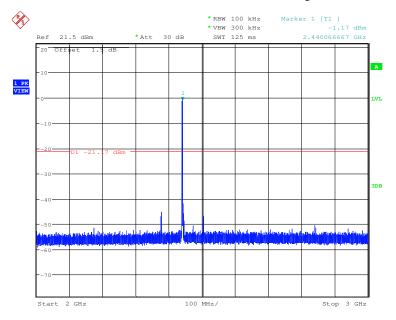

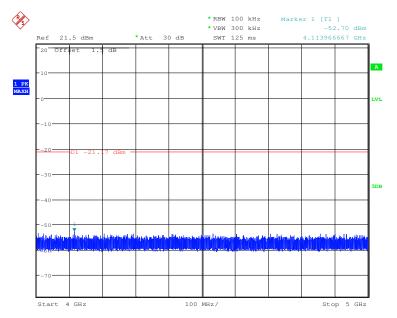





Report No.: SZEM141200670501

Page: 28 of 42

Test mode: GFSK Test channel: Highest

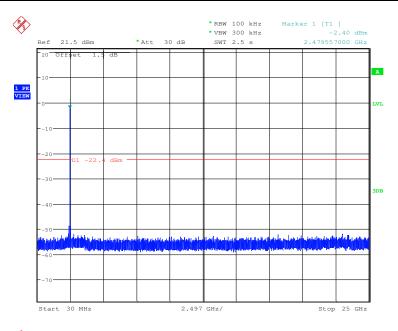


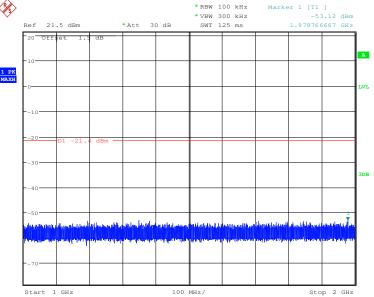




Report No.: SZEM141200670501

Page: 29 of 42

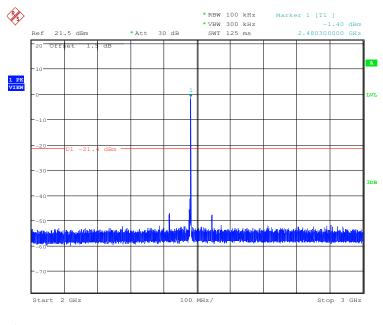

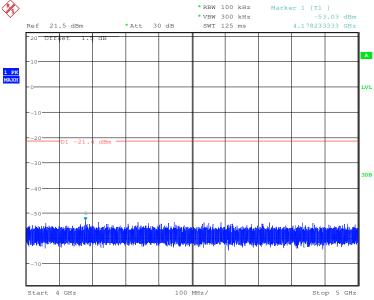

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Report No.: SZEM141200670501

Page: 30 of 42

6.7 Radiated Spurious Emission

6.7.1 Spurious Emiss	ions									
Test Requirement:	47 CFR Part 15C Secti	on 1	5.209 and 15	.205						
Test Method:	ANSI C63.10 2009	ANSI C63.10 2009								
Test Site:	Measurement Distance	: 3n	n (Semi-Anecl	noic Cham	bei	r)				
Receiver Setup:	Frequency		Detector	RBW	'	VBW	Remark			
	0.009MHz-0.090MHz		Peak	10kHz	Z	30kHz	Peak			
	0.009MHz-0.090MHz Average		10kHz	10kHz 30		Average				
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	Z	30kHz	Quasi-peak			
	0.110MHz-0.490MH	z	Peak	10kHz	Z	30kHz	Peak			
	0.110MHz-0.490MH	Z	Average	10kHz	Z	30kHz	Average			
	0.490MHz -30MHz		Quasi-peak	10kHz	Z	30kHz	Quasi-peak			
	30MHz-1GHz		Quasi-peak	100 kH	łz	300kHz	Quasi-peak			
	Above 1GHz		Peak	1MHz	<u> </u>	3MHz	Peak			
	Above Tariz		Peak	1MHz	2	10Hz	Average			
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)		Remark	Measureme distance (r			
	0.009MHz-0.490MHz	2	400/F(kHz)	-		-	300			
	0.490MHz-1.705MHz	24	1000/F(kHz)	-		-	30			
	1.705MHz-30MHz		30	-		-	30			
	30MHz-88MHz		100	40.0	Q	uasi-peak	3			
	88MHz-216MHz		150	43.5	Q	uasi-peak	3			
	216MHz-960MHz		200	46.0	Q	uasi-peak	3			
	960MHz-1GHz		500	54.0	Q	uasi-peak	3			
	Above 1GHz	Above 1GHz 5		54.0		Average	3			
	frequency emissions is limit applicable to the e	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								
Test Setup:										

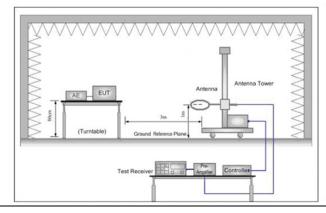

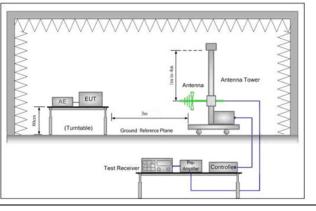



Report No.: SZEM141200670501


Page: 31 of 42


Figure 1. Below 30MHz	Figure 2. 30MHz to 1GHz
	Figure 3. Above 1 GHz
Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the
	ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	 f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz)
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
Evelouston Tool	i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation Transmitting mode
Final Test Mode:	Transmitting with GFSK modulation
	For below 1GHz part, through pre-scan the Lowest channel, middle channel and the highest channel, finally find the worst case is the lowest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM141200670501

Page: 32 of 42



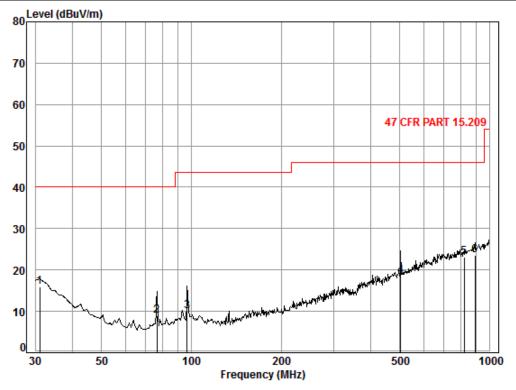

Condition: 47 CFR PART 15.209 3m Vertical

Job No. : 6705TX Test mode: TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.96	0.60	18.16	27.35	24.43	15.84	40.00	-24.16
2	76.51	1.00	7.42	27.23	27.69	8.88	40.00	-31.12
3	96.77	1.17	8.97	27.20	27.16	10.10	43.50	-33.40
4	502.94	2.60	17.88	27.69	25.79	18.58	46.00	-27.42
5	821.71	3.29	22.36	27.16	24.56	23.05	46.00	-22.95
6	893.86	3.58	23.15	26.82	23.63	23.54	46.00	-22.46






Report No.: SZEM141200670501

Page: 33 of 42

Test mode:	Transmitting	Horizontal
------------	--------------	------------

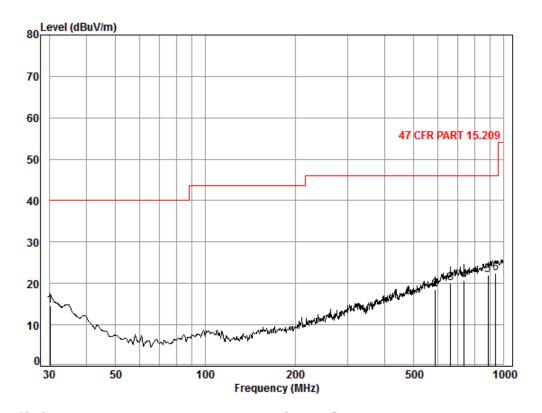

Condition: 47 CFR PART 15.209 3m Horizontal

Job No. : 6705TX Test mode: TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.11	0.60	18.64	27.36	22.62	14.50	40.00	-25.50
2	590.97	2.69	19.55	27.55	23.84	18.53	46.00	-27.47
3	665.80	2.84	21.11	27.45	23.46	19.96	46.00	-26.04
4	737.07	3.02	21.65	27.37	23.42	20.72	46.00	-25.28
5	887.61	3.55	23.10	26.85	22.28	22.08	46.00	-23.92
6	942.13	3.64	23.30	26.58	22.16	22.52	46.00	-23.48



Report No.: SZEM141200670501

Page: 34 of 42

Transmitte	Transmitter Emission above 1GHz								
Test mode:	(GFSK	Test	channel:	Lowest	Rema	ırk:	Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1480.241	6.3	25.7	34.6	44.7	42.1	74.0	-31.9	Vertical	
4804	7.6	34.3	35.1	46.8	53.6	74.0	-20.4	Vertical	
6482.258	8.9	35.2	33.7	46.5	56.9	74.0	-17.1	Vertical	
7206	9.8	35.8	33.8	47.1	58.9	74.0	-15.1	Vertical	
9608	12.0	37.2	32.6	45.1	61.7	74.0	-12.3	Vertical	
12875.326	15.1	38.2	32.2	41.4	62.5	74.0	-11.5	Vertical	
1332.075	6.0	24.8	34.2	47.4	44.0	74.0	-30.0	Horizontal	
4804	7.6	34.3	35.1	45.7	52.5	74.0	-21.5	Horizontal	
6540.592	9.0	35.3	33.7	45.5	56.1	74.0	-17.9	Horizontal	
7206	9.8	35.8	33.8	46	57.8	74.0	-16.2	Horizontal	
9608	12.0	37.2	32.6	44.9	61.5	74.0	-12.5	Horizontal	
12760.493	15.0	38.2	31.7	41.4	62.9	74.0	-11.1	Horizontal	

Test mode:	1	GFSK	Tes	t channel:	Lowest		Rema	ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limi (dBµV		Over Limit (dB)	Polarization
1480.241	6.4	25.7	34.6	29	26.5	54.0)	-27.5	Vertical
4804	7.6	34.3	35.1	33.1	39.9	54.0)	-14.1	Vertical
6482.258	8.9	35.2	33.6	32.7	43.2	54.0)	-10.8	Vertical
7206	9.8	35.8	33.8	33.3	45.1	54.0)	-8.9	Vertical
9608	12.0	37.2	32.6	31.7	48.3	54.0)	-5.7	Vertical
12875.326	15.1	38.2	32.2	28.1	49.2	54.0)	-4.8	Vertical
1332.075	6.0	24.8	34.2	30.1	26.7	54.0)	-27.3	Horizontal
4804	7.6	34.3	35.1	32.2	39.0	54.0)	-15.0	Horizontal
6540.592	8.9	35.4	33.6	32.5	43.2	54.0)	-10.8	Horizontal
7206	9.8	35.8	33.8	33.4	45.2	54.0)	-8.8	Horizontal
9608	12.0	37.2	32.6	32	48.6	54.0)	-5.4	Horizontal
12760.493	15.0	38.2	31.7	-3.4	49.8	54.0)	-4.2	Horizontal



Report No.: SZEM141200670501

Page: 35 of 42

Test mode:		GFSK	Tes	st channel:	Middle	Middle Rema		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1485.127	6.4	25.8	34.7	42.9	40.4	74.0	-33.6	Vertical
4880	7.6	34.5	35.2	44.8	51.7	74.0	-22.3	Vertical
6505.529	8.9	35.2	33.7	46.7	57.1	74.0	-16.9	Vertical
7320	10.0	35.7	33.9	46.2	58.0	74.0	-16.0	Vertical
9760	12.3	37.3	32.1	43.5	61.0	74.0	-13.0	Vertical
12578.888	15.0	38.0	32.0	41.4	62.4	74.0	-11.6	Vertical
1514.788	6.5	26.1	34.7	43.9	41.8	74.0	-32.2	Horizontal
4880	7.6	34.5	35.2	46	52.9	74.0	-21.1	Horizontal
6435.965	8.8	35.0	33.7	45.5	55.6	74.0	-18.4	Horizontal
7320	10.0	35.7	33.9	46.7	58.5	74.0	-15.5	Horizontal
9760	12.3	37.3	32.1	44	61.5	74.0	-12.5	Horizontal
12071.042	14.4	37.9	31.8	42.6	63.1	74.0	-10.9	Horizontal

Test mode:		GFSK	Tes	t channel:	Middle	Rer	nark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1485.127	6.4	25.8	34.7	29.1	26.6	54.0	-27.4	Vertical
4880	7.6	34.5	35.2	31.8	38.7	54.0	-15.3	Vertical
6505.529	8.9	35.3	33.6	32.9	43.5	54.0	-10.5	Vertical
7320	10.0	35.7	33.9	33	44.8	54.0	-9.2	Vertical
9760	12.3	37.3	32.1	31.1	48.6	54.0	-5.4	Vertical
12578.888	15.0	38.0	32.0	-3.3	49.7	54.0	-4.3	Vertical
1514.788	6.5	26.0	34.7	30.9	28.7	54.0	-25.3	Horizontal
4880	7.6	34.5	35.2	33	39.9	54.0	-14.1	Horizontal
6435.965	8.8	35.0	33.6	32.2	42.4	54.0	-11.6	Horizontal
7320	10.0	35.7	33.9	32.9	44.7	54.0	-9.3	Horizontal
9760	12.3	37.3	32.1	31	48.5	54.0	-5.5	Horizontal
12070.042	14.4	37.9	31.8	-2.5	49.8	54.0	-4.2	Horizontal



Report No.: SZEM141200670501

Page: 36 of 42

Test mode:		GFSK	Tes	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1485.127	6.4	25.8	34.7	42.9	40.4	74.0	-33.6	Vertical
4960	7.6	34.6	35.3	44.8	51.7	74.0	-22.3	Vertical
6505.529	8.9	35.2	33.7	46.7	57.1	74.0	-16.9	Vertical
7440	10.1	35.8	34.0	46.1	58.0	74.0	-16.0	Vertical
9920	12.3	37.3	32.2	43.6	61.0	74.0	-13.0	Vertical
12578.888	15.0	38.0	32.0	42.5	63.5	74.0	-10.5	Vertical
1514.788	6.5	26.1	34.7	43.9	41.8	74.0	-32.2	Horizontal
4960	7.6	34.6	35.3	46	52.9	74.0	-21.1	Horizontal
6435.965	8.8	35.0	33.7	45.5	55.6	74.0	-18.4	Horizontal
7440	10.1	35.8	34.0	46.6	58.5	74.0	-15.5	Horizontal
9920	12.3	37.3	32.2	44.1	61.5	74.0	-12.5	Horizontal
12071.042	14.4	37.9	31.8	42.7	63.2	74.0	-10.8	Horizontal
Worse case	mode:	GFSK	Tes	t channel:	Highest	Rem	ark:	Average
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over Limit (dB)	Polarization
1485.127	6.4	25.8	34.7	29.1	26.6	54.0	-27.4	Vertical
4960	7.6	34.6	35.3	31.8	38.7	54.0	-15.3	Vertical
6505.529	8.9	35.3	33.6	32.9	43.5	54.0	-10.5	Vertical
7440	10.1	35.8	34.0	32.9	44.8	54.0	-9.2	Vertical
9920	12.3	37.3	32.2	31.2	48.6	54.0	-5.4	Vertical
12578.888	15.0	38.0	32.0	-3.8	49.2	54.0	-4.8	Vertical
1514.788	6.5	26.0	34.7	30.9	28.7	54.0	-25.3	Horizontal
4960	7.6	34.6	35.3	33	39.9	54.0	-14.1	Horizontal
6436.965	8.8	35.0	33.6	32.2	42.4	54.0	-11.6	Horizontal
7440	10.1	35.8	34.0	32.8	44.7	54.0	-9.3	Horizontal
	10.0	37.3	32.2	31.1	48.5	54.0	-5.5	Horizontal
9920	12.3	37.3	32.2	31.1	+0.0	0	0.0	

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.




Report No.: SZEM141200670501

Page: 37 of 42

6.8 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205					
Test Method:	ANSI C63.10 2009					
Test Site:	Measurement Distance: 3m	(Semi-Anechoic Chambe	r)			
Limit:	Frequency	Limit (dBuV/m @3m)	Remark			
	30MHz-88MHz	40.0	Quasi-peak Value			
	88MHz-216MHz	43.5	Quasi-peak Value			
	216MHz-960MHz	46.0	Quasi-peak Value			
	960MHz-1GHz	54.0	Quasi-peak Value			
	Above 1GHz	54.0	Average Value			
	Above IGHZ	74.0	Peak Value			
Test Setup:						

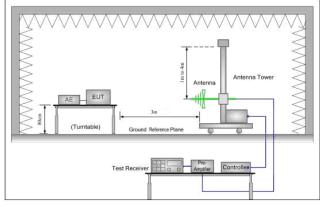

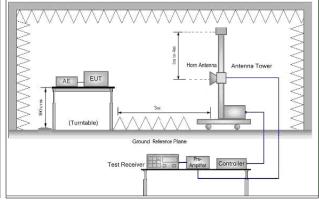


Figure 1. 30MHz to 1GHz	Figure 2. Above 1 GHz
Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

channel



Report No.: SZEM141200670501

Page: 38 of 42


	 g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation
	Transmitting mode
Final Test Mode:	Transmitting with GFSK modulation
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Report No.: SZEM141200670501

Page: 39 of 42

Test plot as follows:

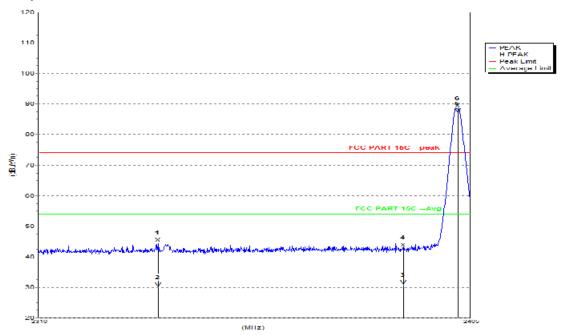


Mk.	Freq.	Level	Limit	Margin	Ant.F.	Amp.G.	Cbl.L.	Aux.F.	Pol.
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(dB/m)	(dB)	(dB)	(dB)	
Peak:									
1	2336.220	44.5	74.0	29.5	28.4	34.7	4.6	0.0	Н
2	2390	42.8	74.0	31.2	28.7	34.8	4.6	0.0	Н
3 F	2402.340	88.5	74.0	-14.5	28.8	34.9	4.6	0.0	Н
Avg									
1	2336.220	29.9	54.0	24.1	28.4	34.7	4.6	0.0	Н
2	2390	30.7	54.0	23.3	28.7	34.8	4.6	0.0	Н
3 F	2402.340	86.9	54.0	-32.9	28.8	34.9	4.6	0.0	Н



Report No.: SZEM141200670501

Page: 40 of 42

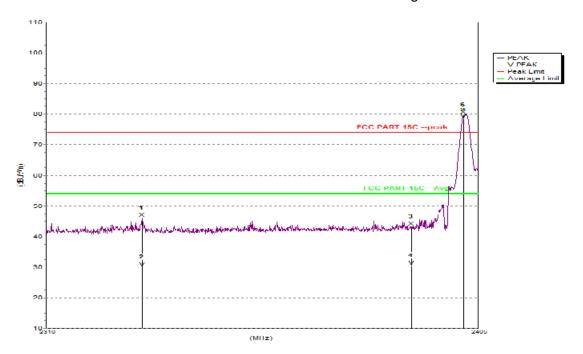


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Aux.F. (dB)	Pol.
Peak:									
1	2330.805	46.0	74.0	28.0	28.4	34.7	4.6	0.0	V
2	2390	43.1	74.0	30.9	28.7	34.8	4.6	0.0	V
3 F	2401.865	79.8	74.0	-5.8	28.8	34.9	4.6	0.0	V
Avg									
1	2330.805	29.9	54.0	24.1	28.4	34.7	4.6	0.0	V
2	2390	30.4	54.0	23.6	28.7	34.8	4.6	0.0	V
3 F	2401.865	78.4	54.0	-24.4	28.8	34.9	4.6	0.0	V



Report No.: SZEM141200670501

Page: 41 of 42

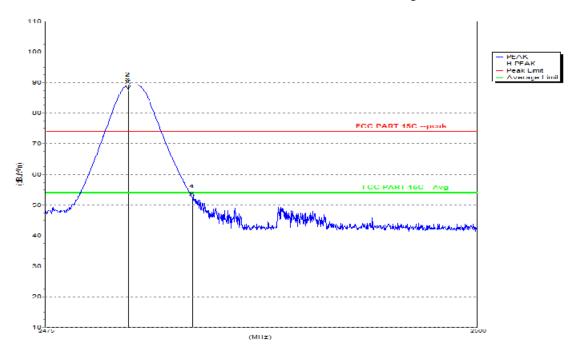


Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Aux.F. (dB)	Pol.
Peak:	,	,	,	, ,	,	,	, ,		
1 F	2479.825	89.2	74.0	-15.2	29.3	35.0	4.5	0.0	Н
2	2483.500	52.7	74.0	21.3	29.3	35.0	4.5	0.0	Н
Avg									
1	2383.500	40.4	54.0	13.6	28.7	34.8	4.6	0.0	Н
2 F	2479.825	87.5	54.0	-33.5	29.3	35.0	4.5	0.0	Н



Report No.: SZEM141200670501

Page: 42 of 42

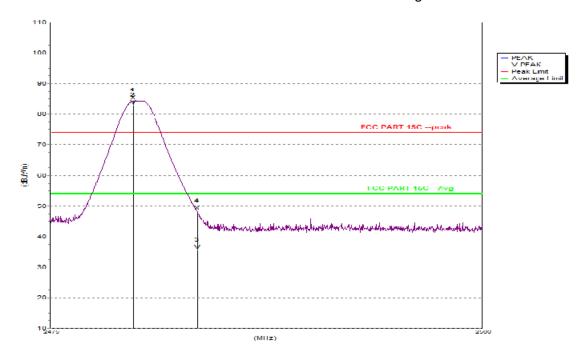

Mk.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant.F. (dB/m)	Amp.G. (dB)	Cbl.L. (dB)	Aux.F. (dB)	Pol.
Peak:									
1 F	2479.825	84.4	74.0	-10.4	29.3	35.0	4.5	0.0	V
2	2483.500	48.3	74.0	25.7	29.3	35.0	4.5	0.0	V
Avg									
1 F	2479.825	82.9	54.0	-28.9	29.3	35.0	4.5	0.0	V
2	2483.500	35.6	54.0	18.4	29.3	35.0	4.5	0.0	V

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

