

TEST REPORT

Report Number: 100825363MPK-029

Project Number: G100825363

August 22, 2013

**Testing performed on the
Qolsys Security Panel
Model: IQPanel-VRZ
FCC ID: 2AAJXQS-9004-VRZ
Contains FCC ID: MIVCNN0301
IC: 11205A-QS9004VRZ
Contains IC: 4160A-CNN0301
to**

**FCC Part 15.249
RSS-210, Annex 2.9
FCC Part 15, Subpart B
Industry Canada ICES-003**

**for
Qolsys, Inc.**

Test Performed by:

Intertek
1365 Adams Court
Menlo Park, CA 94025 USA

Test Authorized by:

Qolsys, Inc.
20111 Stevens Creek Blvd., Suite 280
Cupertino, CA 95014 USA

Prepared by:



Minh Ly

Date: August 22, 2013

Reviewed by:



Krishna K Vemuri

Date: August 22, 2013

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

Report No. 100825363MPK-029

Equipment Under Test:	Qolsys security panel
Trade Name:	Qolsys, Inc.
Model Number:	IQPanel-VRZ
Serial Number:	QSNA132800204
Applicant:	Qolsys, Inc.
Contact:	Mark Skeen
Address:	Qolsys, Inc. 20111 Stevens Creek Blvd., Suite 280 Cupertino, CA 95014
Country	USA
Tel. Number:	408-857-8415
Email:	mark.skeen@qolsys.com
Applicable Regulation:	FCC Part 15.249 RSS-210, Annex 2.9 FCC Part 15, Subpart B Industry Canada ICES-003
Date of Test:	August 12 to 20, 2013

We attest to the accuracy of this report:



Minh Ly
Project Engineer



Krishna K Vemuri
EMC Senior Staff Engineer

TABLE OF CONTENTS

1.0	Summary of Tests	4
2.0	General Description.....	5
2.1	Product Description	5
2.2	Related Submittal(s) Grants.....	6
2.3	Test Methodology	6
2.4	Test Facility	6
2.5	Measurement Uncertainty	6
3.0	System Test Configuration.....	7
3.1	Support Equipment and description.....	7
3.2	Block Diagram of Test Setup.....	7
3.3	Justification.....	8
3.4	Software Exercise Program.....	8
3.5	Mode of operation during test.....	8
3.6	Modifications required for Compliance.....	8
3.7	Additions, deviations and exclusions from standards.....	8
4.0	Measurement Results.....	9
4.1	Transmitter Radiated Emissions	9
4.2	Occupied Bandwidth.....	17
4.3	Radiated Emissions from Digital Parts	20
4.4	Line Conducted Emissions	27
5.0	List of Test Equipment	32
6.0	Document History	33

1.0 Summary of Tests

TEST	REFERENCE FCC Part 15C	REFERENCE IC RSS-210/ RSS-Gen	RESULT
Field Strength of Fundamental	15.249a	A2.9(1) RSS-210	Complies
Field Strength of Harmonics	15.249a	A2.9(1) RSS-210	Complies
Radiated Emissions outside the band	15.249c	A2.9(2) RSS-210	Complies
Occupied Bandwidth	15.215(c)	4.4.1 RSS-Gen	Complies
Line Conducted Emissions	15.207	7.2.2 RSS-Gen	Complies
Antenna requirement	15.203	7.1.4 RSS-Gen	Complies
Radiated and Conducted Emissions from Digital Part and receiver	FCC 47CFR 15B	ICES 003	Complies

2.0 General Description

2.1 Product Description

The Equipment Under Test (EUT) is the Qolsys Security Panel, model number IQPanel-VRZ, is a combination wireless home security, life safety, and home automation system. It consists of one Home Security RF receiver, one Zigbee radio, one Zwave radio, one WiFi radio and one CDMA radio.

The CDMA radio is a modular approved CDMA module with FCC ID: MIVCNN0301 and IC: 4160A-CNN0301. This test report covers only the Zwave radio. A separate test report, report # 100825363MPK-028, covers the Zigbee radio and a separate test report, report # 100825363MPK-030, covers the WiFi radio.

The IQ Panel was powered via a 12VDC through an AC/DC power supply which connected to 120VAC/60Hz mains.

Information about the Zwave radio is presented below:

Applicant name & address	Qolsys, Inc. 20111 Stevens Creek Blvd., Suite 280 Cupertino, CA 95014 USA
Manufacturer name & address	Qolsys, Inc. 20111 Stevens Creek Blvd., Suite 280 Cupertino, CA 95014 USA
Model No.	IQPanel-VRZ
FCC Identifier	2AAJXQS-9004-VRZ Contains FCC ID: MIVCNN0301
IC	11205A-QS9004VRZ Contains IC: 4160A-CNN0301
Frequency Range	908.4MHz and 908.42MHz
Rated RF Output	82.9 dB(μ V/m) at 3m
Number of Channel(s)	2
Type of Modulation	FSK
Data Rate	40Kbps for 908.4MHz Channel 9.6 Kbps for 908.42MHz Channel
Antenna(s) & Gain	-3dBi quarter wavelength dipole PCB wire antenna

EUT receive date: August 12, 2013.

EUT receive condition: The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

Test start date: August 12, 2013

Test completion date: August 20, 2013

The test results in this report pertain only to the item tested.

2.2 Related Submittal(s) Grants

None.

2.3 Test Methodology

Radiated emissions and AC mains conducted emissions measurements were performed according to the procedures in ANSI C63.10. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Data Sheet" of this report. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn't take into account the measurement uncertainty.

Estimated Measurement Uncertainty


Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 1 GHz	1 GHz – 2.5 GHz	> 2.5 GHz
RF Power and Power Density – antenna conducted	-	0.7 dB	-
Unwanted emissions - antenna conducted	1.1 dB	1.3 dB	1.9 dB
Bandwidth – antenna conducted	-	30 Hz	-
Radiated emissions	4.2 dB	3.4 dB	4.4 dB
AC mains conducted emissions	2.4 dB	-	-

3.0 System Test Configuration

3.1 Support Equipment and description

Item #	Description	Model No./ Part No.	Serial No.
1	HP Laptop	6735B	Not Labeled

3.2 Block Diagram of Test Setup

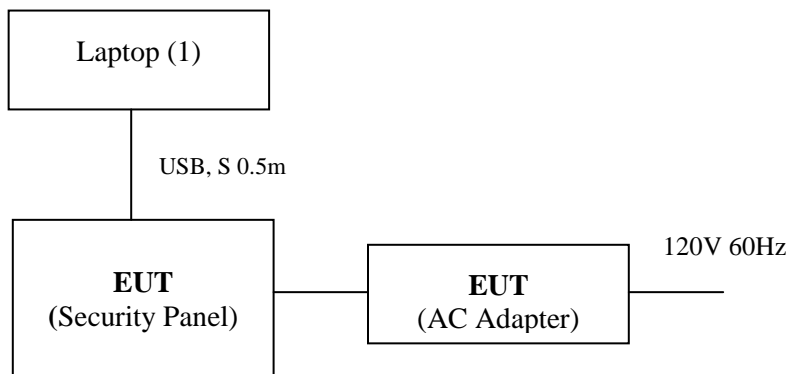

AC Adapter: Model: SW-120200A, Manufacturer: SURE-POWER

S = Shielded	F = With Ferrite
U = Unshielded	M = Meter

3.3 Justification

For radiated emission measurements the EUT is placed on a non-conductive table. The EUT is attached to peripherals and they are connected and operational (as typical as possible). The EUT is wired to transmit full power. During testing, all cables are manipulated to produce worst-case emissions.

3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

3.5 Mode of operation during test

During the test the EUT was set to transmit the modulated signal with 100% duty cycle.

3.6 Modifications required for Compliance

No modifications were installed by Intertek during compliance testing in order to bring the product into compliance.

3.7 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.

4.0 Measurement Results

4.1 Transmitter Radiated Emissions

FCC Rules: 15.249, 15.209; IC Rules: RSS-210 (A2.9), RSS-Gen

Requirements

The Field Strength of emissions at a distance of 3 meters shall not exceed the following levels:

94 dB(μ V/m) for fundamental frequency,

54 dB(μ V/m) for harmonics.

Emissions radiated outside of the specified frequency band, except for harmonics, shall be attenuated by at least 50 dB below the level of fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

Procedure

Radiated emission measurements were performed from 30 MHz to 10 GHz according to the procedure described in ANSI C64.10. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak measurements were performed.

Radiated emissions are taken at 10 meters for frequencies below 1 GHz and at 3 meters for frequencies above 1 GHz

The EUT is placed on a plastic turntable that is 80 cm in height. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.



Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CF - AG$; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude (including preamplifier) in dB(μ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB(μ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB(μ V/m). This value in dB(μ V/m) was converted to its corresponding level in μ V/m.

RA = 52.0 dB(μ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

FS = $52.0 + 7.4 + 1.6 - 29.0 = 32$ dB(μ V/m).


Level in μ V/m = Common Antilogarithm [$(32 \text{ dB}\mu\text{V/m})/20$] = 39.8 μ V/m.

Test Result

The data below shows the significant emission frequencies, the limit and the margin of compliance.

The EUT passed 2.6dB.

Radiated emissions at fundamental frequency

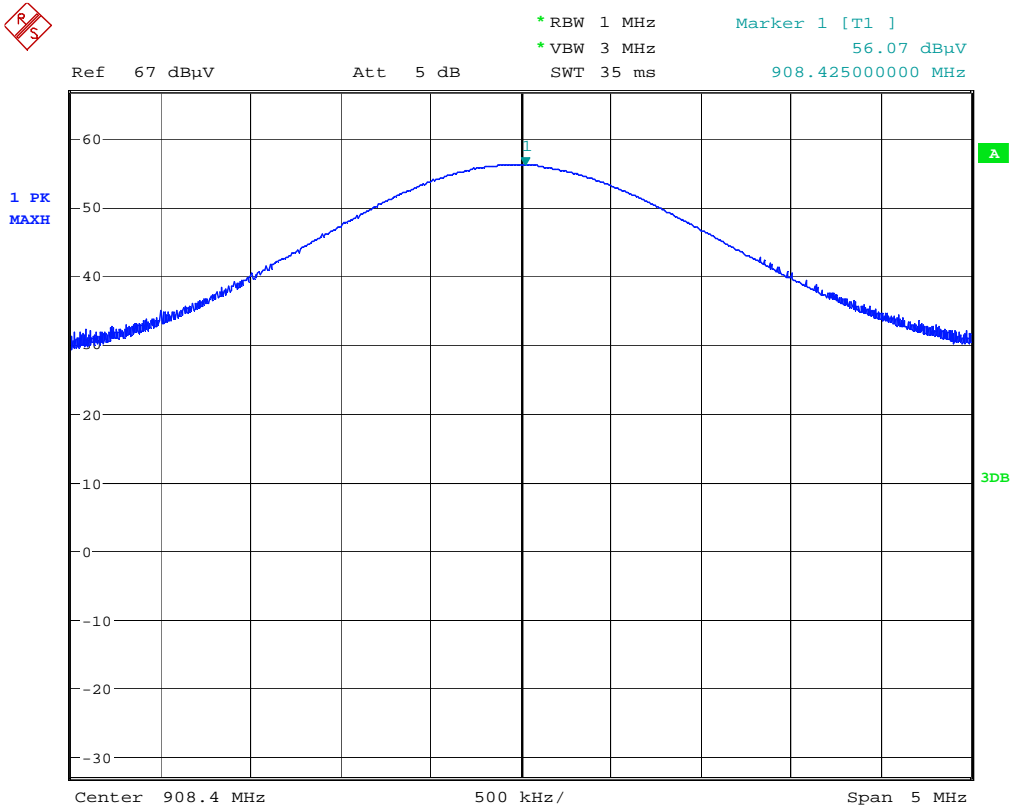

908.4FS

Date: 13.JUL.2013 17:08:22

The Field Strength of Fundamental at a distance of 3 meters is 82.9 dBuV (margin to Fundamental frequency Field Strength limit by 11.1dB).


Note: RA = 56.1 dB(μV)

AF = 23.20 dB(1/m)


CF = 3.6 dB

FS = 56.1+23.2+3.6= 82.9 dB(μV/m).

Transmitter Radiated Emissions below 1GHz

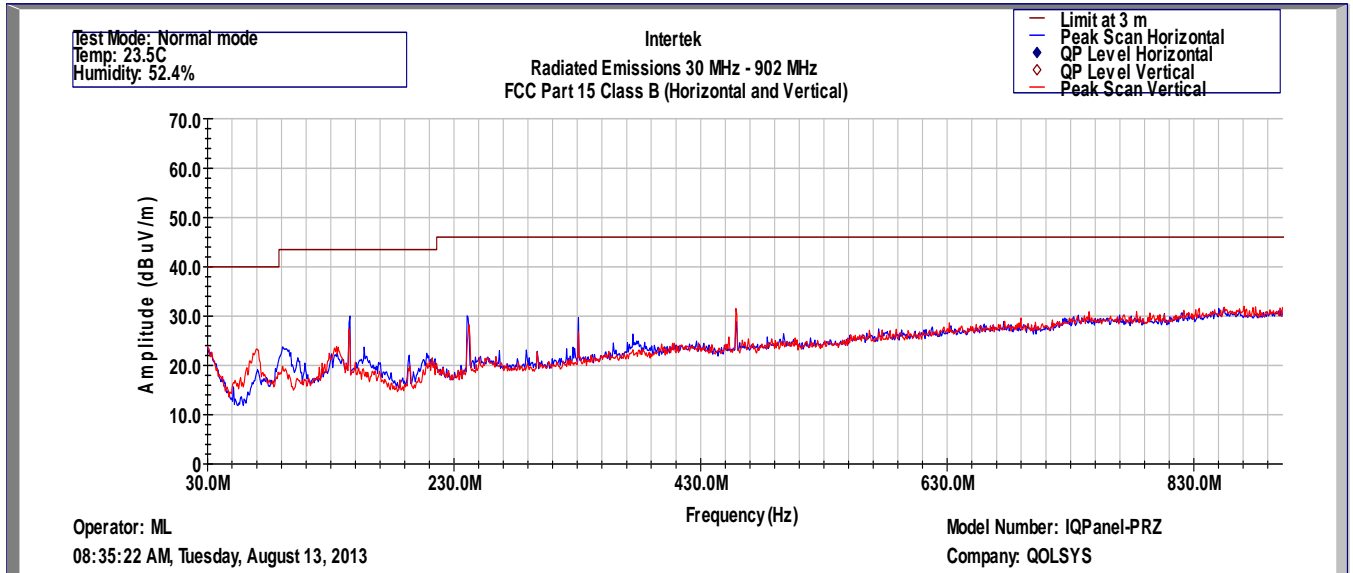


Plot 1: Spurious Emissions, 30MHz to 902MHz, Peak

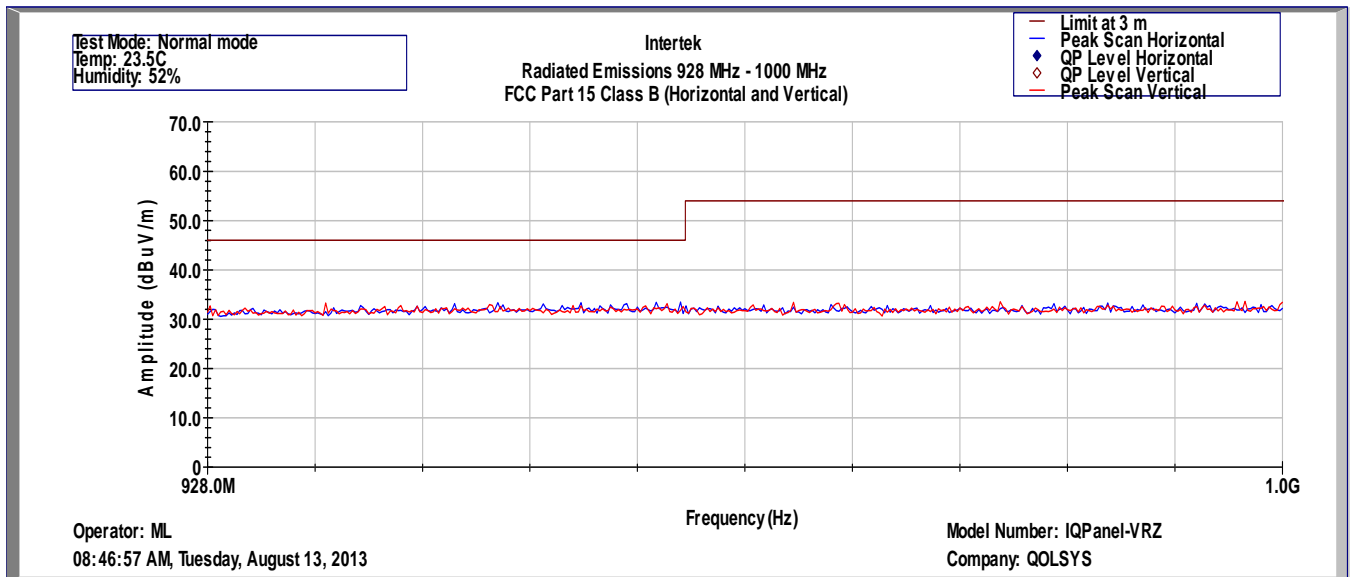


Plot 2: Spurious Emissions, 928MHz to 1000MHz, Peak

Transmitter Radiated Emissions above 1GHz

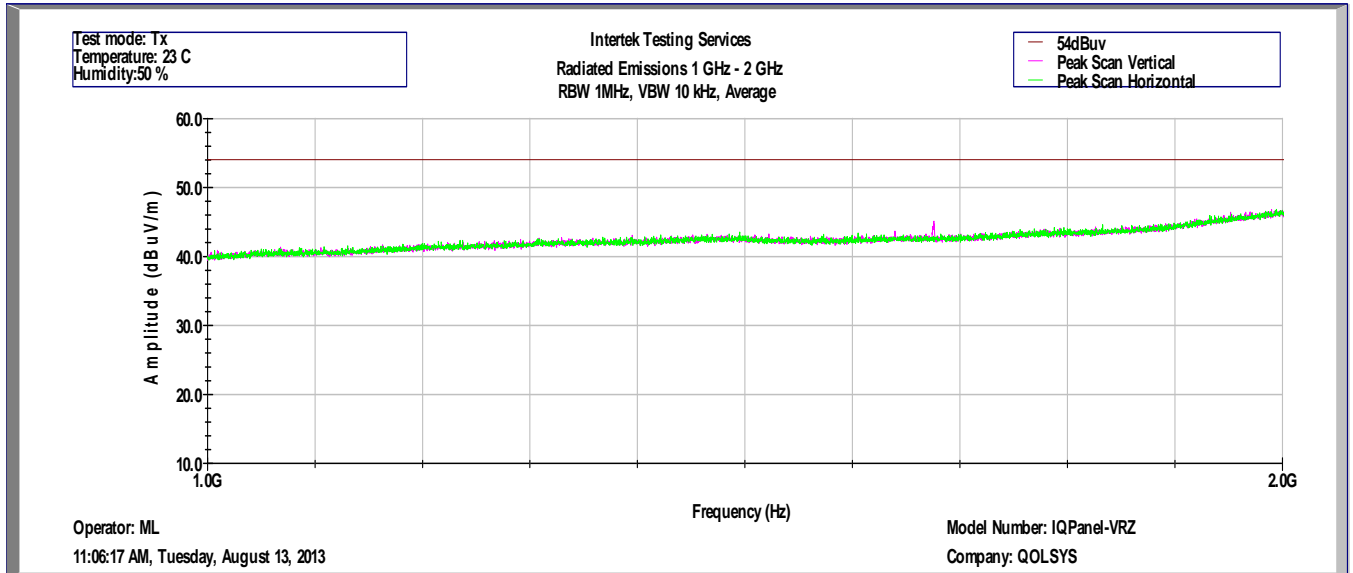


Plot 3: Spurious Emissions, 1GHz to 2GHz, Average

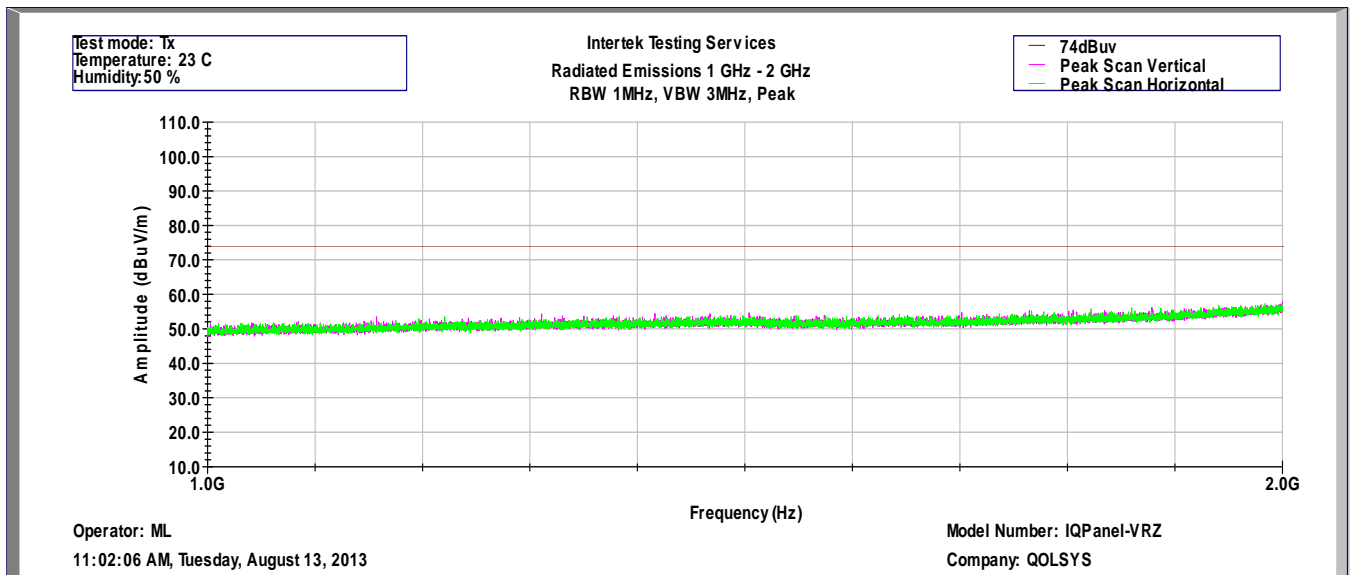

Plot 4: Spurious Emission, 1GHz to 2GHz, Peak



Transmitter Radiated Emissions above 1GHz

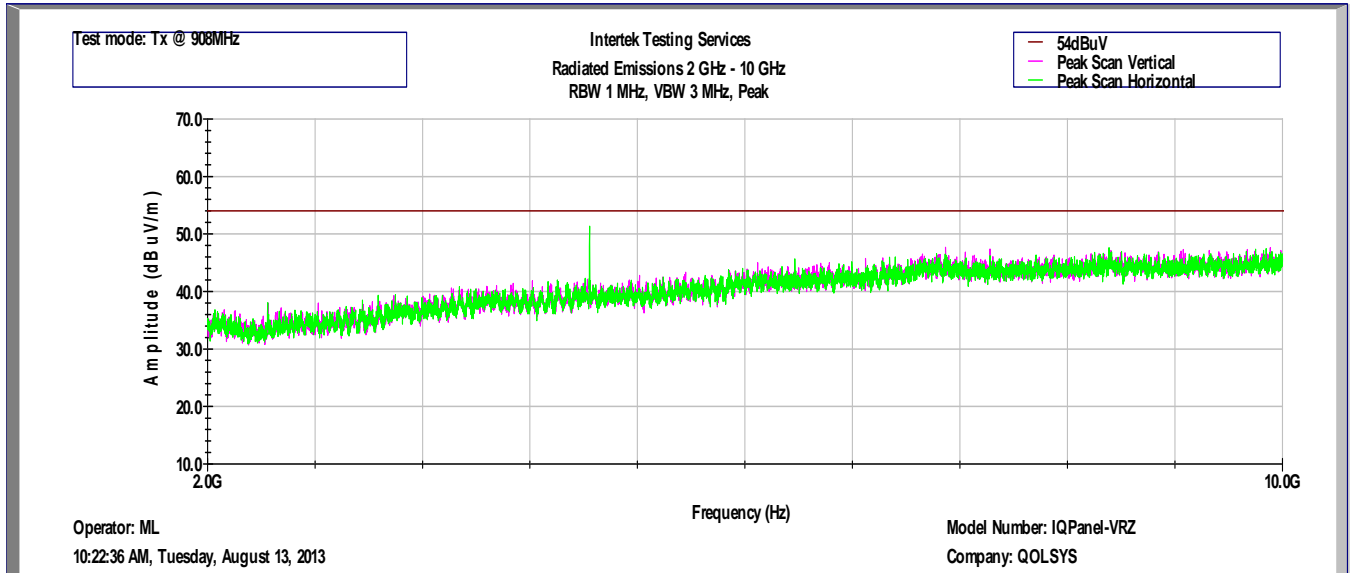

Plot 5: Spurious Emission, 2GHz to 10GHz, Peak

Transmitter Radiated Emissions above 1GHz

Frequency MHz	SA reading dB(uV)	Detector	Antenna Factor dB(1/m)	Cable Factor dB	Amplifier Gain dB	FS dB(uV/m)	FS Limit dB(uV/m)	Margin dB
Tx @ 908.4 MHz								
1816.8	40.7	Peak	25.8	4.0	34.8	35.6**	74.0	-38.4
2725.2	37.6	Peak	28.8	4.5	34.1	36.8**	74.0	-31.5
3633.6	36.1*	Peak	30.9	5.2	34.6	37.5**	74.0	-37.2
4844.4	46.7	Peak	32.8	4.8	32.9	51.4**	74.0	-22.6


*Noise floor.

** Peak FS < Average FS Limit [54 dB(uV/m)]


Note: All other emissions not reported are noise floor which is at least 10 dB below the limit.

Test setup photographs

The following photographs show the testing configurations used.

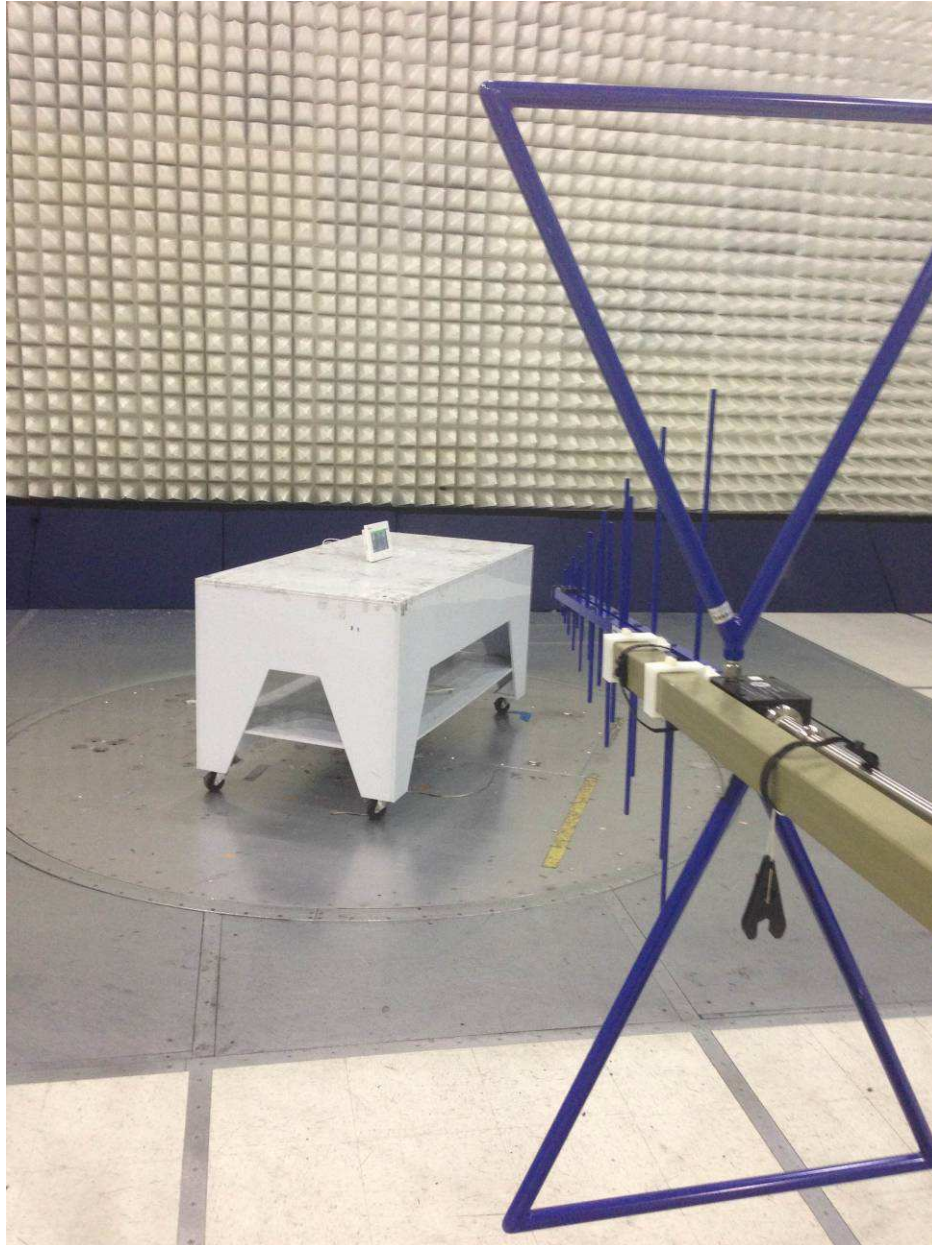

Test setup photographs (Continued)

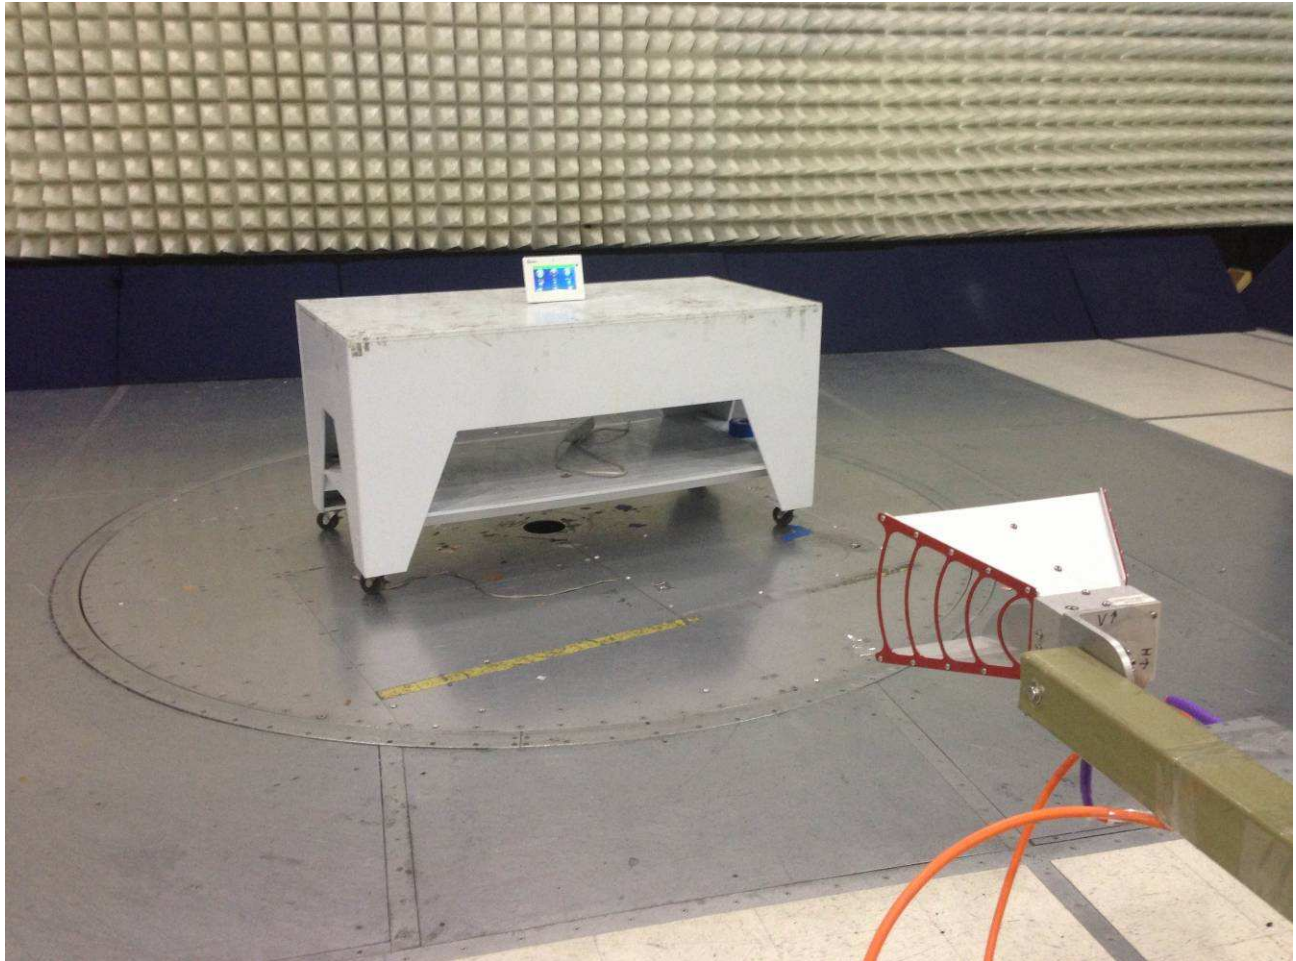

4.2 Occupied Bandwidth
FCC Rules: 15.215(c); IC Rules: RSS-Gen

Requirements

No limits for 20 dB Bandwidth and Occupied Bandwidths.


Procedure

The antenna port of the EUT was connected to the input of a spectrum analyzer (SA). For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 20 dB lower than PEAK level. The 20 dB bandwidth was determined from where the channel output spectrum intersected the marker delta.

The occupied bandwidth was measured using the built-in spectrum analyzer function for 99% power bandwidth measurement.

Test Results


Frequency MHz	20-dB bandwidth kHz	Occupied bandwidth kHz
908.4	159.94	129.48

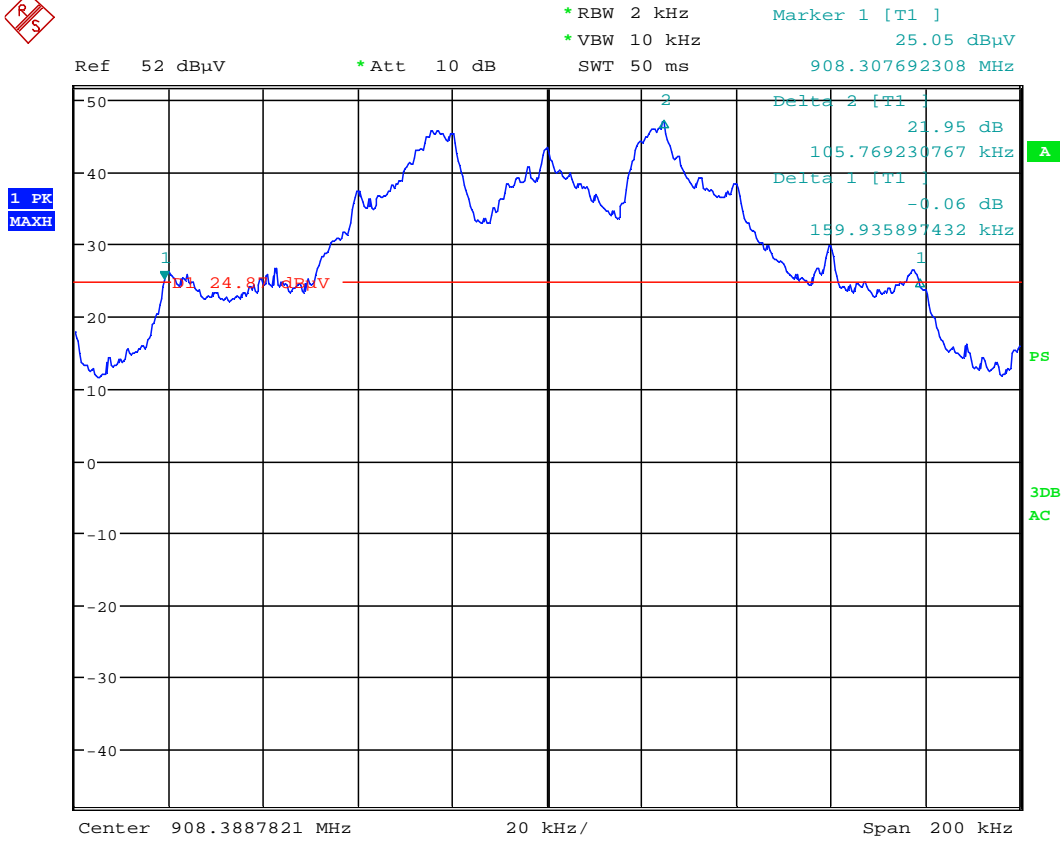

OCB

Date: 21.AUG.2013 11:08:36

Plot 1: 20dB Bandwidth

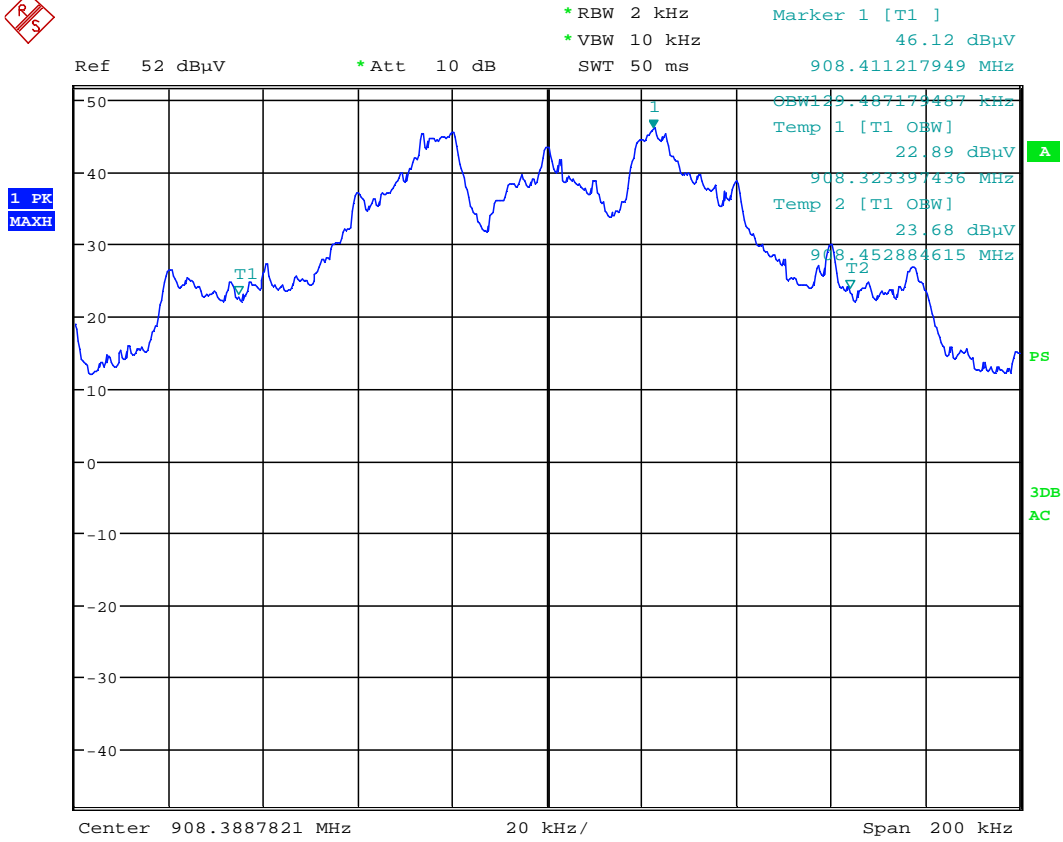

OCB

Date: 21.AUG.2013 10:59:45

Plot 2: 99% Bandwidth

4.3 Radiated Emissions from Digital Parts
FCC Ref: 15.109

Requirements

*Limits for Electromagnetic Radiated Emissions, FCC Section 15.109(b) and ICES 003 **

Frequency (MHz)	Class A at 10m dB(μ V/m)	Class B at 3m dB(μ V/m)
30-88	39	40.0
88-216	43.5	43.5
216-960	46.4	46.0
Above 960	49.5	54.0

* According to FCC Part 15.109(g) an alternative to the radiated emission limits shown above, digital devices may be shown to comply with the limit of CISPR Pub. 22

Procedure

Measurements are conducted with a quasi-peak detector instrument in the frequency range of 30 MHz to 1000 MHz and with the average detector instrument in the frequency range above 1000 MHz. The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole.

Measurements of the radiated field are made with the antenna located at a distance of 10 meters from the EUT. If the field-strength measurements at 10m cannot be made because of high ambient noise level or for other reasons, measurements of Class B equipment may be made at a closer distance, for example 3m. An inverse proportionality factor of 20 dB per decade should be used to normalize the measured data to the specified distance for determining compliance.

The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for a larger EUT.

Floor standing EUTs are placed on a horizontal metal ground plane and isolated from the ground plane by 3 to 12 mm of insulating material.

Equipment setup for radiated disturbance tests followed the guidelines of ANSI C63.4.

Example Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor to from the measured reading, followed by subtracting the Amplifier Gain (if any) and Distance Correction Factor (if any). The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - PA - DCF$$

Where

FS = Field Strength in dB ($\mu\text{V}/\text{m}$)

RA = Receiver Amplitude (including preamplifier) in dB (μV)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB (1/m)

AG = Amplifier Gain in dB

DCF=Distance Correction Factor in dB

(Formula: $DCF = 20\log_{10}(\text{measurement distance}/\text{specification distance})$)

Assume a receiver reading of 52.0 dB (μV) is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB and DCF of 10.5 dB (DCF in this example: $20\log_{10}(10/3)$) is subtracted, giving field strength of 21.5 dB ($\mu\text{V}/\text{m}$).

$$RA = 52.0 \text{ dB } (\mu\text{V})$$

$$AF = 7.4 \text{ dB } (1/\text{m})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$DCF=10.5 \text{ dB}$$

$$FS = RF + AF + CF - AG - DCF$$

$$FS = 52.0 + 7.4 + 1.6 - 29.0 - 10.5$$

$$FS = 21.5 \text{ dB } (\mu\text{V}/\text{m})$$


Test Results

Radiated emission measurements were performed from 30 MHz to 1000 MHz. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater below 1000 MHz and 1 MHz - above 1000 MHz.

The EUT passed 3.0dB for Class B.



FCC and ICES 003, Radiated Disturbance

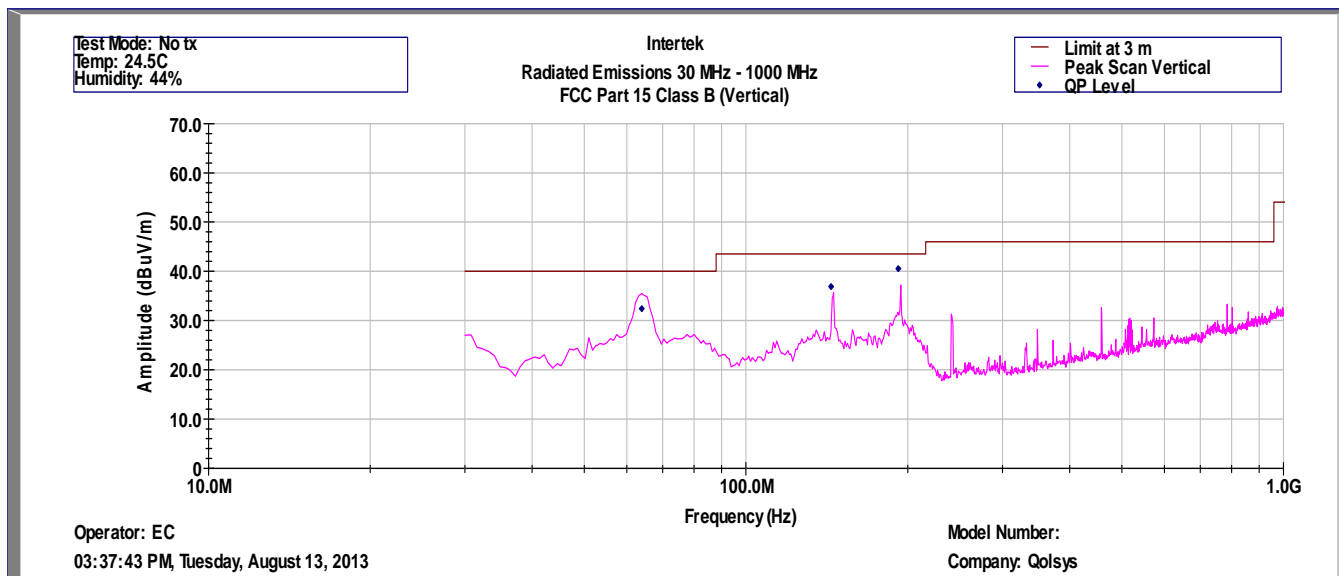

Intertek Testing Services
Radiated Emissions 30 MHz - 1000 MHz
FCC Part 15 Class B (QP-Vertical)

Operator: EC
August 13, 2013


Model Number: IQPanel-VRZ
Company: Qolsys, Inc

Frequency Hz	Quasi Pk FS dB(uV/m)	Limit@10m dB(uV/m)	Margin dB	RA dB	CF dB	AG dB	DCF dB	AF dB(1/m)
6.40E+07	32.4	40.0	-7.6	47.7	0.9	32.1	10.5	5.8
1.44E+08	36.9	43.5	-6.6	46.5	1.4	32	10.5	11.2
1.92E+08	40.5	43.5	-3.0	52.2	1.6	32	10.5	9.0

Test Mode: Digital Parts Emissions
Temperature: 24.5 C
Humidity : 44 %



FCC and ICES 003, Radiated Disturbance

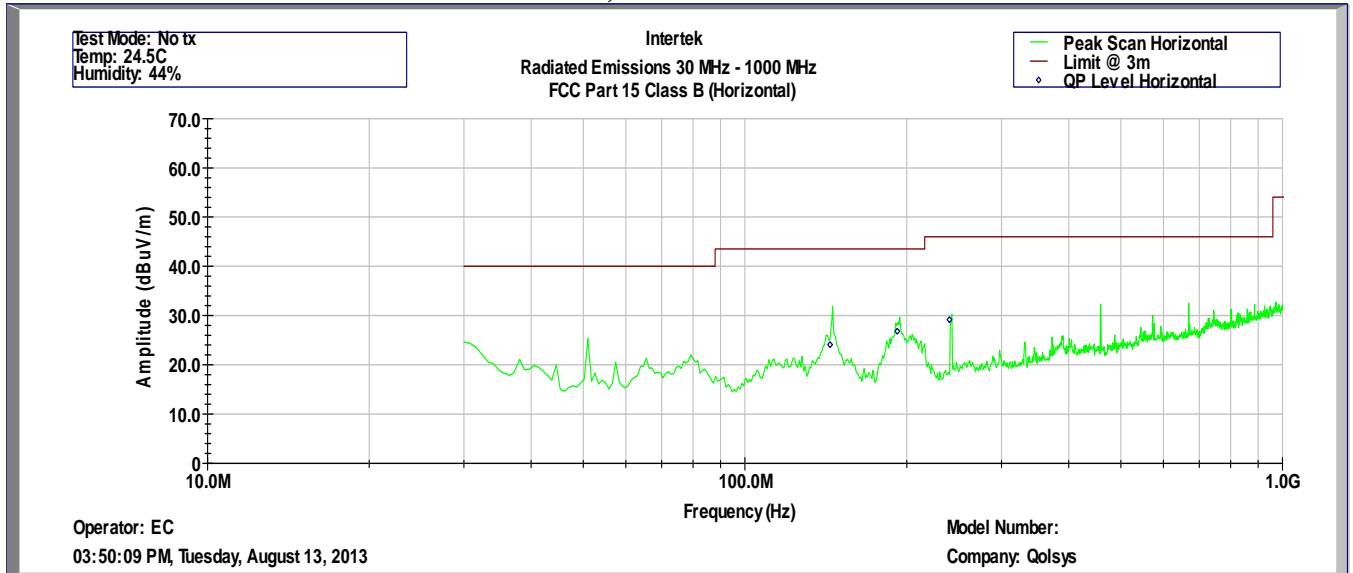

Intertek Testing Services
 Radiated Emissions 30 MHz - 1000 MHz
 FCC Part 15 Class B (QP-Horizontal)

Operator: EC
 August 13, 2013


Model Number: IQPanel-VRZ
 Company: Qolsys, Inc

Frequency	Quasi Pk FS	Limit@10m	Margin	RA	CF	AG	DCF	AF
Hz	dB(uV/m)	dB(uV/m)	dB	dB	dB	dB	dB	dB(1/m)
1.44E+08	24.1	43.5	-19.4	33.7	1.4	32	10.5	11.2
1.92E+08	26.8	43.5	-16.7	38.5	1.6	32	10.5	9.0
2.40E+08	29.1	46.0	-16.9	38.5	1.8	32	10.5	11.2

Test Mode: Digital Parts Emissions
 Temperature: 24.5 C
 Humidity : 44 %



FCC and ICES 003, Radiated Disturbance

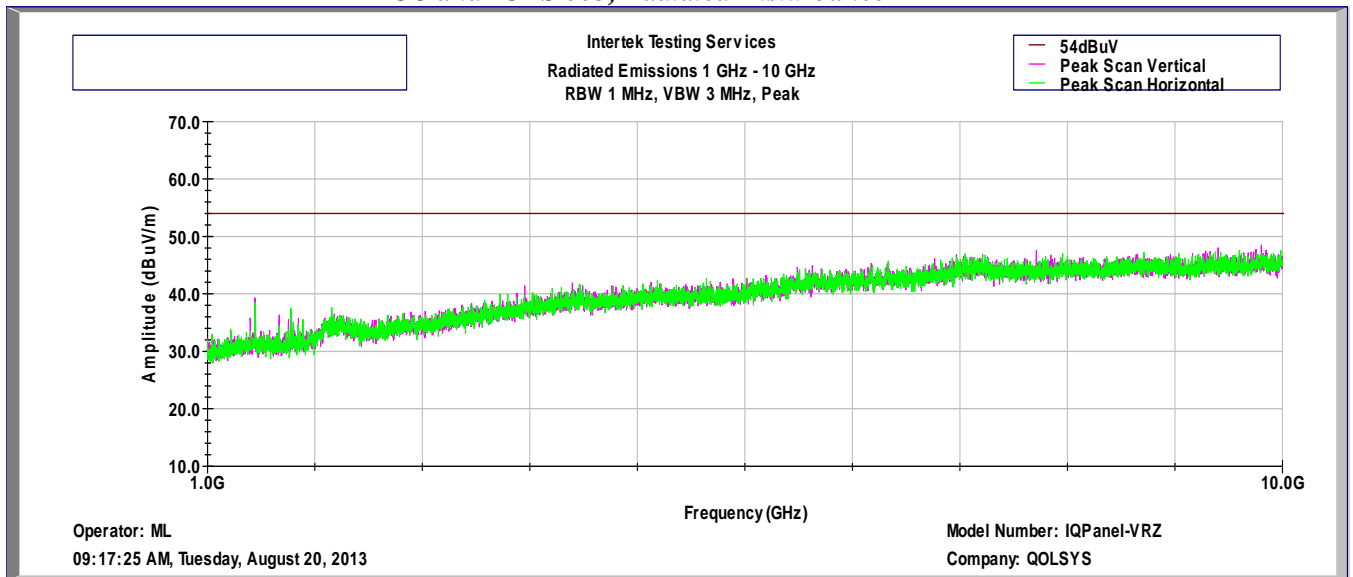

Test setup photographs

The following photographs show the testing configurations used.



Test setup photographs (Continued)



4.4 Line Conducted Emissions
 FCC Rules: 15.207; IC Rules: RSS-Gen
 FCC Rules: 15.107; IC Rules: ICES 003

Requirements

Frequency Band MHz	Class B Limit dB(μV)	
	Quasi-Peak	Average
0.15-0.50	66 to 56 *	56 to 46 *
0.50-5.00	56	46
5.00-30.00	60	50

*Note: *Decreases linearly with the logarithm of the frequency
 At the transition frequency the lower limit applies.*

Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.

Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.

Equipment setup for conducted disturbance tests followed the guidelines of ANSI C63.4.

Test Result

AC Line Conducted Emission Data, EUT in transmitting mode

Intertek

Line Conducted Emissions 150 kHz - 30 MHz

FCC Class B (Line 1)

Operator: EC

Model Number: IQPanel-VRZ

August 13, 2013

Company: QOLSYS, Inc

Frequency	Av Level	QP Level	Av Limit	QP Limit	Av Margin	QP Margin
Hz	dBuV	dBuV	dBuV	dBuV	dB	dB
158067	32.7	39.1	55.8	65.8	-23.1	-26.7
355020	35.3	47.4	50.1	60.1	-14.9	-12.7
388970	35.8	47.2	49.2	59.2	-13.4	-12.0
1.18E+06	31.4	41.3	46	56	-14.6	-14.7
1.76E+06	34.5	41.2	46	56	-11.5	-14.8
2.48E+06	28.1	38.4	46	56	-17.9	-17.6
3.01E+06	24.7	37.5	46	56	-21.3	-18.5

Test Mode: Transmitter On, 120V 60Hz

Temp.: 24.2C

Humidity: 58%

AC Line Conducted Emission Data, EUT in transmitting mode

Intertek

Line Conducted Emissions 150 kHz - 30 MHz

FCC Class B (Line 2)

Operator: EC

Model Number: IQPanel-VRZ

August 13, 2013

Company: QOLSYS, Inc

Frequency	Av Level	QP Level	Av Limit	QP Limit	Av Margin	QP Margin
Hz	dBuV	dBuV	dBuV	dBuV	dB	dB
153742	19.6	42.8	55.9	65.9	-36.3	-23.1
174983	16.7	49.2	55.3	65.3	-38.6	-16.1
202120	14	41.9	54.5	64.5	-40.5	-22.7
383170	28.4	41.7	49.3	59.3	-21	-17.7
1.17E+06	26	37.1	46	56	-20	-18.9

Test Mode: Transmitter On, 120V 60Hz

Temp.: 24.2C

Humidity: 58%

Results ■ Complies by 11.5dB
--

AC Line Conducted Emission Data, EUT in Receive mode

Intertek

Line Conducted Emissions 150 kHz - 30 MHz

FCC Class B (Line 1)

Operator: EC
August 13, 2013

Model Number: IQPanel-VRZ
Company: QOLSYS, Inc

Frequency	Av Level	QP Level	Av Limit	QP Limit	Av Margin	QP Margin
Hz	dBuV	dBuV	dBuV	dBuV	dB	dB
361720	36.2	46.2	50.0	60.0	-13.8	-13.8
525090	26.7	37.4	46.0	56.0	-19.3	-18.6
1.20E+06	28.9	38.8	46.0	56.0	-17.1	-17.2

Test Mode: Transmitter Off, 120V 60Hz

Temp.: 24.2C
Humidity: 58%

Intertek

Line Conducted Emissions 150 kHz - 30 MHz

FCC Class B (Line 2)

Operator: EC
August 13, 2013

Model Number: IQPanel-VRZ
Company: QOLSYS, Inc

Frequency	Av Level	QP Level	Av Limit	QP Limit	Av Margin	QP Margin
Hz	dBuV	dBuV	dBuV	dBuV	dB	dB
348960	30.6	43.3	50.3	60.3	-19.8	-17.0
1.20E+06	23.8	35.5	46.0	56.0	-22.2	-20.5
2.84E+06	19.7	33.1	46.0	56.0	-26.3	-22.9


Test Mode: Transmitter Off, 120V 60Hz

Temp.: 24.2C
Humidity: 58%

Results Complies by 13.8dB
--

Test setup photographs

The following photographs show the testing configurations used.

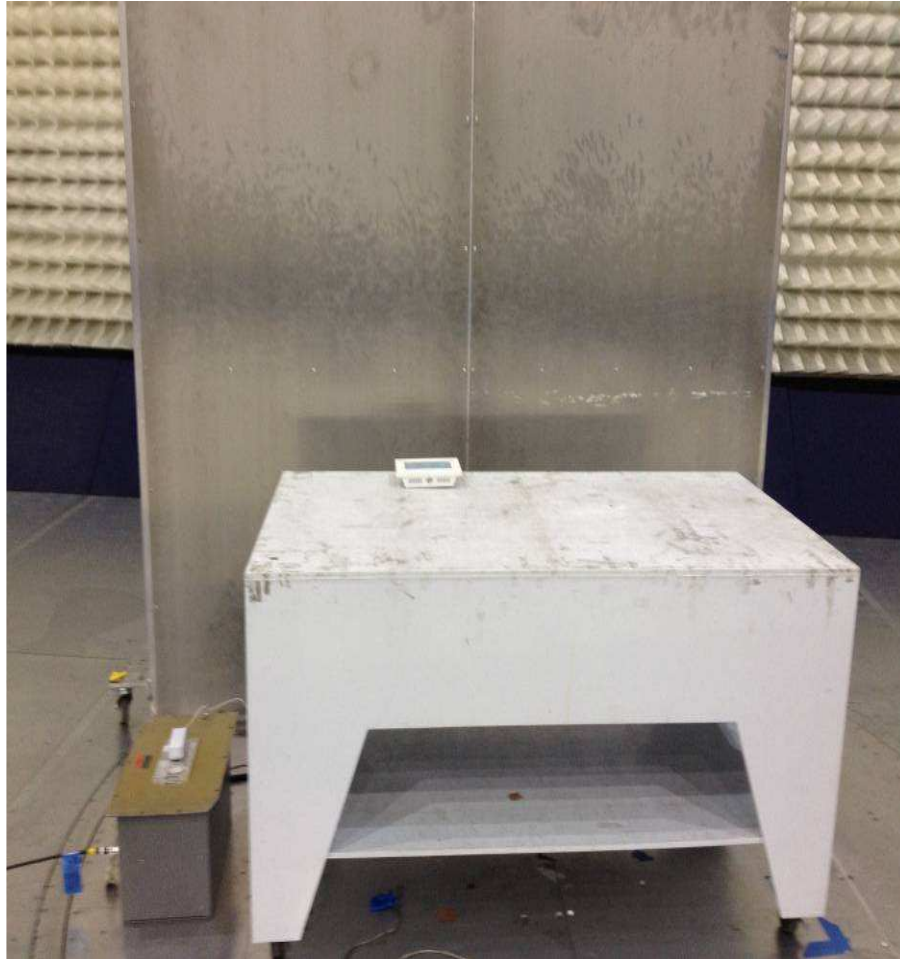

5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	03/12/14
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	03/12/14
Bilog Antenna	Teseq	CBL 6111D	31222	12	11/07/13
BI-Log Antenna	ARA	LPB-2513/A	1154	12	08/01/14
Pre-Amplifier	Sonoma Instrument	310	185634	12	12/12/13
LISN	FCC	FCC-LISN-50-50-M-H	2011	12	02/28/14
Spectrum Analyzer	Rohde and Schwartz	FSP	100030	12	11/19/13
Horn Antenna	ETS Lindgren	3115	00126795	12	11/15/13
Pre-Amplifier (1-18GHz)	Miteq	AMF-4D-001180-24-10P	799159	12	09/10/13
Spectrum Analyzer	Rohde and Schwartz	ESU	100172	12	10/05/13
Spectrum Analyzer	Rohde and Schwarz	FSU	200482	12	04/05/14

No Calibration required

6.0 Document History

Revision/ Job Number	Writer Initials	Date	Change
1.0 / 100825363	ML	August 20, 2013	Original document