
Colour: Pantone Process Black Material: CLEAR/WHITE UL approved self-adhesive Mylar type material - on a roll Lamination: Top gloss finish lamination (e.g. 1F9, or equivalent) Adhesive: Permanent adhesive backed with protective liner Cutting: Tolerance +/- 0.010" Dashed line indicates cutting - will not print Square label corners are acceptable. **NOTES:**

18011377R001 IQ Keypad Prox-PG Multi-Listing Label 915MHz FCC/IC

June 9, 2023

| — | M/N: IQ Keypad Prox-PG RES FIRE, RES/COM BURGLARY ALARM KEYPA | |
|---|---|------|
| | FCC ID:2AAJXQS-IQKP IC: 11205A-QSIQKP; CAN RSS-Gen/CNR-Gen CAN ICES-3(B)/NMB-3(B) | 8 mm |
| _ | 80 mm | _ |
| | | |


"XXXXX YYY" IS PLACEHOLDER ONLY. Please replace "XXXXX" with the country of origin and "YYY" with the UL factory ID (if applicable) before printing. Delete the "YYY" if there is no UL factory ID.



- 2. Markings on label must be PERMANENT.
- 3. Indelible Ink.
- 4. Conductive inks may not be used.
- 5. Non-conductive label adhesive shall be used ONLY.

NOTES:

- 1. All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.USA@us.ul.com, fax: (847)509-6201] for approval.
- 2. All UL and ULC Labels shall be printed by a UL Listed printing facility.

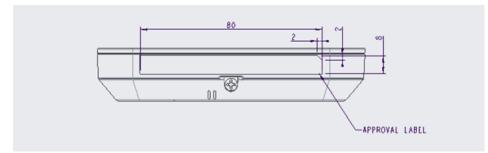

Ρ

Top of the unit shows the label location (actual size)