Colour: Pantone Process Black
Material:
CLEAR/WHITE UL approved self-adhesive Mylar type
material - on a roll
Lamination: Top gloss finish lamination
(e.g. 1F9, or equivalent)
Adhesive: Permanent adhesive backed with protective
liner
Cutting: Tolerance +/- 0.010″
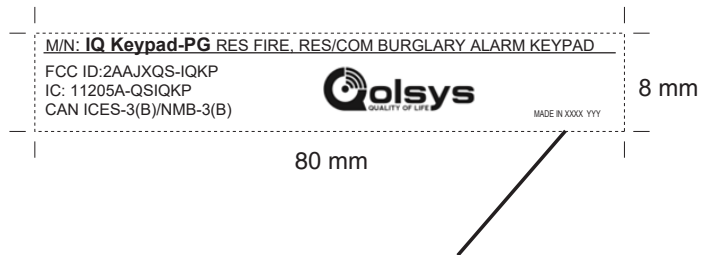Dashed line indicates cutting - will not print
Square label corners are acceptable.
**NOTES:**

1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.
4. Conductive inks may not be used.
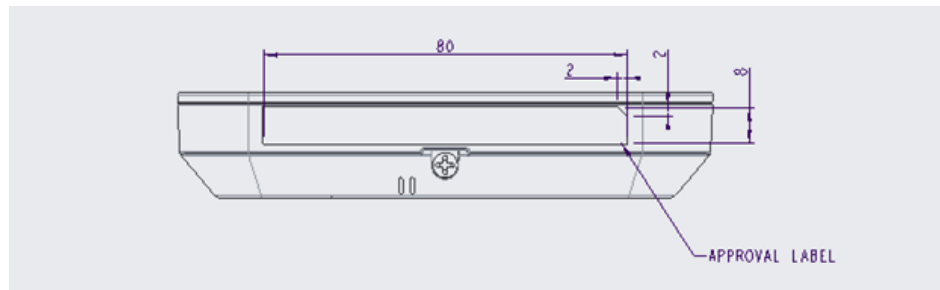5. Non-conductive label adhesive shall be used ONLY.

**NOTES:**
1. **All UL and ULC Labels shall be printed on UL**
   **approved material. The first time the label is**
   **ordered, the artwork must be sent to UL Label**
   **Center [email: LabelCenter.USA@us.ul.com, fax:**
   **(847)509-6201] for approval.**
2. **All UL and ULC Labels shall be printed by a UL**
   **Listed printing facility.**

| |
|---|
| M/N: **IQ Keypad-PG** RES FIRE, RES/COM BURGLARY ALARM KEYPAD |
| FCC ID:2AAJXQS-IQKP |
| IC: 11205A-QSIQKP     **Qolsys** |
| CAN ICES-3(B)/NMB-3(B)                        MADE IN XXXX YYY |

8 mm

80 mm

*"XXXXX  YYY" IS PLACEHOLDER ONLY.*
*Please replace "XXXXX" with the country of origin and*
*"YYY" with the UL factory ID (if applicable) before*
*printing. Delete the "YYY" if there is no UL factory ID.*

P



Top of the unit shows the label location (actual size)