

## TEST REPORT

Report Number: 102374971MPK-007

Project Number: G102374971

March 29, 2016

Testing performed on the  
IQ Panel 2 Home Security Panel  
Models: IQPANEL2, IQPANEL2-ZW, IQPANEL2-ZB, IQPANEL2-ZZ  
FCC ID: 2AAJXQS-IQPANEL2  
IC: 11205A-QSIQPANEL

to  
FCC Part 15, Subpart E  
RSS-247 Issue 1

For

Qolsys, Inc.

Test Performed by:  
Intertek  
1365 Adams Court  
Menlo Park, CA 94025 USA

Test Authorized by:  
Qolsys, Inc.  
1900 The Alameda #420  
San Jose, CA 95126 USA

Prepared by:



Anderson Soungpanya

Date: March 29, 2016

Reviewed by:



Krishna K Vemuri

Date: March 29, 2016

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.*

**VERIFICATION OF COMPLIANCE**  
**Report No. 102374971MPK-007**

Verification is hereby issued to the named APPLICANT and is VALID ONLY for the equipment identified hereon for use under the rules and regulations listed below.

|                               |  |
|-------------------------------|--|
| <b>Equipment Under Test:</b>  | IQ Panel 2 Home Security Panel                     |
| <b>Trade Name:</b>            | Qolsys, Inc.                                       |
| <b>Model No.:</b>             | IQPANEL2, IQPANEL2-ZW,<br>IQPANEL2-ZB, IQPANEL2-ZZ |
| <b>Serial No.:</b>            | QV903154300142AA &<br>QV903154300152AA             |
| <b>Applicant:</b>             | Qolsys, Inc.                                       |
| <b>Contact:</b>               | Mark Skeen   |
| <b>Address:</b>               | 1900 The Alameda #420<br>San Jose, CA 95126        |
| <b>Country</b>                | USA  |
| <b>Tel. Number:</b>           | (408) 857-8415                                     |
| <b>Email:</b>                 | Mark.Skeen@qolsys.com                              |
| <b>Applicable Regulation:</b> | FCC Part 15, Subpart E<br>RSS-247 Issue 1          |
| <b>Date of Test:</b>          | February 12 -26, 2016                              |

*We attest to the accuracy of this report:*



Anderson Soungpanya  
EMC Project Engineer



Krishna K Vemuri  
EMC Engineering Team Lead

## TABLE OF CONTENTS

|            |   |           |
|------------|---|-----------|
| <b>1.0</b> | <b>Introduction.....</b>  | <b>5</b>  |
| 1.1        | Summary of Tests .....  | 5         |
| <b>2.0</b> | <b>General Description .....</b>                                      | <b>6</b>  |
| 2.1        | Product Description .....   | 6         |
| 2.2        | Related Submittal(s) Grants .....                                     | 7         |
| 2.3        | Test Methodology .....  | 7         |
| 2.4        | Test Facility.....  | 7         |
| 2.5        | Measurement Uncertainty .....   | 7         |
| <b>3.0</b> | <b>System Test Configuration.....</b>                                 | <b>8</b>  |
| 3.1        | Support Equipment and description.....                                | 8         |
| 3.2        | Block Diagram of Test Setup.....                                      | 8         |
| 3.3        | Justification.....  | 9         |
| 3.4        | Mode of Operation During Test.....                                    | 10        |
| 3.5        | Modifications required for Compliance.....                            | 10        |
| 3.6        | Additions, deviations and exclusions from standards.....              | 10        |
| <b>4.0</b> | <b>Measurement Results.....</b>                                       | <b>11</b> |
| 4.1        | Emission Bandwidth and 99% Occupied Bandwidth .....                   | 11        |
| 4.1.1      | Procedure .....   | 11        |
| 4.1.2      | Test Result .....   | 12        |
| 4.2        | Maximum Conducted Output Power .....                                  | 22        |
| 4.2.1      | Requirement.....  | 22        |
| 4.2.2      | Procedure .....   | 22        |
| 4.2.3      | Test Results.....   | 23        |
| 4.3        | Peak Power Spectral Density .....                                     | 33        |
| 4.3.1      | Requirement.....  | 33        |
| 4.3.2      | Procedure .....   | 33        |
| 4.3.3      | Test Result .....   | 34        |
| 4.4        | Frequency stability .....   | 35        |
| 4.4.1      | Requirement.....  | 35        |
| 4.4.2      | Procedure .....   | 35        |
| 4.4.3      | Result .....  | 36        |
| 4.5        | Transmitter Radiated Emissions .....                                  | 37        |
| 4.5.1      | Requirement.....  | 37        |
| 4.5.2      | Procedure .....   | 38        |
| 4.5.3      | Field Strength Calculation .....                                      | 39        |
| 4.5.4      | Antenna-port conducted measurements .....                             | 40        |
| 4.5.6      | General Procedure for conducted measurements in restricted bands..... | 40        |

|            |                               |           |
|------------|-------------------------------|-----------|
| 4.5.7      | Test Results.....             | 40        |
| 4.5.8      | Test setup photographs .....  | 63        |
| <b>6.0</b> | <b>Document History .....</b> | <b>66</b> |

**1.0 Introduction**

1.1 Summary of Tests

| Test   | Reference FCC                    | Reference RSS-247 | Result   |
|--|----------------------------------|-------------------|--|
| 26 dB Emission Band width and 99% Occupied Bandwidth | 15.407(a)(1)(2)(3)               | RSS-247, 6.2.1    | Complies   |
| Conducted Output Power                               | 15.407(a)(1)(2)(3)               | RSS-247, 6.2.1    | Complies   |
| Peak Power Spectral Density                          | 15.407(a)(1)(2)(3)               | RSS-247, 6.2.1    | Complies   |
| Undesirable Emissions                                | 15.407(b)(1-8)                   | RSS-247, 6.2.1    | Complies   |
| Transmitter Radiated Emissions                       | 15.407(b)(1-8)<br>15.209, 15.205 | RSS-247, 6.2.1    | Complies   |
| Frequency stability                                  | 15.407(g)                        | RSS-Gen           | Complies   |
| Antenna Requirement                                  | 15.203                           | RSS-Gen           | Complies. The EUT uses internal antenna and a unique connector |

**EUT receive date:** January 18, 2016

**EUT receive condition:** The pre-production version of the EUT was received in good condition with no apparent damage. As declared by the Applicant, it is identical to the production units.

**Test start date:** February 12, 2016

**Test completion date:** February 26, 2016

The test results in this report pertain only to the item tested.

## 2.0 General Description

### 2.1 Product Description

Qolsys, Inc. supplied the following description of the EUT:

As described by the manufacturer, the EUT is a home security panel with cellular and WiFi/BT connection to the cloud, as well as specific radios for security sensors and automation.

This test report covers only the WiFi radio.

The information about the 5GHz radio, installed in the IQ Panel 2 Home Security Panel, is presented below.

|  |  |
|--|--|
| <b>Applicant</b>                       | Qolsys, Inc.   |
| <b>Model No.</b>                       | QS9201-1230-840  |
| <b>FCC Identifier</b>                  | 2AAJXQS-IQPANEL2   |
| <b>IC Identifier</b>                   | 11205A-QSIQPANEL2  |
| <b>Use of Product</b>                  | WIFI Client (Client without radar detection)                       |
| <b>Rated RF Output</b>                 | 18.25 dBm for 5180~5240 MHz  |
| <b>Frequency Range</b>                 | U-NII 1: 5150 – 5250 MHz   |
| <b>Type of modulation</b>              | OFDM   |
| <b>Antenna(s) &amp; Gain</b>           | Internal Antenna, 1.2dBi peak gain                                 |
| <b>Manufacturer Name &amp; Address</b> | Qolsys, Inc.<br>1900 The Alameda #420<br>San Jose, CA 95126<br>USA |

The EUT supports the following configurations:

| Channels in 5150 – 5250 MHz band |                |                             |   |                           |   |                         |   |
|----------------------------------|----------------|-----------------------------|---|---------------------------|---|-------------------------|---|
| Number                           | Frequency, MHz | 802.11a/n/ac 20MHz Channels |   | 802.11n/ac 40MHz Channels |   | 802.11ac 80MHz Channels |   |
| 36                               | 5180           | √                           | X |                           |   |                         |   |
| 38                               | 5190           |                             |   | √                         | X |                         |   |
| 40                               | 5200           | √                           | X |                           |   |                         |   |
| 42                               | 5210           |                             |   |                           |   | √                       | X |
| 44                               | 5220           | √                           |   |                           |   |                         |   |
| 46                               | 5230           |                             |   | √                         | X |                         |   |
| 48                               | 5240           | √                           | X |                           |   |                         |   |

List of channels:

√ - available

X - tested

## 2.2 Related Submittal(s) Grants

None.

## 2.3 Test Methodology

Antenna conducted measurements were performed according to the FCC documents “Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E” (789033 D02 General U-NII Test Procedures New Rules).

Both AC mains line-conducted and radiated emissions measurements were performed according to the procedures in ANSI C63.4. Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application.

All other measurements were made in accordance with the procedures in part 2 of CFR 47.

## 2.4 Test Facility

The test site used to collect the radiated data is site 1 (10-m semi-anechoic chamber). This test facility and site measurement data have been fully placed on file with the FCC, IC and A2LA accredited.

## 2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn't take into account the measurement uncertainty.

Estimated Measurement Uncertainty

| Measurement                                    | Expanded Uncertainty (k=2) |               |         |
|--|----------------------------|---------------|---------|
|  | 0.15 MHz – 1 GHz           | 1 GHz – 6 GHz | > 6 GHz |
| RF Power and Power Density – antenna conducted | 1.1 dB                     | 1.5 dB        | –       |
| Unwanted emissions - antenna conducted         | 1.2 dB                     | 1.7 dB        | 2.0 dB  |
| Bandwidth – antenna conducted                  | 50 Hz                      | 100 Hz        | –       |
| Radiated emissions                             | 4.2 dB                     | 5.4 dB        |         |
| AC mains conducted emissions                   | 2.4 dB                     | -             | -       |


### 3.0 System Test Configuration

#### 3.1 Support Equipment and description

| Description | Manufacturer | Model No./ Part No. |
|-------------|--------------|---------------------|
| Laptop      | Dell         | Inspiron 14         |

#### 3.2 Block Diagram of Test Setup

Antenna was removed and co-axial connector with a cable was installed for Conducted Measurements.  
500hm Load was used for Radiated Measurements.

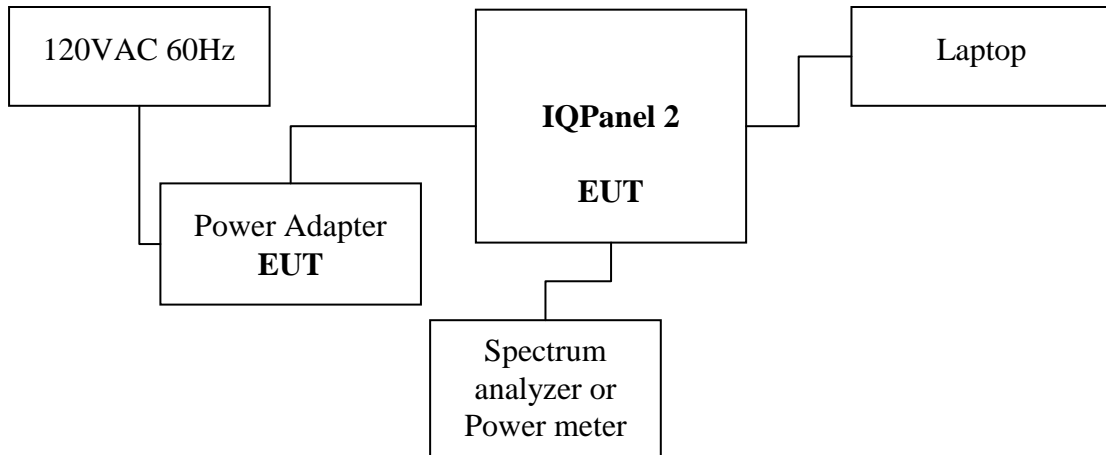

Note: Power Adapter: Manufacturer: Sure Power; Model: SW-050200A

|                       |                         |
|-----------------------|-------------------------|
| <b>S</b> = Shielded   | <b>F</b> = With Ferrite |
| <b>U</b> = Unshielded | <b>m</b> = Meter        |



### 3.3 Justification

Preliminary testing was performed for all modulation/data rate modes. The following modes, in which the highest power was detected, were selected for final measurements:

OFDM, 6MB/s – for 802.11a  
OFDM, MCS0 – for 802.11n/ac 20MHz  
OFDM, MCS0 – for 802.11n/ac 40MHz  
OFDM, MCS0 – for 802.11ac 80MHz

The difference between the models: IQPANEL2, IQPANEL2-ZW, IQPANEL2-ZB, IQPANEL2-ZZ are as below:

Model: IQPANEL2: Home Security Panel consists of WiFi/BT/LTE radios and SRF receiver.

Model: IQPANEL2-ZW: model: IQPANEL2 with approved module having FCC ID: 2AAJXQS-ZWAVE and IC: 11205A-QSZWAVE.

Model: IQPANEL2-ZB: model: IQPANEL2 with approved module having FCC ID: 2AAJXQS-IS and IC: 11205A-QSIS.

Model: IQPANEL2-ZZ: model: IQPANEL2 with approved modules having FCC ID: 2AAJXQS-IS, FCC ID: 2AAJXQS-ZWAVE, IC: 11205A-QSIS and IC: 11205A-QSZWAVE.

All tests were performed on the fully populated Model: IQPANEL2-ZZ. The results in this report are valid for the other models IQPANEL2, IQPANEL2-ZW and IQPANEL2-ZB as well.

### 3.4 Mode of Operation During Test

During transmitter testing, the transmitter was setup to transmit continuously at maximum RF power on low, middle and high channels.

| Frequency (MHz) | Channel | 802.11a | 802.11n<br>20 MHz | 802.11n<br>40 MHz | 802.11ac<br>80 MHz |
|-----------------|---------|---------|-------------------|-------------------|--------------------|
| 5180            | 36      | 18      | 18                | -                 | -                  |
| 5190            | 38      | -       | -                 | 16                | -                  |
| 5200            | 40      | 19      | 19                | -                 | -                  |
| 5210            | 42      | -       | -                 | -                 | 14                 |
| 5230            | 46      | -       | -                 | 17                | -                  |
| 5240            | 48      | 18      | 18                | -                 | -                  |

### 3.5 Modifications required for Compliance

Intertek installed no modifications during compliance testing in order to bring the product into compliance.

### 3.6 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.

#### 4.0 Measurement Results

##### 4.1 Emission Bandwidth and 99% Occupied Bandwidth

15.407(a)(1)(2)

##### 4.1.1 Procedure

The Procedure, described in the FCC Publication 789033 D02 General U-NII Test Procedures was used. Specifically Section C for Emission Bandwidth and Minimum Emission Bandwidth for the band 5.725-5.850 GHz. Section D was used for 99% Occupied Bandwidth.

The antenna port of the EUT was connected to the input of a spectrum analyzer (SA). For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier.

The Occupied bandwidth was measured using the build-in spectrum analyzer facility for 99% power bandwidth measurement.

|                   |                          |
|-------------------|--------------------------|
| <b>Tested By:</b> | Anderson Soungpanya      |
| <b>Test Date:</b> | February 18 and 23, 2016 |


#### 4.1.2 Test Result

Refer to the following plots for the test result:

| <b>Mode</b>       | <b>Channel</b> | <b>Frequency,<br/>MHz</b> | <b>26-dB<br/>Bandwidth,<br/>MHz</b> | <b>Occupied<br/>Bandwidth,<br/>MHz</b> | <b>Plot #</b> |
|-------------------|----------------|---------------------------|-------------------------------------|--|---------------|
| 802.11a           | 36             | 5180                      | 22.62                               | 17.35                                  | 1.1           |
|                   | 40             | 5200                      | 22.21                               | 17.27                                  | 1.2           |
|                   | 48             | 5240                      | 22.57                               | 17.25                                  | 1.3           |
| 802.11n<br>20MHz  | 36             | 5180                      | 23.67                               | 18.23                                  | 1.4           |
|                   | 40             | 5200                      | 22.71                               | 18.17                                  | 1.5           |
|                   | 48             | 5240                      | 22.70                               | 18.19                                  | 1.6           |
| 802.11n<br>40MHz  | 38             | 5190                      | 44.29                               | 36.36                                  | 1.7           |
|                   | 46             | 5230                      | 43.72                               | 36.36                                  | 1.8           |
| 802.11ac<br>80MHz | 42             | 5210                      | 84.87                               | 74.76                                  | 1.9           |


**Plot 1.1**

**802.11a 5180MHz**

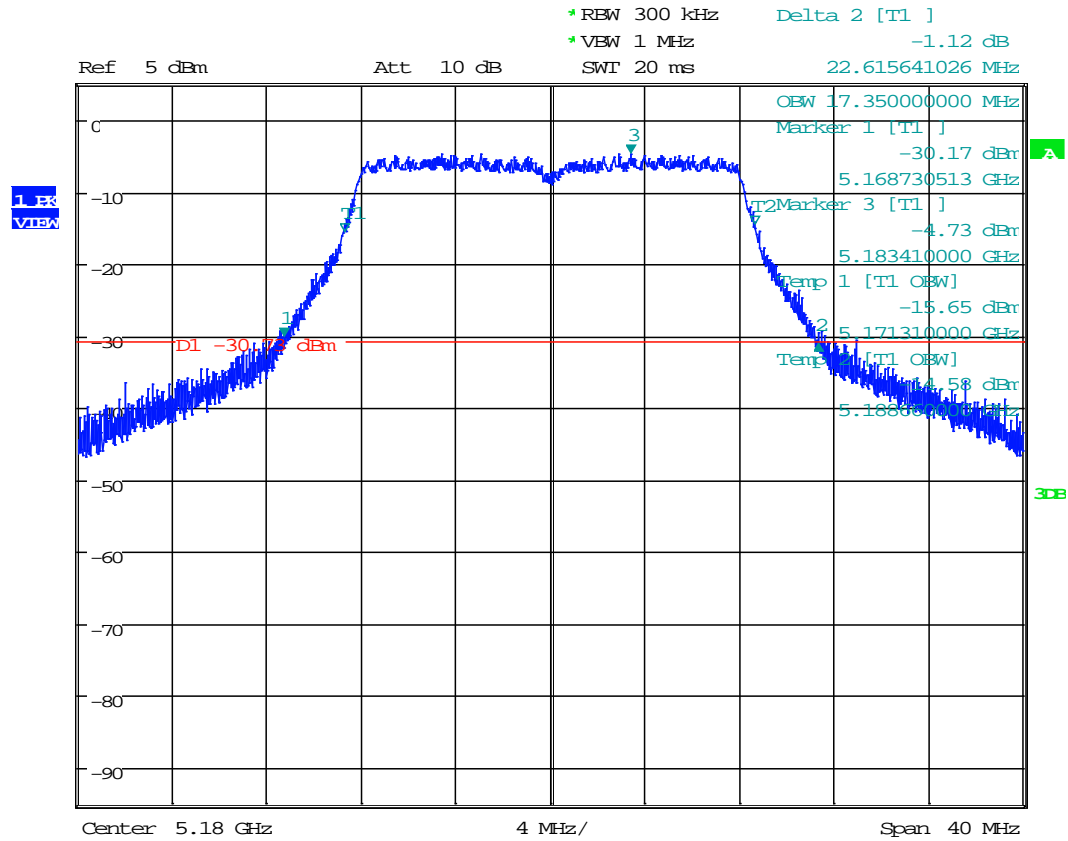

Date: 18.FEB.2016 01:18:16


**Plot 1.2**  
**802.11a 5200MHz**

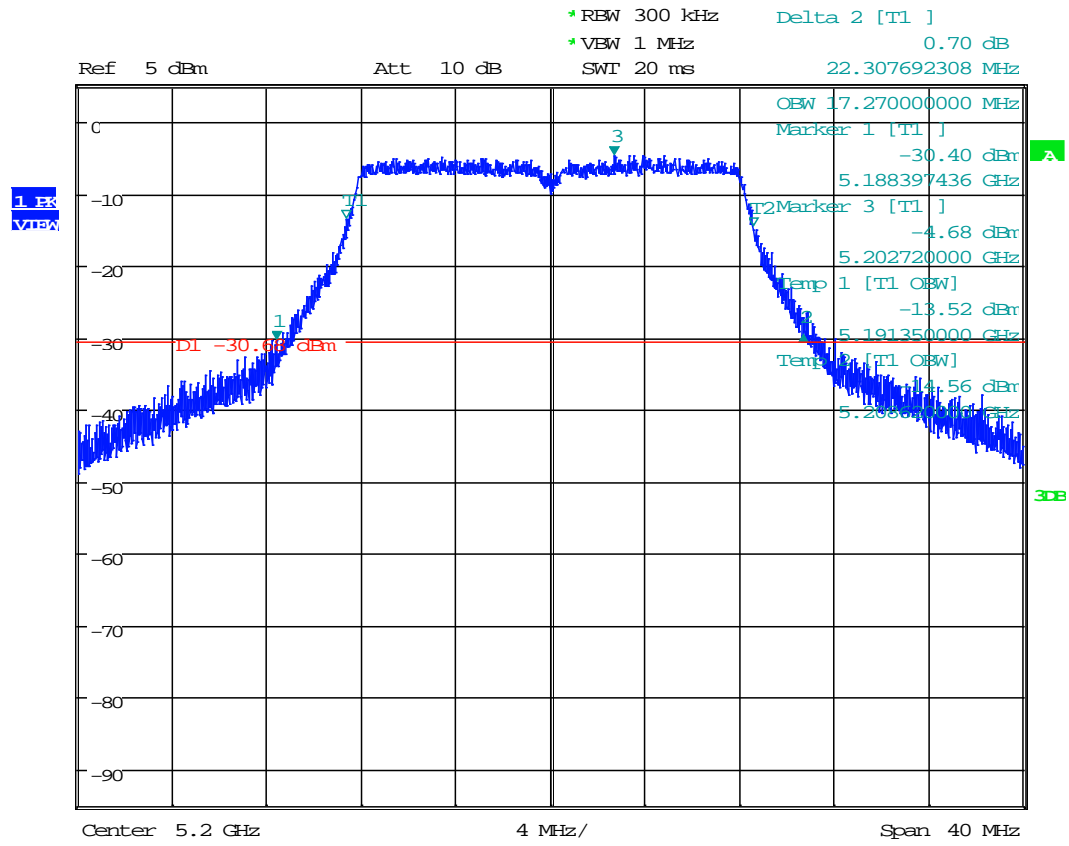

Date: 18.FEB.2016 01:24:23



### Plot 1.3 802.11a 5240MHz

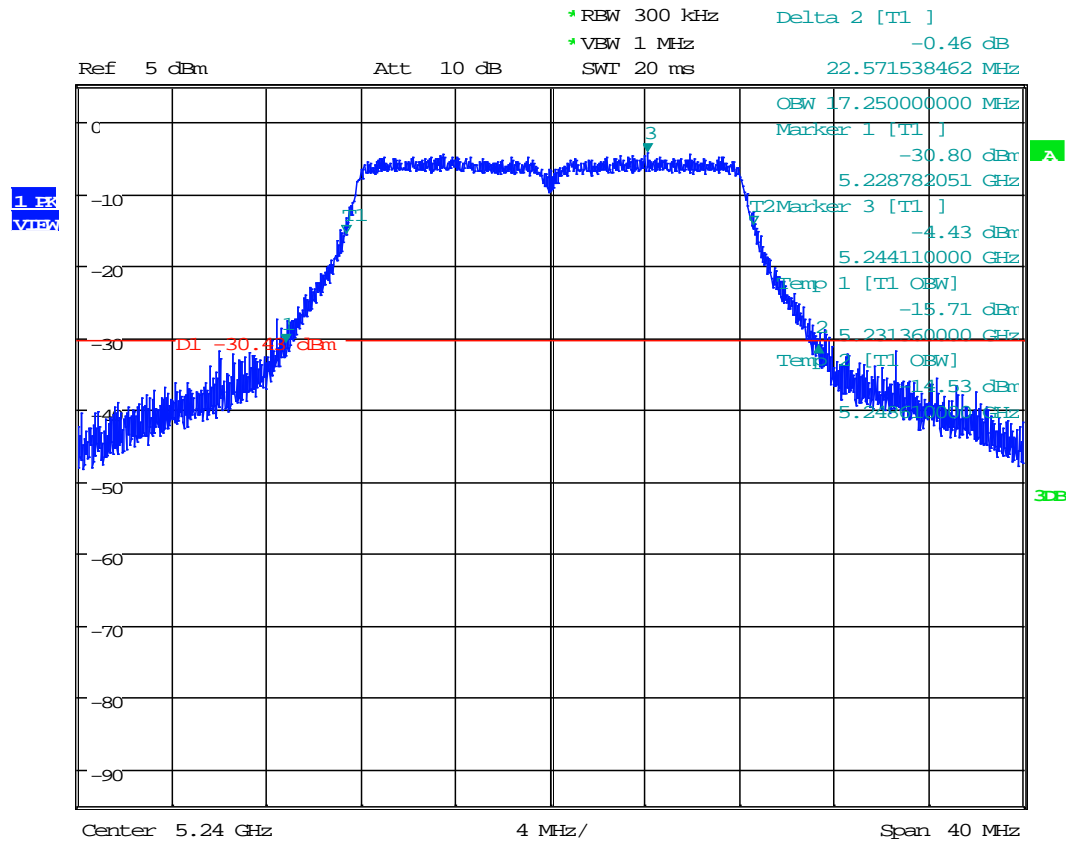


Date: 18.FEB.2016 01:26:17






**Plot 1.5**  
**802.11n 20MHz, 5200MHz**

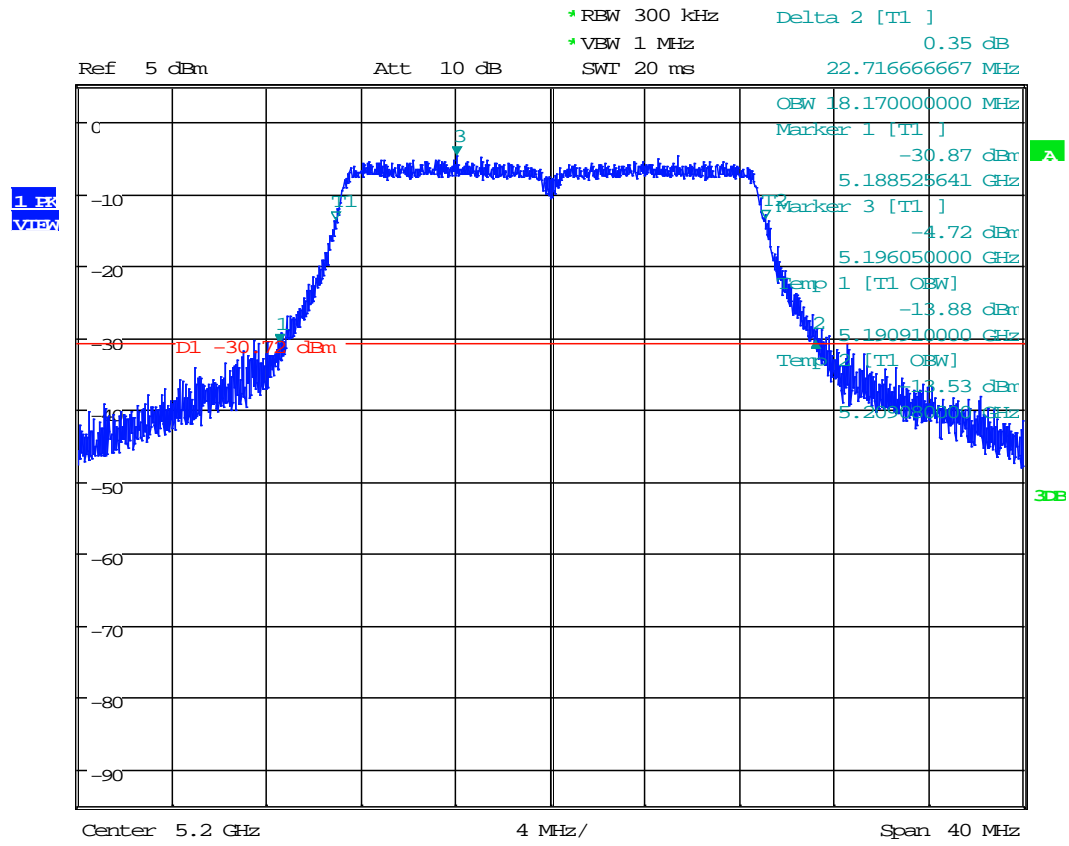


Date: 18.FEB.2016 01:43:17

**Plot 1.6**  
**802.11n 20MHz, 5240MHz**

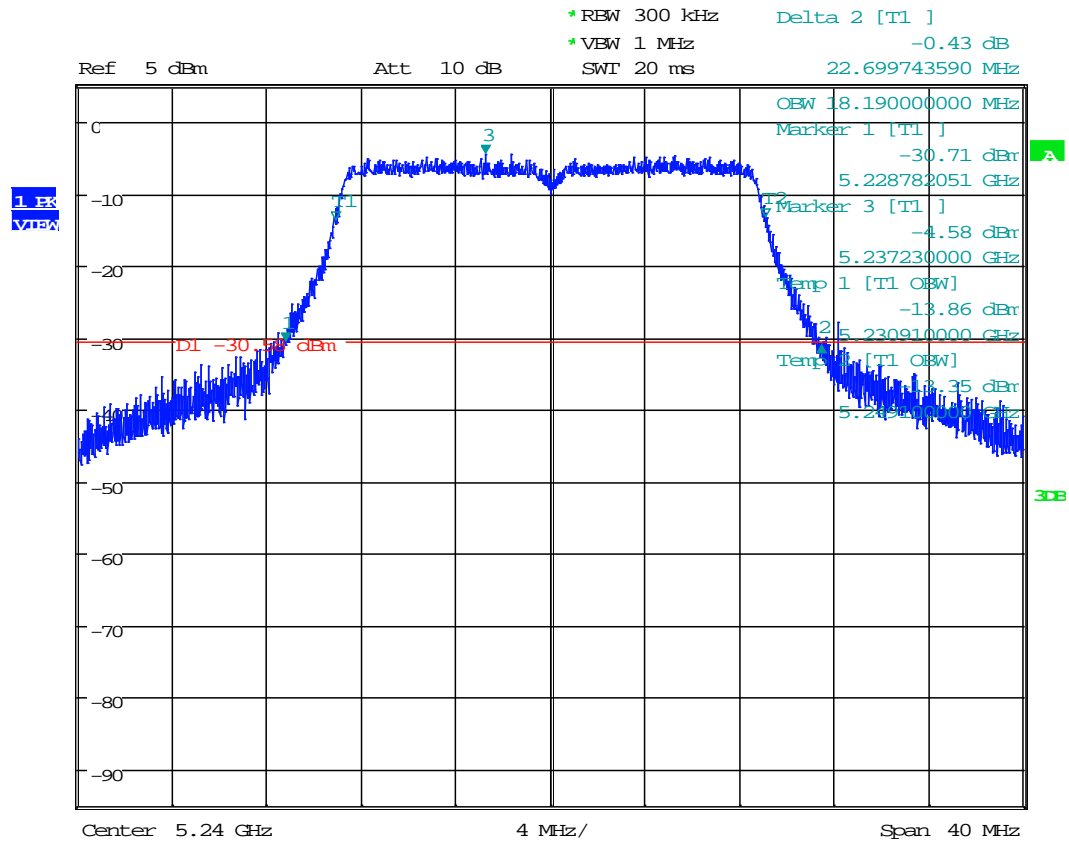


Date: 18.FEB.2016 01:28:26

**Plot 1.7**  
**802.11n 40MHz, 5190MHz**

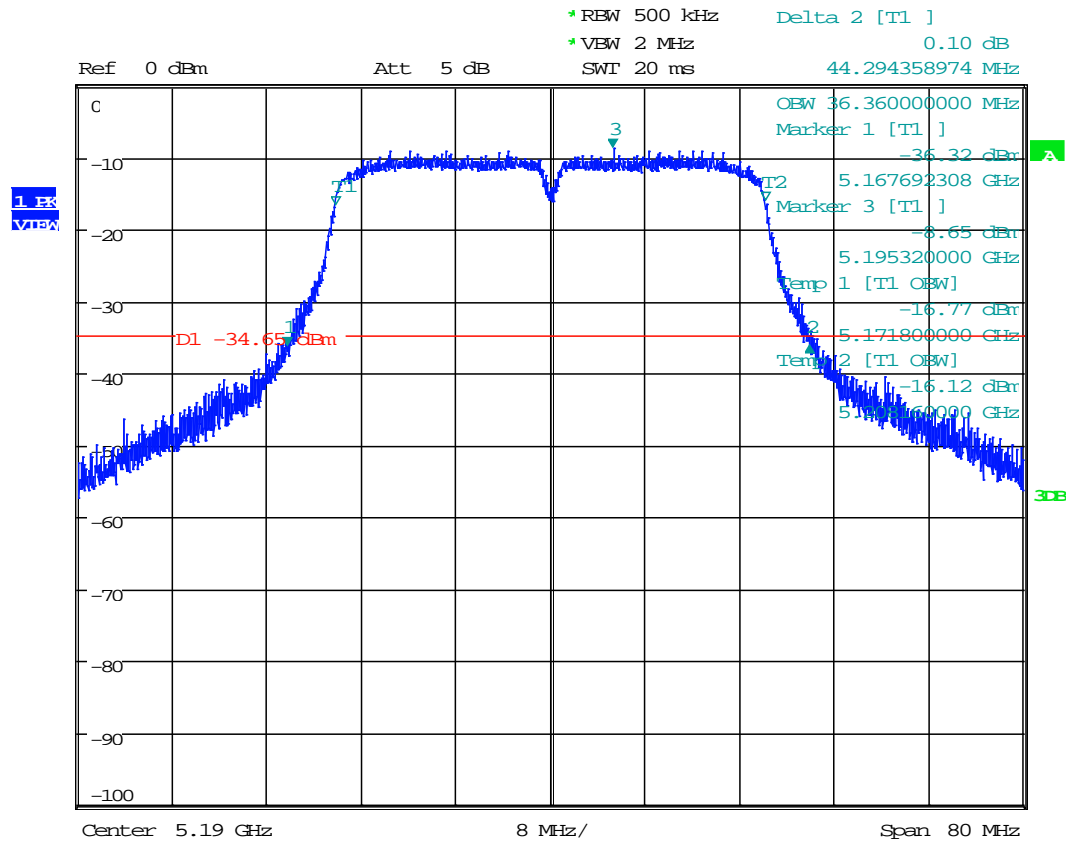

Date: 21.FEB.2016 01:06:57


**Plot 1.8**  
**802.11n 40MHz, 5230MHz**

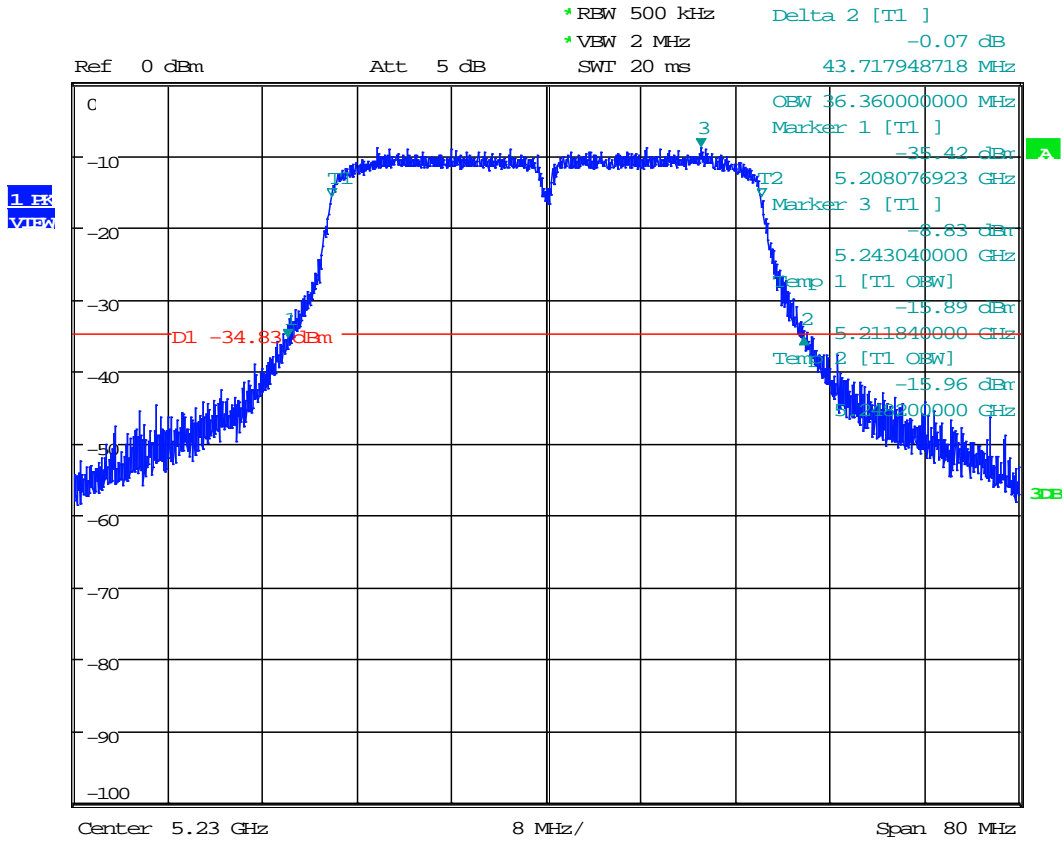

Date: 21.FEB.2016 01:12:58



### Plot 1.9 802.11ac 80MHz, 5210MHz

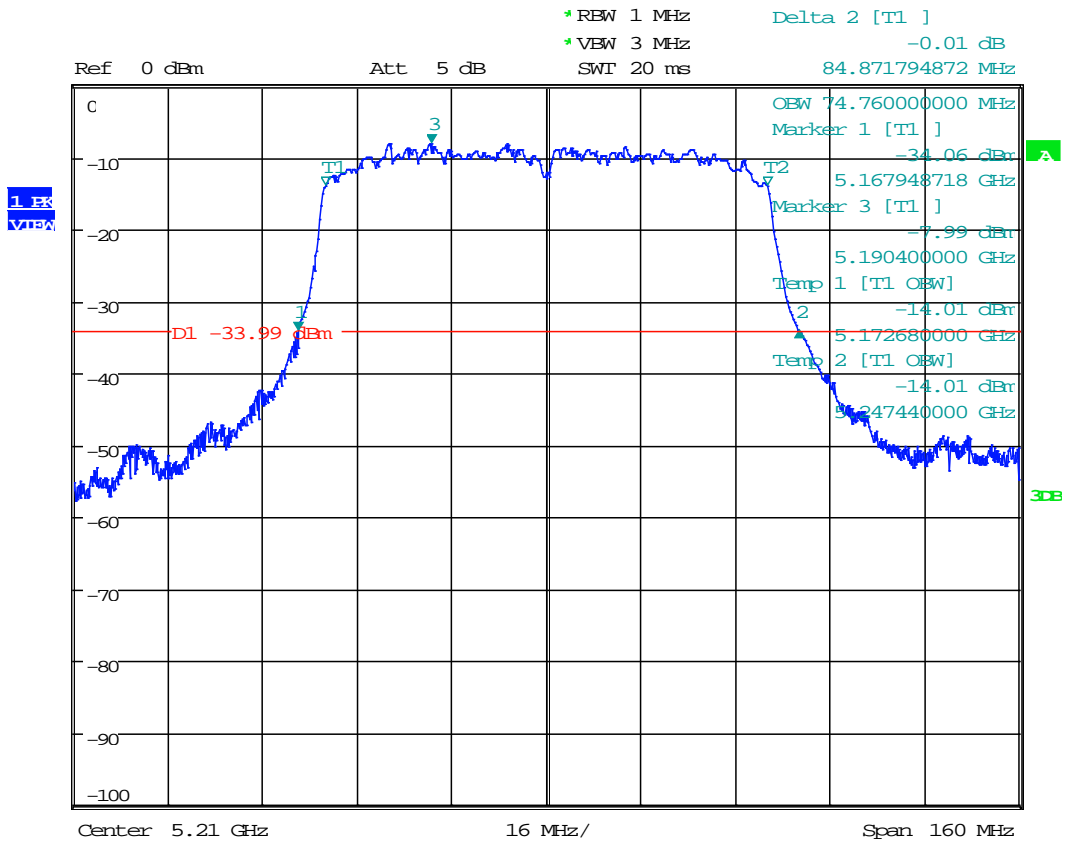

Date: 21.FEB.2016 01:33:34

4.2 Maximum Conducted Output Power  
FCC Rule 15.407(a)(1)(iv)

4.2.1 Requirement

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2.2 Procedure

The Procedure, described in the FCC Publication 789033 D02 General U-NII Test Procedures New Rules, was used. Specifically Section E (2) (b) Method SA-1 for Maximum Conducted Output Power.

The antenna port output of the EUT was connected to the input of a spectrum analyzer to measure the Maximum Conducted Transmitter Output Power.


|                   |                      |
|-------------------|----------------------|
| <b>Tested By:</b> | Anderson Soungpanya  |
| <b>Test Date:</b> | February 22-23, 2016 |

#### 4.2.3 Test Results

Refer to the following plots for the test result:

| <b>Mode</b>       | <b>Channel</b> | <b>Frequency, MHz</b> | <b>Conducted power (average) dBm</b> | <b>Conducted power Limit dBm</b> | <b>Plot #</b> |
|-------------------|----------------|-----------------------|--------------------------------------|----------------------------------|---------------|
| 802.11a           | 36             | 5180                  | 16.58                                | 24                               | 2.1           |
|                   | 40             | 5200                  | 17.91                                | 24                               | 2.2           |
|                   | 48             | 5240                  | 18.25                                | 24                               | 2.3           |
| 802.11n<br>20MHz  | 36             | 5180                  | 16.6                                 | 24                               | 2.4           |
|                   | 40             | 5200                  | 17.93                                | 24                               | 2.5           |
|                   | 48             | 5240                  | 18.24                                | 24                               | 2.6           |
| 802.11n<br>40MHz  | 38             | 5190                  | 12.95                                | 24                               | 2.7           |
|                   | 46             | 5230                  | 14.32                                | 24                               | 2.8           |
| 802.11ac<br>80MHz | 42             | 5210                  | 11.20                                | 24                               | 2.9           |

**Plot 2.1**  
**802.11a, 5180MHz**

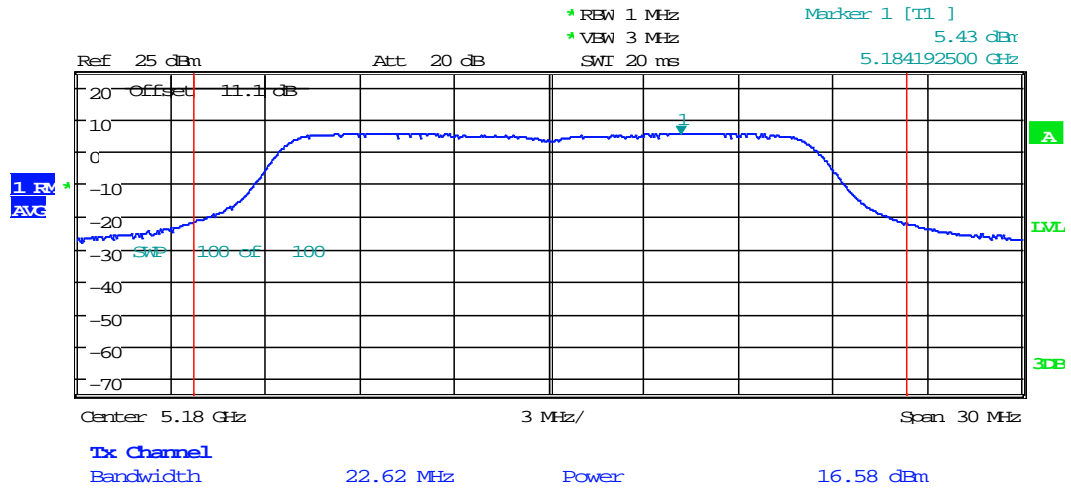


Date: 22.FEB.2016 10:43:00






### Plot 2.2 802.11a, 5200MHz

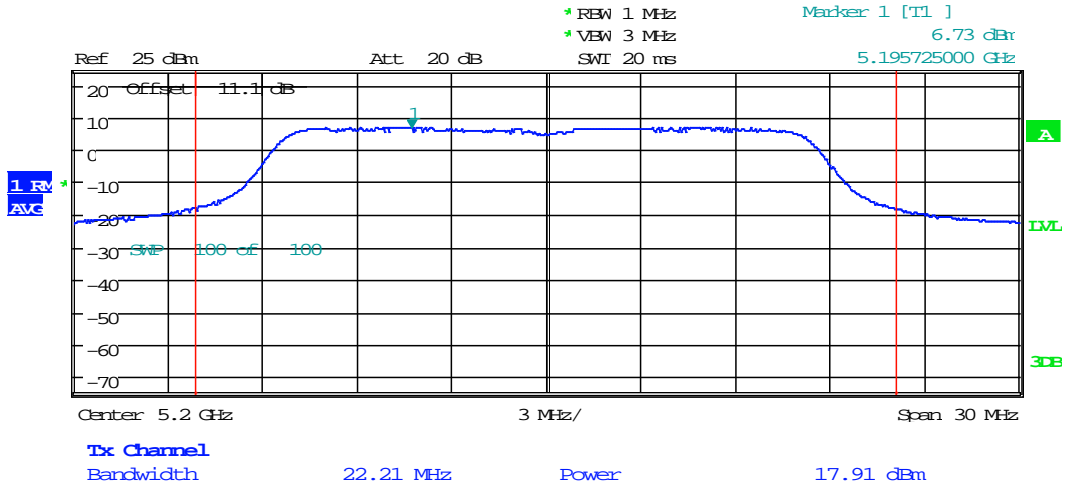

Date: 22.FEB.2016 10:47:10


**Plot 2.3**  
**802.11a, 5240MHz**

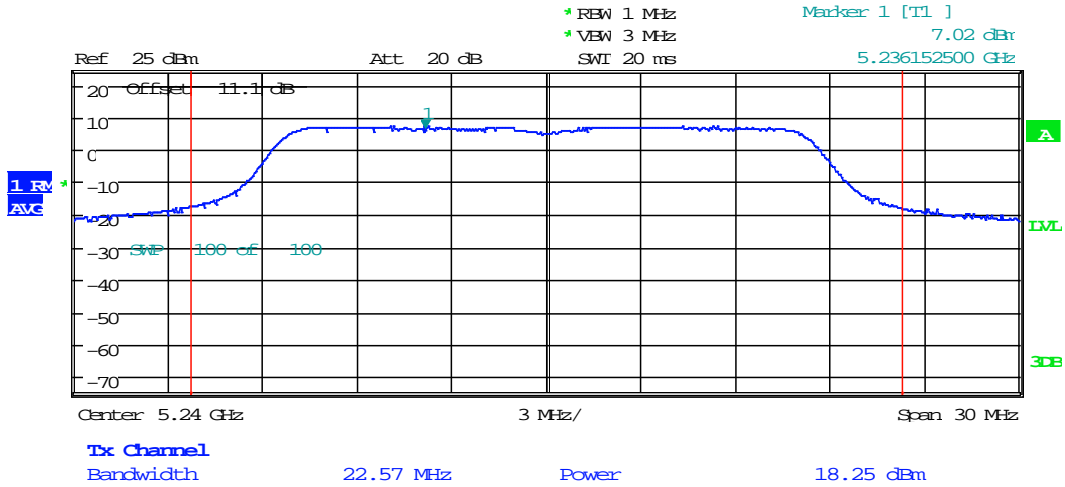

Date: 22.FEB.2016 10:49:30




### Plot 2.4 802.11n 20MHz, 5180MHz

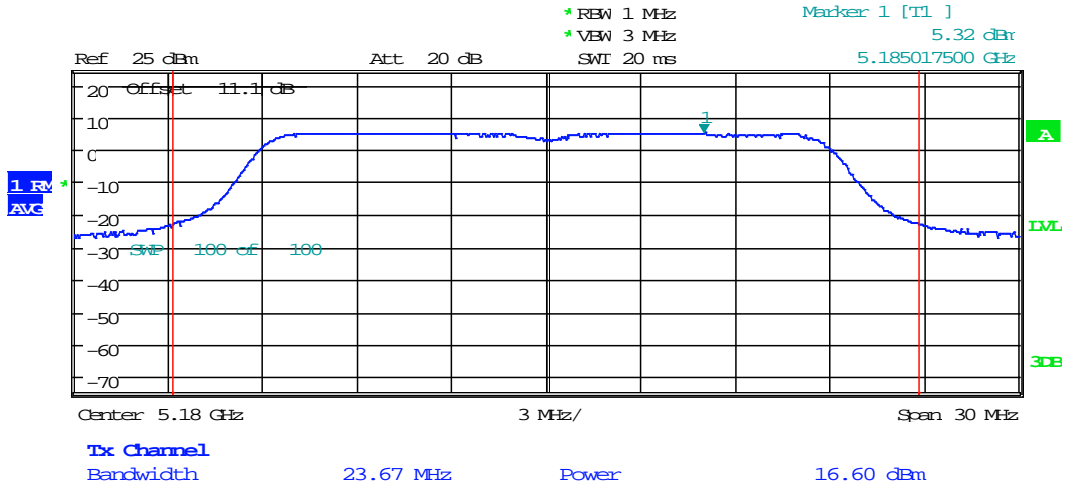

Date: 22.FEB.2016 10:44:05


**Plot 2.5**  
**H802.11n 20MHz, 5200MHz**

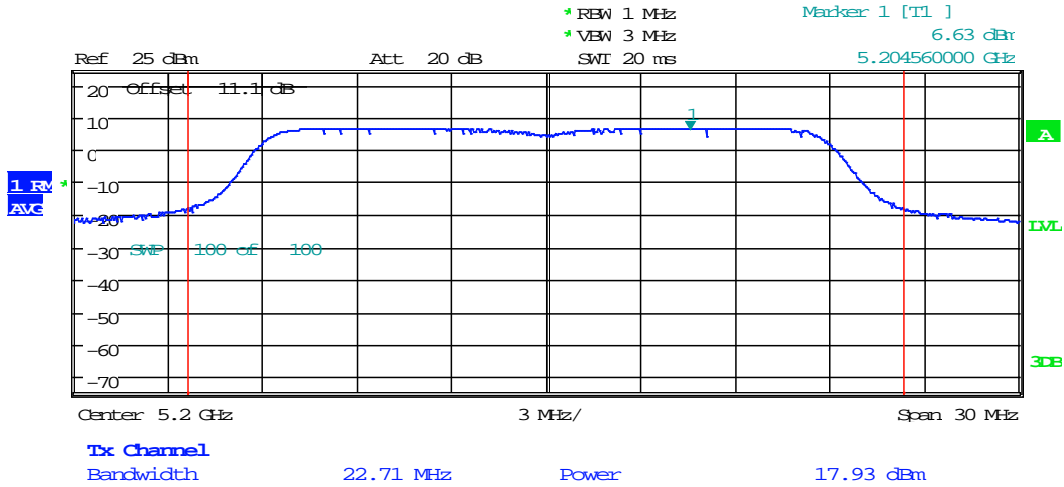

Date: 22.FEB.2016 10:48:24




### Plot 2.6 802.11n 20MHz, 5240MHz

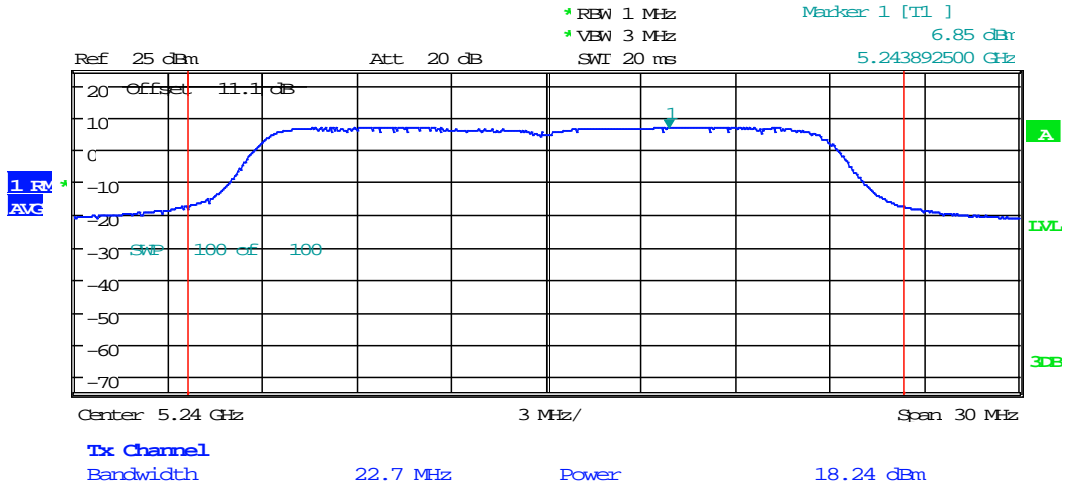

Date: 22.FEB.2016 10:51:18




### Plot 2.7 802.11n 40MHz, 5190MHz

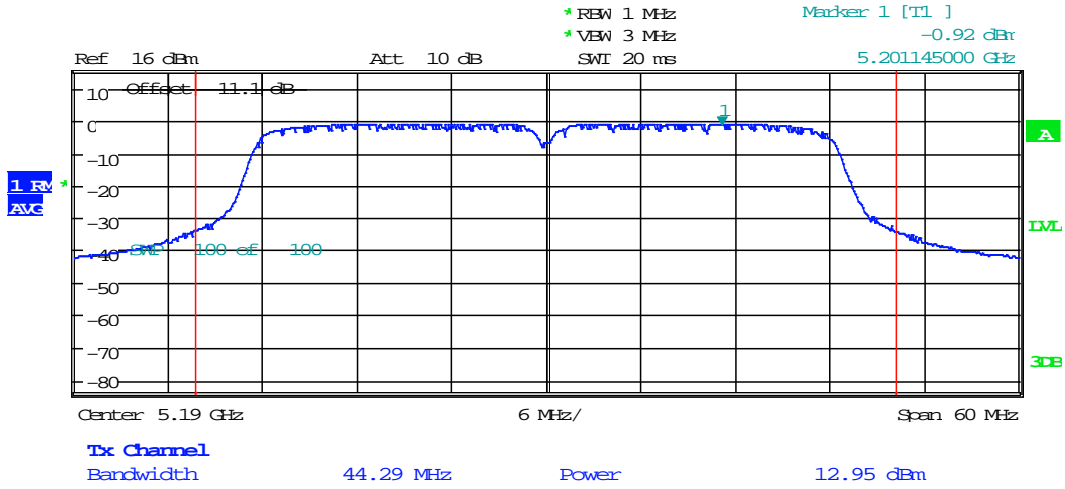

Date: 23.FEB.2016 09:44:41


**Plot 2.8**  
**802.11n 40MHz, 5230MHz**

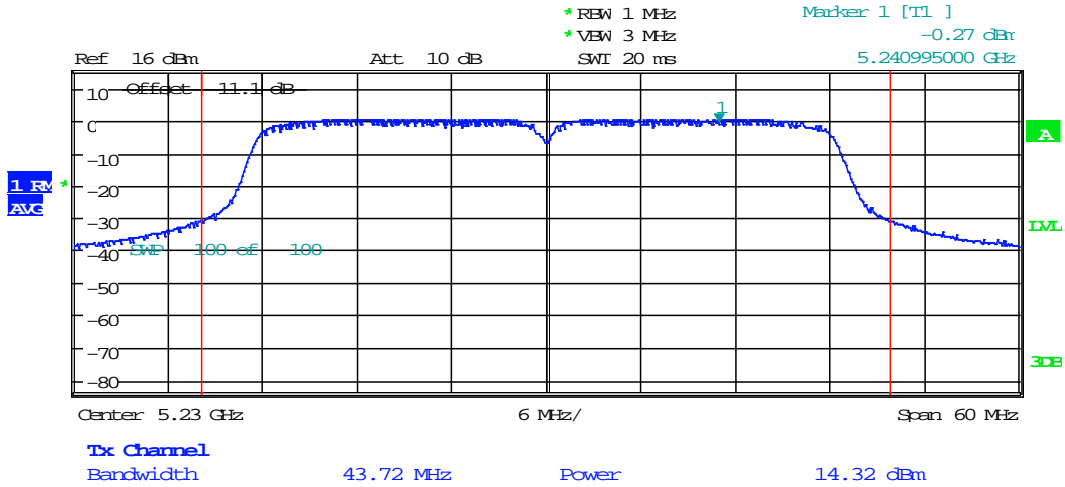

Date: 23.FEB.2016 09:46:40



### Plot 2.9 H802.11ac 80MHz, 5210MHz

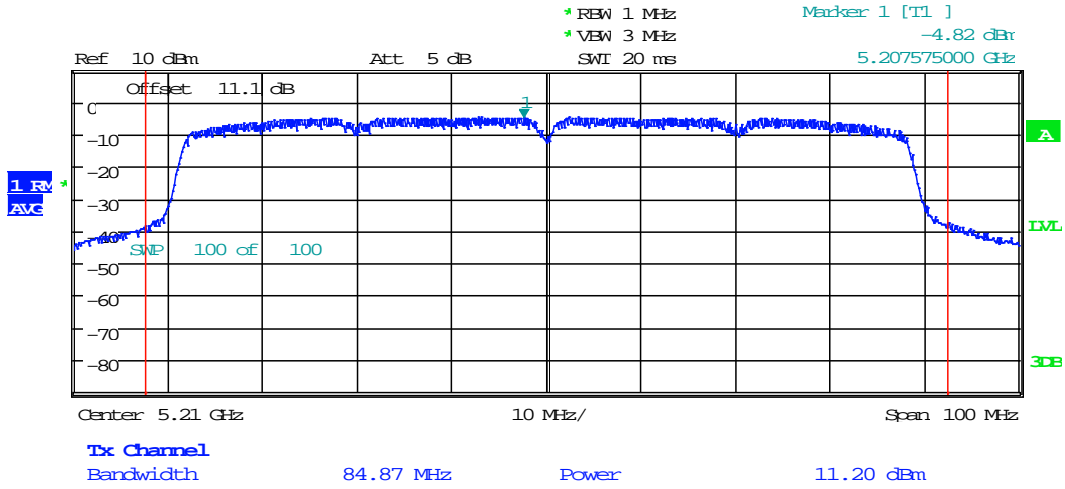

Date: 23.FEB.2016 10:07:08



4.3 Peak Power Spectral Density  
FCC Rule 15.407(a)(1)(iv)

4.3.1 Requirement

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.3.2 Procedure

Each antenna port of the EUT was connected to the input of a spectrum analyzer to measure the Peak Power Spectral Density (PPSD) and recorded.

The Procedure, described in the FCC Publication 789033 D02 General U-NII Test Procedures New Rules, was used. Specifically procedure from Section F was utilized for Maximum Power Spectral Density (PSD).

|                   |                      |
|-------------------|----------------------|
| <b>Tested By:</b> | Anderson Soungpanya  |
| <b>Test Date:</b> | February 22-23, 2016 |

#### 4.3.3 Test Result

Refer to the following plots located in section 4.2 for the test result:

| <b>Mode</b>       | <b>Channel</b> | <b>Frequency, MHz</b> | <b>PSD(Peak) dBm</b> | <b>PSD Limit dBm</b> | <b>Plot #</b> |
|-------------------|----------------|-----------------------|----------------------|----------------------|---------------|
| 802.11a           | 36             | 5180                  | 5.43                 | 11                   | 2.1           |
|                   | 40             | 5200                  | 6.73                 | 11                   | 2.2           |
|                   | 48             | 5240                  | 7.02                 | 11                   | 2.3           |
| 802.11n<br>20MHz  | 36             | 5180                  | 5.32                 | 11                   | 2.4           |
|                   | 40             | 5200                  | 6.63                 | 11                   | 2.5           |
|                   | 48             | 5240                  | 6.85                 | 11                   | 2.6           |
| 802.11n<br>40MHz  | 38             | 5190                  | -0.92                | 11                   | 2.7           |
|                   | 46             | 5230                  | -0.27                | 11                   | 2.8           |
| 802.11ac<br>80MHz | 42             | 5210                  | -4.82                | 11                   | 2.9           |

4.4 Frequency stability  
FCC 15.407(g)

4.4.1 Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

4.4.2 Procedure

The EUT was placed in a temperature chamber and setup to transmit. Procedures for frequency stability in ANSIC63.10:2013 section 6.8 was utilized.

The carrier frequency was measured with the spectrum analyzer with resolution bandwidth of 1 kHz.

The temperature was varied from  $-10^{\circ}\text{C}$  to  $55^{\circ}\text{C}$ , as stated in the user manual.

The radio module in this report is powered by 120VAC which was varied to 85% and 115% for testing. Testing was performed at a temperature of  $20^{\circ}\text{C}$ .

After the temperature stabilized for approximately 20 minutes, the transmitting frequency was measured.

|                   |                     |
|-------------------|---------------------|
| <b>Tested By:</b> | Anderson Soungpanya |
| <b>Test Date:</b> | February 16, 2016   |

4.4.3 Result

| Temperature, °C             | Frequency at nominal voltage, (MHz) | Maximum deviation from frequency at 20°C, ppm |
|-----------------------------|-------------------------------------|---|
| Nominal Frequency: 5180 MHz |                                     |   |
| 55                          | 5179.988717                         | 1.188   |
| 50                          | 5179.989544                         | 1.028   |
| 40                          | 5179.989156                         | 1.103   |
| 30                          | 5179.991543                         | 0.642   |
| 20                          | 5179.994870                         | 0.000   |
| 10                          | 5180.012574                         | 3.418   |
| 0                           | 5180.024776                         | 5.773   |
| -10                         | 5180.030775                         | 6.931   |
| Voltage at 20°C             | Frequency at nominal voltage, (MHz) | Maximum deviation from frequency at 20°C, ppm |
| 120VAC – 15%                | 5179.995112                         | 0.047   |
| 120VAC + 15%                | 5179.995045                         | 0.034   |

| Temperature, °C             | Frequency at nominal voltage, (MHz) | Maximum deviation from frequency at 20°C, ppm |
|-----------------------------|-------------------------------------|---|
| Nominal Frequency: 5240 MHz |                                     |   |
| 55                          | 5239.988713                         | 0.663   |
| 50                          | 5239.989740                         | 0.467   |
| 40                          | 5239.990447                         | 0.332   |
| 30                          | 5239.991446                         | 0.141   |
| 20                          | 5239.992185                         | 0.000   |
| 10                          | 5239.999278                         | 1.354   |
| 0                           | 5240.026447                         | 6.539   |
| -10                         | 5240.031121                         | 7.431   |
| Voltage at 20°C             | Frequency at nominal voltage, (MHz) | Maximum deviation from frequency at 20°C, ppm |
| 120VAC – 15%                | 5239.991652                         | 0.102   |
| 120VAC + 15%                | 5239.991155                         | 0.197   |

#### 4.5 Transmitter Radiated Emissions FCC Rule 15.407(b) (1-8) 15.209, 15.205

##### 4.5.1 Requirement

(b) Undesirable emission limits. Except as shown in paragraph (b) (7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz.

Note: This corresponds to the field strength level of 68.3 dB( $\mu$ V/m) at 3 m distance when measure with 1 MHz resolution bandwidth.

#### 4.5.2 Procedure

Radiated emission measurements were performed from 30 MHz to 40 GHz according to the procedure described in ANSI C64.10. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz for frequencies above 1000 MHz. Above 1000 MHz Peak and Average measurements were performed.

The EUT is placed on a plastic turntable that is 80 cm in height for below 1000MHz and 1.5m in height for above 1GHz. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst-case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at 3 meters for frequencies above 1 GHz and at 10 meters for frequencies below 1 GHz.

Measurements made from 30 MHz to 40 GHz were measured with 50 ohm terminator on the output of the EUT RF port. A preamp was used from 30MHz to 40GHz.

All measurements were made with a Peak Detector and compared to QP limits for 30MHz – 1GHz and Average limits for 1GHz – 40 GHz.

Data is included of the worst-case configuration (the configuration which resulted in the highest emission levels).

#### 4.5.3 Field Strength Calculation

##### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$FS = RA + AF + CF - AG$ ; if measurement is performed at a distance other than specified in the rule, a Distance Correction Factor (DCF) shall be added.

Where FS = Field Strength in dB( $\mu$ V/m)

RA = Receiver Amplitude (including preamplifier) in dB( $\mu$ V); AF = Antenna Factor in dB(1/m)

CF = Cable Attenuation Factor in dB; AG = Amplifier Gain in dB

Assume a receiver reading of 52.0 dB( $\mu$ V) is obtained. The antennas factor of 7.4 dB(1/m) and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB( $\mu$ V/m). This value in dB( $\mu$ V/m) was converted to its corresponding level in  $\mu$ V/m.

RA = 52.0 dB( $\mu$ V)

AF = 7.4 dB(1/m)

CF = 1.6 dB

AG = 29.0 dB

FS =  $52.0 + 7.4 + 1.6 - 29.0 = 32$  dB( $\mu$ V/m).

Level in  $\mu$ V/m = Common Antilogarithm [ $(32 \text{ dB}\mu\text{V/m})/20$ ] = 39.8  $\mu$ V/m.

#### 4.5.4 Antenna-port conducted measurements

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

#### 4.5.6 General Procedure for conducted measurements in restricted bands

- a) Measure the conducted output power (in dBm) using the detector specified for determining quasi-peak, peak, and average conducted output power, respectively.
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies  $\leq 30$  MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies  $> 1000$  MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (*e.g.*, Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:  
$$E = \text{EIRP} - 20\log D + 104.8$$
where:  
E = electric field strength in dB $\mu$ V/m,  
EIRP = equivalent isotropic radiated power in dBm  
D = specified measurement distance in meters.
- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test

#### 4.5.7 Test Results

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance where emissions are within 3dB of the limit.

All conducted antenna port plots are corrected with the consideration of a 4.51dBi Antenna Gain.



Radiated emission measurements were performed up to 40GHz. No Emissions were identified when scanned from 18-40 GHz.



## Test Results: 15.209/15.205 Restricted Band Emissions at Antenna Port



|                   |                      |
|-------------------|----------------------|
| <b>Tested By:</b> | Anderson Soungpanya  |
| <b>Test Date:</b> | February 18-19, 2016 |

### Out-of-Band Spurious Emissions at the Band Edge - 802.11a, 5180 MHz

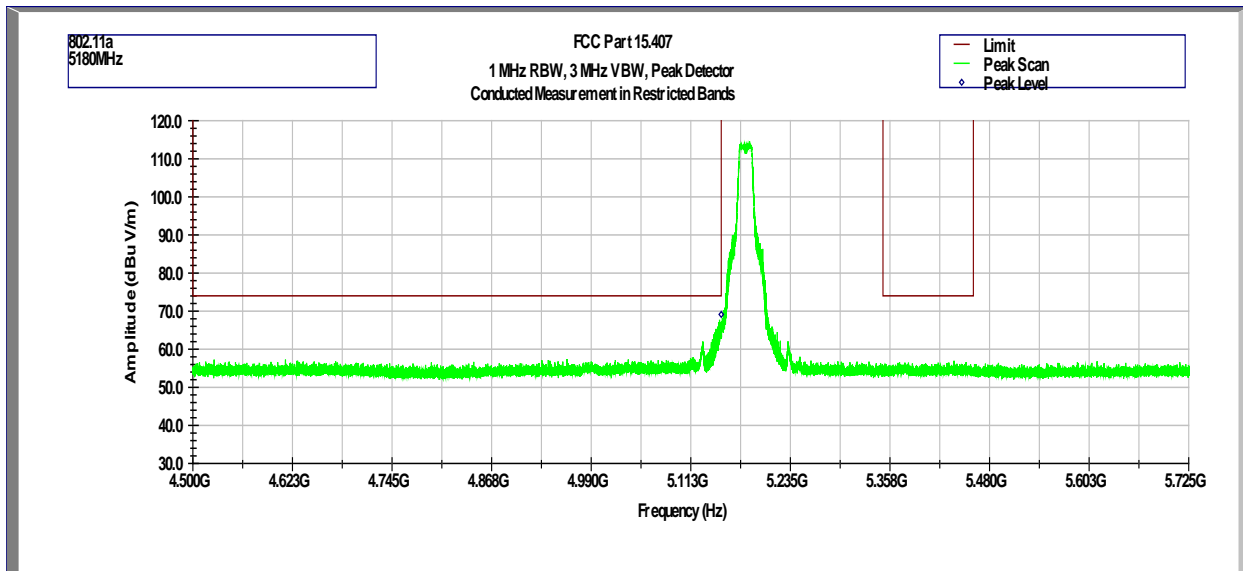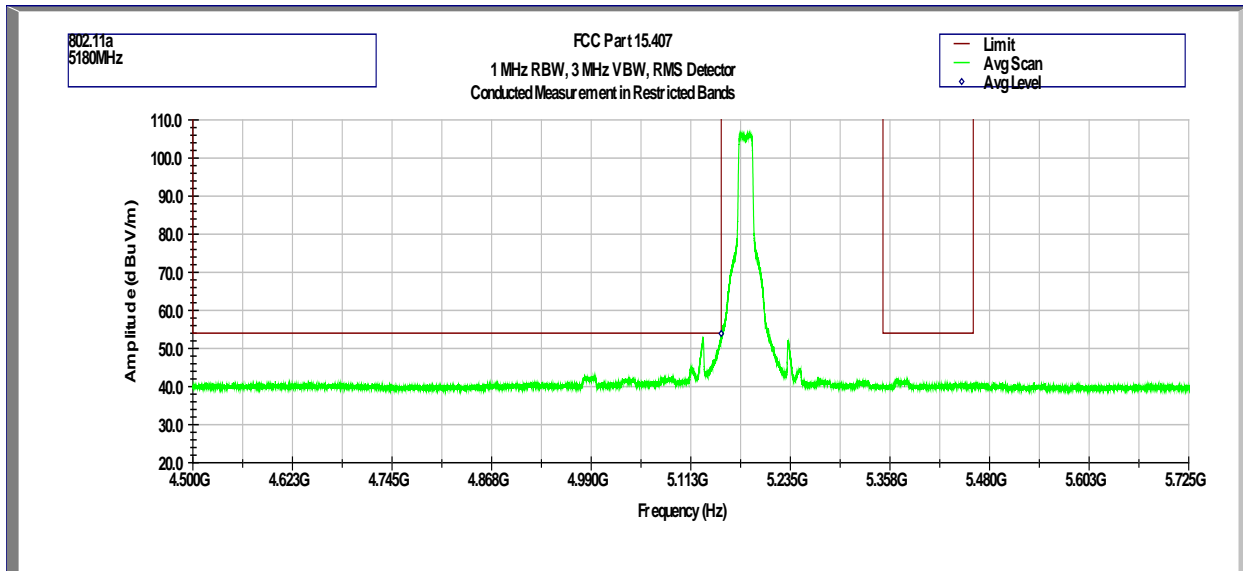



| Frequency | Corrected Amplitude | Limit        | Margin | Detector | Results |
|-----------|---------------------|--------------|--------|----------|---------|
| GHz       | dB $\mu$ V/m        | dB $\mu$ V/m | dB     |          |         |
| 5.150     | 53.9                | 54           | -0.1   | Avg      | Pass    |

**Out-of-Band Spurious Emissions at the Band Edge - 802.11n, 5180 MHz**

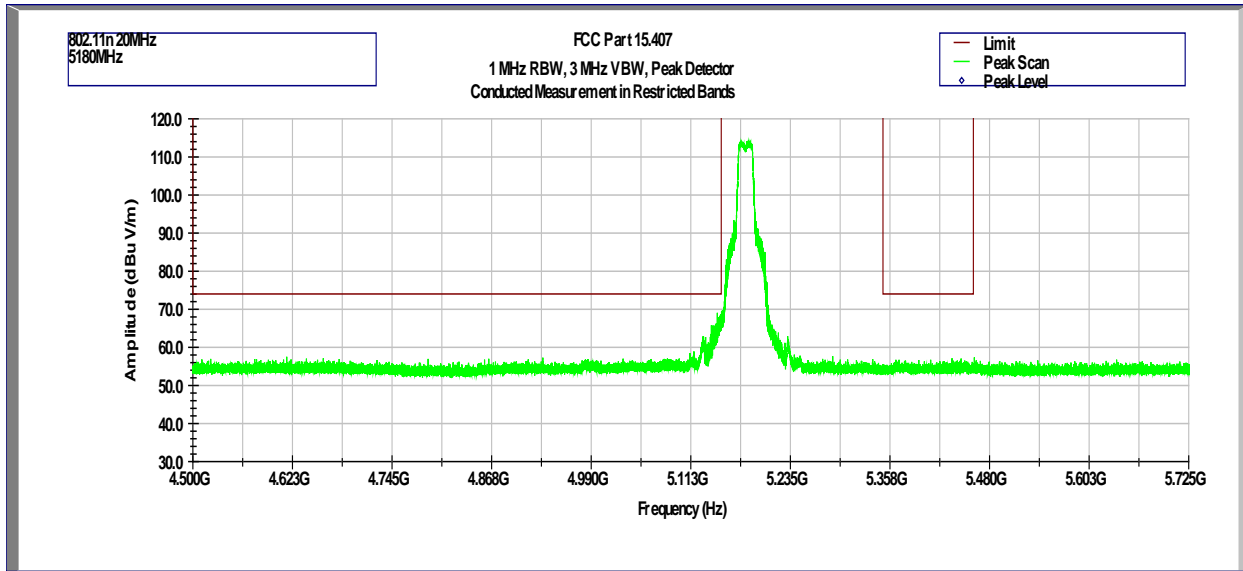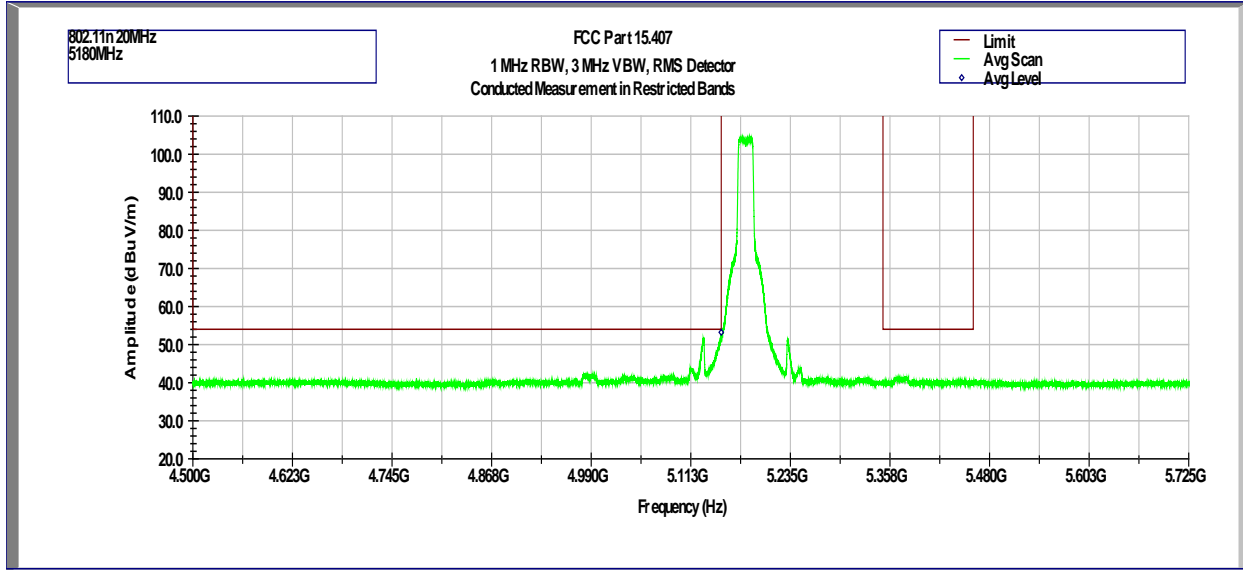



| Frequency | Corrected Amplitude | Limit        | Margin | Detector | Results |
|-----------|---------------------|--------------|--------|----------|---------|
| GHz       | dB $\mu$ V/m        | dB $\mu$ V/m | dB     |          |         |
| 5.150     | 53.2                | 54           | -0.8   | Avg      | Pass    |

**Out-of-Band Spurious Emissions at the Band Edge - 802.11n 40MHz, 5190 MHz**

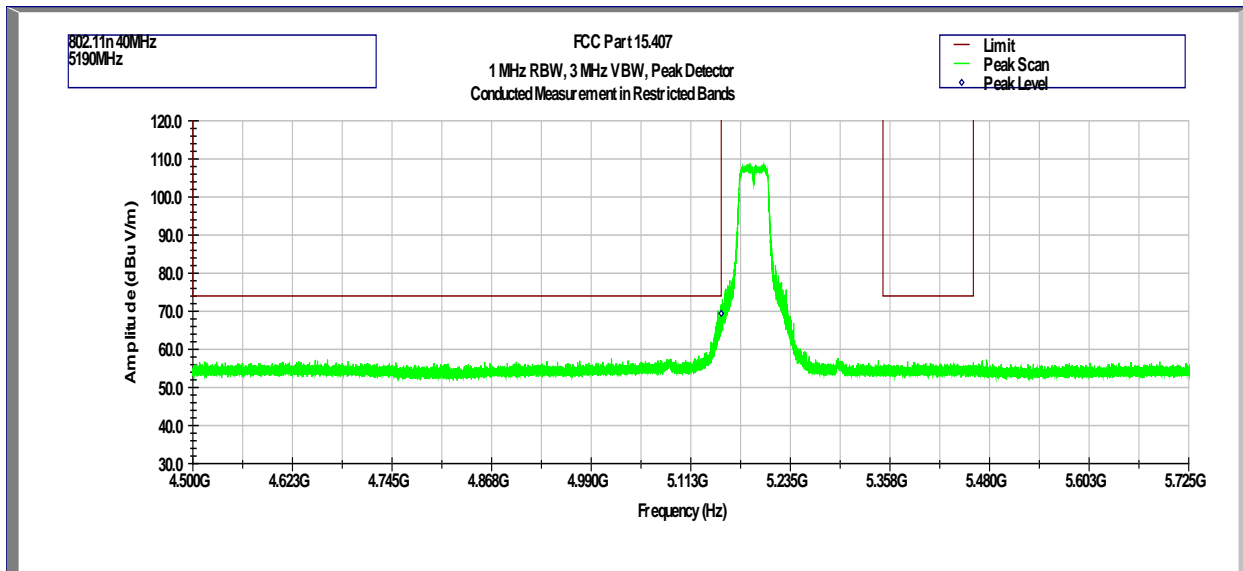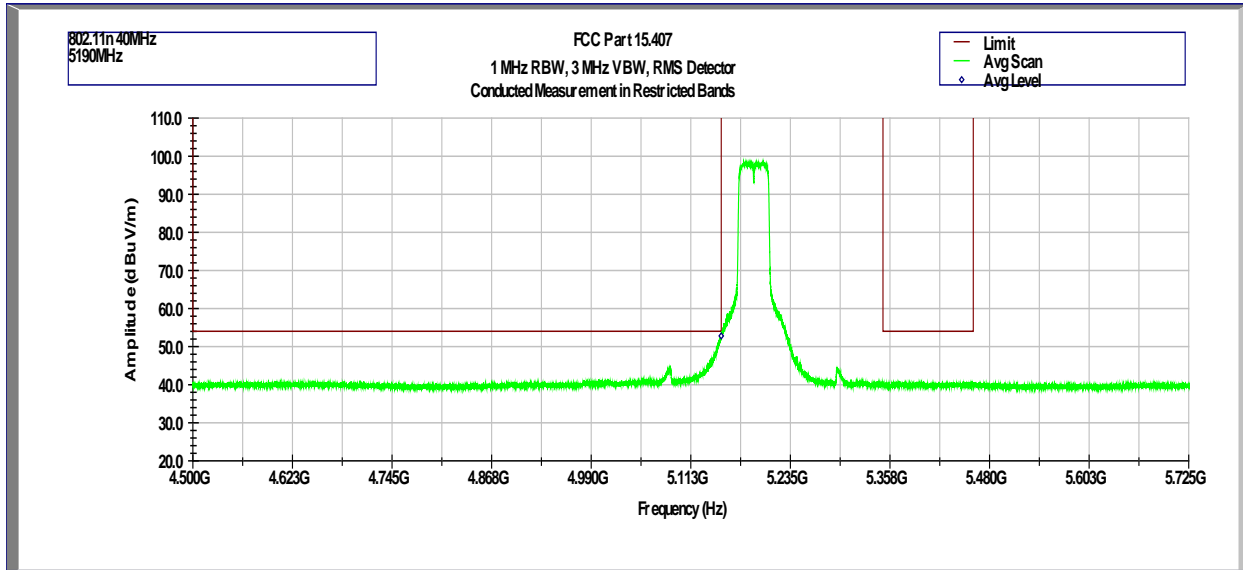

| Frequency | Corrected Amplitude | Limit        | Margin | Detector | Results |
|-----------|---------------------|--------------|--------|----------|---------|
| GHz       | dB $\mu$ V/m        | dB $\mu$ V/m | dB     |          |         |
| 5.150     | 52.8                | 54           | -1.2   | Avg      | Pass    |

**Out-of-Band Spurious Emissions at the Band Edge - 802.11ac 80MHz, 5210 MHz**

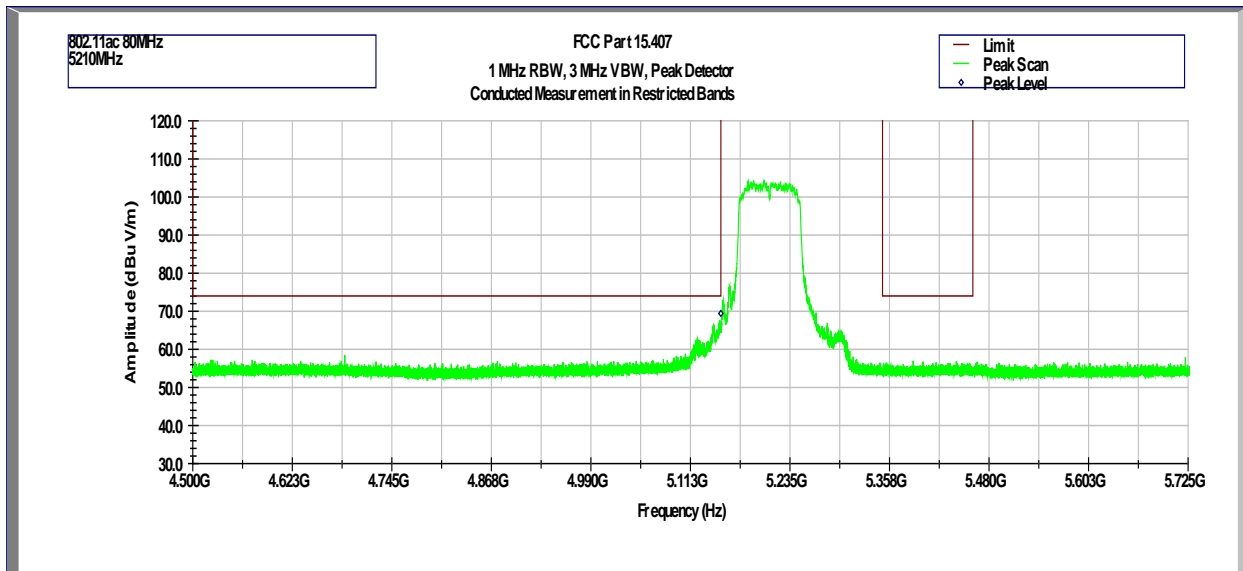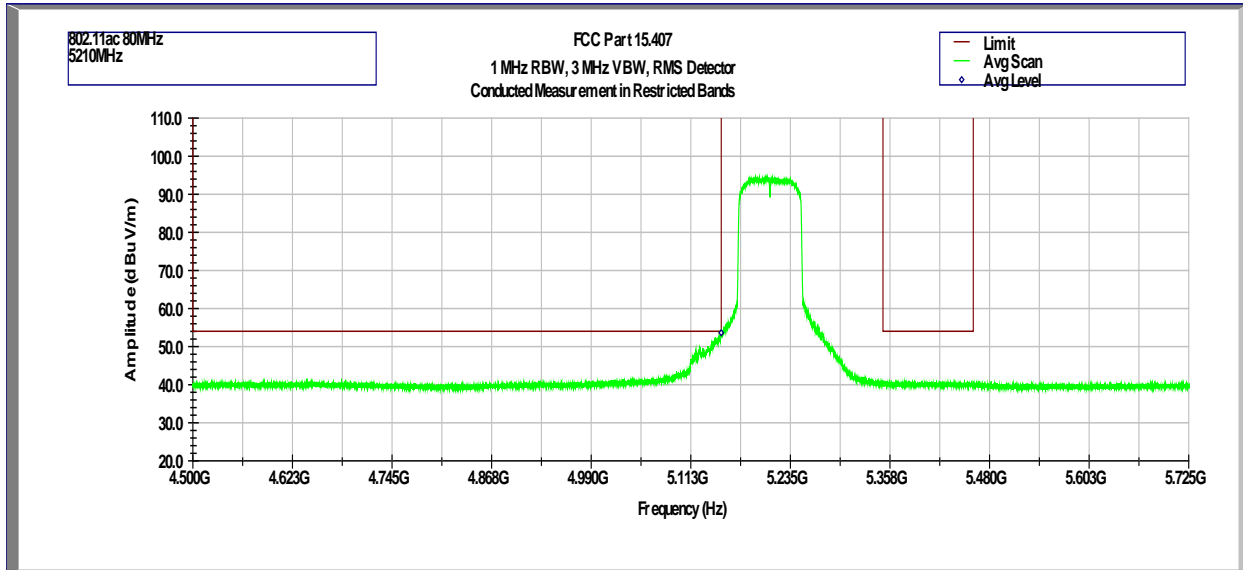


| Frequency | Corrected Amplitude | Limit  | Margin | Detector | Results |
|-----------|---------------------|--------|--------|----------|---------|
| GHz       | dBμV/m              | dBμV/m | dB     |          |         |
| 5.122     | 53.6                | 54     | -0.4   | Avg      | Pass    |


**Out-of-Band Conducted Spurious Emissions (at Antenna Port)**

**Tx @ 5180MHz 802.11a**

**Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz**

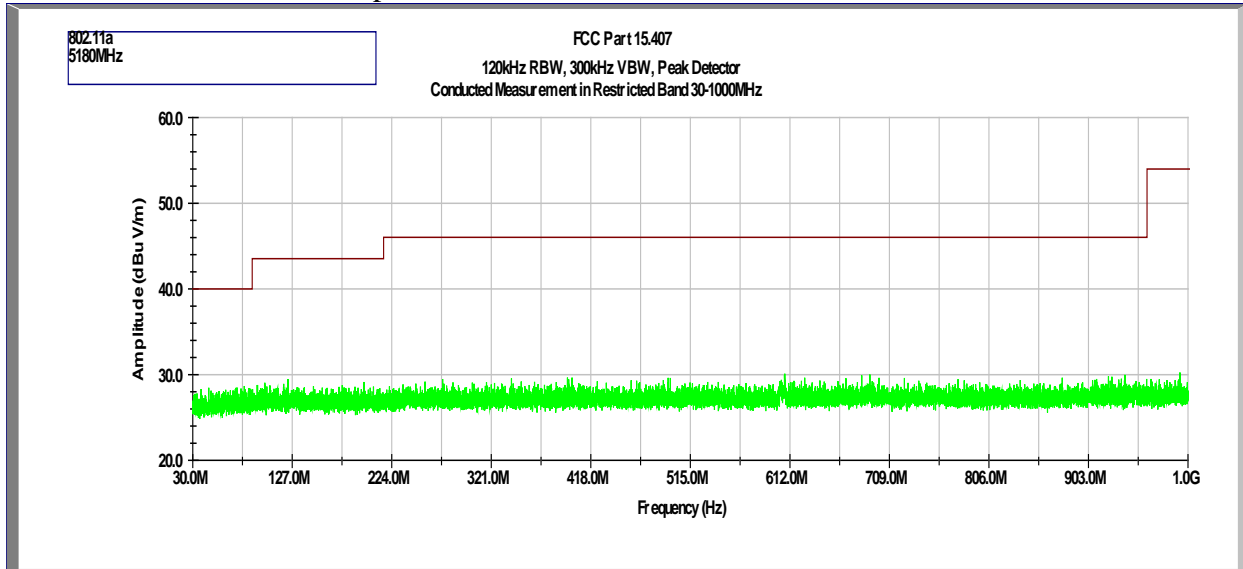


**Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz**

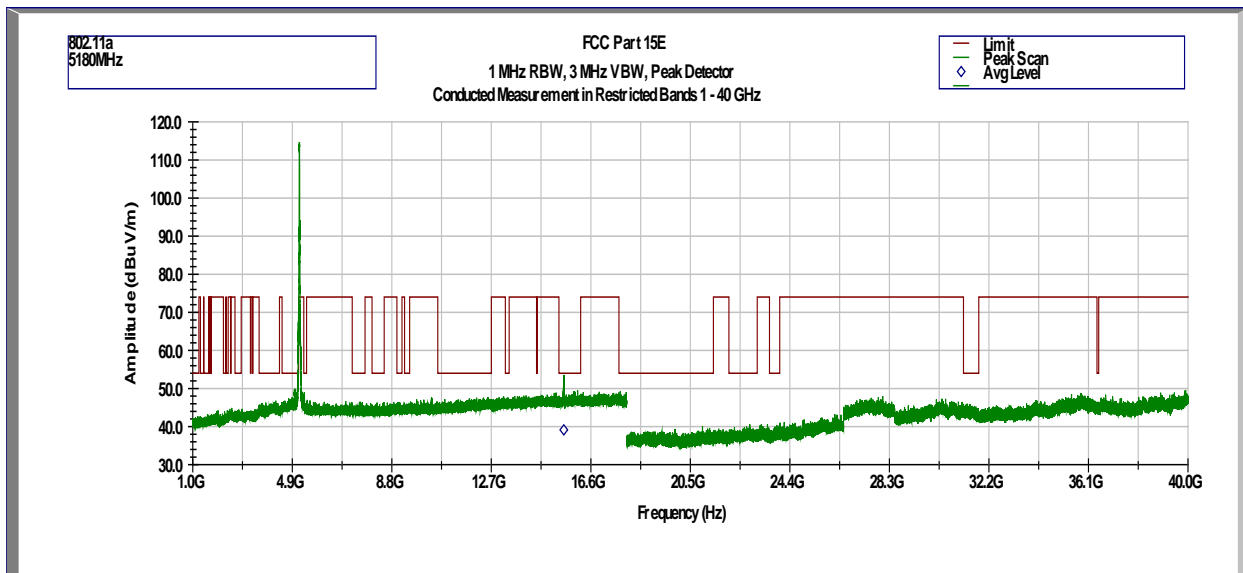


| Frequency | Corrected Amplitude | Limit  | Margin | Detector | Results |
|-----------|---------------------|--------|--------|----------|---------|
| GHz       | dBμV/m              | dBμV/m | dB     |          |         |
| 15.540    | 39.1                | 54     | -14.9  | Avg      | Pass    |

**Tx @ 5200MHz 802.11a**

**Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz**

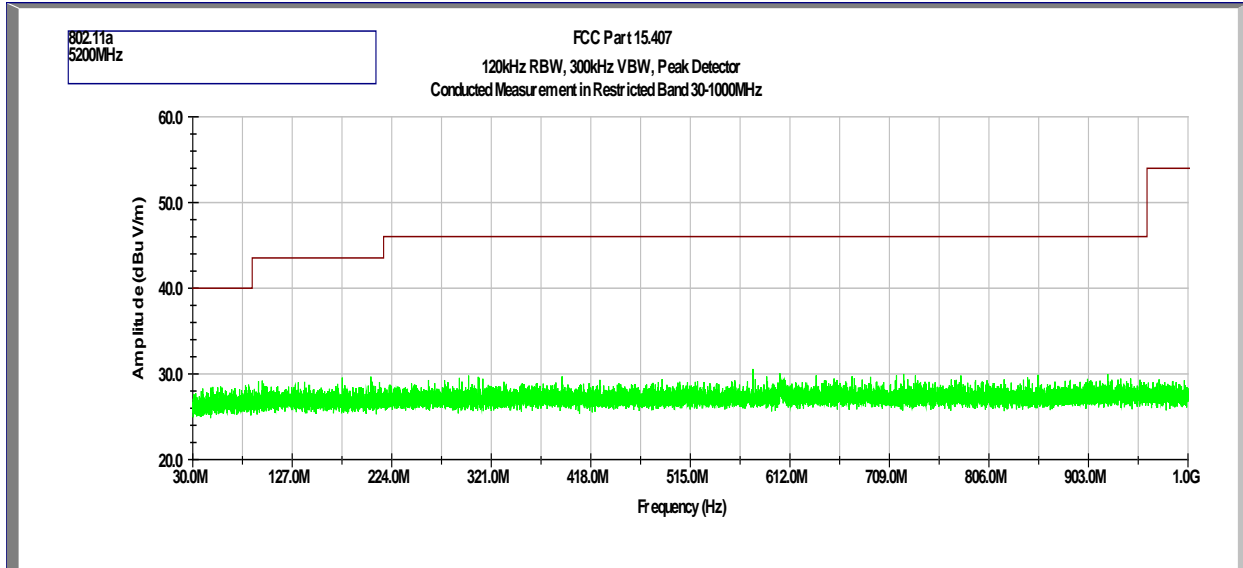


**Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz**

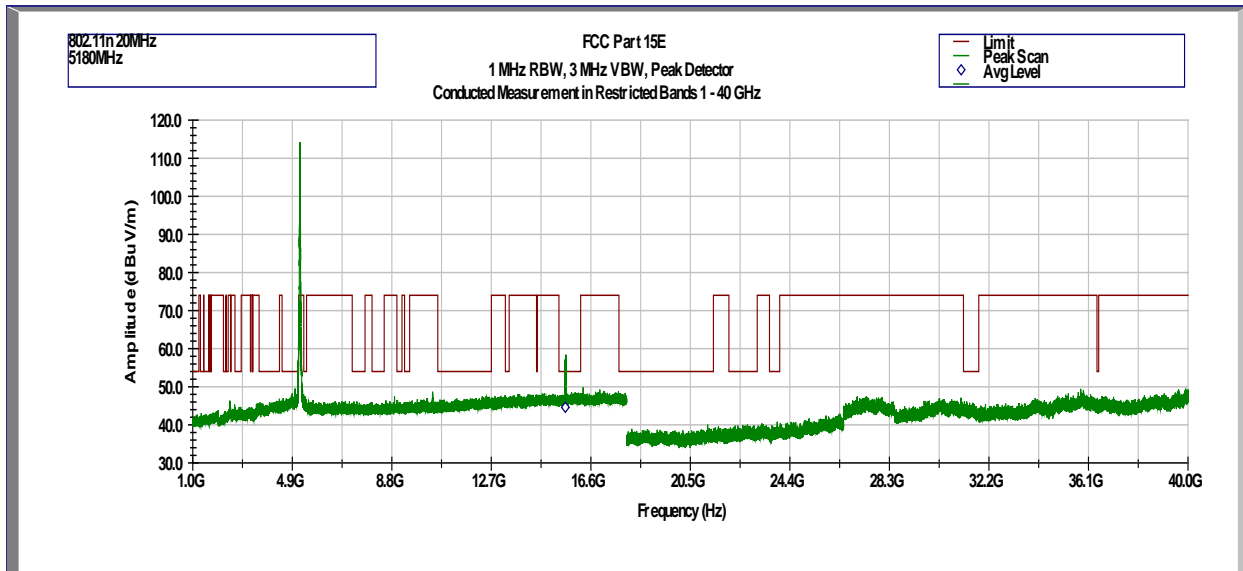


| Frequency | Corrected Amplitude | Limit  | Margin | Detector | Results |
|-----------|---------------------|--------|--------|----------|---------|
| GHz       | dBμV/m              | dBμV/m | dB     |          |         |
| 15.600    | 44.6                | 54     | -9.4   | Avg      | Pass    |

**Tx @ 5240MHz 802.11a**

**Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz**

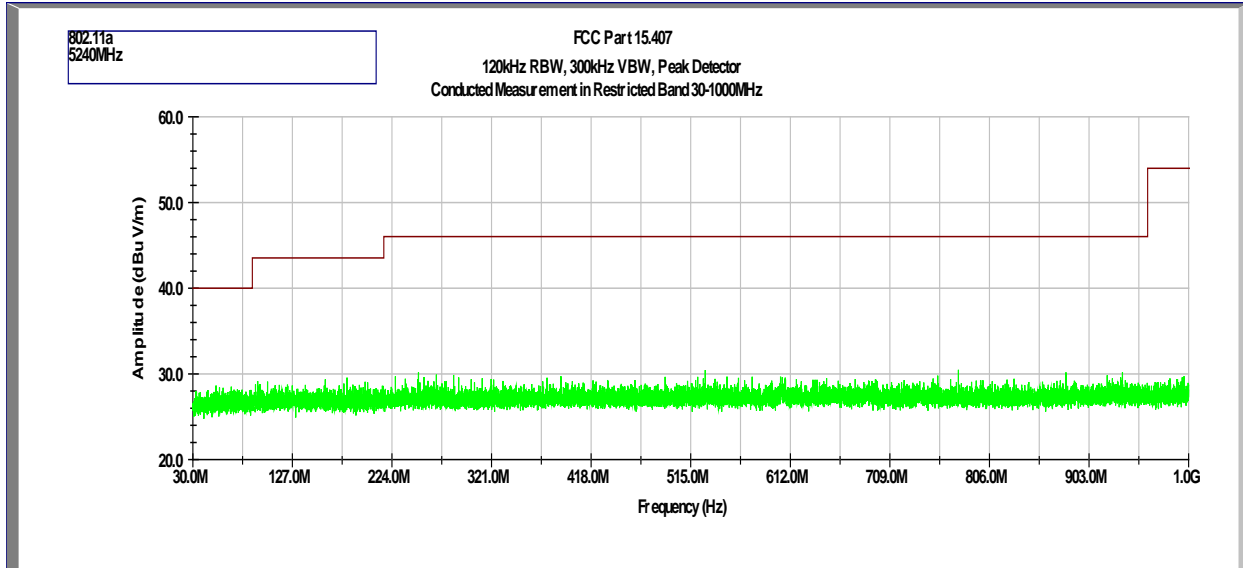


**Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz**

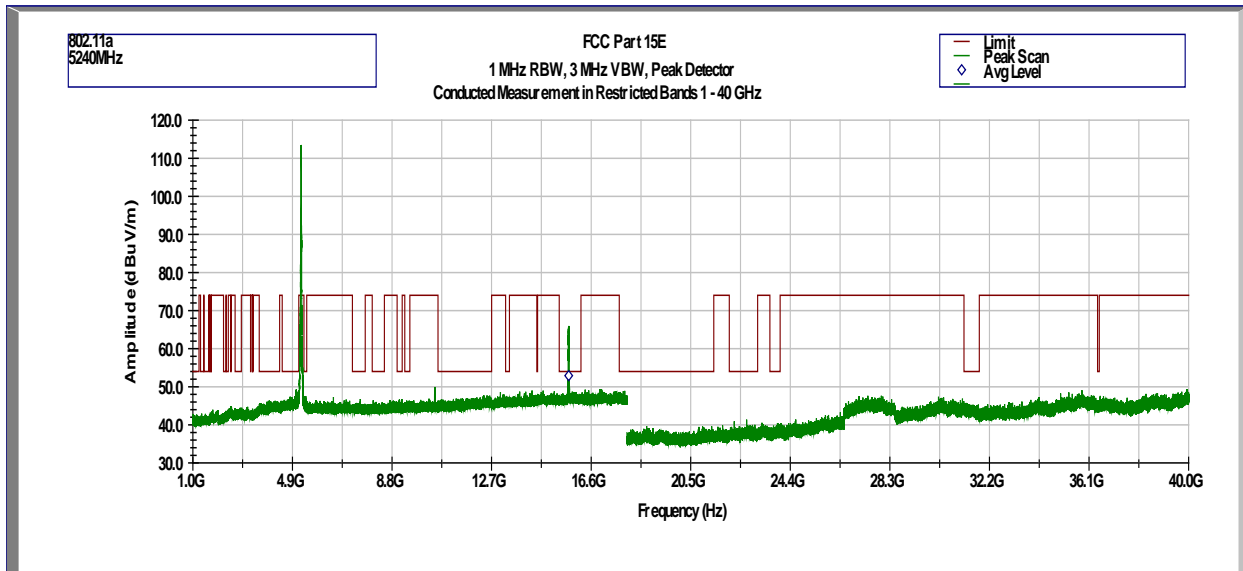


| Frequency | Corrected Amplitude | Limit        | Margin | Detector | Results |
|-----------|---------------------|--------------|--------|----------|---------|
| GHz       | dB $\mu$ V/m        | dB $\mu$ V/m | dB     |          |         |
| 15.720    | 52.9                | 54           | -1.1   | Avg      | Pass    |

**Tx @ 5180MHz 802.11n 20MHz**

**Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz**

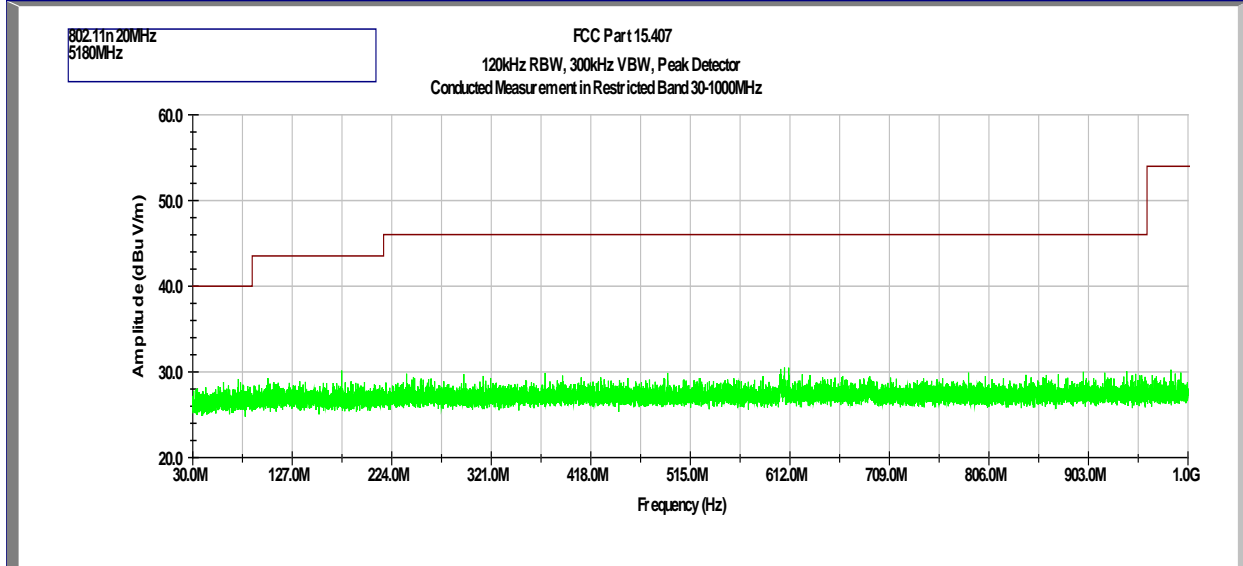


**Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz**

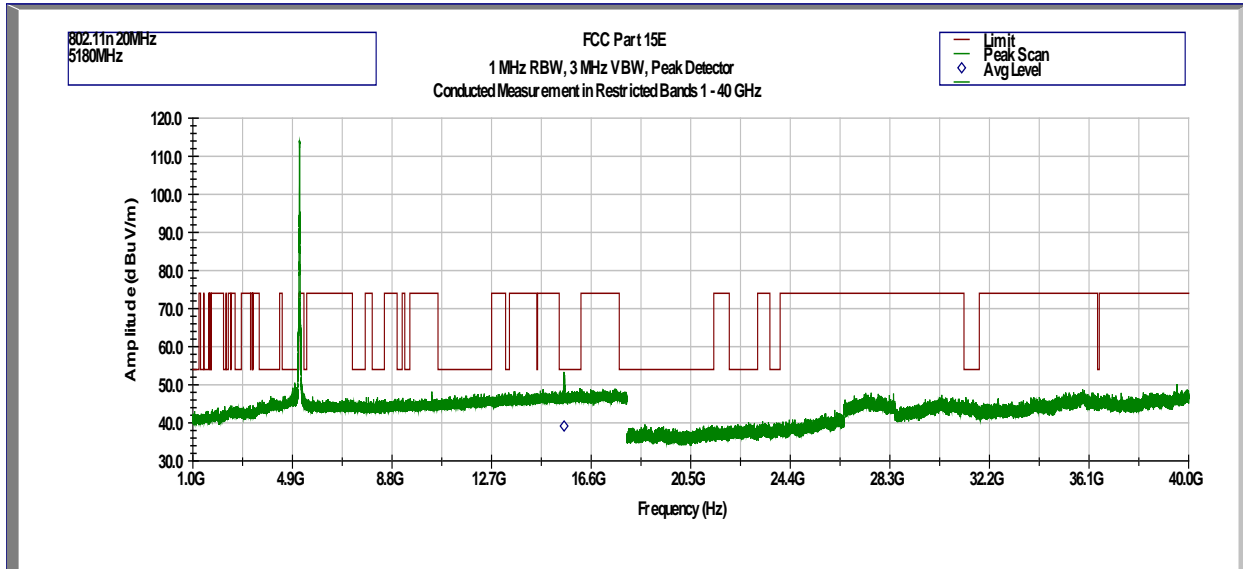


| Frequency | Corrected Amplitude | Limit  | Margin | Detector | Results |
|-----------|---------------------|--------|--------|----------|---------|
| GHz       | dBμV/m              | dBμV/m | dB     |          |         |
| 15.720    | 39.2                | 54     | -14.8  | Avg      | Pass    |



**Tx @ 5200MHz 802.11n 20MHz**  
 Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

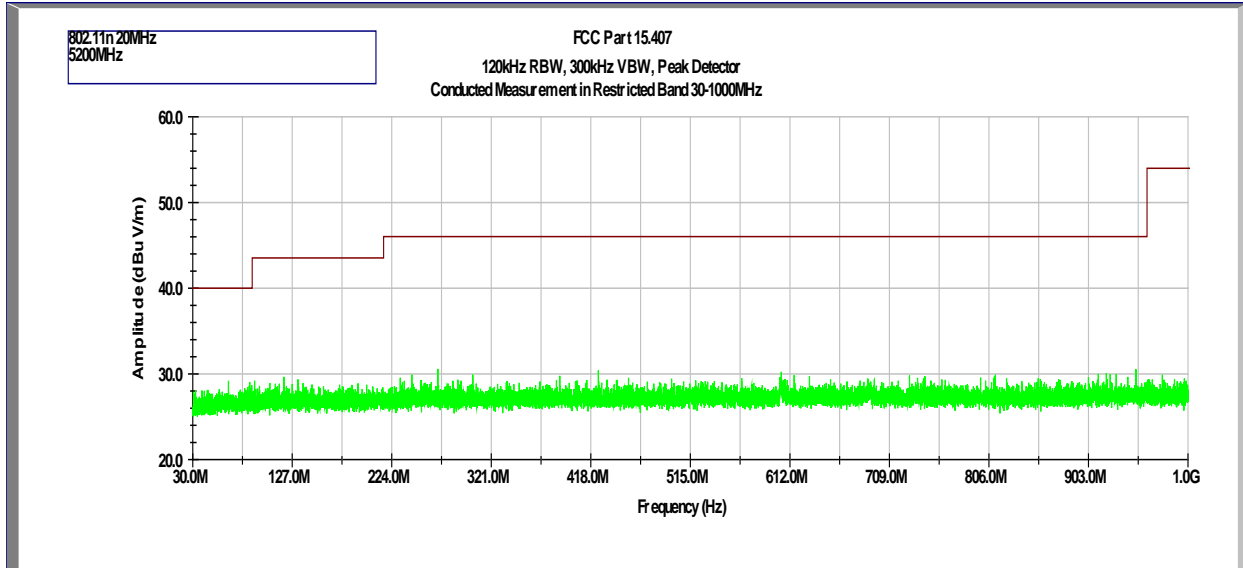


Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

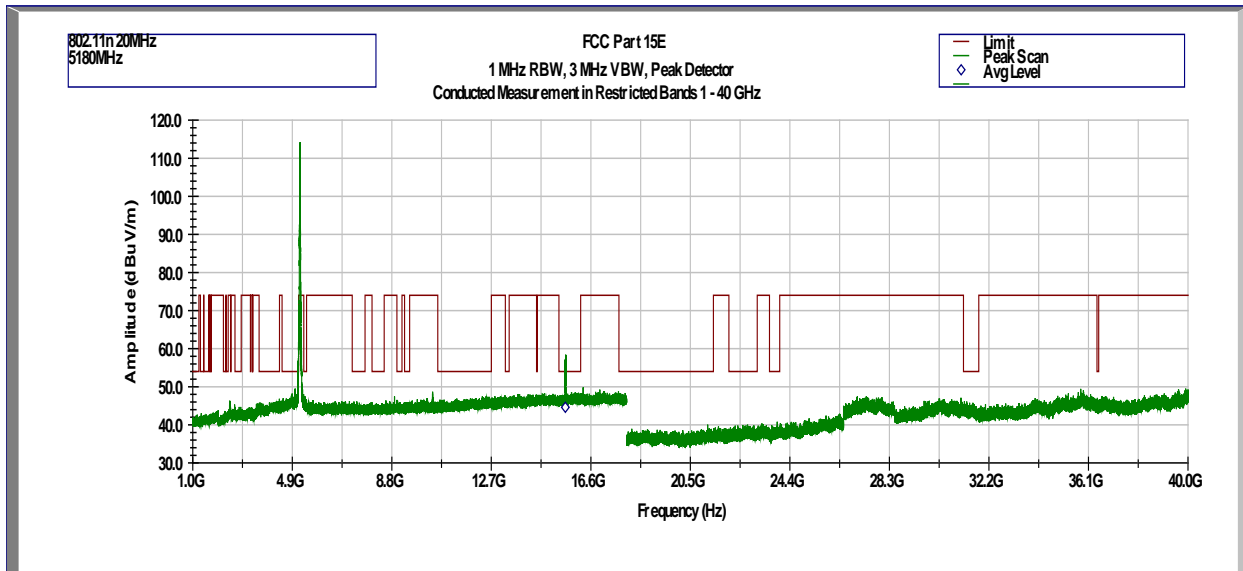


| Frequency | Corrected Amplitude | Limit        | Margin | Detector | Results |
|-----------|---------------------|--------------|--------|----------|---------|
| GHz       | dB $\mu$ V/m        | dB $\mu$ V/m | dB     |          |         |
| 15.600    | 44.6                | 54           | -9.4   | Avg      | Pass    |

**Tx @ 5240MHz 802.11n 20MHz**

**Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz**

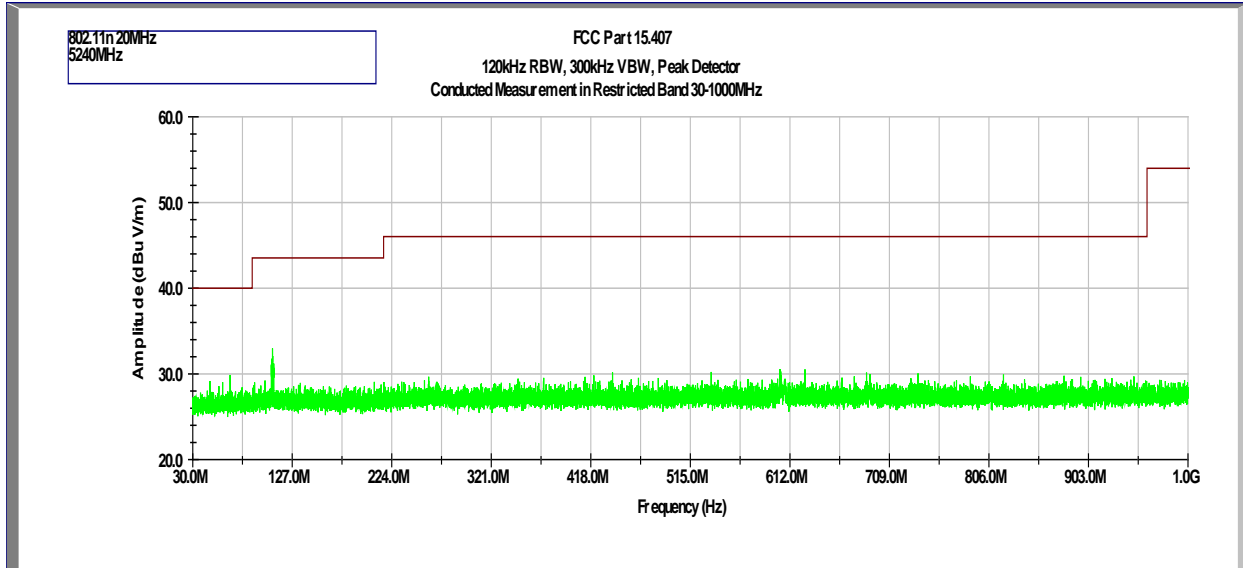


**Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz**

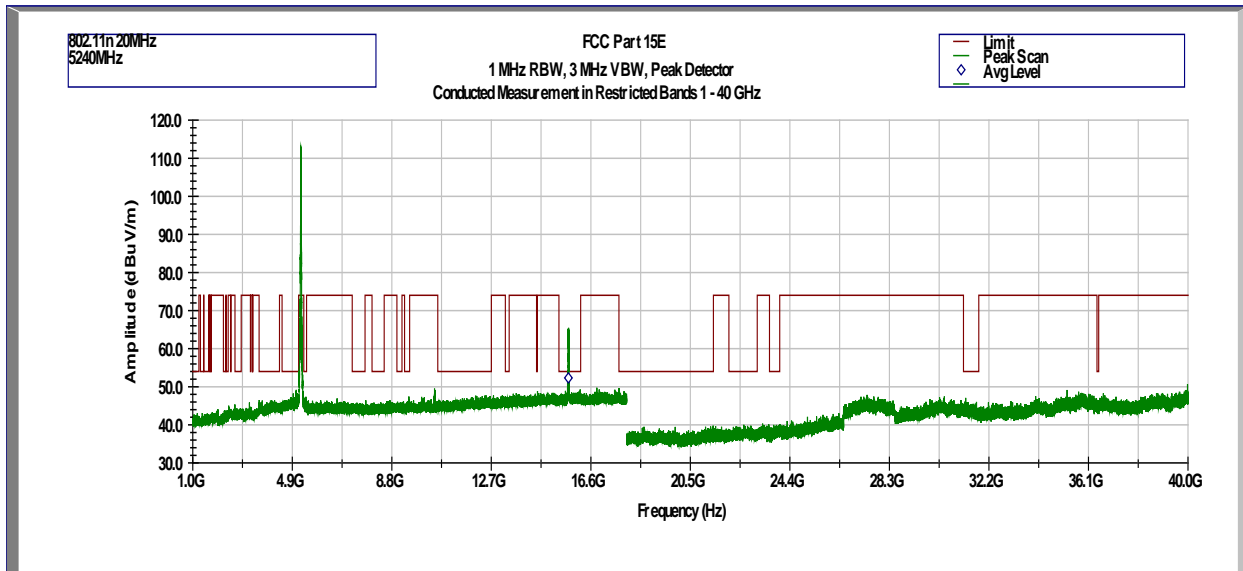


| Frequency | Corrected Amplitude | Limit  | Margin | Detector | Results |
|-----------|---------------------|--------|--------|----------|---------|
| GHz       | dBμV/m              | dBμV/m | dB     |          |         |
| 15.720    | 52.3                | 54     | -1.7   | Avg      | Pass    |

**Tx @ 5190MHz 802.11n 40MHz**

**Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz**

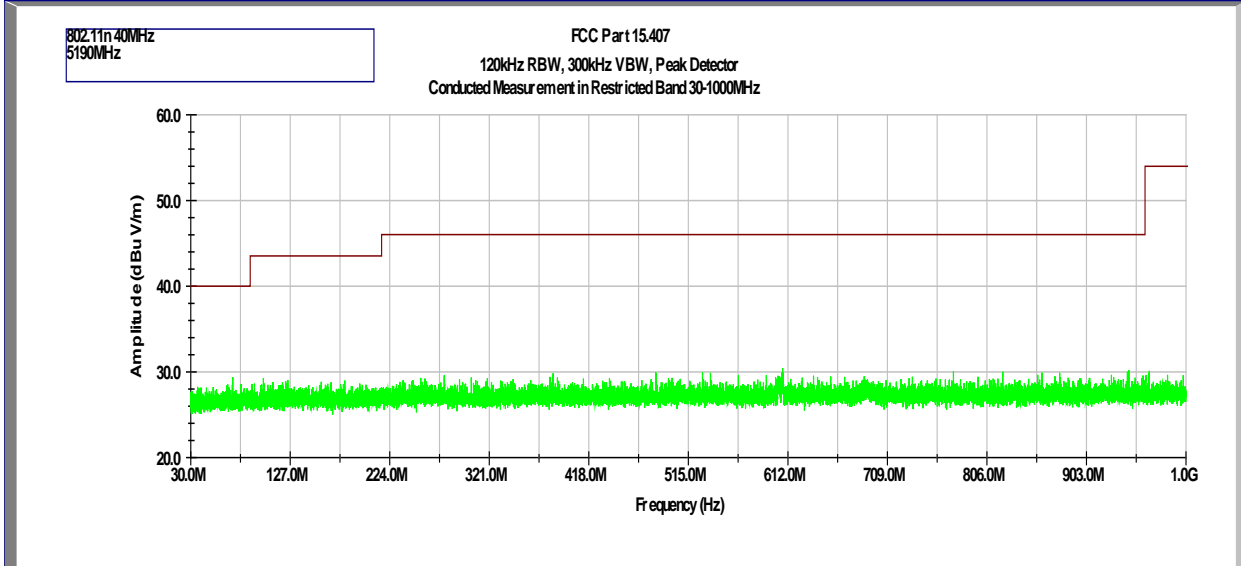


**Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz**

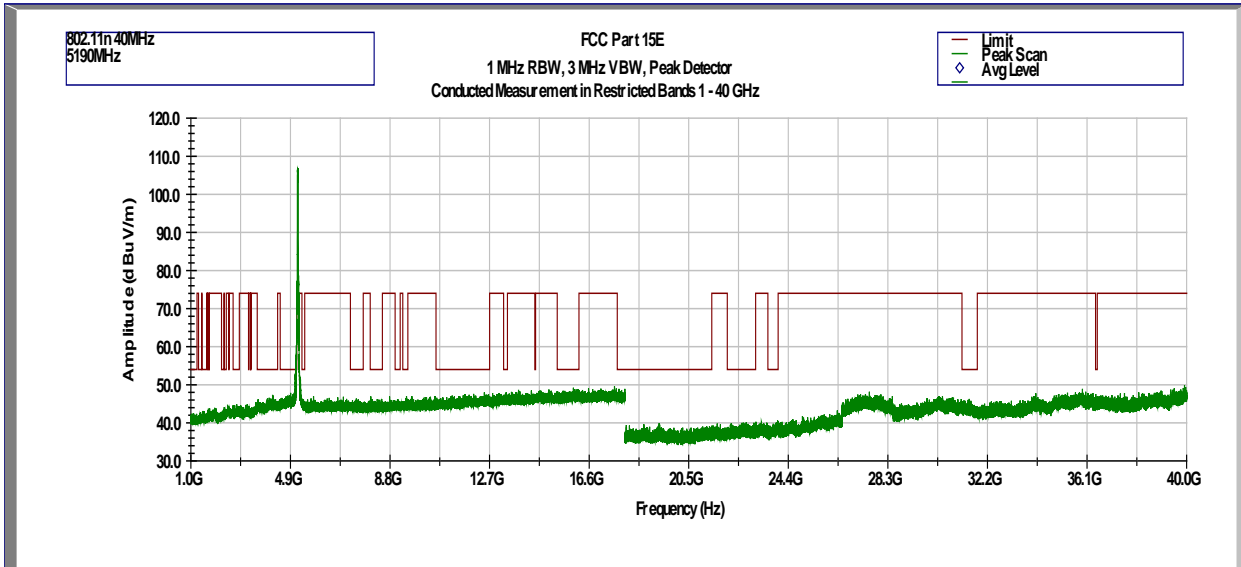


**Tx @ 5230MHz 802.11n 40MHz**

**Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz**

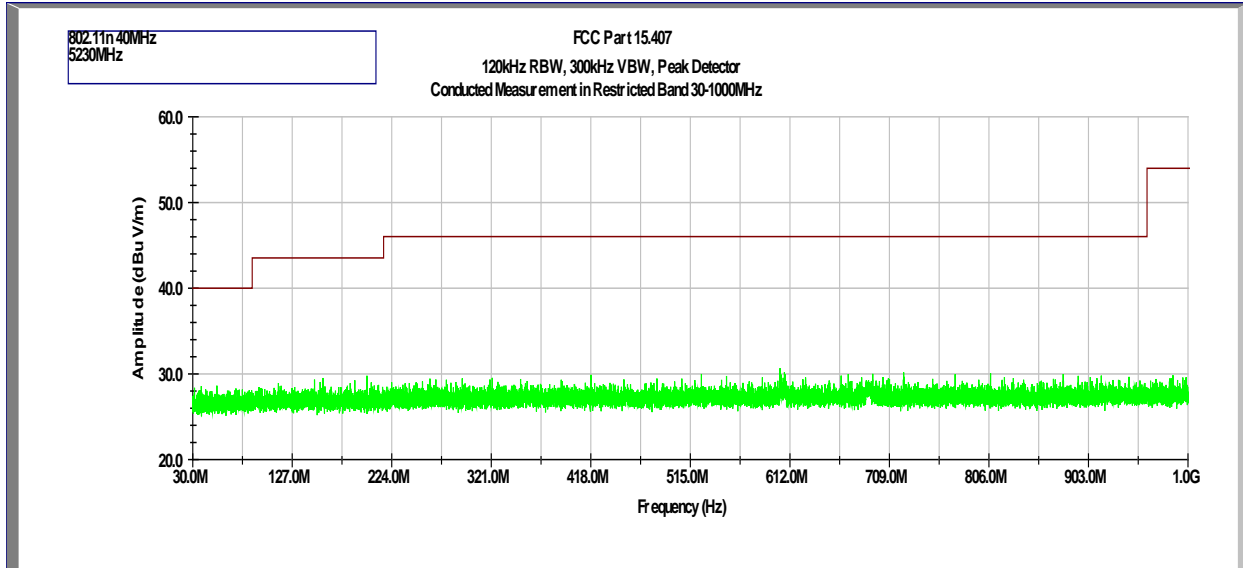


**Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz**

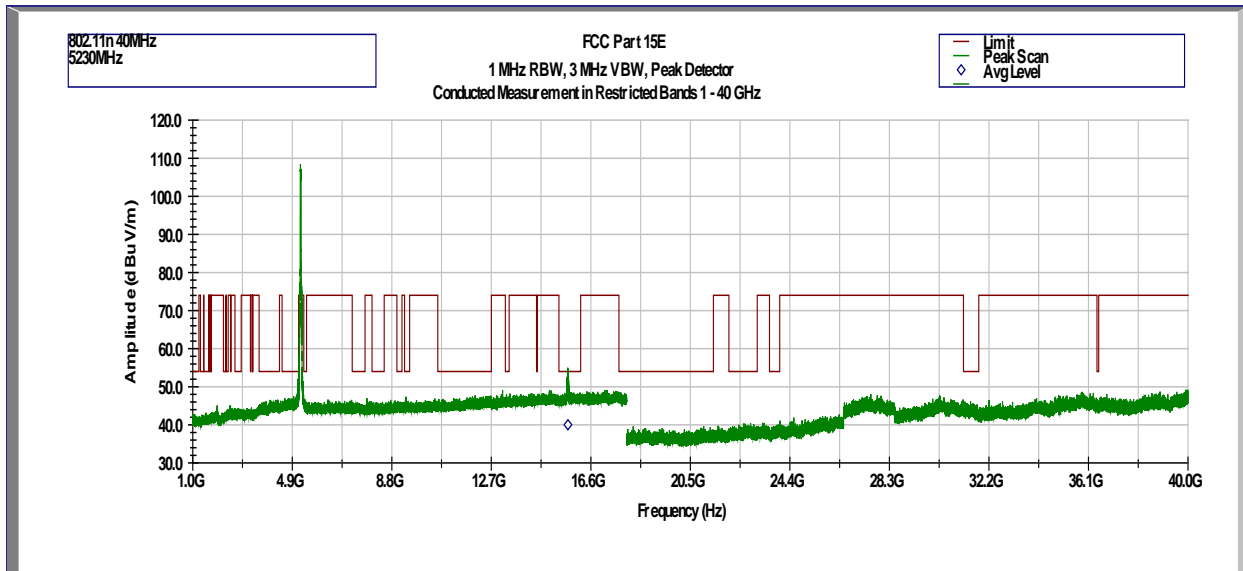


| Frequency | Corrected Amplitude | Limit  | Margin | Detector | Results |
|-----------|---------------------|--------|--------|----------|---------|
| GHz       | dBμV/m              | dBμV/m | dB     |          |         |
| 15.700    | 40.0                | 54     | -14.0  | Avg      | Pass    |

**Tx @ 5210MHz 802.11ac 80MHz**  
 Out-of-Band Spurious Emissions at Antenna Port - 30 MHz to 1 GHz

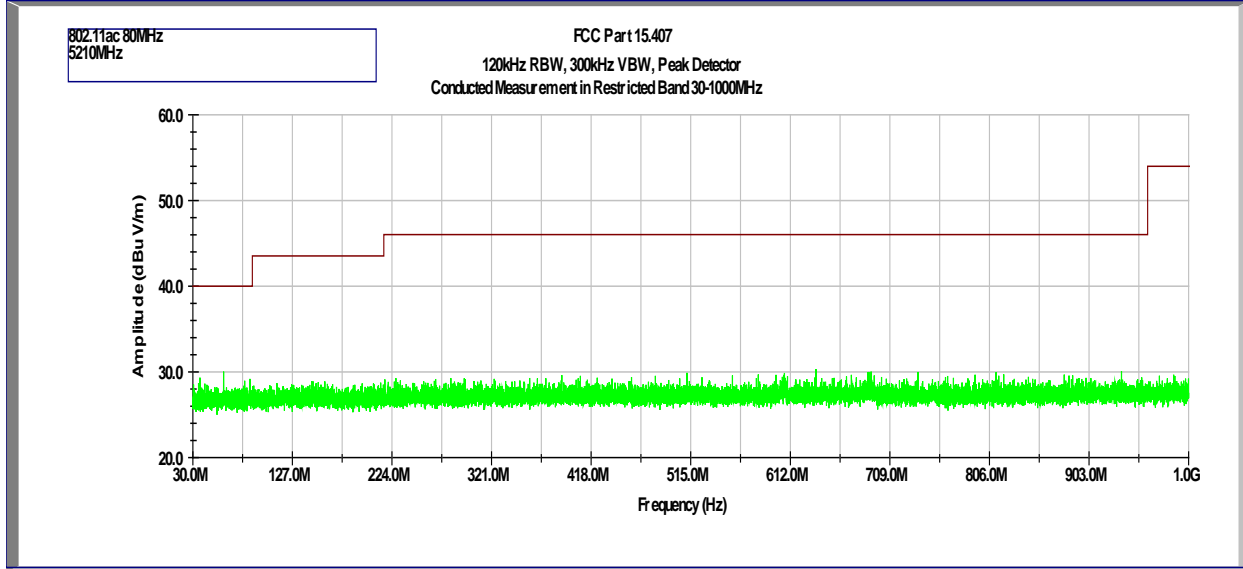

Out-of-Band Spurious Emissions at Antenna Port - 1 GHz to 40 GHz

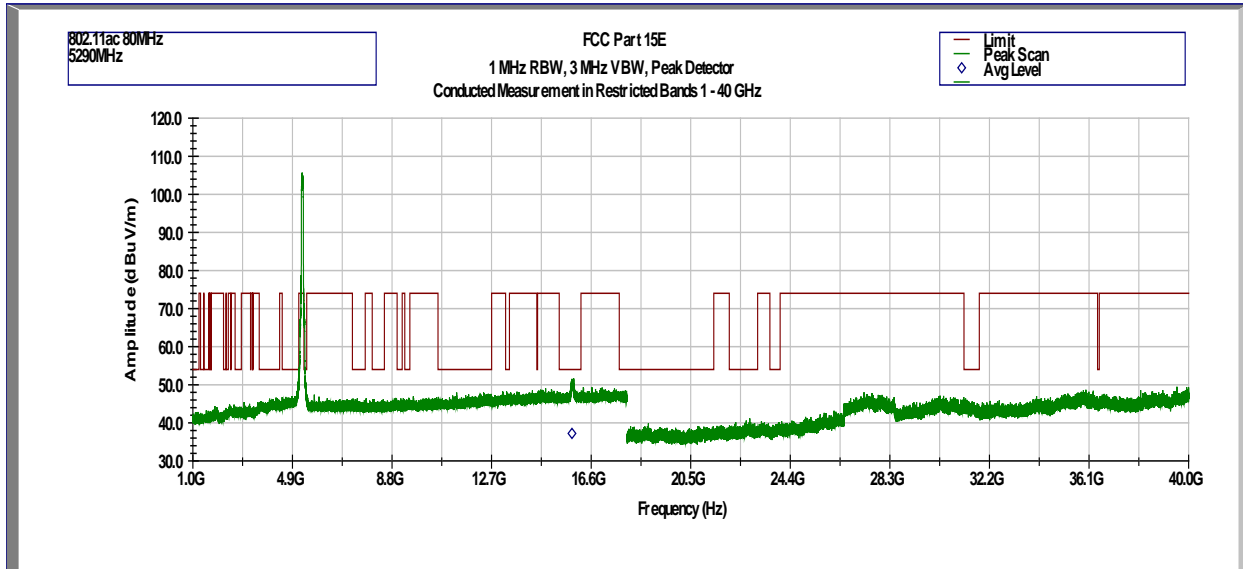

| Frequency | Corrected Amplitude | Limit  | Margin | Detector | Results |
|-----------|---------------------|--------|--------|----------|---------|
| GHz       | dBμV/m              | dBμV/m | dB     |          |         |
| 15.848    | 37.2                | 54     | -16.8  | Avg      | Pass    |