

4790411210 2.4G WIFI 802.11g 2412MHz Left edge 0mm

Communication System: UID 0, 2.45GHz Wi-Fi (0); Communication System Band: ISM 2.4GHz; Frequency: 2412 MHz;

Medium parameters used (interpolated): $f = 2412$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 39.62$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 2.03 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 36.48 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 4.28 W/kg

SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.543 W/kg

Maximum value of SAR (measured) = 2.67 W/kg

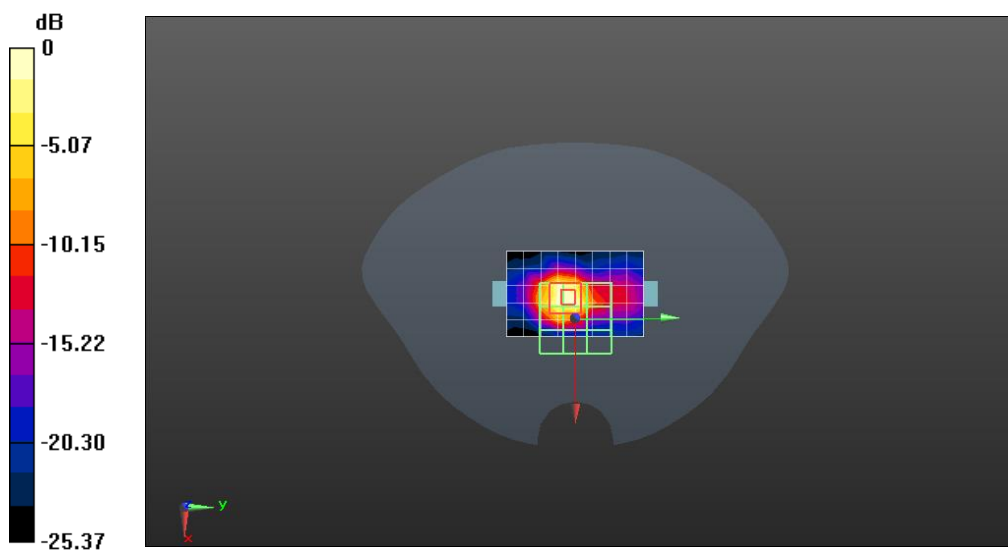

0 dB = 2.03 W/kg = 3.07 dBW/kg

4790411210 5G WIFI 802.11a 5200MHz Left edge 0mm

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5200 MHz;
Medium parameters used: $f = 5200$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.45$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:


- Probe: EX3DV4 - SN7383; ConvF(5.5, 5.5, 5.5); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 3.11 W/kg

Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 24.00 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 5.41 W/kg

SAR(1 g) = 1.33 W/kg; SAR(10 g) = 0.401 W/kg
Maximum value of SAR (measured) = 3.24 W/kg

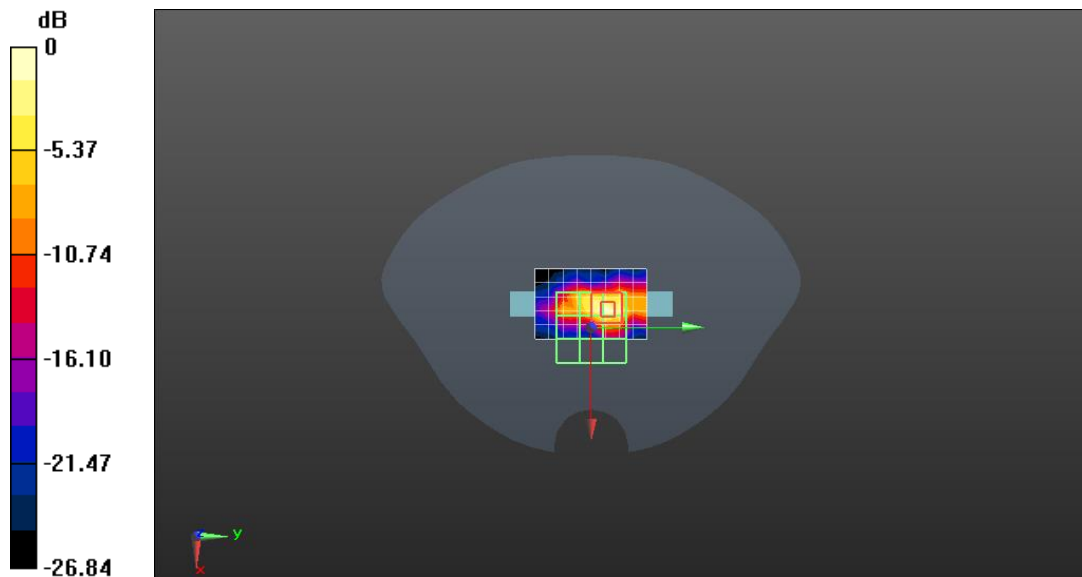

0 dB = 3.11 W/kg = 4.93 dBW/kg

4790411210 5G WIFI 802.11a 5785MHz Left edge 0mm

Communication System: UID 0, 5GHz Wi-Fi (0); Communication System Band: 5G Band(5030.0 - 5825.0 MHz); Frequency: 5785 MHz;

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 5.31$ S/m; $\epsilon_r = 35.67$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(5.05, 5.05, 5.05); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 29.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x9x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 3.52 W/kg


Configuration/Body/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 21.49 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 7.15 W/kg

SAR(1 g) = 1.32 W/kg; SAR(10 g) = 0.345 W/kg

Maximum value of SAR (measured) = 3.67 W/kg

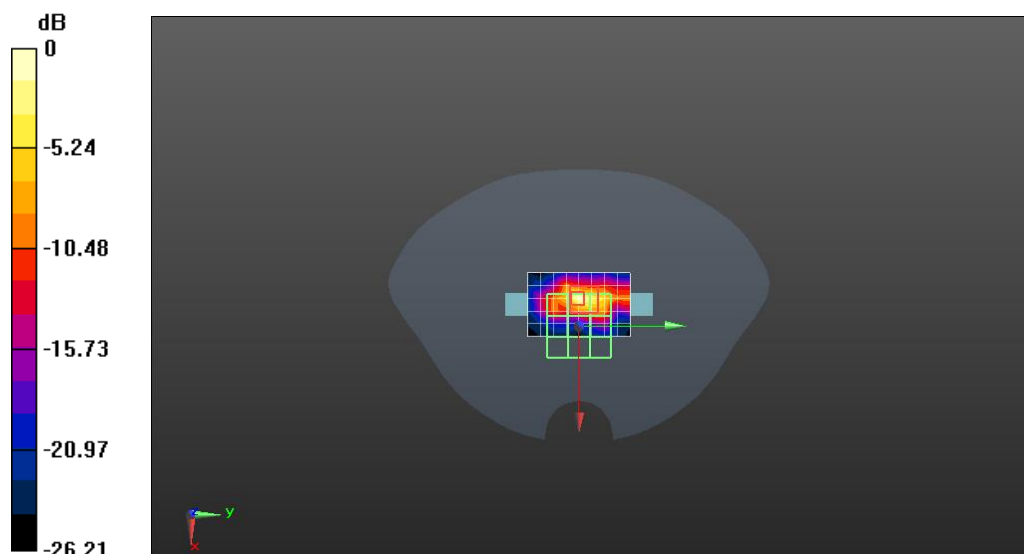

0 dB = 3.52 W/kg = 5.47 dBW/kg

4790411210 BLE 1M 2480MHz Left edge 0mm

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2480 MHz;

Medium parameters used: $f = 2480$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.48$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -24.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x13x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 0.137 W/kg


Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.249 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.086 W/kg; SAR(10 g) = 0.033 W/kg

Maximum value of SAR (measured) = 0.175 W/kg

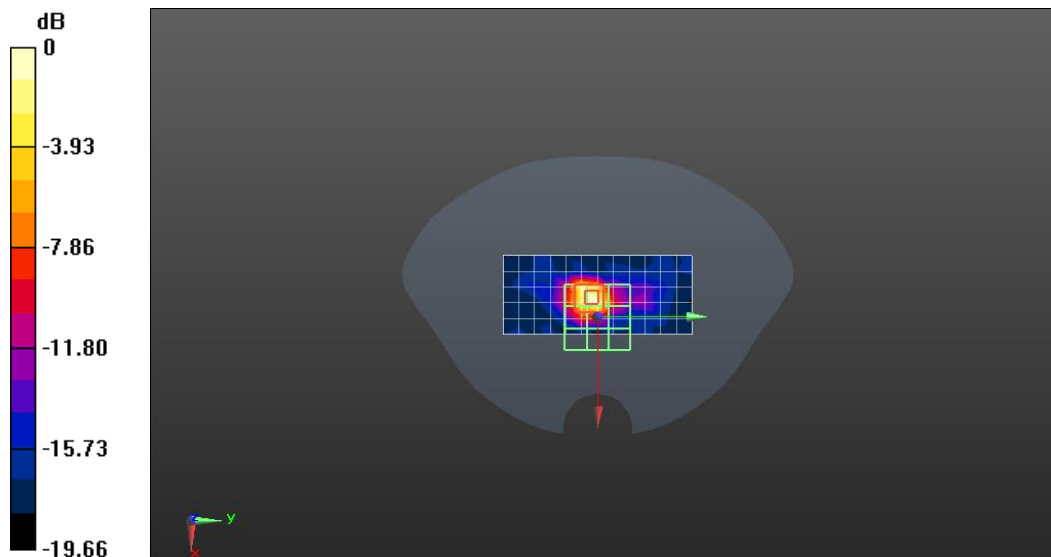

0 dB = 0.137 W/kg = -8.63 dBW/kg