



EMC TEST REPORT

Report Number: 101052328ATL-007A
Project Number: G10152328

Report Issue Date: November 25, 2014
Report Revised Date: April 9, 2015

Product Designation: IQMotion, QS1200

Standards: 47 CFR Part 15 Subpart C:2014 Section 15.231
RSS-210 Issue 8, 2010

Tested by:
Intertek Testing Services NA, Inc.
1950 Evergreen Blvd, Suite 100
Duluth, GA 30096 USA

Client:
Qolsys Inc.
1900 The Alameda, Suite 420
San Jose, CA. 95126 USA

Report prepared by

Mary Sampson/Senior Project Engineer

Report reviewed by

Krishna Vemuri/Senior Staff Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

1 Introduction and Conclusion

The tests indicated in section 2.0 were performed on the product constructed as described in section 4.0. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test Method, a list of the actual Test Equipment Used, documentation Photos, Results and raw Data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested **complies** with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

2 Test Summary

Section	Test full name	Result
3	Client Information	
4	Description of Equipment Under Test	
5	System Setup and Method	
6	Restrictions (47 CFR Part 15 Subpart C:2014 Section 15.231(a)(2) RSS-210 Issue 8, 2010, Section A1.1.1(b))	Pass
-	AC Mains Conducted Emissions (Battery operated device)	N/A
7	Fundamental Emissions (47 CFR Part 15 Subpart C:2014 Section 15.231(b) RSS-210 Issue 8, 2010, Section A1.1.2)	Pass
8	Radiated Spurious Emissions below 1GHz (47 CFR Part 15 Subpart C:2014 Section 15.231(b) RSS-210 Issue 8, 2010, Section A1.1.2)	Pass
9	Radiated Spurious Emissions Above 1 GHz (47 CFR Part 15 Subpart C:2014 Section 15.231(b) RSS-210 Issue 8, 2010, Section A1.1.2)	Pass
10	Bandwidth (47 CFR Part 15 Subpart C:2014 Section 15.231(c) RSS-210 Issue 8, 2010, Section A1.1.3)	Pass
11	Duty Cycle (47 CFR Part 15 Subpart C:2014 Section 15.35(c) RSS-GEN Issue 3, 2010, Section 4.5)	Pass
12	RF Exposure Compliance (47 CFR Part 2 Subpart J: 2014 Section 2.1091)	Pass
13	Revision History	

3 Client Information

This EUT was tested at the request of:

Client: Qolsys Inc.
1900 The Alameda, Suite 420
San Jose, CA. 95126
USA

Contact: Mark Skeen
Telephone: 408-857-8415
Fax: 408-927-5832
Email: mark.skeen@qolsys.com

4 Description of Equipment Under Test

Manufacturer: Qolsys Inc.
1900 The Alameda, Suite 420
San Jose, CA. 95126
USA

Equipment Under Test			
Description	Manufacturer	Model Number	Serial Number
Wireless Motion Detector	Qolsys Inc	IQMotion	QSBB134400052
Wireless Motion Detector	Qolsys Inc	IQMotion	QSBB134400054

Receive Date:	10/16/2014
Received Condition:	Good
Type:	Production

Description of Equipment Under Test (provided by client)

The IQMotion is a wireless motion detector to be used in the Qolsys IQ home security system.

Equipment Under Test Power Configuration			
Rated Voltage	Rated Current	Rated Frequency	Number of Phases
2.2 to 3 Vdc	30 μ A	N/A	N/A

Operating modes of the EUT:

No.	Descriptions of EUT Exercising
1	Continuous Transmission is a special test mode used only for simplifying the compliance testing process. This will never be activated by the end user.
2	Normal mode is transmission upon sensor activation or at supervisory interval (approximately 70 minutes).

Software used by the EUT:

No.	Descriptions of EUT Exercising
1	None provided

5 System Setup and Method


Cables					
ID	Description	Length (m)	Shielding	Ferrites	Termination
None					

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
None			

5.1 Method:

Configuration as required by ANSI C63.10: 2013.

5.2 EUT Block Diagram:



6 Restrictions

6.1 Method

Tests are performed in accordance with 47 CFR Part 15 Subpart C:2014 Section 15.231(a)(2) and RSS-210 Issue 8, 2010, Section A1.1.1(b).

TEST SITE: 10m Semi-Anechoic Chamber Control Room

10 Meter Semi-Anechoic Chamber The test site for radiated emissions is located at 1950 Evergreen Blvd, Suite 100, Duluth, Georgia 30096. It is a 10 meter semi-anechoic chamber manufactured by Panashield. Embedded in the floor is a 3 meter diameter turntable.

6.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
T006217;	THDX	Oregon Scientific	BA888	NSN	12/11/2013	12/11/2014
211505;	EMI Receiver	Hewlett Packard	8546A	3650A00362	04/09/2014	04/09/2015
015762;	EMI Receiver, Preselector section	Hewlett Packard	85460A	3330A00158	04/09/2014	04/09/2015

Software Utilized:


Name	Manufacturer	Version
None (Spectrum Analyzer Firmware)		

6.3 Results:

§ 15.231 Periodic operation in the band 40.66–40.70 MHz and above 70 MHz. (a) The provisions of this section are restricted to periodic operation within the band 40.66–40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation: A transmitter activated automatically shall cease transmission within 5 seconds after activation.

The sample tested was found to Comply.

6.4 Plots/Data:

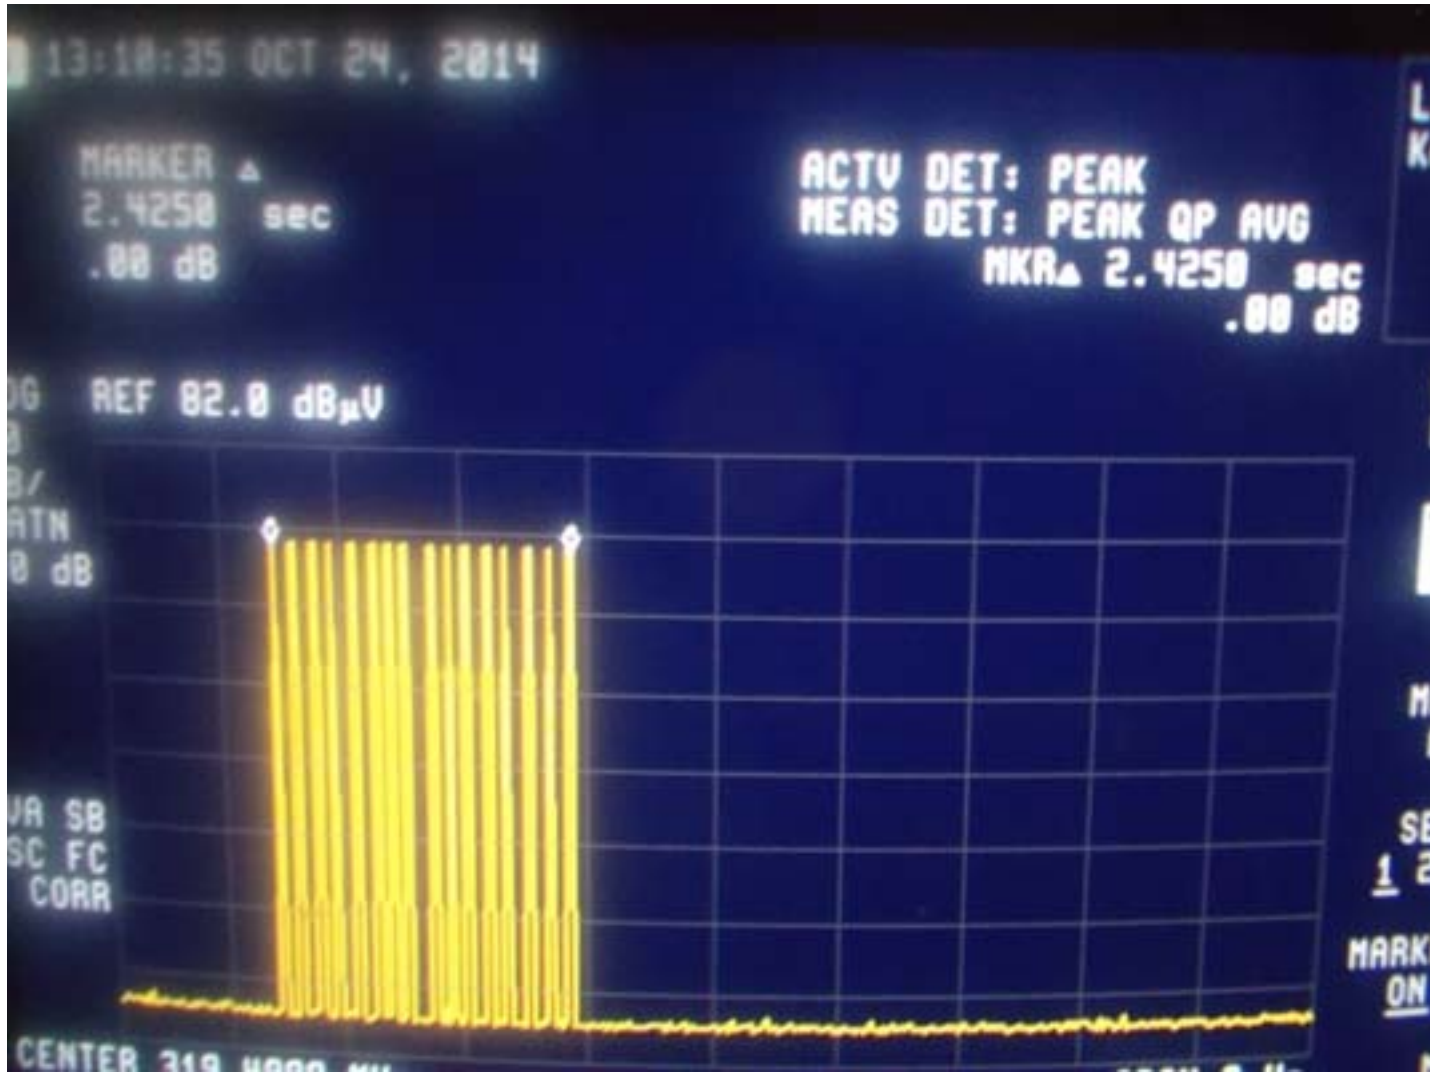

Test Personnel: Mary Sampson MTS
 Supervising/Reviewing Engineer: N/A
 (Where Applicable)
 Product Standard: 47 CFR Part 15 Subpart C:2014 Section 15.231(a)(2) and RSS-210 Issue 8, 2010, Section A1.1.1(b)
 Input Voltage: 2 "AAA" batteries

Test Date: 10/24/14
 Limit Applied: See Section 6.3
 Ambient Temperature: 23 °C
 Relative Humidity: 47 %
 Atmospheric Pressure: 990 mbars

Deviations, Additions, or Exclusions: None

7 Fundamental Emissions

7.1 Method

Tests are performed in accordance with 47 CFR Part 15 Subpart C:2014 Section 15.231(b) and RSS-210 Issue 8, 2010, Section A1.1.2.

TEST SITE: 10m Semi-Anechoic Chamber

10 Meter Semi-Anechoic Chamber The test site for radiated emissions is located at 1950 Evergreen Blvd, Suite 100, Duluth, Georgia 30096. It is a 10 meter semi-anechoic chamber manufactured by Panashield. Embedded in the floor is a 3 meter diameter turntable.

Measurement Uncertainty

For conducted emissions, U_{lab} (2.8 dB in worst case) $< U_{CISPR}$ (3.6 dB), which is the reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 22 and CISPR 11 (for 2006 and later revisions) Clause 11.

Sample Calculations

The following is how net line-conducted readings were determined:

$$NF = RF + LF + CF + AF$$

Where NF = Net Reading in dB μ V

RF = Reading from receiver in dB μ V

LF = LISN or ISN Correction Factor in dB

CF = Cable Correction Factor in dB

AF = Attenuator Loss Factor in dB

To convert from dB μ V to μ V or mV the following was used:

$$UF = 10^{(NF / 20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

$$NF = \text{Net Reading in dB}\mu\text{V}$$

Example:

$$NF = RF + LF + CF + AF = 28.5 + 0.2 + 0.4 + 20.0 = 49.1 \text{ dB}\mu\text{V}$$

$$UF = 10^{(49.1 \text{ dB}\mu\text{V} / 20)} = 285.1 \mu\text{V/m}$$

7.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
T00621;7	THDX	Oregon Scientific	BA888	NSN	12/11/2013	12/11/2014
200162;	EMI Receiver (20Hz-40GHz)	Rohde & Schwarz	ESU 40	100314	11/21/2013	11/21/2014
211386;	Antenna, BiLog, 20-2000MHz	Chase	CBL6112B	2622	12/12/2013	12/12/2014
TT6;	RF Coax Cable. Rated 9KHz to 2 GHz.	Andrews	Cable TT-6	TT6	06/18/2014	06/18/2015
E205;	Cable, N-N, 3 meters, 18GHz	Megaphase	TM18-NKNK-118	9053201 003	05/28/2014	05/28/2015
MP3;	Cable MP3, 18 GHz, N, 10m	Megaphase	G919-NKNK-394	MP3	05/08/2014	05/08/2015

Software Utilized:

Name	Manufacturer	Version
None (Spectrum Analyzer Firmware)		

7.3 Results:


47CFR Part 15 §15.231(b)

In addition to the provisions of §15.205, the field strength of emissions from intentional radiators operated under §15.231 shall not exceed the following:

Fundamental Frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/com)
40.66 - 40.7	2,250	225
70 - 130	1,250	125
130- 174	¹ 1,250 to 3,750	¹ 125 to 375
174 - 260	3,750	375
260 - 470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250
¹ Linear Interpolations		

The sample tested was found to Comply.

7.4 Setup Photographs:

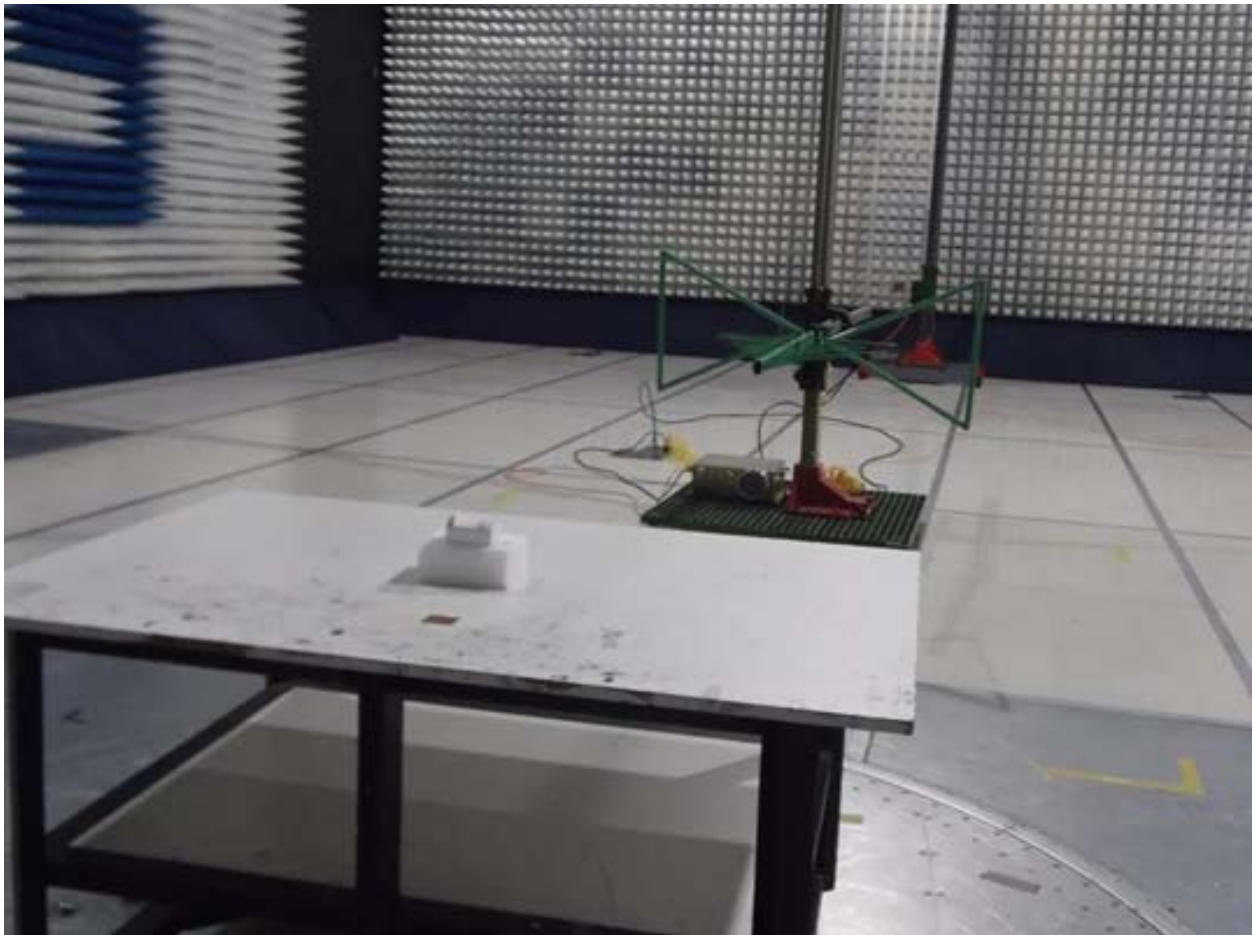

7.5 Plots/Data:

Client: Qolsys Inc
Model Number: IQMotion
Project Number: GI01052328
Tested By: MS
Date: 10/24/14
Frequency Range (MHz): Fundamental
Input power: 2 "AAA" batteries

Receiver: R&S ESU40
Antenna: Chase 2622
Cables: TT-6+MP3+E-205
Preamp:
Limit: FCC15 Class B-3m

Test Distance (m): 3

Modifications for compliance (y/n): n

Notes: Sample 2 of 2

A	B	C	D	E	F	G	H	I	J	K	
Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Duty Cycle Factor dB	Net dB(uV/m)	3m Limit dB(uV/m)	Margin dB	Axis / Detector	
V	319.500	62.7	14.0	3.0	0.0	0.0	79.7	95.9	-16.2	X/PK	
V	319.500	62.7	14.0	3.0	0.0	31.2	48.5	75.9	-27.4	X/AVG	
V	319.500	75.5	14.0	3.0	0.0	0.0	92.5	95.9	-3.4	Y/PK	
V	319.500	75.5	14.0	3.0	0.0	31.2	61.3	75.9	-14.6	Y/AVG	
V	319.500	71.6	14.0	3.0	0.0	0.0	88.6	95.9	-7.3	Z/PK	
V	319.500	71.6	14.0	3.0	0.0	31.2	57.4	75.9	-18.5	Z/AVG	
H	319.500	77.7	14.5	3.0	0.0	0.0	95.2	95.9	-0.7	X/PK	
H	319.500	77.7	14.5	3.0	0.0	31.2	64.0	75.9	-11.9	X/AVG	
H	319.500	68.2	14.5	3.0	0.0	0.0	85.7	95.9	-10.2	Y/PK	
H	319.500	68.2	14.5	3.0	0.0	31.2	54.5	75.9	-21.4	Y/AVG	
H	319.500	74.5	14.5	3.0	0.0	0.0	92.0	95.9	-3.9	Z/PK	
H	319.500	74.5	14.5	3.0	0.0	31.2	60.8	75.9	-15.1	Z/AVG	
Calculations		H=C+D+E-F-G		J=H-I							

Note: X, Y, and Z denote the EUT was placed in the X, Y and Z orthogonal axes.

Test Personnel: Mary Sampson MTS
 Supervising/Reviewing Engineer: _____
 (Where Applicable) N/A
 Product Standard: 47 CFR Part 15 Subpart C:2014 Section 15.231(b) and RSS-210 Issue 8, 2010, Section A1.1.2
 Input Voltage: 2 "AAA" batteries
 Pretest Verification w/ Ambient Signals or BB Source: BB Source

Test Date: 10/24/14
 Limit Applied: See Section 7.3
 Ambient Temperature: 23 °C
 Relative Humidity: 47 %
 Atmospheric Pressure: 990 mbars

Deviations, Additions, or Exclusions: None

8 Radiated Spurious Emissions below 1GHz

8.1 Method

Tests are performed in accordance with 47 CFR Part 15 Subpart C:2014 Section 15.231(b) and RSS-210 Issue 8, 2010, Section A1.1.2.

TEST SITE: 10m Semi-Anechoic Chamber

10 Meter Semi-Anechoic Chamber The test site for radiated emissions is located at 1950 Evergreen Blvd, Suite 100, Duluth, Georgia 30096. It is a 10 meter semi-anechoic chamber manufactured by Panashield. Embedded in the floor is a 3 meter diameter turntable.

8.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
T006217;	THDX	Oregon Scientific	BA888	NSN	12/11/2013	12/11/2014
TT6;	RF Coax Cable. Rated 9KHz to 2 GHz.	Andrews	Cable TT-6	TT6	06/18/2014	06/18/2015
MP3;	Cable MP3, 18 GHz, N, 10m	Megaphase	G919-NKNK-394	MP3	05/08/2014	05/08/2015
E205;	Cable, N-N, 3 meters, 18GHz	Megaphase	TM18-NKNK-118	9053201 003	05/28/2014	05/28/2015
E209;	RF Coax Cable	Megaphase	TM18-N1N1-120	14065201-003	05/08/2014	05/08/2015
200162;	EMI Receiver (20Hz-40GHz)	Rohde & Schwarz	ESU 40	100314	11/21/2013	11/21/2014
200069;	Preamplifier, 10 MHz to 2000 MHz, 30 dB gain	Mini-Circuits	ZKL-2	D011105	01/08/2014	01/08/2015
211386;	Antenna, BiLog, 20-2000MHz	Chase	CBL6112B	2622	12/12/2013	12/12/2014

Software Utilized:

Name	Manufacturer	Version
Tile	Quantum Change	3.4.K.22

8.3 Results:

Fundamental Frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/com)
40.66 - 40.7	2,250	225
70 - 130	1,250	125
130 - 174	¹ 1,250 to 3,750	¹ 125 to 375
174 - 260	3,750	375
260 - 470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250
¹ Linear Interpolations		

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.

Fundamental Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

The sample tested was found to Comply.

8.4 Setup Photographs:



8.5 Plots/Data:

Client: Qolsys Inc Receiver: R&S ESU 40
 Model Number: QS-1200 Antenna: Chase 2622
 Project Number: G101052328 Cables: TT-6+MP3+E-205+E-209
 Tested By: MS Preamp: ZKL-2 200069
 Date: 10/29/14 Limit: FCC15 Class B-3m
 Frequency Range (MHz): 30-1000 Test Distance (m): 3
 Input power: 2 "AAA" batteries Modifications for compliance (y/n): n

Notes: Sample 2 of 2

A	B	C	D	E	F	G	H	I	J	K	
Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Duty Cycle Factor dB	Net dB(uV/m)	3m Limit dB(uV/m)	Margin dB	Axis / Detector	
V	639.000	43.9	19.8	5.3	31.0	0.0	38.0	75.9	-37.9	X/PK	
V	639.000	43.9	19.8	5.3	31.0	31.2	6.8	55.9	-49.1	X/AVG	
V	639.000	56.4	19.8	5.3	31.0	0.0	50.5	75.9	-25.4	Y/PK	
V	639.000	56.4	19.8	5.3	31.0	31.2	19.3	55.9	-36.6	Y/AVG	
V	639.000	52.8	19.8	5.3	31.0	0.0	46.9	75.9	-29.1	Z/PK	
V	639.000	52.8	19.8	5.3	31.0	31.2	15.7	55.9	-40.3	Z/AVG	
H	639.000	59.0	19.8	5.3	31.0	0.0	53.1	75.9	-22.8	X/PK	
H	639.000	59.0	19.8	5.3	31.0	31.2	21.9	55.9	-34.0	X/AVG	
H	639.000	47.1	19.8	5.3	31.0	0.0	41.2	75.9	-34.7	Y/PK	
H	639.000	47.1	19.8	5.3	31.0	31.2	10.0	55.9	-45.9	Y/AVG	
H	639.000	50.4	19.8	5.3	31.0	0.0	44.5	75.9	-31.4	Z/PK	
H	639.000	50.4	19.8	5.3	31.0	31.2	13.3	55.9	-42.6	Z/AVG	
V	958.500	58.3	21.2	6.6	30.6	0.0	55.5	75.9	-20.4	X/PK	
V	958.500	58.3	21.2	6.6	30.6	31.2	24.3	55.9	-31.6	X/AVG	
V	958.500	63.0	21.2	6.6	30.6	0.0	60.2	75.9	-15.7	Y/PK	
V	958.500	63.0	21.2	6.6	30.6	31.2	29.0	55.9	-26.9	Y/AVG	
V	958.500	56.4	21.2	6.6	30.6	0.0	53.6	75.9	-22.3	Z/PK	
V	958.500	56.4	21.2	6.6	30.6	31.2	22.4	55.9	-33.5	Z/AVG	
H	958.500	58.1	22.4	6.6	30.6	0.0	56.5	75.9	-19.4	X/PK	
H	958.500	58.1	22.4	6.6	30.6	31.2	25.3	55.9	-30.6	X/AVG	
H	958.500	46.5	22.4	6.6	30.6	0.0	44.9	75.9	-31.0	Y/PK	
H	958.500	46.5	22.4	6.6	30.6	31.2	13.7	55.9	-42.2	Y/AVG	
H	958.500	59.2	22.4	6.6	30.6	0.0	57.6	75.9	-18.3	Z/PK	
H	958.500	59.2	22.4	6.6	30.6	31.2	26.4	55.9	-29.5	Z/AVG	
Calculations		H=C+D+E-F-G			J=H-I						

Note: X, Y, and Z denote the EUT was placed in the X, Y and Z orthogonal axes.

Test Personnel: Mary Sampson *MTS* Test Date: 10/29/14
 Supervising/Reviewing Engineer: _____
 (Where Applicable) N/A
 Product Standard: 47 CFR Part 15 Subpart C:2014 Section 15.231(b) and RSS-210 Issue 8, 2010, Section A1.1.2
 Input Voltage: 2 "AAA" batteries
 Pretest Verification w/ Ambient Signals or BB Source:: BB source
 Limit Applied: See Section 8.3
 Ambient Temperature: 21.5 °C
 Relative Humidity: 43 %
 Atmospheric Pressure: 983 mbars

Deviations, Additions, or Exclusions: None

9 Radiated Spurious Emissions Above 1 GHz

9.1 Method

Tests are performed in accordance with 47 CFR Part 15 Subpart C:2014 Section 15.231(b) RSS-210 Issue 8, 2010, Section A1.1.2.

TEST SITE: 10m Semi-Anechoic Chamber

10 Meter Semi-Anechoic Chamber The test site for radiated emissions is located at 1950 Evergreen Blvd, Suite 100, Duluth, Georgia 30096. It is a 10 meter semi-anechoic chamber manufactured by Panashield. Embedded in the floor is a 3 meter diameter turntable.

9.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
T006217:	THDX	Oregon Scientific	BA888	NSN	12/11/2013	12/11/2014
213061:	Antenna, Horn, <18 GHz	EMCO	3115	9208-3919	07/22/2014	07/22/2015
200162:	EMI Receiver (20Hz-40GHz)	Rohde & Schwarz	ESU 40	100314	11/21/2013	11/21/2014
MP4:	RF Coax Cable	Megaphase	G919-N1N1-310	1GVT41411500101	08/26/2014	08/26/2015
MP5:	RF Coax Cable	Megaphase	G919-N1N1-310	1GVT41411500102	08/26/2014	08/26/2015
200108:	Preamplifier, 20 MHz to 18 GHz, 40 dB	A.H. Systems	PAM-0118	199	02/10/2014	02/10/2015

Software Utilized:

Name	Manufacturer	Version
Tile	Quantum Change	3.4.K.22

9.3 Results:

Fundamental Frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/com)
40.66 - 40.7	2,250	225
70 - 130	1,250	125
130- 174	¹ 1,250 to 3,750	¹ 125 to 375
174 - 260	3,750	375
260 - 470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250
¹ Linear Interpolations		

The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.

Fundamental Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3
**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.		

The sample tested was found to Comply.

9.4 Setup Photographs:



9.5 Plots/Data:

Client: Qolsys Inc	Receiver: R&S ESU 40
Model Number: QS-1200	Antenna: EMCO 3115
Project Number: G101052328	Cables: MP4+MP5
Tested By: MS	Preamp: PAM-0118
Date: 10/30/14	Limit: FCC15 Class B-3m
Frequency Range (MHz): 1000-3200	Test Distance (m): 3
Input power: 2 "AAA" batteries	Modifications for compliance (y/n): n

Notes: Sample 2 of 2

A	B	C	D	E	F	G	H	I	J	K
Ant. Pol. (V/H)	Frequency MHz	Reading dB(uV)	Antenna Factor dB(1/m)	Cable Loss dB	Pre-amp Factor dB	Duty Cycle Factor dB	Net dB(uV/m)	3m Limit dB(uV/m)	Margin dB	Axis / Detector
H	1597.500	60.2	25.7	4.9	40.9	0.0	49.8	74.0	-24.2	X/PK
H	1597.500	60.2	25.7	4.9	40.9	31.2	18.6	54.0	-35.4	X/AVG
H	1917.000	51.9	27.4	5.5	41.1	0.0	43.7	75.9	-32.2	X/PK
H	1917.000	51.9	27.4	5.5	41.1	31.2	12.5	55.9	-43.4	X/AVG
H	2236.500	63.5	27.7	5.9	41.0	0.0	56.1	74.0	-17.9	X/PK
H	2236.500	63.5	27.7	5.9	41.0	31.2	24.9	54.0	-29.1	X/AVG
H	2875.500	60.8	28.9	6.7	41.1	0.0	55.3	74.0	-18.7	X/PK
H	2875.500	60.8	28.9	6.7	41.1	31.2	24.1	54.0	-29.9	X/AVG
Calculations		H=C+D+E-F-G			J=H-I					

Note: EUT was placed in the X, Y and Z orthogonal axes. Worst case data presented.

Test Personnel: <u>Mary Sampson</u> <i>MTS</i>	Test Date: <u>10/30/14</u>
Supervising/Reviewing Engineer: <u>N/A</u>	
(Where Applicable) <u>47 CFR Part 15 Subpart C:2014 Section 15.231(b) and RSS-210 Issue 8, 2010, Section A1.1.2</u>	Limit Applied: <u>See section 9.3</u>
Product Standard: <u>2 "AAA" batteries</u>	
Input Voltage: <u>2 "AAA" batteries</u>	
Pretest Verification w/ Ambient Signals or BB Source: <u>BB source</u>	Ambient Temperature: <u>21 °C</u>
	Relative Humidity: <u>43 %</u>
	Atmospheric Pressure: <u>983 mbars</u>

Deviations, Additions, or Exclusions: None

10 Bandwidth

10.1 Method

Tests are performed in accordance with 47 CFR Part 15 Subpart C:2014 Section 15.231(c) and RSS-210 Issue 8, 2010, Section A1.1.3.

TEST SITE: 10m Semi-Anechoic Chamber Control Room

The EMC Lab has one Semi-anechoic Chamber and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

10.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
200162:	EMI Receiver (20Hz-40GHz)	Rohde & Schwarz	ESU 40	100314	11/21/2013	11/21/2014

Software Utilized:


Name	Manufacturer	Version
None (Spectrum Analyzer Firmware)		

10.3 Results:

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

The sample tested was found to Comply.

10.4 Data:

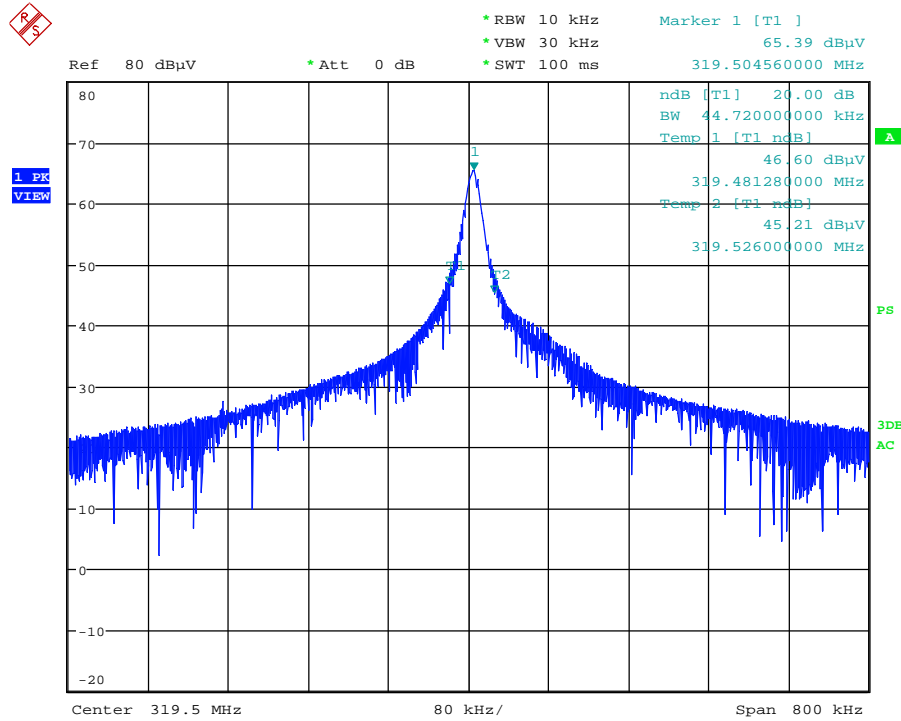

Date: 10.NOV.2014 10:57:04

Test Personnel: Mary Sampson MTS
 Supervising/Reviewing Engineer: _____
 (Where Applicable) N/A
 Product Standard: 47 CFR Part 15 Subpart C:2014 Section 15.231(c) and RSS-210 Issue 8, 2010, Section A1.1.3
 Input Voltage: 2 "AAA" batteries

Test Date: 11/10/14
 Test Levels: See Section 10.3
 Ambient Temperature: 21.5 °C
 Relative Humidity: 35 %
 Atmospheric Pressure: 982 mbars

Deviations, Additions, or Exclusions: None

11 Duty Cycle

11.1 Method

Tests are performed in accordance with 47 CFR Part 15 Subpart C:2014 Section 15.35(c) and RSS-GEN Issue 3, 2010, Section 4.5.

TEST SITE: 10m Semi-Anechoic Chamber Control Room

The EMC Lab has one Semi-anechoic Chamber and one Shielded Chamber. AC Mains Power is available at 120, 230, and 277 Single Phase; 208, 400, and 480 3-Phase. Large reference ground-planes are installed in the general lab area to facilitate EMC work not requiring a shielded environment.

11.2 Test Equipment Used:

Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due
200162:	EMI Receiver (20Hz-40GHz)	Rohde & Schwarz	ESU 40	100314	11/21/2013	11/21/2014

Software Utilized:


Name	Manufacturer	Version
None (Spectrum Analyzer Firmware)		

11.3 Results:


Unless otherwise specified, e.g., § 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The sample tested was found to Comply.

11.4 Data:

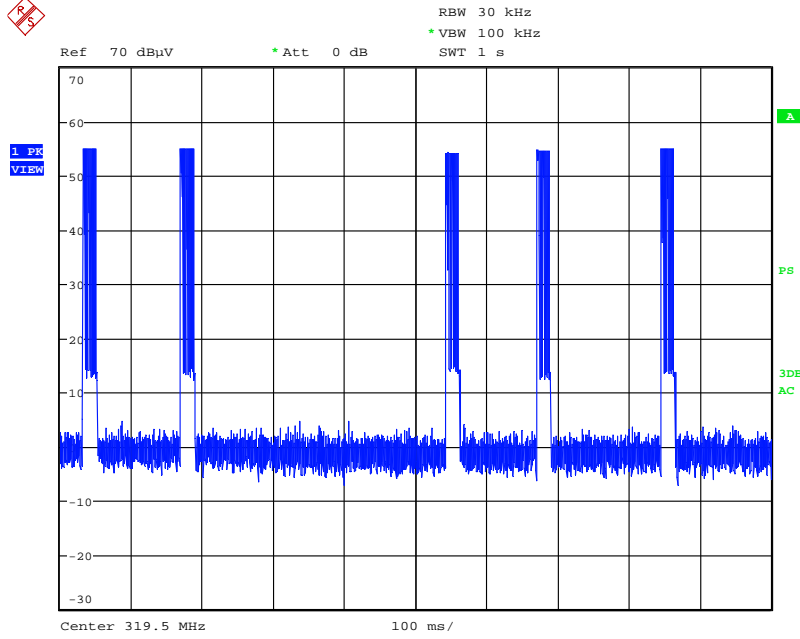


Date: 10.NOV.2014 09:38:21

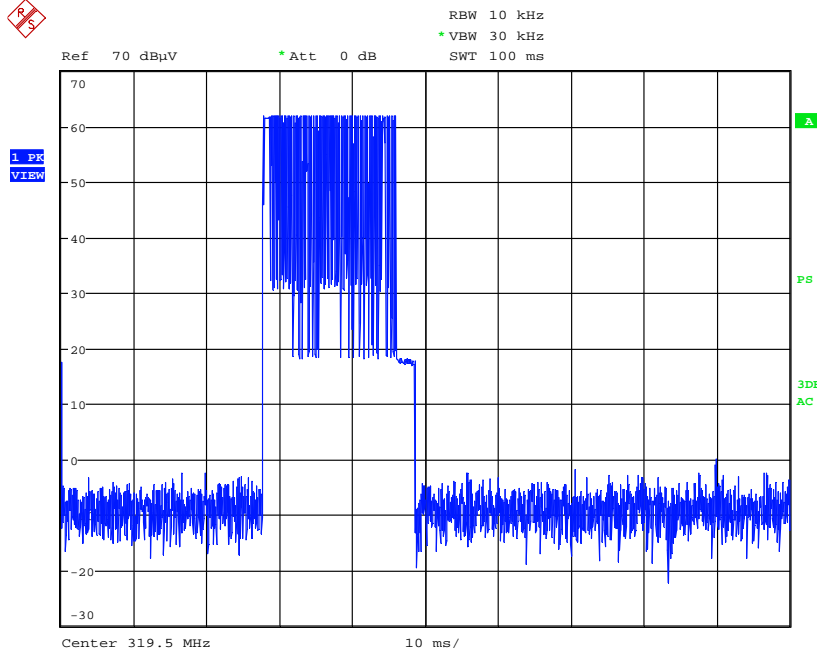

Date: 10.NOV.2014 09:41:20




1 PK
VIEW

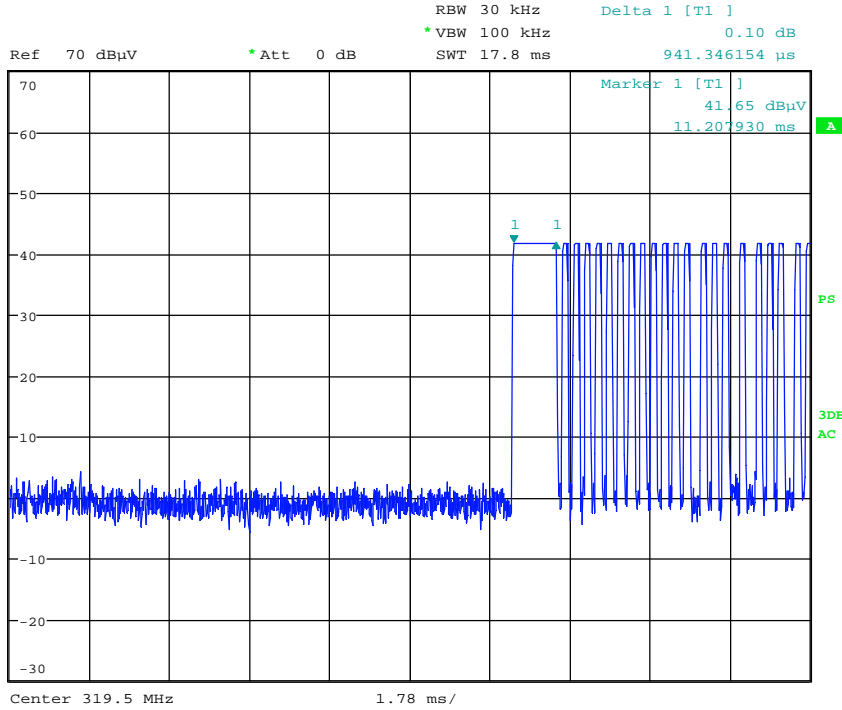

Date: 10.NOV.2014 09:27:19



1 PK
VIEW

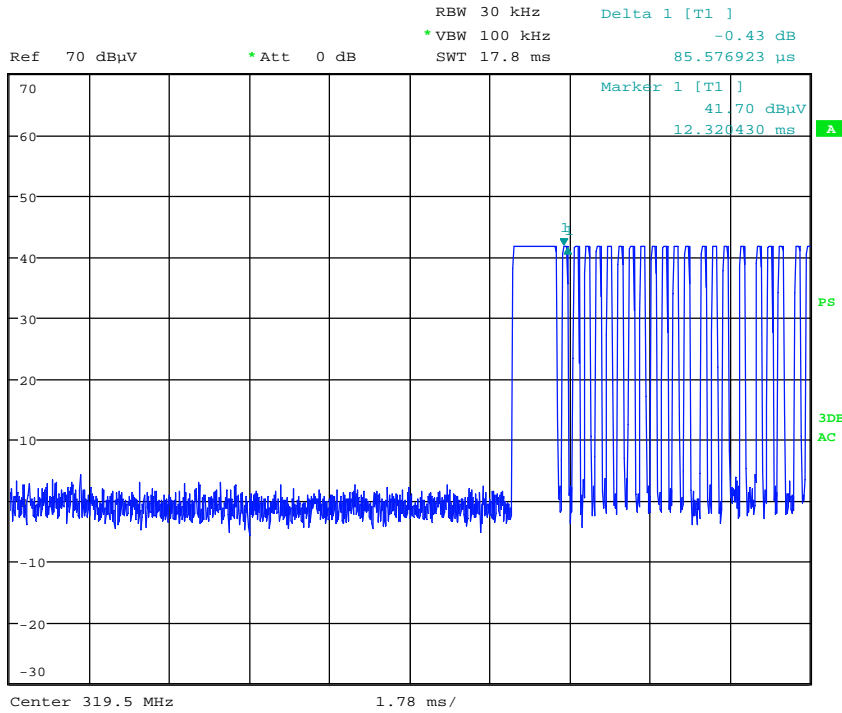

Date: 10.NOV.2014 09:29:03

Duty cycle correction factor =
1 pulse at .941346154 ms + 21 pulses at 0.085576928 ms/100 ms = 0.02652884714
Duty correction factor = 20 log (0.02652884714) = -31.2 dB

Test Personnel: Mary Sampson *MTS*
Supervising/Reviewing Engineer: _____
(Where Applicable) N/A
47 CFR Part 15 Subpart A:2014 Section 15.35(c) and RSS-Gen Issue 4, 2014,
Product Standard: Section 6.10
Input Voltage: 2 "AAA" batteries

Test Date: 11/10/14
:
Test Levels: See Section 11.3
Ambient Temperature: 21.5 °C
Relative Humidity: 35 %
Atmospheric Pressure: 982 mbars

Deviations, Additions, or Exclusions: None

12 RF Exposure

SAR test exclusion threshold formula according to FCC KDB 447898 D01 v05r02 is

$$P \cdot \sqrt{f/d} < 3$$

where

P is max. power of channel, including tune-up tolerance, mW

f is operating frequency in GHz

d is min. test separation distance, mm

The maximum measured radiated power is 0.993 mW (-0.03 dBm). The antenna gain, G is 3.62 dBi (2.3 numerical). Therefore, the conducted power (P) is 0.432 mW.

At 5mm distance the condition for SAR exclusion threshold is

$$0.432 \times \sqrt{0.3195} \div 5 = 0.03 \text{ which is less than 3.}$$

Therefore, SAR testing is not required as the SAR Test Exclusion Threshold condition is satisfied.

SAR Exemption limit according to IC RSS-102 Issue 5, at 5 mm separation distance = 68.5 mW
Routine evaluation is not required since the higher of the maximum conducted or equivalent isotropically radiated power (e.i.r.p.) source-based, time averaged output power is below the exemption limit.

13 Revision History

Revision Level	Date	Report Number	Prepared By	Reviewed By	Notes
0	11/25/14	101052328ATL-007A	MS <i>MTS</i>	KV	Original Issue
1	04/09/2015	101052328ATL-007A	MS <i>MTS</i>	KV	Revised Section 12