

Test Report # 319353 B (RFx)

Equipment Under Test: KOLO LoRa Module

Test Date(s): November 26th, 2019 to October 7th, 2020

Prepared for: Georgia Pacific
 Attn: Kim Cannon
 1915 Marathon Avenue
 Neenah, WI 54956

Report Issued by: Zach Wilson, EMC Engineer

Signature:  Date: 10/23/2020

Report Reviewed by: Adam Alger, Quality Manager

Signature:  Date: 10/9/2020

Report Constructed by: Zach Wilson, EMC Engineer

Signature:  Date: 10/8/2020

This test report may not be reproduced, except in full, without approval of Laird Connectivity, Inc.

Company: Georgia Pacific	Page 1 of 16	Name: KOLO LoRa Module
Report: TR319353 B		Model: ASM-0000001076
Job: C-3372		Serial: Engineering Sample

CONTENTS

Contents.....	2
Laird Connectivity Test Services in Review	3
1 Test Report Summary	4
2 Client Information.....	5
2.1 Equipment Under Test (EUT) Information	5
2.2 Product Description	5
2.3 Modifications Incorporated for Compliance.....	5
2.4 Deviations and Exclusions from Test Specifications	5
2.5 Radio Programming Information	6
2.6 Radio Power Information.....	6
2.7 Distance to User and Use Environment.....	6
3 References	7
4 Uncertainty Summary	8
5 Test Data	9
5.1 LoRa Fundamental Emission	9
5.2 BLE Fundamental Emission	11
6 Exclusion Calculation.....	13
6.1 Technical Brief.....	13
6.2 FCC – LoRa MPE Calculation.....	13
6.3 FCC – BLE MPE Calculation.....	14
6.4 FCC – Simultaneous Transmission MPE total.....	14
6.5 Industry Canada	15
7 Revision History	16

Laird Connectivity Test Services in Review

The Laird Connectivity, Inc. laboratory located at W66 N220 Commerce Court Cedarburg, Wisconsin, 53012 USA is recognized through the following organizations:



A2LA – American Association for Laboratory Accreditation

Accreditation based on ISO/IEC 17025:2017 with Electrical (EMC) Scope

A2LA Certificate Number: 1255.01

Scope of accreditation includes all test methods listed herein unless otherwise noted



Federal Communications Commission (FCC) – USA

Accredited Test Firm Registration Number: 953492

Recognition of two 3 meter Semi-Anechoic Chambers



**Government
of Canada**

Innovation, Science and Economic Development Canada

Accredited U.S. Identification Number: US0218

Recognition of two 3 meter Semi-Anechoic Chambers

Company: Georgia Pacific	Page 3 of 16	Name: KOLO LoRa Module
Report: TR319353 B		Model:ASM-0000001076
Job: C-3372		Serial: Engineering Sample

1 TEST REPORT SUMMARY

During **November 26th, 2019 – October 7th, 2020** the Equipment Under Test (EUT), **KOLO LoRa Module**, as provided by **Georgia Pacific** was tested to the following requirements of the **Federal Communications Commission** and **Innovation, Science and Economic Development Canada** :

Test Requirements	Description	Specification	Method	Compliant
RSS-102	Radio Frequency Exposure Compliance of Radiocommunication Apparatus	Reported	RSS-102 Section 2.5.2	Reported
FCC Part 1.1307, 2.1091, 2.1093	RF Exposure and equipment authorization requirements	Reported	FCC KDB 447498 D01	Reported

Notice:

The results relate only to the item tested as configured and described in this report. Any additional configurations, modes of operation, or modifications made to the equipment under test after the specified test date(s) are at the decision of the client and may not apply to the data seen in this test report.

The decision rule for Pass / Fail assessment to the specification or standard listed in this test report has been agreed upon by the client and laboratory to be as follows:

Measurement Type	Rule
Emissions – Amplitude	N/A
Emissions – Frequency	N/A
Immunity	N/A

2 CLIENT INFORMATION

Company Name	Georgia Pacific
Contact Person	Kim Cannon
Address	1915 Marathon Avenue Neenah, WI 54956

2.1 Equipment Under Test (EUT) Information

The following information has been supplied by the client

Product Name	KOLO LoRa Module
Model Number	ASM-0000001076
Serial Number	Engineering Sample
LoRa Radio FCC ID	2AALY-531GP
LoRa Radio IC ID	21620-531GP
BLE Radio FCC ID	SQGBL654
BLE Radio IC ID	3147A-BL654

2.2 Product Description

The EUT contains a custom LoRa radio with a Molex 206764 flexible dipole antenna with a U.FL connector and a peak gain of 1.3 dBi. The EUT also contains the pre-certified Laird BL654 BLE radio utilizing an internal PCB F-type antenna with a maximum gain of -1.0 dBi.

The EUT input voltage was 3.3 VDC provided by a lab power supply. The EUT can also be powered by removable batteries.

The radios can transmit simultaneously.

2.3 Modifications Incorporated for Compliance

None noted at time of test

2.4 Deviations and Exclusions from Test Specifications

None noted at time of test

Company: Georgia Pacific	Page 5 of 16	Name: KOLO LoRa Module
Report: TR319353 B		Model: ASM-0000001076
Job: C-3372		Serial: Engineering Sample

2.5 Radio Programming Information

EUT programmed using Tera Term v4.99. The radio manufacturer provided the commands to put the radio into the correct test modes. The firmware version was PRT-0000000174. The tested LoRa channels were, 903.0 MHz (Low), 907.8 MHz (Mid), and 914.2 MHz (High). The tested BLE channels were 2402 MHz (Low), 2440 MHz (Mid), and 2480 MHz (High).

2.6 Radio Power Information

The end user will have the capability of changing the power levels. The minimum power setting is -17 . The maximum power setting is 14. The EUT was tested at both power levels.

2.7 Distance to User and Use Environment

Per customer, the radio will be greater than 20cm from the user’s body/head. The EUT is a mobile device used in an uncontrolled environment.

Company: Georgia Pacific	Page 6 of 16	Name: KOLO LoRa Module
Report: TR319353 B		Model:ASM-0000001076
Job: C-3372		Serial: Engineering Sample

3 REFERENCES

Publication	Edition	Date
CFR Title 47	-	2020
RSS-102	5	2015
FCC KDB 447498 D01	v06	2015

4 UNCERTAINTY SUMMARY

Using the guidance of the following publications the calculated measurement uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of $k = 2$.

References	Version / Date
CISPR 16-4-1	Ed. 2 (2009-02)
CISPR 16-4-2	Ed. 2 (2011-06)
CISPR 32	Ed. 1 (2012-01)
ANSI C63.23	2012
A2LA P103	February 4, 2016
A2LA P103c	August 10, 2015
ETSI TR 100-028	V1.3.1 (2001-03)

Measurement Type	Configuration	Uncertainty \pm
Radiated Emissions	Biconical Antenna	5.0 dB
Radiated Emissions	Log Periodic Antenna	5.3 dB
Radiated Emissions	Horn Antenna	4.7 dB
AC Line Conducted Emissions	Artificial Mains Network	3.4 dB
Telecom Conducted Emissions	Asymmetric Artificial Network	4.9 dB
Disturbance Power Emissions	Absorbing Clamp	4.1 dB
Radiated Immunity	3 Volts/meter	2.2 dB
Conducted Immunity	CDN/EM/BCI	2.4/3.5/3.4 dB
EFT Burst/Surge	Peak pulse voltage	164 volts
ESD Immunity	15 kV level	1377 Volts

Parameter	ETSI U.C. \pm	U.C. \pm
Radio Frequency, from F0	1×10^{-7}	0.55×10^{-7}
Occupied Channel Bandwidth	5 %	2 %
RF conducted Power (Power Meter)	1.5 dB	1.2 dB
RF conducted emissions (Spectrum Analyzer)	3.0 dB	1.7 dB
All emissions, radiated	6.0 dB	5.3 dB
Temperature	1° C	0.65° C
Humidity	5 %	2.9 %
Supply voltages	3 %	1 %

5 TEST DATA

5.1 LoRa Fundamental Emission

Operator	Aidi Zainal	QA	Anthony Smith
Temperature	22.1°C	R.H. %	40.8
Test Date	10/7/2020	Location	Conducted Radio Bench
Requirement	FCC 15.247	Method	ANSI C63.10

Test Parameters

Frequency	903-914.2 MHz
RBW	1 MHz
VBW	3 MHz
EUT Power	3.3VDC
EUT Mode	LoRa Transmit, Single Channel, DTS Mode as Worst Case, Power Setting 14
Example Calculation	Conducted Power (e.i.r.p.) = Conducted Power (dBm) + Antenna Gain (dBi)

Instrumentation




Date: 7-Oct-2020 Test: Conducted Radio Job: C-3372
 PE: Zach Wilson Customer: Georgia Pacific Quote: 318248

No.	Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due Date	Equipment Status
1	AA 960144	Cable	Gore	EKD01D010720	5800373	12/9/2018	12/9/2020	Active Verification
2	EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	7/14/2018	7/14/2021	Active Calibration

Table

Peak Output Power					
Frequency (MHz)	Data Rate	Power Setting	Antenna Gain (dBi)	Peak Output Power (dBm)	e.i.r.p (dBm)
903.0	DR4	14.0	1.3	13.3	14.6
907.8	DR4	14.0	1.3	13.3	14.6
914.2	DR4	14.0	1.3	13.3	14.6

Plots

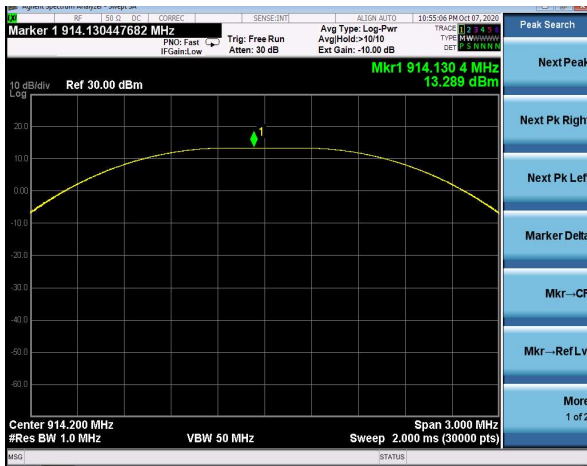

Worst Case Conducted Peak Output Power
DR4, 500 kHz, DTS Mode, 914.2 MHz

5.2 BLE Fundamental Emission

Operator	Zach Wilson	QA	Anthony Smith
Temperature	20.5C	R.H. %	31.6%
Test Date	11/26/2019	Location	Conducted Radio Bench
Requirement	FCC 15.247	Method	ANSI C63.10

Test Parameters

Frequency	2402 MHz, 2440 MHz, 2480 MHz
RBW	1 MHz
VBW	3 MHz
EUT Power	3VDC
EUT Mode	BLE Single Channel, Max Power
Example Calculation	Conducted Power (e.i.r.p.) = Conducted Power (dBm) + Antenna Gain (dBi)

Instrumentation



Date : 26-Nov-2019 Test : Conducted Radio Job : C-3164
 PE : Zach Wilson Customer : Georgia Pacific Quote : 318246

No.	Asset	Description	Manufacturer	Model	Serial	Cal Date	Cal Due Date	Equipment Status
1	AA 960172	Cable	A.H. Systems, Inc	SAC-26G-1	387	6/4/2018	6/4/2020	Active Verification
2	EE 960087	Analyzer - Spectrum	Agilent	N9010A	MY53400296	4/24/2019	4/24/2020	Active Calibration

Data Table

BLE Radio Peak Output Power				
Frequency (MHz)	Data Rate	Peak Output Power (dBm)	Antenna Gain (dBi)	e.i.r.p (dBm)
2402	BLE	5.1	-1.0	4.1
2440	BLE	4.9	-1.0	3.9
2480	BLE	5.3	-1.0	4.3

Plots



Worst Case Conducted Peak Output Power
BLE, 2480 MHz

6 EXCLUSION CALCULATION

6.1 Technical Brief

LoRa Worst Case: **13.3 dBm** (Pout) + **1 dB** (Tune-Up Tolerance) = **14.3 dBm**

BLE Worst Case: **5.3 dBm** (Pout) + **1 dB** (Tune-Up Tolerance) = **6.3 dBm**

Test Separation Distance: **Greater than 20cm**

6.2 FCC – LoRa MPE Calculation

Prediction of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

where: S = power density
P = power input to the antenna
G = power gain of the antenna in the direction of interest relative to an isotropic radiator
R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	14.30 (dBm)
Maximum peak output power at antenna input terminal:	26.915 (mW)
Antenna gain(typical):	1.3 (dBi)
Numeric Antenna Gain:	1.349 (numeric)
Prediction distance:	20 (cm)
Prediction frequency:	900 (MHz)
MPE limit for uncontrolled exposure at prediction frequency:	0.6 (mW/cm ²)
Power density at prediction frequency:	0.007223 (mW/cm ²)
Power density at prediction frequency:	0.07223 (W/m ²)

6.3 FCC – BLE MPE Calculation

Prediction of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

where: S = power density
P = power input to the antenna
G = power gain of the antenna in the direction of interest relative to an isotropic radiator
R = distance to the center of radiation of the antenna

Maximum peak output power at antenna input terminal:	5.30 (dBm)
Maximum peak output power at antenna input terminal:	3.388 (mW)
Antenna gain(typical):	-1 (dBi)
Numeric Antenna Gain:	0.794 (numeric)
Prediction distance:	20 (cm)
Prediction frequency:	2400 (MHz)
MPE limit for uncontrolled exposure at prediction frequency:	1.0 (mW/cm ²)
Power density at prediction frequency:	0.000535 (mW/cm ²)
Power density at prediction frequency:	0.00535 (W/m ²)

6.4 FCC – Simultaneous Transmission MPE total

MPE 900 MHz Limit = (frequency in MHz)/1500 = **0.6**

MPE 2400 MHz Limit = **1.0**

$$\frac{MPE\ 900}{MPE\ Limit\ 900} + \frac{MPE\ 2400}{MPE\ Limit\ 2400} < 1$$

$$\frac{0.007223\ mW/cm^2}{0.6\ mW/cm^2} + \frac{0.000535\ mW/cm^2}{1.0\ mW/cm^2} = 0.012573$$

Routine SAR testing is **excluded** as 0.012573 is less than 1.

6.5 Industry Canada

BLE EIRP = OP + ANTENNA GAIN

$$5.3 \text{ dBm} + (-1.0 \text{ dBi}) = 4.3 \text{ dBm} (0.002 \text{ W})$$

BLE SOURCE-BASED TIME-AVERAGE MAXIMUM EIRP

$$f = 2480 \text{ MHz}$$

$$1.31 \times 10^{-2} = 0.0131$$

$$0.0131 \times 2480^{0.6834} = 2.71 \text{ W (Limit)}$$

LORA EIRP = OP + ANTENNA GAIN

$$13.3 \text{ dBm} + 1.3 \text{ dBi} = 14.6 \text{ dBm} (0.028 \text{ W})$$

LORA SOURCE-BASED TIME-AVERAGE MAXIMUM EIRP

$$f = 914.9 \text{ MHz}$$

$$1.31 \times 10^{-2} = 0.0131$$

$$0.0131 \times 914.9^{0.6834} = 1.38 \text{ W (Limit)}$$

SIMULTANEOUS TRANSMISSION LIMIT

1.38W

BLE MPE + LORA MPE SIMULTANEOUS TRANSMISSION POWER

$$0.002 \text{ W} + 0.028 \text{ W} = 0.03 \text{ W} < 1.38 \text{ W}$$

CONFORMANCE STATEMENT

Routine SAR testing is **excluded** as 0.03 W is less than 1.38 W.

Company: Georgia Pacific	Page 15 of 16	Name: KOLO LoRa Module
Report: TR319353 B		Model: ASM-0000001076
Job: C-3372		Serial: Engineering Sample

7 REVISION HISTORY

Version	Date	Notes	Person
v0.1	10-8-2020	Initial Draft	Zach Wilson
v0.2	10-9-2020	Revised per internal review	Zach Wilson
2	10-23-2020	Revised per ACB comments	Zach Wilson

END OF REPORT