

**FCC Part 15C**  
**Measurement and Test Report**  
**For**  
**Shenzhen Newidea Technology Co., Limited**

**FCC ID: 2AAMA-SK-RF108**

<b>FCC Rule(s):</b>	<u>FCC Part 15.249</u>
<b>Product Description:</b>	<u>Wireless Mouse</u>
<b>Tested Model:</b>	<u>SK-RF108</u>
<b>Report No.:</b>	<u>BSL18051030700001Y-ER-1</u>
<b>Tested Date:</b>	<u>May 15~22, 2018</u>
<b>Issued Date:</b>	<u>May 23, 2018</u>
<b>Tested By:</b>	<u>Lisa. Li / Engineer</u> <i>Lisa . Li</i>
<b>Reviewed By:</b>	<u>arno. Liu / EMC Manager</u> <i>arno.liu</i>
<b>Approved &amp; Authorized By:</b>	<u>Mike mo / PSQ Manager</u> <i>Mike mo</i>
<b>Prepared By:</b>	

**BSL Testing Co.,LTD.**  
NO. 24, ZH Park, Nantou, Shenzhen, 518000 China  
Tel: 86- 755-26508703 Fax: 86- 755-26508703

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>3. ANTENNA REQUIREMENTS.....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. RADIATED EMISSIONS.....</b>	<b>9</b>
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	9
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 ENVIRONMENTAL CONDITIONS.....	11
4.5 SUMMARY OF TEST RESULTS/PLOTS.....	11
<b>5. OUT OF BAND EMISSIONS.....</b>	<b>16</b>
5.1 STANDARD APPLICABLE.....	16
5.2 TEST PROCEDURE.....	16
5.3 ENVIRONMENTAL CONDITIONS.....	16
5.4 SUMMARY OF TEST RESULTS/PLOTS.....	16
<b>6. EMISSION BANDWIDTH.....</b>	<b>18</b>
6.1 STANDARD APPLICABLE.....	18
6.2 TEST PROCEDURE.....	18
6.3 ENVIRONMENTAL CONDITIONS.....	18
6.4 SUMMARY OF TEST RESULTS/PLOTS.....	18
<b>7. CONDUCTED EMISSIONS.....</b>	<b>21</b>
7.1 TEST PROCEDURE.....	21
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	21
7.3 ENVIRONMENTAL CONDITIONS.....	21
7.4 TEST RECEIVER SETUP.....	22
7.5 SUMMARY OF TEST RESULTS/PLOTS.....	22
7.6 CONDUCTED EMISSIONS TEST DATA.....	22

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen Newidea Technology Co., Limited  
 Address of applicant: Blg 31, Cuigang Industrial Zone 5, Huaide Road, Fuyong Town,  
 Bao' an District, Shenzhen, China

Manufacturer: Shenzhen Newidea Technology Co., Limited  
 Address of manufacturer: Blg 31, Cuigang Industrial Zone 5, Huaide Road, Fuyong Town,  
 Bao' an District, Shenzhen, China

General Description of EUT	
Product Name:	Wireless Mouse
Trade Name:	N/A
Model No.:	SK-RF108
Adding Model(s):	N/A
Rated Voltage:	DC 3V from 2*AAA Battery
Power Adapter Model:	N/A

Technical Characteristics of EUT	
Frequency Range:	2405MHz-2470MHz
Max. Field Strength:	92.54dBuV/m(Peak)
Data Rate:	1M
Modulation:	FSK
Quantity of Channels:	32
Channel Separation:	2MHz
Antenna Type:	PCB Antenna
Antenna Gain:	-0.61dBi
Lowest Internal Frequency of EUT:	12MHz

## 1.2 Test Standards

The following report is prepared on behalf of the Shenzhen Newidea Technology Co., Limited in accordance with FCC Part 15, Subpart B, Subpart C, and section 15.107, 15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.107,15.203, 15.205, 15.207, 15.209 and 15.249 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

BSL Testing Co.,LTD.

NO. 24, ZH Park, Nantou, Shenzhen, 518000 China

Designation Number : CN1217

Test Firm Registration Number: 866035

Tel: 86- 755-26508703

Fax: 86- 755-26508703

### 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	2405MHz
TM2	Middle Channel	2430MHz
TM3	High Channel	2470MHz

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

### 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.1\text{dB}$

**1.7 Test Equipment List and Details**

Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
Communication Tester	Rohde & Schwarz	CMW500	100358	2017-10-21	2018-10-20
Spectrum Analyzer	R&S	FSP40	100550	2017-10-21	2018-10-20
Test Receiver	R&S	ESCI7	US47140102	2017-10-21	2018-10-20
Signal Generator	HP	83630B	3844A01028	2017-10-22	2018-10-21
Test Receiver	R&S	ESPI-3	100180	2017-10-21	2018-10-20
Amplifier	Agilent	8449B	4035A00116	2017-10-22	2018-10-21
Amplifier	HP	8447E	2945A02770	2017-10-22	2018-10-21
Signal Generator	IFR	2023A	202307/242	2017-10-22	2018-10-21
Broadband Antenna	SCHAFFNER	2774	2774	2017-10-17	2018-10-16
Biconical and log periodic antennas	ELECTRO-METRIC	EM-6917B-1	171	2017-10-17	2018-10-16
Horn Antenna	R&S	HF906	100253	2017-10-17	2018-10-16
Horn Antenna	EM	EM-6961	6462	2017-10-17	2018-10-16
LISN	R&S	ESH3-Z5	100196	2017-10-17	2018-10-16
LISN	COM-POWER	LI-115	02027	2017-10-17	2018-10-16
3m Semi-Anechoic Chamber	Chengyu Electron	9 (L)*6 (W)* 6 (H)	BSL086	2017-10-21	2018-10-20
Horn Antenna	A-INFOMW	LB-180400KF	BSL088	2017-10-21	2018-10-20

---

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	N/A
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215 (c)	Emission Bandwidth	Compliant

Note: PASS: applicable, N/A: not applicable.

### **3. Antenna Requirements**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has an integral antenna, fulfill the requirement of this section.



---

## 4. Radiated Emissions

---

### 4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

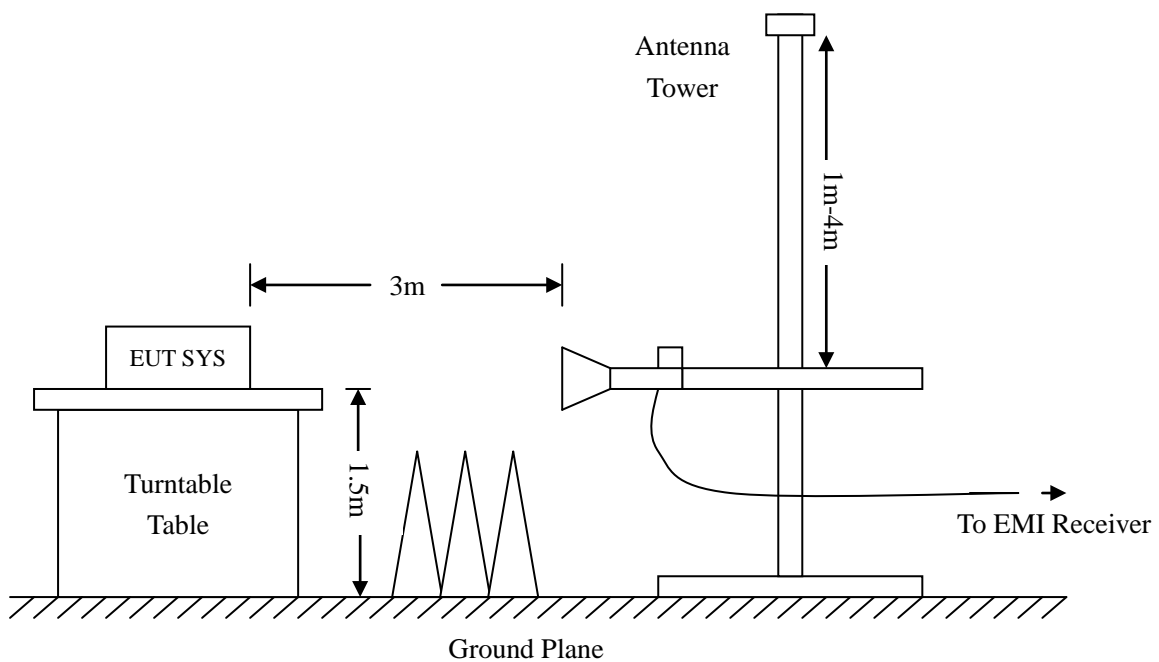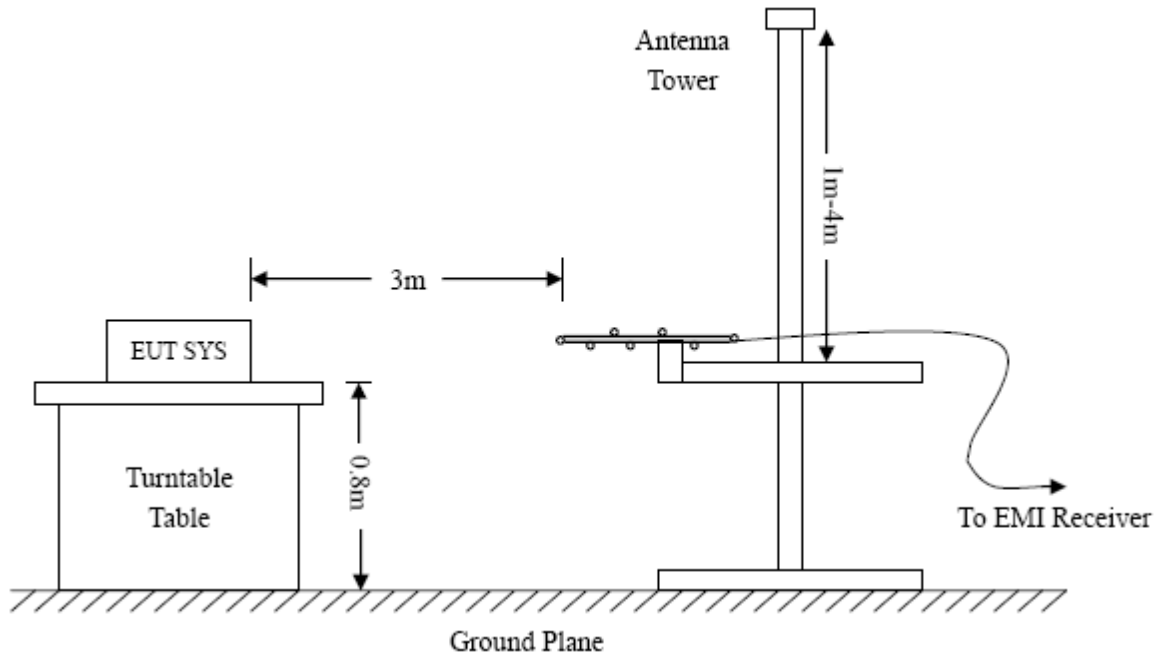

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

### 4.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

### 4.5 Summary of Test Results/Plots

According to the data below, the [FCC Part 15.205](#), [15.209](#) and [15.249](#) standards, and had the worst margin of:


**-5.66 dB at 887.6099 MHz in the Horizontal polarization, Middle Channel of Antenna 1, 9 kHz to 25 GHz, 3Meters**

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*

**Plot of Radiated Emissions Test Data (30MHz to 1GHz)**


EUT: *Wireless Mouse*  
 Tested Model: *SK-RF108*  
 Operating Condition: *Transmitting Low Channel (2405MHz)*  
 Comment: *Only worse case is reported*

Test Specification: *Horizontal*

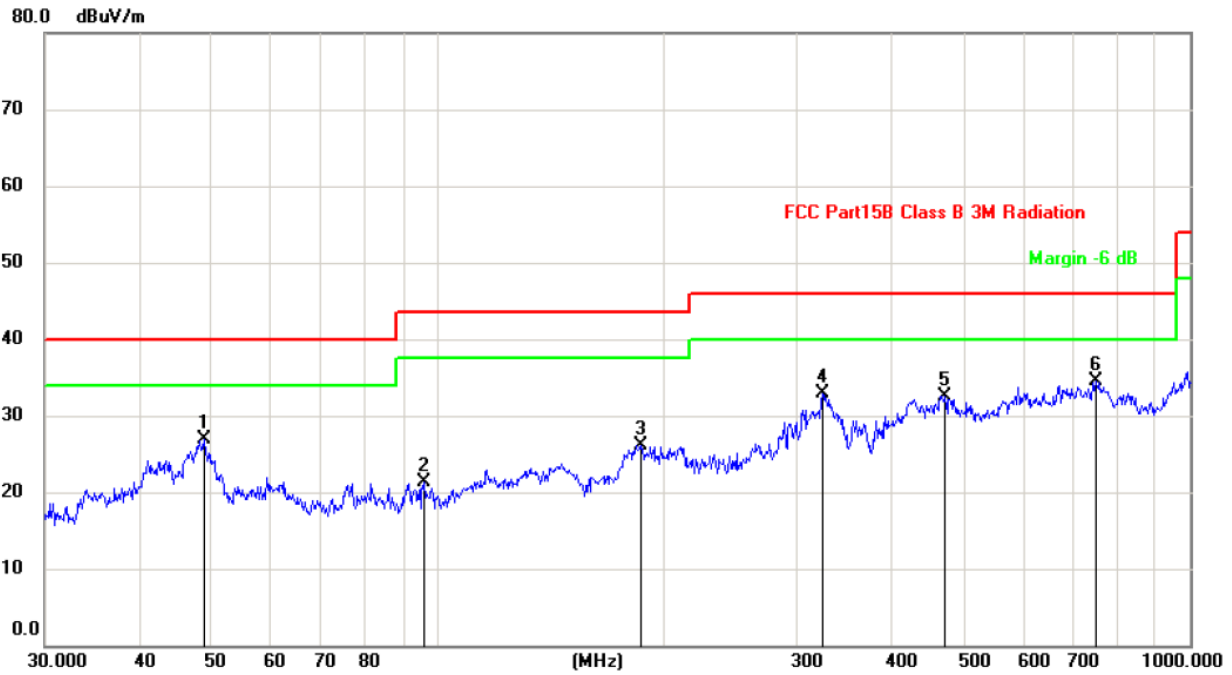

No.	Mk.	Freq.	Measure- ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		48.8429	26.96	40.00	-13.04	QP		
2		95.7622	21.36	43.50	-22.14	QP		
3		185.7880	26.18	43.50	-17.32	QP		
4		324.4560	32.95	46.00	-13.05	QP		
5		472.1759	32.52	46.00	-13.48	QP		
6	*	750.1082	34.44	46.00	-11.56	QP		

Test Specification: Vertical

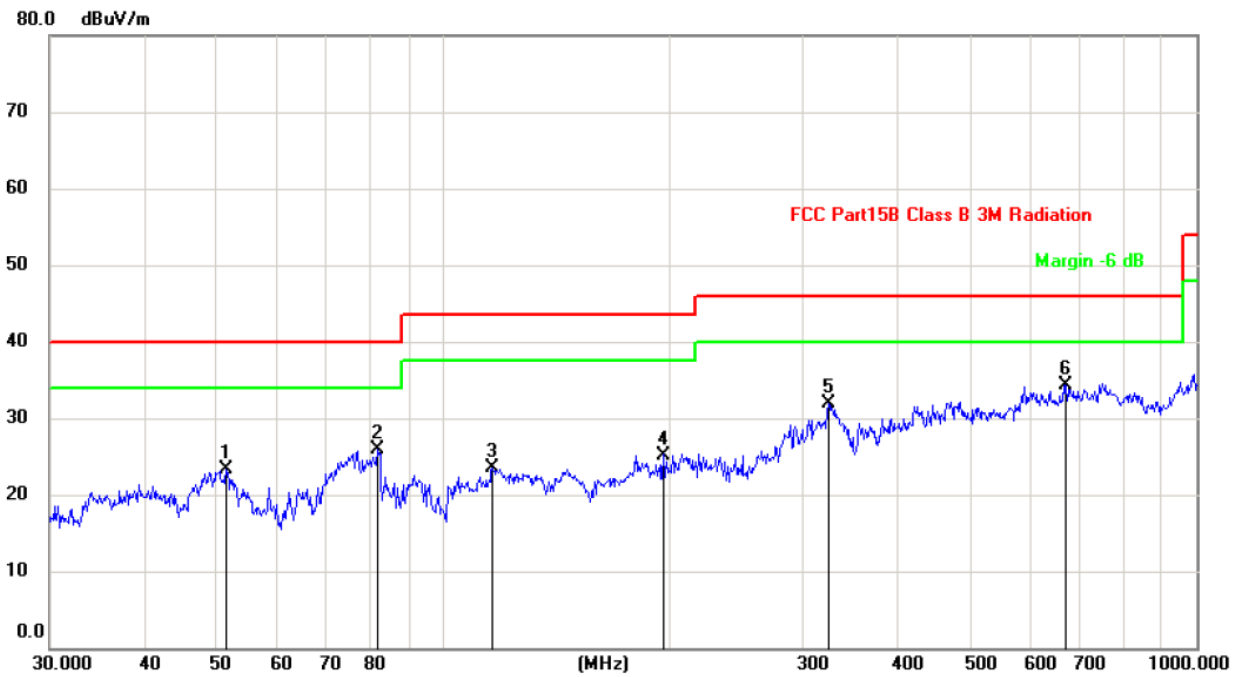

No.	Mk.	Freq.	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		51.4806	23.27	40.00	-16.73	QP		
2		81.7831	25.89	40.00	-14.11	QP		
3		116.1320	23.47	43.50	-20.03	QP		
4		195.8220	25.20	43.50	-18.30	QP		
5		324.4560	31.95	46.00	-14.05	QP		
6	*	670.4891	34.39	46.00	-11.61	QP		

*Spurious Emissions Above 1GHz*

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2405MHz							
2405	90.26	-2.28	92.54	114	-21.46	H	PK
2405	85.61	-2.28	87.89	94	-6.11	H	AV
4810	68.56	-3.72	72.28	74	-1.72	H	PK
4810	47.62	-3.72	51.34	54	-2.66	H	AV
7215	62.15	-0.61	62.76	74	-11.24	H	PK
7215	45.12	-0.61	45.73	54	-8.27	H	AV
2405	87.62	-2.28	89.90	114	-24.1	V	PK
2405	80.62	-2.28	82.90	94	-11.1	V	AV
4810	66.26	-3.72	69.98	74	-4.02	V	PK
4810	45.15	-3.72	48.87	54	-5.13	V	AV
7215	63.45	-0.61	64.06	74	-9.94	V	PK
7215	42.62	-0.61	43.23	54	-10.77	V	AV
Middle Channel-2430MHz							
2430	89.62	-2.25	91.87	114	-22.13	H	PK
2430	84.26	-2.25	86.51	94	-7.49	H	AV
4860	67.61	-3.61	71.22	74	-2.78	H	PK
4860	46.26	-3.61	49.87	54	-4.13	H	AV
7290	61.62	-0.59	62.21	74	-11.79	H	PK
7290	46.15	-0.59	46.74	54	-7.26	H	AV
2430	86.26	-2.25	88.51	114	-25.49	V	PK
2430	79.62	-2.25	81.87	94	-12.13	V	AV
4860	65.62	-3.61	69.23	74	-4.77	V	PK
4860	44.12	-3.61	47.73	54	-6.27	V	AV
7290	62.62	-0.59	63.21	74	-10.79	V	PK
7290	41.45	-0.59	42.04	54	-11.96	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
High Channel-2470MHz							
2470	89.61	-2.22	91.83	114	-22.17	H	PK
2470	83.16	-2.22	85.38	94	-8.62	H	AV
4940	66.45	-3.53	69.98	74	-4.02	H	PK
4940	45.14	-3.53	48.67	54	-5.33	H	AV
7410	62.61	-0.54	63.15	74	-10.85	H	PK
7410	45.45	-0.54	45.99	54	-8.01	H	AV
2470	85.14	-2.22	87.36	114	-26.64	V	PK
2470	78.42	-2.22	80.64	94	-13.36	V	AV
4940	66.45	-3.53	69.98	74	-4.02	V	PK
4940	42.45	-3.53	45.98	54	-8.02	V	AV
7410	63.45	-0.54	63.99	74	-10.01	V	PK
7410	42.62	-0.54	43.16	54	-10.84	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

*The measurements greater than 20dB below the limit from 9kHz to 30MHz..*

## 5. Out of Band Emissions

---

### 5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 2400MHz to 2483.5MHz, than mark the higher-level emission for comparing with the FCC rules.

### 5.3 Environmental Conditions


Temperature:	24 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

### 5.4 Summary of Test Results/Plots

Please refer to the test plots as below.




Lowest Bandedge

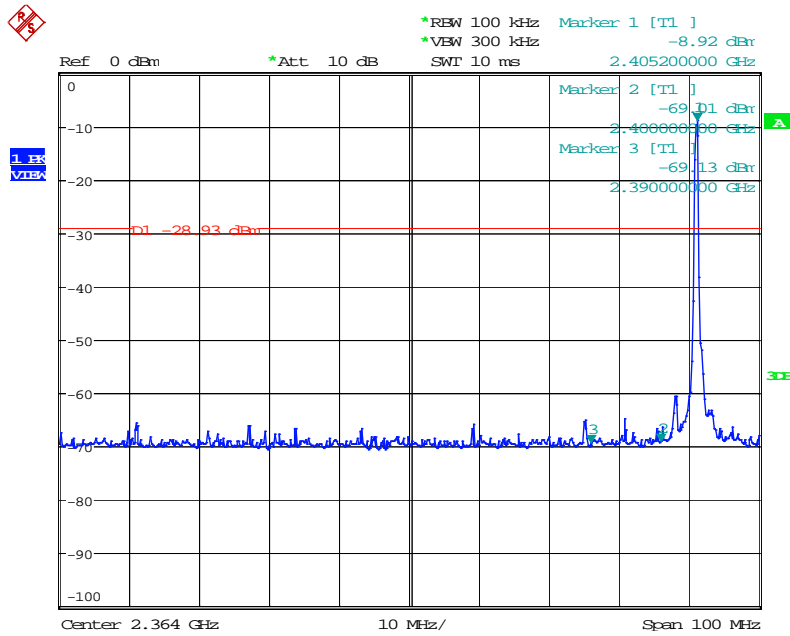

Date: 23.MAY.2018 09:51:16

Highest Bandedge

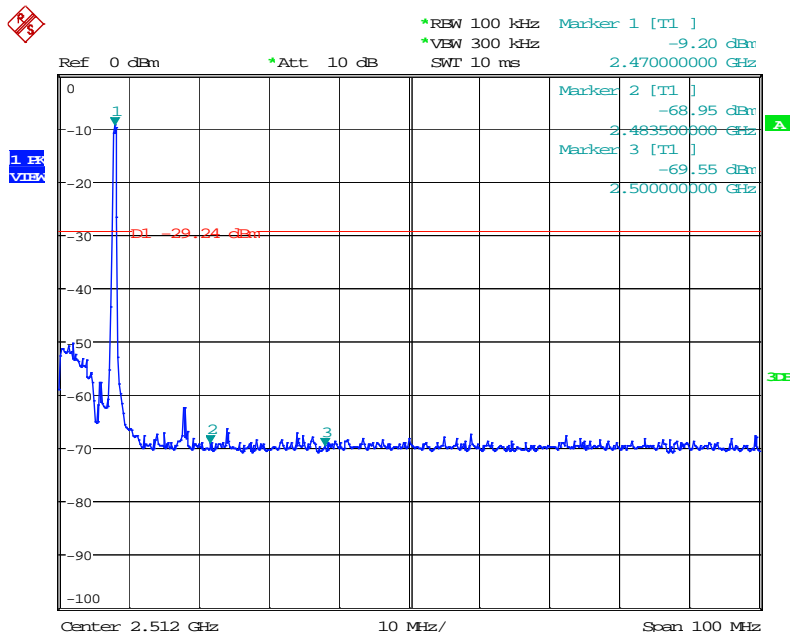

Date: 23.MAY.2018 09:52:37

## 6. Emission Bandwidth

### 6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW  $\geq$ 1% 20dB Bandwidth, VBW  $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

### 6.3 Environmental Conditions


Temperature:	25 °C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 6.4 Summary of Test Results/Plots

Channel	Frequency MHz	20dB Bandwidth kHz	99% Bandwidth kHz
Low Channel	2405	2640	2420
Middle Channel	2430	2620	2420
High Channel	2470	2660	2440


Please refer to the following test plots:

Low Channel:

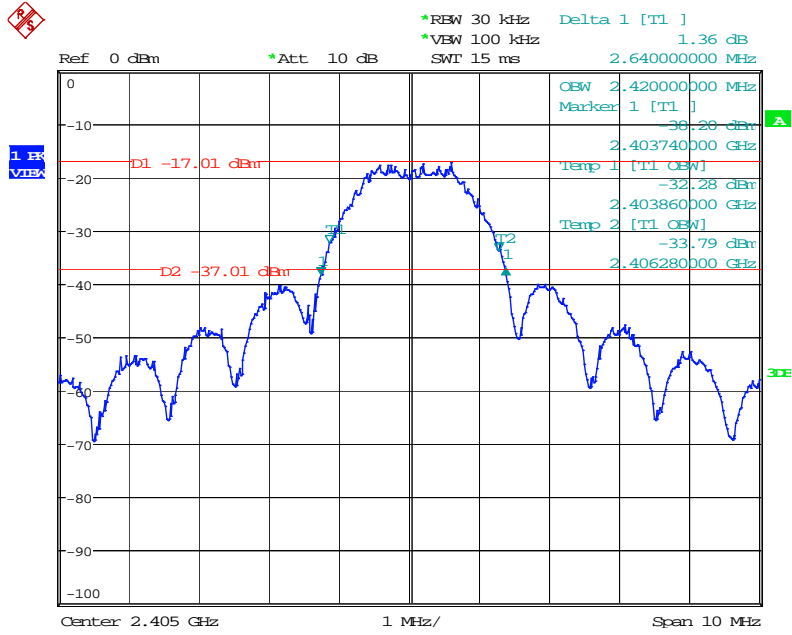


Date: 21.MAY.2018 19:28:59

Middle Channel:

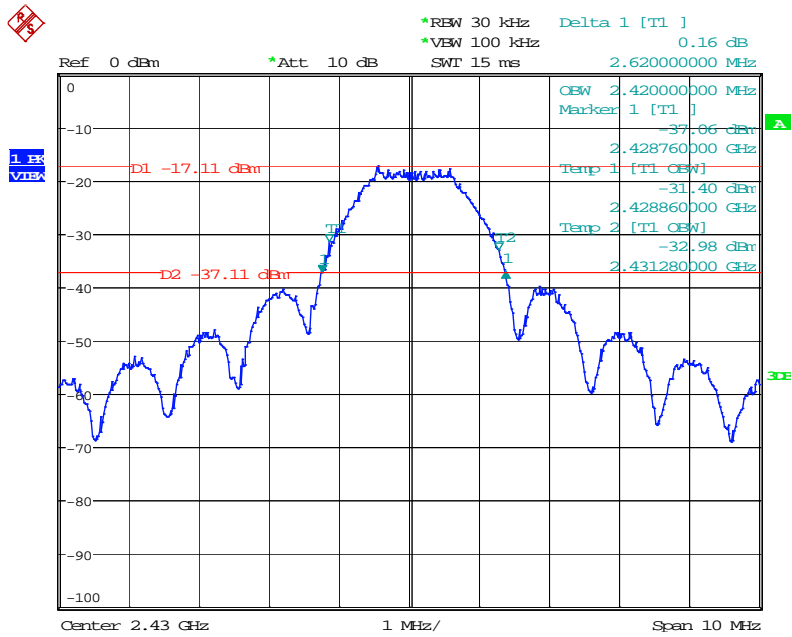

Date: 21.MAY.2018 19:25:37

High Channel:

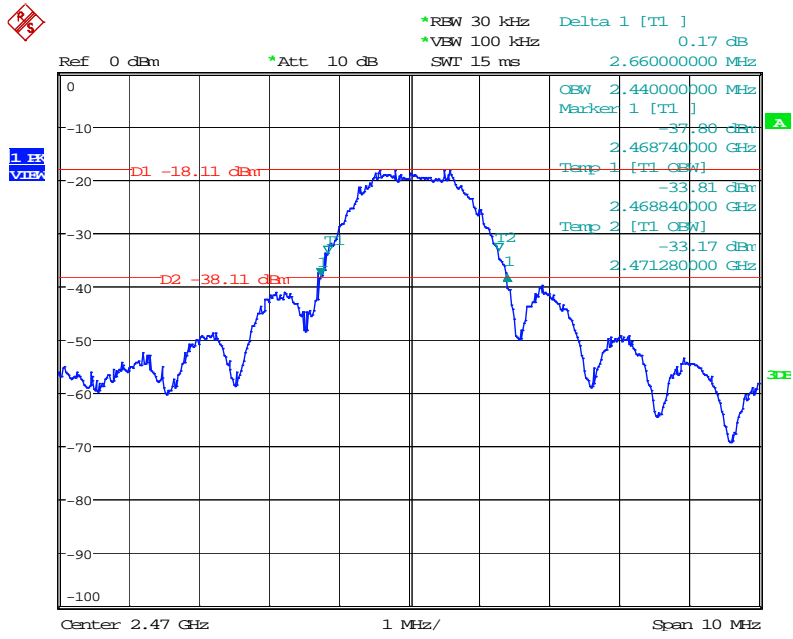

Date: 21.MAY.2018 19:27:20

## 7. Conducted Emissions


### 7.1 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### 7.2 Basic Test Setup Block Diagram

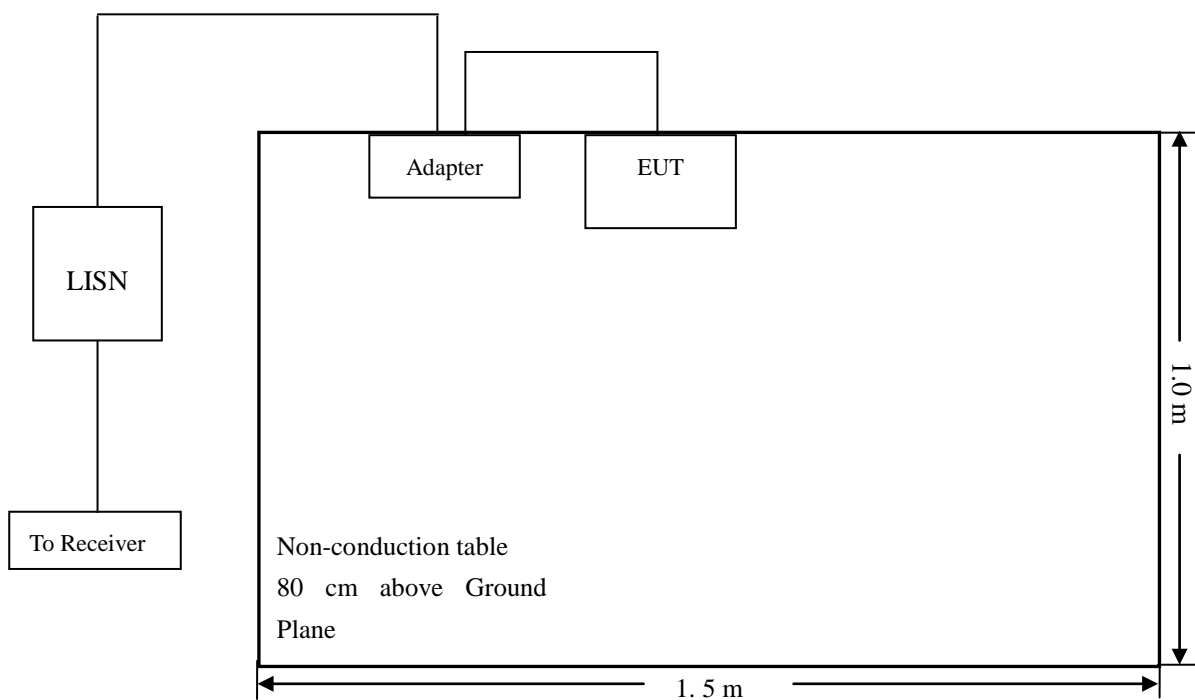

### 7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

### 7.4 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
Stop Frequency..... 30 MHz  
Sweep Speed ..... Auto  
IF Bandwidth..... 10 kHz  
Quasi-Peak Adapter Bandwidth ..... 9 kHz  
Quasi-Peak Adapter Mode ..... Normal

### 7.5 Summary of Test Results/Plots

According to the data in section 7.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:

**-7.49 dB at 0.182 MHz in the Line mode, peak detector, 0.15-30MHz**

### 7.6 Conducted Emissions Test Data

The test not applicable.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***