

**TEST REPORT CONCERNING THE COMPLIANCE OF A  
Low Power Communication Device Transmitter (DXX)  
OPERATING IN THE FREQUENCYRANGE 2402 – 2480 MHz,  
BRAND Tacx, MODEL T2780 Bushido  
WITH 47 CFR PART 15 (10-1-13 Edition)**

**14103002.fcc02  
February 11, 2015**

FCC listed : 90828  
Industry Canada : 2932G-2  
R&TTE, LVD, EMC Notified Body : 1856

**TÜV Rheinland Nederland B.V.  
P.O. Box 37  
9350 AA Leek (NL)  
Eiberkamp 10  
9351 VT Leek (NL)**

Telephone: +31 594 505005  
Telefax: +31 594 504804

E-mail: [info@nl.tuv.com](mailto:info@nl.tuv.com)  
Web: [www.tuv.com](http://www.tuv.com)

## MEASUREMENT/TECHNICAL REPORT

**Brand: Tacx**  
**Model: T2780 Bushido**

**FCC ID: 2AAMI-T2780**

This report concerns: Original grant, certification / ~~Limited Single Modular Approval~~ ~~Class 2 change~~  
~~Verification~~

Equipment type: Low Power Communication Device Transmitter (DXX)

Report prepared by:	Name	: Richard van der Meer
	Company name	: TÜV Rheinland Nederland B.V.
	Address	: Eiberkamp 10
	Postal code/city	: 9351VT Leek
	Mailing address	: P.O. Box 37
	Postal code/city	: 9350AA Leek
	Country	: The Netherlands
	Telephone number	: + 31 594 505 005
	Telefax number	: + 31 594 504 804
	E-mail	: info@nl.tuv.com

The data taken for this test and report herein was done in accordance with 47 CFR Part 15 (10-1-13 Edition), and the measurement procedures of ANSI C63.10-2009. TÜV Rheinland Nederland B.V. at Leek, The Netherlands, certifies that the data is accurate and contains a true representation of the emission profile of the Equipment Under Test (EUT) on the date of the test as noted in the test report. I have reviewed the test report and find it to be an accurate description of the test(s) performed and the EUT so tested.

Date: February 11, 2015

Signature:



Pieter de Beer  
Business Field Manager Electrical  
TÜV Rheinland Nederland B.V.

**Description of test item**

EUT : Low Power Communication Device Transmitter (DXX)  
Manufacturer : Tacx b.v.  
Brand : Tacx  
Model(s) : T2780 Bushido  
Serial Number : 84142602 (conducted tests) and 84146420 (radiated tests)  
Voltage input rating : EUT is self-powered  
Voltage output rating : --  
Current input rating : --  
Antenna : Internal, integrated on the PCB  
Antenna Gain : + 2dBi  
Operating frequency : 2402 MHz-2480 MHz.  
Modulation : GFSK  
Remarks : n.a.

**Applicant information**

Applicant's representative : Martin Smits  
Company : Tacx b.v.  
Address : Rijksstraatweg 52  
Postal code : 2241BW,  
City : Wassenaar  
Country : Netherlands  
Telephone number : +31705119259  
Telefax number : +31705116411

**Test(s) performed**

Location : Leek  
Test(s) started : January 20, 2015  
Test(s) completed : February 03, 2015  
Purpose of test(s) : Equipment Authorization (Original grant/certification)

Test specification(s) : 47 CFR Part 15, Subpart C, Section 15.249 (10-1-13 Edition) and

Test engineer(s) : R. van der Meer



Report written by : R. van der Meer



Report date : February 11, 2015

This report shall not be reproduced, except in full, without the written permission of TÜV Rheinland Nederland B.V.  
The test results relate only to the item(s) tested.

**Table of contents**

1	General information.....	5
1.1	Product description. ....	5
1.1.1	Introduction. ....	5
1.2	Related submittal(s) and/or Grant(s). ....	5
1.2.1	General. ....	5
1.3	Tested system details.....	5
1.3.1	Description of input and output ports.....	6
1.4	Test results summary.....	8
1.5	Test methodology.....	9
1.6	Test facility. ....	9
1.7	Test conditions. ....	9
2	System test configuration. ....	10
2.1	Justification. ....	10
2.2	EUT mode of operation. ....	10
2.3	Special accessories. ....	10
2.4	Equipment modifications. ....	10
2.5	Product Labeling.....	10
2.6	Block diagram of the EUT. ....	10
2.7	Schematics of the EUT.....	10
2.8	Part list of the EUT. ....	10
3	Radiated emission data.....	11
3.1	Radiated field strength measurements (30 MHz – 1 GHz, E-field).....	12
3.1.1	Radiated field strength measurements (30 MHz- 1 GHz, E-field).....	12
3.2	Radiated field strength measurements (1 - 25 GHz, E-field), Peak values.....	13
3.2.1	Radiated field strength measurements (1 - 25 GHz, E-field), EUT's TX Frequency 2402 MHz.....	13
3.2.2	Radiated field strength measurements (1 - 25 GHz, E-field), EUT's TX Frequency 2440 MHz.....	13
3.2.3	Radiated field strength measurements (1 - 25 GHz, E-field), EUT's TX Frequency 2480 MHz.....	14
3.2.4	Radiated field strength measurements (1 - 25 GHz, E-field), EUT normal operation.....	14
4	AC Powerline Conducted Emission Data. ....	16
4.1	AC Power Line Conducted Emission data of the EUT.....	16
5	Emissions at the band edges.....	17
6	Bandwidth of the emission.....	20
7	List of utilized test equipment. ....	23

## 1 General information.

### 1.1 Product description.

The brand Tacx, Model T2780 Bushido, hereafter referred to as EUT, is a Low Power Communication Device Transmitter (DXX), BlueTooth Low Energy used in an Interactive Smart Trainer with Electric Motor Brake for bicycles to transmit performance data to PC, Tablet or smartphone. The EUT is factory configured for the 2402-2480 MHz band. The EUT also contains a Digital Transmission System (DTS) operating in the frequencyband 2403-2480 MHz, based on ANT technology, although the two transmitters never transmit at the same time. The DTS transmitter is covered in a separate report.

#### 1.1.1 Introduction.

The content of this report and measurement results have not been changed other than the way of presenting the data.

### 1.2 Related submittal(s) and/or Grant(s).

#### 1.2.1 General.

This test report supports the original grant/certification in equipment authorization files under:  
 FCC ID: 2AAMI-T2780.

### 1.3 Tested system details.

Details and an overview of the system and all of its components, as it has been tested, may be found below.

EUT	:	Low Power Communication Device Transmitter (DXX)
Manufacturer	:	Tacx b.v.
Brand	:	Tacx
Model(s)	:	T2780 Vortex
Serial Number	:	841402602 (conducted tests) and 841406420 (radiated tests)
Voltage input rating	:	EUT is self-powered
Voltage output rating	:	--
Current input rating	:	--
Antenna	:	Internal, integrated on the PCB
Antenna Gain	:	+ 2dBi
Operating frequency	:	2402 MHz-2480 MHz.
Modulation	:	GFSK
Spreading technique	:	Digital modulation
Remarks	:	n.a.

Auxiliary equipment 1 (AUX1)	:	Notebook computer
Brand	:	Hewlett-Packard
Model	:	Compaq 6710b
Serial number	:	CNU8150MD3
Remark	:	used for programming the EUT, property applicant

Auxiliary equipment 2 (AUX2)	:	Programming interface
Brand	:	Segger
Model	:	J-Link v 9.2
Serial number	:	--
Remarks	:	used for programming the EUT, property applicant

Auxiliary (AUX 4) : Mechanical Jig  
 Manufacturer : Tacx  
 Brand : Tacx  
 Models : n.a.  
 Serial number : n.a.  
 Voltage input rating : 3x400Vac  
 Remark : Used to drive the EUT

The testsoftware (as installed on AUX1) is used to program the operating frequency of the EUT. AUX2 were used only to program the operating frequency and once set the auxiliary items were removed from the test-setup and the EUT operates on it's own.

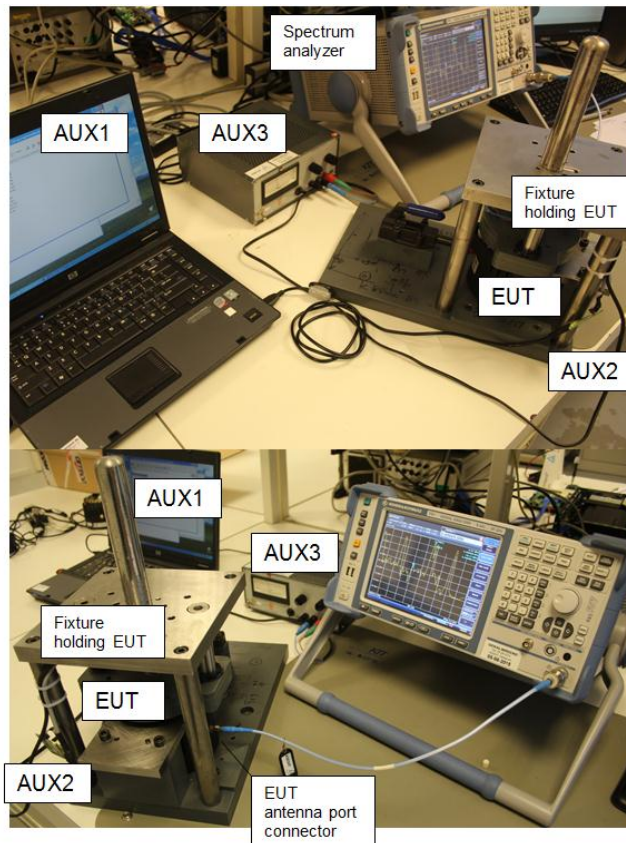


Photo 1: basic setup for frequency programming

### 1.3.1 Description of input and output ports.

No input and output connections ports on the EUT during testing, but for programming the following connections were used.

Number	Terminal	From	To	Remarks
1	Mains	Mains	(AUX1)	--
2	Usb	AUX1	AUX2	--
3	datacom	AUX2	EUT	--
4	DC Power	AUX3	EUT	12Vdc

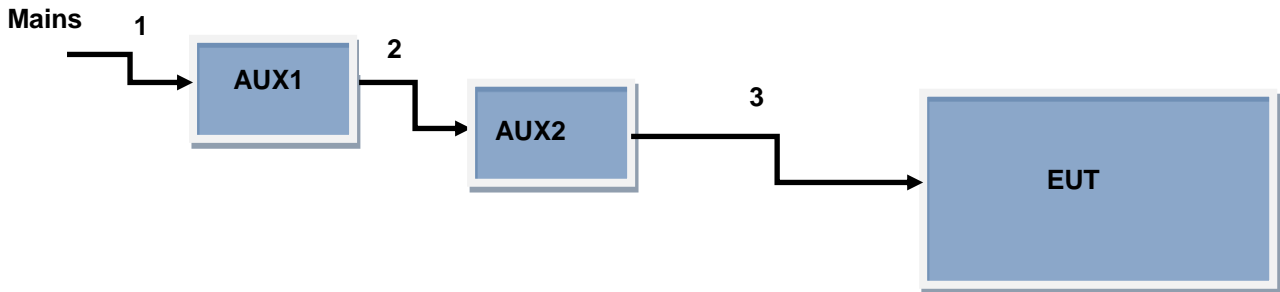


Figure 1. Basic set-up for programming

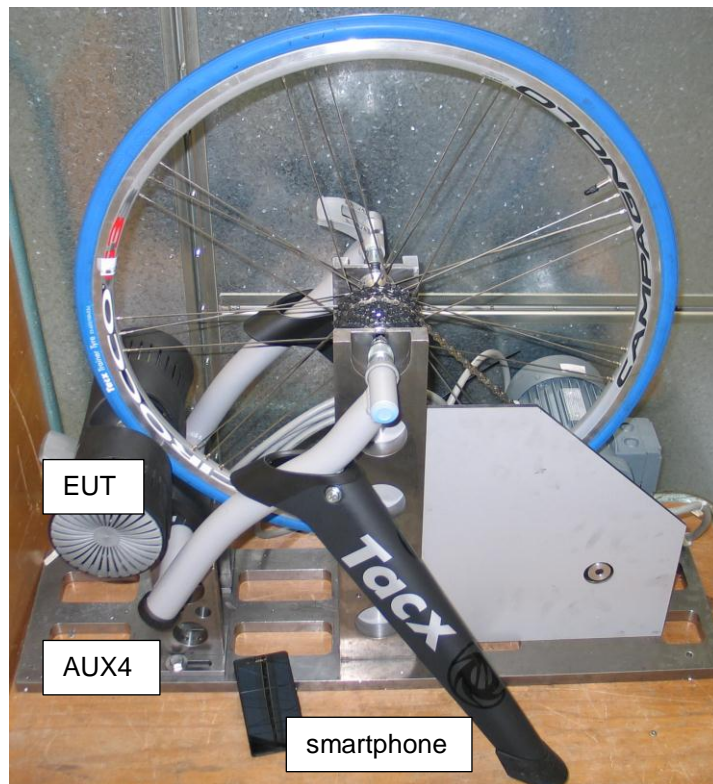


Figure 2. Basic set-up for testing

**1.4 Test results summary**

The EUT was tested in accordance with the specifications given in the table below.

Test Standard		Description	Page	Pass / Fail
47 CFR Part 15 (10-1-13 Edition)				
15.207(a)		AC Powerline Conducted emissions	16 - 16	Not Applicable
15.205 and 15.209		Radiated emissions	11 - 15	Pass
15.249(d)		Band Edge emissions	17 - 19	Pass
15.215(c)		Occupied bandwidth	20 - 25	Pass

Table : testspecifications

Testmethods: ANSI C63.10-2009



### 1.5 Test methodology.

The test methodology used is based on the requirements of 47 CFR Part 15 (10-1-13 Edition), sections 15.31, 15.205, 15.207, 15.209 and 15.249.

The test methods, which have been used, are based on ANSI C63.10-2009.

Radiated emission tests above 30 MHz were performed at a measurement distance of 3 meters.  
Radiated emission tests below 30 MHz were performed at a measurement distance of 3 meters.

The receivers are switching automatically to the right bandwidth in accordance with CISPR 16. This is implemented in the receiver. The antenna factors are programmed in the test receiver. The receiver automatically calculates the appropriate correction factor for the utilized antenna and also the appropriate antenna factor for the cable loss. The total correction is automatically added to the measured value.

### 1.6 Test facility.

The Federal Communications Commission and Industry Canada has reviewed the technical characteristics of the test facilities at TÜV Rheinland Nederland B.V. , located in Leek, 9351VT Eiberkamp 10, The Netherlands, and has found these test facilities to be in compliance with the requirements of 47 CFR Part 15, section 2.948.

The description of the test facilities has been filed at the Office of the Federal Communications Commission under registration number 90828. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

The description of the test facilities has been filed to Industry Canada under registration number 2932G-2. The facility has been added to the list of laboratories performing these test services for the public on a fee basis.

### 1.7 Test conditions.

Normal test conditions:

Temperature (\*) : +15°C to +35°C  
Relative humidity(\*) : 20 % to 75 %  
Supply voltage : the EUT is self-powered

When it was impracticable to carry out the tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests are stated separately.

## **2 System test configuration.**

### **2.1 Justification.**

As load, a system with a driving control and motor was applied to drive the wheel. The performance could be monitored on a smartphone.

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.10-2009.

### **2.2 EUT mode of operation.**

The EUT has been tested in continuous transmit mode with a modulated carrier. The intentional radiator tests have been performed with a complete functioning EUT.

A continuous transmit mode could be initiated by using test software as supplied by the applicant. The test software was used to define various different operational modes of the EUT for the purpose of compliance testing. The version of the test software, as supplied by the applicant and used during all tests is:

Test software : ANTware2 v 3.1.0

Batch files programmed by the applicant are used to make the required settings. This software was running on a laptop computer (AUX1).

### **2.3 Special accessories.**

No special accessories are used and/or needed to achieve compliance.

### **2.4 Equipment modifications.**

No modifications have been made to the equipment in order to achieve compliance.

### **2.5 Product Labeling**

The product labeling information is available in the technical documentation package.

### **2.6 Block diagram of the EUT.**

The block diagram is available in the technical documentation package.

### **2.7 Schematics of the EUT.**

The schematics are available in the technical documentation package.

### **2.8 Part list of the EUT.**

The part list is available in the technical documentation package.

### 3 Radiated emission data.

#### RESULT: PASS

Date of testing: 2015-01-27  
Frequency range: 30MHz - 25GHz

#### Requirements:

FCC 15.205, FCC 15.209, FCC 15.249

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a), must comply with the radiated emission limits specified in FCC 15.209(a).

Radiated emissions which fall outside the operation frequency band and outside restricted bands shall either meet the limit specified in FCC 15.209(a) or be attenuated at least 20dB below the power level in the 100kHz bandwidth within the band that contains the highest level of the desired power (the less severe limit applies).

#### Test procedure:

ANSI C63.10-2009.

The EUT is considered as floor-standing equipment not typically installed with its base in direct electrical contact with, or connected to, a metal floor or grid. The EUT was placed on the testsite turntable with insulation material in-between of up to 12mm thickness to prevent electric contact.

was placed on a nonconductive turntable 0.8m above the ground plane. Before final measurements of radiated emissions were performed, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the EUT orientation (X, Y, Z) were varied in order to ensure that maximum emission amplitudes were attained.

The spectrum was examined from 30MHz to the 10th harmonic of the highest fundamental transmitter frequency (25GHz). Final radiated emission measurements were made at 3m distance.

At each frequency where a spurious emission was found, the EUT was rotated 360° and the antenna was raised and lowered from 1 to 4m in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Field strength values of radiated emissions at frequencies not listed in the tables are more than 20 dB below the applicable limit. The levels are expressed in dBm which are derived from  $\text{dBm} = E(\text{dB}\mu\text{V}/\text{m}) - 95.2\text{dB}$ . Where Peak (Pk) values were at least 6 dB under the Average (Av) limits, Av value was not tested. Where Average values were tested, Average values were measured using a 10Hz Video Bandwidth.

### 3.1 Radiated field strength measurements (30 MHz – 1 GHz, E-field)

#### 3.1.1 Radiated field strength measurements (30 MHz- 1 GHz, E-field)

Frequency [MHz]	Antenna Orientation	Level QP [dB $\mu$ V/m]	Limit QP [dB $\mu$ V/m]	Result Pass/Fail
33.88	Horizontal	34.7	40.0	Pass
61.04	Horizontal	35.9	40.0	Pass
68.80	Horizontal	36.9	40.0	Pass
97.90	Vertical	37.7	43.5	Pass
148.34	Vertical	21.4	43.5	Pass
185.20	Vertical	16.6	43.5	Pass

Table 1 Radiated emissions of the EUT in the frequency range 30 MHz – 1 GHz.

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15 section 15.209, 15.249 with the EUT operating in continues transmit mode are depicted in Table 1.

**Notes:**

1. Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit. The 6 highest values are noted
2. Measurement uncertainty is  $\pm 5.0$ dB
3. The reported field strength values are the worst case values at the indicated frequency. The EUT was varied in 2 positions (horizontal and vertical) because of it's physical limitations, the antenna was varied in horizontal and vertical orientations and also in height (between 1m and 4m).
4. Preliminary measurements indicated that the radiated emissions from EUT were not affected by the EUT's operating mode or frequency.
5. A Quasi-peak detector was used with a resolution bandwidth of 120 kHz.

Used test equipment and ancillaries:

A00314	A00447	A00450	A00257	A00235	A00258	A00444	A00466	

### 3.2 Radiated field strength measurements (1 - 25 GHz, E-field), Peak values

#### 3.2.1 Radiated field strength measurements (1 - 25 GHz, E-field), EUT's TX Frequency 2402 MHz

Frequency [MHz]	Antenna Orientation	Detector	Resolution Bandwidth (kHz)	Level Pk [dBm]	Limit [dBm]	Result
2402 (fundamental)	Horizontal	Peak	1000	-21.1	-1.2 Av +18.9 Pk	Pass
3658 <sup>R</sup>	Vertical	Peak	1000	-58.8	-41.2 Av -21.2 Pk	Pass
4504 <sup>R</sup>	Vertical	Peak	1000	-56.9	-41.2 Av -21.2 Pk	Pass
4804 <sup>H-R</sup>	Vertical	Peak	1000	-39.0	-21.2 Pk	Pass
4804 <sup>H-R</sup>	Vertical	Average	1000	-57.6	-41.2 Av	Pass
	Vertical	Peak	1000		-41.2 Av -21.2 Pk	Pass
7200 <sup>H</sup>	Vertical	Peak	1000	-52.0	-41.2 Av -21.2 Pk	Pass

Table 2

#### 3.2.2 Radiated field strength measurements (1 - 25 GHz, E-field), EUT's TX Frequency 2440 MHz

Frequency [MHz]	Antenna Orientation	Detector	Resolution Bandwidth (kHz)	Level [dBm]	Limit [dBm]	Result
2440 (fundamental)	Horizontal	Peak	1000	-21.5	-1.2 Av +18.9 Pk	Pass
3254	Vertical	Peak	1000	-61.8	-41.2 Av -21.2 Pk	Pass
4504 <sup>R</sup>	Vertical	Peak	1000	-57.1	-41.2 Av -21.2 Pk	Pass
4882 <sup>H-R</sup>	Vertical	Peak	1000	-39.0	-21.2 Pk	Pass
4882 <sup>H-R</sup>	Vertical	Average	1000	-58.3	-41.2 Av	Pass
7318 <sup>H-R</sup>	Vertical	Peak	1000	-56.6	-41.2 Av -21.2 Pk	Pass
7708 <sup>R</sup>	Vertical	Peak	1000	-56.0	-41.2 Av -21.2 Pk	Pass
15191	Vertical	Peak	1000	-48.8	-41.2 Av -21.2 Pk	Pass

Table 3

### 3.2.3 Radiated field strength measurements (1 - 25 GHz, E-field), EUT's TX Frequency 2480 MHz

Frequency [MHz]	Antenna Orientation	Detector	Resolution Bandwidth (kHz)	Level [dBm]	Limit [dBm]	Result
2480 (fundamental)	Horizontal	Peak	1000	-22.8	-1.2 Av +18.9 Pk	Pass
4504 <sup>R</sup>	Horizontal	Peak	1000	-57.9	-41.2 Av -21.2 Pk	Pass
4960 <sup>H-R</sup>	Vertical	Peak	1000	-38.4	-21.2 Pk	Pass
4960 <sup>H-R</sup>	Vertical	Average	1000	-58.1	-41.2 Av	Pass
7435 <sup>H-R</sup>	Vertical	Peak	1000	-55.4	-41.2 Av -21.2 Pk	Pass
11186 <sup>R</sup>	Vertical	Peak	1000	-49.6	-41.2 Av -21.2 Pk	Pass

Table 4

### 3.2.4 Radiated field strength measurements (1 - 25 GHz, E-field), EUT normal operation

Frequency [MHz]	Antenna Orientation	Detector	Resolution Bandwidth (kHz)	Level [dBm]	Limit [dBm]	Result
1064.9 <sup>R</sup>	Vertical	Peak	1000	-62.3	-41.2 Av -21.2 Pk	Pass
1080.0 <sup>R</sup>	Horizontal	Peak	1000	-62.3	-41.2 Av -21.2 Pk	Pass
1113.8 <sup>R</sup>	Horizontal	Peak	1000	-64.7	-41.2 Av -21.2 Pk	Pass
1157.0 <sup>R</sup>	Vertical	Peak	1000	-64.6	-41.2 Av -21.2 Pk	Pass
1320.9 <sup>R</sup>	Horizontal	Peak	1000	-63.6	-41.2 Av -21.2 Pk	Pass
1441.2 <sup>R</sup>	Horizontal	Peak	1000	-63.7	-41.2 Av -21.2 Pk	Pass
4921 <sup>H-R</sup>	Vertical	Peak	1000	-54.0	-41.2 Av -21.2 Pk	Pass
4960 <sup>H-R</sup>	Vertical	Peak	1000	-56.7	-41.2 Av -21.2 Pk	Pass
6562	Vertical	Peak	1000	-55.6	-41.2 Av -21.2 Pk	Pass
11459 <sup>R</sup>	Vertical	Peak	1000	-47.9	-41.2 Av -21.2 Pk	Pass
12517 <sup>R</sup>	Vertical	Peak	1000	-50.7	-41.2 Av -21.2 Pk	Pass
14731 <sup>H</sup>	Vertical	Peak	1000	-48.5	-41.2 Av -21.2 Pk	Pass

Table 5

The results of the radiated emission tests, carried out in accordance with 47 CFR Part 15 section 15.209 and 15.249 with the EUT operating in continues transmit mode are depicted in Tables 2 through 5.

**Notes:**

1. Field strength values of radiated emissions at frequencies not listed in the table above are more than 20 dB below the applicable limit.
2. Measurement uncertainty is  $\pm 5.0$ dB
3. The reported field strength values are the worst case values at the indicated frequency. The EUT was varied in three positions, the antenna was varied in horizontal and vertical orientations and also in height (between 1m and 4m).
4. The EUT was tested in on the lowest frequency (2402 MHz), a middle frequency (2440 MHz) and the highest frequency (2480 MHz) in the 2402 – 2480 MHz band wherein it operates and the normal operation with both transmitters (ANT and BLE) active, although they never transmit simultaneously.
5. Most Peak values were within Average limits, therefor not retested with Average detector, except where Peak value exceeds Average limit.
6. <sup>h</sup> indicates a harmonic frequency, <sup>R</sup> indicates a frequency in the restricted band and <sup>H-R</sup> indicates a harmonic frequency in a restricted band.

Used test equipment and ancillaries:

A00450	A00235	A00337	A00258	A00444	A00009	A00012	A00255	A00247
A00151	A00131	A00065						

## **4 AC Powerline Conducted Emission Data.**

### **4.1 AC Power Line Conducted Emission data of the EUT**

**RESULT: Not Applicable**

Date of testing: Not applicable, not tested



## 5 Emissions at the band edges

**RESULT: Pass**

Date of testing: 2015-02-28

The tables below show compliance with the 47 CFR Part 15 section 15.249(d), this section requires the emissions outside the 2400 and 2483.5 MHz frequency band to be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in section 15.209, whichever is the lower attenuation. Table 6 and Table 7 below show the levels at the band edges in respect to the general radiated emission limits.

EUT Frequency [MHz]	Band Edge Frequency [MHz]	Antenna Orientation	Level Pk [dBm]	Limit Pk [dBm]	Result Pass/Fail	Plot number
2402	2382.258	Horizontal	-35.4	-21.2	Pass	1a
2480	2487.822	Horizontal	-34.4	-21.2	Pass	1b

Table 6 level of the band edge emissions, Peak values

EUT Frequency [MHz]	Band Edge Frequency [MHz]	Antenna Orientation	Level Av [dBm]	Limit Av [dBm]	Result Pass/Fail	Plot number
2402	2384.689	Horizontal	-48.3	-41.2	Pass	2a
2480	2489.732	Horizontal	-48.5	-41.2	Pass	2b


Table 7 level of the band edge emissions, Average values

### Notes:

1. Measurement uncertainty is  $\pm 5.0$ dB
2. The reported field strength values are the worst case values at the indicated frequency. The EUT was varied in three positions, the antenna was varied in horizontal and vertical orientations and also in height (between 1m and 4m).
3. The EUT was tested in on the lowest frequency (2402 MHz) and the highest frequency (2480 MHz) in the 2402 – 2480 MHz band wherein it operates.
4. See plots on pages 18-19.


Used test equipment and ancillaries:

A00450	A00235	A00337	A00258	A00444	A00009	A00012	A00255	A00247
--------	--------	--------	--------	--------	--------	--------	--------	--------

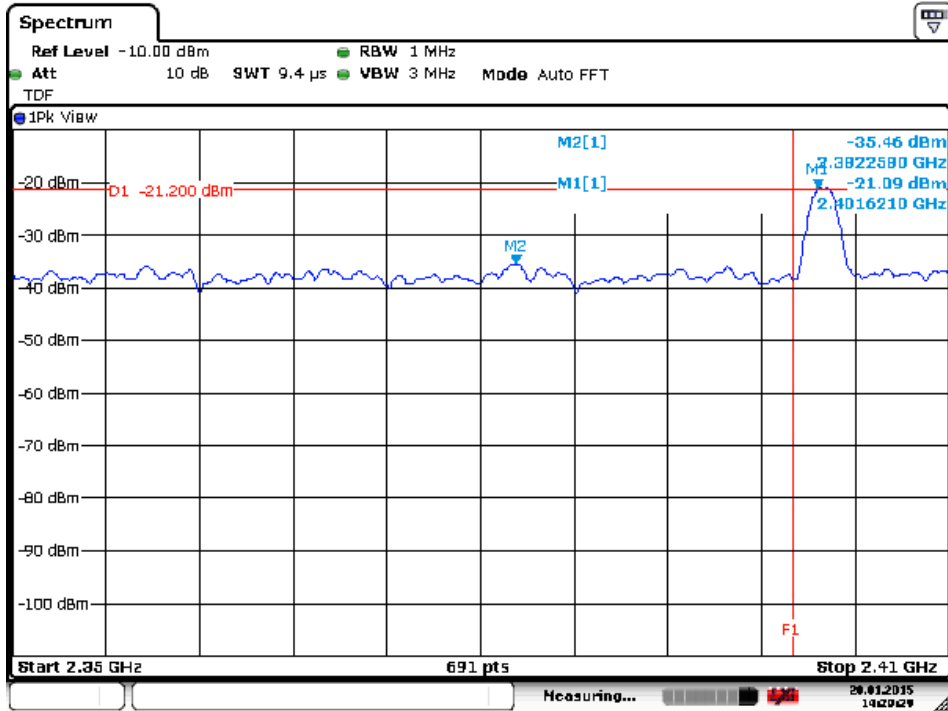


Date: 28. JAN. 2015 14:29:29

Plot 1a Peak value

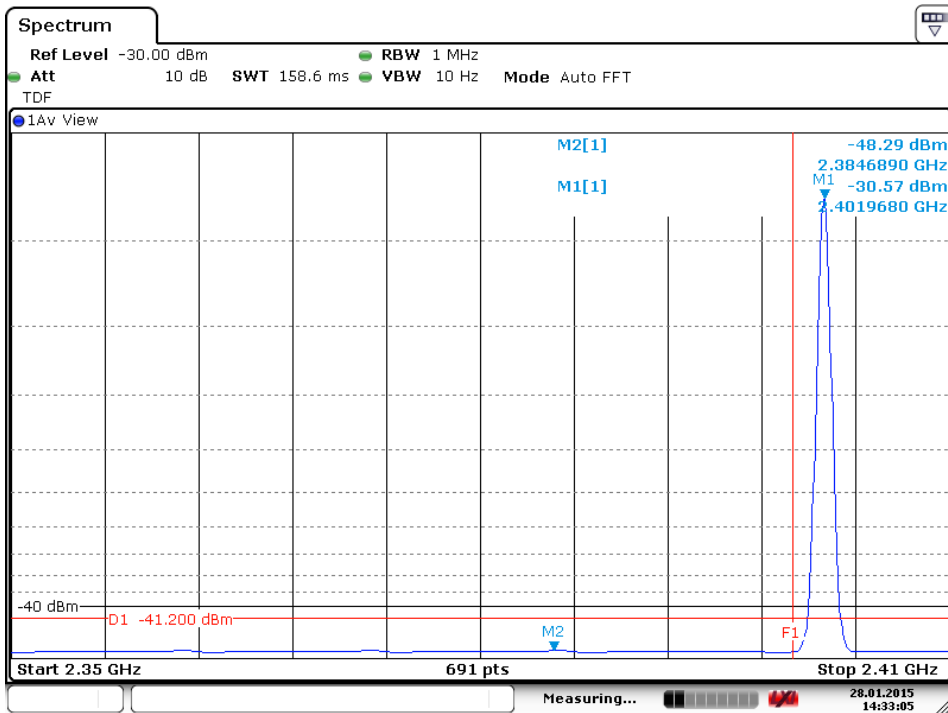


Date: 28. JAN. 2015 14:33:05

Plot 1b

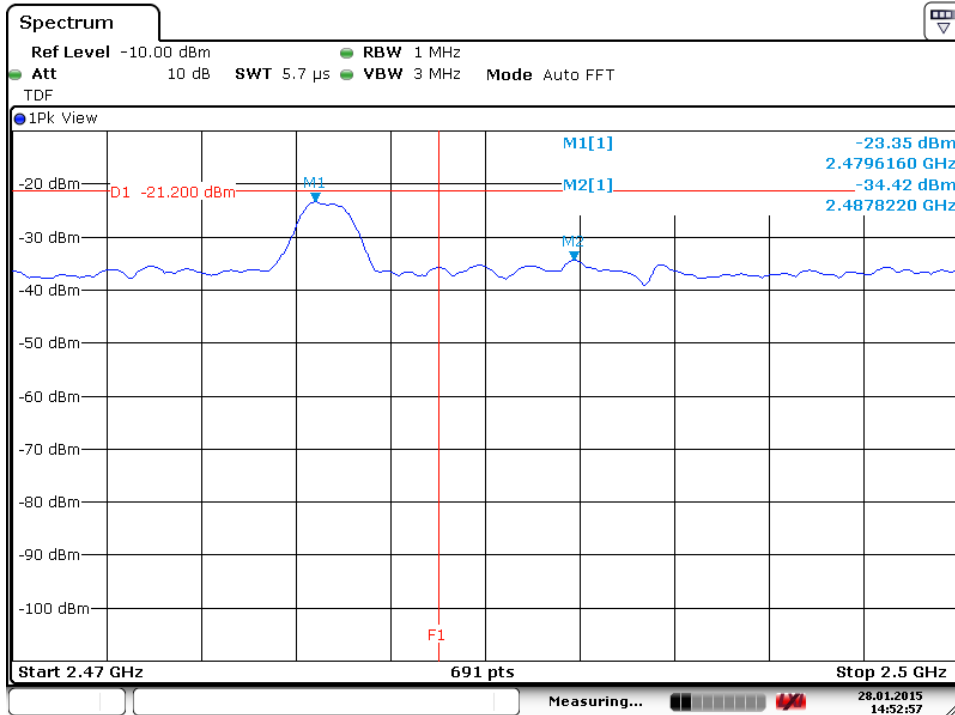

Plot 2a Peak value

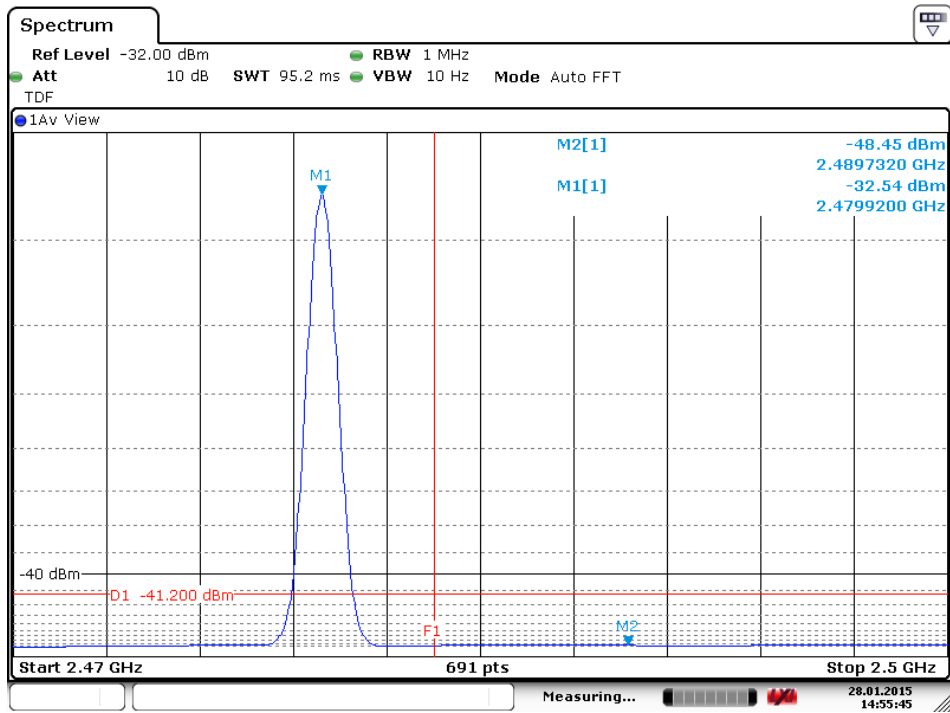

Plot 2b Average


## 6 Bandwidth of the emission

**RESULT: PASS**

Date of testing: 2015-02-28


This was tested with a spectrum analyzer connected by a RF cable to the EUT antenna connector. Power level therefor differs from the radiated power levels.

The plots below show compliance with the 47 CFR Part 15 section 15.215(c), this section requires the 20 dB emission bandwidth is within the frequencyband designated in section 15.249.

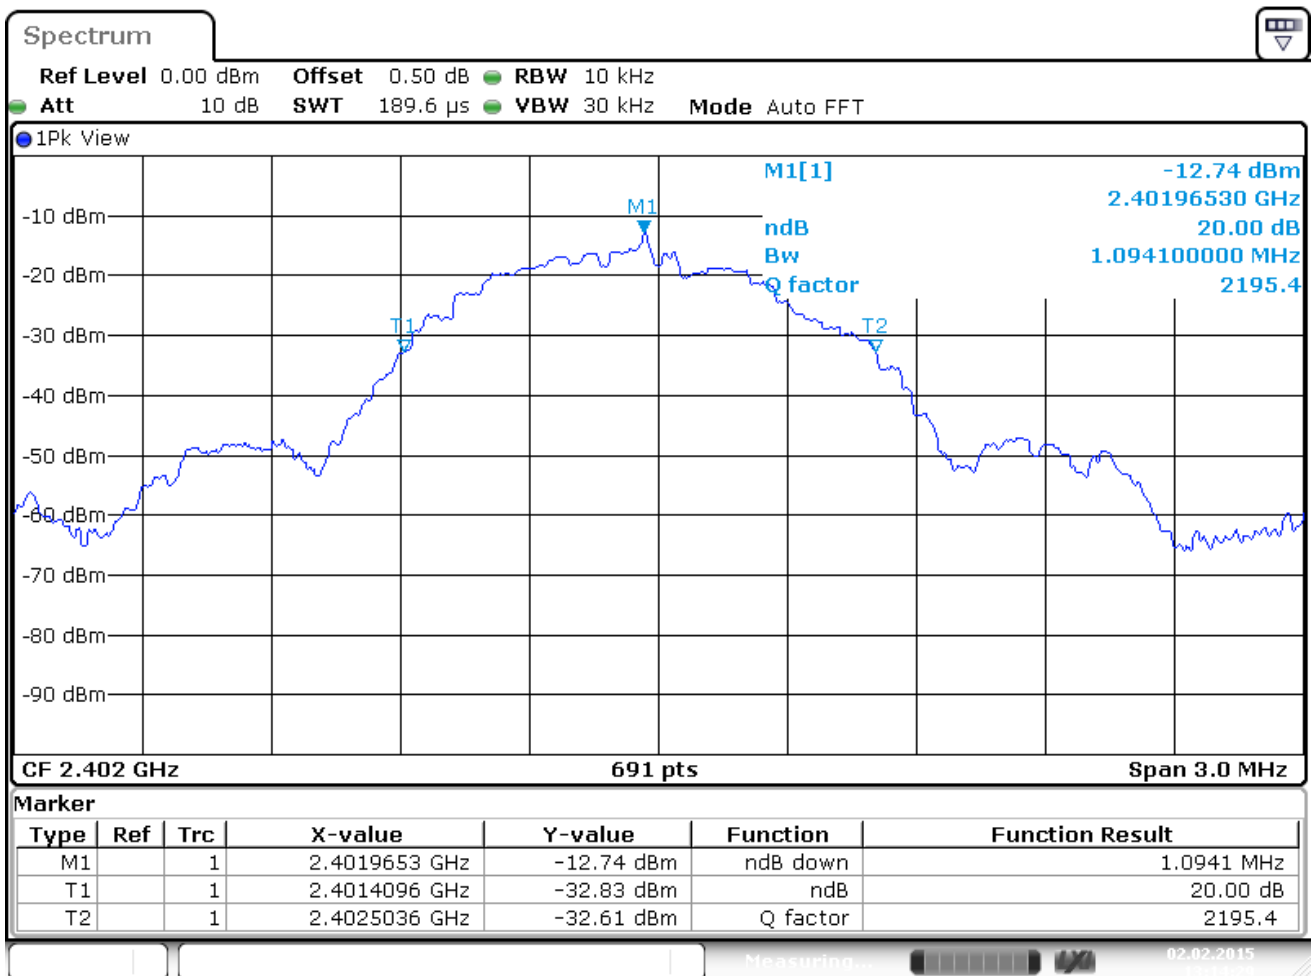


Date: 2.FEB.2015 13:14:29

Plot lowest channel - 2402 MHz, Occupied bandwidth is 1094.10 kHz as measured on a spectrum analyzer.

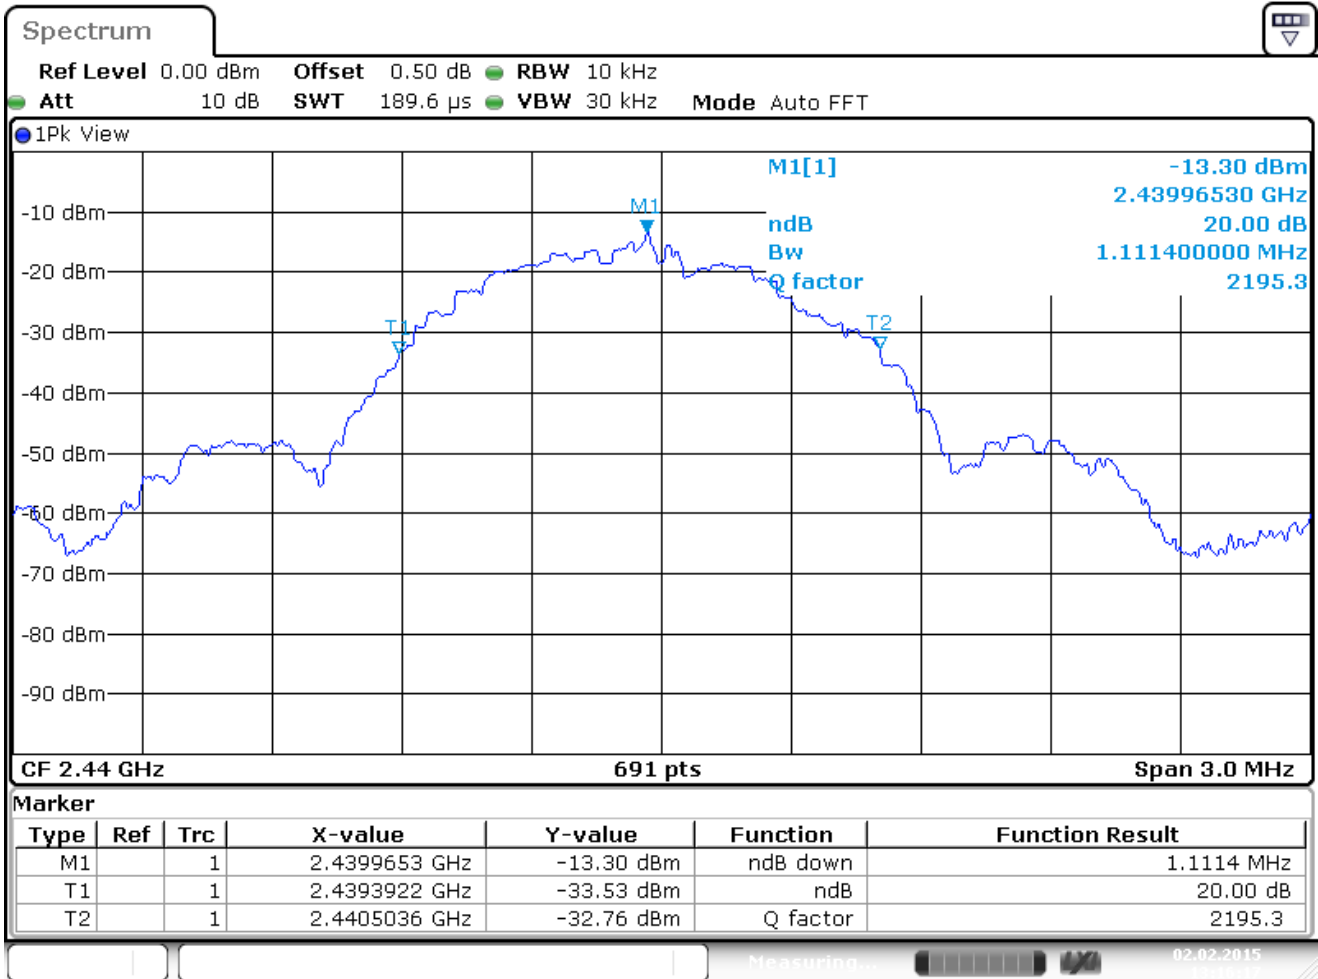

Date: 2.FEB.2015 13:16:16

Plot middle channel - 2440 MHz, Occupied bandwidth is 1111.40 kHz as measured on a spectrum analyzer.

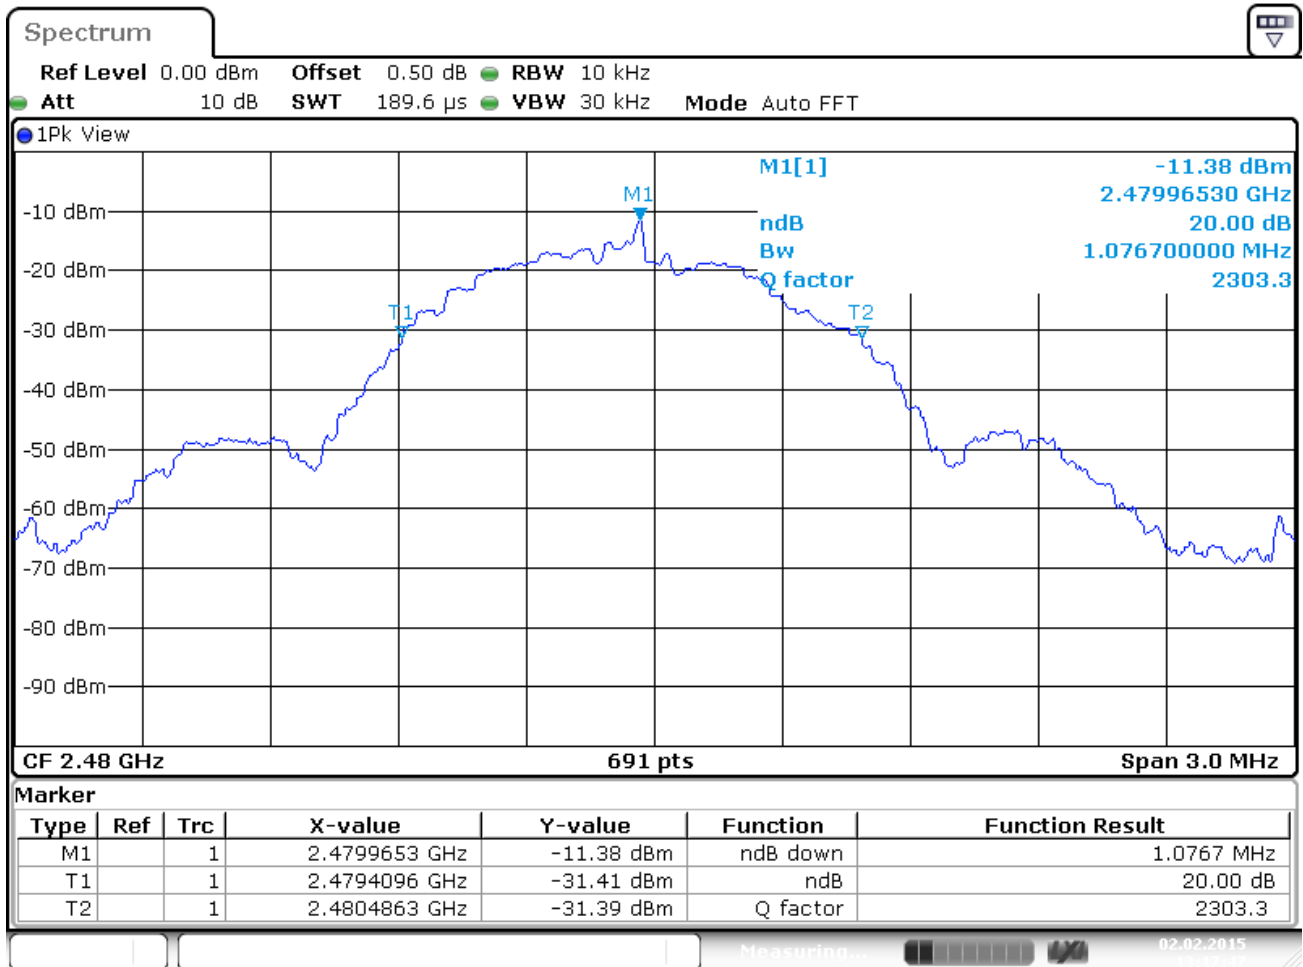

Date: 2.FEB.2015 13:17:47

Plot highest channel - 2480 MHz, Occupied bandwidth is 1076.70 kHz as measured on a spectrum analyzer.

## 7 List of utilized test equipment.

Kind of Equipment	Manufacturer	Model Name	Inventory number	Calibration date (mm/yyyy)	Calibration due date (mm/yyyy)
<b>For Antenna Port Conducted Emissions</b>					
Temperature-Humiditymeter	Extech	SD500	A00446	03/2014	03/2015
Spectrum Analyzer	Rohde & Schwarz	FSV	A00337	08/2014	08/2015
RF Cable	H+S	Secuflex	A00347	04/2014	04/2015
<b>For Radiated Emissions</b>					
Measurement Receiver	Rohde & Schwarz	ESCI	A00314	03/2014	03/2015
RF Cable S-AR	Gigalink	APG0500	A00447	01/2014	01/2015
Controller	Maturo	SCU/088/ 8090811	A00450	N/A	N/A
Controller	EMCS	DOC202	A00257	N/A	N/A
Test facility	Comtest	FCC listed: 90828 IC: 2932G-2	A00235	04/2014	04/2017
Spectrum Analyzer	Rohde & Schwarz	FSV	A00337	08/2014	08/2015
Antenna mast	EMCS	AP-4702C	A00258	N/A	N/A
Temperature-Humiditymeter	Extech	SD500	A00444	03/2014	03/2015
Guidehorn 1-18 GHz	EMCO	3115	A00009	04/2014	04/2015
Guidehorn 18-40 GHz	EMCO	RA42-K-F-4B-C	A00012	04/2014	04/2015
Biconilog Testantenna	Teseq	CBL 6111D	A00466	06/2014	06/2015
2.4 GHz bandreject filter	BSC	XN-1783	A00065	N/A	N/A
Bandpass filter 4-10 GHz	Reactel	7AS-7G-6G-511	A00131	N/A	N/A
Bandpass filter 10-26 GHz	Reactel	9HS-10G/26.5G-S11	A00151	N/A	N/A
Preamplifier 0.5 - 18 GHz	Miteq	AMF-5D-005180-28-13p	A00247	N/A	N/A
Filterbox	EMCS	RFS06S	A00255	08/2014	08/2015

Conformance of the used measurement and test equipment with the requirements of ISO/IEC 17025:2005 has been confirmed before testing.

NA= Not Applicable

**End of report**