

# TEST REPORT

Report No.: BCTC2310124303-7E

---

Applicant: SHENZHEN NST INDUSTRY AND TRADE CO.,LTD

---

Product Name: 10.1 inch tablet PC

---

Model/Type  
reference: T12

---

Tested Date: 2024-02-21 to 2024-02-23

---

Issued Date: 2024-04-08

---

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID: 2AAMS-SGINT12T12S

Product Name: 10.1 inch tablet PC  
Trademark: N/A  
Model/Type Ref.: T12  
M1X5CQ  
Applicant: SHENZHEN NST INDUSTRY AND TRADE CO.,LTD  
Address: 3-4/F, Bldg 1, Hongbang Intelligent Technology Park, No.30 Cuibao Road, Baolong Street, Longgang District, Shenzhen  
Manufacturer: SHENZHEN NST INDUSTRY AND TRADE CO.,LTD  
Address: 3-4/F, Bldg 1, Hongbang Intelligent Technology Park, No.30 Cuibao Road, Baolong Street, Longgang District, Shenzhen  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2024-02-21  
Sample tested Date: 2024-02-21 to 2024-02-23  
Issue Date: 2024-04-08  
SAR Max. Values is : 1.186 W/kg (1g) for Body  
Test Standards: IEEE Std C95.1, 2019/ IEEE Std 1528™-2013/FCC Part 2.1093  
Test Results: PASS  
Remark: This is SAR test report

Tested by:

Min Zhi Cheng/ Project Handler

Approved by:

Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

Test Report Declaration	Page
1. Version .....	5
2. Test Standards .....	6
3. Test Summary .....	7
4. SAR Limits.....	8
5. Measurement Uncertainty .....	9
6. Product Information and Test Setup.....	10
6.1 Product Information .....	10
6.2 Test Setup Configuration .....	14
6.3 Support Equipment .....	14
6.4 Test Environment .....	14
7. Test Facility and Test Instrument Used .....	15
7.1 Test Facility .....	15
7.2 Test Instrument Used .....	16
8. Specific Absorption Rate (SAR) .....	17
8.1 Introduction.....	17
8.2 SAR Definition .....	17
9. SAR Measurement System .....	18
9.1 The Measurement System.....	18
9.2 Probe.....	18
9.3 Probe Calibration Process .....	20
9.4 Phantom .....	21
9.5 Device Holder.....	21
10. Tissue Simulating Liquids.....	22
10.1 Composition of Tissue Simulating Liquid .....	22
10.2 Limit.....	23
10.3 Tissue Calibration Result.....	24
11. System Check .....	25
11.1 Purpose of System Performance Check.....	25
11.2 System Setup .....	25
11.3 Validation Results .....	26
12. EUT Testing Position.....	27
13. SAR Measurement Procedures.....	28
13.1 Measurement Procedures .....	28
13.2 Spatial Peak SAR Evaluation .....	28
13.3 Area & Zoom Scan Procedures .....	29
13.4 Volume Scan Procedures .....	30
13.5 SAR Averaged Methods .....	30
13.6 Power Drift Monitoring .....	30
14. SAR Test Result.....	31
14.1 Conducted RF Output Power.....	31
14.2 Transmit Antennas and SAR Measurement Position.....	57
14.3 Measured and Reported (Scaled) SAR Results .....	58
14.4 SAR Measurement Variability.....	66


14.5 Simultaneous Transmission Evaluation .....	67
15. Test Plots .....	69
15.1 System Performance Check .....	69
15.2 SAR Test Graph Results .....	85
16 CALIBRATION CERTIFICATES.....	111
17. EUT Photographs.....	214
18. Photographs Of The Liquid.....	215
19. EUT Test Setup Photographs.....	216

(Note: N/A Means Not Applicable)

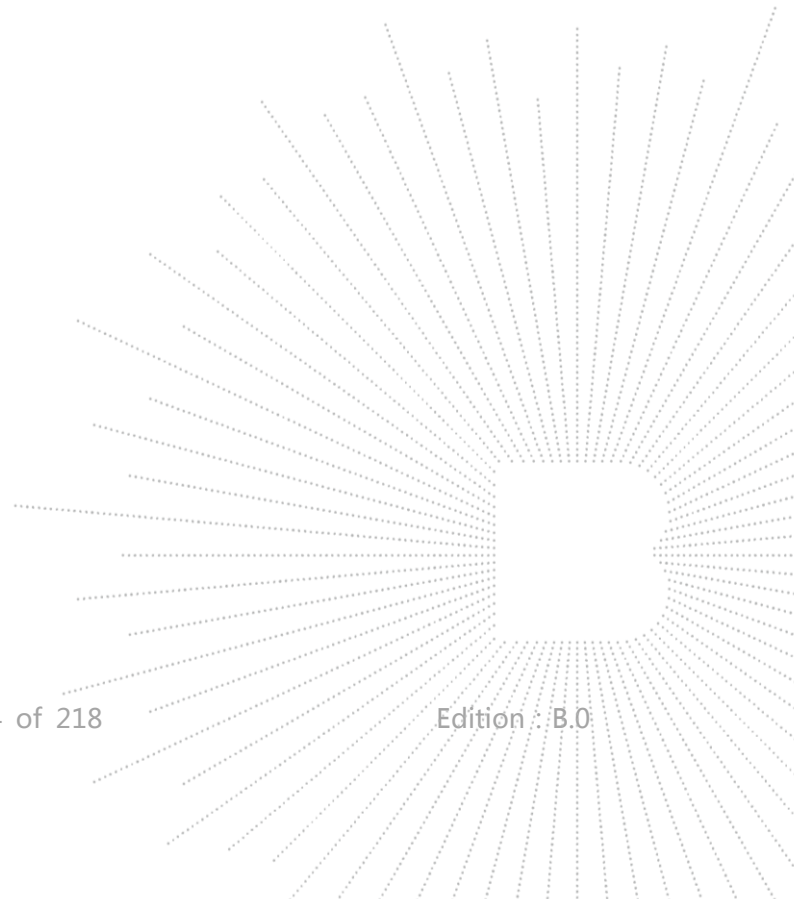

**1. Version**

<b>Report No.</b>	<b>Issue Date</b>	<b>Description</b>	<b>Approved</b>
BCTC2310124303-7E	2024-04-08	Original	Valid

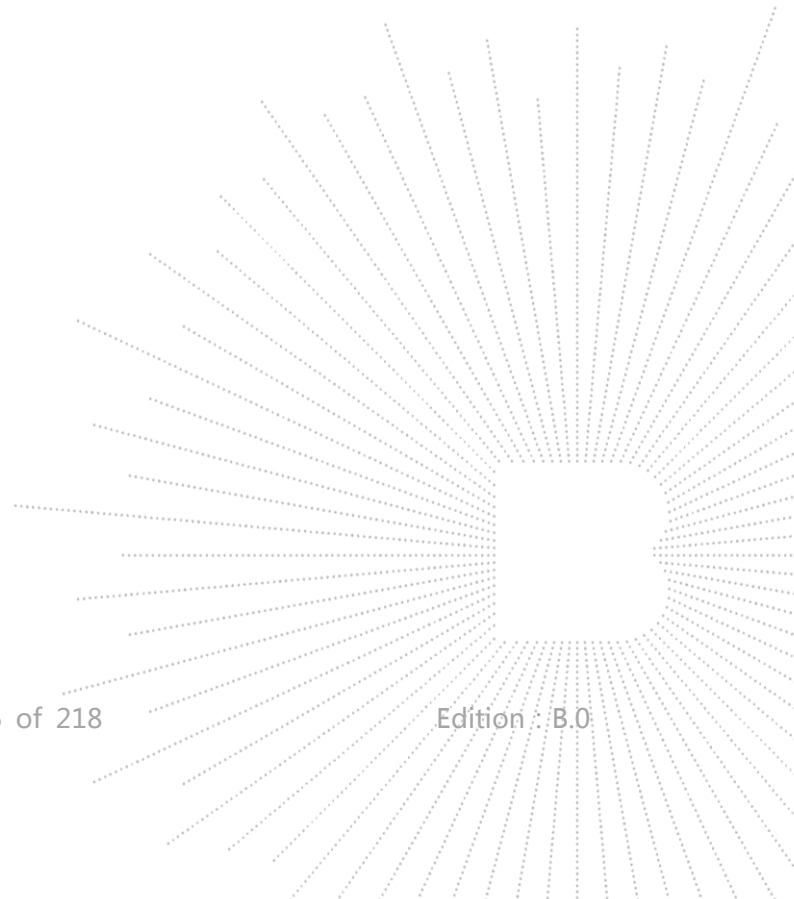

## 2. Test Standards

IEEE Std C95.1-2019: IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

FCC Part 2.1093 Radiofrequency Radiation Exposure Evaluation: Portable Devices

KDB 447498 D01 General RF Exposure Guidance v06: Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04: SAR Measurement Requirements for 100 MHz to 6 GHz

KDB 865664 D02 RF Exposure Reporting v01r02: RF Exposure Compliance Reporting and Documentation Considerations

KDB 248227 D01 802.11 Wi-Fi SAR v02r02: SAR GUIDANCE FOR IEEE 802.11 (Wi-Fi) TRANSMITTERS


KDB 941225 D01 3G SAR Procedures: 3G SAR MEAUREMENT PROCEDURES

KDB 941225 D05 SAR for LTE Devices: SAR EVALUATION CONSIDERATIONS FOR LTE DEVICES

KDB 941225 D06 Hotspot Mode v02r01: SAR EVALUATION PROCEDURES FOR PORTABLE DEVICES WITH WIRELESS ROUTER CAPABILITIES

KDB 648474 D04 Handset SAR v01r03: SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS

KDB 648474 D04 Handset SAR v01r03: SAR EVALUATION CONSIDERATIONS FOR WIRELESS HANDSETS

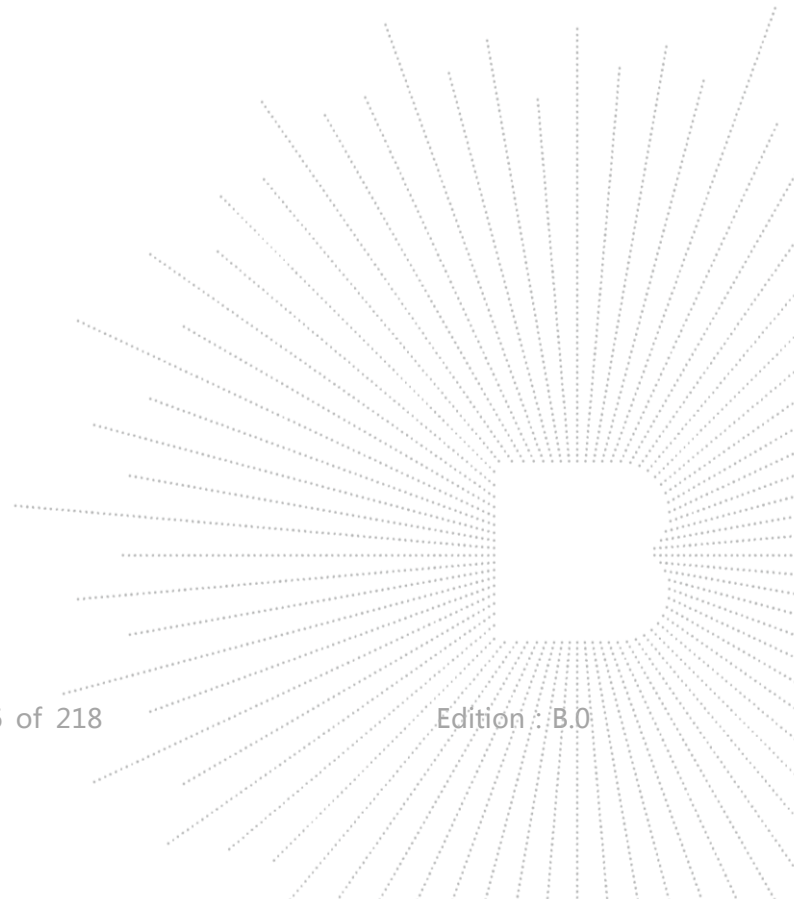


### 3. Test Summary

The maximum results of Specific Absorption Rate (SAR) have found during testing are as follows:

Frequency Band	Report SAR <sub>1g</sub> (W/kg)	SAR <sub>1g</sub> Limit (W/kg)
	Body (0mm Gap)	
<b>Bluetooth</b>	0.059	1.6
<b>WIFI</b>	0.412	1.6
<b>GSM</b>	0.772	1.6
<b>WCDMA</b>	1.186	1.6
<b>LTE</b>	1.099	1.6
<b>Simultaneous Transmission</b>	1.511	1.6

The device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-2019, and had been tested in accordance with the measurement methods and procedure specified in IEEE 1528-2013.

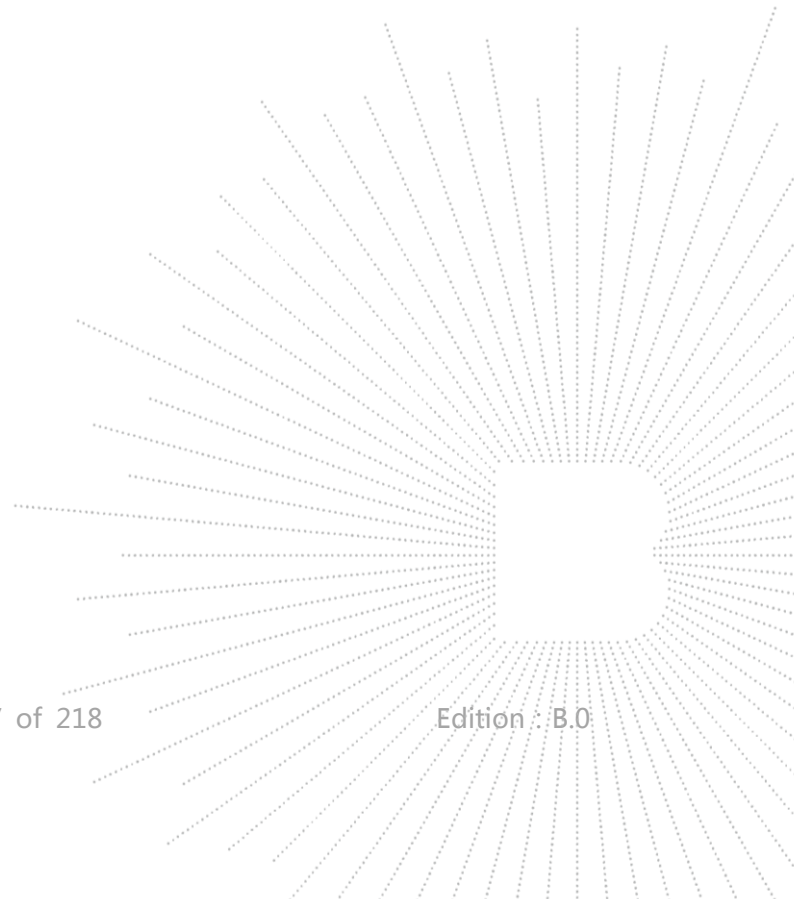


#### 4. SAR Limits

EXPOSURE LIMITS	FCC Limit (1g Tissue)	
	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average(averaged over the whole body)	0.08	0.4
Spatial Peak(averaged over any 1 g of tissue)	1.6	8.0
Spatial Peak(hands/wrists/ feet/anklesaveraged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

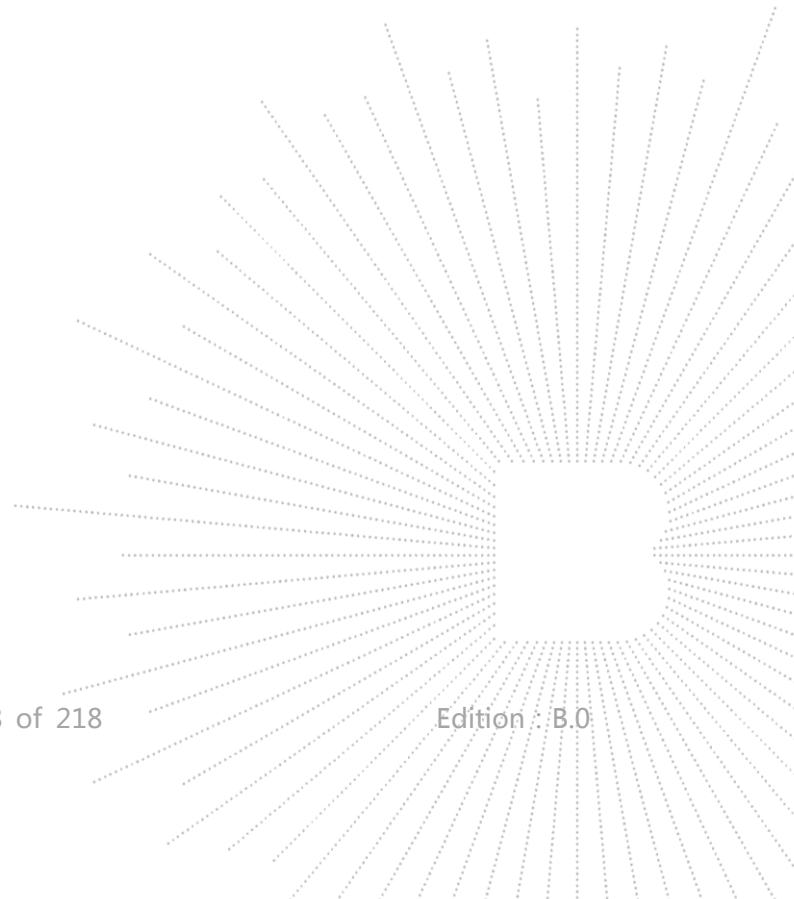




## 5. Measurement Uncertainty


Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5$  W/kg and the measured 10-g SAR within a frequency band is  $< 3.75$  W/kg. The expanded SAR measurement uncertainty must be  $\leq 30\%$ , for a confidence interval of  $k=2$ . If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

Therefore, the measurement uncertainty is not required.

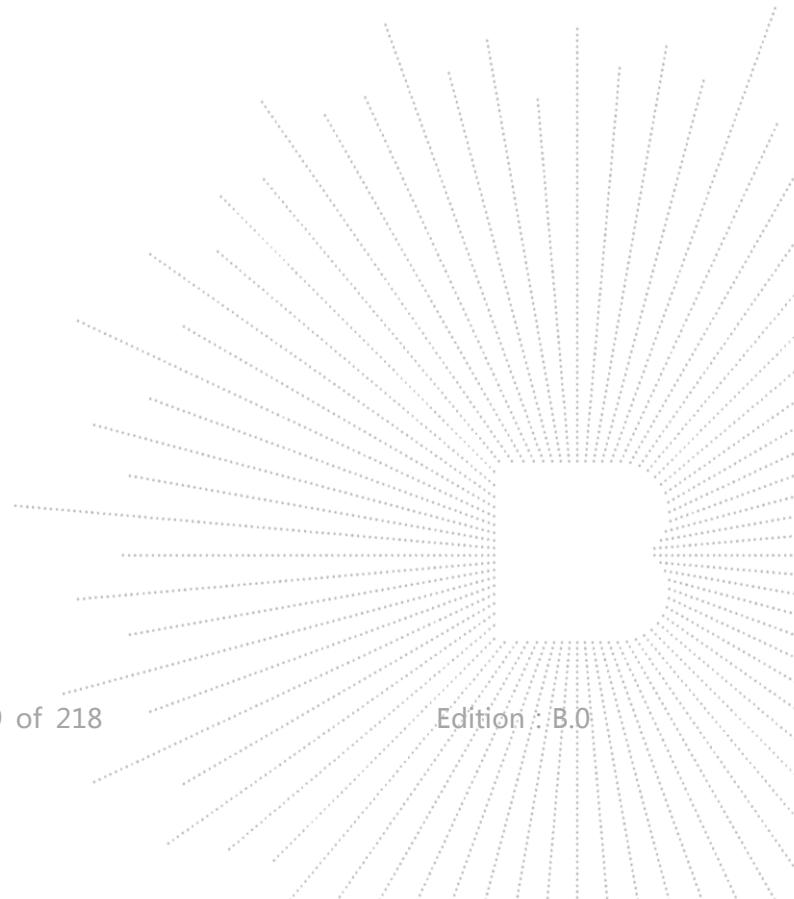

## 6. Product Information and Test Setup

### 6.1 Product Information


Model/Type reference:	T12 M1X5CQ
Model differences:	All the model are the same circuit and RF module, except model names and appearance of the color.
Hardware Version:	T30-T616-V2.0-230725-LU
Software Version:	SGIN_T12_ROW_V1.0_20231010
Ratings:	DC 5V from adapter/DC 3.8V from battery
Adapter Information:	MODEL: MK050200-T10USU INPUT: 100-240V-50/60Hz 0.5A Max OUTPUT: 5.0V  2000mA

#### Bluetooth

Operation Frequency:	2402-2480MHz
Type of Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number Of Channel	79CH
Antenna installation:	Internal antenna 1.27 dBi
Antenna Gain:	Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.

#### BLE

Operation Frequency:	2402-2480MHz
Type of Modulation:	GFSK
Number Of Channel	40CH
Antenna installation:	Internal antenna 1.27 dBi
Antenna Gain:	Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.

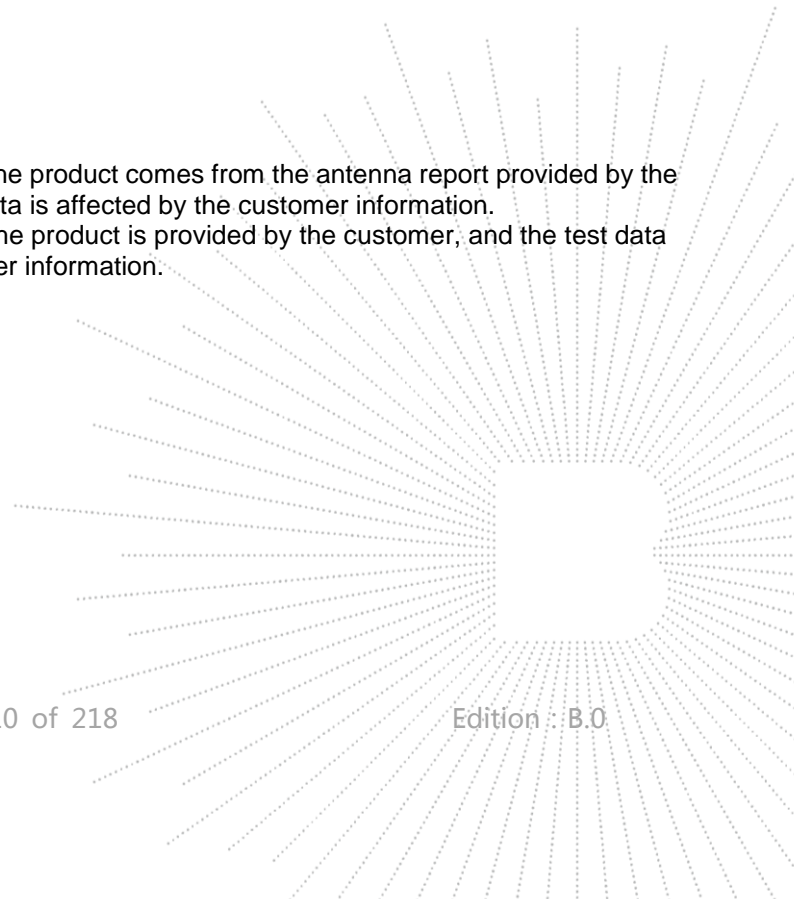

**WIFI 2.4G**


Operation Frequency:	802.11b/g/n20MHz:2412~2462 MHz 802.11n40MHz:2422~2452 MHz
Bit Rate of Transmitter	802.11b:11/5.5/2/1 Mbps 802.11g:54/48/36/24/18/12/9/6Mbps 802.11n Up to 150Mbps
Type of Modulation:	OFDM/DSSS
Number Of Channel	802.11b/g/n20MHz:11 CH 802.11n40MHz: 7 CH
Antenna installation:	Internal antenna 1.27 dBi
Antenna Gain:	Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.

**WIFI 5G**

IEEE 802.11 WLAN Mode Supported	802.11a/n/ac(20MHz channel bandwidth) 802.11n/ac(40MHz channel bandwidth) 802.11ac(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n(HT20); 5190-5230MHz for 802.11n(HT40); 5210MHz for 802.11 ac80; 5745-5825 MHz for 802.11a/n(HT20); 5755-5795 MHz for 802.11n(HT40); 5775MHz for 802.11 ac80;
Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac; 4 channels for 802.11a/n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ;
Number Of Channel	1 channels for 802.11 ac80 in the 5210MHz band ; 5 channels for 802.11a/n20 in the 5745-5825MHz band ; 2 channels for 802.11 n40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band
Antenna installation:	Internal antenna 2.75 dBi
Antenna Gain:	Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.


**2G, 3G**

Operation Frequency:	GSM/GPRS/EGPRS 850: TX: 824~849MHz; RX: 869~894MHz; GSM/GPRS/EGPRS 1900: TX:1850~1910MHz; RX:1930~1990MHz; WCDMA Band II: TX: 1852.40~1907.60MHz; Rx: 1932.60~1987.40MHz; WCDMA Band V: TX: 826.40~846.60MHz; RX: 871.40~ 891.60MHz;
GPRS Class:	Class 12
Max RF Output Power:	GSM/GPRS/EGPRS 850: 32.43 dBm, GSM/GPRS/EGPRS 1900: 28.54 dBm WCDMA Band II: 21.30 dBm WCDMA Band V: 22.49 dBm
Type of Modulation:	GSM with GMSK Modulation WCDMA Mode with BPSK Modulation HSDPA Mode with QPSK, 16QAM Modulation HSUPA Mode with QPSK, 16QAM Modulation
Type of Emission:	GSM/GPRS 850: 254KGXW EGPRS 850:250KG7W GSM/GPRS 1900: 248KGXW EGPRS 1900:252KG7W WCDMA Band II: 4M16F9W WCDMA Band V: 4M17F9W
Antenna installation:	Internal antenna GSM850: 0.8 dBi GSM1900: 1.2 dBi WCDMA Band II: 1.2 dBi WCDMA Band V: 0.8 dBi
Antenna Gain:	Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.

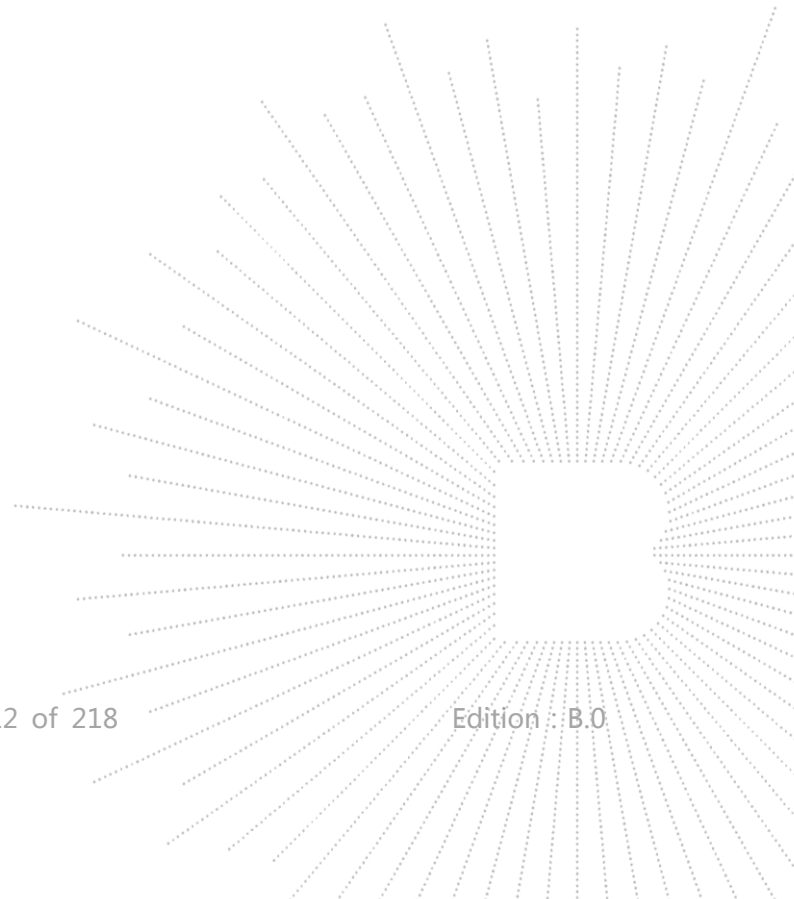

**4G**

Tx Frequency:	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500MHz-2570MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 17: 704MHz-716MHz
Rx Frequency:	LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 7: 2620MHz-2690MHz LTE Band 12: 729 MHz ~ 746 MHz LTE Band 17: 734MHz-746MHz
Bandwidth:	LTE Band 2: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 4: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 5: 1.4MHz /3MHz /5MHz /10MHz LTE Band 7: 5MHz /10MHz /15MHz /20MHz LTE Band 12: 1.4MHz /3MHz /5MHz /10MHz LTE Band 17: 5MHz /10MHz
The Max RF Output Power (EIRP/ERP)	LTE Band 2: 23.78 dBm LTE Band 4: 24.11 dBm LTE Band 5: 21.67 dBm LTE Band 7: 25.3 dBm LTE Band 12: 22.25 dBm LTE Band 17: 21.98 dBm
99% Occupied Bandwidth:	LTE Band 2: 18M1G7D LTE Band 4: 18M1W7D LTE Band 5: 9M04G7D LTE Band 7: 18M1W7D LTE Band 12: 9M01W7D LTE Band 17: 8M99G7D
Type of Modulation:	QPSK/16QAM
Antenna Type:	Internal Antenna
Antenna Gain:	LTE Band 2: 1.1 dBi LTE Band 4: 1 dBi LTE Band 5: 0.8 dBi LTE Band 7: 1.6 dBi LTE Band 12: 0.6 dBi LTE Band 17: 0.7 dBi
	Remark: <input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. <input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information.

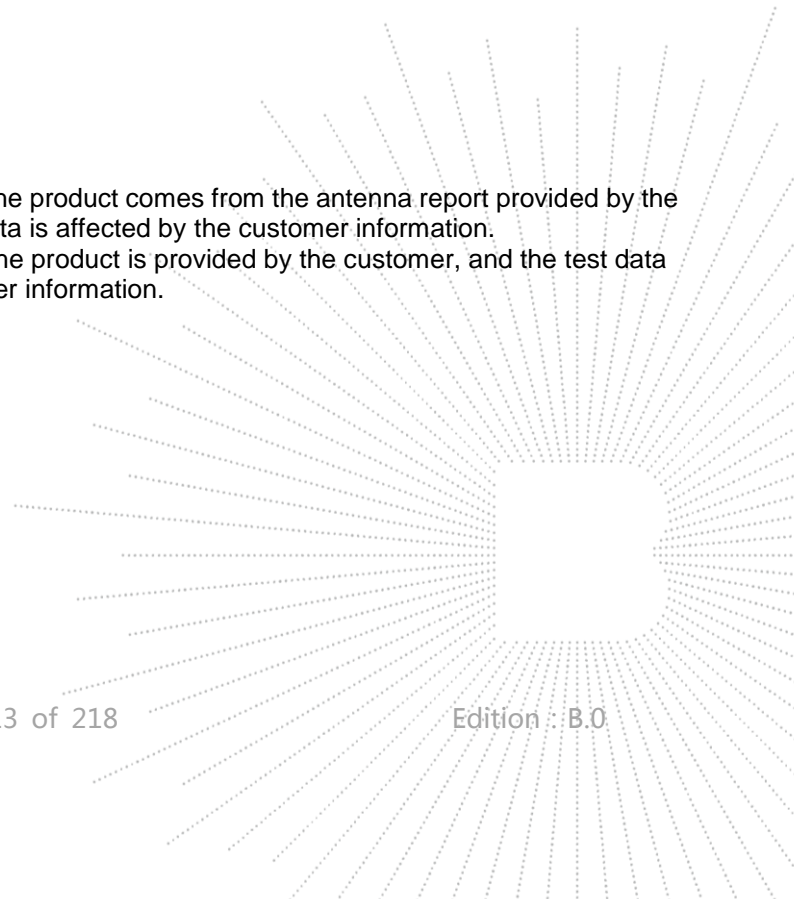

## 6.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

## 6.3 Support Equipment

### Cable of Product

No.	Cable Type	Quantity	Provider	Length (m)	Shielded	Note
1	--	--	Applicant	---	Yes/No	--
2	--	--	BCTC	--	Yes/No	--

No.	Device Type	Brand	Model	Series No.	Note
1.	---	---	---	---	---
2.	--	--	--	--	--

### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


## 6.4 Test Environment

### 1. Normal Test Conditions:

Humidity(%):	35-75
Atmospheric Pressure(kPa):	95-105
Temperature(°C):	18-25

### 2. Extreme Test Conditions:

N/A

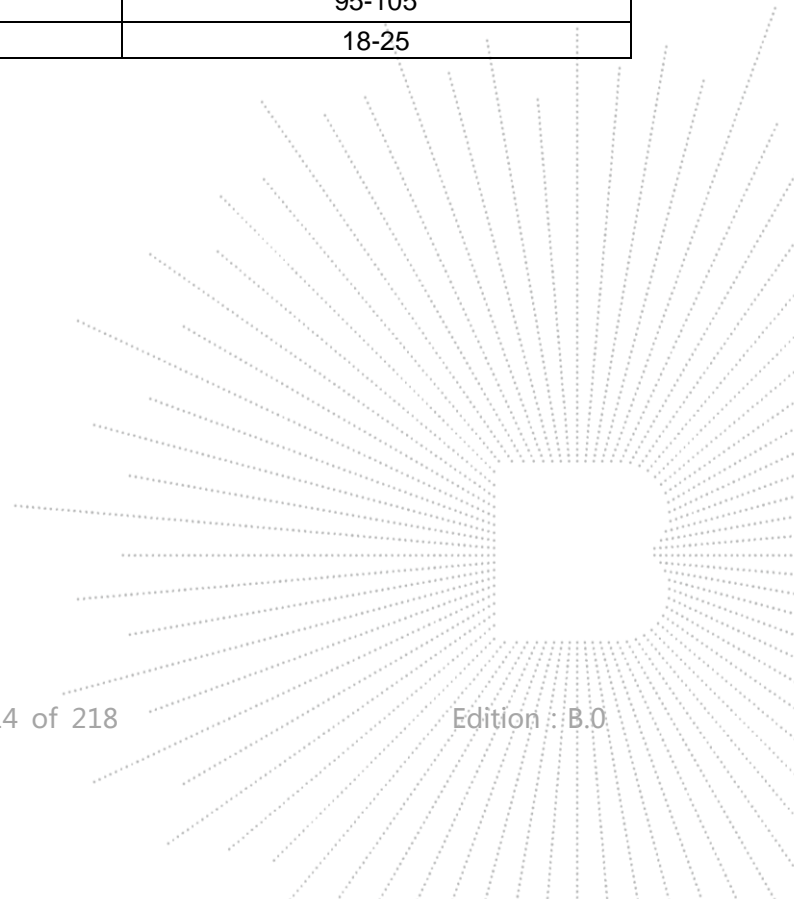


## 7. Test Facility and Test Instrument Used

### 7.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850  
A2LA certificate registration number is: CN1212  
ISED Registered No.: 23583  
ISED CAB identifier: CN0017

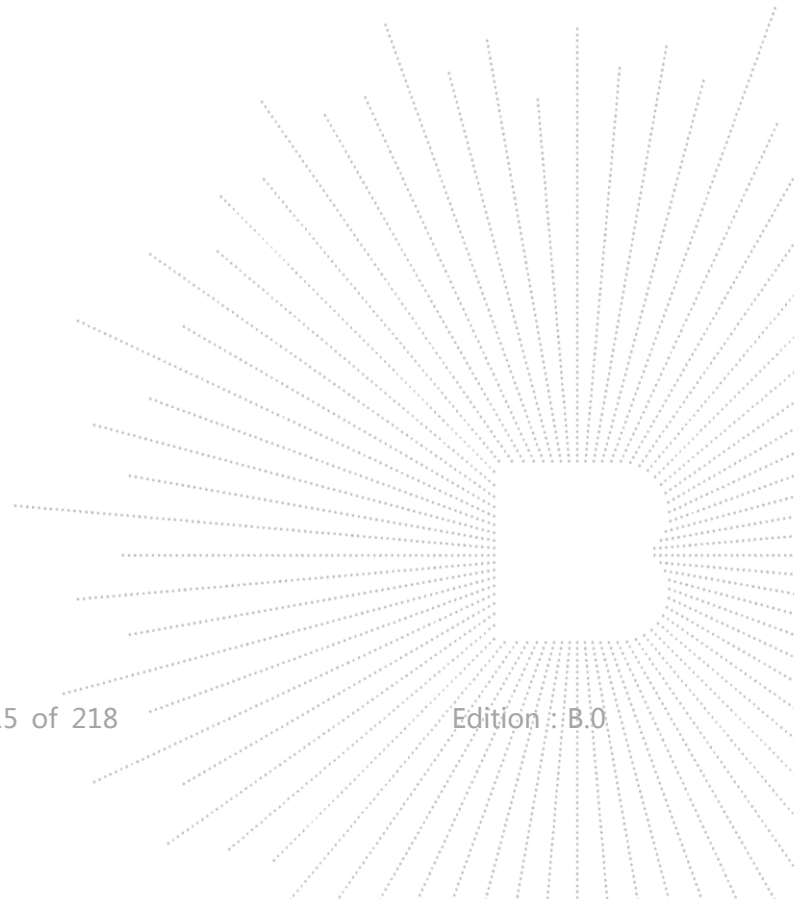



## 7.2 Test Instrument Used

Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
PC	DELL	\	\	N/A	N/A
SAR Measurement system	SATIMO	\	\	N/A	N/A
Signal Generator	Keysight	83711B	US37100131	Aug. 29, 2023	Aug. 28, 2024
Multimeter	Keithley	1160271	\	Nov. 10, 2023	Nov 09, 2024
S-parameter Network Analyzer	R&S	ZVB 8	101353	Dec. 07, 2023	Dec. 06, 2024
Wideband Radio Communication Tester	R&S	CMW500	\	Nov. 10, 2023	Nov 09, 2024
E SAR PROBE 6GHz	MVG	SSE2	2623-EPGO-420	July 18, 2023	July 17, 2024
DIPOLE 750	SATIMO	SID750	SN 47/21 DIP 2G450-620	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 835	SATIMO	SID835	SN 47/21 DIP 2G450-621	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 1800	SATIMO	SID1800	SN 47/21 DIP 2G450-623	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 1900	SATIMO	SID1900	SN 47/21 DIP 2G450-624	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 2450	SATIMO	SID2450	SN 47/21 DIP 2G450-627	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 2600	SATIMO	SID2600	SN 47/21 DIP 2G450-628	Nov. 25, 2021	Nov. 24, 2024
DIPOLE 5000	SATIMO	SID5000	SN 47/21 DIP 2G450-629	Nov. 25, 2021	Nov. 24, 2024
COMOSAR OPENCoaxial Probe	SATIMO	\	\	Nov. 18, 2023	Nov. 17, 2024
SAR Locator	SATIMO	\	\	Nov. 18, 2023	Nov. 17, 2024
Communication Antenna	SATIMO	\	\	Nov. 18, 2023	Nov. 17, 2024
FEATURE PHONEPOSITIONING DEVICE	SATIMO	\	\	N/A	N/A
LIMESAR DIELECTRIC PROBE	SATIMO	\	\	N/A	N/A
SAM Phantom	MVG	\	SN 13/09 SAM68	N/A	N/A
Liquid measurement Kit	HP	85033D	3423A08186	N/A	N/A
Power meter	Agilent	E4419	\	May 15, 2023	May 14, 2024
Power meter	Agilent	E4419	\	May 15, 2023	May 14, 2024
Power sensor	Agilent	E9300A	\	May 15, 2023	May 14, 2024
Power sensor	Agilent	E9300A	\	May 15, 2023	May 14, 2024
Directional Coupler	Krytar 158020	131467	\	Nov. 10, 2023	Nov 09, 2024
Thermometer	BTE	\	\	Dec. 02, 2023	Dec. 01, 2024
Broad Band Tissue Simulation Liquid	Schmid	\	\	N/A	N/A



## 8. Specific Absorption Rate (SAR)

### 8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the

electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 9. SAR Measurement System

### 9.1 The Measurement System

Comosar is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The Comosar system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.


### 9.2 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 46/21 EPGO362 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter : 5 mm
- Distance between probe tip and sensor center: 2.10mm
- Distance between sensor center and the inner phantom surface: 4 mm (repeatability better than +/- 1mm)
- Probe linearity: <0.25 dB
- Axial Isotropy: <0.25 dB
- Spherical Isotropy: <0.50 dB
- Calibration range: 835 to 2500MHz for head & body simulating liquid.

Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Probe calibration is realized, in compliance with EN 62209-1 and IEEE 1528 STD, with CALISAR, Antenna proprietary calibration system. The calibration is performed with the EN 62209-1 annex technique using reference guide at the five frequencies.

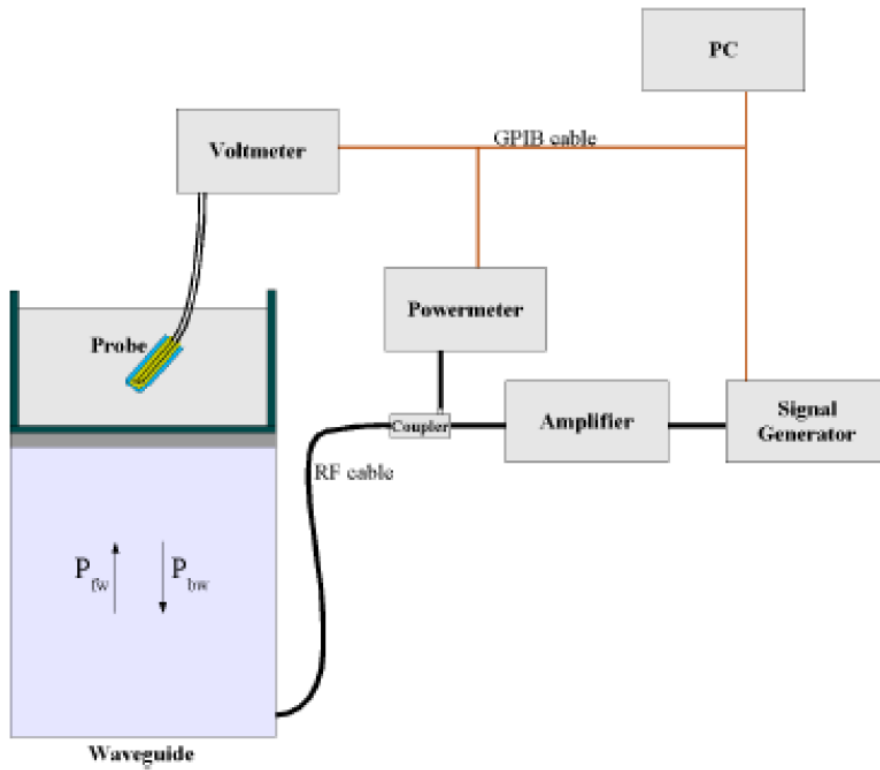

$$SAR = \frac{4(p_{fw} - p_{pbw})}{ab\delta} \cos^2 \left( \pi \frac{y}{a} \right) c^{(2\pi/\delta)}$$

Where :

$P_{fw}$  = Forward Power

$P_{bw}$  = Backward Power

a and b = Waveguide dimensions

$l$  = Skin depth

Keithley configuration:

Rate = Medium; Filter = ON; RDGS = 10; Filter type = Moving Average; Range auto after each calibration, a SAR measurement is performed on a validation dipole and compared with a NPL calibrated probe, to verify it.

The calibration factors,  $CF(N)$ , for the 3 sensors corresponding to dipole 1, dipole 2 and dipole 3 are:

$$CF(N) = SAR(N)/V_{lin}(N) \quad (N=1,2,3)$$

The linearised output voltage  $V_{lin}(N)$  is obtained from the displayed output voltage  $V(N)$  using

$$V_{lin}(N) = V(N) * (1 + V(N)/DCP(N)) \quad (N=1,2,3)$$

where DCP is the diode compression point in mV.

### 9.3 Probe Calibration Process

#### Dosimetric Assessment Procedure

Each E-Probe/Probe Amplifier combination has unique calibration parameters. SATIMO Probe calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an with CALISAR, Antenna proprietary calibration system.

#### Free Space Assessment Procedure

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1mW/cm<sup>2</sup>.

#### Temperature Assessment Procedure

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated head tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

Where:

$$SAR = C \frac{\Delta T}{\Delta t}$$

$\Delta t$  = exposure time (30 seconds),

$C$  = heat capacity of tissue (brain or muscle),

$\Delta T$  = temperature increase due to RF exposure.


SAR is proportional to  $\Delta T/\Delta t$ , the initial rate of tissue heating, before thermal diffusion takes place. The electric field in the simulated tissue can be used to estimate SAR by equating the thermally derived SAR to that with the E- field component.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = simulated tissue conductivity,

$\rho$  = Tissue density (1.25 g/cm<sup>3</sup> for brain tissue)

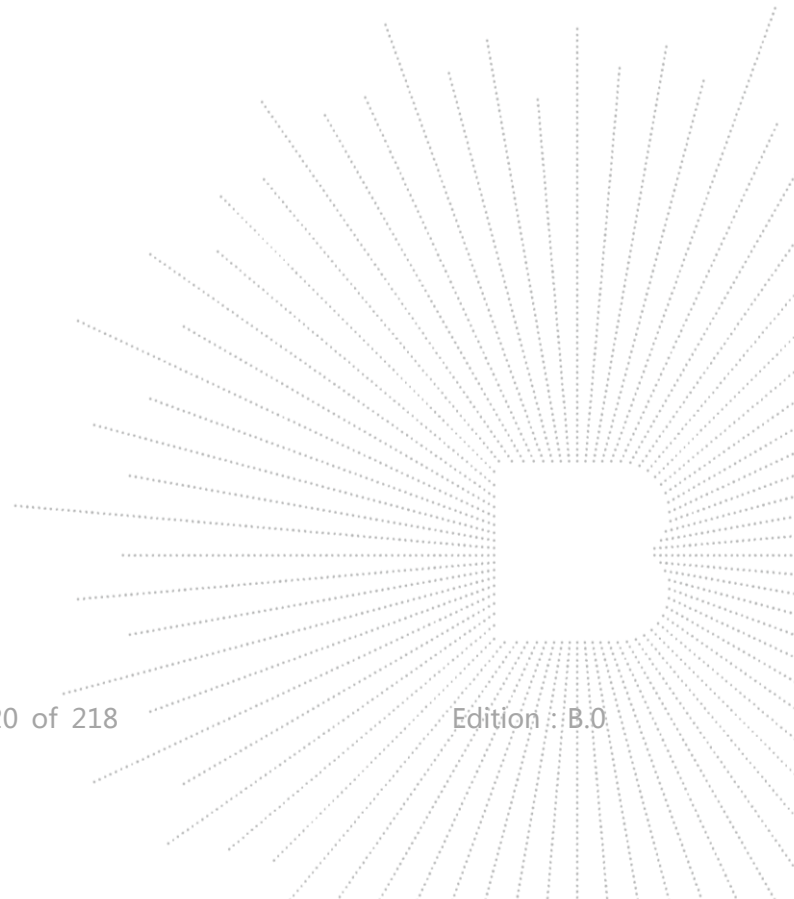


## 9.4 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

## 9.5 Device Holder

The positioning system allows obtaining cheek and tilting position with a very good accuracy. In compliance with CENELEC, the tilt angle uncertainty is lower than 1°.

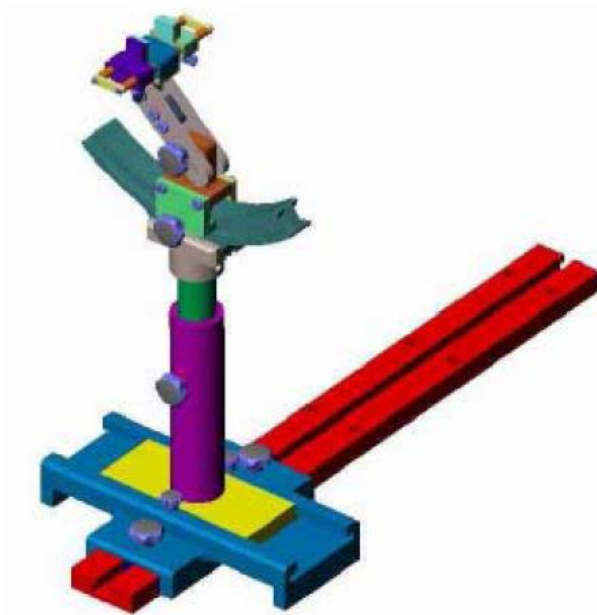

System Material	Permittivity	Loss Tangent
Delrin	3.7	0.005

## 10. Tissue Simulating Liquids

### 10.1 Composition of Tissue Simulating Liquid

For the measurement of the field distribution inside the SAM phantom with SMTIMO, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. Please see the following photos for the liquid height.



Liquid Height for Body SAR

The Composition of Tissue Simulating Liquid

Frequency (MHz)	Water (%)	Salt (%)	1,2-Propane diol (%)	HEC (%)	Preventol (%)	DGBE (%)
<b>Head/Body</b>						
835	40.3	1.4	57.9	0.2	0.2	0
900	40.3	1.4	57.9	0.2	0.2	0
1800-2000	55.2	0.3	0	0	0	44.5
2450	55.0	0.1	0	0	0	44.9
2600	54.9	0.1	0	0	0	45.0

Frequency (MHz)	Water (%)	Hexyl Carbitol (%)	Triton X-100 (%)
<b>Head/Body</b>			
5000-6000	65.52	17.24	17.24




## 10.2 Limit

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters

computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency (MHz)	Head	
	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
150	0.76	52.3
300	0.87	45.3
450	0.87	43.5
750	0.89	41.9
835	0.90	41.5
900	0.97	41.5
915	0.98	41.5
1450	1.20	40.5
1610	1.29	40.3
1800-2000	1.40	40.0
2450	1.80	39.2
2600	1.96	39.0
3000	2.40	38.5
5200	4.66	36.0
5400	4.86	35.8
5600	5.07	35.5
5800	5.27	35.3

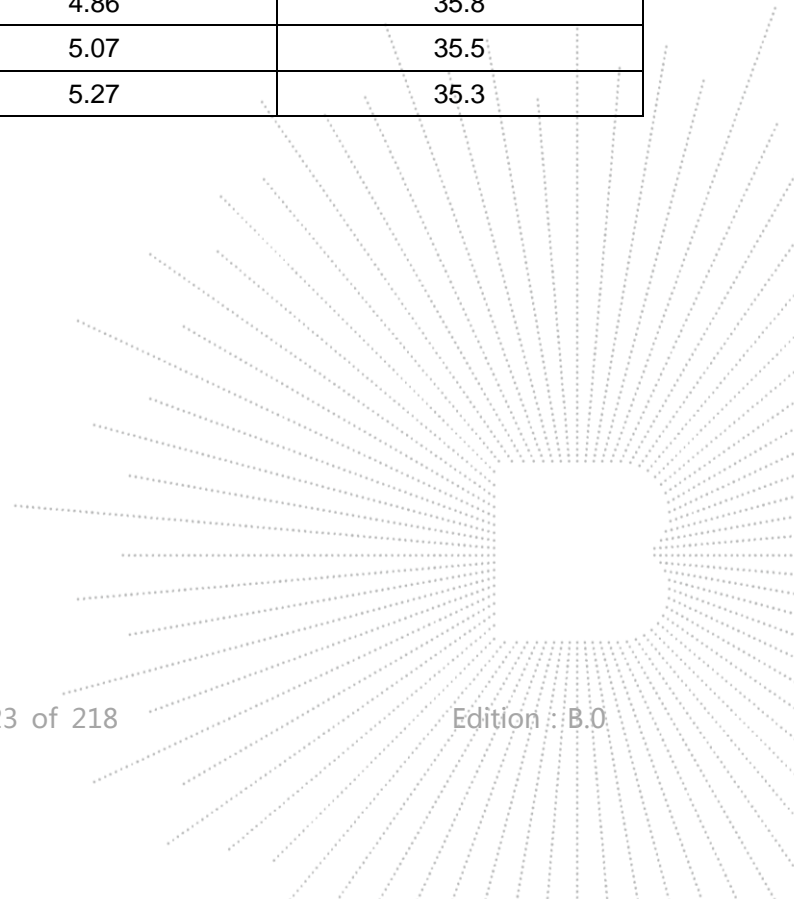

### 10.3 Tissue Calibration Result


The dielectric parameters of the liquids were verified prior to the SAR evaluation using an R&S ZVB 8. Dielectric Probe Kit and an Agilent Network Analyzer.

Calibration Result for Dielectric Parameters of Tissue Simulating Liquid

Frequency (MHz)	Liquid	Target ( $\sigma$ )	Target ( $\epsilon_r$ )	Measured ( $\sigma$ )	Measured ( $\epsilon_r$ )	Delta ( $\sigma$ )%	Delta ( $\epsilon_r$ )%	Limit (%)	Temp. TSL (°C)	Date
750	Head	0.89	41.9	0.895	41.476	-0.56	-0.06	±5	23.0	21/02/2024
835	Head	0.90	41.5	0.879	42.837	-2.33	3.22	±5	23.0	21/02/2024
1800	Head	1.40	40.0	1.374	41.238	-1.86	3.10	±5	22.9	22/02/2024
1900	Head	1.40	40.0	1.400	38.869	0.00	-2.83	±5	22.9	22/02/2024
2450	Head	1.80	39.20	1.852	40.692	2.89	3.81	±5	23.2	23/02/2024
2600	Head	1.96	39.00	2.032	37.591	3.67	-3.61	±5	22.9	22/02/2024
5200	Head	4.66	36.00	4.796	35.815	2.92	-0.51	±5	23.2	23/02/2024
5800	Head	5.27	35.30	5.147	36.496	-2.33	3.39	±5	23.2	23/02/2024

**Remark:**

1. The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within  $\pm 2^\circ\text{C}$  of the temperature when the tissue parameters are characterized.
2. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

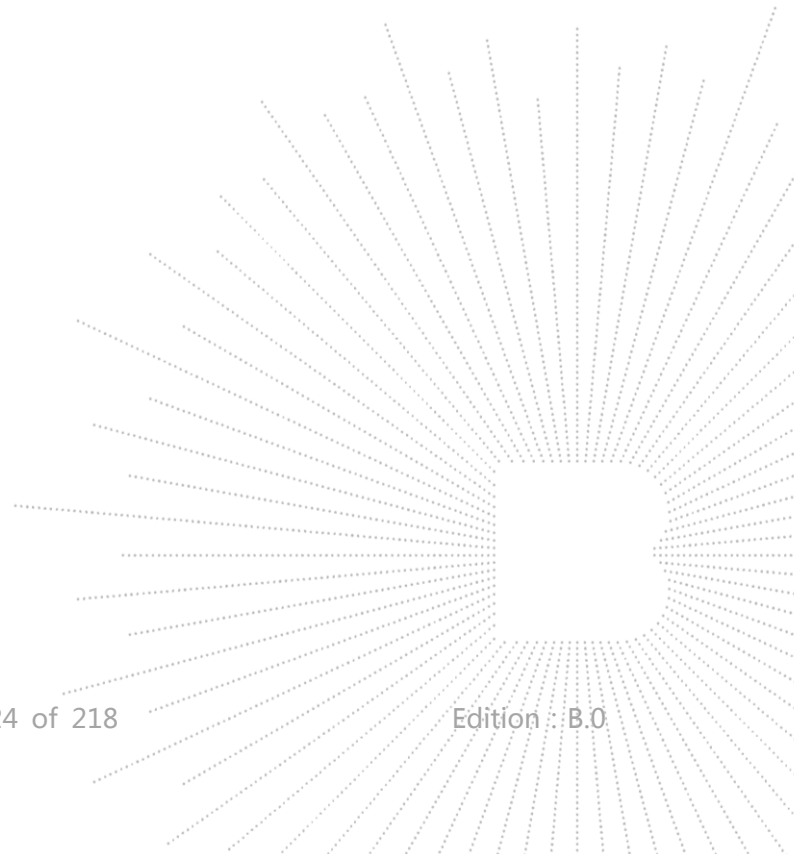




## 11. System Check

### 11.1 Purpose of System Performance Check

At the device test frequencies. System check verifies the measurement repeatability of a SAR system before compliance testing and is not a validation of all system specifications. The latter is not required for testing a device but is mandatory before the system is deployed. The system check detects possible short-term drift and unacceptable measurement errors or uncertainties in the system.

### 11.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 600MHz-6000MHz. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The output power on dipole port must be calibrated to 20 dBm (100 mW) before dipole is connected.

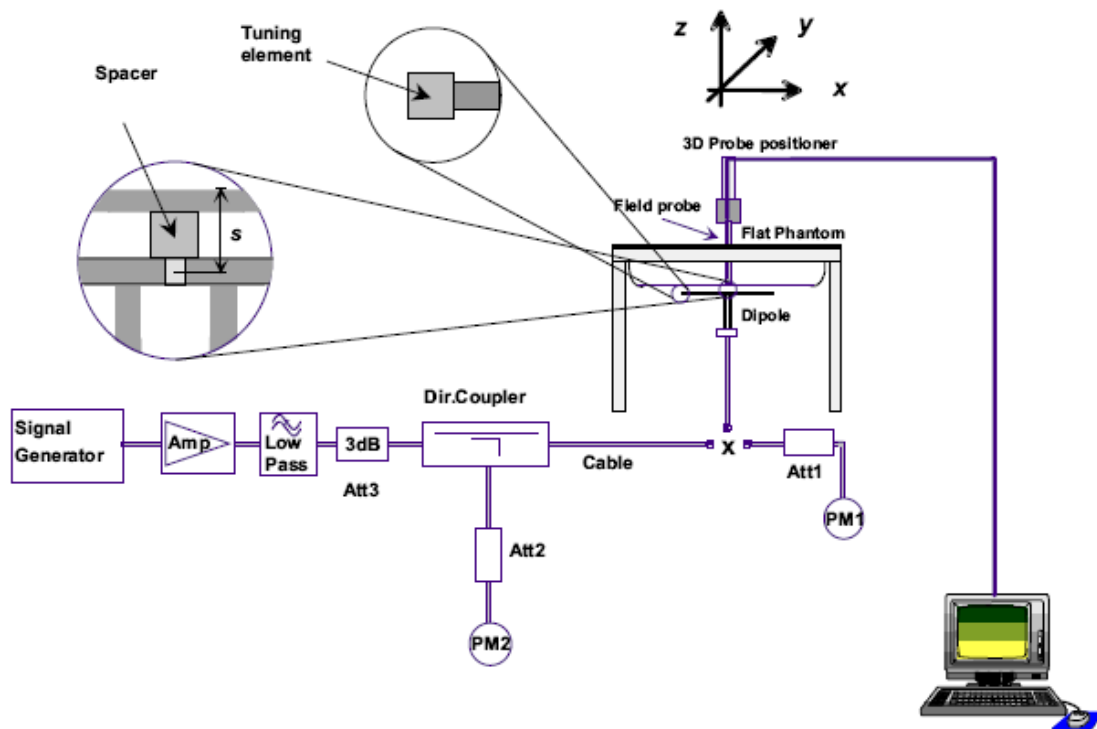

System Verification Setup Block Diagram



Setup Photo of Dipole Antenna

### 11.3 Validation Results

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %. The following table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency (MHz)	Power	Measured SAR <sub>1g</sub> (W/Kg)	Normalize to 1 Watt	Drift (%)	1W Target	Difference Percentage (%)	Limit (%)	Liquid Temp	Date
					SAR <sub>1g</sub> (W/Kg)				
750	250mW	2.143	8.571	0.847	8.58	-0.105	±10	23.0	21/02/2024
835	250mW	2.407	9.629	-2.892	10.01	-3.806	±10	23.0	21/02/2024
1800	250mW	10.276	41.105	1.529	39.74	3.435	±10	22.9	22/02/2024
1900	250mW	9.927	39.709	3.333	41.26	-3.759	±10	22.9	22/02/2024
2450	250mW	14.040	56.161	-3.510	55.16	1.815	±10	23.2	23/02/2024
2600	250mW	13.642	54.569	-1.456	56.50	-3.418	±10	22.9	22/02/2024
5200	250mW	19.461	77.845	-0.351	76.41	1.878	±10	23.2	23/02/2024
5800	250mW	19.350	77.399	0.548	76.49	1.188	±10	23.2	23/02/2024


## 12. EUT Testing Position

### Body Position

A typical example of a body supported device is a wireless enabled laptop device that among other orientations may be supported on the thighs of a sitting user. To represent this orientation, the device shall be positioned with its base against the flat phantom. Other orientations may be specified by the manufacturer in the user instructions. If the intended use is not specified, the device shall be tested directly against the flat phantom in all usable orientations.

The example shows a tablet form factor portable computer for which SAR should be separately assessed with

- a). each surface and
- b). the separation distances

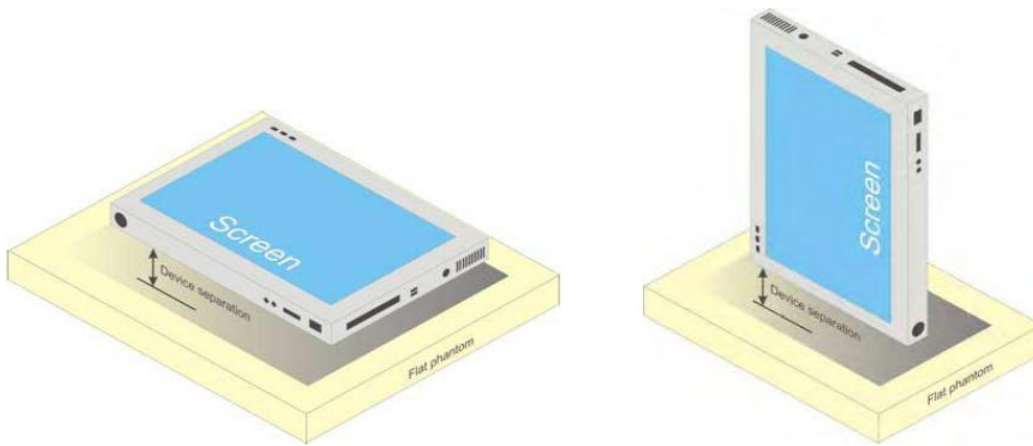

Tablet form factor portable computer

## 13. SAR Measurement Procedures

### 13.1 Measurement Procedures

The measurement procedures are as follows:

- (a) Use base station simulator (if applicable) or engineering software to transmit RF power continuously (continuous Tx) in the highest power channel.
- (b) Keep EUT to radiate maximum output power or 100% factor (if applicable)
- (c) Measure output power through RF cable and power meter.
- (d) Place the EUT in the positions as Annex D demonstrates.
- (e) Set scan area, grid size and other setting on the SATIMO software.
- (f) Measure SAR results for the highest power channel on each testing position.
- (g) Find out the largest SAR result on these testing positions of each band
- (h) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement


### 13.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The SATIMO software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine. The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:


- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

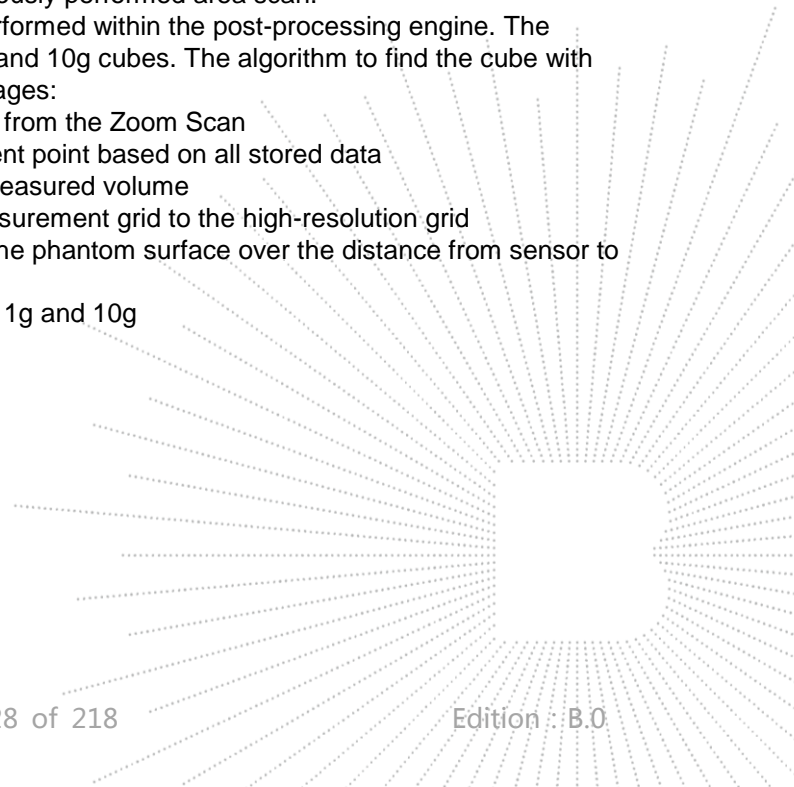

### 13.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

		$\leq 3$ GHz	$> 3$ GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm $\pm$ 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30° $\pm$ 1°	20° $\pm$ 1°
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$		$\leq 2$ GHz: $\leq 15$ mm 2 – 3 GHz: $\leq 12$ mm	3 – 4 GHz: $\leq 12$ mm 4 – 6 GHz: $\leq 10$ mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$		$\leq 2$ GHz: $\leq 8$ mm 2 – 3 GHz: $\leq 5$ mm*	3 – 4 GHz: $\leq 5$ mm* 4 – 6 GHz: $\leq 4$ mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	$\leq 5$ mm	3 – 4 GHz: $\leq 4$ mm 4 – 5 GHz: $\leq 3$ mm 5 – 6 GHz: $\leq 2$ mm
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm
		$\Delta z_{Zoom}(n>1)$ : between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm
Minimum zoom scan volume	x, y, z	$\geq 30$ mm	3 – 4 GHz: $\geq 28$ mm 4 – 5 GHz: $\geq 25$ mm 5 – 6 GHz: $\geq 22$ mm
Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

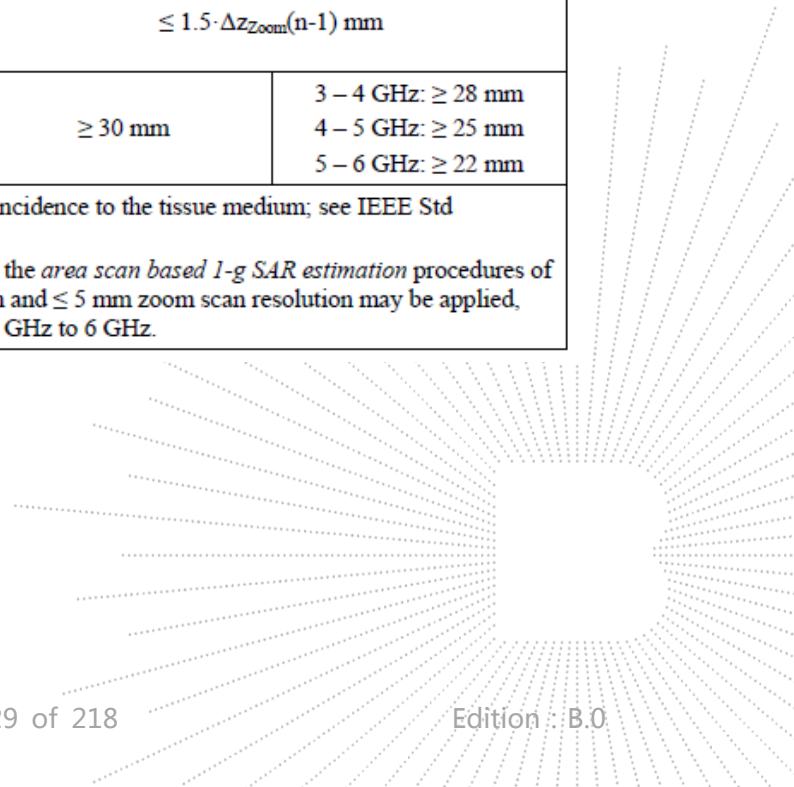

### 13.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 13.5 SAR Averaged Methods


The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10g and 1 g requires a very fine resolution in the three dimensional scanned data array.

### 13.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In SATIMO measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

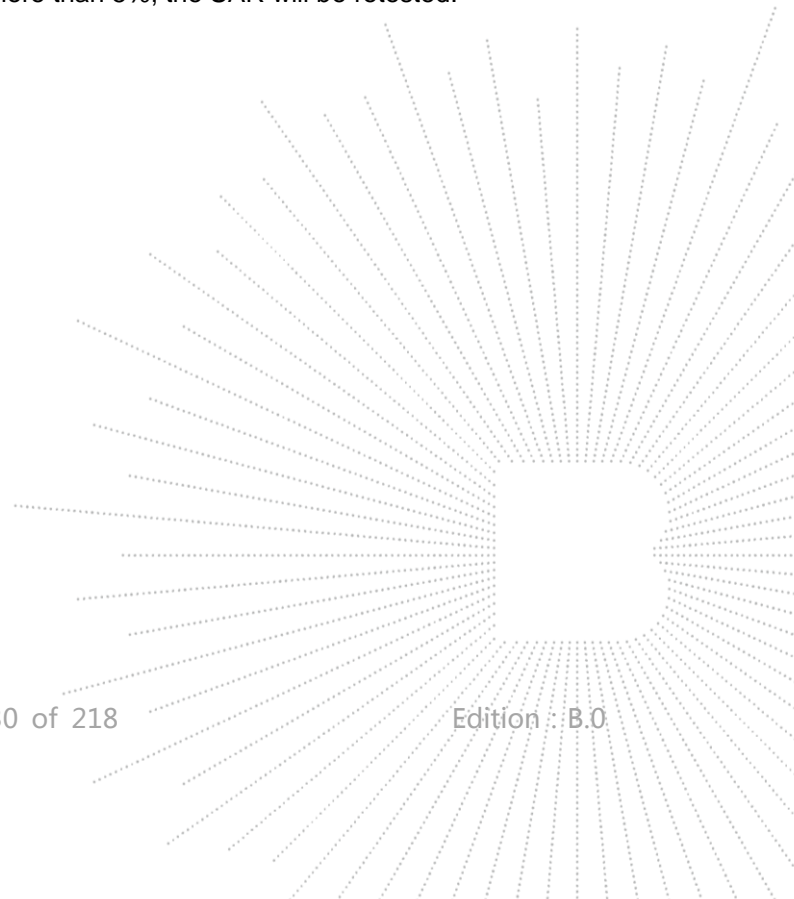



## 14. SAR Test Result

### 14.1 Conducted RF Output Power

Bluetooth			
Modulation	Frequency (MHz)	Output Power (dBm)	Tune-up power (dBm)
1-DH5	2402	0.38	1.5
	2441	1.16	
	2480	-0.26	
2-DH5	2402	0.34	1.5
	2441	1.25	
	2480	0.23	
3-DH5	2402	0.26	1.5
	2441	1.20	
	2480	0.11	

BLE			
Mode	Frequency (MHz)	Output Power (dBm)	Tune-up power (dBm)
GFSK BLE 1M	2402	-1.43	-0.5
	2440	-0.92	
	2480	-2.22	
GFSK BLE 2M	2402	-1.61	-0.5
	2440	-1.14	
	2480	-2.50	

**Note:**

Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$\left[ \frac{\text{max. power of channel, including tune-up tolerance, mW}}{\text{min. test separation distance, mm}} \right] \cdot [\sqrt{f(\text{GHz})}]$$

$\leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR

f(GHz) is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation


The result is rounded to one decimal place for comparison

Bluetooth Turn up Power (dBm)	Bluetooth Turn up Power (mW)	Separation Distance (mm)	Frequency (GHz)	Result	Exclusion Thresholds
1.5	1.41	5	2.48	0.44	3.0

Per KDB 447498 D01v06, when the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

According to the calculation results in the table above, Bluetooth SAR does not need to be tested.

WIFI 2.4G			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
b	2412	10.64	15.0
	2437	14.66	
	2462	10.25	
g	2412	9.78	14.0
	2437	13.48	
	2462	10.14	
n20	2412	8.38	13.0
	2437	12.30	
	2462	8.68	
n40	2422	7.96	10.5
	2437	9.94	
	2452	7.51	

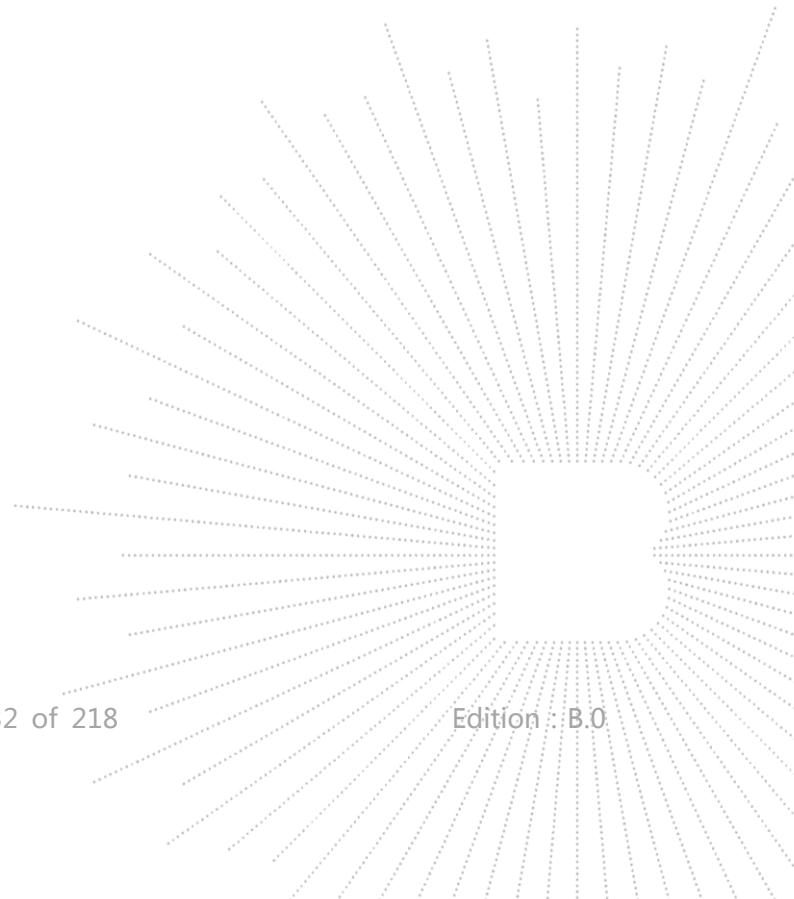



<b>WIFI 5.1G</b>			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
a	5180	12.15	12.5
	5200	11.89	
	5240	10.93	
n20	5180	11.29	12.0
	5200	10.41	
	5240	10.08	
n40	5190	9.43	10.0
	5230	9.42	
ac20	5180	10.68	11.0
	5200	10.00	
	5240	10.35	
ac40	5190	10.12	10.5
	5230	9.00	
ac80	5210	8.98	9.5

<b>WIFI 5.8G</b>			
Mode	Frequency	Maximum Conducted Output Power	Tune-up power
	(MHz)	(dBm)	(dBm)
a	5745	13.59	14.0
	5785	13.09	
	5825	12.24	
n20	5745	13.00	13.5
	5785	12.60	
	5825	11.74	
n40	5755	11.69	12.0
	5795	11.12	
ac20	5745	13.02	13.5
	5785	12.59	
	5825	11.66	
ac40	5755	11.59	12.0
	5795	11.16	
ac80	5775	9.70	10.0

GSM - Burst Average Power (dBm)								
Band	GSM850			Tune-up	GSM1900			Tune-up
Channel	128	190	251		512	661	810	
Frequency (MHz)	824.2	836.6	848.8		1850.2	1880	1909.8	
GSM	32.43	32.17	32.28	33.0	28.22	28.51	28.48	29.0
GPRS Slot -1	32.40	32.17	32.27	33.0	28.25	28.53	28.54	29.0
GPRS Slot -2	30.50	30.27	30.38	31.0	26.10	26.29	26.21	26.5
GPRS Slot -3	28.74	28.51	28.61	29.0	24.62	24.82	24.73	25.5
GPRS Slot -4	26.71	26.49	26.59	27.0	22.49	22.71	22.65	23.0
EGPRS Slot -1	24.95	25.25	25.09	25.5	24.47	24.32	23.80	25.0
EGPRS Slot -2	23.76	23.92	23.56	24.5	23.24	22.84	21.97	23.5
EGPRS Slot -3	21.45	21.98	21.56	22.5	21.42	20.55	19.78	22.0
EGPRS Slot -4	18.70	18.69	18.91	19.5	18.91	18.83	18.25	19.5

GSM - Source-Based Time-Average Power (dBm)						
Band	GSM850			GSM1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
GSM	23.43	23.17	23.28	19.22	19.51	19.48
GPRS Slot -1	23.40	23.17	23.27	19.25	19.53	19.54
GPRS Slot -2	24.50	24.27	24.38	20.10	20.29	20.21
GPRS Slot -3	24.49	24.26	24.36	20.37	20.57	20.48
GPRS Slot -4	23.71	23.49	23.59	19.49	19.71	19.65
EGPRS Slot -1	15.95	16.25	16.09	15.47	15.32	14.80
EGPRS Slot -2	17.76	17.92	17.56	17.24	16.84	15.97
EGPRS Slot -3	17.20	17.73	17.31	17.17	16.30	15.53
EGPRS Slot -4	15.70	15.69	15.91	15.91	15.83	15.25

**Notes:**
**1. Division Factors**

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.00dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.00dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB


4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.00dB

**2. According to the conducted power as above, the GPRS measurements are performed with 2Txslot for GPRS850 and 3Txslot GPRS1900.**
**3. Per KDB 941225 D01, SAR is not required for EDGE mode because the maximum output power and tune-up limit is  $\leq 1/4$ dB higher than GPRS/EDGE or the adjusted SAR of the highest reported SAR of GPRS/EDGE is  $\leq 1.2$ W/kg.**

Band	WCDMA Band II			WCDMA Band V				
Channel	9262	9400	9538	Tune-up	4132	4182	4233	Tune-up
Frequency (MHz)	1852.4	1880.0	1907.6		826.4	836.4	846.6	
RMC 12.2K	21.11	21.30	20.93	22.0	22.45	22.42	22.49	23.0
HSDPA Subtest-1	20.03	20.84	20.08	21.5	22.27	21.98	21.92	22.5
HSDPA Subtest-2	19.49	20.59	19.86		21.96	21.83	21.76	
HSDPA Subtest-3	19.05	20.38	19.47		21.50	21.40	21.56	
HSDPA Subtest-4	19.23	19.99	19.38		21.26	21.20	21.28	
HSUPA Subtest-1	20.03	20.91	20.22	21.5	22.20	21.88	21.76	22.5
HSUPA Subtest-2	20.01	20.98	20.09		22.23	22.01	22.01	
HSUPA Subtest-3	19.50	20.58	19.72		21.80	21.75	21.65	
HSUPA Subtest-4	19.86	20.94	20.15		22.25	22.01	21.97	
HSUPA Subtest-5	19.78	20.77	19.99		22.01	22.01	21.63	

**Note:**

1. The 12.2kbps RMC mode was selected for SAR testing (the primary mode).
2. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$ dB higher than the primary mode (RMC12.2kbps) or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode.

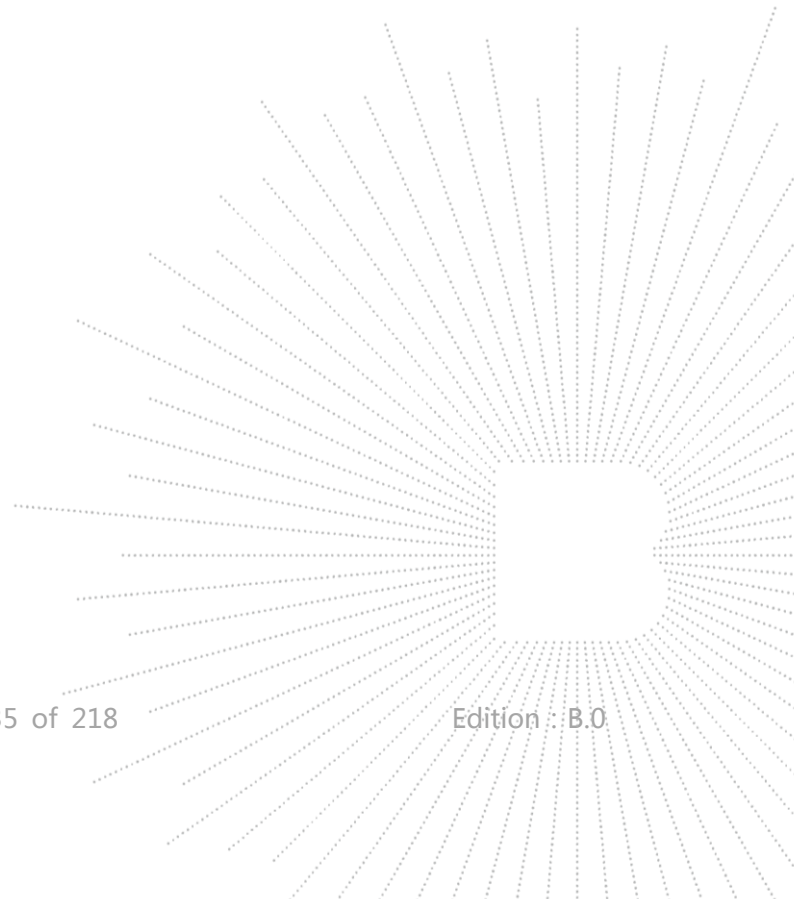

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)
Band2	1.4	18607	1	#0	QPSK	22.47
Band2	1.4	18607	1	#Mid	QPSK	22.38
Band2	1.4	18607	1	#Max	QPSK	22.43
Band2	1.4	18607	3	#0	QPSK	22.44
Band2	1.4	18607	3	#Mid	QPSK	22.40
Band2	1.4	18607	3	#Max	QPSK	22.41
Band2	1.4	18607	6	#0	QPSK	21.48
Band2	1.4	18607	1	#0	16QAM	22.03
Band2	1.4	18607	1	#Mid	16QAM	22.18
Band2	1.4	18607	1	#Max	16QAM	22.10
Band2	1.4	18607	3	#0	16QAM	21.58
Band2	1.4	18607	3	#Mid	16QAM	21.58
Band2	1.4	18607	3	#Max	16QAM	21.54
Band2	1.4	18607	6	#0	16QAM	20.48
Band2	1.4	18900	1	#0	QPSK	22.41
Band2	1.4	18900	1	#Mid	QPSK	22.37
Band2	1.4	18900	1	#Max	QPSK	22.39
Band2	1.4	18900	3	#0	QPSK	22.43
Band2	1.4	18900	3	#Mid	QPSK	22.47
Band2	1.4	18900	3	#Max	QPSK	22.45
Band2	1.4	18900	6	#0	QPSK	21.53
Band2	1.4	18900	1	#0	16QAM	21.16
Band2	1.4	18900	1	#Mid	16QAM	21.06
Band2	1.4	18900	1	#Max	16QAM	21.08
Band2	1.4	18900	3	#0	16QAM	21.48
Band2	1.4	18900	3	#Mid	16QAM	21.53
Band2	1.4	18900	3	#Max	16QAM	21.42
Band2	1.4	18900	6	#0	16QAM	20.37
Band2	1.4	19193	1	#0	QPSK	22.43
Band2	1.4	19193	1	#Mid	QPSK	22.27
Band2	1.4	19193	1	#Max	QPSK	21.70
Band2	1.4	19193	3	#0	QPSK	22.17
Band2	1.4	19193	3	#Mid	QPSK	22.05
Band2	1.4	19193	3	#Max	QPSK	21.72
Band2	1.4	19193	6	#0	QPSK	21.46
Band2	1.4	19193	1	#0	16QAM	22.19
Band2	1.4	19193	1	#Mid	16QAM	21.98
Band2	1.4	19193	1	#Max	16QAM	21.46
Band2	1.4	19193	3	#0	16QAM	21.58
Band2	1.4	19193	3	#Mid	16QAM	21.56
Band2	1.4	19193	3	#Max	16QAM	21.58
Band2	1.4	19193	6	#0	16QAM	20.46
Band2	3	18615	1	#0	QPSK	22.40
Band2	3	18615	1	#Mid	QPSK	22.36
Band2	3	18615	1	#Max	QPSK	22.28
Band2	3	18615	8	#0	QPSK	21.42
Band2	3	18615	8	#Mid	QPSK	21.44
Band2	3	18615	8	#Max	QPSK	21.32
Band2	3	18615	15	#0	QPSK	21.52
Band2	3	18615	1	#0	16QAM	22.47
Band2	3	18615	1	#Mid	16QAM	22.41
Band2	3	18615	1	#Max	16QAM	22.40
Band2	3	18615	8	#0	16QAM	20.40
Band2	3	18615	8	#Mid	16QAM	20.39
Band2	3	18615	8	#Max	16QAM	20.35

Band2	3	18615	15	#0	16QAM	20.56
Band2	3	18900	1	#0	QPSK	22.37
Band2	3	18900	1	#Mid	QPSK	22.42
Band2	3	18900	1	#Max	QPSK	22.41
Band2	3	18900	8	#0	QPSK	21.44
Band2	3	18900	8	#Mid	QPSK	21.46
Band2	3	18900	8	#Max	QPSK	21.46
Band2	3	18900	15	#0	QPSK	21.37
Band2	3	18900	1	#0	16QAM	20.93
Band2	3	18900	1	#Mid	16QAM	20.91
Band2	3	18900	1	#Max	16QAM	20.80
Band2	3	18900	8	#0	16QAM	20.43
Band2	3	18900	8	#Mid	16QAM	20.40
Band2	3	18900	8	#Max	16QAM	20.44
Band2	3	18900	15	#0	16QAM	20.41
Band2	3	19185	1	#0	QPSK	22.31
Band2	3	19185	1	#Mid	QPSK	22.43
Band2	3	19185	1	#Max	QPSK	21.56
Band2	3	19185	8	#0	QPSK	21.33
Band2	3	19185	8	#Mid	QPSK	21.36
Band2	3	19185	8	#Max	QPSK	21.35
Band2	3	19185	15	#0	QPSK	21.41
Band2	3	19185	1	#0	16QAM	21.37
Band2	3	19185	1	#Mid	16QAM	21.28
Band2	3	19185	1	#Max	16QAM	21.19
Band2	3	19185	8	#0	16QAM	20.35
Band2	3	19185	8	#Mid	16QAM	20.36
Band2	3	19185	8	#Max	16QAM	20.31
Band2	3	19185	15	#0	16QAM	20.53
Band2	5	18625	1	#0	QPSK	22.45
Band2	5	18625	1	#Mid	QPSK	22.28
Band2	5	18625	1	#Max	QPSK	22.24
Band2	5	18625	12	#0	QPSK	21.46
Band2	5	18625	12	#Mid	QPSK	21.36
Band2	5	18625	12	#Max	QPSK	21.42
Band2	5	18625	25	#0	QPSK	21.39
Band2	5	18625	1	#0	16QAM	21.53
Band2	5	18625	1	#Mid	16QAM	21.48
Band2	5	18625	1	#Max	16QAM	21.33
Band2	5	18625	12	#0	16QAM	20.46
Band2	5	18625	12	#Mid	16QAM	20.36
Band2	5	18625	12	#Max	16QAM	20.34
Band2	5	18625	25	#0	16QAM	20.57
Band2	5	18900	1	#0	QPSK	22.51
Band2	5	18900	1	#Mid	QPSK	22.50
Band2	5	18900	1	#Max	QPSK	22.49
Band2	5	18900	12	#0	QPSK	21.49
Band2	5	18900	12	#Mid	QPSK	21.45
Band2	5	18900	12	#Max	QPSK	21.35
Band2	5	18900	25	#0	QPSK	21.39
Band2	5	18900	1	#0	16QAM	21.56
Band2	5	18900	1	#Mid	16QAM	21.49
Band2	5	18900	1	#Max	16QAM	21.41
Band2	5	18900	12	#0	16QAM	20.30
Band2	5	18900	12	#Mid	16QAM	20.34
Band2	5	18900	12	#Max	16QAM	20.21
Band2	5	18900	25	#0	16QAM	20.53




Band2	5	19175	1	#0	QPSK	22.10
Band2	5	19175	1	#Mid	QPSK	22.14
Band2	5	19175	1	#Max	QPSK	21.38
Band2	5	19175	12	#0	QPSK	21.29
Band2	5	19175	12	#Mid	QPSK	21.25
Band2	5	19175	12	#Max	QPSK	21.41
Band2	5	19175	25	#0	QPSK	21.36
Band2	5	19175	1	#0	16QAM	21.91
Band2	5	19175	1	#Mid	16QAM	21.88
Band2	5	19175	1	#Max	16QAM	21.53
Band2	5	19175	12	#0	16QAM	20.28
Band2	5	19175	12	#Mid	16QAM	20.22
Band2	5	19175	12	#Max	16QAM	20.37
Band2	5	19175	25	#0	16QAM	20.53
Band2	10	18650	1	#0	QPSK	22.34
Band2	10	18650	1	#Mid	QPSK	22.13
Band2	10	18650	1	#Max	QPSK	22.22
Band2	10	18650	25	#0	QPSK	21.36
Band2	10	18650	25	#Mid	QPSK	21.25
Band2	10	18650	25	#Max	QPSK	21.34
Band2	10	18650	50	#0	QPSK	21.14
Band2	10	18650	1	#0	16QAM	22.48
Band2	10	18650	1	#Mid	16QAM	22.27
Band2	10	18650	1	#Max	16QAM	22.30
Band2	10	18650	25	#0	16QAM	20.41
Band2	10	18650	25	#Mid	16QAM	20.39
Band2	10	18650	25	#Max	16QAM	20.39
Band2	10	18650	50	#0	16QAM	20.40
Band2	10	18900	1	#0	QPSK	22.40
Band2	10	18900	1	#Mid	QPSK	22.34
Band2	10	18900	1	#Max	QPSK	22.36
Band2	10	18900	25	#0	QPSK	21.42
Band2	10	18900	25	#Mid	QPSK	21.46
Band2	10	18900	25	#Max	QPSK	21.37
Band2	10	18900	50	#0	QPSK	21.40
Band2	10	18900	1	#0	16QAM	22.18
Band2	10	18900	1	#Mid	16QAM	22.17
Band2	10	18900	1	#Max	16QAM	22.10
Band2	10	18900	25	#0	16QAM	20.59
Band2	10	18900	25	#Mid	16QAM	20.52
Band2	10	18900	25	#Max	16QAM	20.39
Band2	10	18900	50	#0	16QAM	20.53
Band2	10	19150	1	#0	QPSK	22.11
Band2	10	19150	1	#Mid	QPSK	22.26
Band2	10	19150	1	#Max	QPSK	22.19
Band2	10	19150	25	#0	QPSK	21.17
Band2	10	19150	25	#Mid	QPSK	21.25
Band2	10	19150	25	#Max	QPSK	21.29
Band2	10	19150	50	#0	QPSK	21.26
Band2	10	19150	1	#0	16QAM	21.54
Band2	10	19150	1	#Mid	16QAM	21.64
Band2	10	19150	1	#Max	16QAM	21.62
Band2	10	19150	25	#0	16QAM	20.24
Band2	10	19150	25	#Mid	16QAM	20.37
Band2	10	19150	25	#Max	16QAM	20.38
Band2	10	19150	50	#0	16QAM	20.27
Band2	15	18675	1	#0	QPSK	22.38

Band2	15	18675	1	#Mid	QPSK	22.18
Band2	15	18675	1	#Max	QPSK	22.33
Band2	15	18675	36	#0	QPSK	21.33
Band2	15	18675	36	#Mid	QPSK	21.32
Band2	15	18675	36	#Max	QPSK	21.35
Band2	15	18675	75	#0	QPSK	21.31
Band2	15	18675	1	#0	16QAM	22.47
Band2	15	18675	1	#Mid	16QAM	22.23
Band2	15	18675	1	#Max	16QAM	22.39
Band2	15	18675	36	#0	16QAM	20.47
Band2	15	18675	36	#Mid	16QAM	20.36
Band2	15	18675	36	#Max	16QAM	20.42
Band2	15	18675	75	#0	16QAM	20.33
Band2	15	18900	1	#0	QPSK	22.46
Band2	15	18900	1	#Mid	QPSK	22.44
Band2	15	18900	1	#Max	QPSK	22.19
Band2	15	18900	36	#0	QPSK	21.47
Band2	15	18900	36	#Mid	QPSK	21.50
Band2	15	18900	36	#Max	QPSK	21.37
Band2	15	18900	75	#0	QPSK	21.43
Band2	15	18900	1	#0	16QAM	22.28
Band2	15	18900	1	#Mid	16QAM	22.22
Band2	15	18900	1	#Max	16QAM	22.03
Band2	15	18900	36	#0	16QAM	20.66
Band2	15	18900	36	#Mid	16QAM	20.66
Band2	15	18900	36	#Max	16QAM	20.53
Band2	15	18900	75	#0	16QAM	20.50
Band2	15	19125	1	#0	QPSK	22.06
Band2	15	19125	1	#Mid	QPSK	22.18
Band2	15	19125	1	#Max	QPSK	22.20
Band2	15	19125	36	#0	QPSK	21.17
Band2	15	19125	36	#Mid	QPSK	21.23
Band2	15	19125	36	#Max	QPSK	21.30
Band2	15	19125	75	#0	QPSK	21.17
Band2	15	19125	1	#0	16QAM	21.90
Band2	15	19125	1	#Mid	16QAM	22.01
Band2	15	19125	1	#Max	16QAM	22.14
Band2	15	19125	36	#0	16QAM	20.16
Band2	15	19125	36	#Mid	16QAM	20.14
Band2	15	19125	36	#Max	16QAM	20.32
Band2	15	19125	75	#0	16QAM	20.26
Band2	20	18700	1	#0	QPSK	22.53
Band2	20	18700	1	#Mid	QPSK	22.47
Band2	20	18700	1	#Max	QPSK	22.54
Band2	20	18700	50	#0	QPSK	21.36
Band2	20	18700	50	#Mid	QPSK	21.40
Band2	20	18700	50	#Max	QPSK	21.44
Band2	20	18700	100	#0	QPSK	21.34
Band2	20	18700	1	#0	16QAM	21.52
Band2	20	18700	1	#Mid	16QAM	21.42
Band2	20	18700	1	#Max	16QAM	21.55
Band2	20	18700	50	#0	16QAM	20.46
Band2	20	18700	50	#Mid	16QAM	20.48
Band2	20	18700	50	#Max	16QAM	20.46
Band2	20	18700	100	#0	16QAM	20.45
Band2	20	18900	1	#0	QPSK	22.62
Band2	20	18900	1	#Mid	QPSK	22.68



Band2	20	18900	1	#Max	QPSK	22.44
Band2	20	18900	50	#0	QPSK	21.42
Band2	20	18900	50	#Mid	QPSK	21.43
Band2	20	18900	50	#Max	QPSK	21.42
Band2	20	18900	100	#0	QPSK	21.44
Band2	20	18900	1	#0	16QAM	21.03
Band2	20	18900	1	#Mid	16QAM	21.08
Band2	20	18900	1	#Max	16QAM	20.83
Band2	20	18900	50	#0	16QAM	20.48
Band2	20	18900	50	#Mid	16QAM	20.56
Band2	20	18900	50	#Max	16QAM	20.38
Band2	20	18900	100	#0	16QAM	20.47
Band2	20	19100	1	#0	QPSK	22.15
Band2	20	19100	1	#Mid	QPSK	22.27
Band2	20	19100	1	#Max	QPSK	22.48
Band2	20	19100	50	#0	QPSK	21.16
Band2	20	19100	50	#Mid	QPSK	21.17
Band2	20	19100	50	#Max	QPSK	21.31
Band2	20	19100	100	#0	QPSK	21.25
Band2	20	19100	1	#0	16QAM	21.44
Band2	20	19100	1	#Mid	16QAM	21.47
Band2	20	19100	1	#Max	16QAM	21.78
Band2	20	19100	50	#0	16QAM	20.15
Band2	20	19100	50	#Mid	16QAM	20.31
Band2	20	19100	50	#Max	16QAM	20.37
Band2	20	19100	100	#0	16QAM	20.21

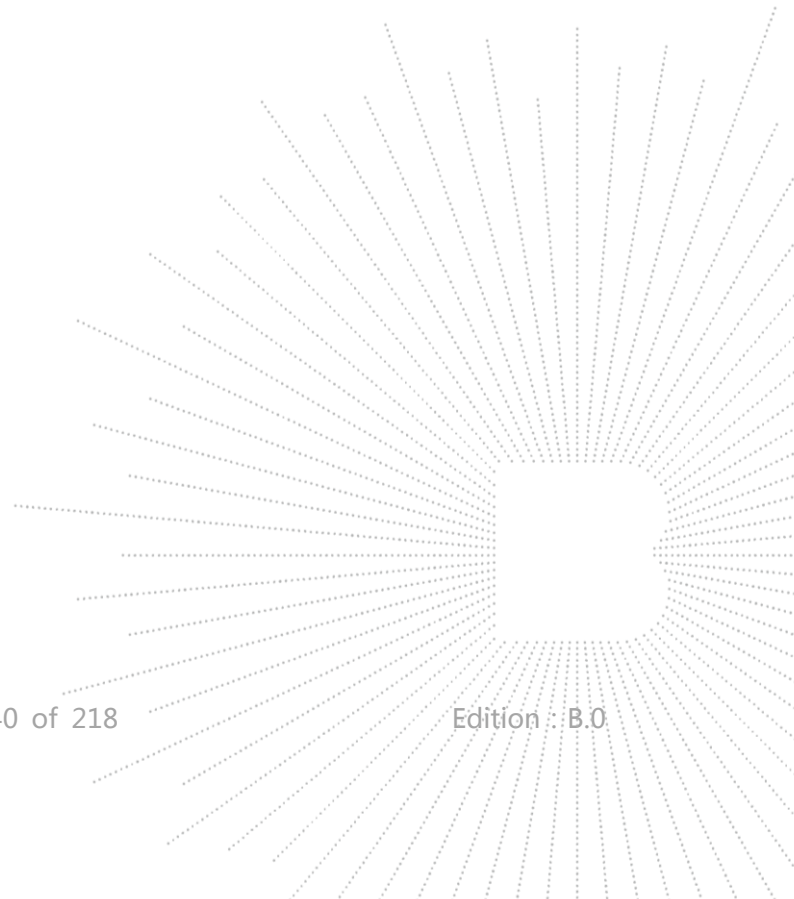

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)
Band4	1.4	19957	1	#0	QPSK	22.89
Band4	1.4	19957	1	#Mid	QPSK	22.84
Band4	1.4	19957	1	#Max	QPSK	22.82
Band4	1.4	19957	3	#0	QPSK	22.69
Band4	1.4	19957	3	#Mid	QPSK	22.66
Band4	1.4	19957	3	#Max	QPSK	22.75
Band4	1.4	19957	6	#0	QPSK	21.74
Band4	1.4	19957	1	#0	16QAM	22.68
Band4	1.4	19957	1	#Mid	16QAM	22.74
Band4	1.4	19957	1	#Max	16QAM	22.75
Band4	1.4	19957	3	#0	16QAM	22.02
Band4	1.4	19957	3	#Mid	16QAM	21.98
Band4	1.4	19957	3	#Max	16QAM	21.97
Band4	1.4	19957	6	#0	16QAM	20.94
Band4	1.4	20175	1	#0	QPSK	22.90
Band4	1.4	20175	1	#Mid	QPSK	23.00
Band4	1.4	20175	1	#Max	QPSK	22.97
Band4	1.4	20175	3	#0	QPSK	22.89
Band4	1.4	20175	3	#Mid	QPSK	22.78
Band4	1.4	20175	3	#Max	QPSK	22.89
Band4	1.4	20175	6	#0	QPSK	21.85
Band4	1.4	20175	1	#0	16QAM	21.88
Band4	1.4	20175	1	#Mid	16QAM	21.88
Band4	1.4	20175	1	#Max	16QAM	21.92
Band4	1.4	20175	3	#0	16QAM	21.77
Band4	1.4	20175	3	#Mid	16QAM	21.81
Band4	1.4	20175	3	#Max	16QAM	21.79
Band4	1.4	20175	6	#0	16QAM	21.08
Band4	1.4	20393	1	#0	QPSK	22.93
Band4	1.4	20393	1	#Mid	QPSK	22.88
Band4	1.4	20393	1	#Max	QPSK	22.95
Band4	1.4	20393	3	#0	QPSK	22.78
Band4	1.4	20393	3	#Mid	QPSK	22.75
Band4	1.4	20393	3	#Max	QPSK	22.83
Band4	1.4	20393	6	#0	QPSK	21.76
Band4	1.4	20393	1	#0	16QAM	21.43
Band4	1.4	20393	1	#Mid	16QAM	21.36
Band4	1.4	20393	1	#Max	16QAM	21.46
Band4	1.4	20393	3	#0	16QAM	21.74
Band4	1.4	20393	3	#Mid	16QAM	21.67
Band4	1.4	20393	3	#Max	16QAM	21.74
Band4	1.4	20393	6	#0	16QAM	20.80
Band4	3	19965	1	#0	QPSK	22.78
Band4	3	19965	1	#Mid	QPSK	22.80
Band4	3	19965	1	#Max	QPSK	22.74
Band4	3	19965	8	#0	QPSK	21.78
Band4	3	19965	8	#Mid	QPSK	21.74
Band4	3	19965	8	#Max	QPSK	21.77
Band4	3	19965	15	#0	QPSK	21.73
Band4	3	19965	1	#0	16QAM	22.90
Band4	3	19965	1	#Mid	16QAM	22.84
Band4	3	19965	1	#Max	16QAM	22.87
Band4	3	19965	8	#0	16QAM	20.73
Band4	3	19965	8	#Mid	16QAM	20.71
Band4	3	19965	8	#Max	16QAM	20.68


Band4	3	19965	15	#0	16QAM	20.89
Band4	3	20175	1	#0	QPSK	22.93
Band4	3	20175	1	#Mid	QPSK	22.94
Band4	3	20175	1	#Max	QPSK	22.99
Band4	3	20175	8	#0	QPSK	21.78
Band4	3	20175	8	#Mid	QPSK	21.82
Band4	3	20175	8	#Max	QPSK	21.79
Band4	3	20175	15	#0	QPSK	21.79
Band4	3	20175	1	#0	16QAM	21.90
Band4	3	20175	1	#Mid	16QAM	21.85
Band4	3	20175	1	#Max	16QAM	21.90
Band4	3	20175	8	#0	16QAM	21.02
Band4	3	20175	8	#Mid	16QAM	20.88
Band4	3	20175	8	#Max	16QAM	20.90
Band4	3	20175	15	#0	16QAM	20.81
Band4	3	20385	1	#0	QPSK	22.98
Band4	3	20385	1	#Mid	QPSK	23.00
Band4	3	20385	1	#Max	QPSK	22.98
Band4	3	20385	8	#0	QPSK	21.74
Band4	3	20385	8	#Mid	QPSK	21.85
Band4	3	20385	8	#Max	QPSK	21.75
Band4	3	20385	15	#0	QPSK	21.85
Band4	3	20385	1	#0	16QAM	21.46
Band4	3	20385	1	#Mid	16QAM	21.44
Band4	3	20385	1	#Max	16QAM	21.40
Band4	3	20385	8	#0	16QAM	20.98
Band4	3	20385	8	#Mid	16QAM	20.97
Band4	3	20385	8	#Max	16QAM	20.87
Band4	3	20385	15	#0	16QAM	20.84
Band4	5	19975	1	#0	QPSK	22.65
Band4	5	19975	1	#Mid	QPSK	22.63
Band4	5	19975	1	#Max	QPSK	22.74
Band4	5	19975	12	#0	QPSK	21.83
Band4	5	19975	12	#Mid	QPSK	21.71
Band4	5	19975	12	#Max	QPSK	21.73
Band4	5	19975	25	#0	QPSK	21.74
Band4	5	19975	1	#0	16QAM	21.88
Band4	5	19975	1	#Mid	16QAM	21.93
Band4	5	19975	1	#Max	16QAM	21.94
Band4	5	19975	12	#0	16QAM	20.75
Band4	5	19975	12	#Mid	16QAM	20.74
Band4	5	19975	12	#Max	16QAM	20.76
Band4	5	19975	25	#0	16QAM	20.97
Band4	5	20175	1	#0	QPSK	22.84
Band4	5	20175	1	#Mid	QPSK	22.87
Band4	5	20175	1	#Max	QPSK	22.95
Band4	5	20175	12	#0	QPSK	21.81
Band4	5	20175	12	#Mid	QPSK	21.84
Band4	5	20175	12	#Max	QPSK	21.84
Band4	5	20175	25	#0	QPSK	21.90
Band4	5	20175	1	#0	16QAM	21.93
Band4	5	20175	1	#Mid	16QAM	21.86
Band4	5	20175	1	#Max	16QAM	22.05
Band4	5	20175	12	#0	16QAM	20.72
Band4	5	20175	12	#Mid	16QAM	20.67
Band4	5	20175	12	#Max	16QAM	20.68
Band4	5	20175	25	#0	16QAM	20.88

Band4	5	20375	1	#0	QPSK	22.56
Band4	5	20375	1	#Mid	QPSK	22.66
Band4	5	20375	1	#Max	QPSK	22.57
Band4	5	20375	12	#0	QPSK	21.84
Band4	5	20375	12	#Mid	QPSK	21.75
Band4	5	20375	12	#Max	QPSK	21.77
Band4	5	20375	25	#0	QPSK	21.79
Band4	5	20375	1	#0	16QAM	22.43
Band4	5	20375	1	#Mid	16QAM	22.45
Band4	5	20375	1	#Max	16QAM	22.41
Band4	5	20375	12	#0	16QAM	20.80
Band4	5	20375	12	#Mid	16QAM	20.89
Band4	5	20375	12	#Max	16QAM	20.85
Band4	5	20375	25	#0	16QAM	21.04
Band4	10	20000	1	#0	QPSK	22.65
Band4	10	20000	1	#Mid	QPSK	22.66
Band4	10	20000	1	#Max	QPSK	22.70
Band4	10	20000	25	#0	QPSK	21.74
Band4	10	20000	25	#Mid	QPSK	21.73
Band4	10	20000	25	#Max	QPSK	21.71
Band4	10	20000	50	#0	QPSK	21.75
Band4	10	20000	1	#0	16QAM	22.76
Band4	10	20000	1	#Mid	16QAM	22.79
Band4	10	20000	1	#Max	16QAM	22.84
Band4	10	20000	25	#0	16QAM	20.84
Band4	10	20000	25	#Mid	16QAM	20.84
Band4	10	20000	25	#Max	16QAM	20.83
Band4	10	20000	50	#0	16QAM	20.81
Band4	10	20175	1	#0	QPSK	22.79
Band4	10	20175	1	#Mid	QPSK	22.80
Band4	10	20175	1	#Max	QPSK	22.79
Band4	10	20175	25	#0	QPSK	21.82
Band4	10	20175	25	#Mid	QPSK	21.83
Band4	10	20175	25	#Max	QPSK	21.86
Band4	10	20175	50	#0	QPSK	21.84
Band4	10	20175	1	#0	16QAM	22.58
Band4	10	20175	1	#Mid	16QAM	22.51
Band4	10	20175	1	#Max	16QAM	22.64
Band4	10	20175	25	#0	16QAM	20.90
Band4	10	20175	25	#Mid	16QAM	20.90
Band4	10	20175	25	#Max	16QAM	20.98
Band4	10	20175	50	#0	16QAM	20.90
Band4	10	20350	1	#0	QPSK	22.78
Band4	10	20350	1	#Mid	QPSK	22.88
Band4	10	20350	1	#Max	QPSK	22.84
Band4	10	20350	25	#0	QPSK	21.81
Band4	10	20350	25	#Mid	QPSK	21.87
Band4	10	20350	25	#Max	QPSK	21.79
Band4	10	20350	50	#0	QPSK	21.77
Band4	10	20350	1	#0	16QAM	22.69
Band4	10	20350	1	#Mid	16QAM	22.80
Band4	10	20350	1	#Max	16QAM	22.62
Band4	10	20350	25	#0	16QAM	20.80
Band4	10	20350	25	#Mid	16QAM	20.99
Band4	10	20350	25	#Max	16QAM	20.93
Band4	10	20350	50	#0	16QAM	20.94
Band4	15	20025	1	#0	QPSK	22.63

Band4	15	20025	1	#Mid	QPSK	22.62
Band4	15	20025	1	#Max	QPSK	22.71
Band4	15	20025	36	#0	QPSK	21.74
Band4	15	20025	36	#Mid	QPSK	21.80
Band4	15	20025	36	#Max	QPSK	21.79
Band4	15	20025	75	#0	QPSK	21.78
Band4	15	20025	1	#0	16QAM	22.83
Band4	15	20025	1	#Mid	16QAM	22.75
Band4	15	20025	1	#Max	16QAM	22.85
Band4	15	20025	36	#0	16QAM	20.81
Band4	15	20025	36	#Mid	16QAM	20.88
Band4	15	20025	36	#Max	16QAM	20.88
Band4	15	20025	75	#0	16QAM	20.77
Band4	15	20175	1	#0	QPSK	22.79
Band4	15	20175	1	#Mid	QPSK	22.77
Band4	15	20175	1	#Max	QPSK	22.73
Band4	15	20175	36	#0	QPSK	21.88
Band4	15	20175	36	#Mid	QPSK	21.86
Band4	15	20175	36	#Max	QPSK	21.89
Band4	15	20175	75	#0	QPSK	21.85
Band4	15	20175	1	#0	16QAM	22.62
Band4	15	20175	1	#Mid	16QAM	22.50
Band4	15	20175	1	#Max	16QAM	22.61
Band4	15	20175	36	#0	16QAM	21.05
Band4	15	20175	36	#Mid	16QAM	20.92
Band4	15	20175	36	#Max	16QAM	21.05
Band4	15	20175	75	#0	16QAM	20.84
Band4	15	20325	1	#0	QPSK	22.70
Band4	15	20325	1	#Mid	QPSK	22.72
Band4	15	20325	1	#Max	QPSK	22.77
Band4	15	20325	36	#0	QPSK	21.85
Band4	15	20325	36	#Mid	QPSK	21.83
Band4	15	20325	36	#Max	QPSK	21.86
Band4	15	20325	75	#0	QPSK	21.70
Band4	15	20325	1	#0	16QAM	22.76
Band4	15	20325	1	#Mid	16QAM	22.63
Band4	15	20325	1	#Max	16QAM	22.75
Band4	15	20325	36	#0	16QAM	20.79
Band4	15	20325	36	#Mid	16QAM	20.66
Band4	15	20325	36	#Max	16QAM	20.78
Band4	15	20325	75	#0	16QAM	20.86
Band4	20	20050	1	#0	QPSK	22.73
Band4	20	20050	1	#Mid	QPSK	22.80
Band4	20	20050	1	#Max	QPSK	22.90
Band4	20	20050	50	#0	QPSK	21.76
Band4	20	20050	50	#Mid	QPSK	21.79
Band4	20	20050	50	#Max	QPSK	21.83
Band4	20	20050	100	#0	QPSK	21.78
Band4	20	20050	1	#0	16QAM	21.85
Band4	20	20050	1	#Mid	16QAM	21.87
Band4	20	20050	1	#Max	16QAM	21.99
Band4	20	20050	50	#0	16QAM	20.83
Band4	20	20050	50	#Mid	16QAM	20.93
Band4	20	20050	50	#Max	16QAM	20.98
Band4	20	20050	100	#0	16QAM	20.88
Band4	20	20175	1	#0	QPSK	23.02
Band4	20	20175	1	#Mid	QPSK	23.11



Band4	20	20175	1	#Max	QPSK	23.07
Band4	20	20175	50	#0	QPSK	21.82
Band4	20	20175	50	#Mid	QPSK	21.93
Band4	20	20175	50	#Max	QPSK	21.91
Band4	20	20175	100	#0	QPSK	21.87
Band4	20	20175	1	#0	16QAM	21.93
Band4	20	20175	1	#Mid	16QAM	21.97
Band4	20	20175	1	#Max	16QAM	21.99
Band4	20	20175	50	#0	16QAM	20.94
Band4	20	20175	50	#Mid	16QAM	20.89
Band4	20	20175	50	#Max	16QAM	20.99
Band4	20	20175	100	#0	16QAM	20.89
Band4	20	20300	1	#0	QPSK	22.88
Band4	20	20300	1	#Mid	QPSK	22.90
Band4	20	20300	1	#Max	QPSK	22.90
Band4	20	20300	50	#0	QPSK	21.79
Band4	20	20300	50	#Mid	QPSK	21.89
Band4	20	20300	50	#Max	QPSK	21.84
Band4	20	20300	100	#0	QPSK	21.85
Band4	20	20300	1	#0	16QAM	22.33
Band4	20	20300	1	#Mid	16QAM	22.21
Band4	20	20300	1	#Max	16QAM	22.36
Band4	20	20300	50	#0	16QAM	20.90
Band4	20	20300	50	#Mid	16QAM	20.99
Band4	20	20300	50	#Max	16QAM	21.04
Band4	20	20300	100	#0	16QAM	20.88

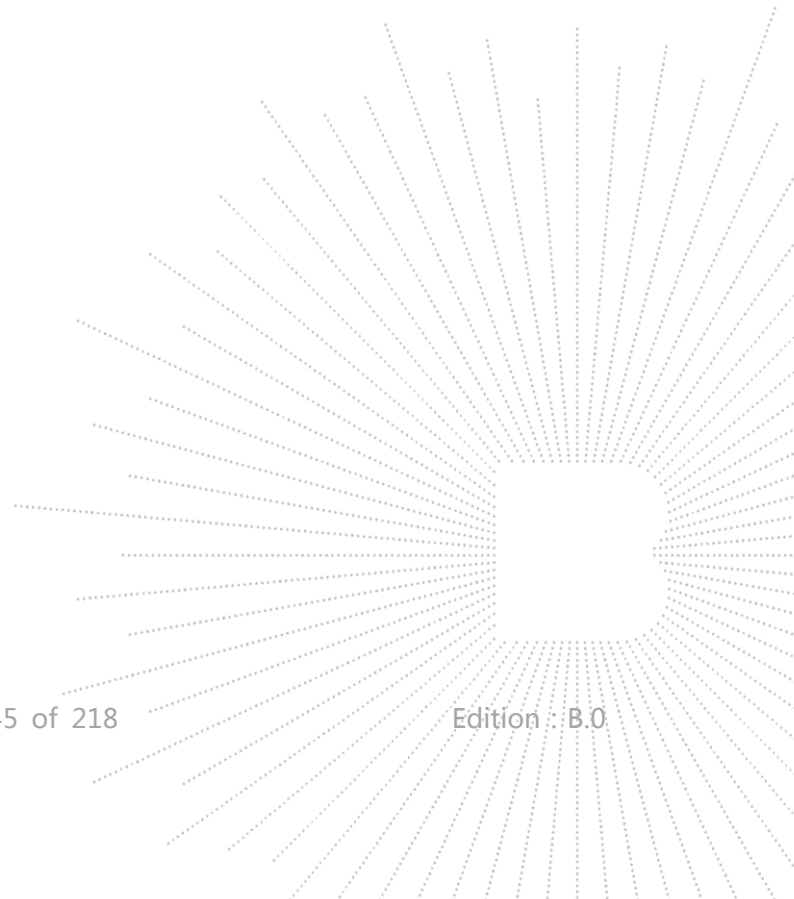

Band	Bandwidth (MHz)	UL Channel	RB Size	RB Position	Modulation	Power (dBm)
Band5	1.4	20407	1	#0	QPSK	22.78
Band5	1.4	20407	1	#Mid	QPSK	22.80
Band5	1.4	20407	1	#Max	QPSK	22.80
Band5	1.4	20407	3	#0	QPSK	22.66
Band5	1.4	20407	3	#Mid	QPSK	22.77
Band5	1.4	20407	3	#Max	QPSK	22.78
Band5	1.4	20407	6	#0	QPSK	21.83
Band5	1.4	20407	1	#0	16QAM	22.87
Band5	1.4	20407	1	#Mid	16QAM	22.94
Band5	1.4	20407	1	#Max	16QAM	22.93
Band5	1.4	20407	3	#0	16QAM	22.07
Band5	1.4	20407	3	#Mid	16QAM	22.06
Band5	1.4	20407	3	#Max	16QAM	22.07
Band5	1.4	20407	6	#0	16QAM	20.95
Band5	1.4	20525	1	#0	QPSK	22.90
Band5	1.4	20525	1	#Mid	QPSK	22.99
Band5	1.4	20525	1	#Max	QPSK	22.92
Band5	1.4	20525	3	#0	QPSK	22.84
Band5	1.4	20525	3	#Mid	QPSK	22.87
Band5	1.4	20525	3	#Max	QPSK	22.92
Band5	1.4	20525	6	#0	QPSK	21.81
Band5	1.4	20525	1	#0	16QAM	21.97
Band5	1.4	20525	1	#Mid	16QAM	21.92
Band5	1.4	20525	1	#Max	16QAM	21.79
Band5	1.4	20525	3	#0	16QAM	21.99
Band5	1.4	20525	3	#Mid	16QAM	21.99
Band5	1.4	20525	3	#Max	16QAM	21.98
Band5	1.4	20525	6	#0	16QAM	21.16
Band5	1.4	20643	1	#0	QPSK	22.86
Band5	1.4	20643	1	#Mid	QPSK	22.87
Band5	1.4	20643	1	#Max	QPSK	22.91
Band5	1.4	20643	3	#0	QPSK	22.76
Band5	1.4	20643	3	#Mid	QPSK	22.77
Band5	1.4	20643	3	#Max	QPSK	22.83
Band5	1.4	20643	6	#0	QPSK	21.73
Band5	1.4	20643	1	#0	16QAM	21.98
Band5	1.4	20643	1	#Mid	16QAM	21.84
Band5	1.4	20643	1	#Max	16QAM	21.99
Band5	1.4	20643	3	#0	16QAM	21.67
Band5	1.4	20643	3	#Mid	16QAM	21.71
Band5	1.4	20643	3	#Max	16QAM	21.79
Band5	1.4	20643	6	#0	16QAM	20.84
Band5	3	20415	1	#0	QPSK	22.79
Band5	3	20415	1	#Mid	QPSK	22.75
Band5	3	20415	1	#Max	QPSK	22.80
Band5	3	20415	8	#0	QPSK	21.78
Band5	3	20415	8	#Mid	QPSK	21.72
Band5	3	20415	8	#Max	QPSK	21.76
Band5	3	20415	15	#0	QPSK	21.73
Band5	3	20415	1	#0	16QAM	22.94
Band5	3	20415	1	#Mid	16QAM	22.80
Band5	3	20415	1	#Max	16QAM	22.85
Band5	3	20415	8	#0	16QAM	20.73
Band5	3	20415	8	#Mid	16QAM	20.71
Band5	3	20415	8	#Max	16QAM	20.76



Band5	3	20415	15	#0	16QAM	20.98
Band5	3	20525	1	#0	QPSK	23.02
Band5	3	20525	1	#Mid	QPSK	22.97
Band5	3	20525	1	#Max	QPSK	22.97
Band5	3	20525	8	#0	QPSK	21.93
Band5	3	20525	8	#Mid	QPSK	21.91
Band5	3	20525	8	#Max	QPSK	21.98
Band5	3	20525	15	#0	QPSK	21.89
Band5	3	20525	1	#0	16QAM	21.97
Band5	3	20525	1	#Mid	16QAM	21.91
Band5	3	20525	1	#Max	16QAM	21.97
Band5	3	20525	8	#0	16QAM	21.00
Band5	3	20525	8	#Mid	16QAM	20.92
Band5	3	20525	8	#Max	16QAM	20.99
Band5	3	20525	15	#0	16QAM	20.87
Band5	3	20635	1	#0	QPSK	22.89
Band5	3	20635	1	#Mid	QPSK	22.86
Band5	3	20635	1	#Max	QPSK	22.86
Band5	3	20635	8	#0	QPSK	21.83
Band5	3	20635	8	#Mid	QPSK	21.83
Band5	3	20635	8	#Max	QPSK	21.73
Band5	3	20635	15	#0	QPSK	21.88
Band5	3	20635	1	#0	16QAM	21.93
Band5	3	20635	1	#Mid	16QAM	21.99
Band5	3	20635	1	#Max	16QAM	21.97
Band5	3	20635	8	#0	16QAM	20.89
Band5	3	20635	8	#Mid	16QAM	20.86
Band5	3	20635	8	#Max	16QAM	20.84
Band5	3	20635	15	#0	16QAM	20.88
Band5	5	20425	1	#0	QPSK	22.69
Band5	5	20425	1	#Mid	QPSK	22.77
Band5	5	20425	1	#Max	QPSK	22.69
Band5	5	20425	12	#0	QPSK	21.85
Band5	5	20425	12	#Mid	QPSK	21.81
Band5	5	20425	12	#Max	QPSK	21.90
Band5	5	20425	25	#0	QPSK	21.85
Band5	5	20425	1	#0	16QAM	21.92
Band5	5	20425	1	#Mid	16QAM	21.93
Band5	5	20425	1	#Max	16QAM	21.97
Band5	5	20425	12	#0	16QAM	20.80
Band5	5	20425	12	#Mid	16QAM	20.81
Band5	5	20425	12	#Max	16QAM	20.86
Band5	5	20425	25	#0	16QAM	21.06
Band5	5	20525	1	#0	QPSK	22.87
Band5	5	20525	1	#Mid	QPSK	22.94
Band5	5	20525	1	#Max	QPSK	22.98
Band5	5	20525	12	#0	QPSK	21.89
Band5	5	20525	12	#Mid	QPSK	21.93
Band5	5	20525	12	#Max	QPSK	21.90
Band5	5	20525	25	#0	QPSK	21.98
Band5	5	20525	1	#0	16QAM	21.97
Band5	5	20525	1	#Mid	16QAM	21.97
Band5	5	20525	1	#Max	16QAM	22.01
Band5	5	20525	12	#0	16QAM	20.84
Band5	5	20525	12	#Mid	16QAM	20.74
Band5	5	20525	12	#Max	16QAM	20.78
Band5	5	20525	25	#0	16QAM	20.98