

# TEST REPORT

Report No.: BCTC2307123633-4E

---

Applicant: SHENZHEN NST INDUSTRY AND TRADE CO., LTD

---

Product Name: 10.1 inch tablet PC

---

Model/Type  
reference: T10Pro

---

Tested Date: 2023-07-31 to 2023-08-07

---

Issued Date: 2023-08-07

---



**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID: 2AAMS-T10PRO

Product Name: 10.1 inch tablet PC  
Trademark: N/A  
Model/Type reference: T10Pro  
M1045T  
Prepared For: SHENZHEN NST INDUSTRY AND TRADE CO., LTD  
Address: 3-4/F, Bldg 1, Hongbang Intelligent Technology Park, No.30 Cuibao Road, Baolong Street, Longgang District, Shenzhen China  
Manufacturer: SHENZHEN NST INDUSTRY AND TRADE CO., LTD  
Address: 3-4/F, Bldg 1, Hongbang Intelligent Technology Park, No.30 Cuibao Road, Baolong Street, Longgang District, Shenzhen China  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2023-07-31  
Sample tested Date: 2023-07-31 to 2023-08-07  
Issue Date: 2023-08-07  
Report No.: BCTC2307123633-4E  
FCC Part15 15.407  
ANSI C63.10-2013  
Test Standards: KDB 662911 D01 v02r01  
KDB 789033 D02 v02r01  
Test Results: PASS  
Remark: This is WIFI-5GHz band radio test report.

Tested by:



Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

	Page
Test Report Declaration	
1. Version .....	5
2. Test Summary .....	6
3. Measurement Uncertainty .....	7
4. Product Information And Test Setup .....	8
4.1 Product Information .....	8
4.2 Test Setup Configuration .....	9
4.3 Support Equipment .....	9
4.4 Channel List .....	10
4.5 Test Mode .....	11
4.6 Table Of Parameters Of Text Software Setting .....	11
5. Test Facility And Test Instrument Used .....	12
5.1 Test Facility .....	12
5.2 Test Instrument Used .....	12
6. Conducted Emissions .....	14
6.1 Block Diagram Of Test Setup .....	14
6.2 Limit .....	14
6.3 Test procedure .....	14
6.4 EUT operating Conditions .....	14
6.5 Test Result .....	15
7. Radiated Emissions .....	17
7.1 Block Diagram Of Test Setup .....	17
7.2 Limit .....	18
7.3 Test procedure .....	19
7.4 EUT operating Conditions .....	20
7.5 Test Result .....	20
8. Power Spectral Density Test .....	35
8.1 Block Diagram Of Test Setup .....	35
8.2 Limit .....	35
8.3 Test procedure .....	36
8.4 EUT operating Conditions .....	36
8.5 Test Result .....	37
9. 26dB & 6dB & 99% Emission Bandwidth .....	52
9.1 Block Diagram Of Test Setup .....	52
9.2 Limit .....	52
9.3 Test procedure .....	52
9.4 EUT operating Conditions .....	53
9.5 Test Result .....	53
10. Maximum Conducted Output Power .....	83
10.1 Block Diagram Of Test Setup .....	83
10.2 Limit .....	83
10.3 Test procedure .....	83
10.4 EUT operating Conditions .....	84
10.5 Test Result .....	85
11. Out Of Band Emissions .....	86
11.1 Block Diagram Of Test Setup .....	86


11.2	Limit .....	86
11.3	Test procedure .....	86
11.4	EUT operating Conditions .....	86
11.5	Test Result.....	87
12.	Spurious RF Conducted Emissions.....	99
12.1	Block Diagram Of Test Setup.....	99
12.2	Limit .....	99
12.3	Test procedure .....	99
12.4	Test Result.....	99
13.	Frequency Stability Measurement.....	114
13.1	Block Diagram Of Test Setup.....	114
13.2	Limit .....	114
13.3	Test procedure .....	114
13.4	Test Result.....	115
14.	Antenna Requirement .....	121
14.1	Limit .....	121
14.2	Test Antenna.....	121
15.	EUT Photographs.....	122
16.	EUT Test Setup Photographs.....	123

(Note: N/A Means Not Applicable)

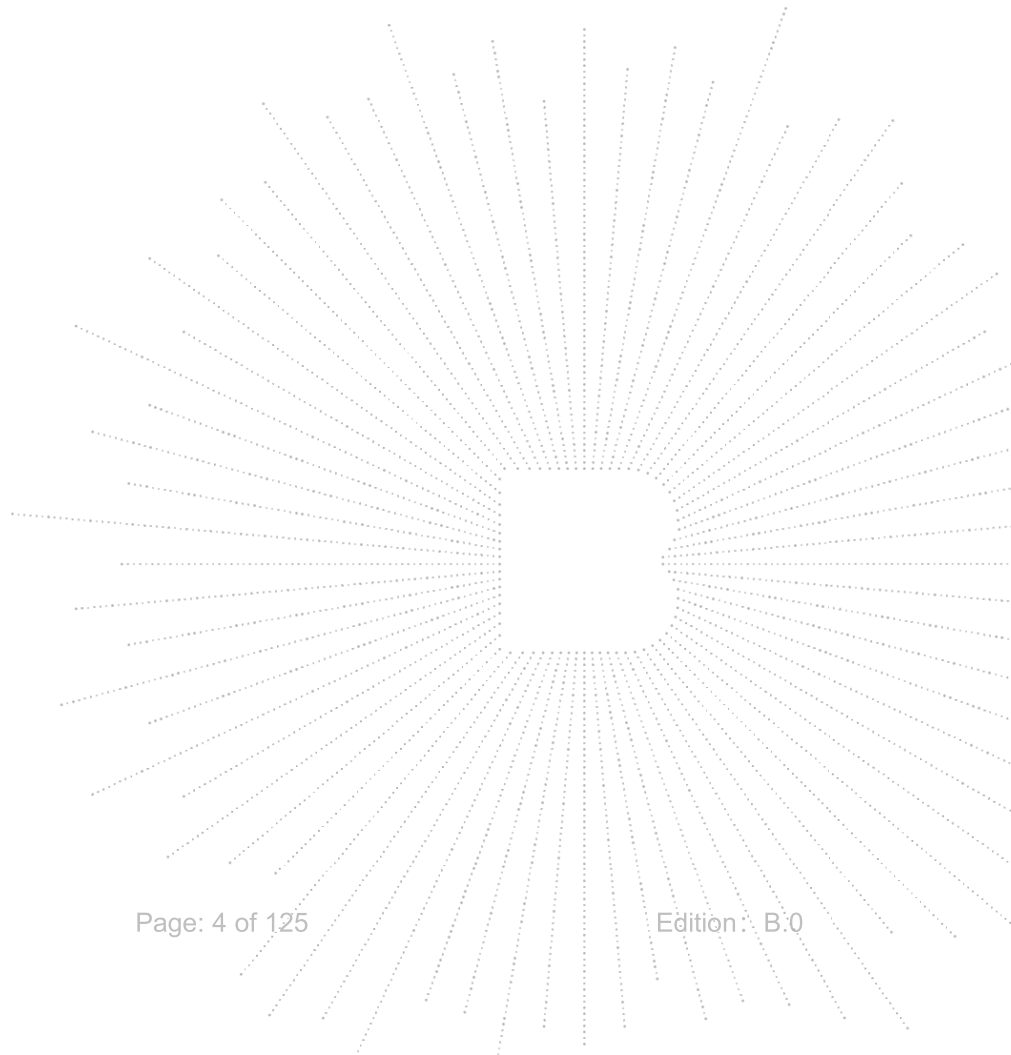

**1. Version**

<b>Report No.</b>	<b>Issue Date</b>	<b>Description</b>	<b>Approved</b>
BCTC2307123633-4E	2023-08-07	Original	Valid

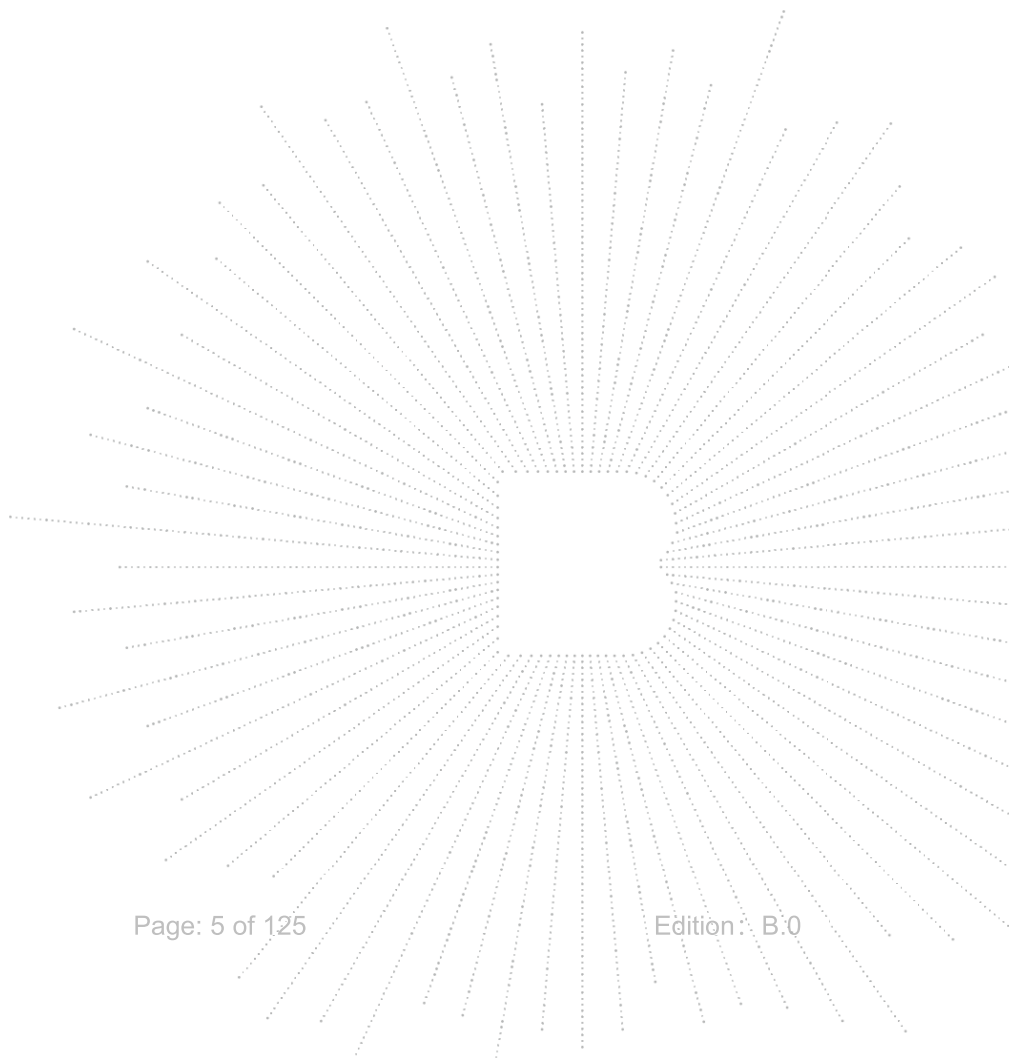

## 2. Test Summary

The Product has been tested according to the following specifications:

1	Test Parameter	Clause No.	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	PASS
2	Conducted Emission	15.207	PASS
3	26 dB and 99% Emission Bandwidth	15.407 (a)(12) 15.1049	PASS
4	Minimum 6 dB bandwidth	15.407(e)	PASS
5	Maximum Conducted Output Power	15.407 (a)(1) 15.407 (a)(3)	PASS
6	Band Edge	2.1051, 15.407(b)(1) 15.407(b)(4)	PASS
7	Power Spectral Density	15.407 (a)(1) 15.407 (a)(3)	PASS
8	Spurious Emissions at Antenna Terminals	2.1051, 15.407(b)	PASS
9	Antenna Requirement	15.203	PASS

Note: The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure.


### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

## 4. Product Information And Test Setup

### 4.1 Product Information


Model/Type reference:	T10Pro M1045T
Model differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	P863 WT_P863_W_8183_BJJ_MB_WIFI_V2.2_20230509
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported:	802.11a/n/ac(20MHz channel bandwidth) 802.11n/ac(40MHz channel bandwidth) 802.11ac(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; 5745-5825 MHz for 802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11a/n(HT40)/ac40; 5775MHz for 802.11 ac80;
Data Rate:	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
Number Of Channel:	4 channels for 802.11a/n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; 5 channels for 802.11a/n20 in the 5745-5825MHz band ; 2 channels for 802.11 n40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
Antenna installation:	Internal antenna
Antenna Gain:	2.08 dBi
Ratings:	DC 5V from adapter
Adapter:	MOEDL: MK050200-T10USU INPUT: 100-240V ~50-60Hz 0.6A OUTPUT: 5.0V  2.0A 10W




## 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission:



Radiated Spurious Emission



## 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	10.1 inch tablet PC	N/A	T10Pro	M1045T	EUT
E-2	Adapter	N/A	MK050200-T10USU	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	0.3M	DC cable unshielded

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

Frequency and Channel list for 802.11a/n/ac (5180-5240MHz):

802.11a/n/ac( 20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	40	5200	48	5240

802.11n/ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	-	-	-	-	-	-

Frequency and Channel list for 802.11a/n/ac (5745-5825MHz):

802.11a/n/ac( 20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n/ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	-	-	-	-	-	-

#### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	Link Mode

Note: The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

#### 4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Parameters	DEF	DEF	DEF

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

FCC Designation Number: CN1212

ISED Registered No.: 23583


ISED CAB identifier: CN0017

### 5.2 Test Instrument Used

Conducted Emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
LISN	R&S	ENV216	101375	May 15, 2023	May 14, 2024
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\
Attenuator	\	10dB DC-6GHz	1650	May 15, 2023	May 14, 2024


RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Metter	Keysight	E4419	\	May 15, 2023	May 14, 2024
Power Sensor (AV)	Keysight	E9300A	\	May 15, 2023	May 14, 2024
Signal Analyzer20kHz-26.5GHz	Keysight	N9020A	MY49100060	May 15, 2023	May 14, 2024
Spectrum Analyzer9kHz-40GHz	R&S	FSP40	100363	May 15, 2023	May 14, 2024
Radio frequency control box	MAIWEI	MW100-RFC B	\	\	\
Software	MAIWEI	MTS 8310	\	\	\

Radiated Emissions Test (966 Chamber02)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	SKET	966 Room	966	Nov. 02. 2021	Nov. 01.2024
Receiver	R&S	ESR3	102075	May 15, 2023	May 14, 2024
Receiver	R&S	ESRI7	100010	Nov. 08. 2022	Nov. 07.2023
Amplifier	SKET	LNPA-30M01 G-30	SK202108200 4	Nov. 08. 2022	Nov. 07.2023
TRILOG Broadband Antenna	Schwarzbeck	VULB9168	1323	Mar. 06, 2022	Mar. 05, 2024
Loop Antenna(9KHz -30MHz)	Schwarzbeck	FMZB1519B	00014	May 31, 2023	May 30, 2024
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 15, 2023	May 14, 2024
Horn Antenna	Schwarzbeck	BBHA9120D	1541	May 31, 2023	May 30, 2024
Amplifier(18G Hz-40GHz)	MITEQ	TTA1840-35- HG	2034381	May 15, 2023	May 14, 2024
Horn Antenn(18GH z-40GHz)	Schwarzbeck	BBHA9170	00822	May 31, 2023	May 30, 2024
Spectrum Analyzer9kHz- 40GHz	R&S	FSP40	100363	May 15, 2023	May 14, 2024
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

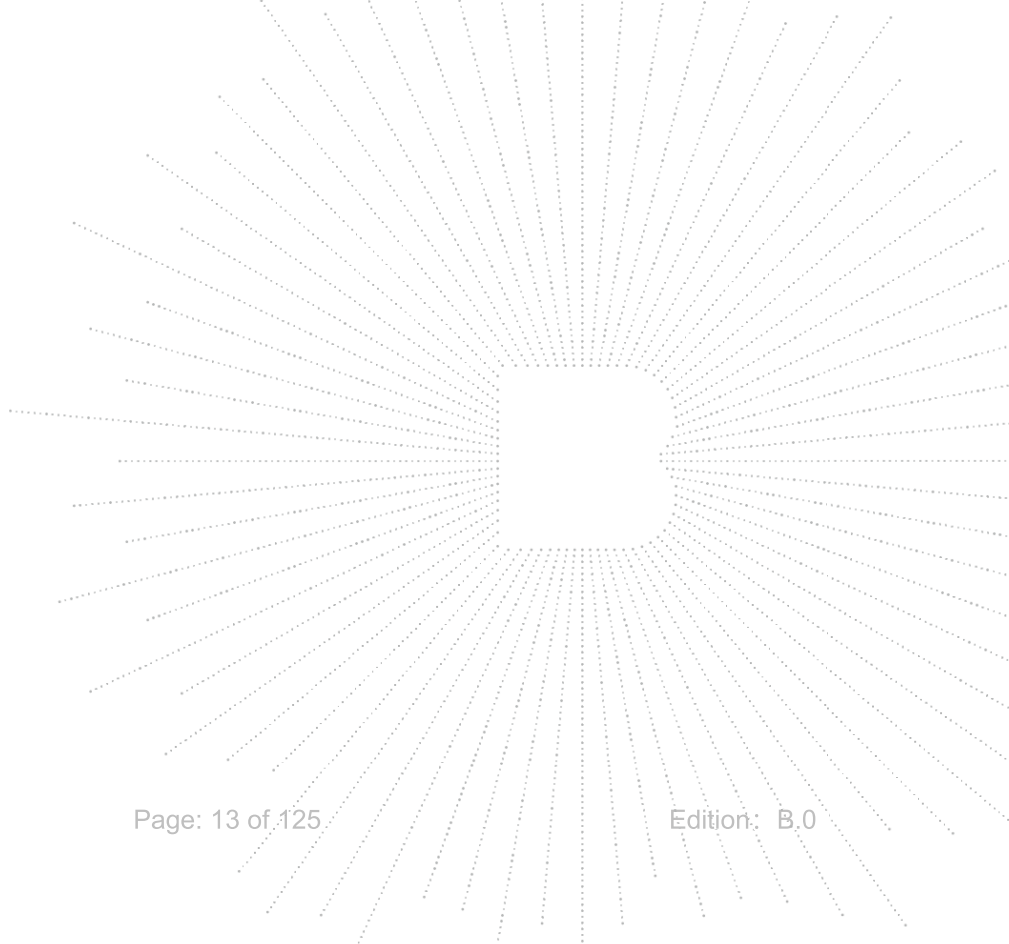

## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup

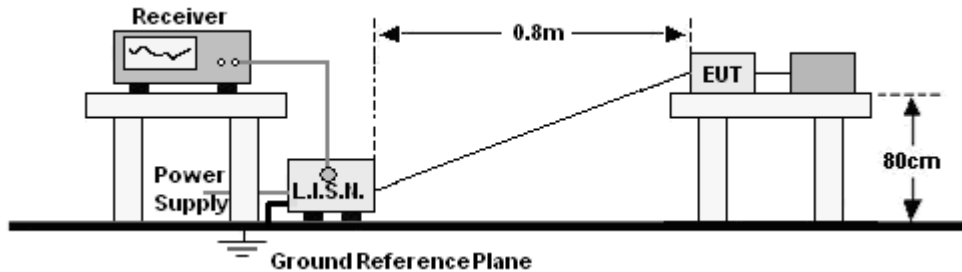

### 6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- \*Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

### 6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


### 6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.

### 6.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	Mode 4	Polarization :	L

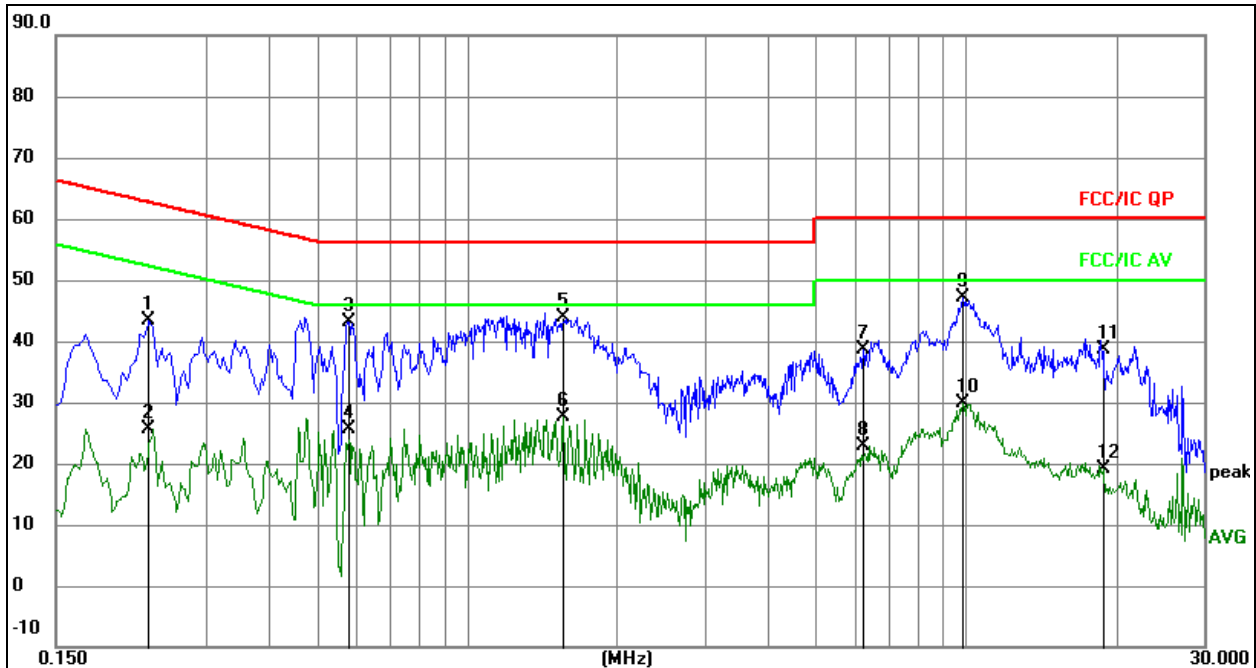


**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit

No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2303	33.76	9.61	43.37	62.44	-19.07	QP
2		0.2303	16.05	9.61	25.66	52.44	-26.78	AVG
3		0.5792	33.56	9.62	43.18	56.00	-12.82	QP
4		0.5792	15.96	9.62	25.58	46.00	-20.42	AVG
5	*	1.5599	34.05	9.73	43.78	56.00	-12.22	QP
6		1.5599	17.86	9.73	27.59	46.00	-18.41	AVG
7		6.2189	28.92	9.77	38.69	60.00	-21.31	QP
8		6.2189	13.12	9.77	22.89	50.00	-27.11	AVG
9		9.8606	37.54	9.66	47.20	60.00	-12.80	QP
10		9.8606	20.15	9.66	29.81	50.00	-20.19	AVG
11		18.8204	28.82	9.75	38.57	60.00	-21.43	QP
12		18.8204	9.35	9.75	19.10	50.00	-30.90	AVG

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	Mode 4	Polarization :	N

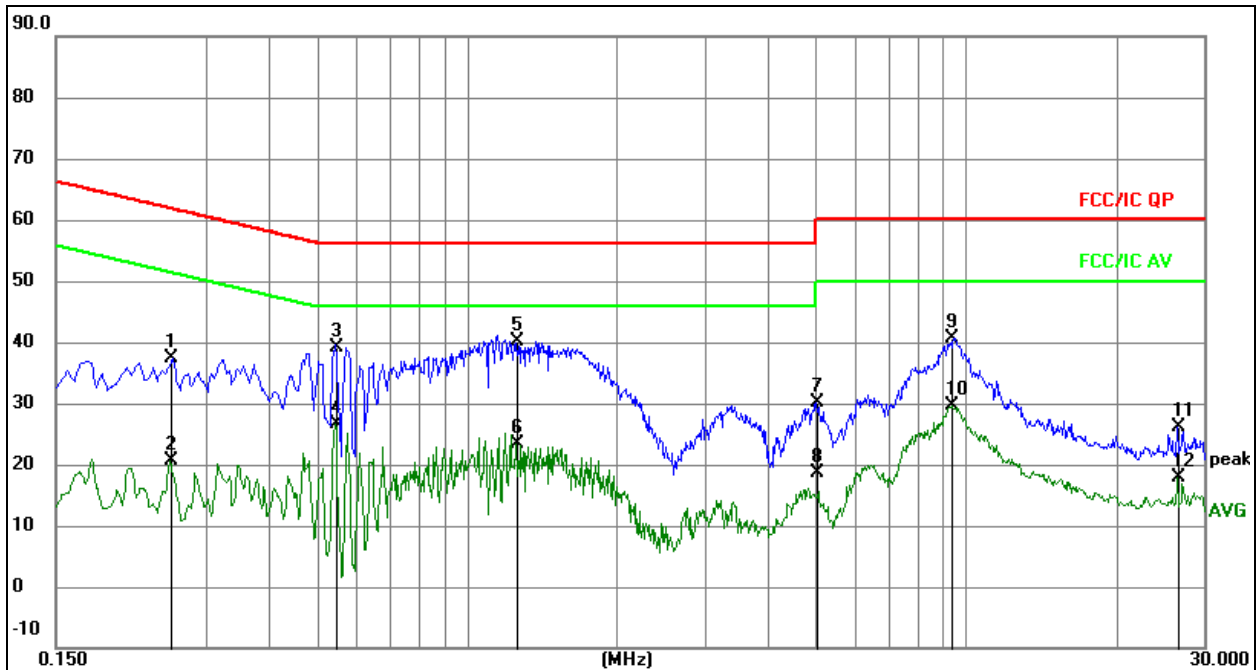
**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.
3. Measurement = Reading Level + Correct Factor
4. Over = Measurement - Limit


No.	Mk.	Freq. MHz	Reading Level	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2535	27.87	9.61	37.48	61.64	-24.16	QP
2		0.2535	11.10	9.61	20.71	51.64	-30.93	AVG
3		0.5460	29.41	9.62	39.03	56.00	-16.97	QP
4		0.5460	17.11	9.62	26.73	46.00	-19.27	AVG
5	*	1.2570	30.49	9.73	40.22	56.00	-15.78	QP
6		1.2570	13.55	9.73	23.28	46.00	-22.72	AVG
7		5.0235	20.28	9.81	30.09	60.00	-29.91	QP
8		5.0235	8.79	9.81	18.60	50.00	-31.40	AVG
9		9.3885	30.88	9.68	40.56	60.00	-19.44	QP
10		9.3885	19.90	9.68	29.58	50.00	-20.42	AVG
11		26.6100	16.35	9.73	26.08	60.00	-33.92	QP
12		26.6100	8.24	9.73	17.97	50.00	-32.03	AVG




## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

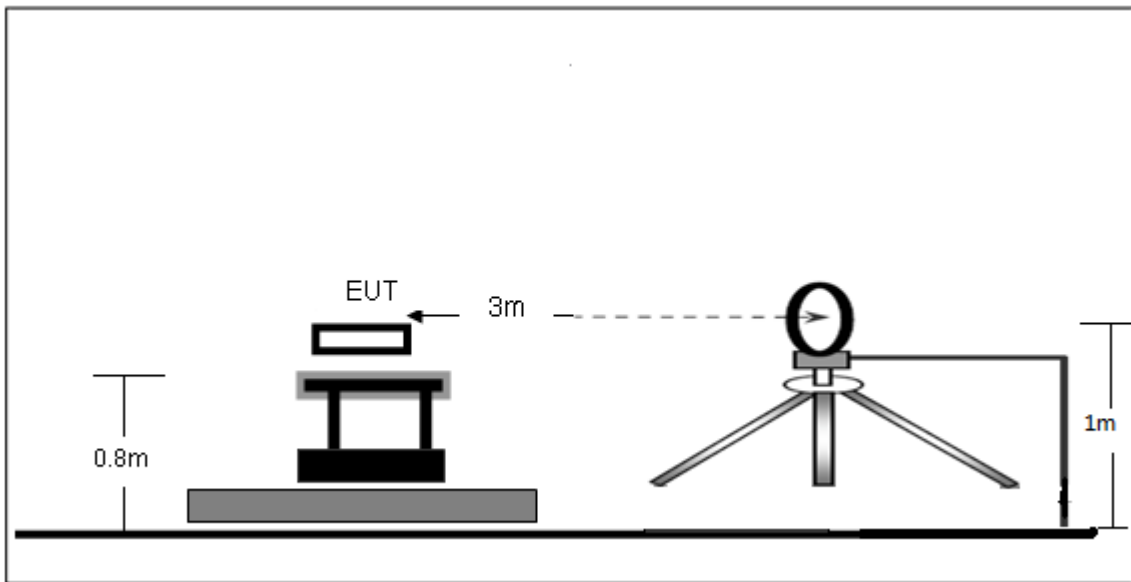

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

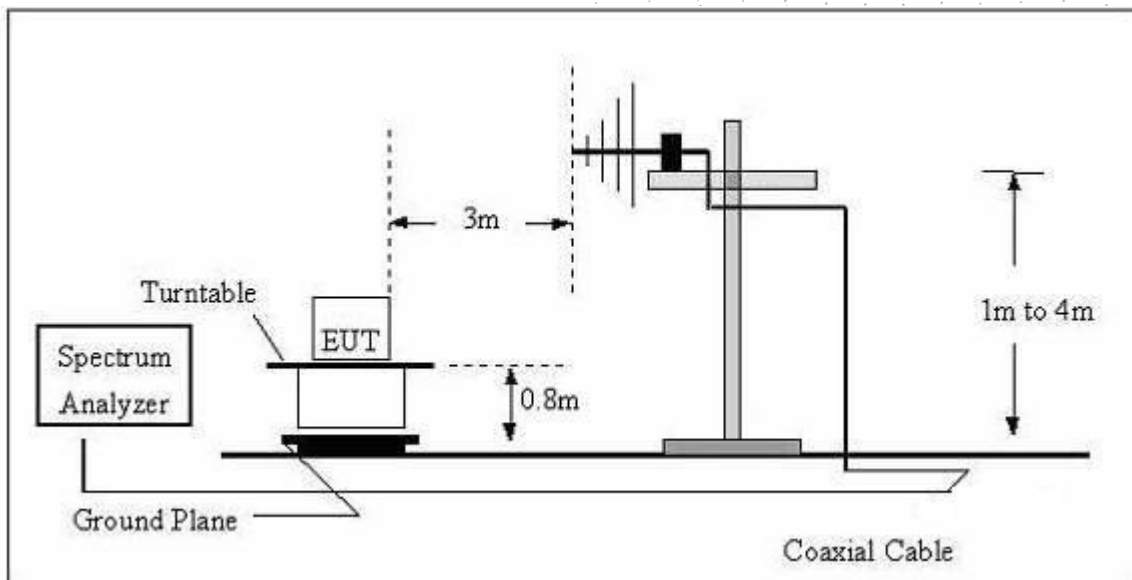

## (C) Radiated Emission Test-Up Frequency Above 1GHz

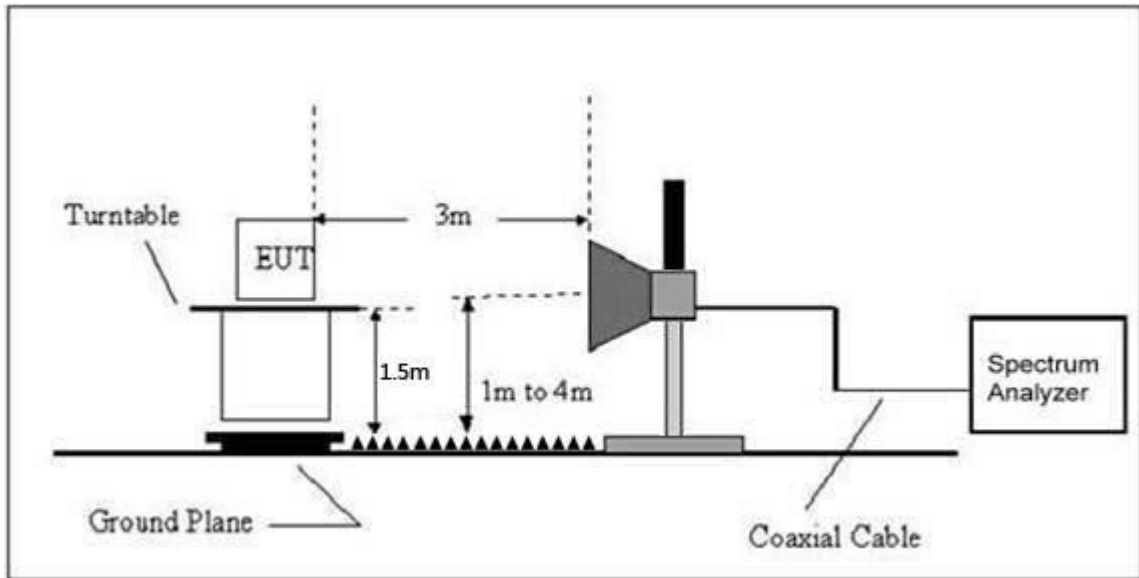

## 7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

#### Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 7.3 Test procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.

It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

## 7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	Mode 4	Polarization :	---


Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance/test distance})(\text{dB})$ ;

Limit line = specific limits(dBuv) + distance extrapolation factor.

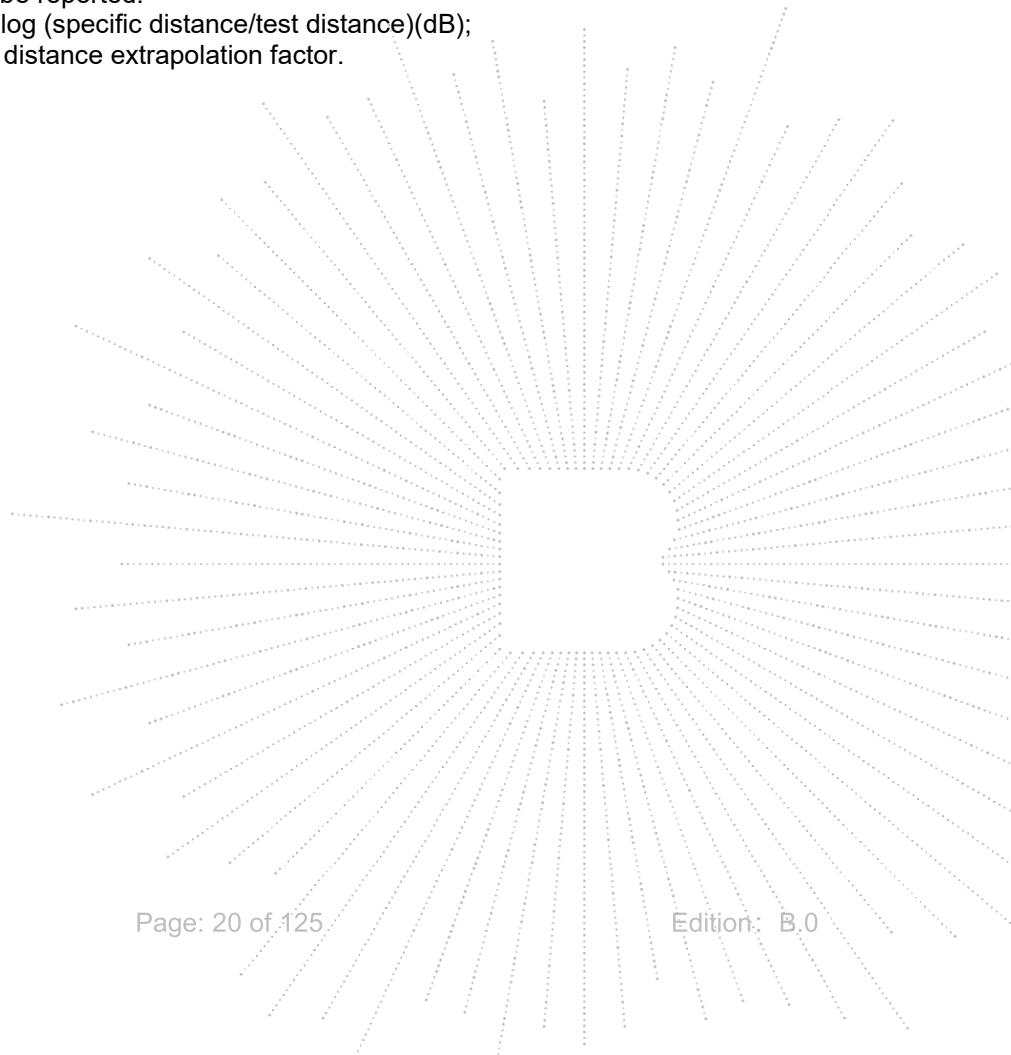


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	Mode 4	Polarization :	Horizontal

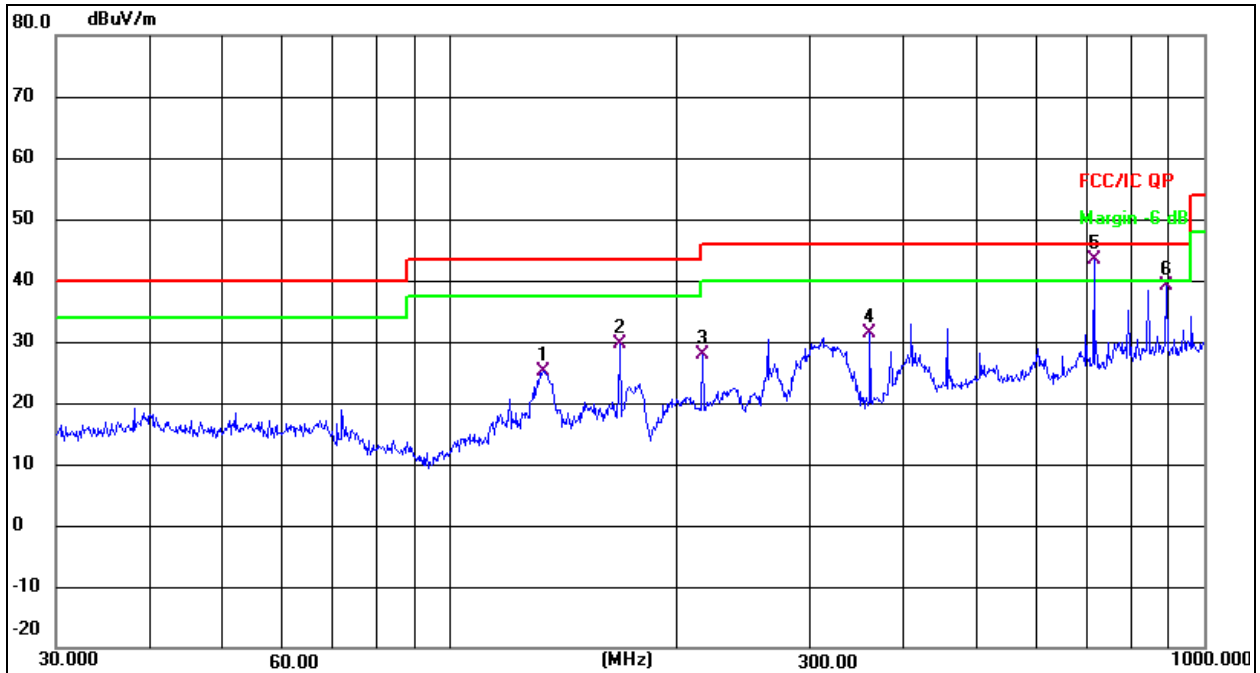
**Remark:**

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	133.1511	36.66	-11.42	25.24	43.50	-18.26	QP
2	167.8243	40.65	-11.01	29.64	43.50	-13.86	QP
3	216.0240	40.78	-12.93	27.85	46.00	-18.15	QP
4	360.4476	39.13	-7.79	31.34	46.00	-14.66	QP
5 *	714.1734	43.09	0.41	43.50	46.00	-2.50	QP
6	890.7278	35.54	3.61	39.15	46.00	-6.85	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	Mode 4	Polarization :	Vertical

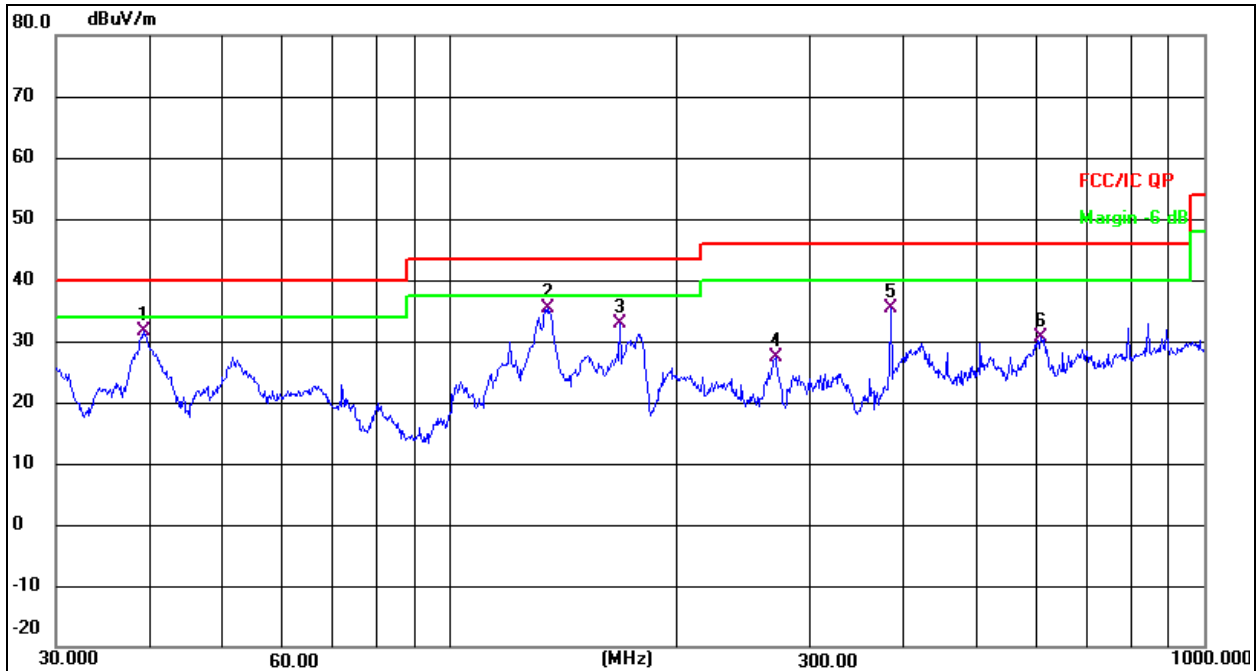
**Remark:**

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.1615	41.99	-10.40	31.59	40.00	-8.41	QP
2 *	135.0318	46.81	-11.32	35.49	43.50	-8.01	QP
3	167.8242	43.84	-11.01	32.83	43.50	-10.67	QP
4	270.3748	38.01	-10.51	27.50	46.00	-18.50	QP
5	383.9318	42.70	-7.21	35.49	46.00	-10.51	QP
6	607.7867	31.88	-1.32	30.56	46.00	-15.44	QP

Test Mode:	TX(5.1G) - 802.11a
------------	--------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (5180 MHz)-Above 1G</b>									
V	4434.074	64.32	5.94	35.40	44.00	61.66	68.2	-6.54	PK
V	4434.074	43.27	5.94	35.40	44.00	40.61	54	-13.39	AV
V	10360.114	61.20	8.46	39.75	44.50	64.91	68.2	-3.29	PK
V	10360.114	43.42	8.46	39.75	44.50	47.13	54	-6.87	AV
V	15540.146	63.83	10.12	38.80	44.10	68.65	74	-5.35	PK
V	15540.146	43.69	10.12	38.80	42.70	49.91	54	-4.09	AV
H	4434.109	60.38	5.94	35.18	44.00	57.50	68.2	-10.70	PK
H	4434.109	43.95	5.94	35.18	44.00	41.07	54	-12.93	AV
H	10360.066	52.15	8.46	38.71	44.50	54.82	68.2	-13.38	PK
H	10360.066	43.12	8.46	38.71	44.50	45.79	54	-8.21	AV
H	15540.000	52.63	10.12	38.38	44.10	57.03	74	-16.97	PK
H	15540.000	40.16	10.12	38.38	44.10	44.56	54	-9.44	AV
<b>Middle Channel (5200 MHz)-Above 1G</b>									
V	4592.162	61.30	6.48	36.35	44.05	60.08	74	-13.92	PK
V	4592.162	43.97	6.48	36.35	44.05	42.75	54	-11.25	AV
V	10400.200	63.70	8.47	37.88	44.51	65.54	68.2	-2.66	PK
V	10400.200	43.58	8.47	37.88	44.51	45.42	54	-8.58	AV
V	15600.041	60.42	10.12	38.80	44.10	65.24	74	-8.76	PK
V	15600.041	43.53	10.12	38.80	42.70	49.75	54	-4.25	AV
H	4592.109	62.25	6.48	36.37	44.05	61.05	74	-12.95	PK
H	4592.109	43.99	6.48	36.37	44.05	42.79	54	-11.21	AV
H	10400.019	54.56	8.47	38.64	44.50	57.17	68.2	-11.03	PK
H	10400.019	41.39	8.47	38.64	44.50	44.00	54	-10.00	AV
H	15600.137	54.54	10.12	38.38	44.10	58.94	74	-15.06	PK
H	15600.137	44.13	10.12	38.38	44.10	48.53	54	-5.47	AV
<b>High Channel (5240 MHz)-Above 1G</b>									
V	4739.119	61.64	7.10	37.24	43.50	62.48	74	-11.52	PK
V	4739.119	43.64	7.10	37.24	43.50	44.48	54	-9.52	AV
V	10480.047	63.66	8.46	37.68	44.50	65.30	68.2	-2.90	PK
V	10480.047	43.05	8.46	37.68	44.50	44.69	54	-9.31	AV
V	15720.186	62.88	10.12	38.80	44.10	67.70	74	-6.30	PK
V	15720.186	43.57	10.12	38.80	42.70	49.79	54	-4.21	AV
H	4739.009	63.71	7.10	37.24	43.50	64.55	74	-9.45	PK
H	4739.009	43.49	7.10	37.24	43.50	44.33	54	-9.67	AV
H	10480.078	53.27	8.46	38.57	44.50	55.80	68.2	-12.40	PK
H	10480.078	40.39	8.46	38.57	44.50	42.92	54	-11.08	AV
H	15720.171	54.78	10.12	38.38	44.10	59.18	74	-14.82	PK
H	15720.171	42.46	10.12	38.38	44.10	46.86	54	-7.14	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode:	TX(5.1G) - 802.11n-HT20
------------	-------------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (5180 MHz)-Above 1G</b>									
V	4434.112	64.98	5.94	35.40	44.00	62.32	68.2	-5.88	PK
V	4434.112	43.66	5.94	35.40	44.00	41.00	54	-13.00	AV
V	10360.152	62.26	8.46	39.75	44.50	65.97	68.2	-2.23	PK
V	10360.152	43.10	8.46	39.75	44.50	46.81	54	-7.19	AV
V	15540.192	64.24	10.12	38.80	44.10	69.06	74	-4.94	PK
V	15540.192	43.79	10.12	38.80	42.70	50.01	54	-3.99	AV
H	4434.191	60.51	5.94	35.18	44.00	57.63	68.2	-10.57	PK
H	4434.191	43.77	5.94	35.18	44.00	40.89	54	-13.11	AV
H	10360.112	53.00	8.46	38.71	44.50	55.67	68.2	-12.53	PK
H	10360.112	43.51	8.46	38.71	44.50	46.18	54	-7.82	AV
H	15540.191	54.75	10.12	38.38	44.10	59.15	74	-14.85	PK
H	15540.191	40.95	10.12	38.38	44.10	45.35	54	-8.65	AV
<b>Middle Channel (5200 MHz)-Above 1G</b>									
V	4592.126	62.27	6.48	36.35	44.05	61.05	74	-12.95	PK
V	4592.126	43.75	6.48	36.35	44.05	42.53	54	-11.47	AV
V	10400.164	61.86	8.47	37.88	44.51	63.70	68.2	-4.50	PK
V	10400.164	43.33	8.47	37.88	44.51	45.17	54	-8.83	AV
V	15600.071	62.53	10.12	38.80	44.10	67.35	74	-6.65	PK
V	15600.071	43.63	10.12	38.80	42.70	49.85	54	-4.15	AV
H	4592.115	61.20	6.48	36.37	44.05	60.00	74	-14.00	PK
H	4592.115	43.44	6.48	36.37	44.05	42.24	54	-11.76	AV
H	10400.106	52.73	8.47	38.64	44.50	55.34	68.2	-12.86	PK
H	10400.106	40.81	8.47	38.64	44.50	43.42	54	-10.58	AV
H	15600.170	50.72	10.12	38.38	44.10	55.12	74	-18.88	PK
H	15600.170	43.81	10.12	38.38	44.10	48.21	54	-5.79	AV
<b>High Channel (5240 MHz)-Above 1G</b>									
V	4739.173	61.79	7.10	37.24	43.50	62.63	74	-11.37	PK
V	4739.173	43.40	7.10	37.24	43.50	44.24	54	-9.76	AV
V	10480.023	64.28	8.46	37.68	44.50	65.92	68.2	-2.28	PK
V	10480.023	43.19	8.46	37.68	44.50	44.83	54	-9.17	AV
V	15720.098	63.61	10.12	38.80	44.10	68.43	74	-5.57	PK
V	15720.098	43.11	10.12	38.80	42.70	49.33	54	-4.67	AV
H	4739.086	62.23	7.10	37.24	43.50	63.07	74	-10.93	PK
H	4739.086	43.66	7.10	37.24	43.50	44.50	54	-9.50	AV
H	10480.011	51.90	8.46	38.57	44.50	54.43	68.2	-13.77	PK
H	10480.011	42.27	8.46	38.57	44.50	44.80	54	-9.20	AV
H	15720.169	53.17	10.12	38.38	44.10	57.57	74	-16.43	PK
H	15720.169	41.34	10.12	38.38	44.10	45.74	54	-8.26	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode:	TX(5.1G) - 802.11n-HT40
------------	-------------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (5190 MHz)-Above 1G</b>									
V	4434.088	61.15	5.94	35.40	44.00	58.49	68.2	-9.71	PK
V	4434.088	43.69	5.94	35.40	44.00	41.03	54	-12.97	AV
V	10380.194	63.56	8.46	39.75	44.50	67.27	68.2	-0.93	PK
V	10380.194	43.15	8.46	39.75	44.50	46.86	54	-7.14	AV
V	15570.134	64.84	10.12	38.80	44.10	69.66	74	-4.34	PK
V	15570.134	43.69	10.12	38.80	42.70	49.91	54	-4.09	AV
H	4434.155	64.15	5.94	35.18	44.00	61.27	74	-12.73	PK
H	4434.155	43.90	5.94	35.18	44.00	41.02	54	-12.98	AV
H	10380.007	51.25	8.46	38.71	44.50	53.92	68.2	-14.28	PK
H	10380.007	42.25	8.46	38.71	44.50	44.92	54	-9.08	AV
H	15570.118	53.43	10.12	38.38	44.10	57.83	74	-16.17	PK
H	15570.118	44.94	10.12	38.38	44.10	49.34	54	-4.66	AV
<b>High Channel (5230 MHz)-Above 1G</b>									
V	4739.154	63.27	6.48	36.35	44.05	62.05	68.2	-6.15	PK
V	4739.154	43.67	6.48	36.35	44.05	42.45	54	-11.55	AV
V	10460.120	60.60	8.47	37.88	44.51	62.44	68.2	-5.76	PK
V	10460.120	43.69	8.47	37.88	44.51	45.53	54	-8.47	AV
V	15690.193	61.41	10.12	38.80	44.10	66.23	74	-7.77	PK
V	15690.193	43.85	10.12	38.80	42.70	50.07	54	-3.93	AV
H	4739.073	64.15	6.48	36.37	44.05	62.95	68.2	-5.25	PK
H	4739.073	43.26	6.48	36.37	44.05	42.06	54	-11.94	AV
H	10460.188	50.49	8.47	38.64	44.50	53.10	68.2	-15.10	PK
H	10460.188	43.17	8.47	38.64	44.50	45.78	54	-8.22	AV
H	15690.003	54.72	10.12	38.38	44.10	59.12	74	-14.88	PK
H	15690.003	42.46	10.12	38.38	44.10	46.86	54	-7.14	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT20
------------	--------------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (5180 MHz)-Above 1G</b>									
V	4434.191	62.76	5.94	35.40	44.00	60.10	68.2	-8.10	PK
V	4434.191	43.21	5.94	35.40	44.00	40.55	54	-13.45	AV
V	10360.001	62.98	8.46	39.75	44.50	66.69	68.2	-1.51	PK
V	10360.001	43.80	8.46	39.75	44.50	47.51	54	-6.49	AV
V	15540.067	64.79	10.12	38.80	44.10	69.61	74	-4.39	PK
V	15540.067	43.75	10.12	38.80	42.70	49.97	54	-4.03	AV
H	4434.037	64.95	5.94	35.18	44.00	62.07	68.2	-6.13	PK
H	4434.037	43.63	5.94	35.18	44.00	40.75	54	-13.25	AV
H	10360.096	54.24	8.46	38.71	44.50	56.91	68.2	-11.29	PK
H	10360.096	44.67	8.46	38.71	44.50	47.34	54	-6.66	AV
H	15540.090	50.38	10.12	38.38	44.10	54.78	74	-19.22	PK
H	15540.090	41.70	10.12	38.38	44.10	46.10	54	-7.90	AV
<b>Middle Channel (5200 MHz)-Above 1G</b>									
V	4592.013	60.17	6.48	36.35	44.05	58.95	74	-15.05	PK
V	4592.013	43.86	6.48	36.35	44.05	42.64	54	-11.36	AV
V	10400.072	61.65	8.47	37.88	44.51	63.49	68.2	-4.71	PK
V	10400.072	43.74	8.47	37.88	44.51	45.58	54	-8.42	AV
V	15600.002	63.57	10.12	38.80	44.10	68.39	74	-5.61	PK
V	15600.002	43.05	10.12	38.80	42.70	49.27	54	-4.73	AV
H	4592.131	62.35	6.48	36.37	44.05	61.15	74	-12.85	PK
H	4592.131	43.20	6.48	36.37	44.05	42.00	54	-12.00	AV
H	10400.014	50.38	8.47	38.64	44.50	52.99	68.2	-15.21	PK
H	10400.014	42.72	8.47	38.64	44.50	45.33	54	-8.67	AV
H	15600.083	51.49	10.12	38.38	44.10	55.89	74	-18.11	PK
H	15600.083	43.31	10.12	38.38	44.10	47.71	54	-6.29	AV
<b>High Channel (5240 MHz)-Above 1G</b>									
V	4739.187	60.84	7.10	37.24	43.50	61.68	74	-12.32	PK
V	4739.187	43.41	7.10	37.24	43.50	44.25	54	-9.75	AV
V	10480.132	62.31	8.46	37.68	44.50	63.95	68.2	-4.25	PK
V	10480.132	43.31	8.46	37.68	44.50	44.95	54	-9.05	AV
V	15720.096	60.91	10.12	38.80	44.10	65.73	74	-8.27	PK
V	15720.096	43.45	10.12	38.80	42.70	49.67	54	-4.33	AV
H	4739.125	63.69	7.10	37.24	43.50	64.53	74	-9.47	PK
H	4739.125	43.55	7.10	37.24	43.50	44.39	54	-9.61	AV
H	10480.028	52.32	8.46	38.57	44.50	54.85	68.2	-13.35	PK
H	10480.028	40.16	8.46	38.57	44.50	42.69	54	-11.31	AV
H	15720.060	54.21	10.12	38.38	44.10	58.61	74	-15.39	PK
H	15720.060	44.50	10.12	38.38	44.10	48.90	54	-5.10	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT40
------------	--------------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (5190 MHz)-Above 1G</b>									
V	4434.173	64.05	5.94	35.40	44.00	61.39	68.2	-6.81	PK
V	4434.173	43.97	5.94	35.40	44.00	41.31	54	-12.69	AV
V	10380.077	61.11	8.46	39.75	44.50	64.82	68.2	-3.38	PK
V	10380.077	43.12	8.46	39.75	44.50	46.83	54	-7.17	AV
V	15570.178	60.32	10.12	38.80	44.10	65.14	74	-8.86	PK
V	15570.178	43.51	10.12	38.80	42.70	49.73	54	-4.27	AV
H	4434.046	62.69	5.94	35.18	44.00	59.81	74	-14.19	PK
H	4434.046	43.71	5.94	35.18	44.00	40.83	54	-13.17	AV
H	10380.048	51.78	8.46	38.71	44.50	54.45	68.2	-13.75	PK
H	10380.048	44.24	8.46	38.71	44.50	46.91	54	-7.09	AV
H	15570.108	51.59	10.12	38.38	44.10	55.99	74	-18.01	PK
H	15570.108	41.47	10.12	38.38	44.10	45.87	54	-8.13	AV
<b>High Channel (5230 MHz)-Above 1G</b>									
V	4739.053	61.07	6.48	36.35	44.05	59.85	68.2	-8.35	PK
V	4739.053	43.47	6.48	36.35	44.05	42.25	54	-11.75	AV
V	10460.092	60.91	8.47	37.88	44.51	62.75	68.2	-5.45	PK
V	10460.092	43.39	8.47	37.88	44.51	45.23	54	-8.77	AV
V	15690.178	62.36	10.12	38.80	44.10	67.18	74	-6.82	PK
V	15690.178	43.56	10.12	38.80	42.70	49.78	54	-4.22	AV
H	4739.013	61.28	6.48	36.37	44.05	60.08	68.2	-8.12	PK
H	4739.013	43.17	6.48	36.37	44.05	41.97	54	-12.03	AV
H	10460.075	50.58	8.47	38.64	44.50	53.19	68.2	-15.01	PK
H	10460.075	43.93	8.47	38.64	44.50	46.54	54	-7.46	AV
H	15690.082	51.47	10.12	38.38	44.10	55.87	74	-18.13	PK
H	15690.082	42.01	10.12	38.38	44.10	46.41	54	-7.59	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT80
------------	--------------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>(5210 MHz)-Above 1G</b>									
V	4434.097	60.95	5.94	35.40	44.00	58.29	68.2	-9.91	PK
V	4434.097	43.30	5.94	35.40	44.00	40.64	54	-13.36	AV
V	10420.045	61.07	8.46	39.75	44.50	64.78	68.2	-3.42	PK
V	10420.045	43.91	8.46	39.75	44.50	47.62	54	-6.38	AV
V	15630.005	61.34	10.12	38.80	44.10	66.16	74	-7.84	PK
V	15630.005	43.15	10.12	38.80	42.70	49.37	54	-4.63	AV
H	4434.020	60.46	5.94	35.18	44.00	57.58	68.2	-10.62	PK
H	4434.020	43.18	5.94	35.18	44.00	40.30	54	-13.70	AV
H	10420.092	53.88	8.46	38.71	44.50	56.55	68.2	-11.65	PK
H	10420.092	44.85	8.46	38.71	44.50	47.52	54	-6.48	AV
H	15630.129	53.61	10.12	38.38	44.10	58.01	74	-15.99	PK
H	15630.129	44.38	10.12	38.38	44.10	48.78	54	-5.22	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

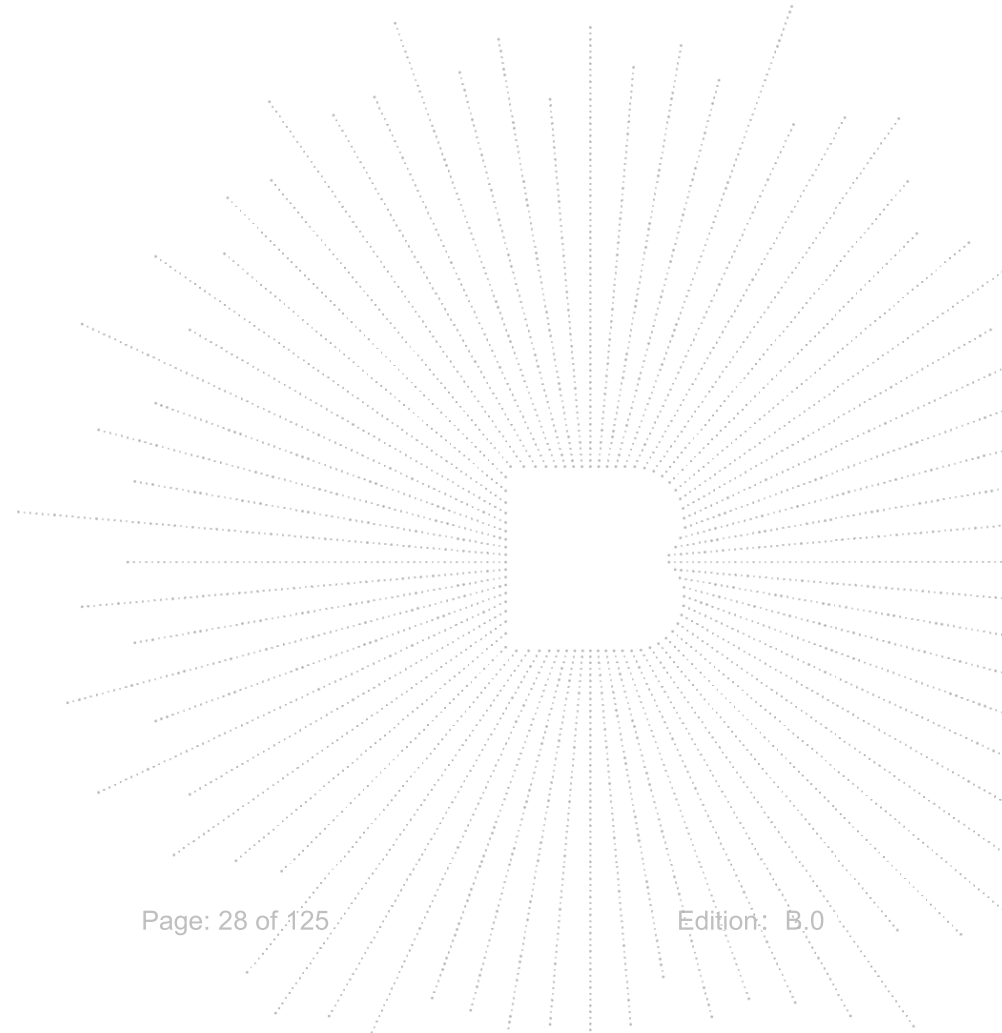

Test Mode:	TX(5.8G) - 802.11a
------------	--------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (5745 MHz)-Above 1G</b>									
V	4679.016	58.16	5.94	35.40	44.00	55.50	74	-18.50	PK
V	4679.016	43.58	5.94	35.40	44.00	40.92	54	-13.08	AV
V	11490.181	55.90	8.46	39.75	44.50	59.61	68.2	-8.59	PK
V	11490.181	43.45	8.46	39.75	44.50	47.16	54	-6.84	AV
V	17235.136	58.85	10.12	38.80	44.10	63.67	68.2	-4.53	PK
V	17235.136	43.74	10.12	38.80	42.70	49.96	54	-4.04	AV
H	4679.193	54.81	5.94	35.18	44.00	51.93	74	-22.07	PK
H	4679.193	43.71	5.94	35.18	44.00	40.83	54	-13.17	AV
H	11490.068	54.70	8.46	38.71	44.50	57.37	68.2	-10.83	PK
H	11490.068	42.52	8.46	38.71	44.50	45.19	54	-8.81	AV
H	17235.006	53.02	10.12	38.38	44.10	57.42	68.2	-10.78	PK
H	17235.006	44.32	10.12	38.38	44.10	48.72	54	-5.28	AV
<b>Middle Channel (5785 MHz)-Above 1G</b>									
V	4592.181	54.01	6.48	36.35	44.05	52.79	74	-21.21	PK
V	4592.181	43.13	6.48	36.35	44.05	41.91	54	-12.09	AV
V	11570.038	59.81	8.47	37.88	44.51	61.65	68.2	-6.55	PK
V	11570.038	43.80	8.47	37.88	44.51	45.64	54	-8.36	AV
V	17355.130	56.70	10.12	38.80	44.10	61.52	68.2	-6.68	PK
V	17355.130	39.86	10.12	38.80	42.70	46.08	54	-7.92	AV
H	4592.163	57.38	6.48	36.37	44.05	56.18	74	-17.82	PK
H	4592.163	43.50	6.48	36.37	44.05	42.30	54	-11.70	AV
H	11570.136	53.93	8.47	38.64	44.50	56.54	68.2	-11.66	PK
H	11570.136	44.40	8.47	38.64	44.50	47.01	54	-6.99	AV
H	17355.198	50.01	10.12	38.38	44.10	54.41	68.2	-13.79	PK
H	17355.198	40.04	10.12	38.38	44.10	44.44	54	-9.56	AV
<b>High Channel (5825 MHz)-Above 1G</b>									
V	6039.172	60.58	7.10	37.24	43.50	61.42	68.2	-6.78	PK
V	6039.172	43.47	7.10	37.24	43.50	44.31	54	-9.69	AV
V	11650.181	62.83	8.46	37.68	44.50	64.47	74	-9.53	PK
V	11650.181	43.84	8.46	37.68	44.50	45.48	54	-8.52	AV
V	17475.128	56.77	10.12	38.80	44.10	61.59	68.2	-6.61	PK
V	17475.128	43.57	10.12	38.80	42.70	49.79	54	-4.21	AV
H	6039.144	54.34	7.10	37.24	43.50	55.18	68.2	-13.02	PK
H	6039.144	43.15	7.10	37.24	43.50	43.99	54	-10.01	AV
H	11650.026	50.32	8.46	38.57	44.50	52.85	74	-21.15	PK
H	11650.026	40.31	8.46	38.57	44.50	42.84	54	-11.16	AV
H	17475.151	51.46	10.12	38.38	44.10	55.86	68.2	-12.34	PK
H	17475.151	40.37	10.12	38.38	44.10	44.77	54	-9.23	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode:	TX(5.8G) - 802.11n-HT20
------------	-------------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (5745 MHz)-Above 1G</b>									
V	4679.017	60.99	5.94	35.40	44.00	58.33	74	-15.67	PK
V	4679.017	43.45	5.94	35.40	44.00	40.79	54	-13.21	AV
V	11490.184	54.41	8.46	39.75	44.50	58.12	68.2	-10.08	PK
V	11490.184	43.07	8.46	39.75	44.50	46.78	54	-7.22	AV
V	17235.186	57.31	10.12	38.80	44.10	62.13	68.2	-6.07	PK
V	17235.186	43.78	10.12	38.80	42.70	50.00	54	-4.00	AV
H	4679.084	58.74	5.94	35.18	44.00	55.86	74	-18.14	PK
H	4679.084	43.71	5.94	35.18	44.00	40.83	54	-13.17	AV
H	11490.059	49.02	8.46	38.71	44.50	51.69	68.2	-16.51	PK
H	11490.059	44.88	8.46	38.71	44.50	47.55	54	-6.45	AV
H	17235.006	51.55	10.12	38.38	44.10	55.95	68.2	-12.25	PK
H	17235.006	41.59	10.12	38.38	44.10	45.99	54	-8.01	AV
<b>Middle Channel (5785 MHz)-Above 1G</b>									
V	4592.023	61.23	6.48	36.35	44.05	60.01	74	-13.99	PK
V	4592.023	43.74	6.48	36.35	44.05	42.52	54	-11.48	AV
V	11570.129	57.88	8.47	37.88	44.51	59.72	68.2	-8.48	PK
V	11570.129	43.03	8.47	37.88	44.51	44.87	54	-9.13	AV
V	17355.086	57.33	10.12	38.80	44.10	62.15	68.2	-6.05	PK
V	17355.086	43.75	10.12	38.80	42.70	49.97	54	-4.03	AV
H	4592.011	59.61	6.48	36.37	44.05	58.41	74	-15.59	PK
H	4592.011	43.23	6.48	36.37	44.05	42.03	54	-11.97	AV
H	11570.065	50.83	8.47	38.64	44.50	53.44	68.2	-14.76	PK
H	11570.065	41.24	8.47	38.64	44.50	43.85	54	-10.15	AV
H	17355.018	50.56	10.12	38.38	44.10	54.96	68.2	-13.24	PK
H	17355.018	42.47	10.12	38.38	44.10	46.87	54	-7.13	AV
<b>High Channel (5825 MHz)-Above 1G</b>									
V	6039.096	58.71	7.10	37.24	43.50	59.55	68.2	-8.65	PK
V	6039.096	43.50	7.10	37.24	43.50	44.34	54	-9.66	AV
V	11650.048	56.13	8.46	37.68	44.50	57.77	74	-16.23	PK
V	11650.048	43.88	8.46	37.68	44.50	45.52	54	-8.48	AV
V	17475.077	55.11	10.12	38.80	44.10	59.93	68.2	-8.27	PK
V	17475.077	43.29	10.12	38.80	42.70	49.51	54	-4.49	AV
H	6039.171	58.05	7.10	37.24	43.50	58.89	68.2	-9.31	PK
H	6039.171	43.38	7.10	37.24	43.50	44.22	54	-9.78	AV
H	11650.137	51.37	8.46	38.57	44.50	53.90	74	-20.10	PK
H	11650.137	41.19	8.46	38.57	44.50	43.72	54	-10.28	AV
H	17475.136	54.74	10.12	38.38	44.10	59.14	68.2	-9.06	PK
H	17475.136	43.98	10.12	38.38	44.10	48.38	54	-5.62	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.8G) - 802.11n-HT40
------------	-------------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (5755 MHz)-Above 1G</b>									
V	4679.115	57.76	5.94	35.40	44.00	55.10	74	-18.90	PK
V	4679.115	43.34	5.94	35.40	44.00	40.68	54	-13.32	AV
V	11510.127	56.51	8.46	39.75	44.50	60.22	74	-13.78	PK
V	11510.127	43.61	8.46	39.75	44.50	47.32	54	-6.68	AV
V	17265.128	59.30	10.12	38.80	44.10	64.12	68.2	-4.08	PK
V	17265.128	43.11	10.12	38.80	42.70	49.33	54	-4.67	AV
H	4679.162	60.95	5.94	35.18	44.00	58.07	74	-15.93	PK
H	4679.162	43.83	5.94	35.18	44.00	40.95	54	-13.05	AV
H	11510.061	51.36	8.46	38.71	44.50	54.03	74	-19.97	PK
H	11510.061	41.81	8.46	38.71	44.50	44.48	54	-9.52	AV
H	17265.015	54.98	10.12	38.38	44.10	59.38	68.2	-8.82	PK
H	17265.015	43.37	10.12	38.38	44.10	47.77	54	-6.23	AV
<b>High Channel (5795 MHz)-Above 1G</b>									
V	6039.031	60.31	6.48	36.35	44.05	59.09	68.2	-9.11	PK
V	6039.031	43.86	6.48	36.35	44.05	42.64	54	-11.36	AV
V	11590.195	55.37	8.47	37.88	44.51	57.21	74	-16.79	PK
V	11590.195	43.34	8.47	37.88	44.51	45.18	54	-8.82	AV
V	17385.192	55.04	10.12	38.80	44.10	59.86	68.2	-8.34	PK
V	17385.192	41.22	10.12	38.80	42.70	47.44	54	-6.56	AV
H	6039.012	56.15	6.48	36.37	44.05	54.95	68.2	-13.25	PK
H	6039.012	43.57	6.48	36.37	44.05	42.37	54	-11.63	AV
H	11590.166	51.89	8.47	38.64	44.50	54.50	74	-19.50	PK
H	11590.166	44.23	8.47	38.64	44.50	46.84	54	-7.16	AV
H	17385.037	52.08	10.12	38.38	44.10	56.48	68.2	-11.72	PK
H	17385.037	41.42	10.12	38.38	44.10	45.82	54	-8.18	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.8G) - 802.11ac-HT20
------------	--------------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (5745 MHz)-Above 1G</b>									
V	4679.047	57.99	5.94	35.40	44.00	55.33	74	-18.67	PK
V	4679.047	43.13	5.94	35.40	44.00	40.47	54	-13.53	AV
V	11490.081	54.29	8.46	39.75	44.50	58.00	68.2	-10.20	PK
V	11490.081	43.25	8.46	39.75	44.50	46.96	54	-7.04	AV
V	17235.007	57.82	10.12	38.80	44.10	62.64	68.2	-5.56	PK
V	17235.007	43.08	10.12	38.80	42.70	49.30	54	-4.70	AV
H	4679.130	60.18	5.94	35.18	44.00	57.30	74	-16.70	PK
H	4679.130	43.46	5.94	35.18	44.00	40.58	54	-13.42	AV
H	11490.182	49.20	8.46	38.71	44.50	51.87	68.2	-16.33	PK
H	11490.182	43.87	8.46	38.71	44.50	46.54	54	-7.46	AV
H	17235.085	54.99	10.12	38.38	44.10	59.39	68.2	-8.81	PK
H	17235.085	44.19	10.12	38.38	44.10	48.59	54	-5.41	AV
<b>Middle Channel (5785 MHz)-Above 1G</b>									
V	4592.024	59.87	6.48	36.35	44.05	58.65	74	-15.35	PK
V	4592.024	43.24	6.48	36.35	44.05	42.02	54	-11.98	AV
V	11570.169	54.54	8.47	37.88	44.51	56.38	68.2	-11.82	PK
V	11570.169	43.89	8.47	37.88	44.51	45.73	54	-8.27	AV
V	17355.083	58.58	10.12	38.80	44.10	63.40	68.2	-4.80	PK
V	17355.083	43.04	10.12	38.80	42.70	49.26	54	-4.74	AV
H	4592.198	58.52	6.48	36.37	44.05	57.32	74	-16.68	PK
H	4592.198	43.54	6.48	36.37	44.05	42.34	54	-11.66	AV
H	11570.067	53.71	8.47	38.64	44.50	56.32	68.2	-11.88	PK
H	11570.067	42.05	8.47	38.64	44.50	44.66	54	-9.34	AV
H	17355.085	52.46	10.12	38.38	44.10	56.86	68.2	-11.34	PK
H	17355.085	43.13	10.12	38.38	44.10	47.53	54	-6.47	AV
<b>High Channel (5825 MHz)-Above 1G</b>									
V	6039.157	56.47	7.10	37.24	43.50	57.31	68.2	-10.89	PK
V	6039.157	43.72	7.10	37.24	43.50	44.56	54	-9.44	AV
V	11650.025	60.57	8.46	37.68	44.50	62.21	74	-11.79	PK
V	11650.025	43.07	8.46	37.68	44.50	44.71	54	-9.29	AV
V	17475.009	59.34	10.12	38.80	44.10	64.16	68.2	-4.04	PK
V	17475.009	43.42	10.12	38.80	42.70	49.64	54	-4.36	AV
H	6039.073	55.08	7.10	37.24	43.50	55.92	68.2	-12.28	PK
H	6039.073	43.64	7.10	37.24	43.50	44.48	54	-9.52	AV
H	11650.094	52.82	8.46	38.57	44.50	55.35	74	-18.65	PK
H	11650.094	44.84	8.46	38.57	44.50	47.37	54	-6.63	AV
H	17475.093	52.05	10.12	38.38	44.10	56.45	68.2	-11.75	PK
H	17475.093	42.40	10.12	38.38	44.10	46.80	54	-7.20	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Mode:	TX(5.8G) - 802.11ac-HT40
------------	--------------------------

Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>Low Channel (5755 MHz)-Above 1G</b>									
V	4679.199	58.89	5.94	35.40	44.00	56.23	74	-17.77	PK
V	4679.199	43.44	5.94	35.40	44.00	40.78	54	-13.22	AV
V	11510.083	56.33	8.46	39.75	44.50	60.04	74	-13.96	PK
V	11510.083	43.38	8.46	39.75	44.50	47.09	54	-6.91	AV
V	17265.035	56.75	10.12	38.80	44.10	61.57	68.2	-6.63	PK
V	17265.035	43.38	10.12	38.80	42.70	49.60	54	-4.40	AV
H	4679.118	58.18	5.94	35.18	44.00	55.30	74	-18.70	PK
H	4679.118	43.01	5.94	35.18	44.00	40.13	54	-13.87	AV
H	11510.164	52.78	8.46	38.71	44.50	55.45	74	-18.55	PK
H	11510.164	44.04	8.46	38.71	44.50	46.71	54	-7.29	AV
H	17265.174	51.09	10.12	38.38	44.10	55.49	68.2	-12.71	PK
H	17265.174	41.38	10.12	38.38	44.10	45.78	54	-8.22	AV
<b>High Channel (5795 MHz)-Above 1G</b>									
V	6039.133	58.77	6.48	36.35	44.05	57.55	68.2	-10.65	PK
V	6039.133	43.66	6.48	36.35	44.05	42.44	54	-11.56	AV
V	11590.105	58.67	8.47	37.88	44.51	60.51	74	-13.49	PK
V	11590.105	43.93	8.47	37.88	44.51	45.77	54	-8.23	AV
V	17385.069	55.06	10.12	38.80	44.10	59.88	68.2	-8.32	PK
V	17385.069	41.03	10.12	38.80	42.70	47.25	54	-6.75	AV
H	6039.102	58.86	6.48	36.37	44.05	57.66	68.2	-10.54	PK
H	6039.102	43.40	6.48	36.37	44.05	42.20	54	-11.80	AV
H	11590.089	53.36	8.47	38.64	44.50	55.97	74	-18.03	PK
H	11590.089	42.30	8.47	38.64	44.50	44.91	54	-9.09	AV
H	17385.141	54.85	10.12	38.38	44.10	59.25	68.2	-8.95	PK
H	17385.141	43.88	10.12	38.38	44.10	48.28	54	-5.72	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.8G) - 802.11ac-HT80
------------	--------------------------


Polar (H/V)	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
<b>(5775 MHz)-Above 1G</b>									
V	4679.061	56.36	5.94	35.40	44.00	53.70	74	-20.30	PK
V	4679.061	43.52	5.94	35.40	44.00	40.86	54	-13.14	AV
V	11550.158	57.80	8.46	39.75	44.50	61.51	74	-12.49	PK
V	11550.158	43.07	8.46	39.75	44.50	46.78	54	-7.22	AV
V	17325.182	59.04	10.12	38.80	44.10	63.86	68.2	-4.34	PK
V	17325.182	41.55	10.12	38.80	42.70	47.77	54	-6.23	AV
H	4679.038	57.75	5.94	35.18	44.00	54.87	74	-19.13	PK
H	4679.038	43.28	5.94	35.18	44.00	40.40	54	-13.60	AV
H	11550.075	50.48	8.46	38.71	44.50	53.15	74	-20.85	PK
H	11550.075	44.58	8.46	38.71	44.50	47.25	54	-6.75	AV
H	17325.116	52.05	10.12	38.38	44.10	56.45	68.2	-11.75	PK
H	17325.116	42.75	10.12	38.38	44.10	47.15	54	-6.85	AV

Note: PK value is lower than the Average value limit, So average didn't record.  
 The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
 Emission level (dBuV/m) = 20 log Emission level (uV/m).  
 Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

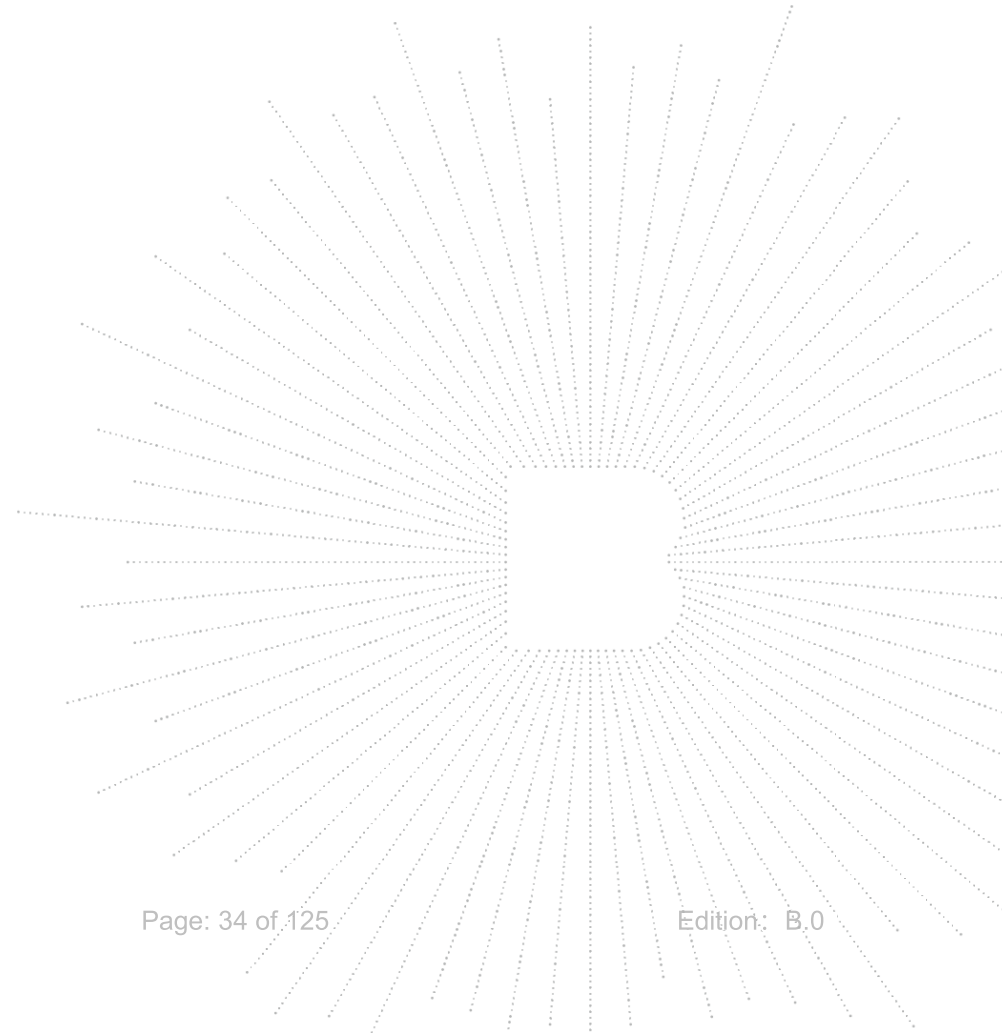

## 8. Power Spectral Density Test

### 8.1 Block Diagram Of Test Setup

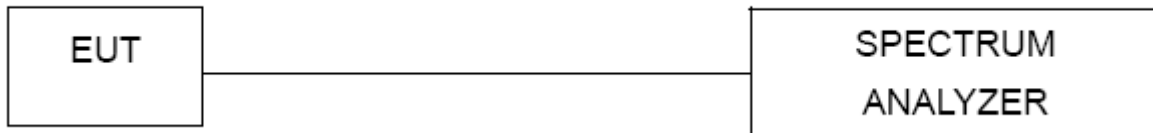

### 8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor Wifi Repeater operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor Wifi Repeater operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point Wifi Repeaters operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 8.3 Test procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

### 8.4 EUT operating Conditions


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



## 8.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	(5180-5240MHz); (5745-5825MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	-5.65	11	Pass
NVNT	a	5200	-5.73	11	Pass
NVNT	a	5240	-5.17	11	Pass
NVNT	n20	5180	-6.52	11	Pass
NVNT	n20	5200	-6.49	11	Pass
NVNT	n20	5240	-6.86	11	Pass
NVNT	n40	5190	-10.41	11	Pass
NVNT	n40	5230	-10.30	11	Pass
NVNT	ac20	5180	-6.61	11	Pass
NVNT	ac20	5200	-5.88	11	Pass
NVNT	ac20	5240	-6.50	11	Pass
NVNT	ac40	5190	-9.43	11	Pass
NVNT	ac40	5230	-10.37	11	Pass
NVNT	ac80	5210	-15.51	11	Pass

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	-9.80	30	Pass
NVNT	a	5785	-11.34	30	Pass
NVNT	a	5825	-12.68	30	Pass
NVNT	n20	5745	-10.75	30	Pass
NVNT	n20	5785	-12.14	30	Pass
NVNT	n20	5825	-13.86	30	Pass
NVNT	n40	5755	-15.69	30	Pass
NVNT	n40	5795	-17.13	30	Pass
NVNT	ac20	5745	-10.92	30	Pass
NVNT	ac20	5785	-12.43	30	Pass
NVNT	ac20	5825	-14.25	30	Pass
NVNT	ac40	5755	-16.10	30	Pass
NVNT	ac40	5795	-15.56	30	Pass
NVNT	ac80	5775	-22.38	30	Pass


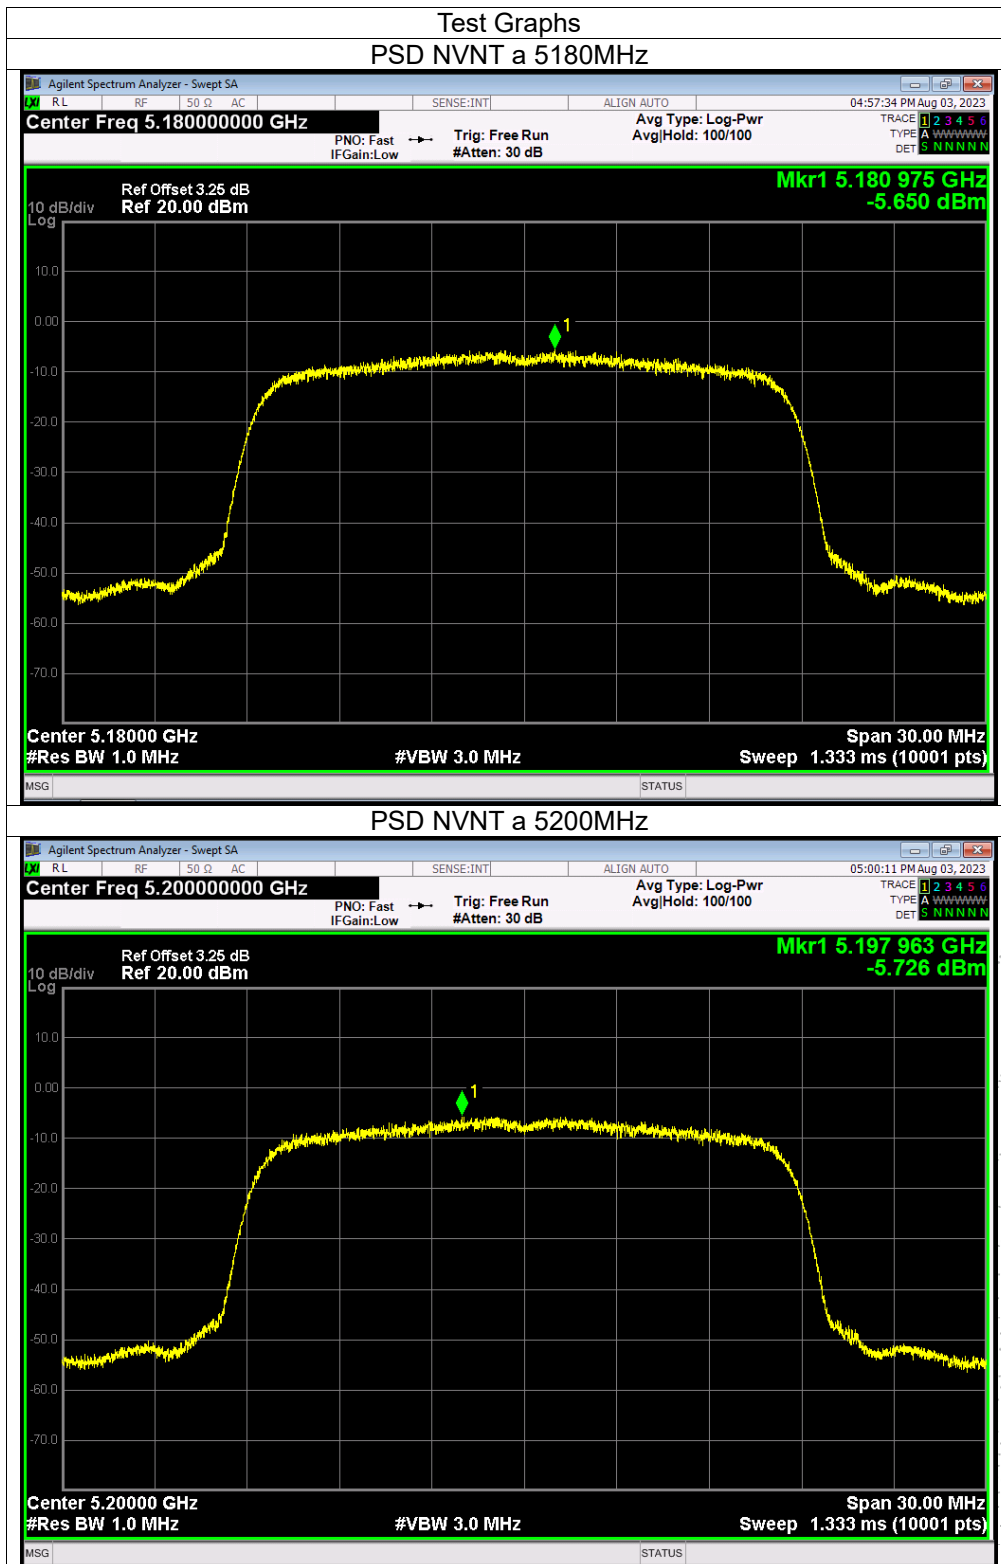


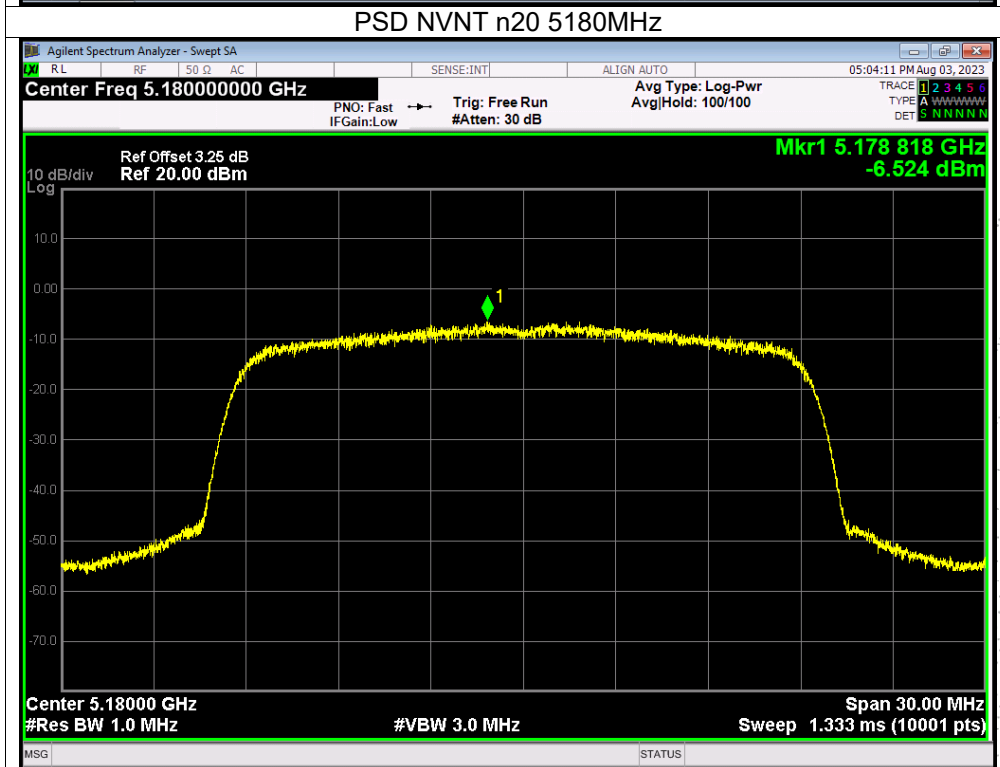
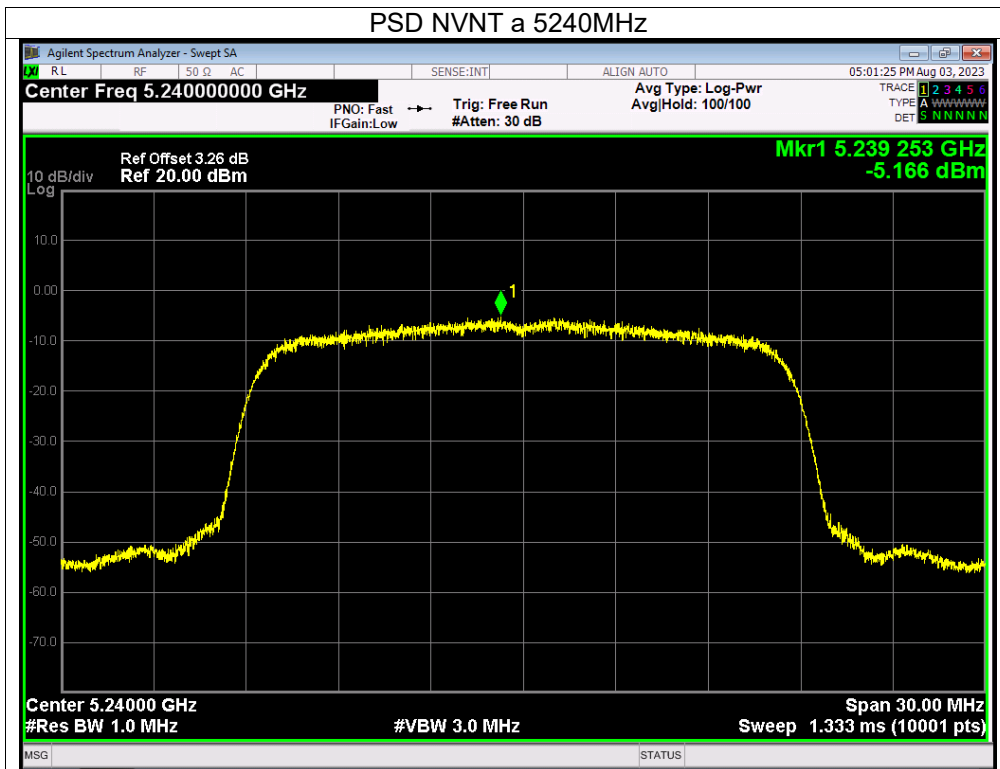






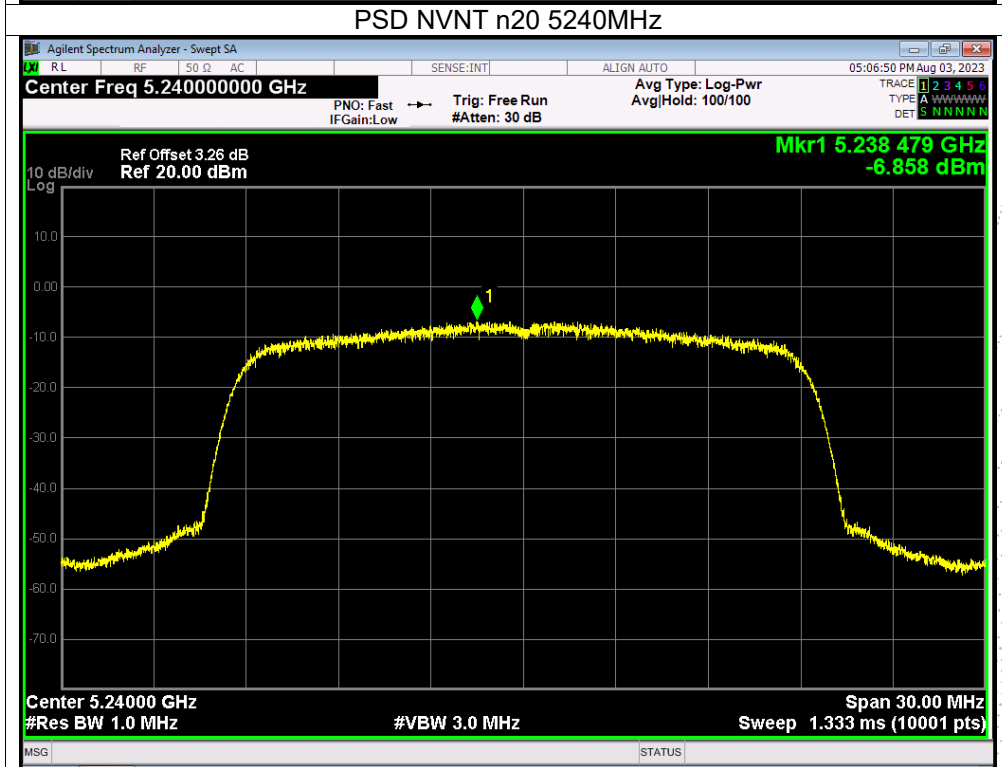
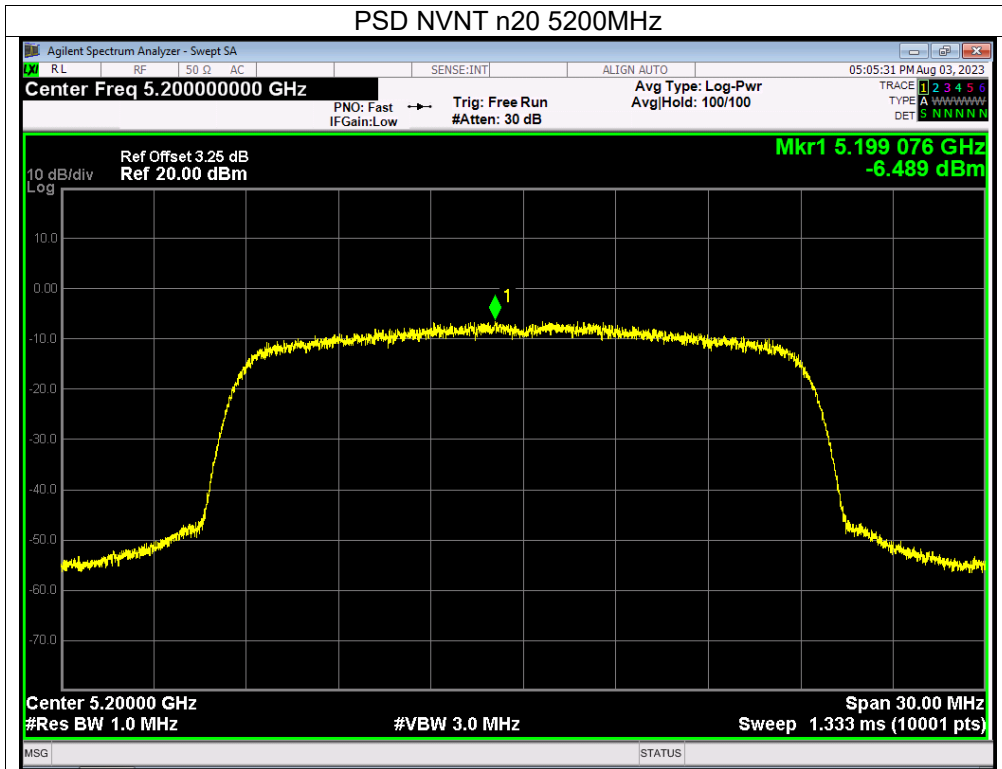





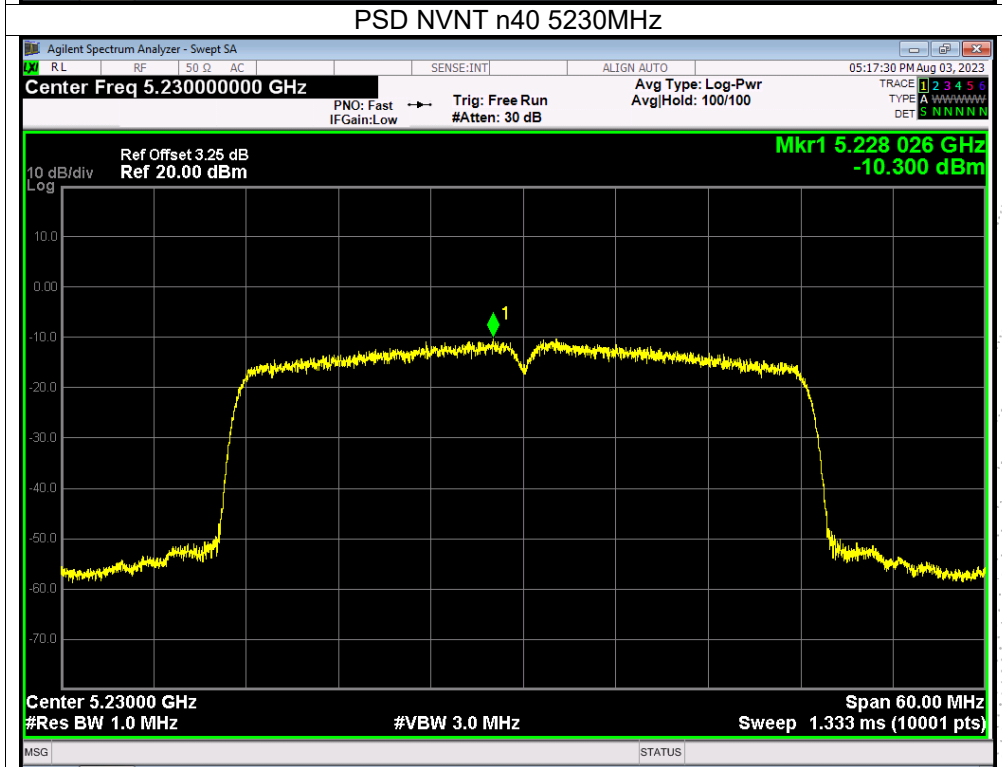
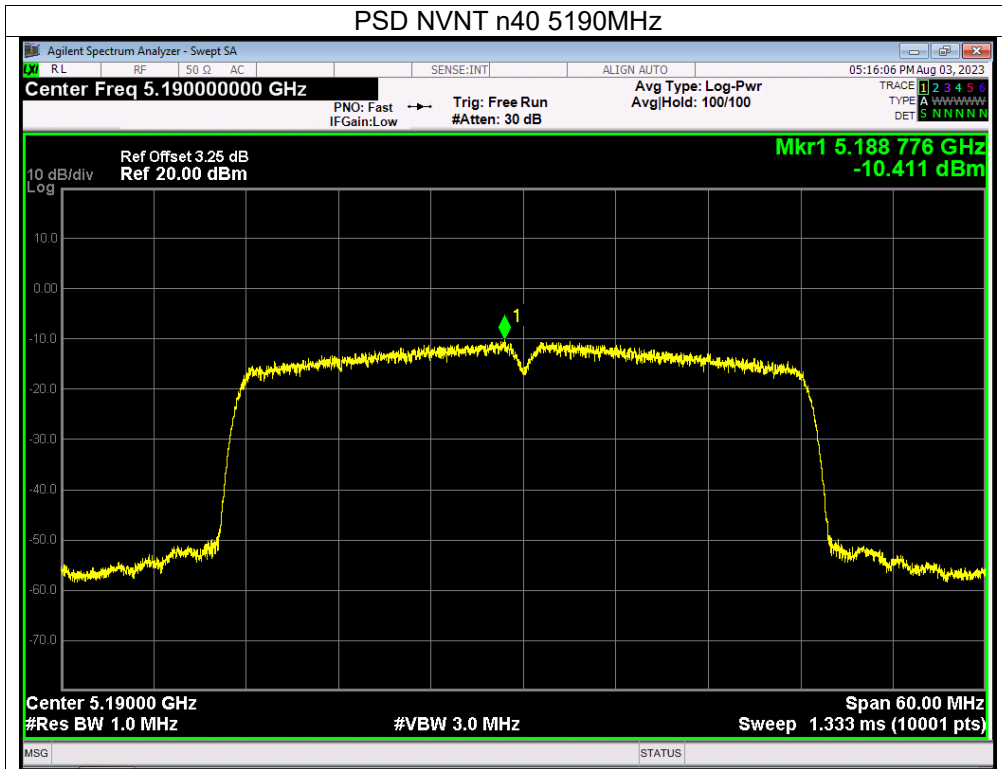


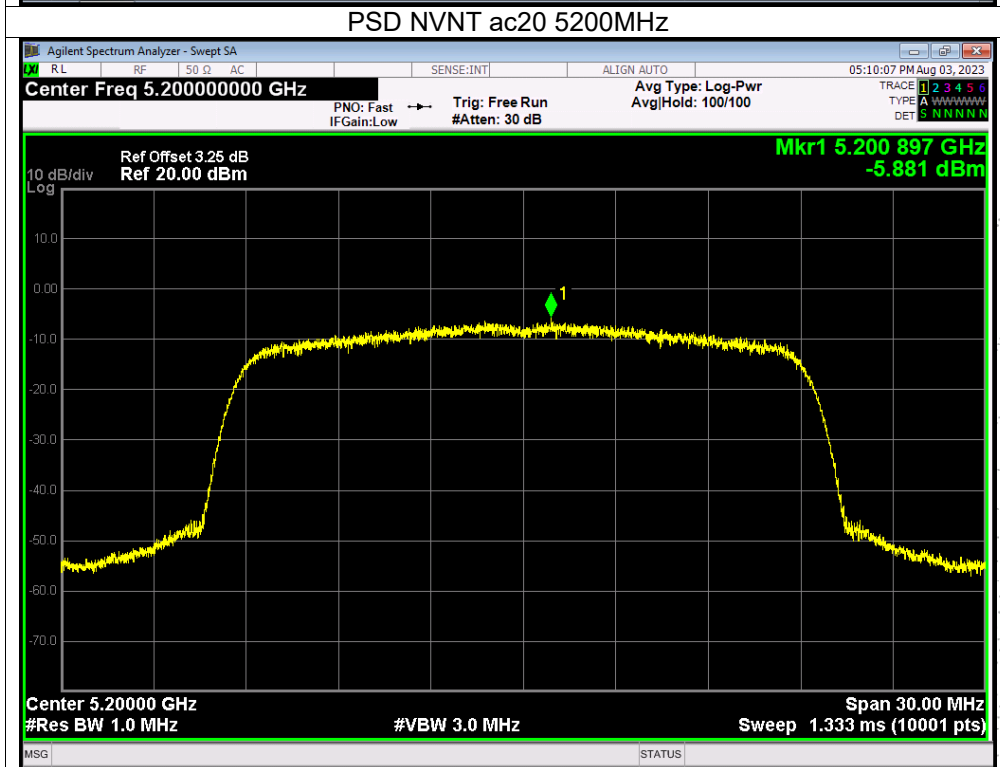
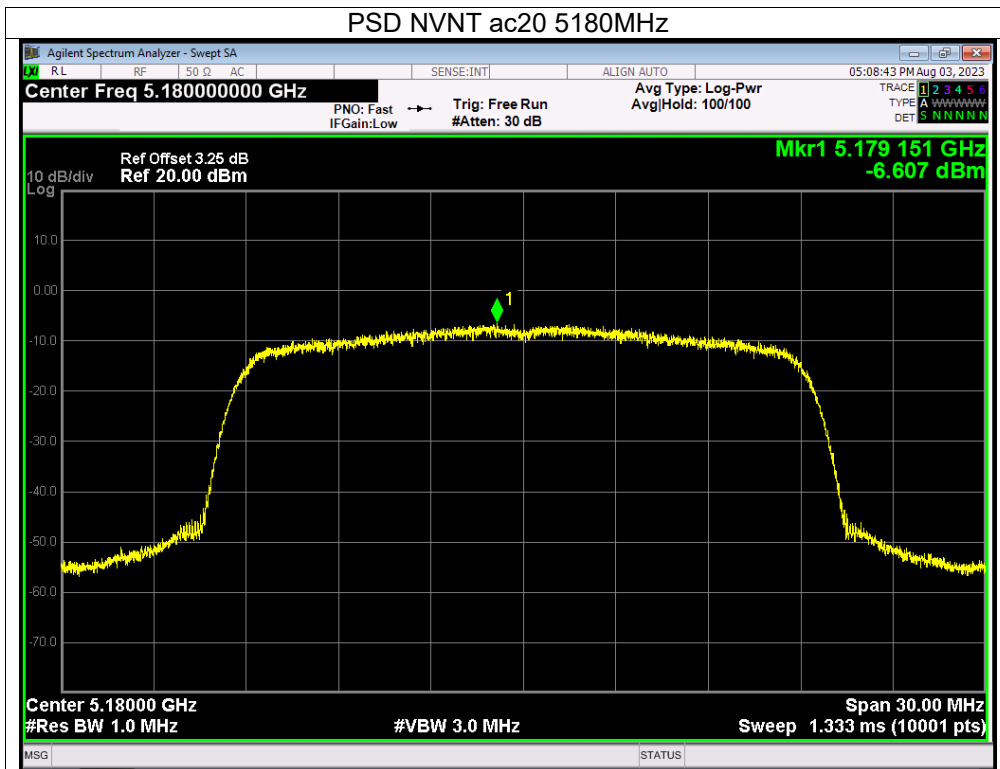


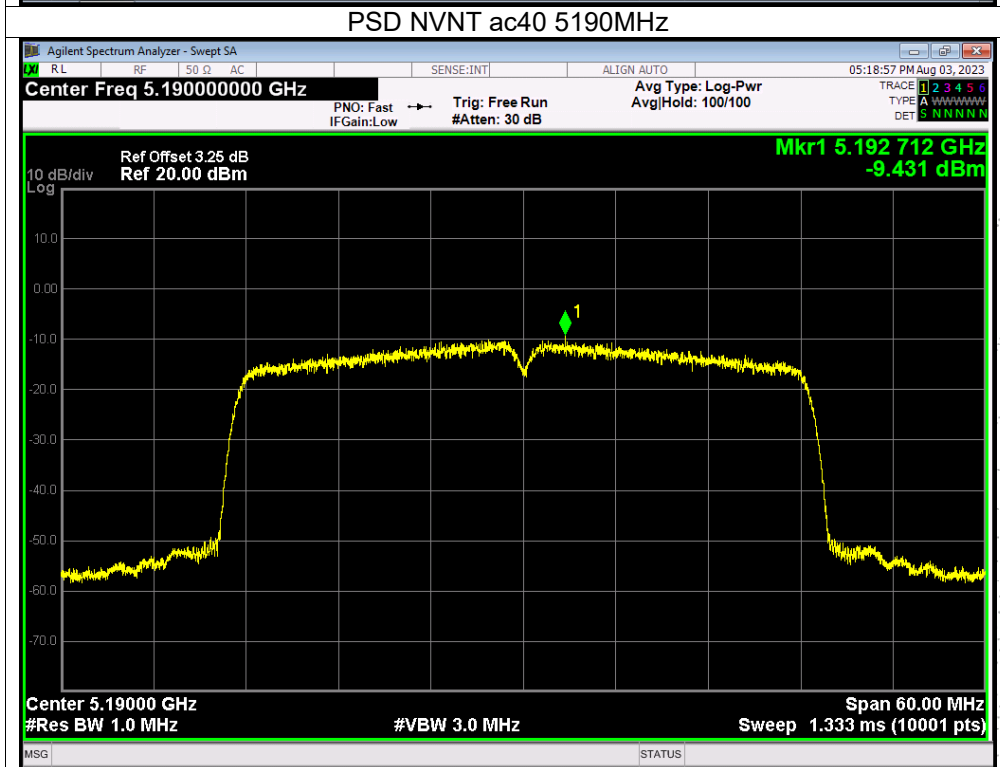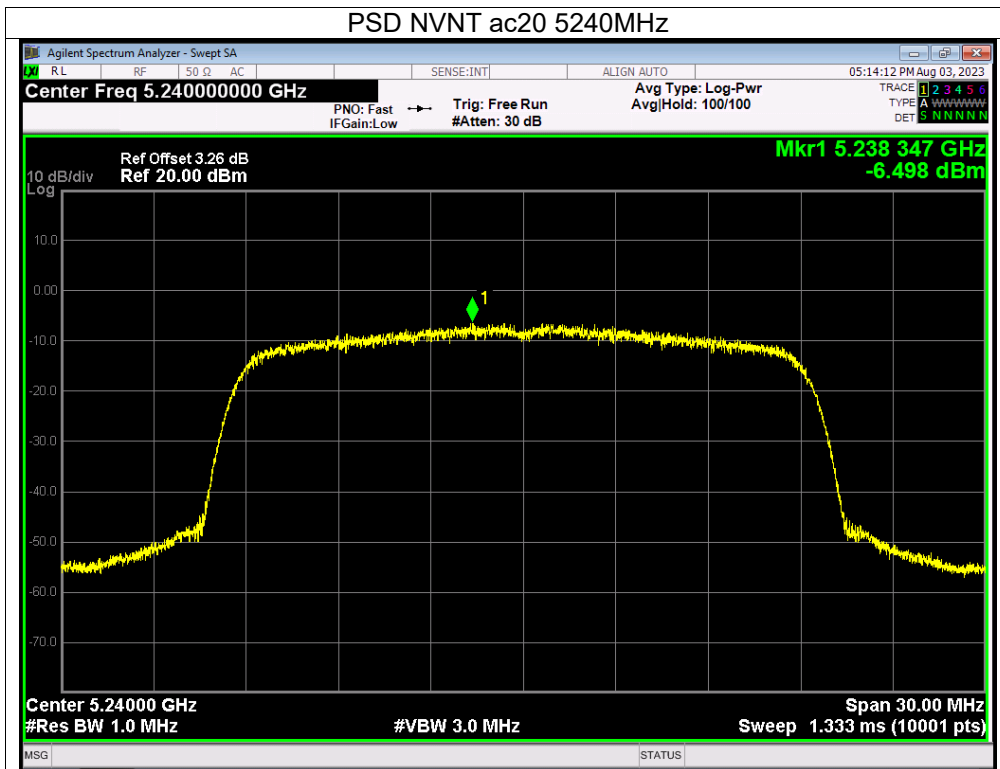

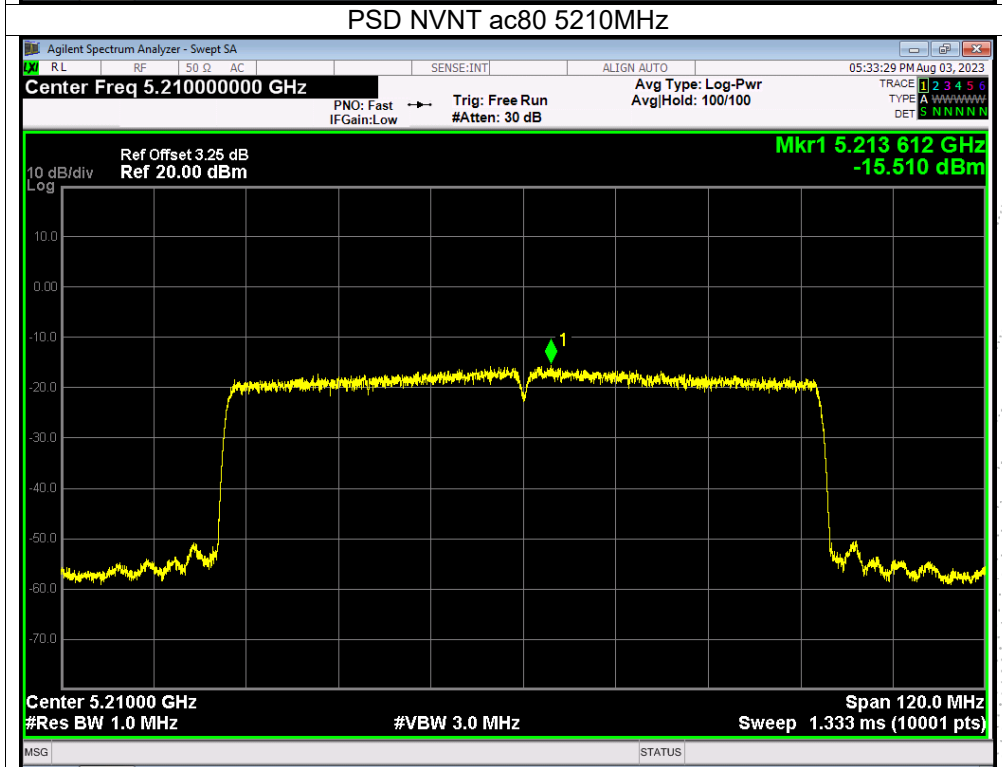
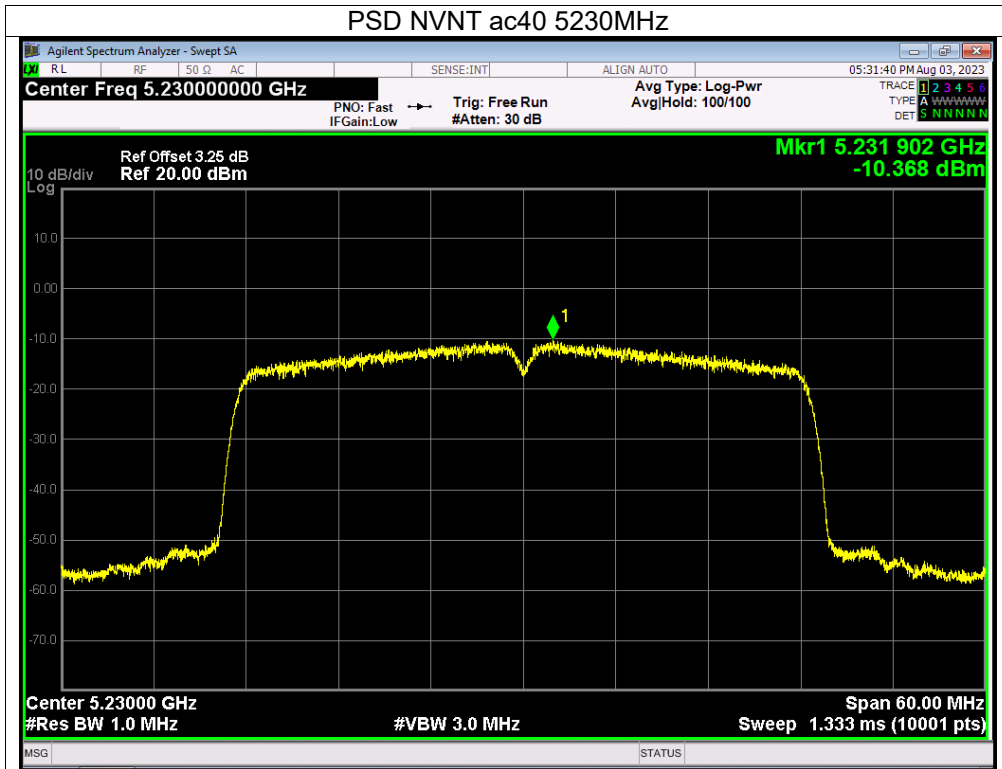



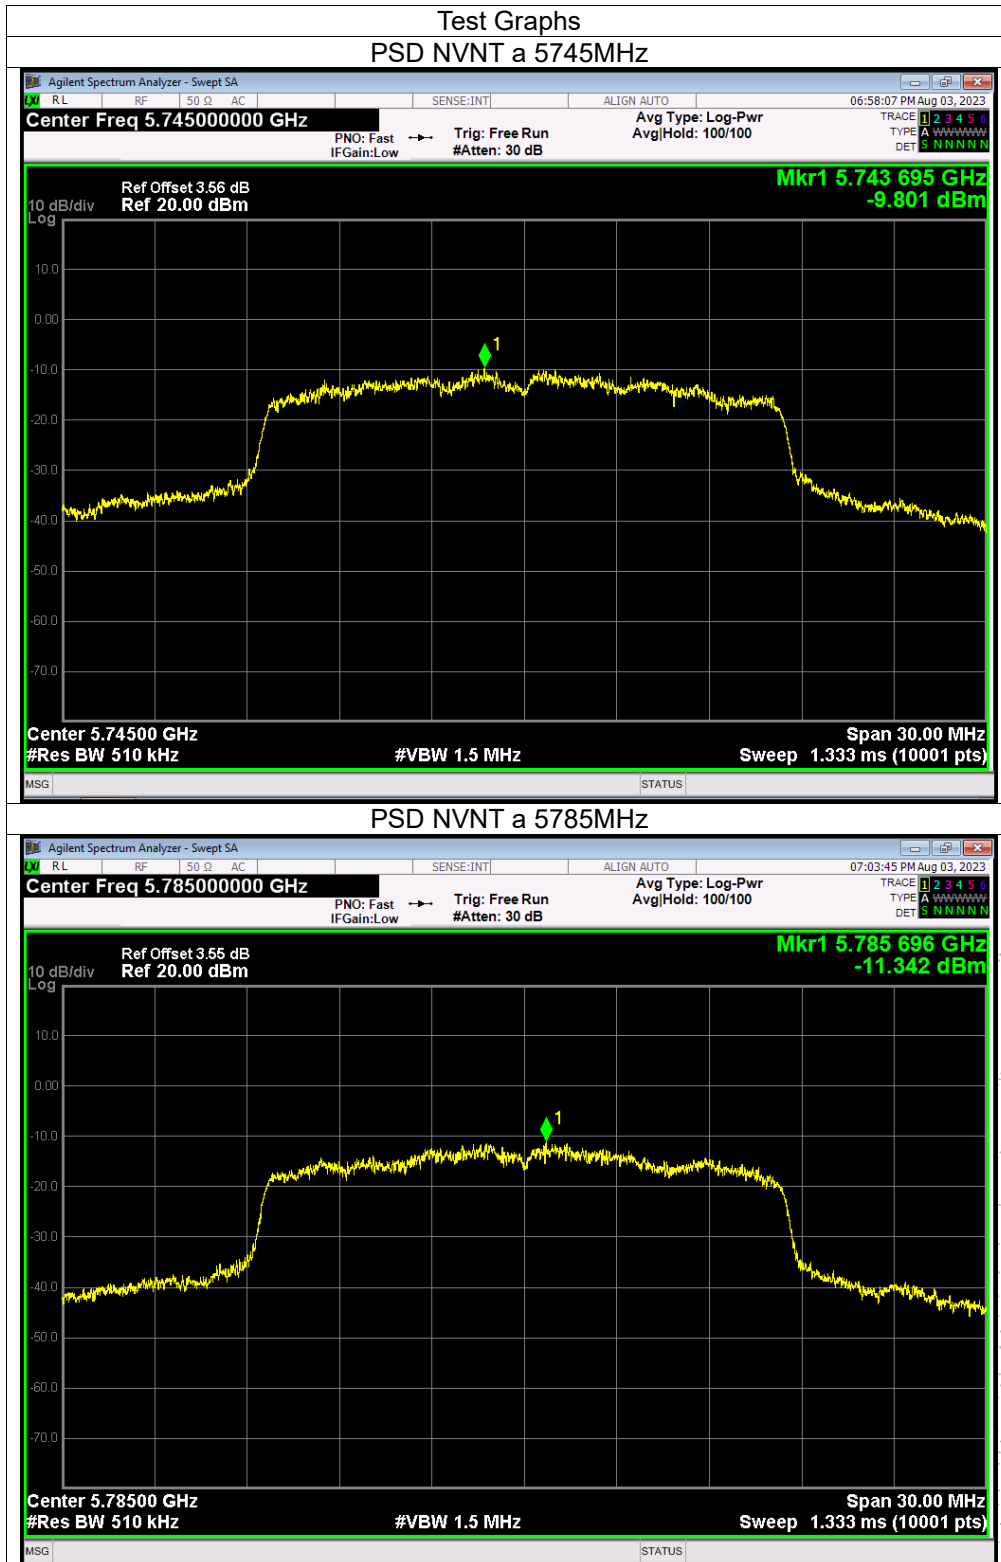


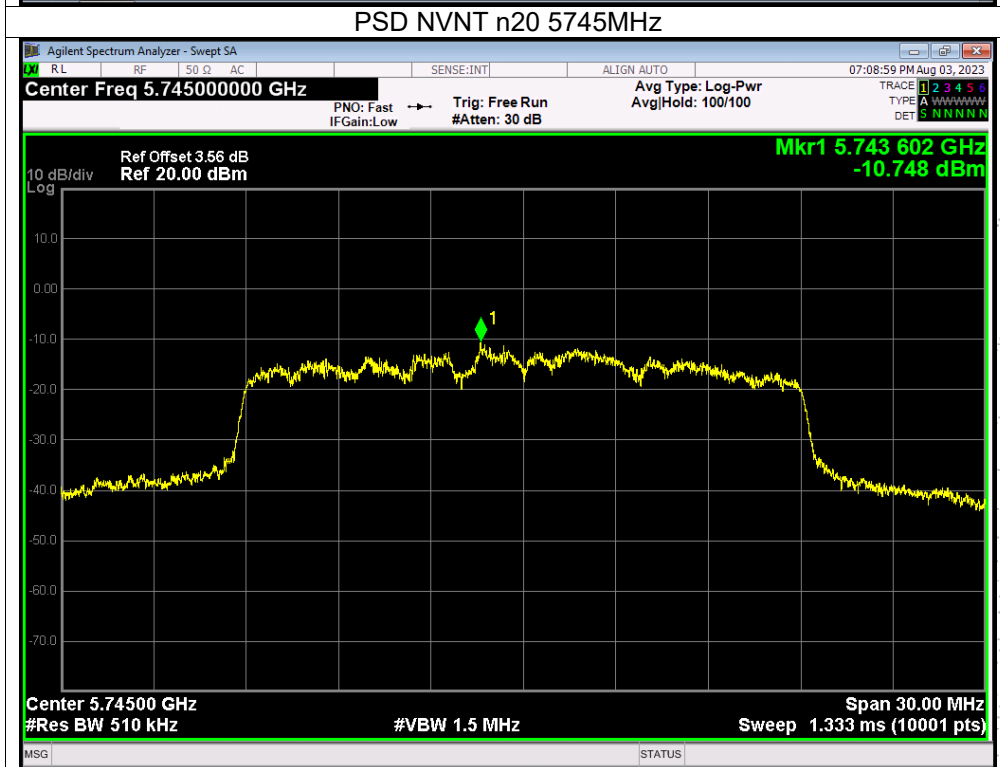
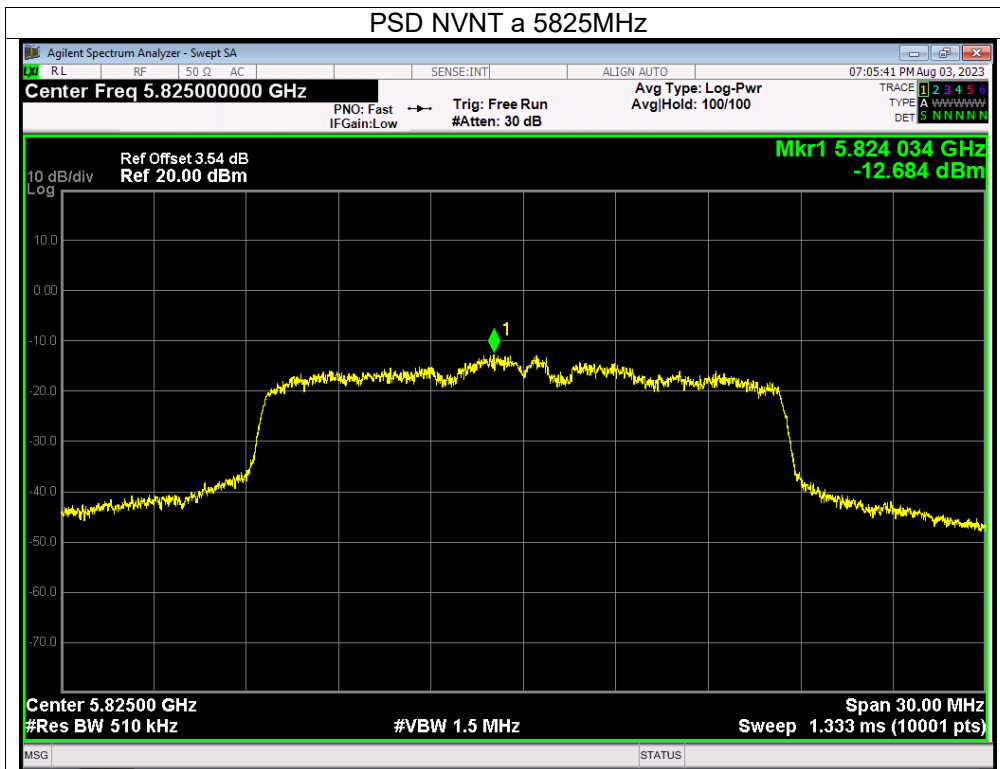


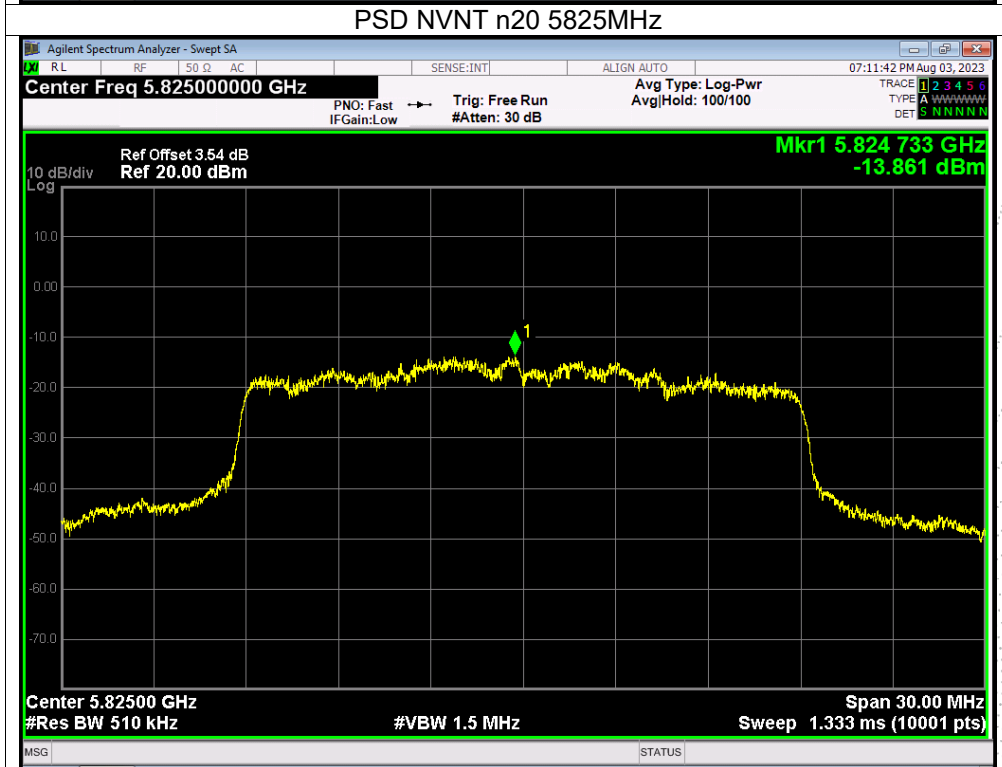
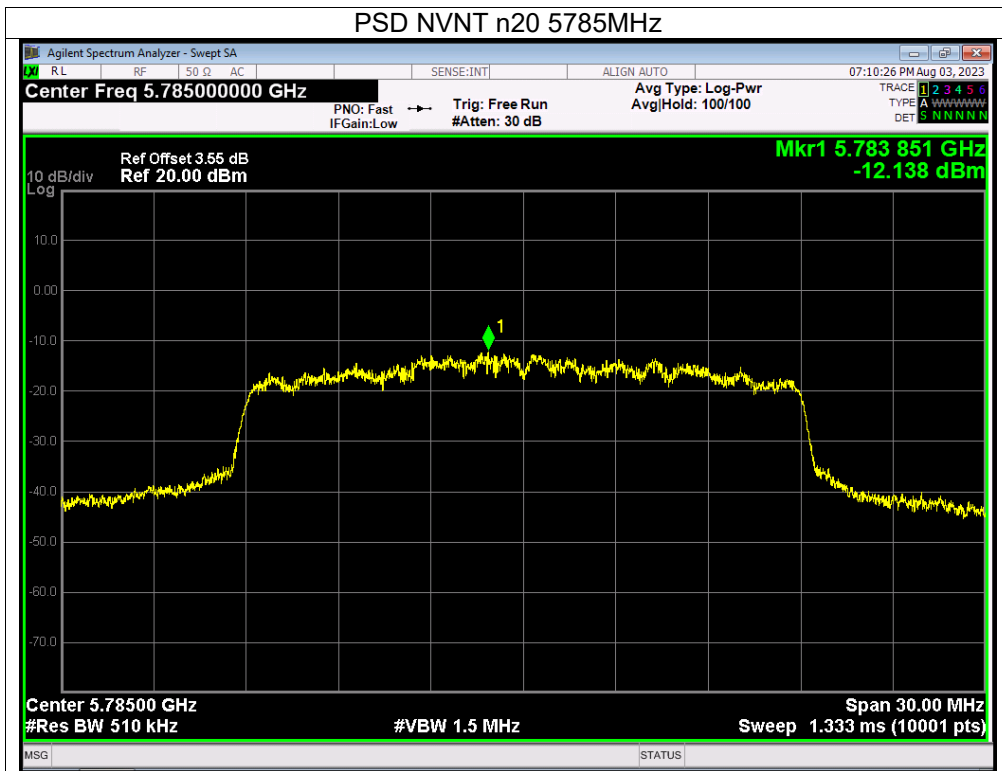




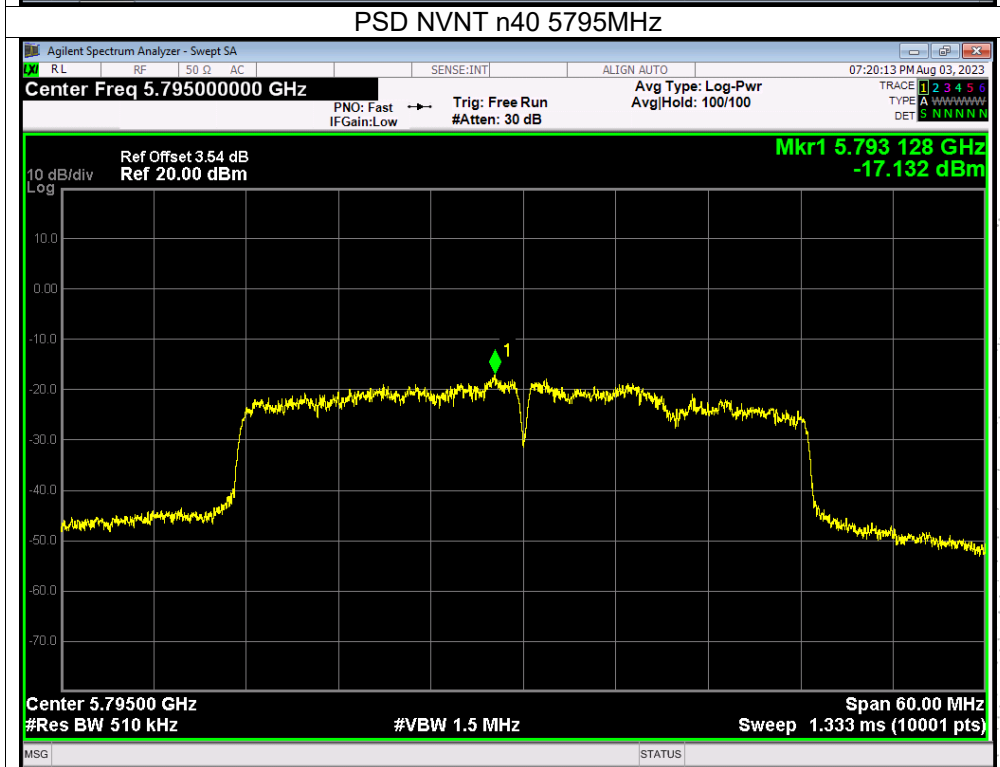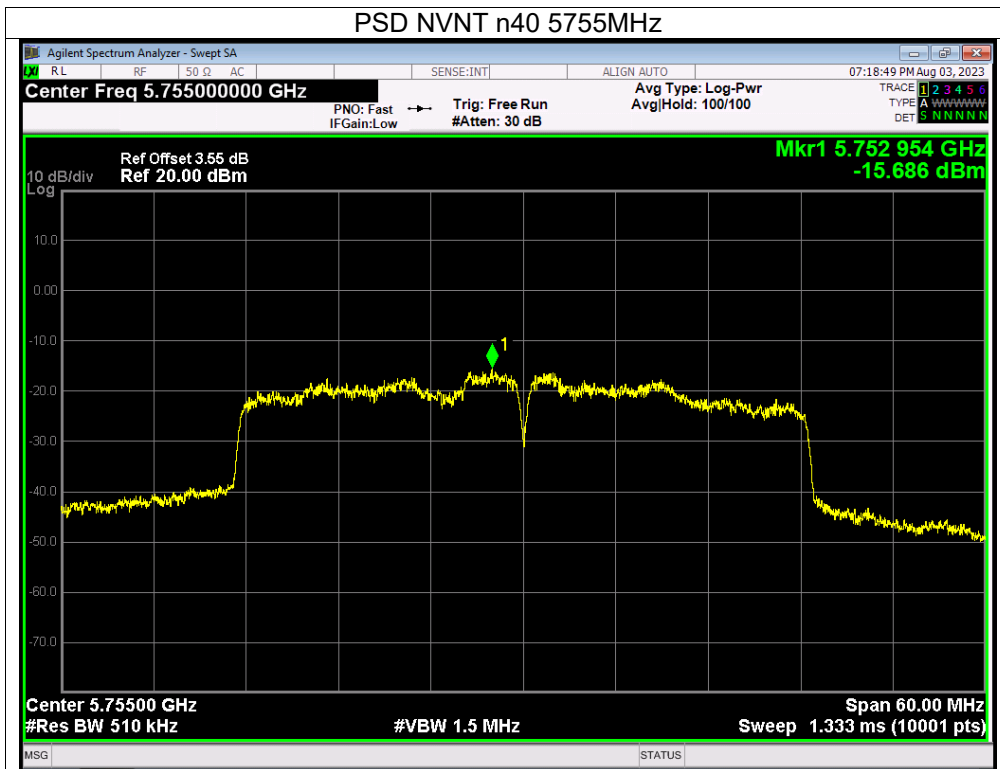

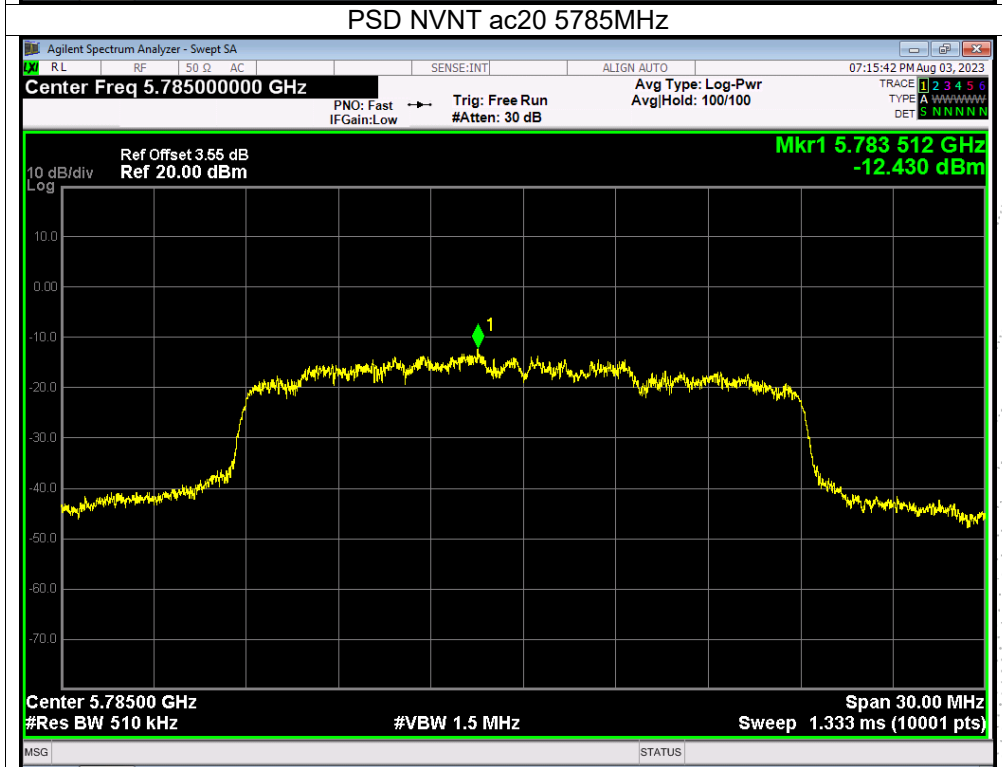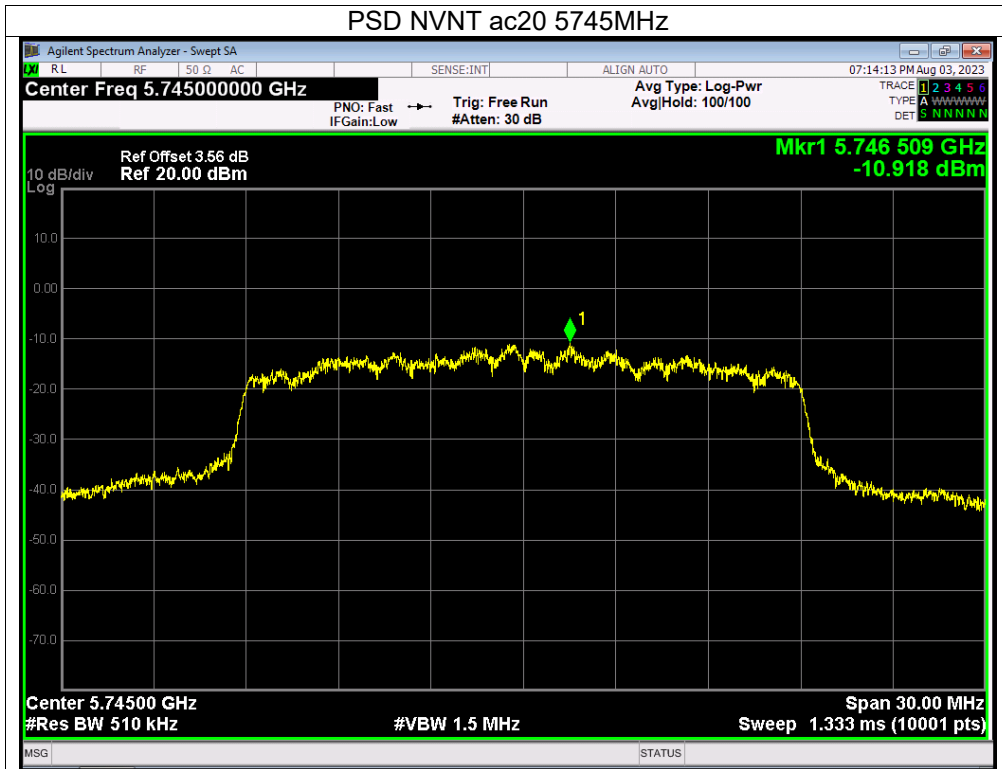


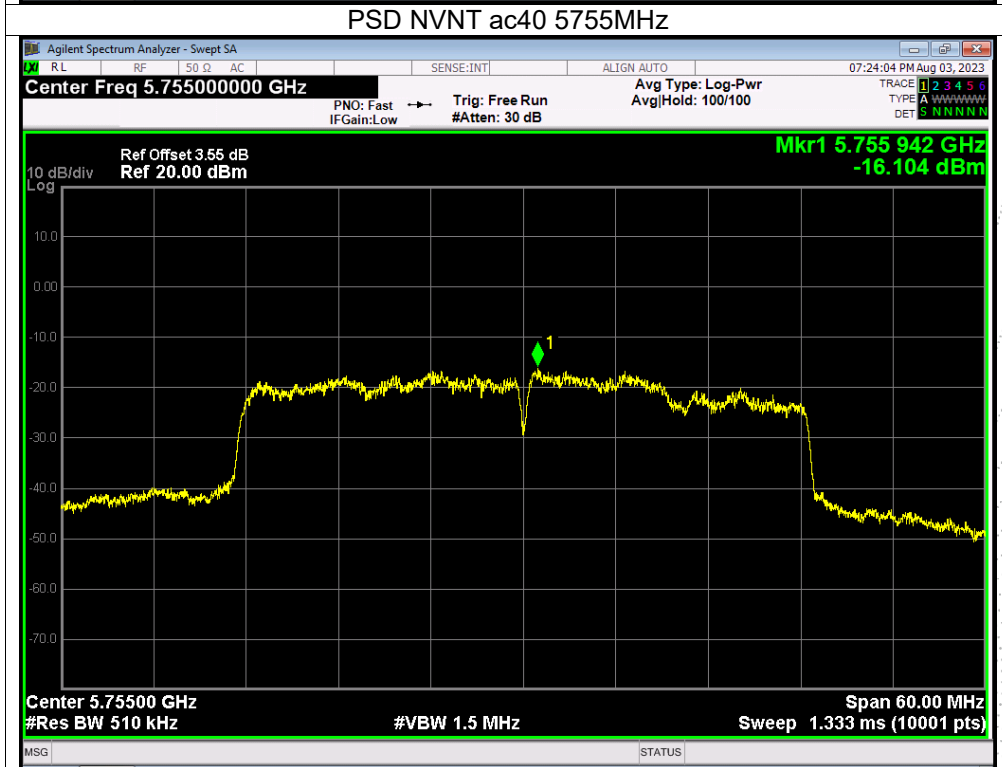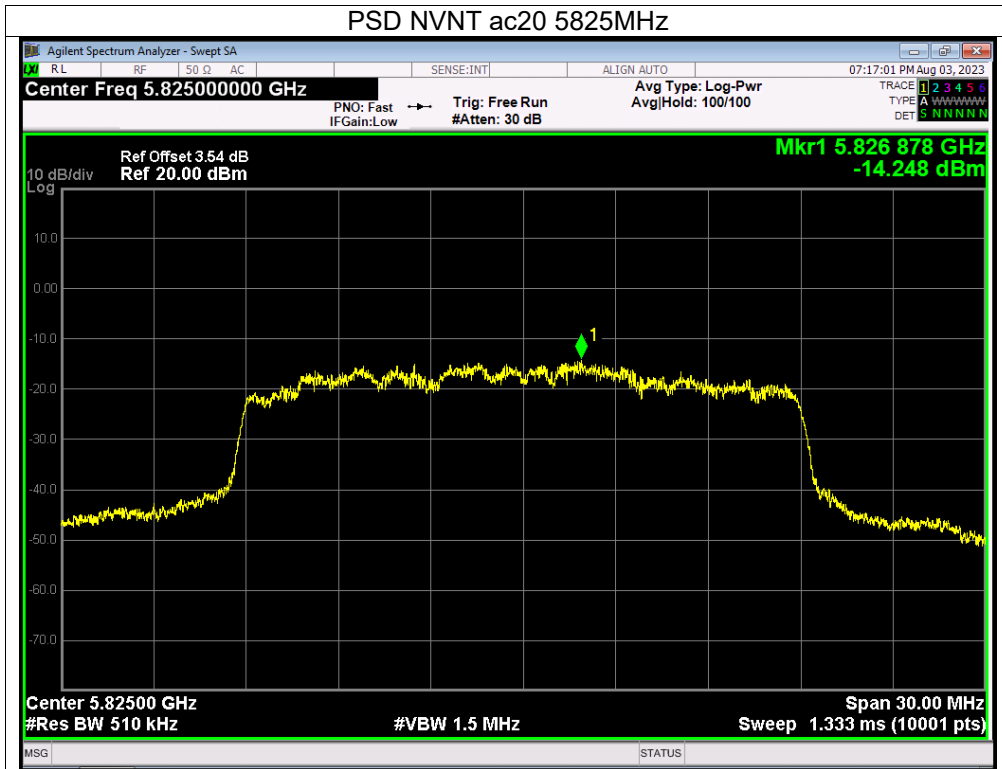

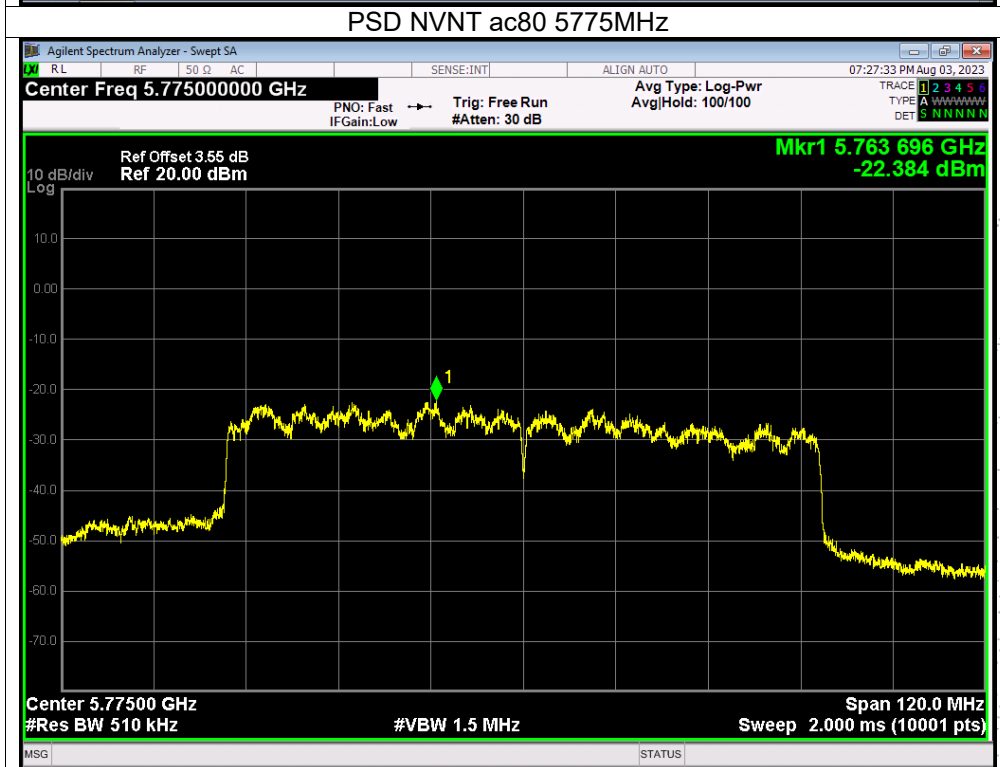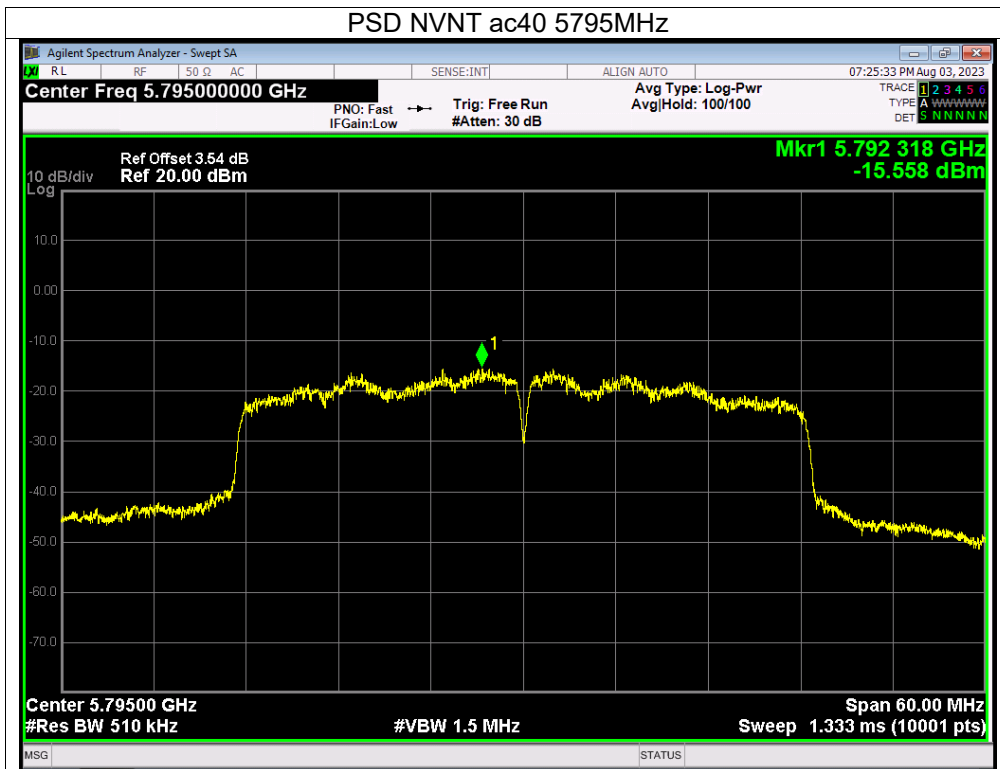

## 9. 26dB & 6dB & 99% Emission Bandwidth

### 9.1 Block Diagram Of Test Setup

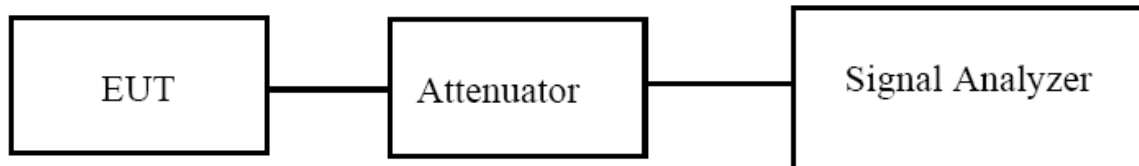

### 9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

### 9.3 Test procedure

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.

2. Set span = 1.5 times to 5.0 times the OBW.

3. Set RBW = 1 % to 5 % of the OBW

4. Set VBW  $\geq 3 \cdot$  RBW

5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

6. Use the 99 % power bandwidth function of the instrument (if available).

7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

## 9.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 9.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	(5180-5240MHz)		

Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	20.000	Pass
NVNT	a	5200	19.880	Pass
NVNT	a	5240	19.998	Pass
NVNT	n20	5180	20.190	Pass
NVNT	n20	5200	20.357	Pass
NVNT	n20	5240	20.219	Pass
NVNT	n40	5190	41.119	Pass
NVNT	n40	5230	40.842	Pass
NVNT	ac20	5180	20.292	Pass
NVNT	ac20	5200	20.335	Pass
NVNT	ac20	5240	20.288	Pass
NVNT	ac40	5190	41.764	Pass
NVNT	ac40	5230	40.950	Pass
NVNT	ac80	5210	80.833	Pass



Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.361
NVNT	a	5200	16.338
NVNT	a	5240	16.372
NVNT	n20	5180	17.515
NVNT	n20	5200	17.523
NVNT	n20	5240	17.509
NVNT	n40	5190	35.826
NVNT	n40	5230	35.850
NVNT	ac20	5180	17.517
NVNT	ac20	5200	17.513
NVNT	ac20	5240	17.523
NVNT	ac40	5190	35.895
NVNT	ac40	5230	35.887
NVNT	ac80	5210	75.524



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC120V/60Hz
Test Mode:	(5745-5825MHz)		



Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	12.667	0.5	Pass
NVNT	a	5785	13.830	0.5	Pass
NVNT	a	5825	15.036	0.5	Pass
NVNT	n20	5745	14.932	0.5	Pass
NVNT	n20	5785	15.091	0.5	Pass
NVNT	n20	5825	15.059	0.5	Pass
NVNT	n40	5755	32.511	0.5	Pass
NVNT	n40	5795	33.803	0.5	Pass
NVNT	ac20	5745	15.055	0.5	Pass
NVNT	ac20	5785	13.877	0.5	Pass
NVNT	ac20	5825	15.057	0.5	Pass
NVNT	ac40	5755	31.234	0.5	Pass
NVNT	ac40	5795	35.066	0.5	Pass
NVNT	ac80	5775	75.687	0.5	Pass



Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5745	17.114
NVNT	a	5785	16.645
NVNT	a	5825	16.526
NVNT	n20	5745	17.819
NVNT	n20	5785	17.709
NVNT	n20	5825	17.571
NVNT	n40	5755	36.064
NVNT	n40	5795	36.029
NVNT	ac20	5745	17.767
NVNT	ac20	5785	17.656
NVNT	ac20	5825	17.592
NVNT	ac40	5755	36.038
NVNT	ac40	5795	35.982
NVNT	ac80	5775	75.828





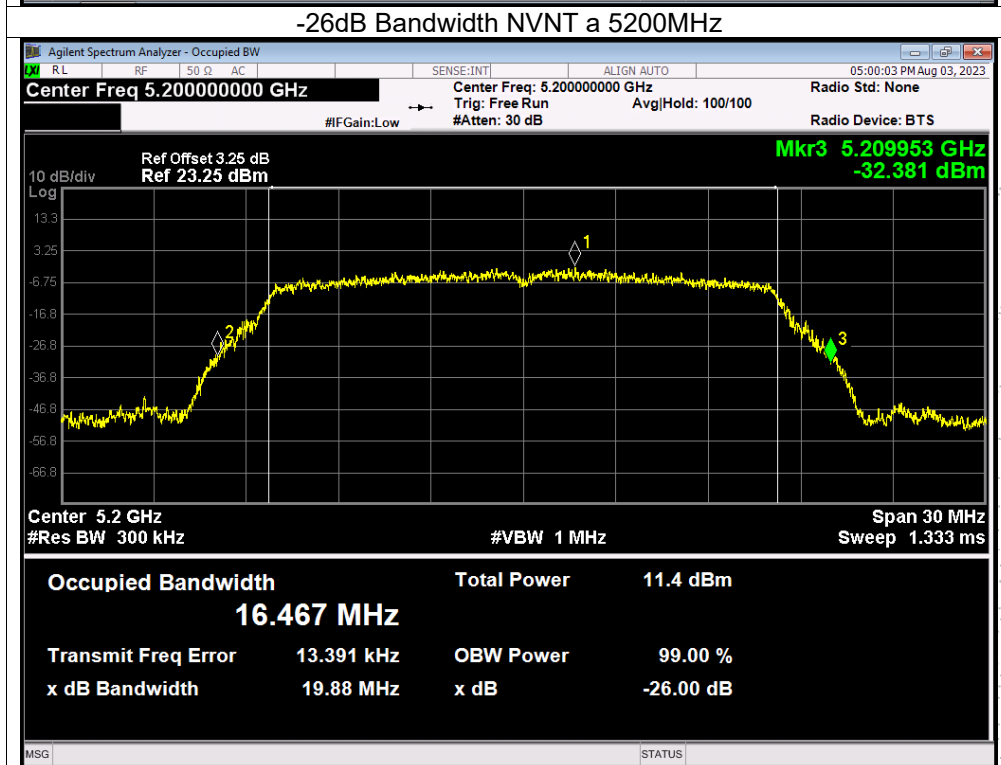
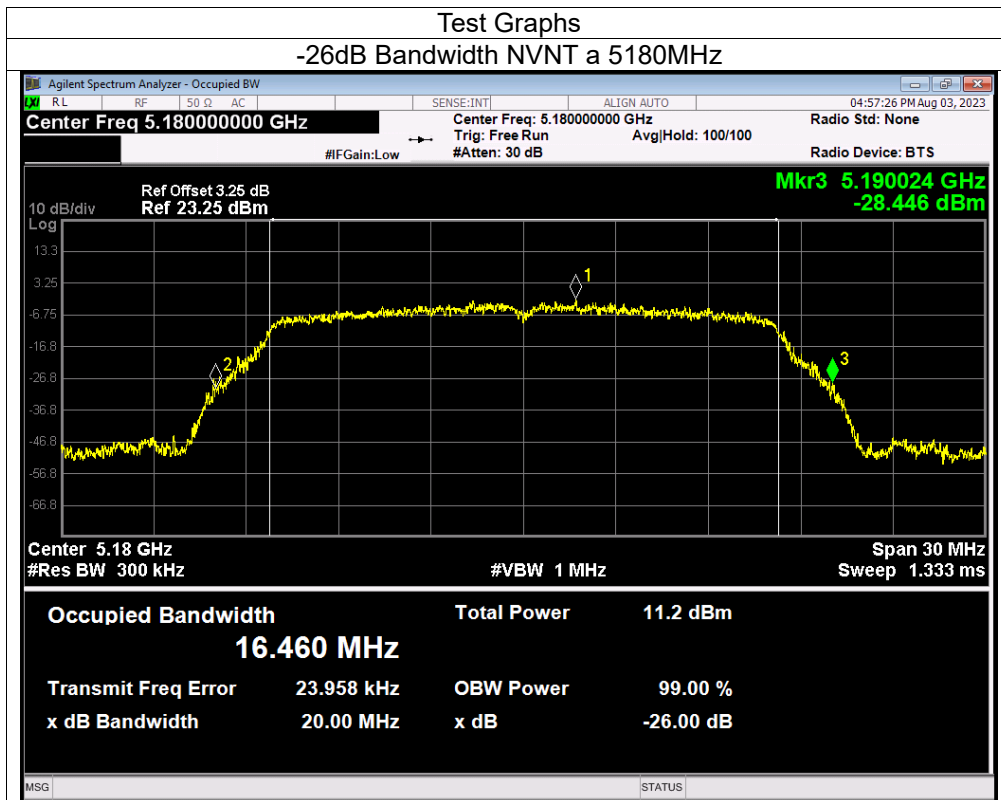


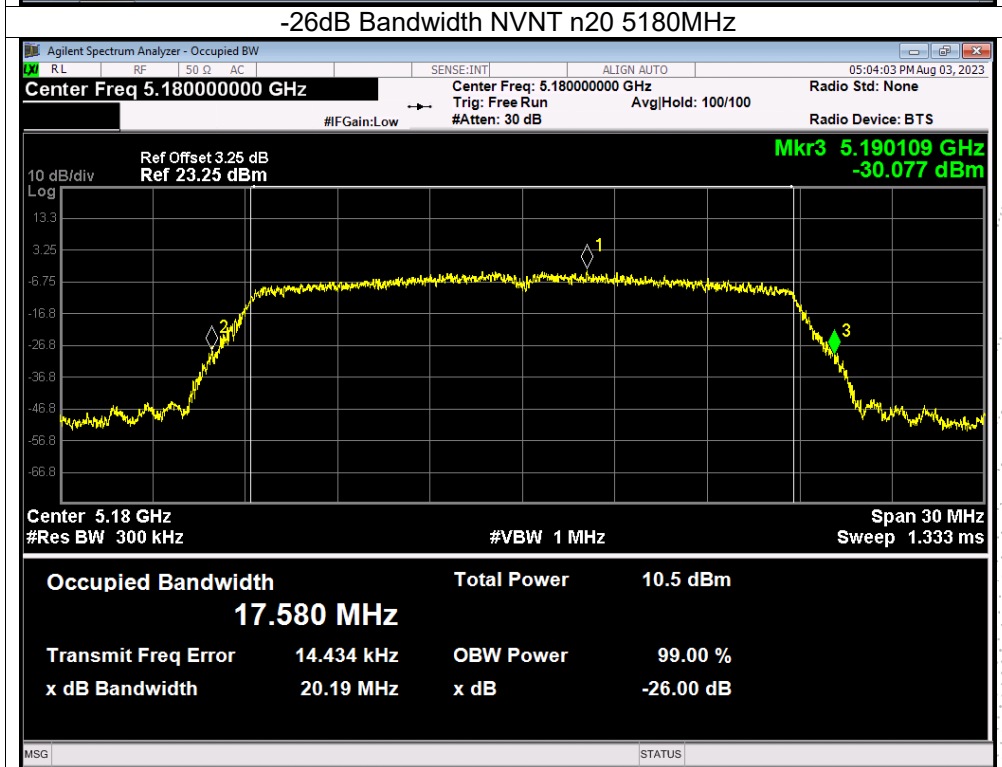
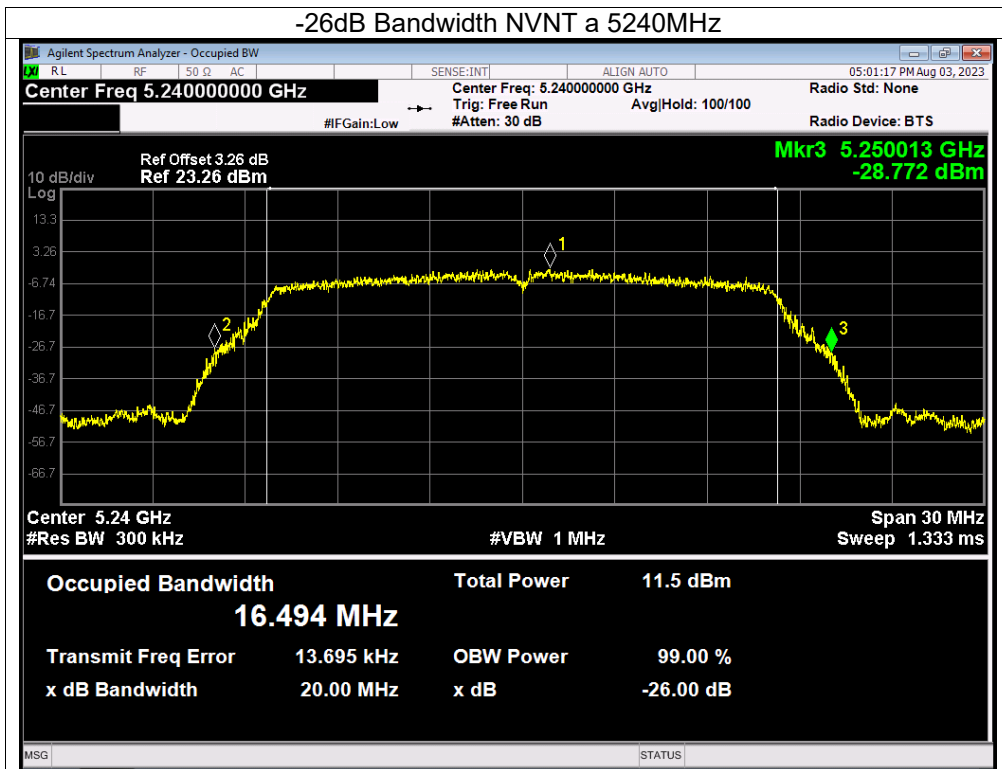


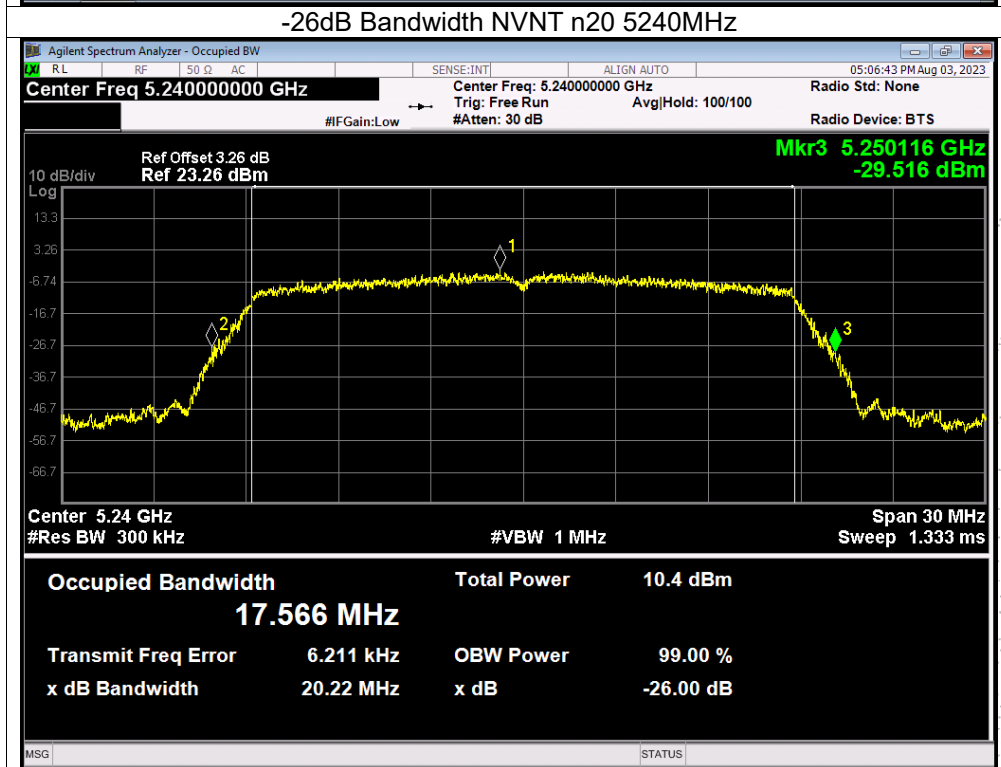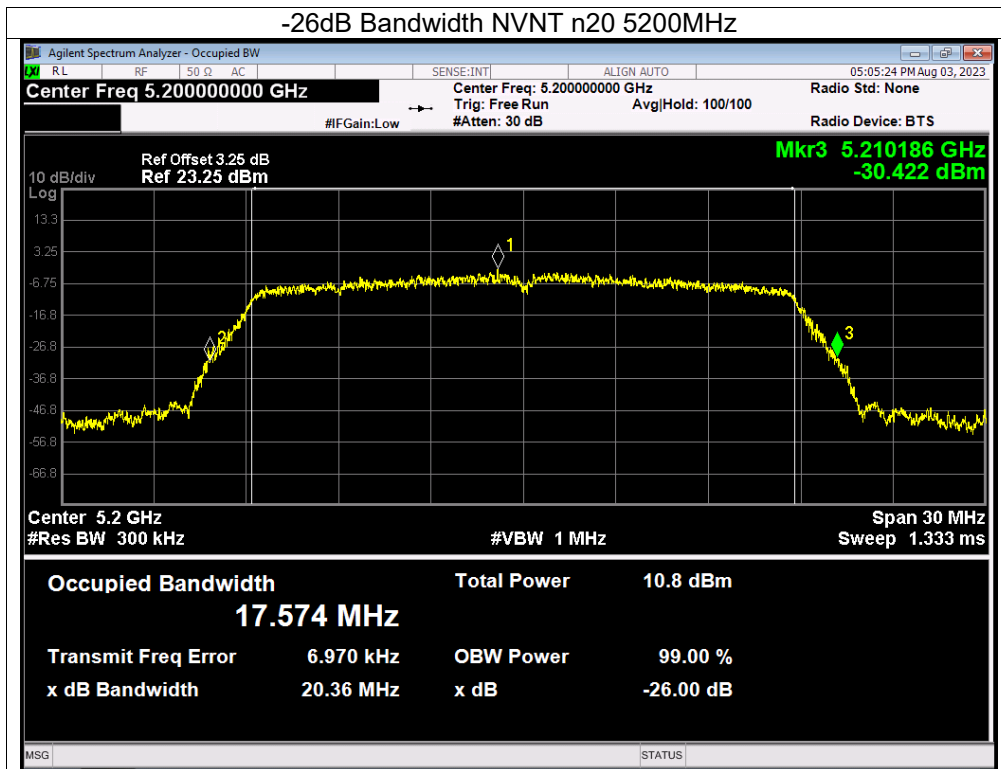

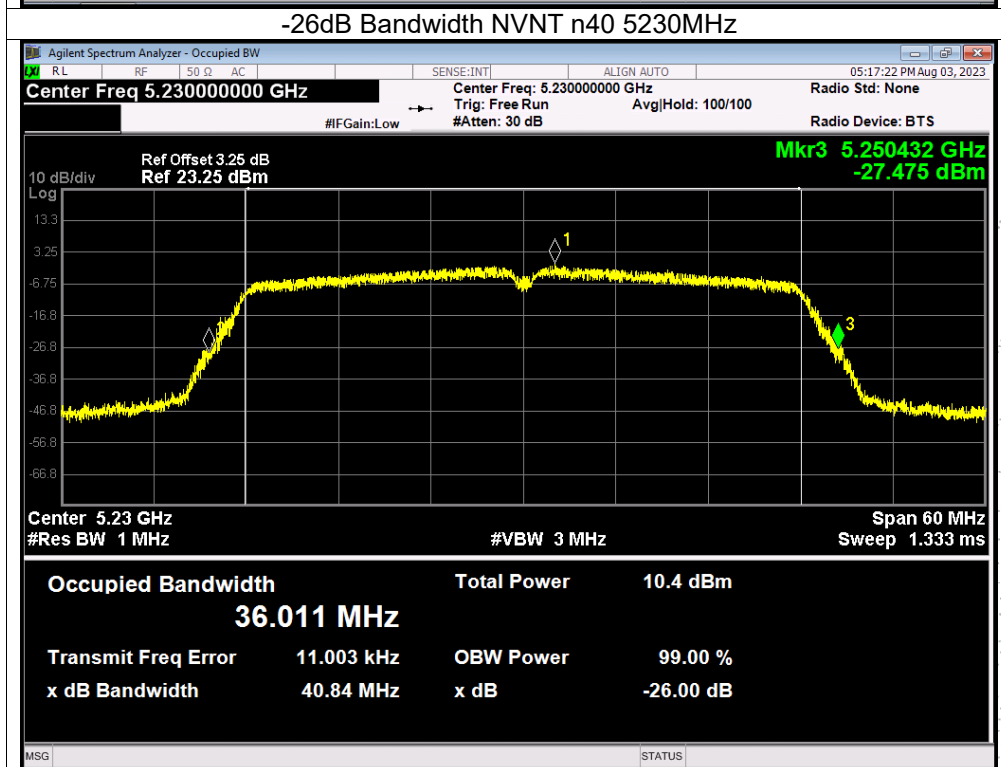
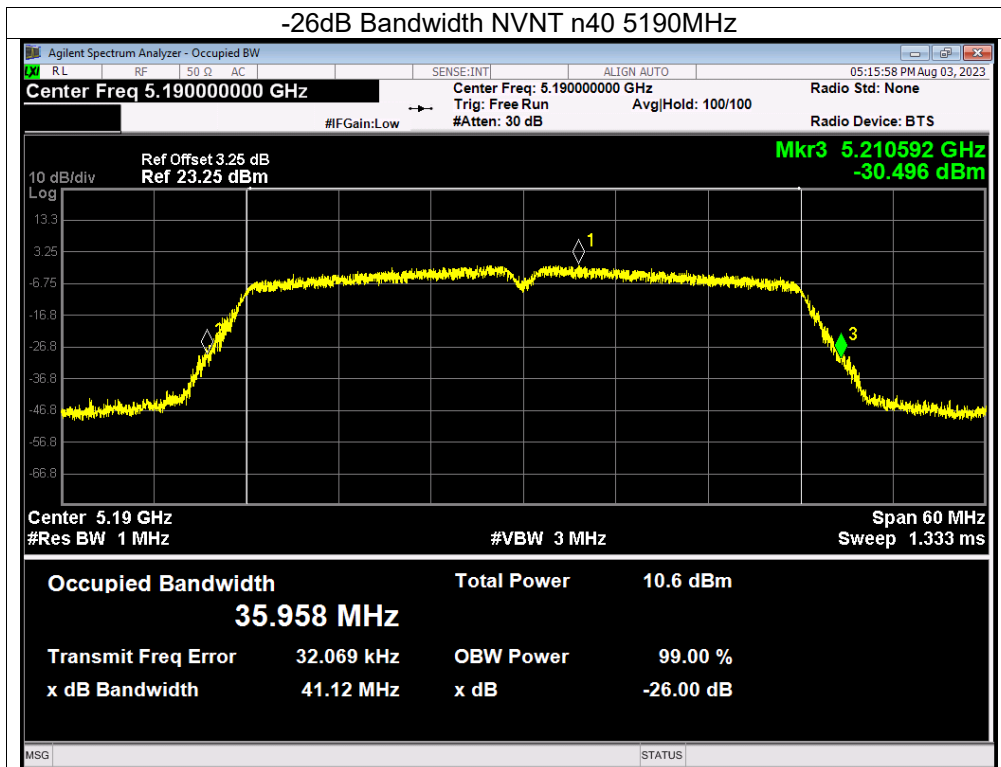


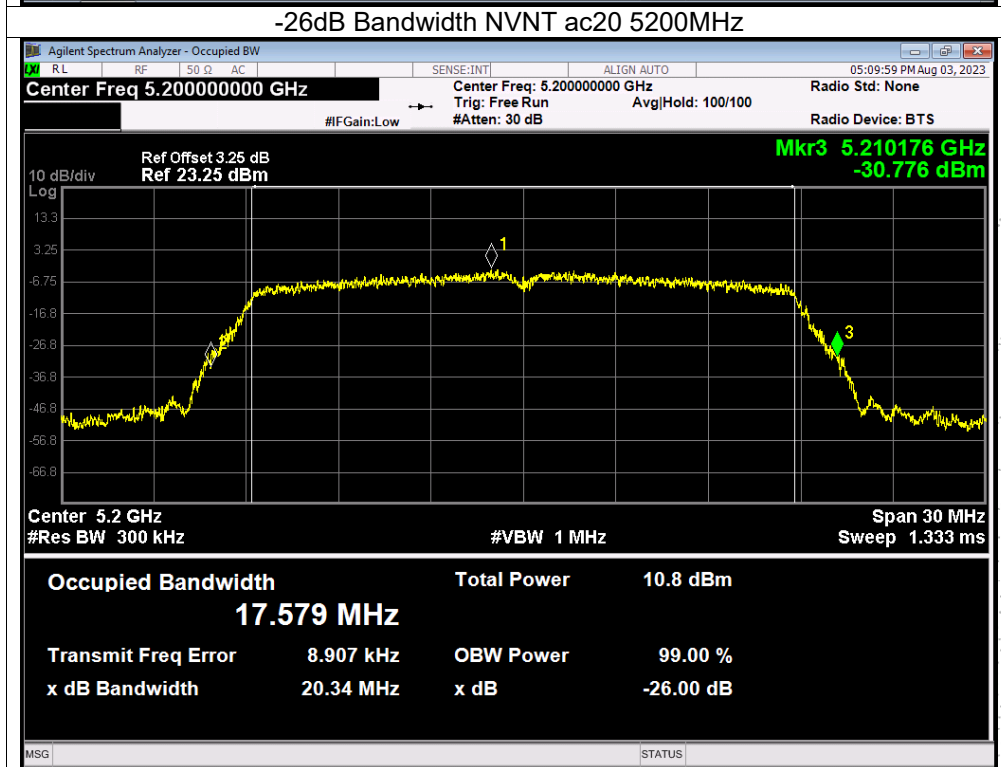
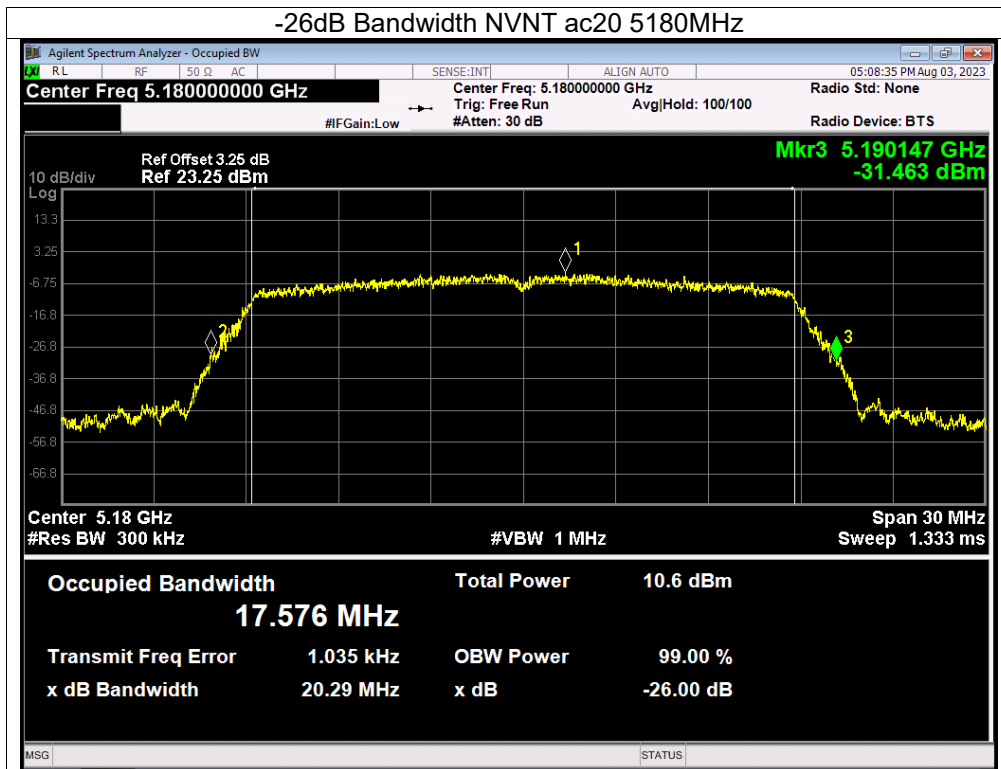


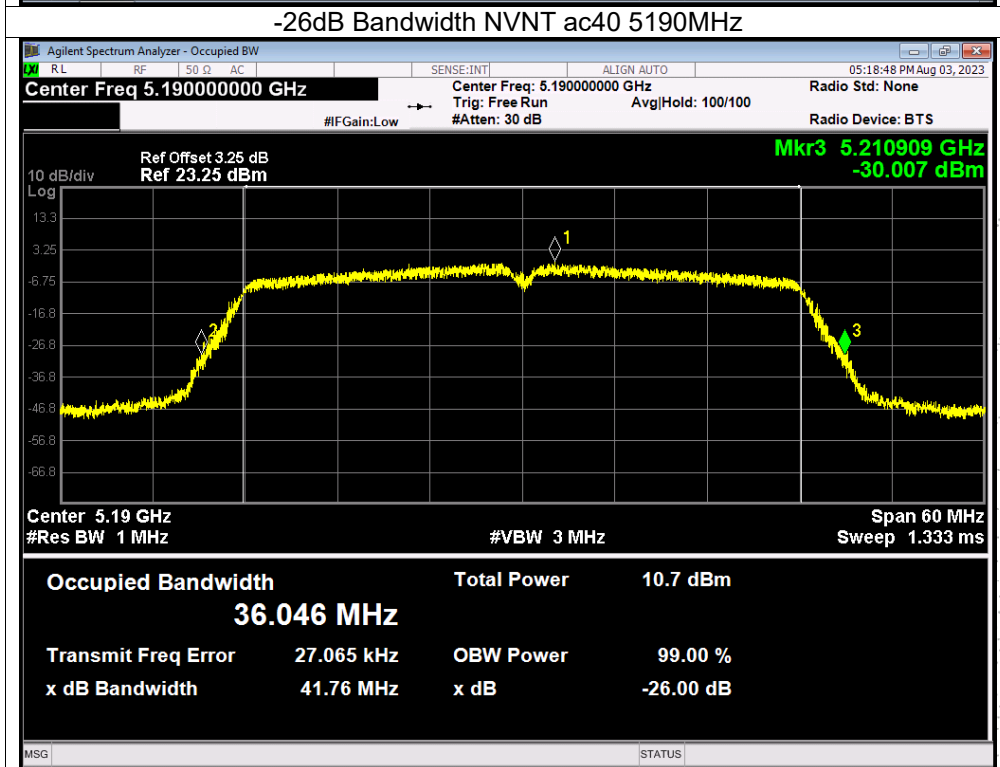
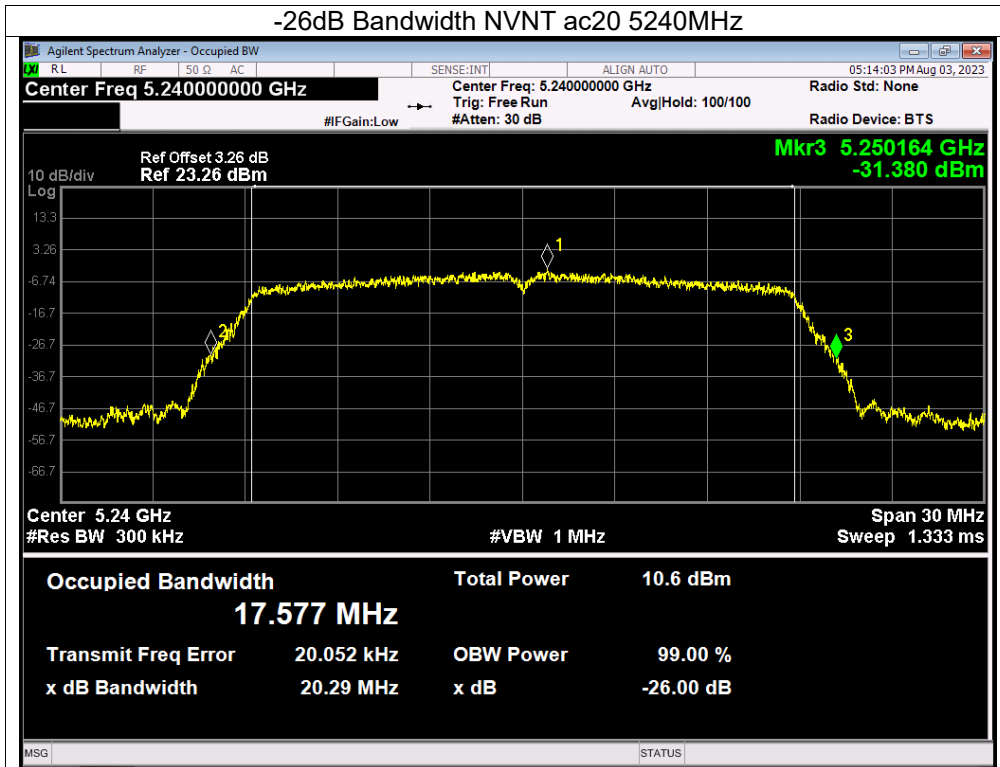


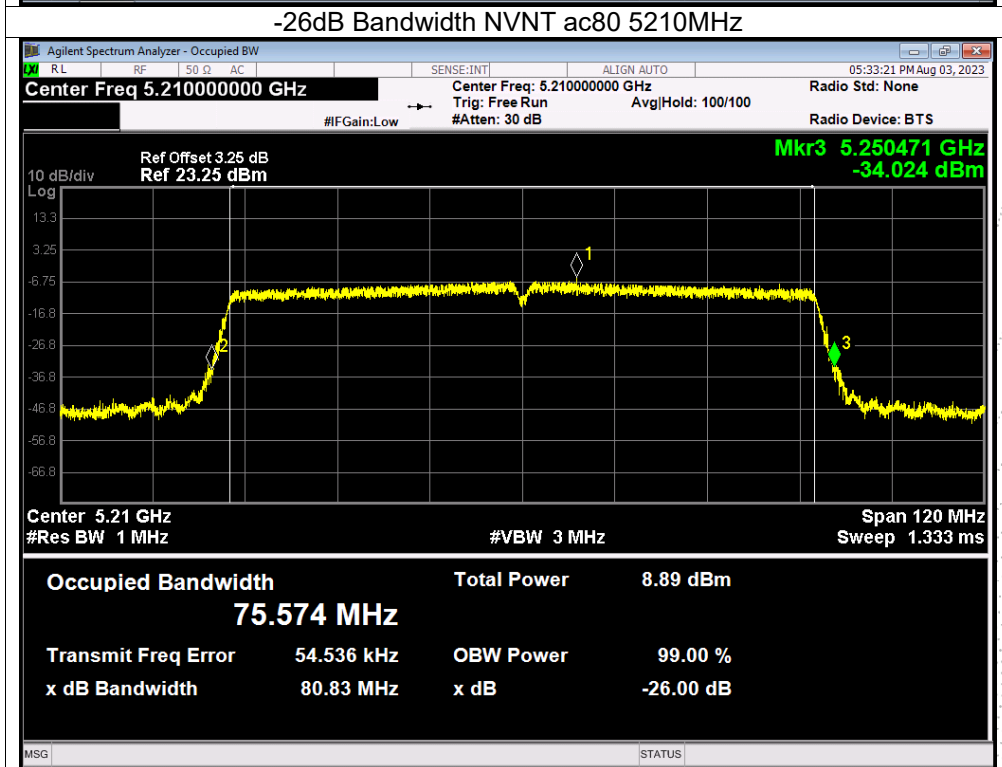
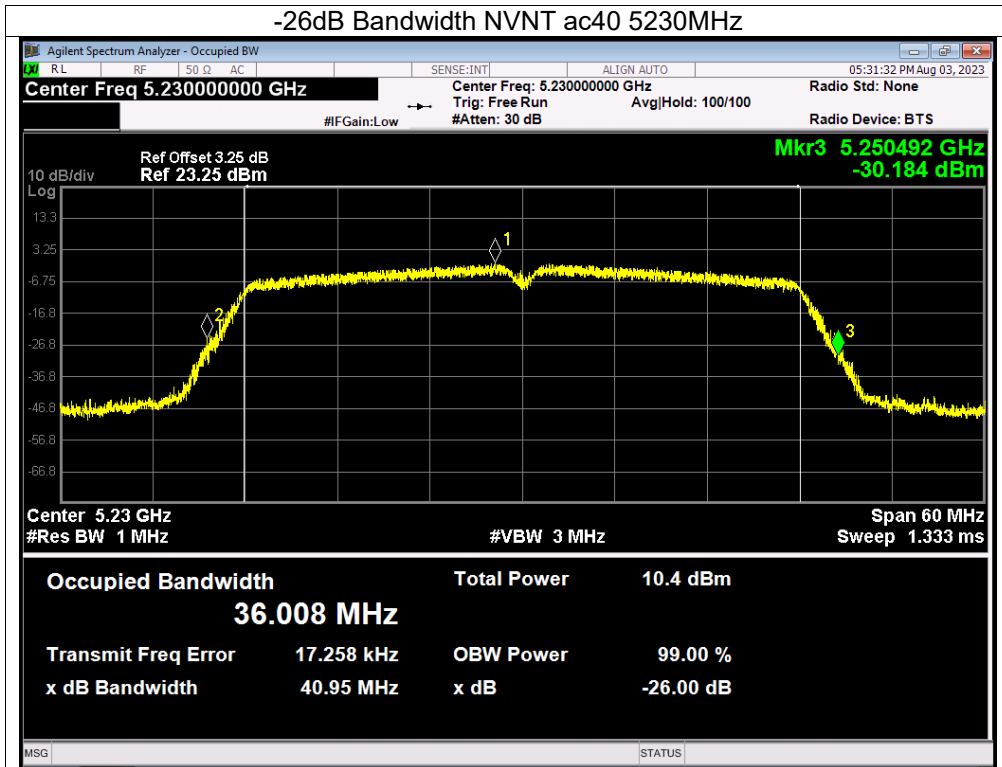






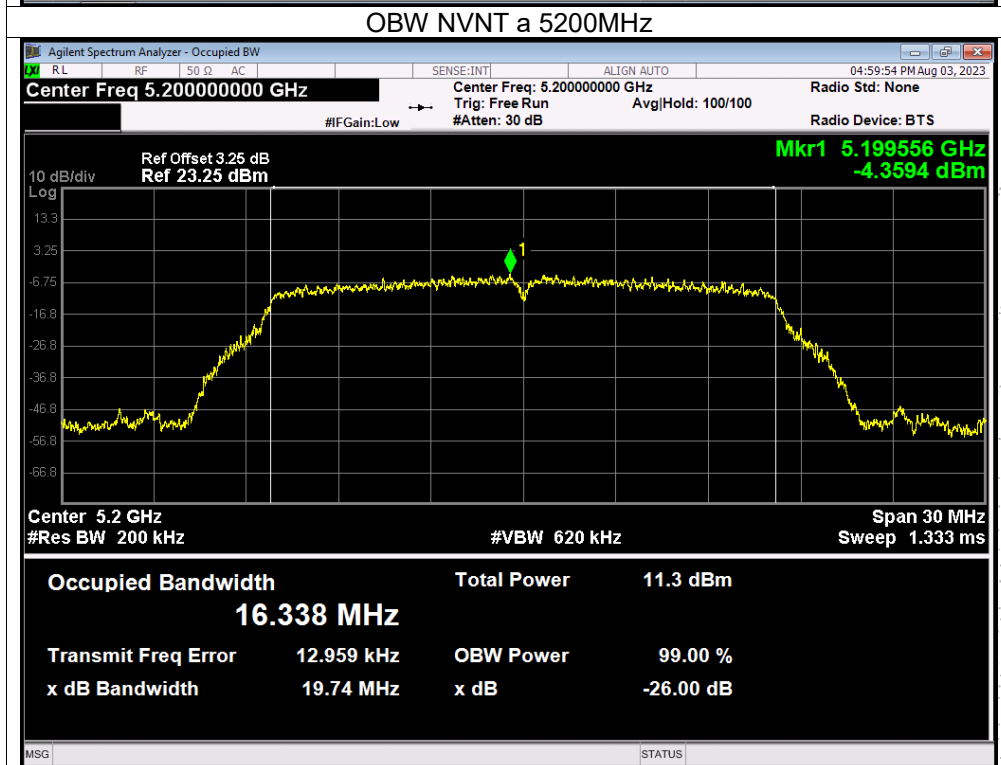
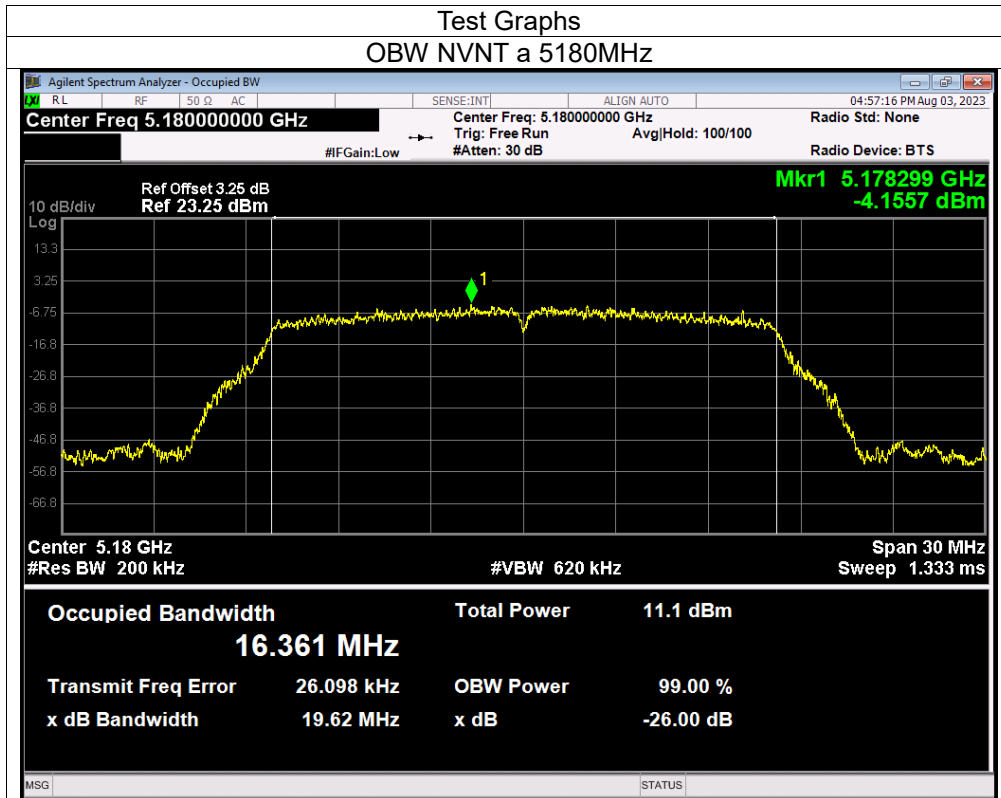


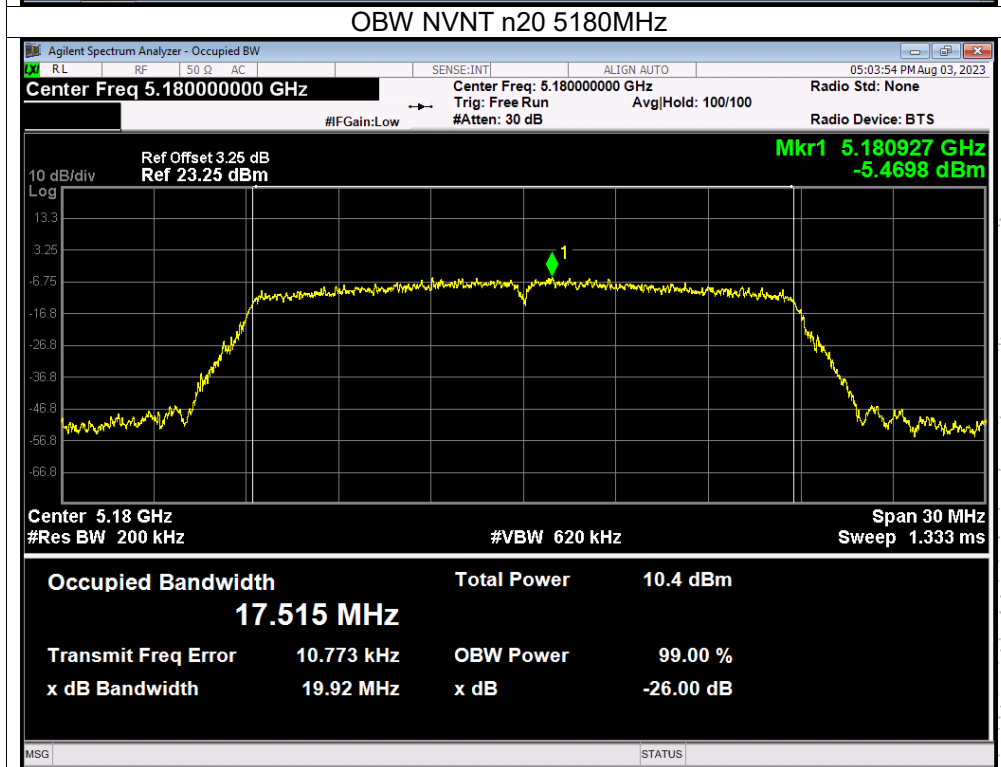
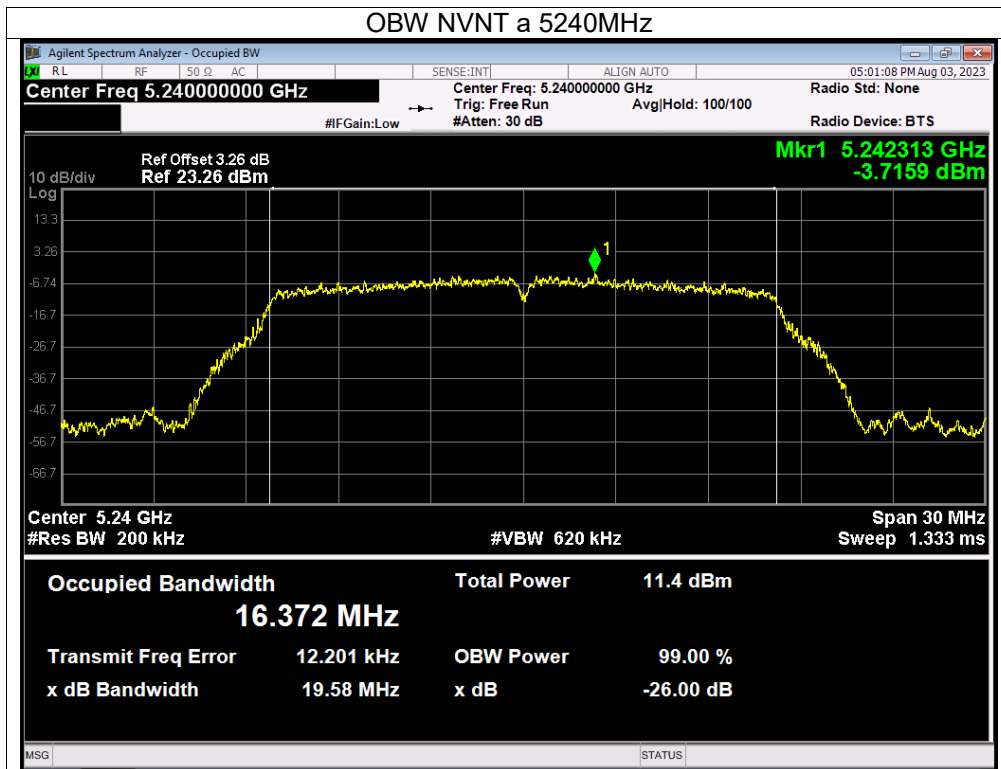


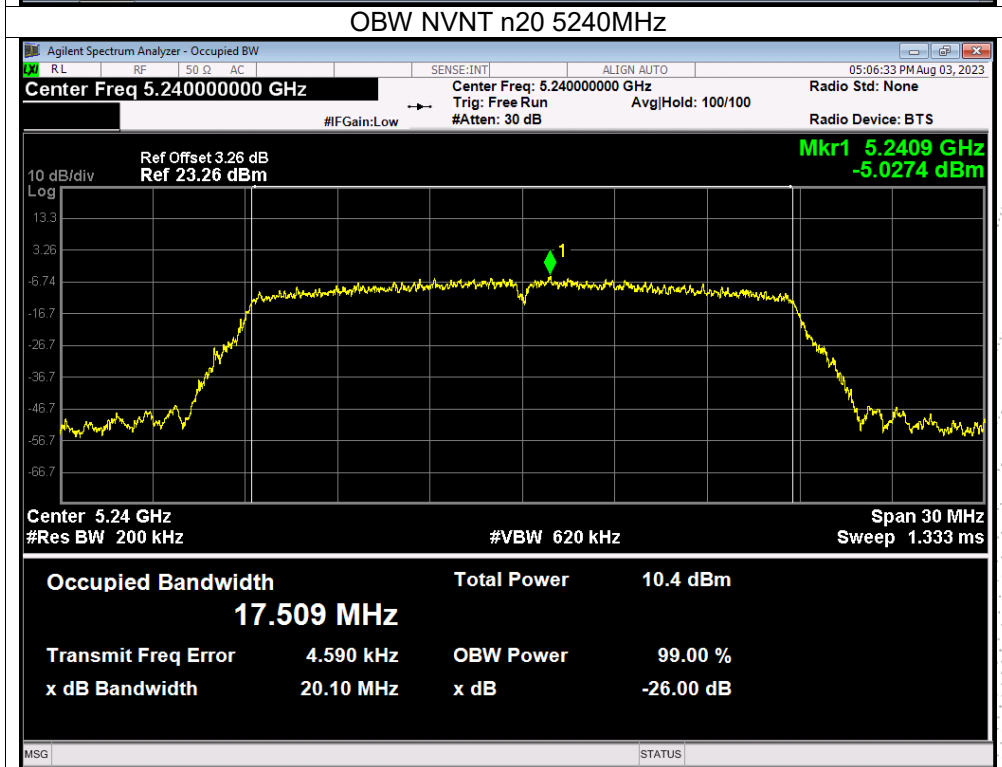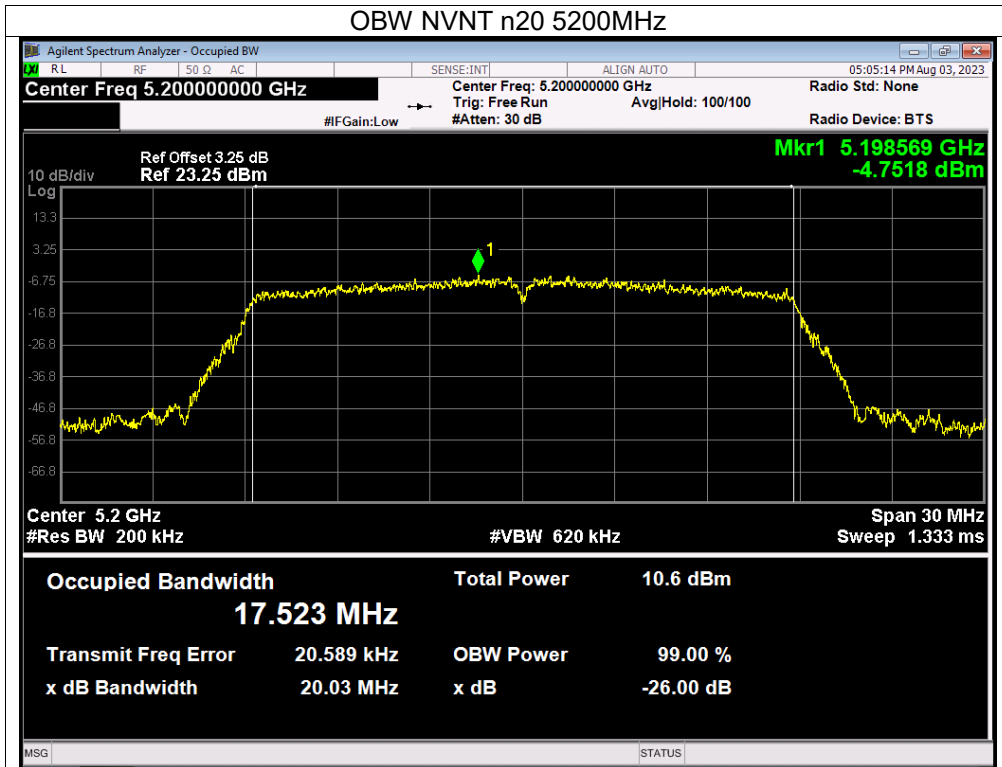

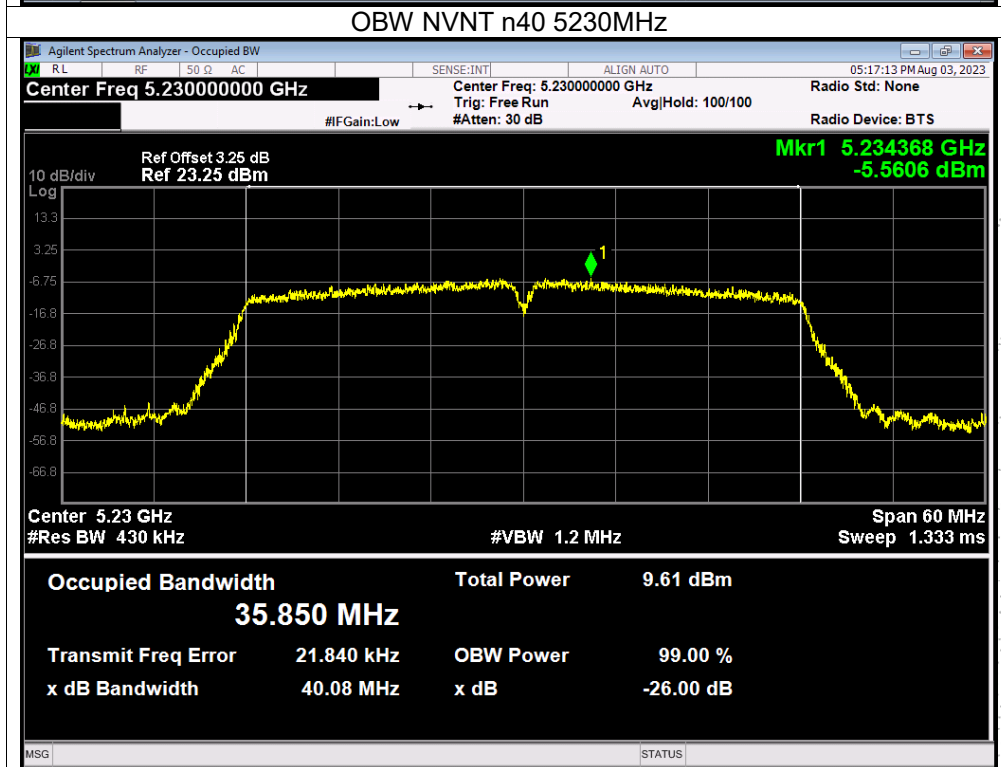
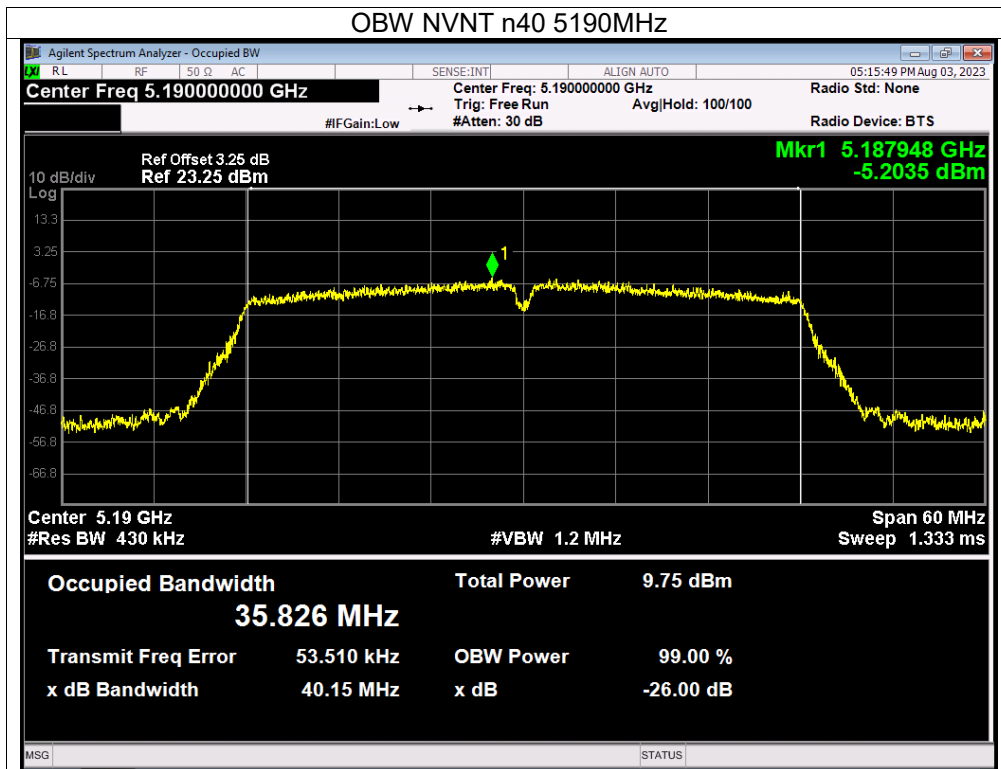


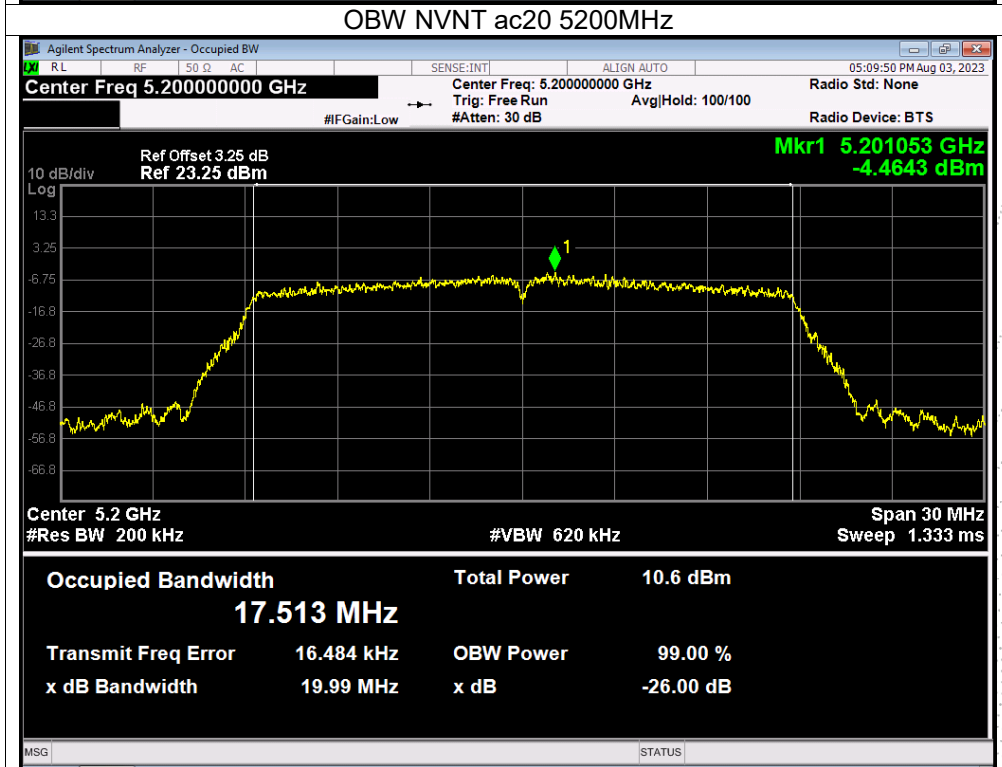
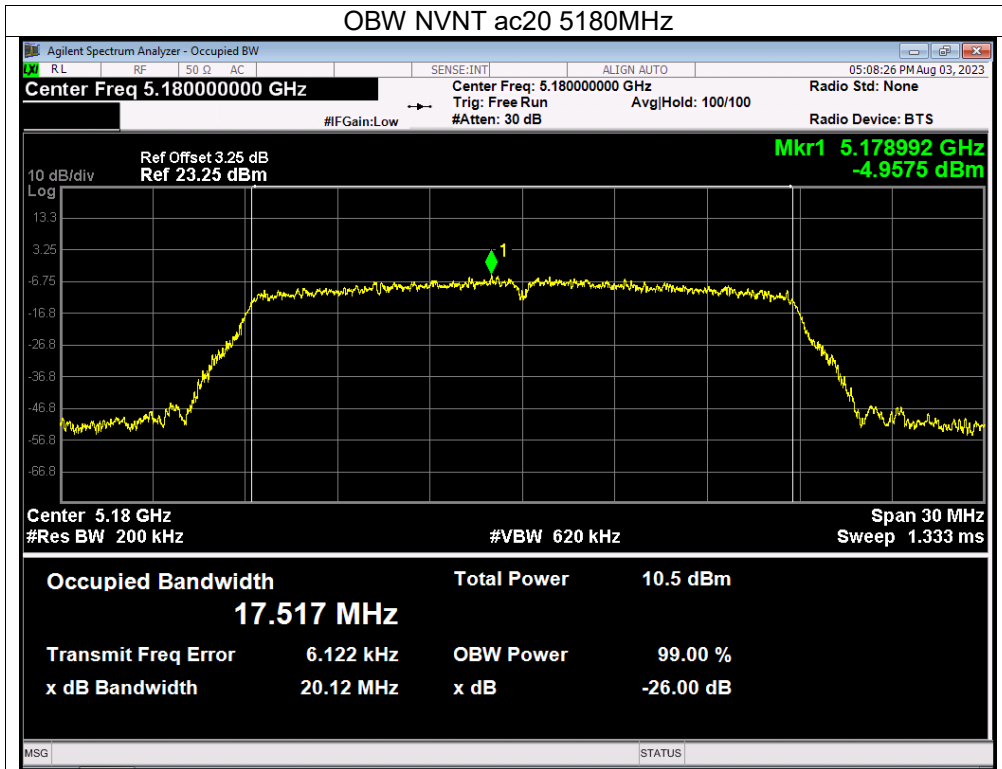


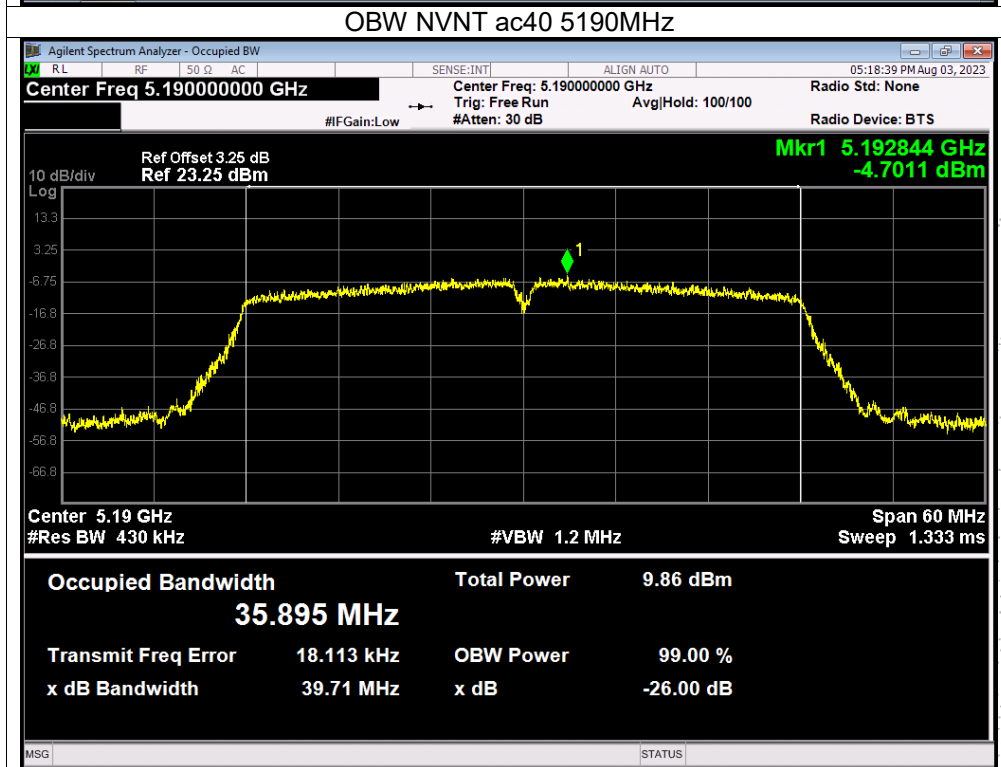
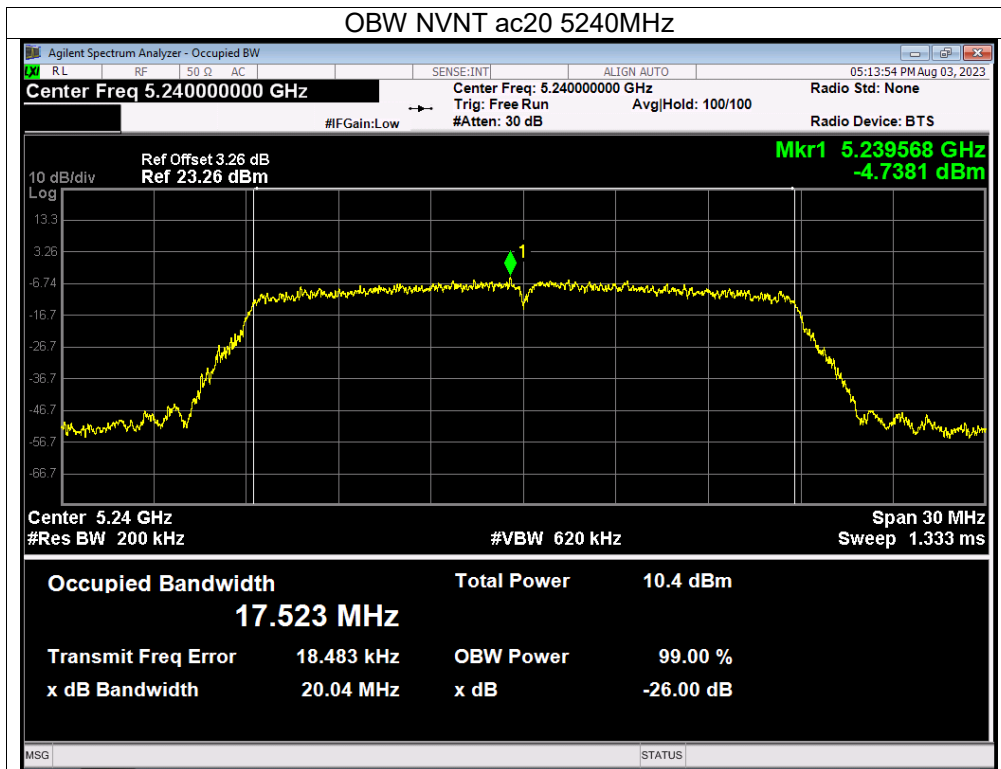


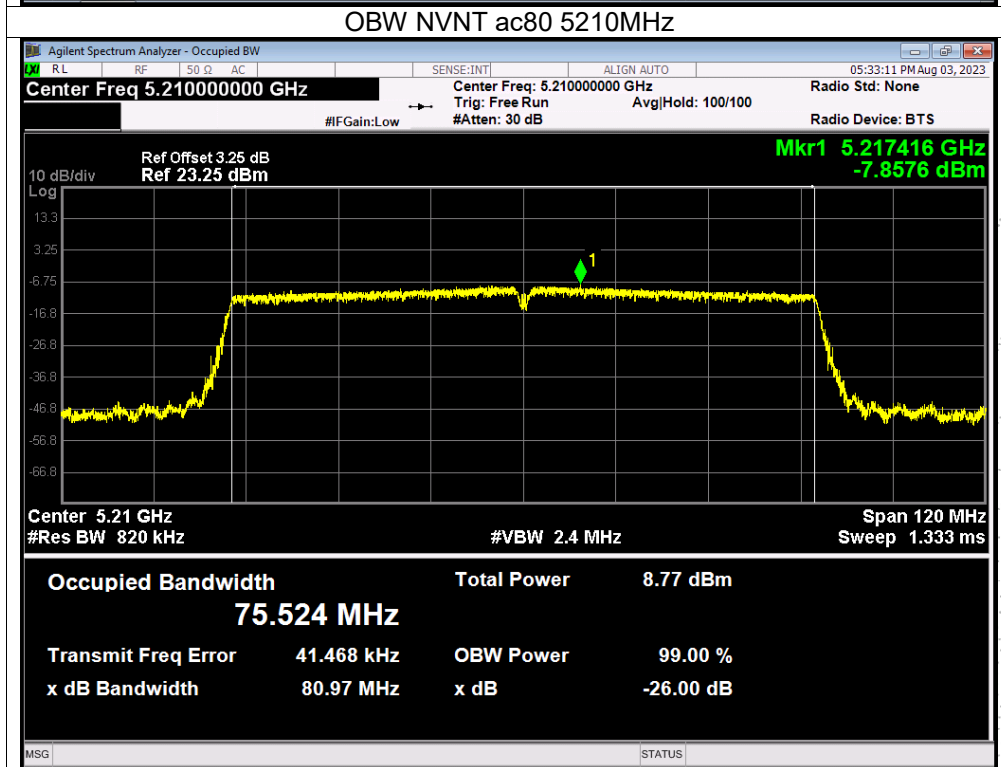
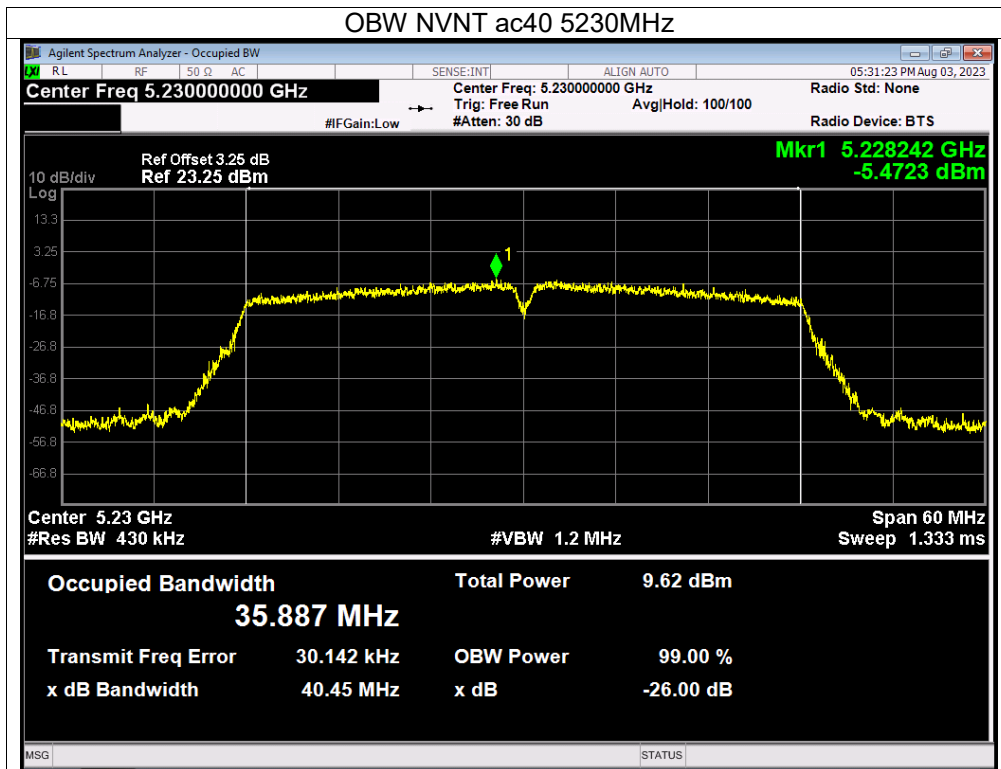






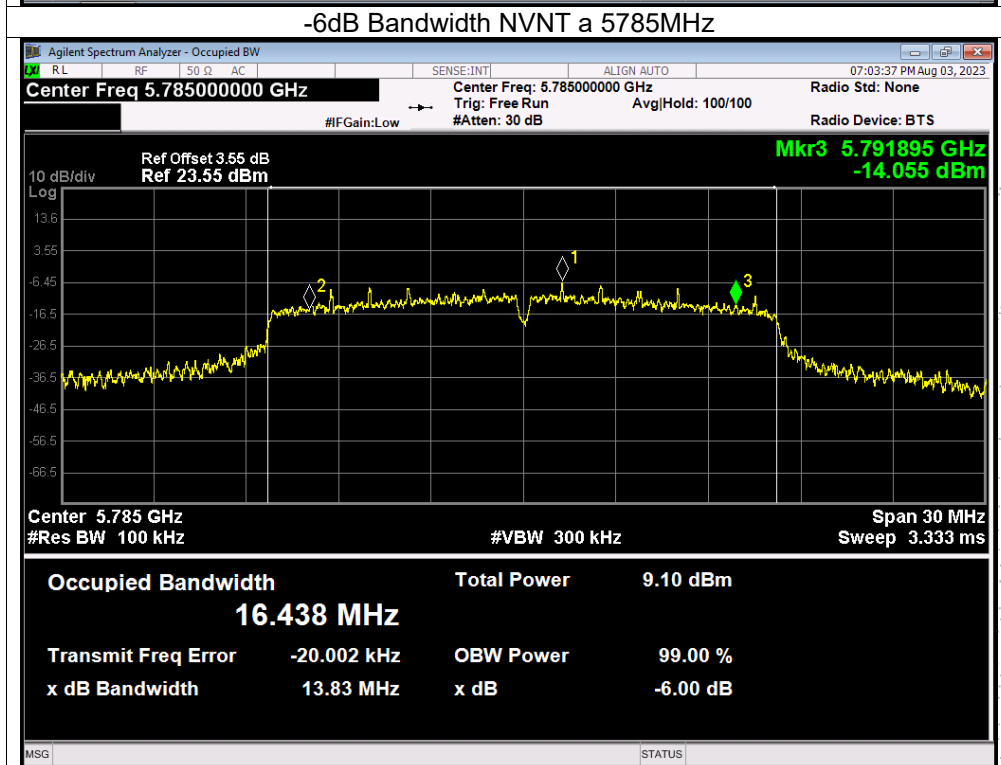
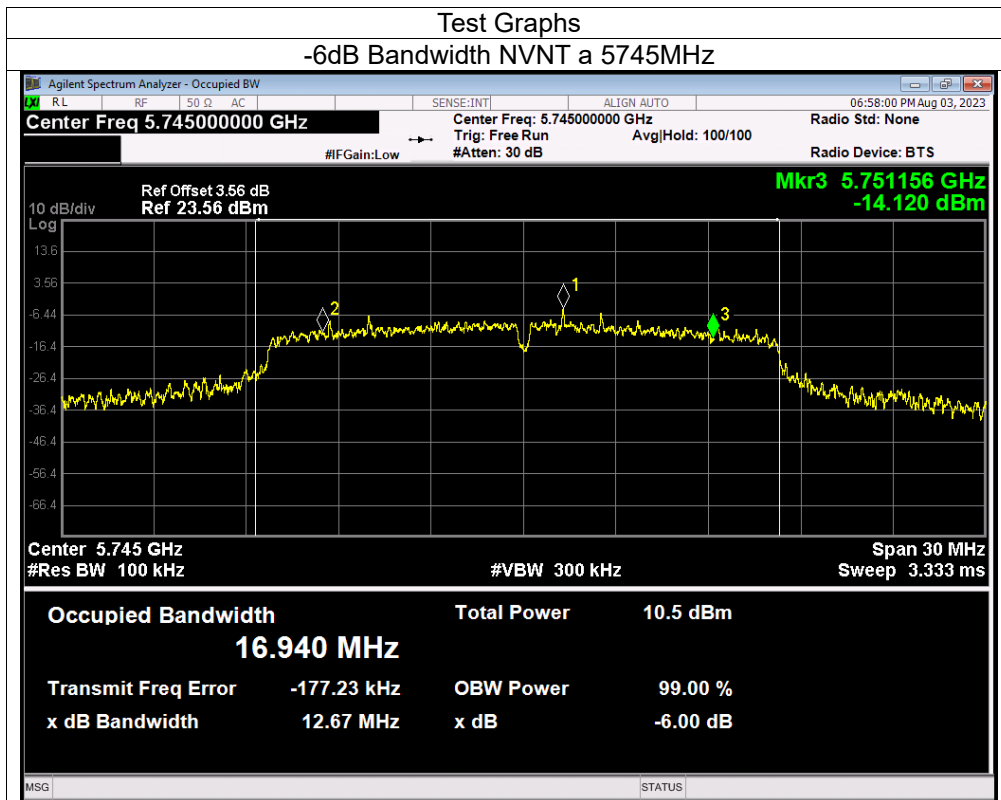


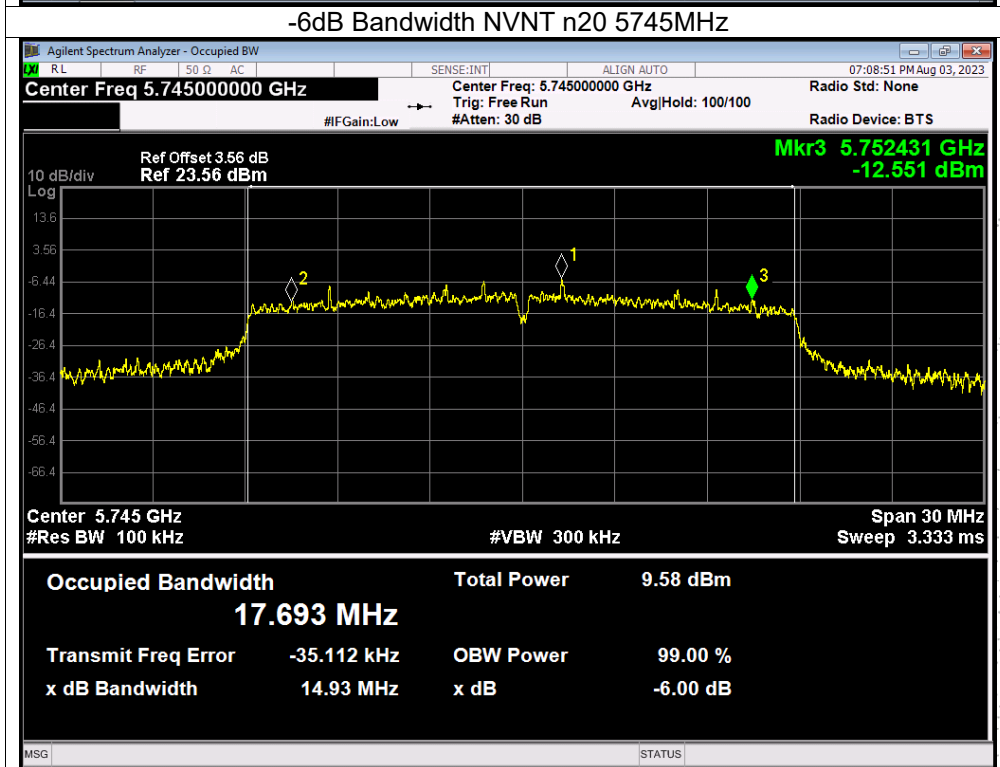
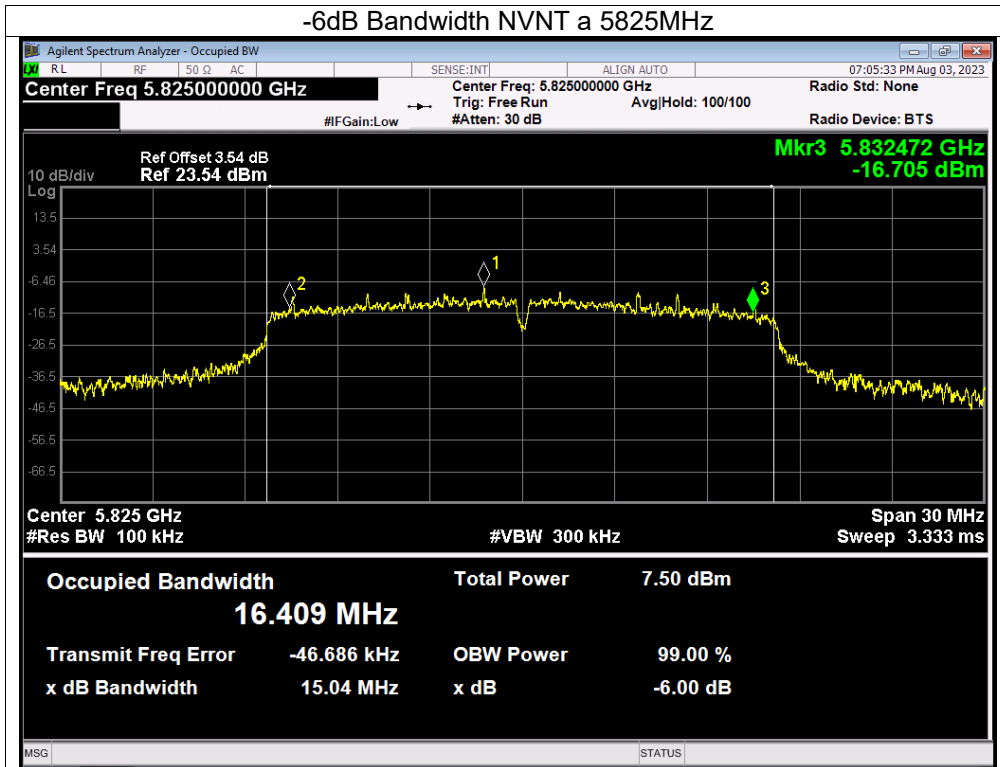


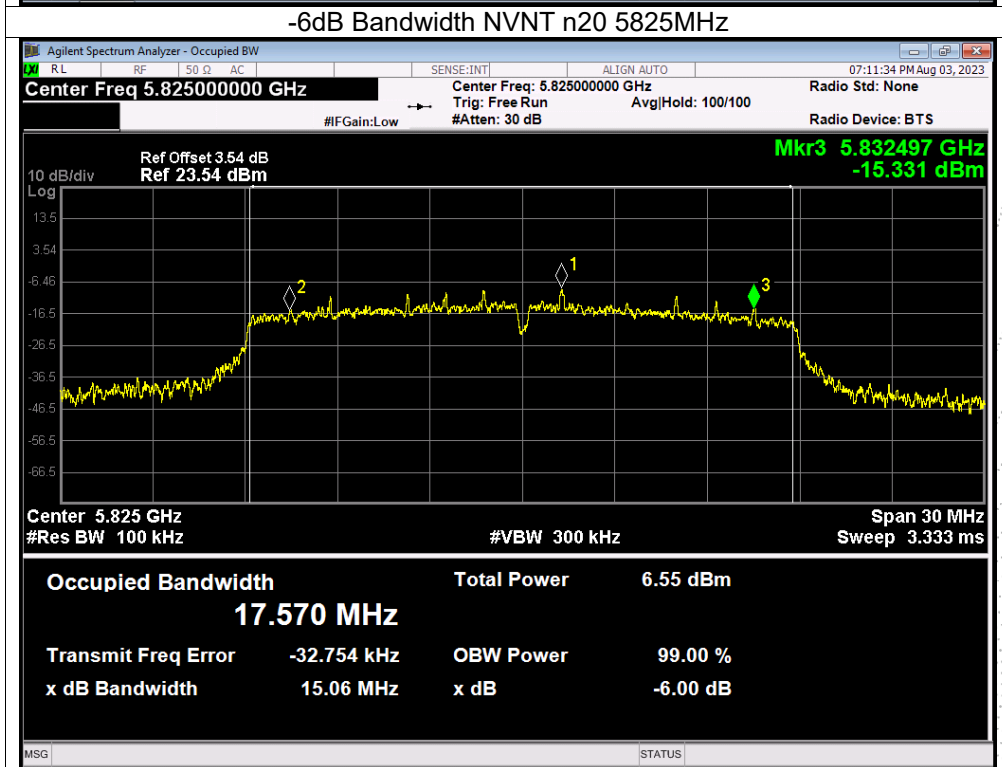
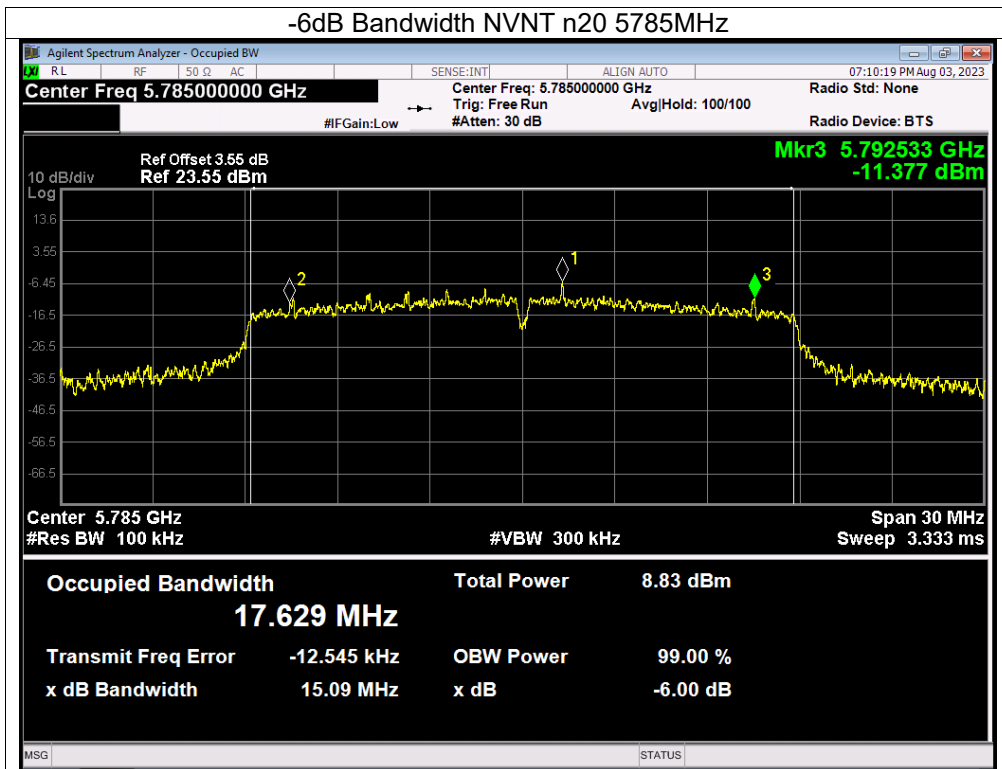


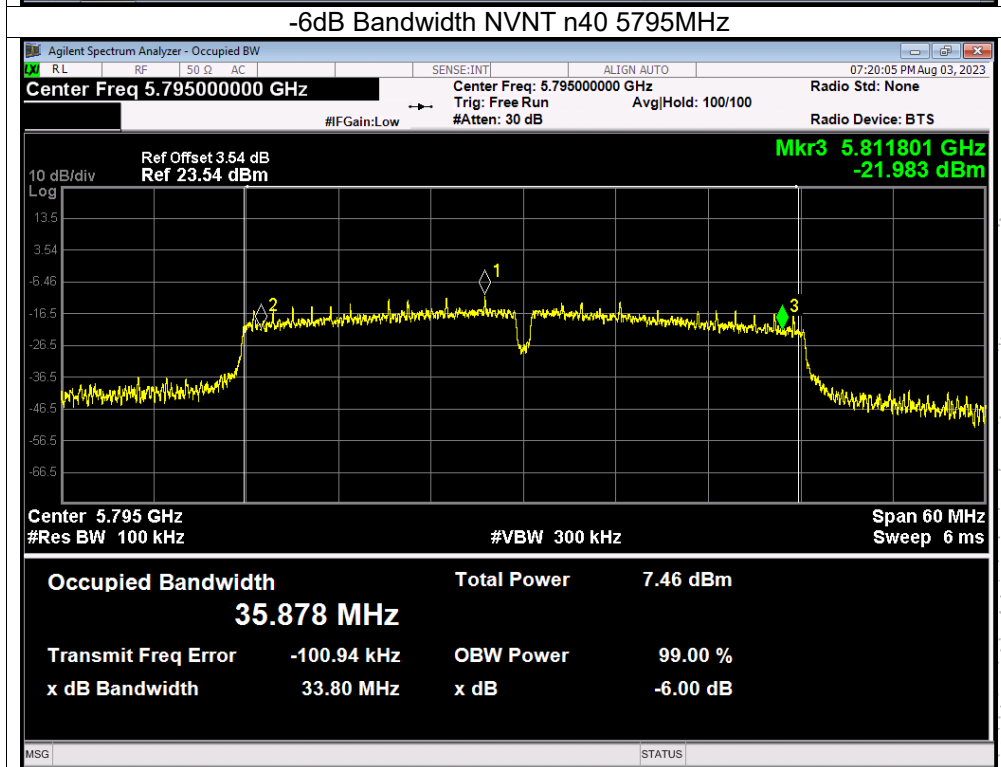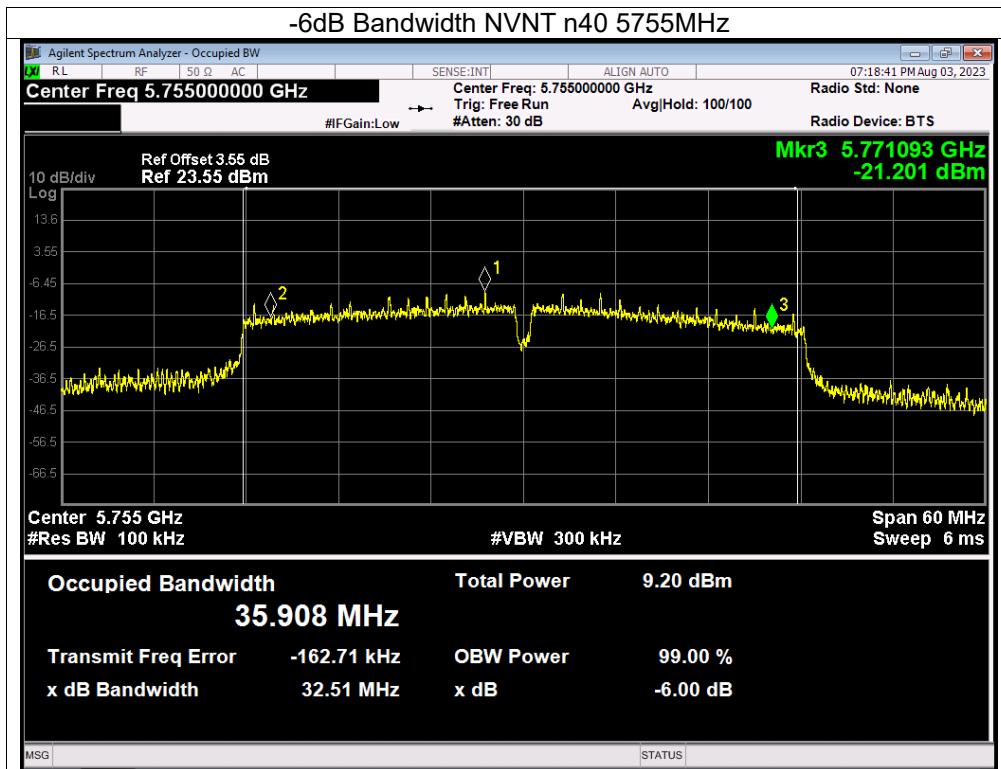

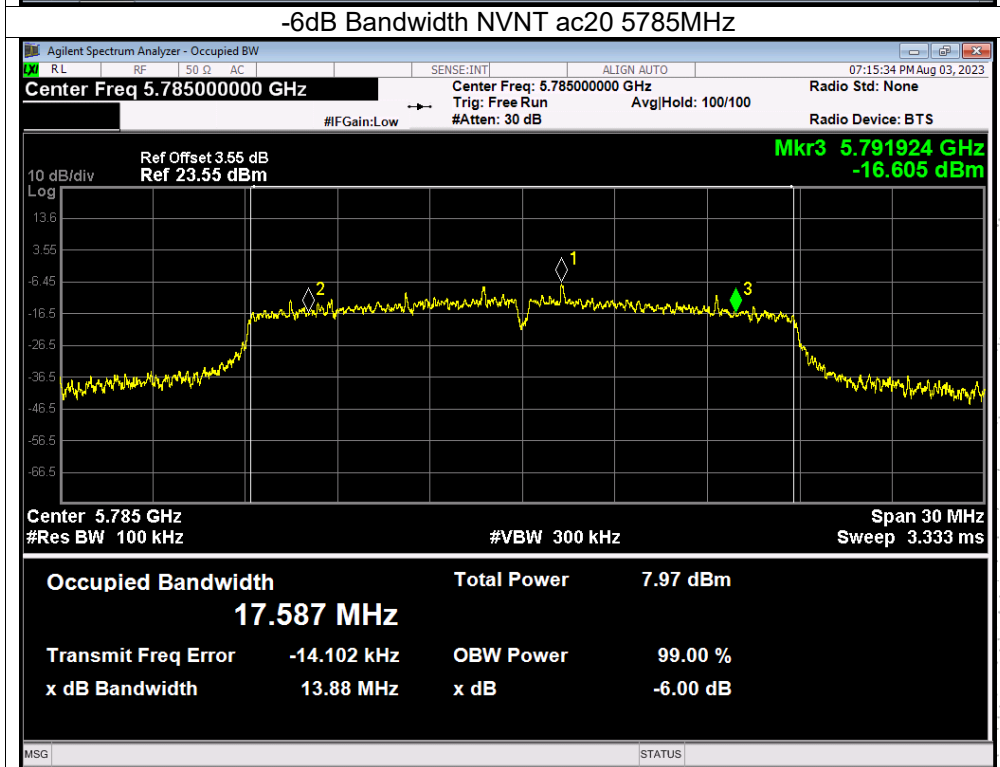
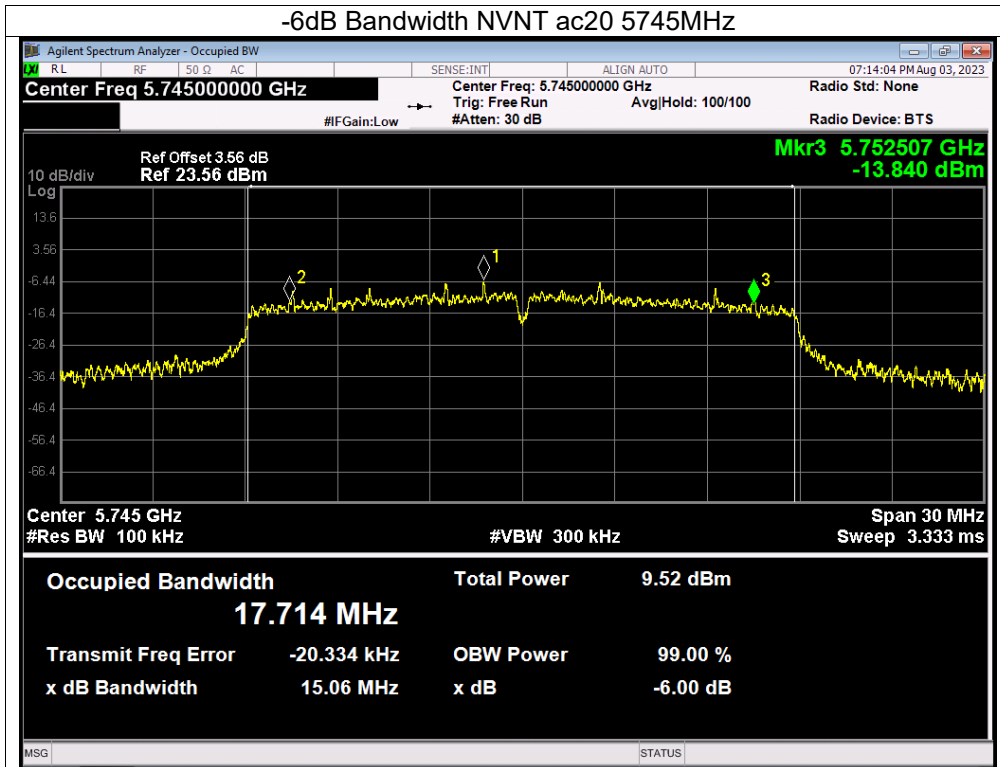


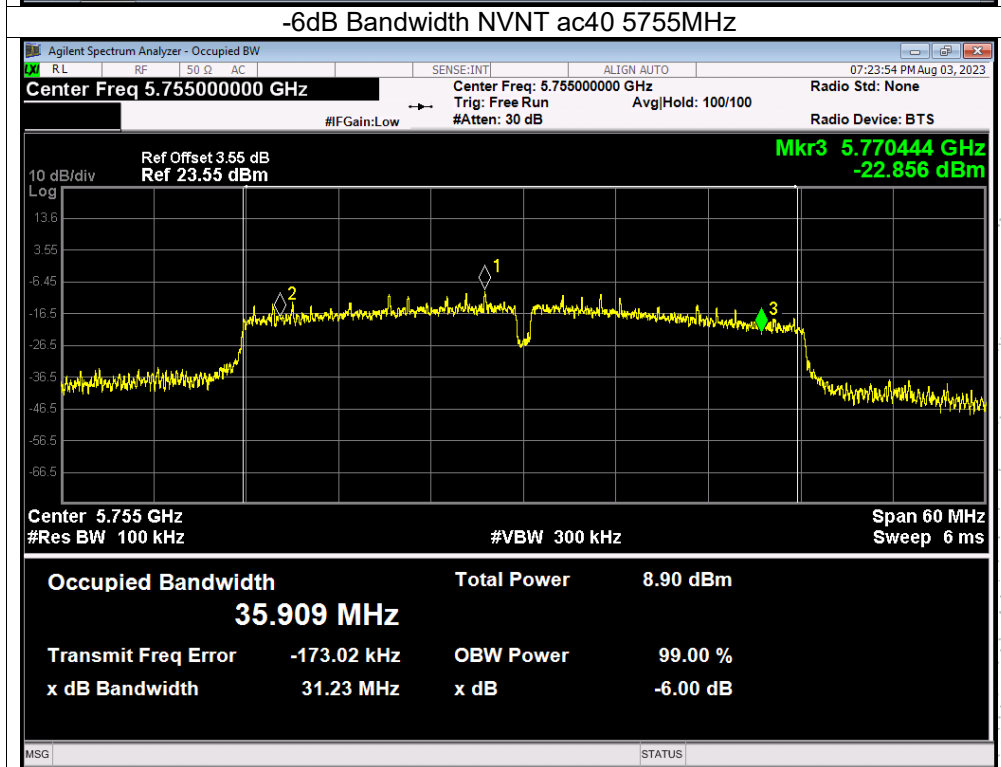
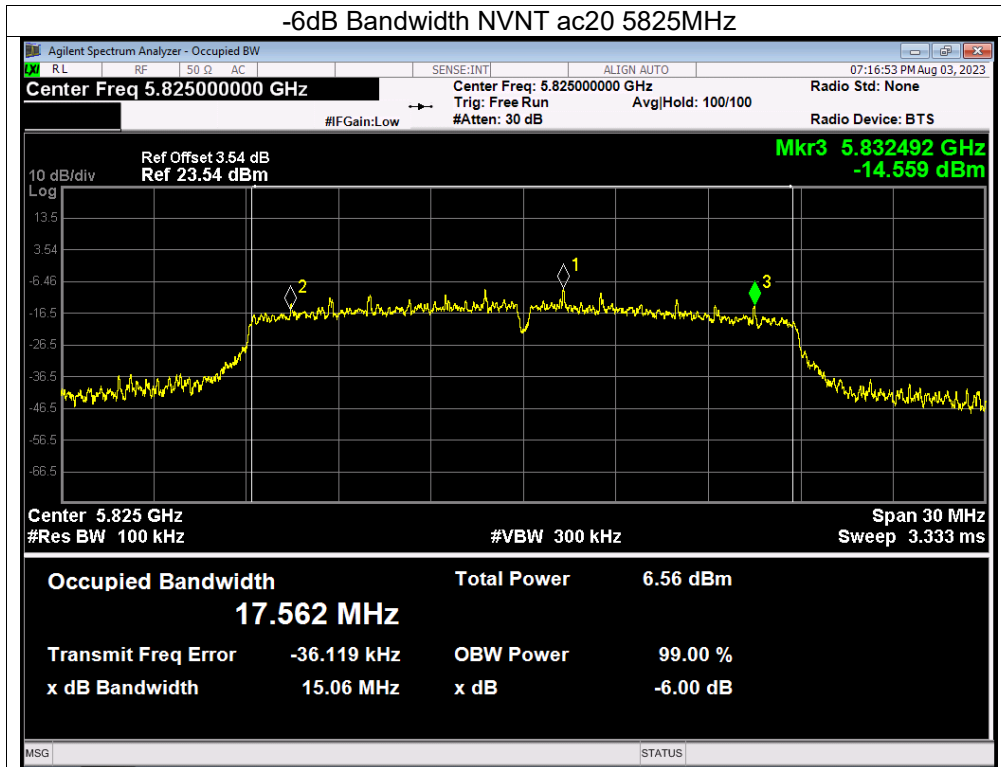


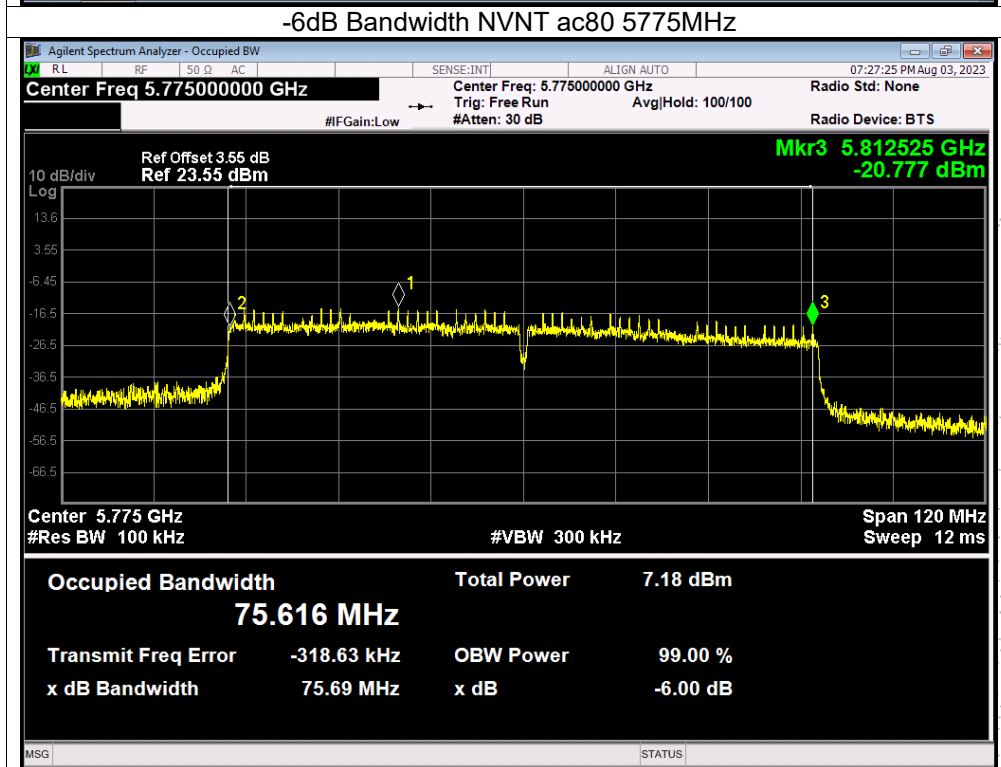
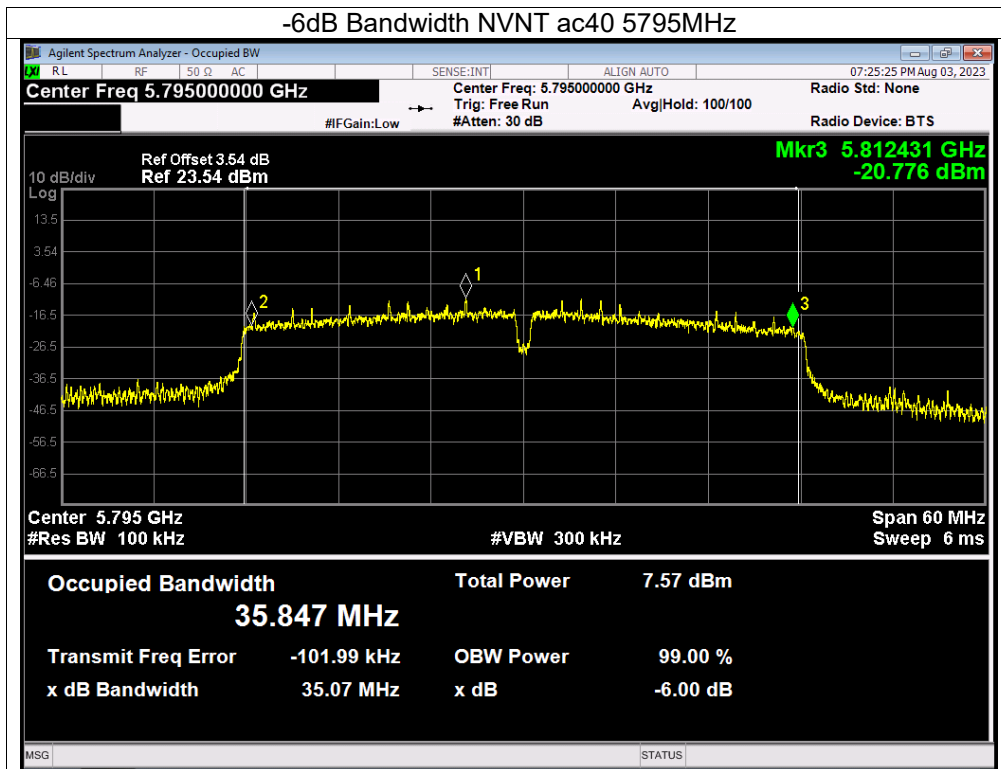


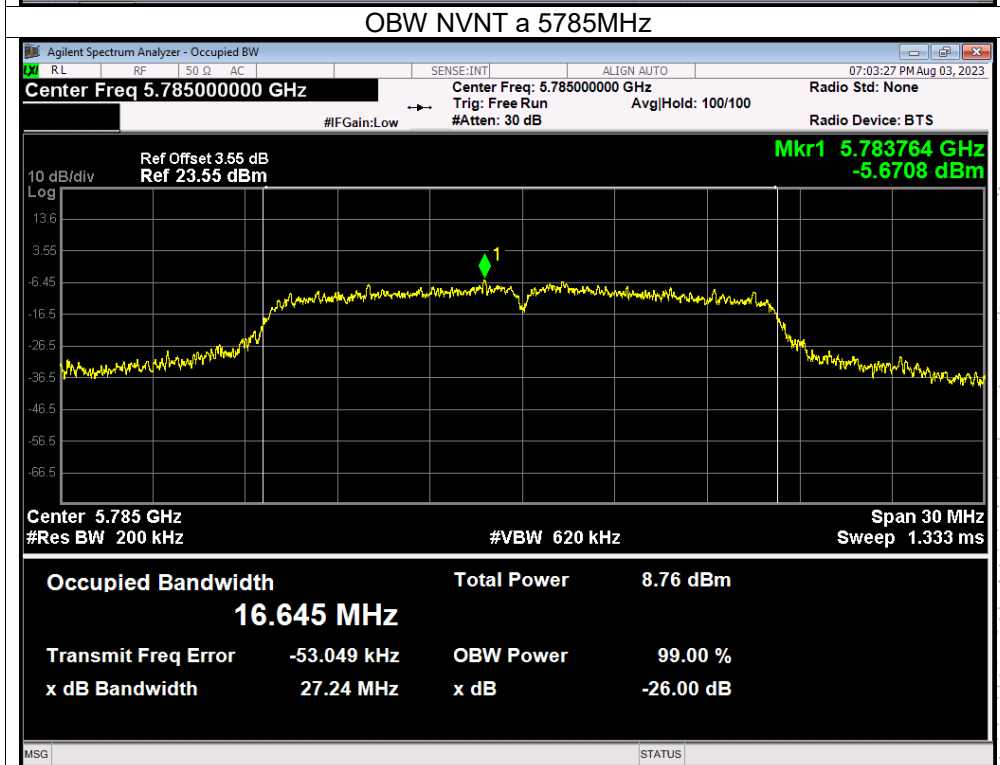
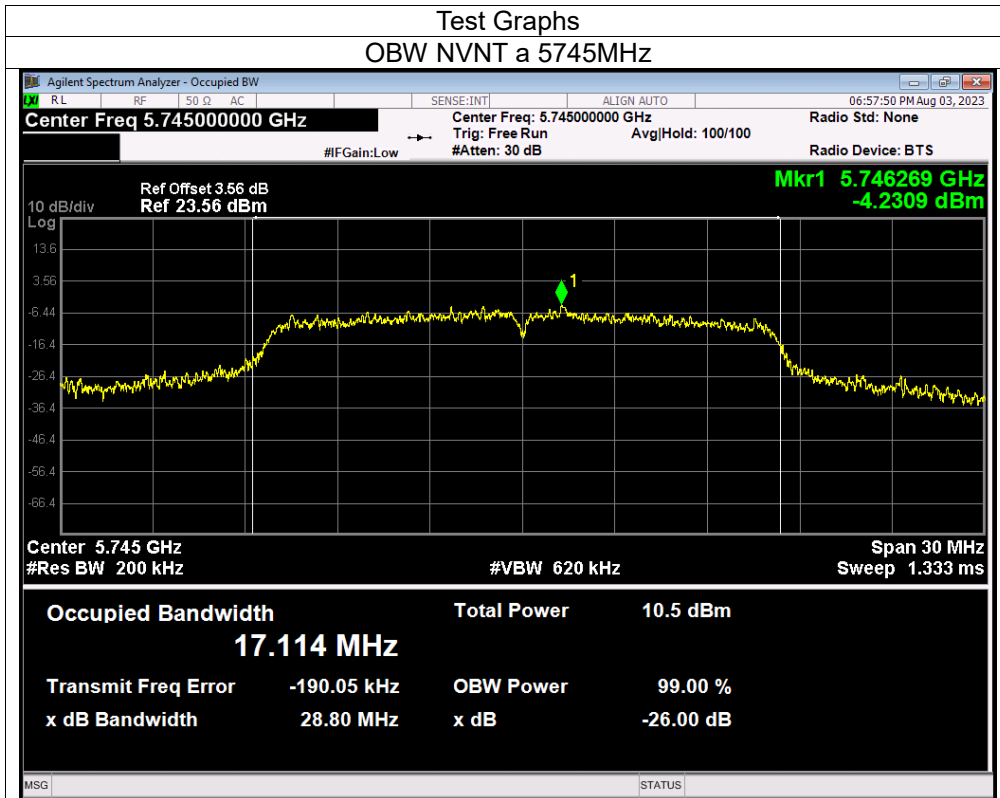






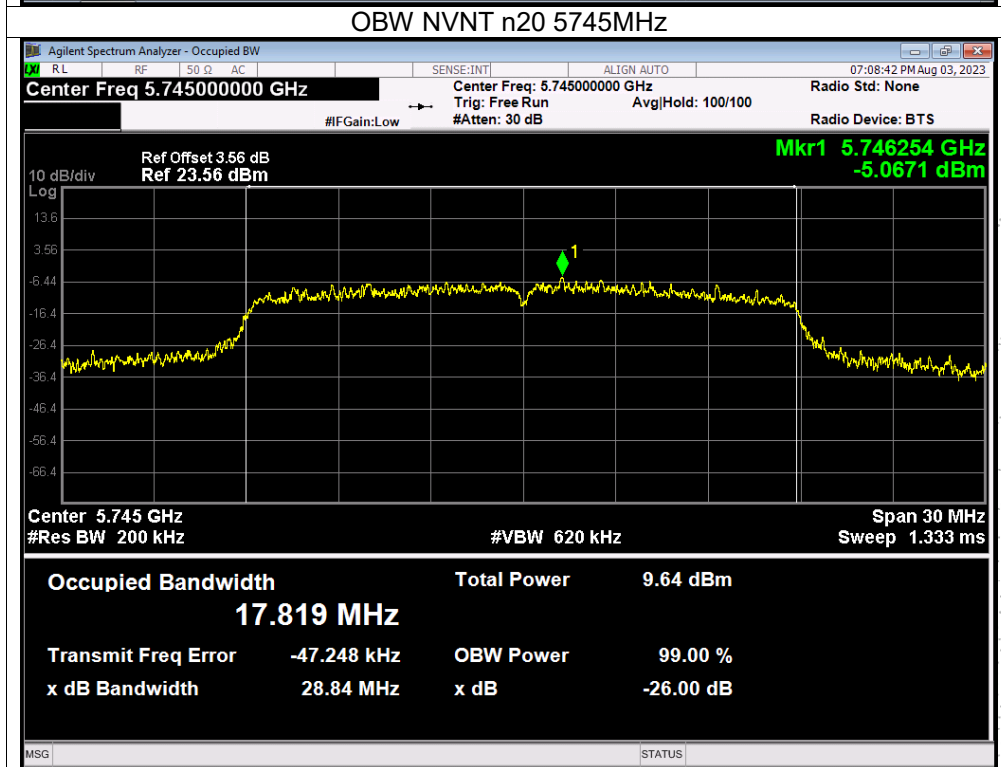
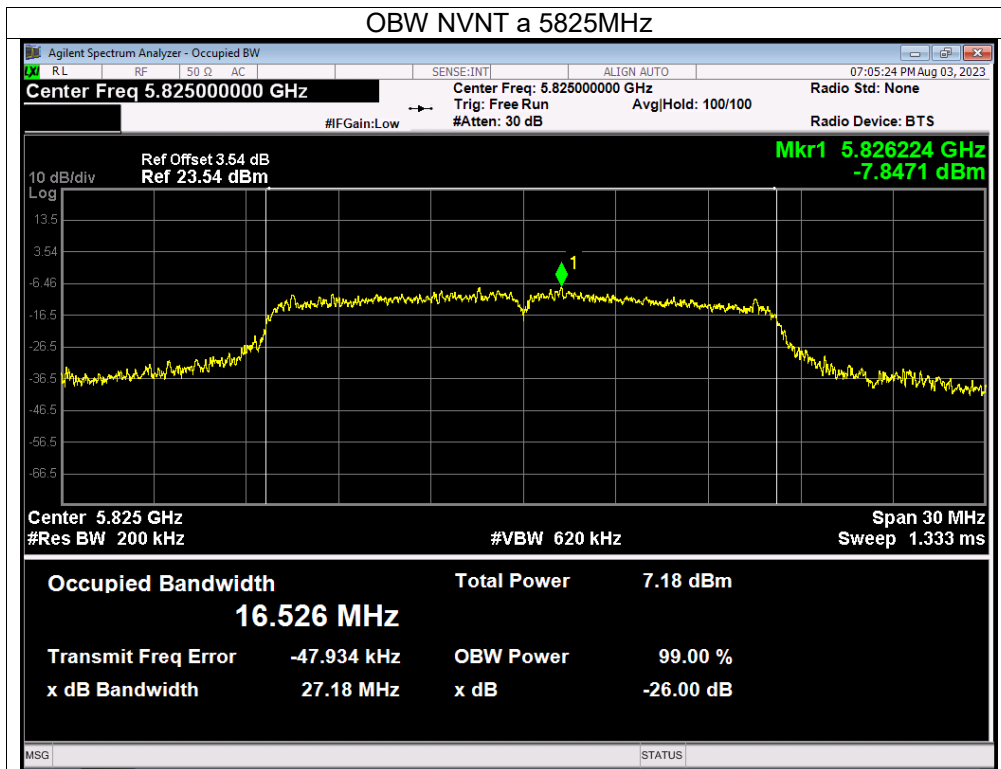


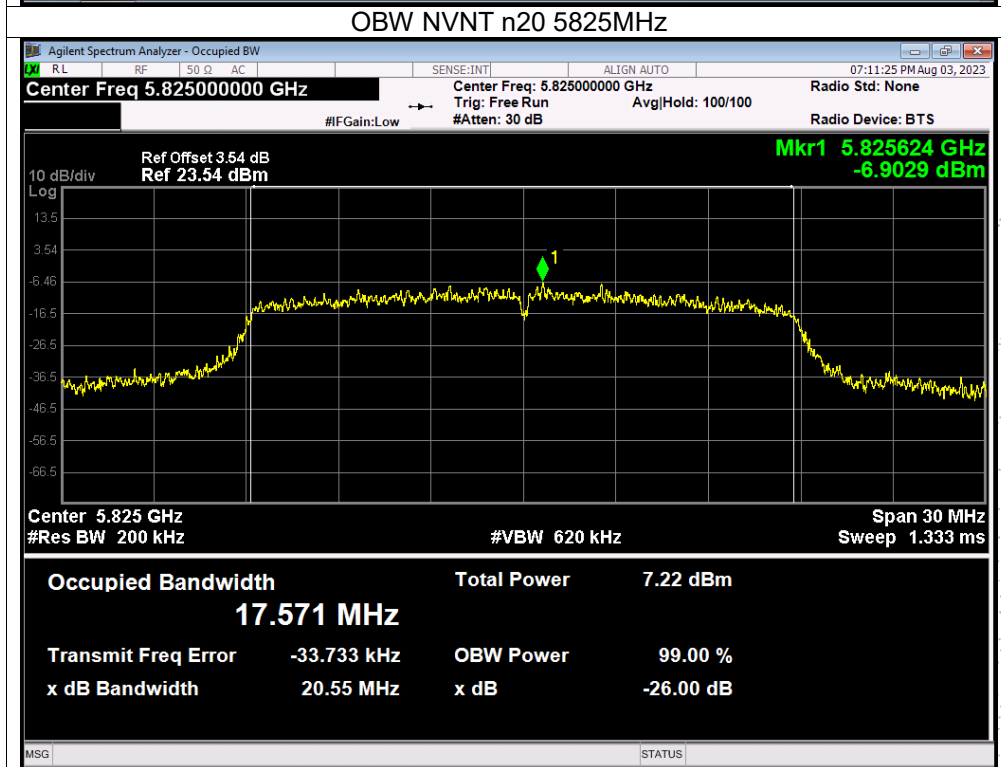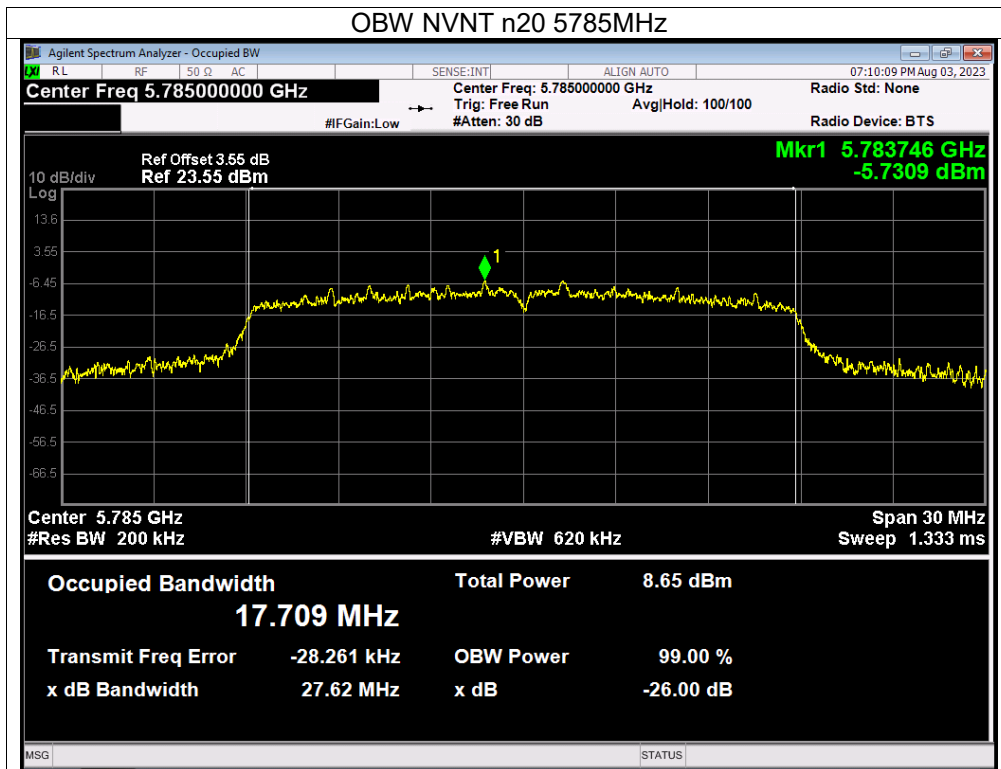

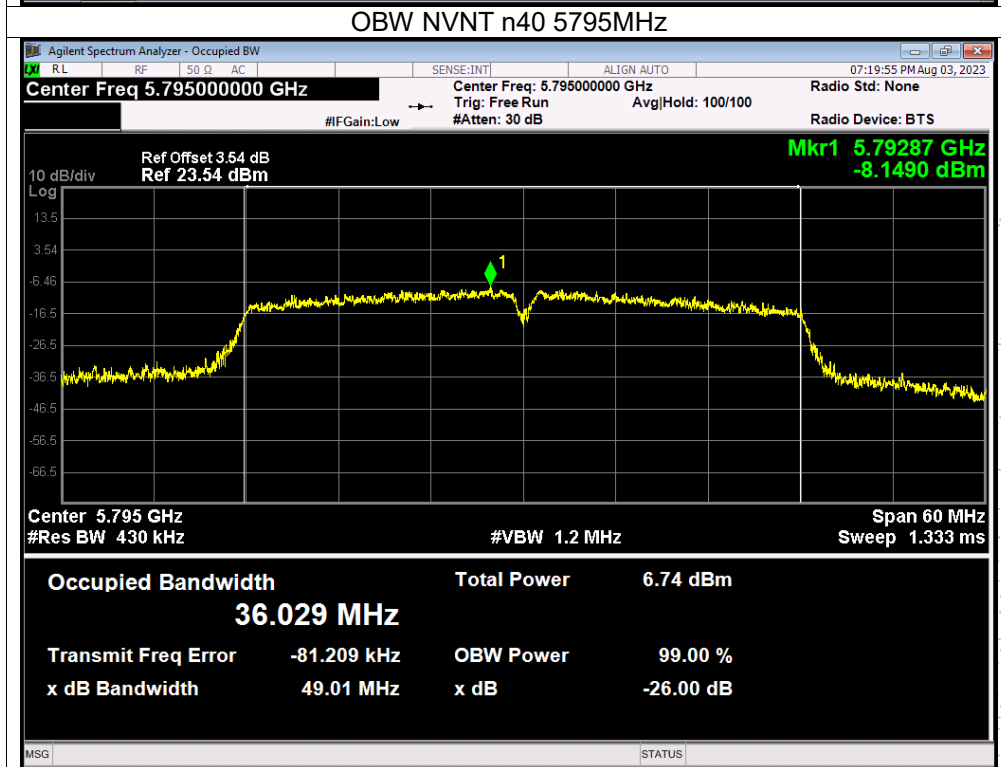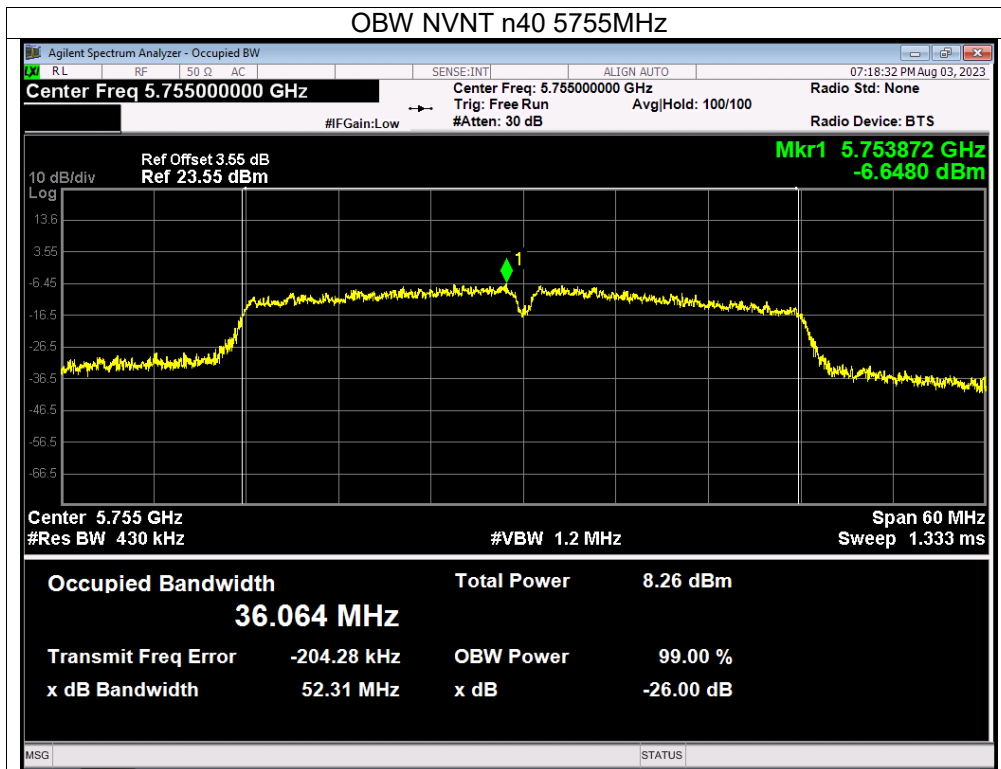

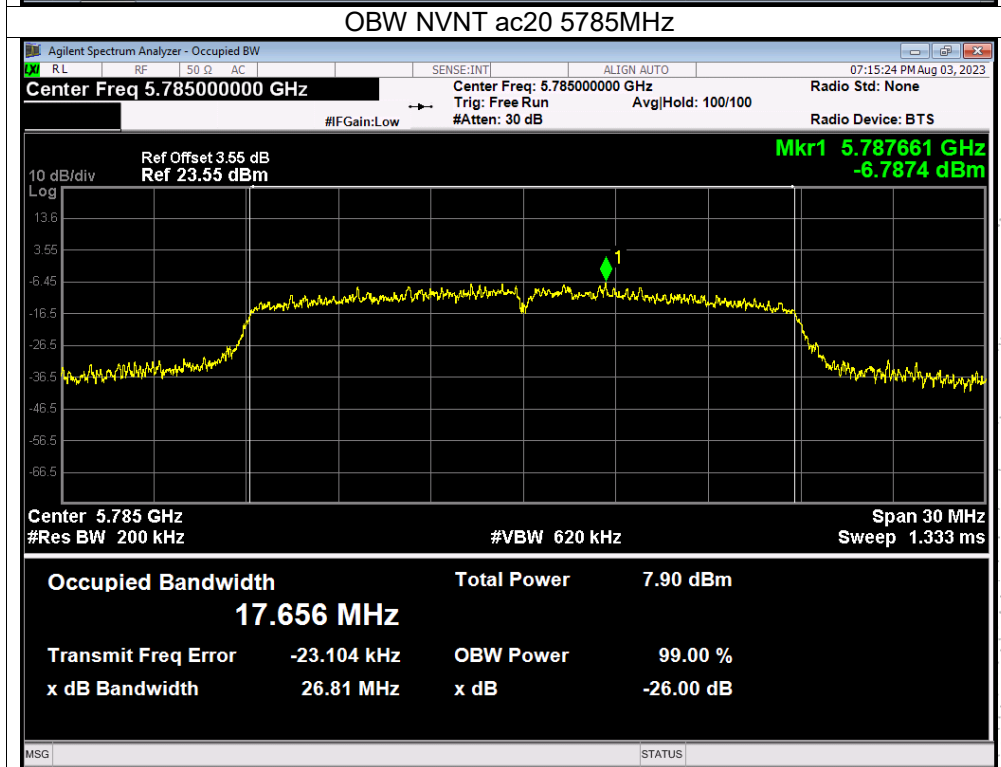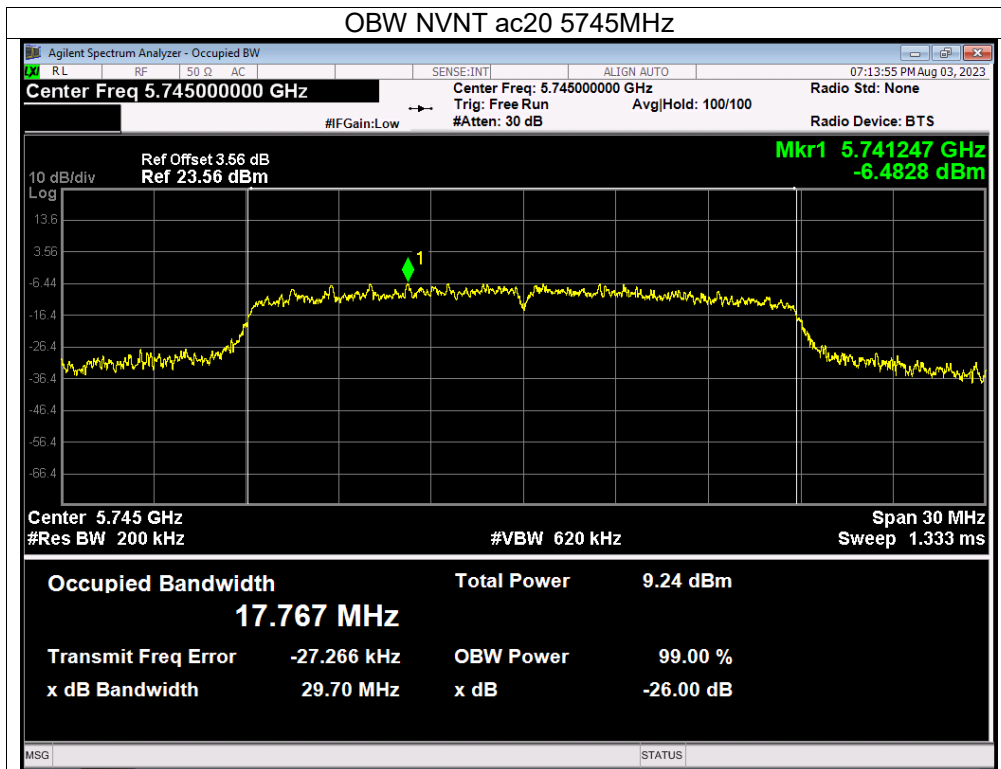

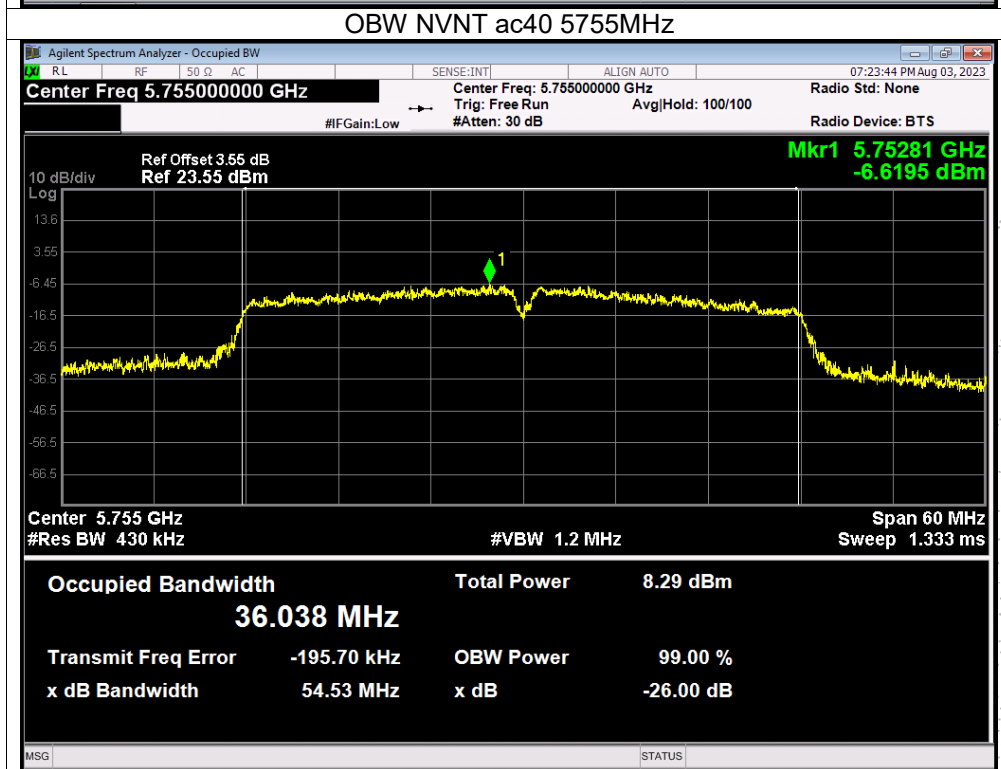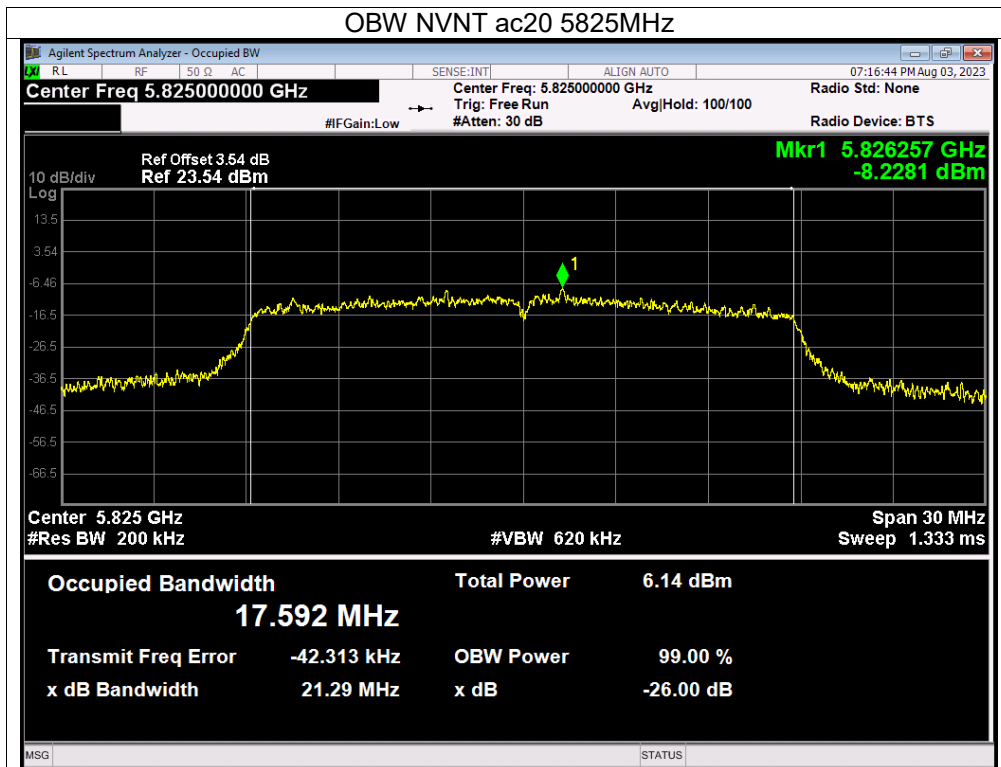

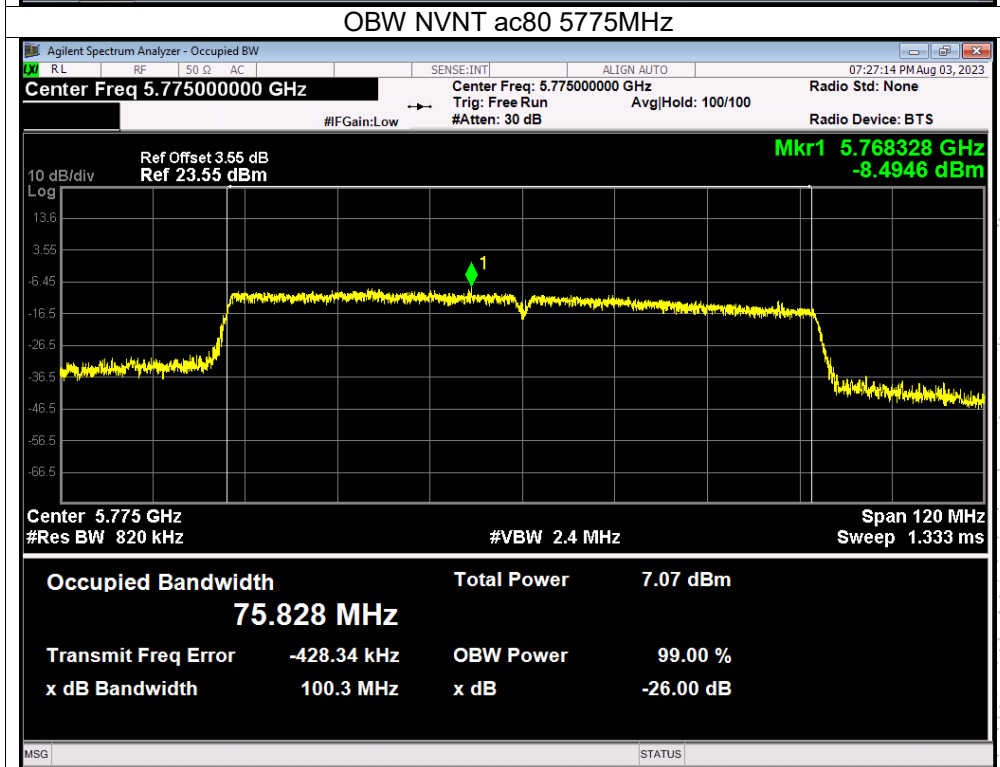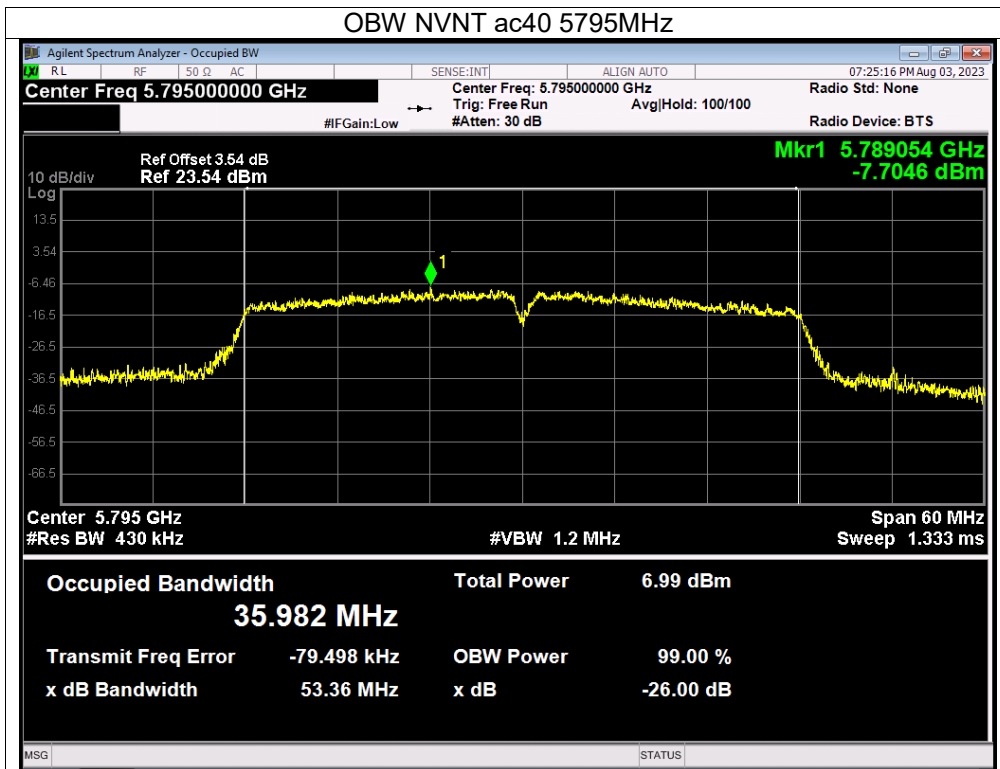

## 10. Maximum Conducted Output Power

### 10.1 Block Diagram Of Test Setup



### 10.2 Limit

#### According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	250mW
5725~5850	1W

### 10.3 Test procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

#### 1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

#### 2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.<sup>1</sup> However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle  $\geq$  98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the

transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than  $\pm 2$  percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW  $\geq 3$  MHz.

(iv) Number of points in sweep  $\geq 2$  Span / RBW. (This ensures that bin-to-bin spacing is  $\leq$  RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle  $< 98$  percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle  $\geq 98$  percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

#### 10.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.