



NOTES:

1: APPLY A MINIMUM TORQUE OF 4.0 IN-LBS TO ITEM 1 FASTNER 2: INSERT ITEM 2 INTO THE COMPLETED PCB HOUSING FOR SHIPPING.


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	99512A159		1
2	182 S	182S - Male Connector	1
3	KB-9992	PCB Housing	1
4	KB-9993	Clamping Arm	1
5	LB-2879	ASSEMBLY, PCB CONTROLLER	1
6	KB-9994	Secured Cover	1
7	ND-8351	UL PRODUCT LABEL	1

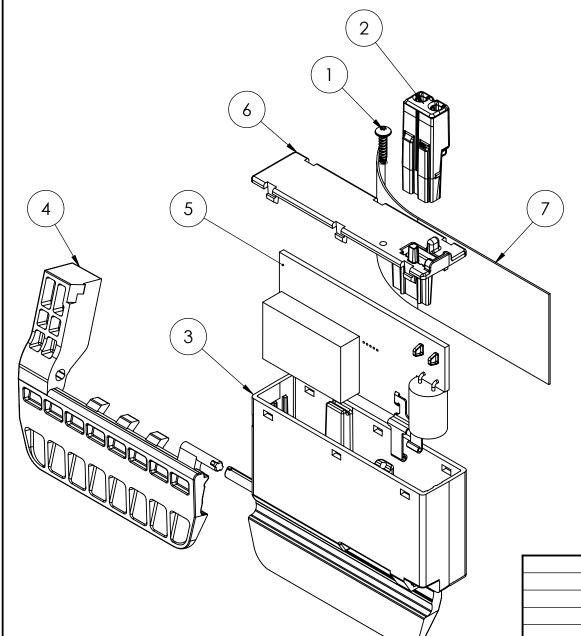

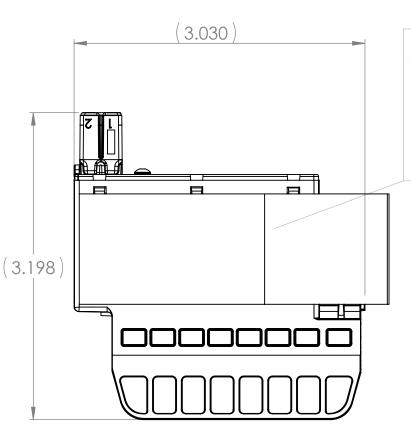

AUDACY M/N: ESCGRID1000 24VDC, 4.1 Amps FCC ID: 2AAMXESCGRID1000 IC: 11250A-ESCGRID1000 (VL) IDEAL INDUSTRIES, INC. LISTED Suspended Ceiling Grid LV Systems & Equipment E470836

S/N: 0E000001

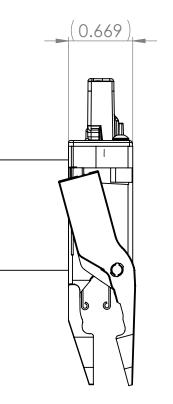

						PROPRIETARY DESIGN - "CONFIDENTIAL" ALL INFORMATION CONTAINED ON THIS DRAWING IS CONFIDENTIAL AND THE SOLE PROPERTY OF IDEAL INDUSTRIES, INC., UNAUTHORIZED COPYING OR DISTRIBUTION OF THIS DOCUMENT IS STRICTLY PROHIBITED. TITLE: ASSEMBLY, ON-GRID CONTROLLER
						UNLESS OTHERWISE SPECIFIED: THIS DRAWING BASED ON ANSI Y 14.5 SURFACE FINISH 125 YON MACHINED SURFACES DIMENSIONS SYMMETRICAL ABOUT CENTER WHERE APPLICABLE ON PLATED PARTSALL DIMENSIONAL LIMITS APPLY AFTER PLATING 59-ESCGRID1000
						DIMENSIONS OF MOLDED PARTS ARE FORFINISHED PART. NOALLOWANCE HAS BEEN MADE FOR SHRINK. HAZARDOUS SUBSTANCE CONTROL: MATL: MATL:
						ANY PRODUCT OR PART THAT CONTAINS LEAD HEXAVALENT CHROMIUM MERCURY CADMIUM, POLYBROMINATED BIPHENYLS, POLYBROMINATED DIPHENYL ETHER, OR OCTABROMO-DIPHENYL ETHER,
						DO NOT SCALE DRAWING TOLERANCES UNLESS PART VOLUME FINISH: APPLIANCE WHITE ALD DIMENSIONS IN INCHES. OTHERWISE SPECIFIED
						APP.BY: OUT 1-CVIDE S APP.BY: APP.BY: APP.BY: APP.BY:
						IDEAL INDUSTRIES, INC. DATE 6/3/2016 PRWG. NO. IA-6123
DATE	BY	ENG	ECN NO.	SYM	ISS	SYCAMORE, ILLINOIS, U.S.A.