



Measurement of RF Interference from a
Model No. 59-IOBRIDGE
4 PORT Contact Closure Toggle Switch Transmitter

For	Ideal Industries, Inc. 1375 Park Avenue Sycamore, IL 60178
P.O. Number	AWS121319EEE
Date Received	January 13, 2020
Date Tested	January 15, 2020 through January 17, 2020
Test Personnel	Mark Longinotti
Specification	FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Digital Modulation Intentional Radiators Operating within the band 902-928MHz ISED Canada RSS-247 ISED Canada RSS-GEN

Test Report By: *MARK E. LONGINOTTI*
Mark Longinotti
EMC Engineer

Requested By: Tim Tunnell
Ideal Industries, Inc.

Approved By: *Raymond J. Klouda*
Raymond J. Klouda
Registered Professional
Engineer of Illinois - 44894

Elite Electronic Engineering Inc.

1516 CENTRE CIRCLE
DOWNS GROVE, IL 60515

TEL: 630 - 495 - 9770

FAX: 630 - 495 - 9785

www.elitetest.com

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1.	INTRODUCTION	5
1.1	Scope of Tests	5
1.2	Purpose	5
1.3	Deviations, Additions and Exclusions	5
1.4	EMC Laboratory Identification	5
1.5	Laboratory Conditions	5
2.	APPLICABLE DOCUMENTS	5
3.	EUT SETUP AND OPERATION	6
3.1	General Description	6
3.1.1	Power Input	6
3.1.2	Peripheral Equipment	6
3.1.3	Interconnect Cables	6
3.1.4	Grounding	6
3.2	Software	6
3.3	Operational Mode	6
3.4	EUT Modifications	7
4.	TEST FACILITY AND TEST INSTRUMENTATION	7
4.1	Shielded Enclosure	7
4.2	Test Instrumentation	7
4.3	Calibration Traceability	7
4.4	Measurement Uncertainty	7
5.	TEST PROCEDURES	7
5.1	Transmitter	7
5.1.1	Powerline Conducted Emissions	7
5.1.1.1	Procedures	8
5.1.1.2	Results	8
5.1.2	6dB Bandwidth	8
5.1.2.1	Requirements	8
5.1.2.2	Procedures	9
5.1.2.3	Results	9
5.1.3	Peak Conducted Output Power	9
5.1.3.1	Requirements	9
5.1.3.2	Procedures	9
5.1.3.3	Results	9
5.1.4	EIRP	9
5.1.4.1	Requirements	9
5.1.4.2	Procedures	9
5.1.4.3	Results	10
5.1.5	Antenna Conducted Spurious Emissions	10
5.1.5.1	Requirements	10
5.1.5.2	Procedures	10
5.1.5.3	Results	10
5.1.6	Radiated Spurious Emissions Measurements	10
5.1.6.1	Requirements	10
5.1.6.2	Procedures	10
5.1.6.3	Results	12
5.1.6.3.1	Transmit at 902.72MHz:	12
5.1.6.3.2	Transmit at 915.04MHz:	12

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.



5.1.6.3.3 Transmit at 927.32MHz: 12

5.1.7 Band Edge Compliance..... 12

5.1.7.1 Requirements 12

5.1.7.2 Procedures 12

5.1.7.2.1 Low Band Edge 12

5.1.7.2.2 High Band Edge..... 13

5.1.7.3 Results..... 13

5.1.8 Power Spectral Density 13

5.1.8.1 Requirement 13

5.1.8.2 Procedures 13

5.1.9 Results..... 13

6. CONCLUSIONS..... 13

7. CERTIFICATION..... 14

8. ENDORSEMENT DISCLAIMER..... 14

9. EQUIPMENT LIST 15

Table 9-1 Equipment List..... 15

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

REVISION HISTORY

Revision	Date	Description
—	20 Jan 2020	Initial release

**Measurement of RF Emissions from a
4 PORT Contact Closure Toggle Switch Transmitter, Model No. 59-IOBRIDGE**

1. INTRODUCTION

1.1 Scope of Tests

This document represents the results of the series of radio interference measurements performed on an Ideal Industries, Inc. 4 PORT Contact Closure Toggle Switch, Model No. 59-IOBRIDGE, (hereinafter referred to as the EUT). Sample #1 was assigned to the EUT used for antenna port conducted tests. Sample #2 was assigned to the EUT used for powerline conducted emissions, EIRP, and spurious radiated emissions tests. The EUT is a digital modulation transmitter. The EUT was designed to transmit in the 902-928 MHz band using a non-removable, trace antenna. The EUT was manufactured and submitted for testing by Ideal Industries, Inc. located in Sycamore, IL.

1.2 Purpose

The test series was performed to determine if the EUT meets the conducted RF emission requirements, radiated RF emissions requirements, and additional provisions of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Intentional Radiators Operating within the 902-928 MHz band.

The test series was also performed to determine if the EUT meets the conducted RF emission requirements, radiated RF emissions requirements, and additional provisions of the Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-Gen Section 8.8 and Innovation, Science, and Economic Development Canada Radio Standards Specification RSS-247 for Transmitters.

Testing was performed in accordance with ANSI C63.10-2013.

1.3 Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series

1.4 EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the American Association for Laboratory Accreditation (A2LA), A2LA Lab Code: 1786-01.

1.5 Laboratory Conditions

The temperature at the time of the test was 24°C and the relative humidity was 22%.

2. APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C
- ANSI C63.4-2014, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- ANSI C63.10-2013, "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices"
- Federal Communications Commission Office of Engineering and Technology Laboratory Division, Guidance For Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating Under Section 15.247 of the FCC Rules

April 2, 2019, KDB 558074

- Innovation, Science, and Economic Development Canada RSS-247, Issue 2, February 2017, "Spectrum Management and Telecommunications Radio Standards Specification, Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs), and License-Exempt Local Area Network (LE-LAN) Devices"
- Innovation, Science, and Economic Development Canada RSS-GEN, Issue 5, March 2019, "Spectrum Management and Telecommunications Radio Standards Specification, General Requirements for Compliance of Radio Apparatus"

3. EUT SETUP AND OPERATION

3.1 General Description

The EUT is a 4 PORT Contact Closure Toggle Switch, Model No. 59-IOBRIDGE. A block diagram of the EUT setup is shown as Figure 1. A photograph of the EUT is shown as Figure 2 and Figure 3.

3.1.1 Power Input

The EUT received 24VDC via two 3.35 meter long wires from the output of a CUI Inc. AC Adapter, P/N: SWI24-24-N-P5, Model No.: SWI24-24-N. The CUI Inc. AC Adapter was powered with 115V, 60Hz power.

3.1.2 Peripheral Equipment

A toggle switch was placed on the J1 cables. The switch is used to change the test frequency between low, mid, and high. The frequency changes when a short is presented to that port on the device.

3.1.3 Interconnect Cables

The EUT was submitted for testing with the following cables:

Port	Description
J1	2 each 1 meter long wires with a toggle switch used to change transmit frequencies
J2	2 each 1 meter long wires (unterminated)
J3	2 each 1 meter long wires (unterminated)
J4	2 each 1 meter long wires (unterminated)

3.1.4 Grounding

The EUT was not grounded.

3.2 Software

For all tests, the EUT had Firmware Version IBRIDGE-CERT loaded onto the device to provide correct load characteristics.

3.3 Operational Mode

The EUT was energized. The unit was programmed to operate in one of the following modes:

- Transmit at 902.72MHz
- Transmit at 915.04MHHz
- Transmit at 927.32MHHz

3.4 EUT Modifications

No modifications were required for compliance.

4. TEST FACILITY AND TEST INSTRUMENTATION

4.1 Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2014 for site attenuation.

4.2 Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1.

4.3 Calibration Traceability

Test equipment is maintained and calibrated on a regular basis with a calibration interval not greater than two years. All calibrations are traceable to the International System Units (SI) through the National Institute of Standards and Technology (NIST).

4.4 Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

Values of Expanded Measurement Uncertainty (95% Confidence) are presented below:

Measurement Type	Expanded Measurement Uncertainty
Conducted disturbance (mains port) (150 kHz – 30 MHz)	2.7
Radiated disturbance (electric field strength on an open area test site or alternative test site) (30 MHz – 1000 MHz)	4.3
Radiated disturbance (electric field strength on an open area test site or alternative test site) (1 GHz – 6 GHz)	3.1
Radiated disturbance (electric field strength on an open area test site or alternative test site) (6 GHz – 18 GHz)	3.2

5. TEST PROCEDURES

5.1 Transmitter

5.1.1 Powerline Conducted Emissions

Per the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Per 15.207(a) and RSS-GEN section 8.8, all radio frequency voltages on the power lines of a transmitter shall be below the values shown below when using a quasi-peak or average detector:

Frequency MHz	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 – 0.5	66 decreasing with logarithm of frequency to 56	56 decreasing with logarithm of frequency to 46
0.5 - 5	56	46
5 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: If the levels measured using the QP detector meet both the QP and the Average limits, the EUT is considered to have met both requirements and measurements do not need to be performed using the Average detector.

5.1.1.1 Procedures

The interference on each power lead of the EUT was measured by connecting the measuring equipment to the appropriate meter terminal of the Line Impedance Stabilization Network (LISN). The meter terminal of the LISN not under test was terminated with 50 ohms.

- a) The EUT was operated in the Transmit at 915.04MHz mode.
- b) Measurements were first made on the 115V, 60Hz high line of the CUI Inc. AC Adapter, P/N: SWI24-24-N-P5, Model No.: SWI24-24-N.
- c) The frequency range from 150 kHz to 30 MHz was broken up into smaller frequency sub-bands.
- d) Conducted emissions measurements were taken on the first frequency sub-band using a peak detector.
- e) The data thus obtained was then searched by the computer for the highest levels. Any emissions levels that were within 10dB of the average limit were then measured again using both a quasi-peak detector and an average detector. (If no peak readings were within 10dB of the average limit, quasi-peak and average readings were taken on the highest emissions levels measured during the peak detector scan.)
- f) Steps (d) and (e) were repeated for the remainder of the frequency sub-bands until the entire frequency range from 150kHz to 30MHz was investigated. The peak trace was automatically plotted. The plot also shows quasi-peak and average readings that were taken on discrete frequencies. A table showing the quasi-peak and average readings was also generated. This tabular data compares the quasi-peak and average conducted emissions to the applicable conducted emissions limits.
- g) Steps (c) through (f) were repeated on the 115V, 60Hz return line of the CUI Inc. AC Adapter, P/N: SWI24-24-N-P5, Model No.: SWI24-24-N.

5.1.1.2 Results

The plots of the peak, quasi-peak, and average conducted voltage levels acquired from each input power line with the EUT operated in the Transmit at 915.04MHz mode are shown on pages 23 and 25. The tabular quasi-peak and average results from each input power line with the EUT operated in the Transmit at 915.04MHz mode are shown on pages 22 and 24. All power line conducted emissions measured from the EUT were within the specification limits. Photographs of the test configuration which yielded the highest or worst case, conducted emission levels are shown in Figure 4.

5.1.2 6dB Bandwidth

5.1.2.1 Requirements

Per 15.247(a)(2) and ISED Canada RSS-247 Section 5.2, the minimum 6dB bandwidth shall be at least 500kHz for all systems using digital modulation techniques.

5.1.2.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 20dB of attenuation. The EUT was allowed to transmit continuously. The transmit channel was set separately to low, middle, and high channels. The resolution bandwidth (RBW) was set to 100kHz, the video bandwidth (VBW) was set to the same as or 3 times greater than the RBW, and the span was set to 3 times the RBW.

The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.

5.1.2.3 Results

The plots on pages 26 through 28 show that the minimum 6 dB bandwidth was 657.4kHz which is greater than the minimum allowable 6dB bandwidth requirement of 500kHz for systems using digital modulation techniques. The 99% bandwidth was measured to be 749.25kHz. Plots of the 99% bandwidths are shown on pages 29 through 31.

5.1.3 Peak Conducted Output Power

5.1.3.1 Requirements

Per section 15.247(b)(3) and ISED Canada RSS-247 Section 5.4, for systems using digital modulation the maximum peak output conducted power shall not be greater than 1.0W (30dBm).

5.1.3.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 20dB of attenuation. The EUT was set to transmit separately at the low, middle, and high channels. The resolution bandwidth (RBW) was set to greater than the 6dB bandwidth. The 'Max-Hold' function was engaged. The maximum meter reading was recorded. The peak power output was calculated for the low, middle and high channels.

5.1.3.3 Results

The results are presented on pages 32 through 34. The maximum peak conducted output power from the transmitter was 0.94mW (-0.26dBm) which is below the 1 Watt limit.

5.1.4 EIRP

5.1.4.1 Requirements

Per section FCC 15.247(b)(2) and ISED Canada RSS-247 section 5.4, for systems using digital modulation operating in the 902-928MHz band, the maximum peak output conducted power shall not be greater than 1W (30dBm). Per section FCC 15.247(b)(4) and ISED Canada RSS-247 section 5.4, this limit is based on the use of antennas with directional gains that do not exceed 6dBi. Since the limit allows for a 6dBi antenna gain, the maximum EIRP can be increased by 6dB to 4 Watt (36dBm).

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below 30dBm by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.1.4.2 Procedures

The EUT was placed on an 80cm high, non-conductive stand and set to transmit. A bilog antenna was placed at a test distance of 3 meters from the EUT. The resolution bandwidth (RBW) of the spectrum analyzer was set to greater than the 6dB bandwidth. The span was set to approximately 5 times the 20 dB bandwidth. The EUT was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the low, middle and high channels.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a dipole antenna was then set in place of the EUT and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the

spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss, as required. The peak power output was calculated for low, middle, and high channels.

5.1.4.3 Results

The results are presented on pages 35 through 37. The maximum EIRP measured from the transmitter was 0.71mW (-1.5dBm) which is below the 4 Watt de facto limit.

5.1.5 Antenna Conducted Spurious Emissions

5.1.5.1 Requirements

Per section FCC 15.247(d) and ISED Canada RSS-247 section 5.5, the spurious emissions in any 100 kHz BW outside the frequency band must be at least 20dB below the highest 100 kHz BW level measured within the band.

5.1.5.2 Procedures

The antenna port of the EUT was connected to the spectrum analyzer through 20dB of attenuation. The resolution bandwidth (RBW) was set to 100kHz. The peak detector and 'Max-Hold' function were engaged. The emissions in the frequency range from 30MHz to 9.5GHz were observed and plotted separately with the EUT transmitting at low, middle and high channels.

5.1.5.3 Results

The results of the antenna conducted emissions levels were plotted. These plots are presented on pages 38 through 40. These plots show that the spurious emissions were at least 20 dB below the level of the fundamental.

5.1.6 Radiated Spurious Emissions Measurements

5.1.6.1 Requirements

Per section 15.247(d) and ISED Canada section 5.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated emissions measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Paragraph 15.209(a) has the following radiated emission limits:

Frequency MHz	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

5.1.6.2 Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All

powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the EUT. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the EUT. The entire frequency range from 30MHz to 10.0GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 10.0GHz.

- 1) For all harmonics not in the restricted bands, the following procedure was used:
 - a) The field strength of the fundamental was measured using a bilog antenna. The bilog antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - c) To ensure that maximum or worst case emission levels at the fundamental and harmonics were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - d) All harmonics not in the restricted bands must be at least 20 dB below levels measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.
- 2) For all emissions in the restricted bands, the following procedure was used:
 - a) The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on an 80cm high non-conductive stand. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the EUT. The EUT was placed on a 1.5 meter high non-conductive stand. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
 - c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The EUT was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
 - e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b)

limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. Therefore, all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).

- f) Next, for all radiated emissions measurements above 1GHz, the resolution bandwidth was set to 1MHz. The analyzer was set to linear mode with a 10Hz video bandwidth in order to simulate an average detector. An average reading was taken.

5.1.6.3 Results

5.1.6.3.1 Transmit at 902.72MHz:

Preliminary radiated emissions plots are shown on pages 41 through 44. Final radiated emissions data are presented on data pages 45 through 47. As can be seen from the data, all emissions measured from the EUT were within the specification limits.

5.1.6.3.2 Transmit at 915.04MHz:

Preliminary radiated emissions plots are shown on pages 48 through 51. Final radiated emissions data are presented on data pages 52 through 54. As can be seen from the data, all emissions measured from the EUT were within the specification limits.

5.1.6.3.3 Transmit at 927.32MHz:

Preliminary radiated emissions plots are shown on pages 55 through 58. Final radiated emissions data are presented on data pages 59 through 61. As can be seen from the data, all emissions measured from the EUT were within the specification limits.

Photographs of the test configuration which yielded the highest or worst case, radiated emission levels are shown in Figure 5 and Figure 6.

5.1.7 Band Edge Compliance

5.1.7.1 Requirements

Per FCC section 15.247(d) and ISED Canada RSS-247 section 5.5, the emissions at the band edges must be at least 20dB below the highest level measured within the band but attenuation below the general limits listed in 15.209(a) is not required.

5.1.7.2 Procedures

5.1.7.2.1 Low Band Edge

- 1) The antenna port of the EUT was connected to the spectrum analyzer through 20dB of attenuation.
- 2) The EUT was set to transmit continuously at the channel closest to the low band edge.
- 3) To determine the band edge compliance, the following spectrum analyzer settings were used:
 - a. Center frequency = low band edge frequency.
 - b. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
 - c. Resolution bandwidth (RBW) = 100kHz.
 - d. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
 - e. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band edge) must be below the display line.)

- f. The analyzer's display was plotted using a 'screen dump' utility.

5.1.7.2.2 High Band Edge

- 1) The antenna port of the EUT was connected to the spectrum analyzer through 20dB of attenuation.
- 2) The EUT was set to transmit continuously at the channel closest to the high band edge.
- 3) To determine the band edge compliance, the following spectrum analyzer settings were used:
 - g. Center frequency = high band edge frequency.
 - h. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation.
 - i. Resolution bandwidth (RBW) = 100kHz.
 - j. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
 - k. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the right of the center frequency (band edge) must be below the display line.)
 - l. The analyzer's display was plotted using a 'screen dump' utility.

5.1.7.3 Results

Pages 62 and 63 show the conducted band edge compliance results. As can be seen from these plots, the emissions at the low end band edge and the high end band edge are within the 20 dB down limits.

5.1.8 Power Spectral Density

5.1.8.1 Requirement

Per section 15.247(e) and ISED Canada RSS-247 section 5.2(b), the peak power spectral density from the intentional radiator shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.1.8.2 Procedures

- 1) The antenna port of the EUT was connected to the spectrum analyzer through a 20dB pad.
- 2) The EUT was set to transmit separately at the low, middle, and high channels.
- 3) To determine the power spectral density, the following spectrum analyzer settings were used:
 - a. Center frequency = transmit frequency
 - b. Span = 1.5 times the DTS (6 dB) bandwidth
 - c. Resolution bandwidth (RBW): $3\text{kHz} \leq \text{RBW} \leq 100\text{kHz}$
 - d. Sweep time = auto
 - e. The peak detector and 'Max-Hold' function was engaged.
 - f. The display line represents the 8 dBm limit
 - g. The analyzer's display was plotted using a 'screen dump' utility.
- 4) If measured value exceeds limit, reduce RBW (no less than 3kHz) and repeat.

5.1.9 Results

Pages 64 through 66 show the power spectral density results. As can be seen from these plots, the peak power spectral density is less than 8dBm in a 3kHz band during any time interval of continuous transmission.

6. CONCLUSIONS

It was determined that the Ideal Industries, Inc. 4 PORT Contact Closure Toggle Switch, Model No. 59-IOBRIDGE digital modulation transmitter, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Intentional Radiators

Operating within the 902-928 MHz, band, when tested per ANSI C63.10-2013.

It was also determined that the Ideal Industries, Inc. 4 PORT Contact Closure Toggle Switch, Model No. 59-IOBRIDGE, digital modulation transmitter did fully meet the conducted and radiated RF emission requirements of the Innovation, Science, and Economic Development Canada Radio Standards Specification, RSS-Gen Section 8.8 and Radio Standards Specification RSS-247 for transmitters, when tested per ANSI C63.10-2013.

7. CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the EUT at the test date. Any electrical or mechanical modification made to the EUT subsequent to the specified test date will serve to invalidate the data and void this certification.

8. ENDORSEMENT DISCLAIMER

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST or any agency of the Federal Government.

9. EQUIPMENT LIST

Table 9-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW10	PREAMPLIFIER	PMI	PE2-35-120-5R0-10-12-SFF	PL9609/1139	1GHZ-20GHZ	4/8/2019	4/8/2020
CDX8	COMPUTER	ELITE	WORKSTATION			N/A	
GRE2	SIGNAL GENERATOR	AGILENT	E4438C	MY42081749	250KHZ-6GHZ	2/28/2019	2/28/2020
NDQ0	TUNED DIPOLE ANTENNA	EMCO	3121C-DB4	311	400-1000MHZ	5/8/2018	5/8/2020
NTA4	BILOG ANTENNA	TESEQ	6112D	46660	20-2000GHZ	9/23/2019	9/23/2020
NWQ1	DOUBLE RIDGED WAVEGUIDE ANTENNA	ETS-LINDGREN	3117	66655	1GHZ-18GHZ	4/10/2018	4/10/2020
PLF2	CISPR16 50UH LISN	ELITE	CISPR16/70A	002	.15-30MHz	4/23/2019	4/23/2020
PLF4	CISPR16 50UH LISN	ELITE	CISPR16/70A	003	.15-30MHz	4/23/2019	4/23/2020
RBG2	EMI ANALYZER	ROHDE & SCHWARZ	ESW44	101591	2HZ-44GHZ	2/21/2019	2/21/2020
T1E0	10DB 25W ATTENUATOR	WEINSCHEL	46-10-43	AU1882	DC-18GHZ	4/30/2018	4/30/2020
T2DN	20DB, 25W ATTENUATOR	WEINSCHEL	46-20-34	BS2147	DC-18GHZ	4/23/2018	4/23/2020
VBR8	CISPR EN FCC CE VOLTAGE.exe					N/A	
WKA1	SOFTWARE, UNIVERSAL RCV EMI	ELITE	UNIV_RCV_EMI	1	---	I/O	

N/A: Not Applicable

I/O: Initial Only

CNR: Calibration Not Required

NOTE 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

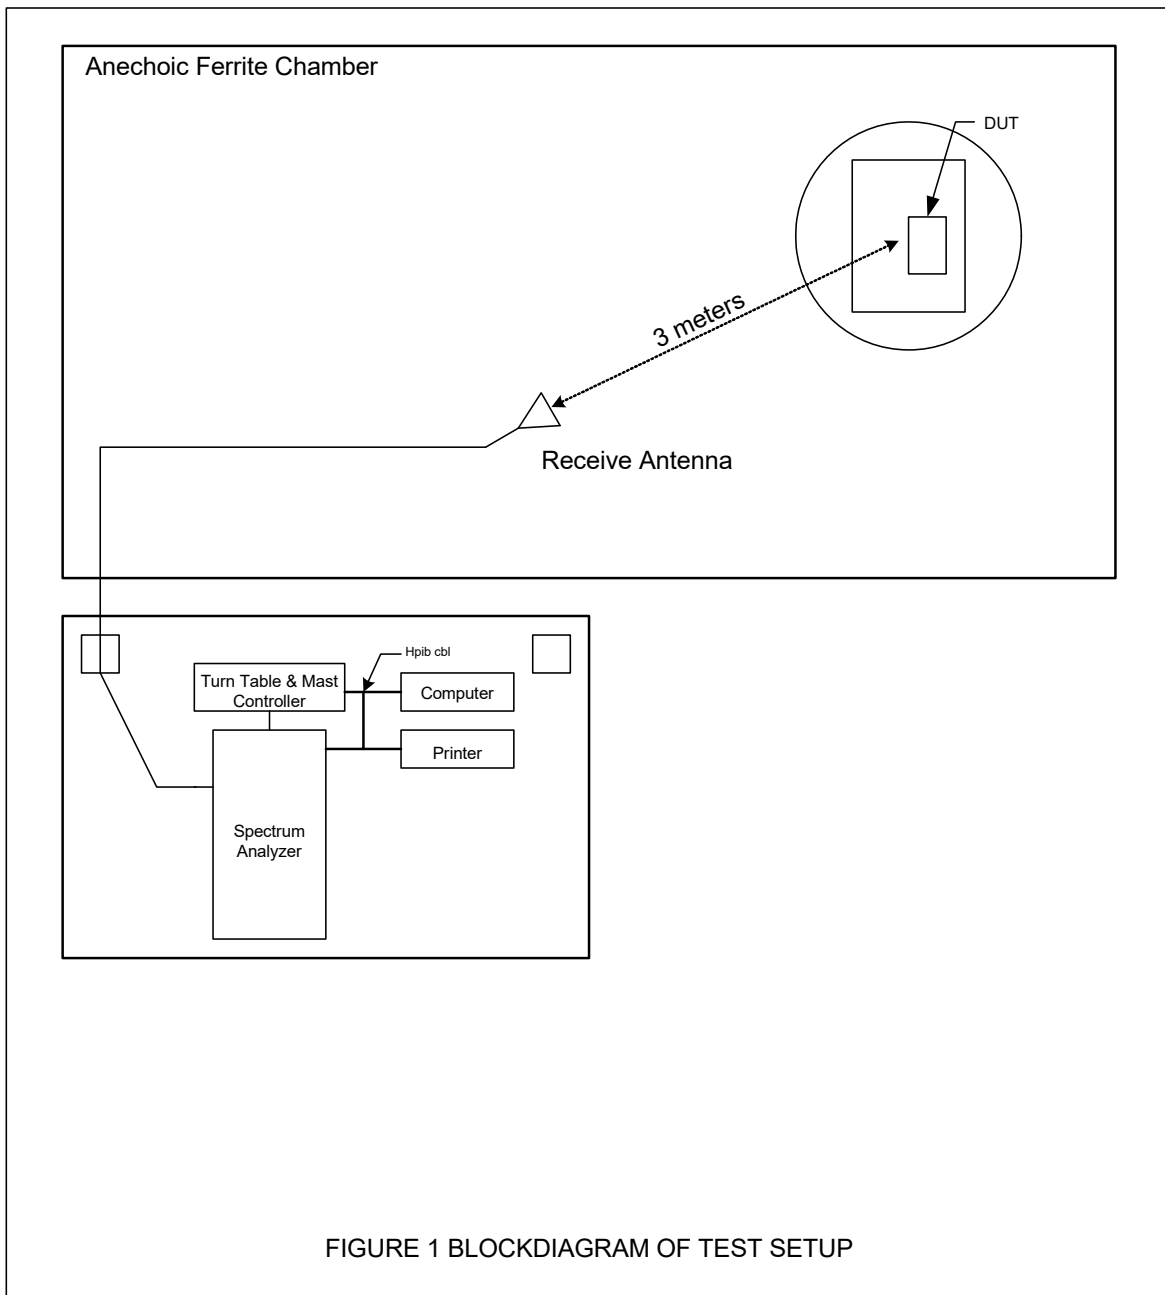


Figure 2



Photograph of EUT



Photograph of EUT

Figure 3




Photograph of EUT

Figure 4



Test Setup for Conducted Emissions

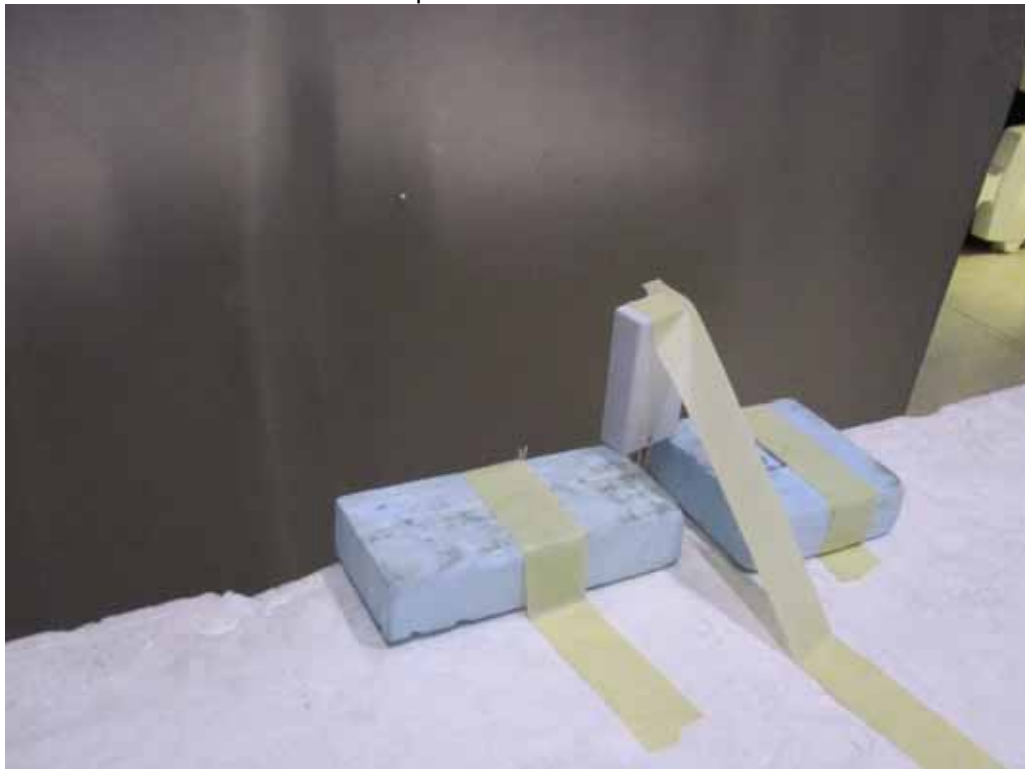


Test Setup for Conducted Emissions

Figure 5




Test Setup for Radiated Emissions – 30MHz to 1GHz, Horizontal Polarization

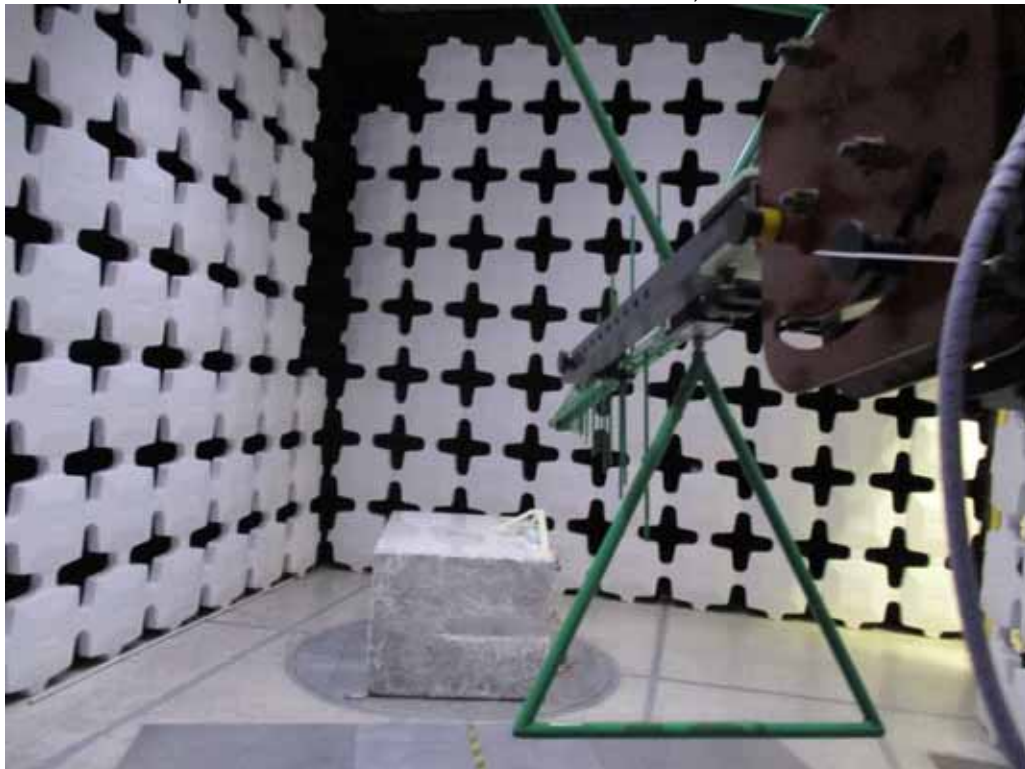


Test Setup for Radiated Emissions – 30MHz to 1GHz, Vertical Polarization

Figure 6

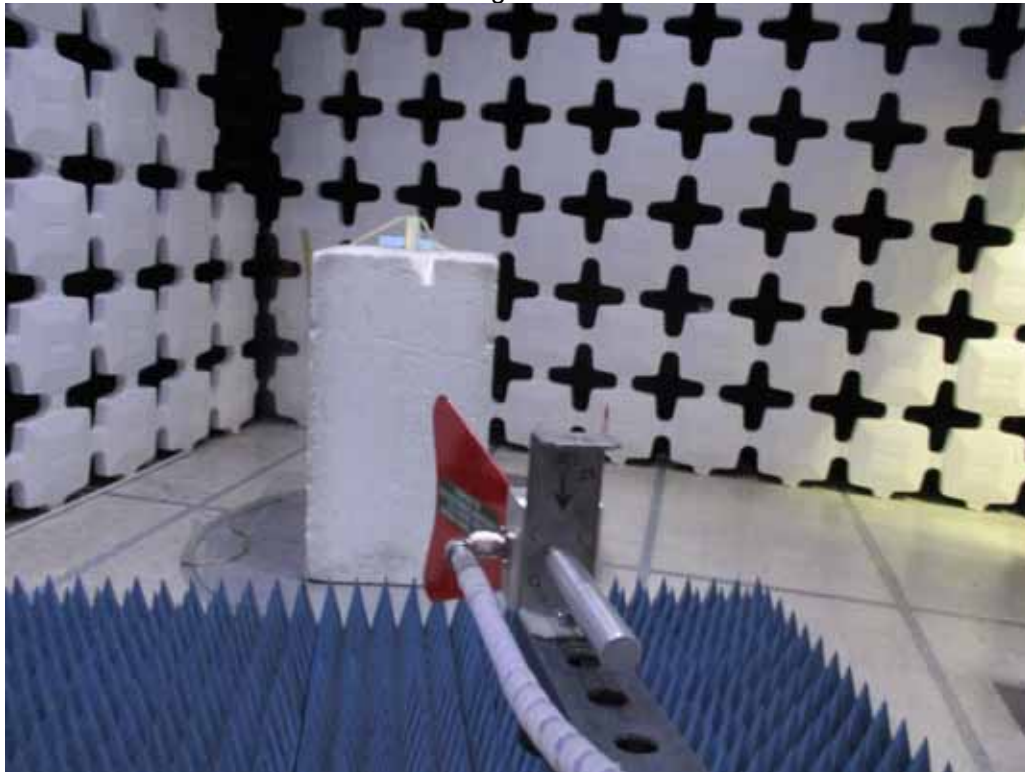

Test Setup for Radiated Emissions Above 1GHz, Horizontal Polarization

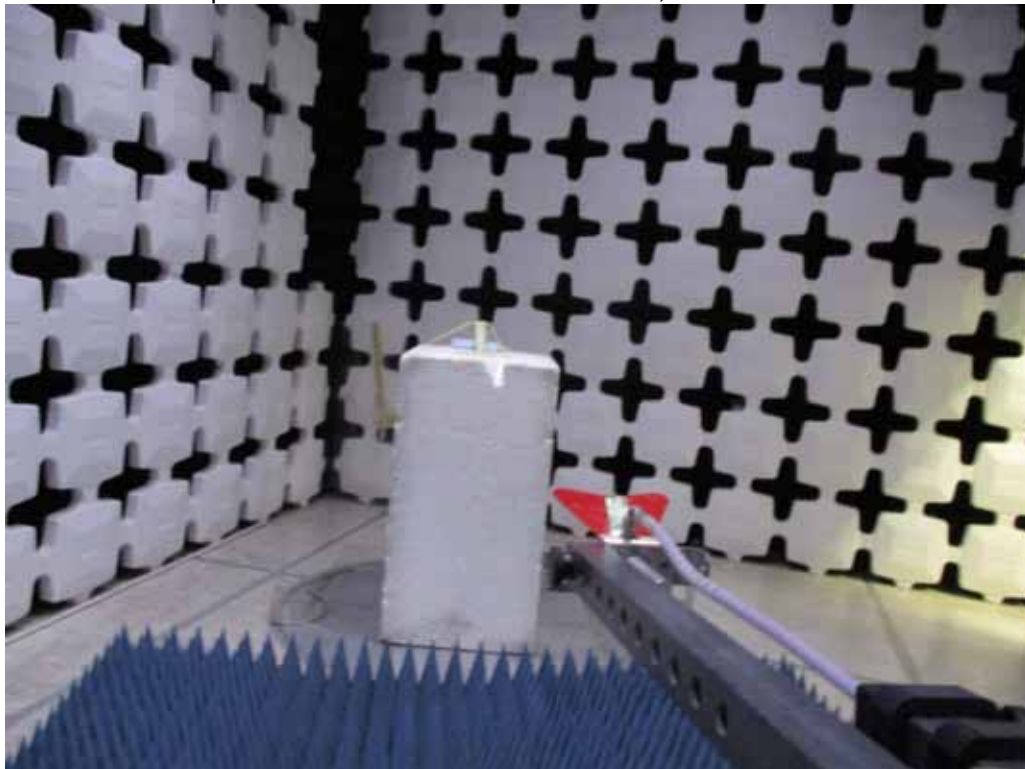

Test Setup for Radiated Emissions Above 1GHz, Vertical Polarization



FCC Part 15 Subpart B Conducted Emissions Test Significant Emissions Data

VBR8 01/08/2020


Manufacturer : IDEAL INDUSTRIES INC.
Model : 59-IBRIDGE
DUT Revision :
Serial Number : Sample #2
DUT Mode : TRANSMIT AT 915.04MHz
Line Tested : 115V, 60Hz HIGH
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -4
Notes : TESTED WITH A CUI AC ADAPTER, P/N: SWI24-24-N-P5
Test Engineer : M. Longinotti
Limit : Class B
Test Date : Jan 16, 2020 09:36:27 AM
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 4 dB margin below limit

Freq MHz	Quasi-peak Level dB μ V	Quasi-peak Limit dB μ V	Excessive Quasi-peak Emissions	Average Level dB μ V	Average Limit dB μ V	Excessive Average Emissions
0.159	43.2	65.5		26.1	55.5	
0.284	33.3	60.7		16.7	50.7	
0.509	33.3	56.0		19.7	46.0	
1.137	17.0	56.0		8.4	46.0	
1.565	15.8	56.0		7.1	46.0	
2.439	15.6	56.0		8.5	46.0	
5.000	20.6	56.0		10.0	46.0	
9.257	19.6	60.0		9.2	50.0	
23.977	16.4	60.0		8.4	50.0	

FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 01/08/2020

Manufacturer : IDEAL INDUSTRIES INC.
 Model : 59-IBRIDGE
 DUT Revision :
 Serial Number : Sample #2
 DUT Mode : TRANSMIT AT 915.04MHz
 Line Tested : 115V, 60Hz HIGH
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : TESTED WITH A CUI AC ADAPTER, P/N: SWI24-24-N-P5
 Test Engineer : M. Longinotti
 Limit : Class B
 Test Date : Jan 16, 2020 09:36:27 AM

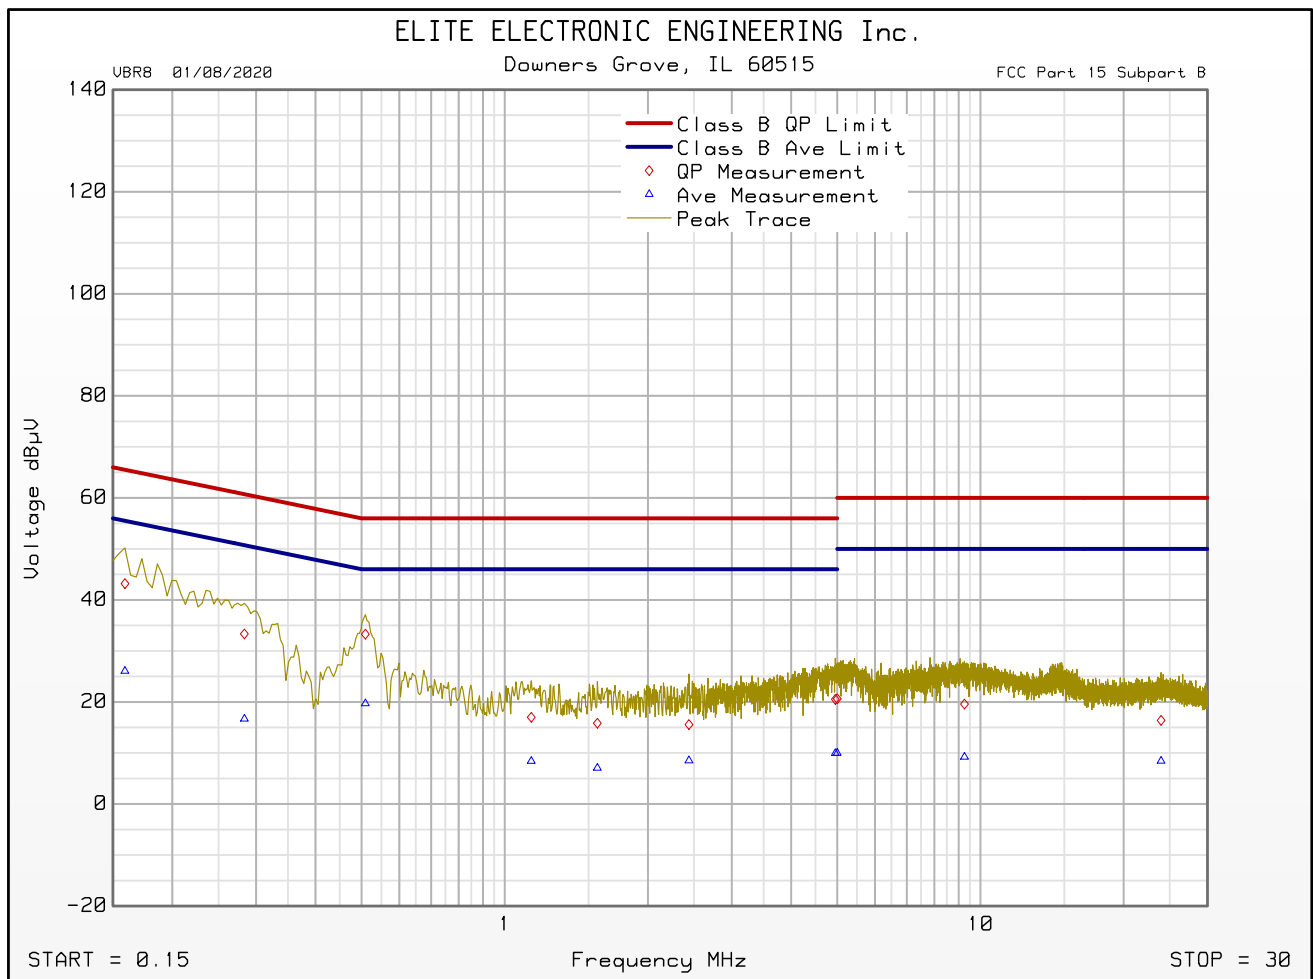

Emissions Meet QP Limit
 Emissions Meet Ave Limit



FCC Part 15 Subpart B Conducted Emissions Test Significant Emissions Data

VBR8 01/08/2020


Manufacturer : IDEAL INDUSTRIES INC.
Model : 59-IBRIDGE
DUT Revision :
Serial Number : Sample #2
DUT Mode : TRANSMIT AT 915.04MHz
Line Tested : 115V, 60Hz RETURN
Scan Step Time [ms] : 30
Meas. Threshold [dB] : -4
Notes : TESTED WITH A CUI AC ADAPTER, P/N: SWI24-24-N-P5
Test Engineer : M. Longinotti
Limit : Class B
Test Date : Jan 16, 2020 09:24:32 AM
Data Filter : Up to 80 maximum levels detected with 6 dB level excursion threshold over 4 dB margin below limit

Freq MHz	Quasi-peak Level dB μ V	Quasi-peak Limit dB μ V	Excessive Quasi-peak Emissions	Average Level dB μ V	Average Limit dB μ V	Excessive Average Emissions
0.150	44.3	66.0		25.6	56.0	
0.500	33.4	56.0		18.4	46.0	
0.509	35.5	56.0		18.1	46.0	
0.795	17.7	56.0		8.5	46.0	
1.669	15.6	56.0		7.6	46.0	
2.408	14.8	56.0		7.2	46.0	
4.994	20.9	56.0		10.3	46.0	
5.158	21.2	60.0		8.5	50.0	
9.284	20.2	60.0		9.1	50.0	
23.774	17.1	60.0		7.9	50.0	


FCC Part 15 Subpart B Conducted Emissions Test Cumulative Data

VBR8 01/08/2020

Manufacturer : IDEAL INDUSTRIES INC.
 Model : 59-IBRIDGE
 DUT Revision :
 Serial Number : Sample #2
 DUT Mode : TRANSMIT AT 915.04MHz
 Line Tested : 115V, 60Hz RETURN
 Scan Step Time [ms] : 30
 Meas. Threshold [dB] : -4
 Notes : TESTED WITH A CUI AC ADAPTER, P/N: SWI24-24-N-P5
 Test Engineer : M. Longinotti
 Limit : Class B
 Test Date : Jan 16, 2020 09:24:32 AM

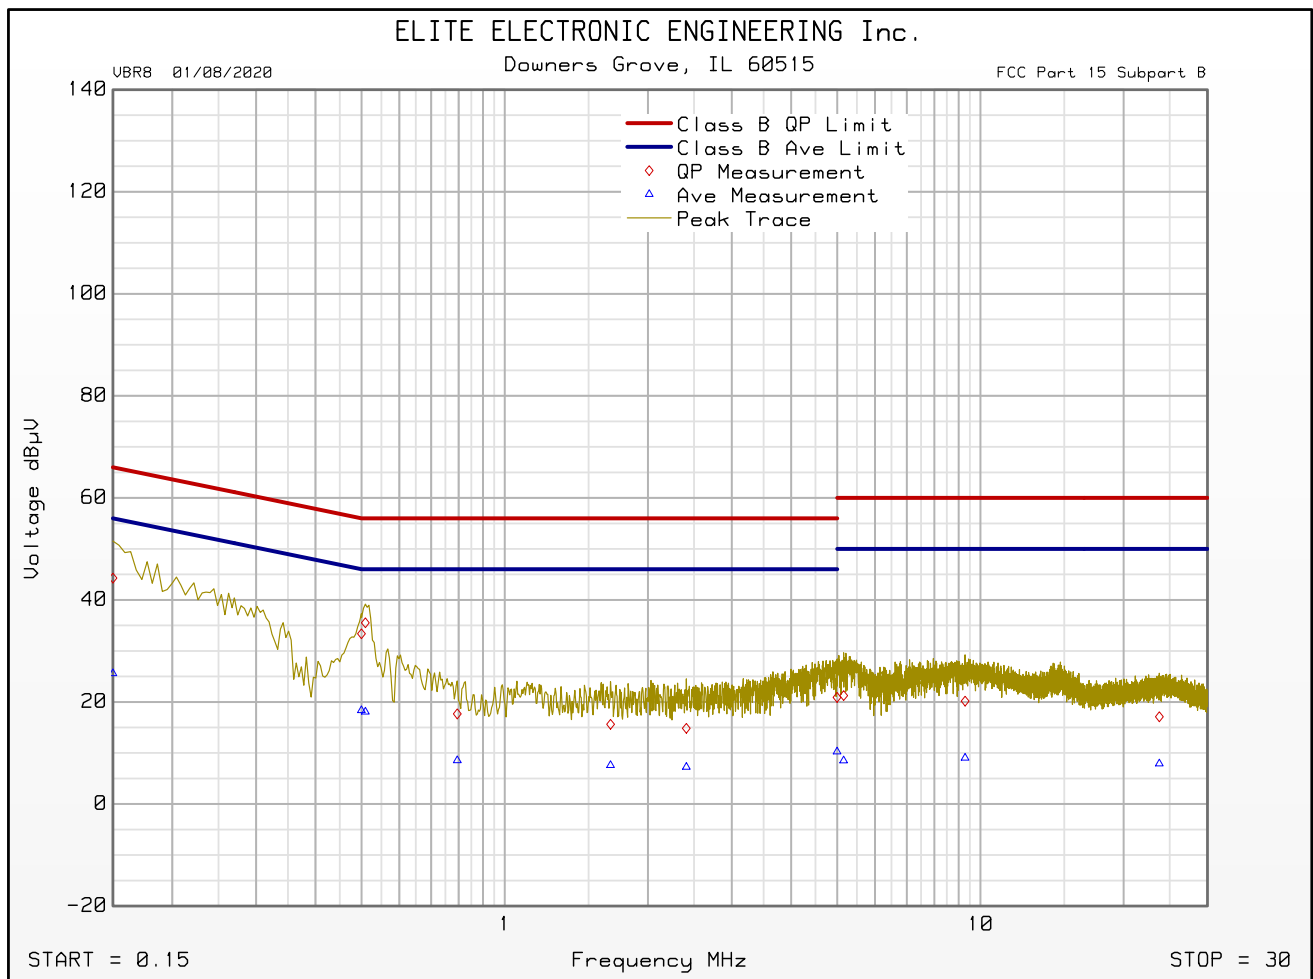


Emissions Meet QP Limit
 Emissions Meet Ave Limit

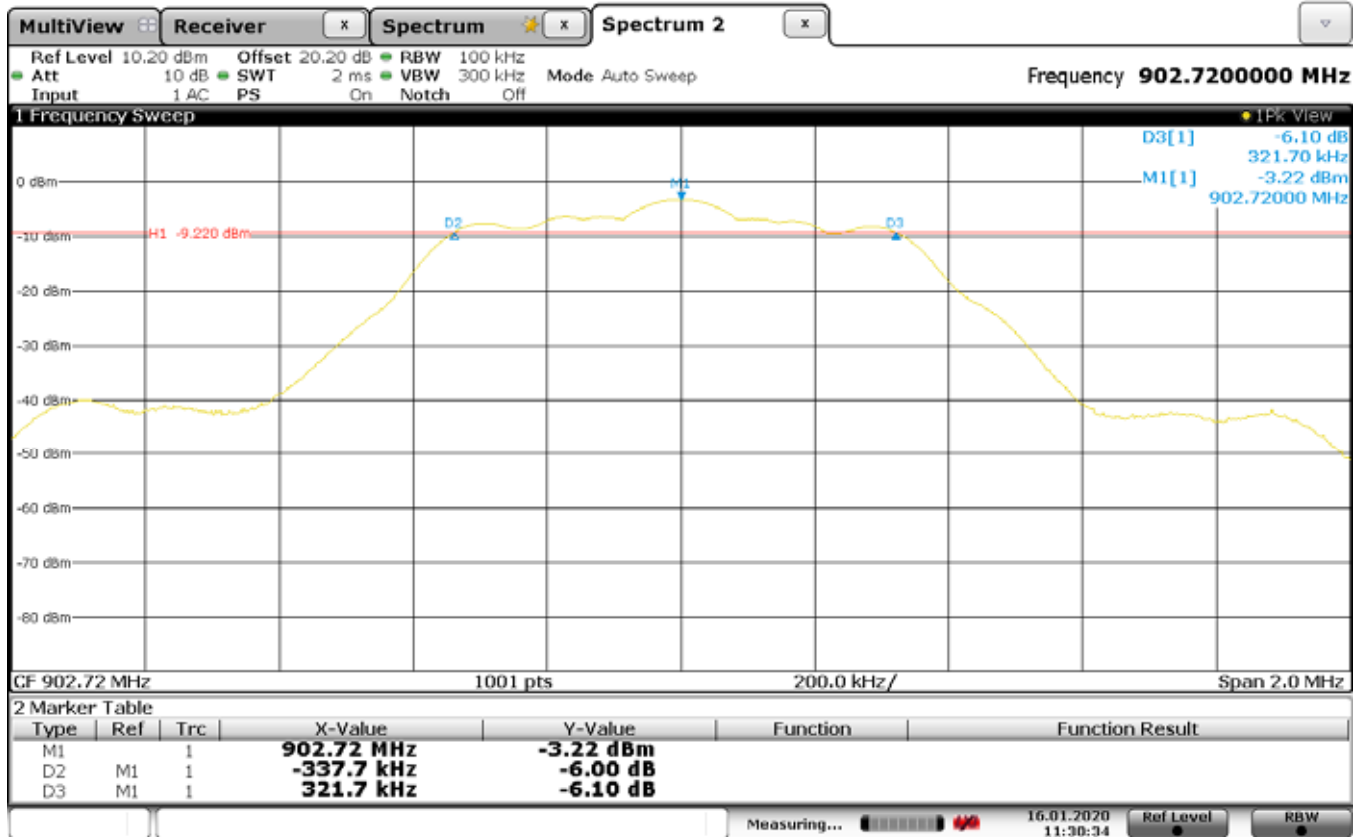

Date: 16 JAN 2020 11:30:34

DTS Bandwidth (6 dB Bandwidth)


Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 902.72MHz
 Line Tested : Antenna Port
 Notes : 6 dB bandwidth = 337.7kHz + 321.7kHz = 659.4kHz

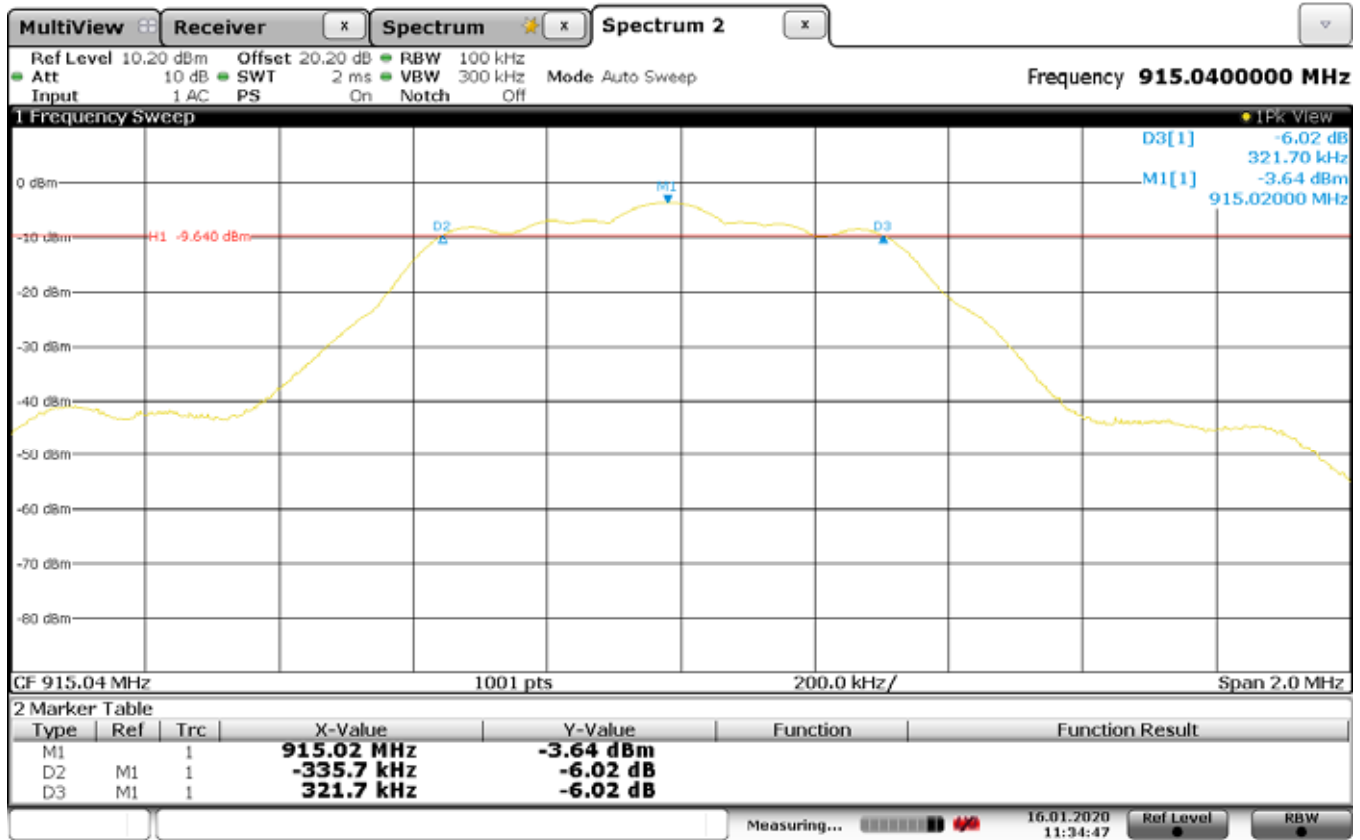

Date: 16 JAN 2020 11:34:47

DTS Bandwidth (6 dB Bandwidth)


Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 915.02MHz
 Line Tested : Antenna Port
 Notes : 6 dB bandwidth = 335.7kHz + 321.7kHz = 657.4kHz

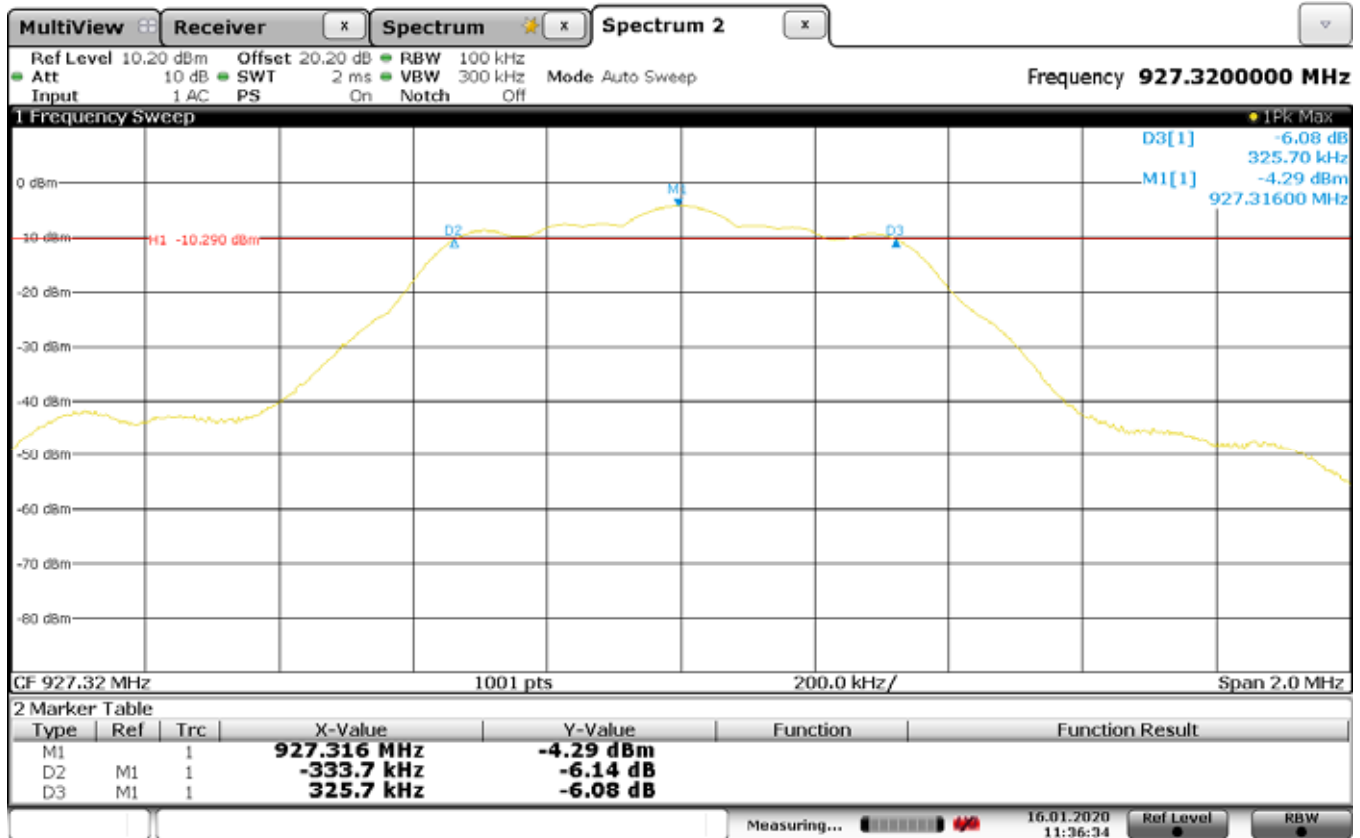

Date: 16 JAN 2020 11:36:34

DTS Bandwidth (6 dB Bandwidth)


Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 927.32MHz
 Line Tested : Antenna Port
 Notes : 6 dB bandwidth = 333.7kHz + 325.7kHz = 659.4kHz

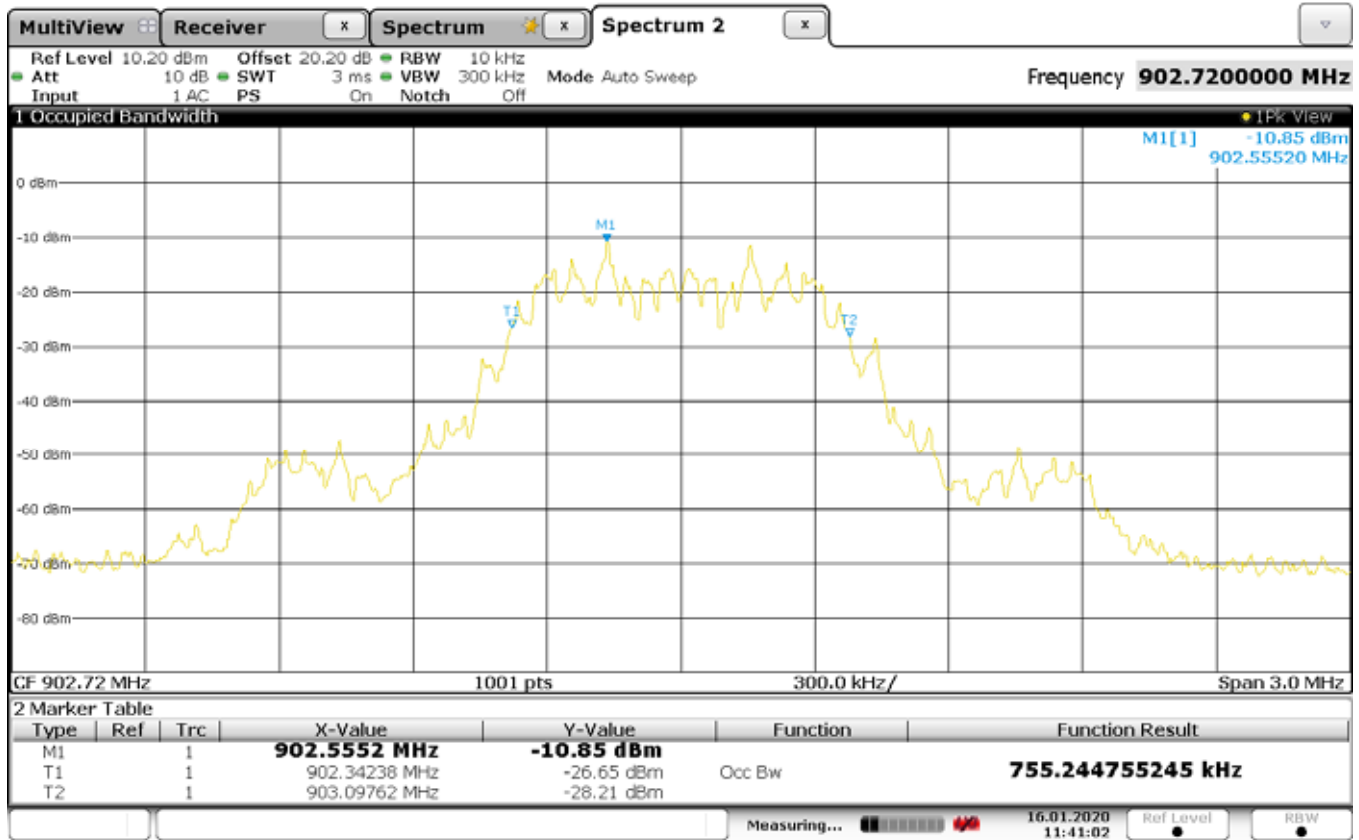

Date: 16 JAN 2020 11:41:02

99% Bandwidth


Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 902.72MHz
 Line Tested : Antenna Port
 Notes : 99% bandwidth = 755.24kHz

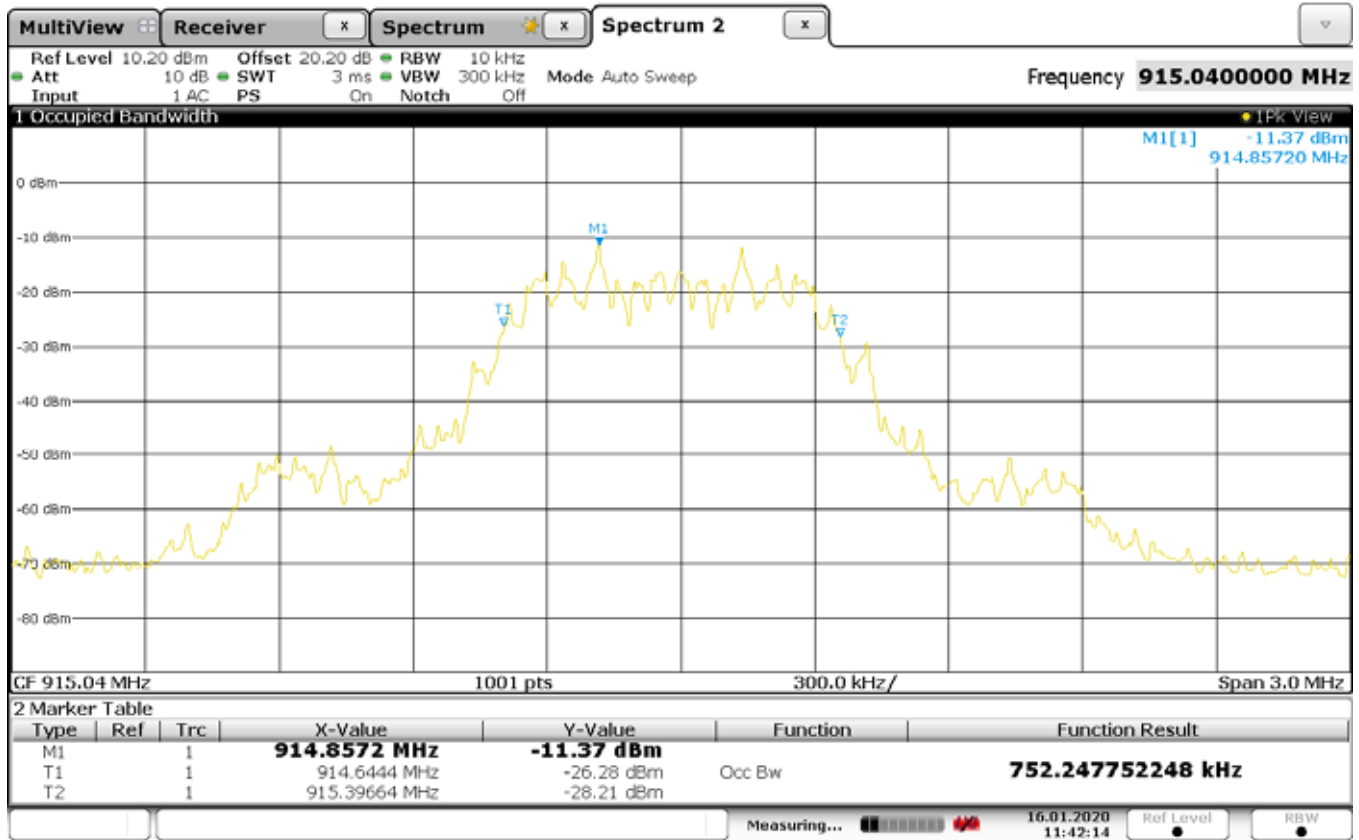

Date: 16 JAN 2020 11:42:13

99% Bandwidth


Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 915.04MHz
 Line Tested : Antenna Port
 Notes : 99% bandwidth = 752.25kHz

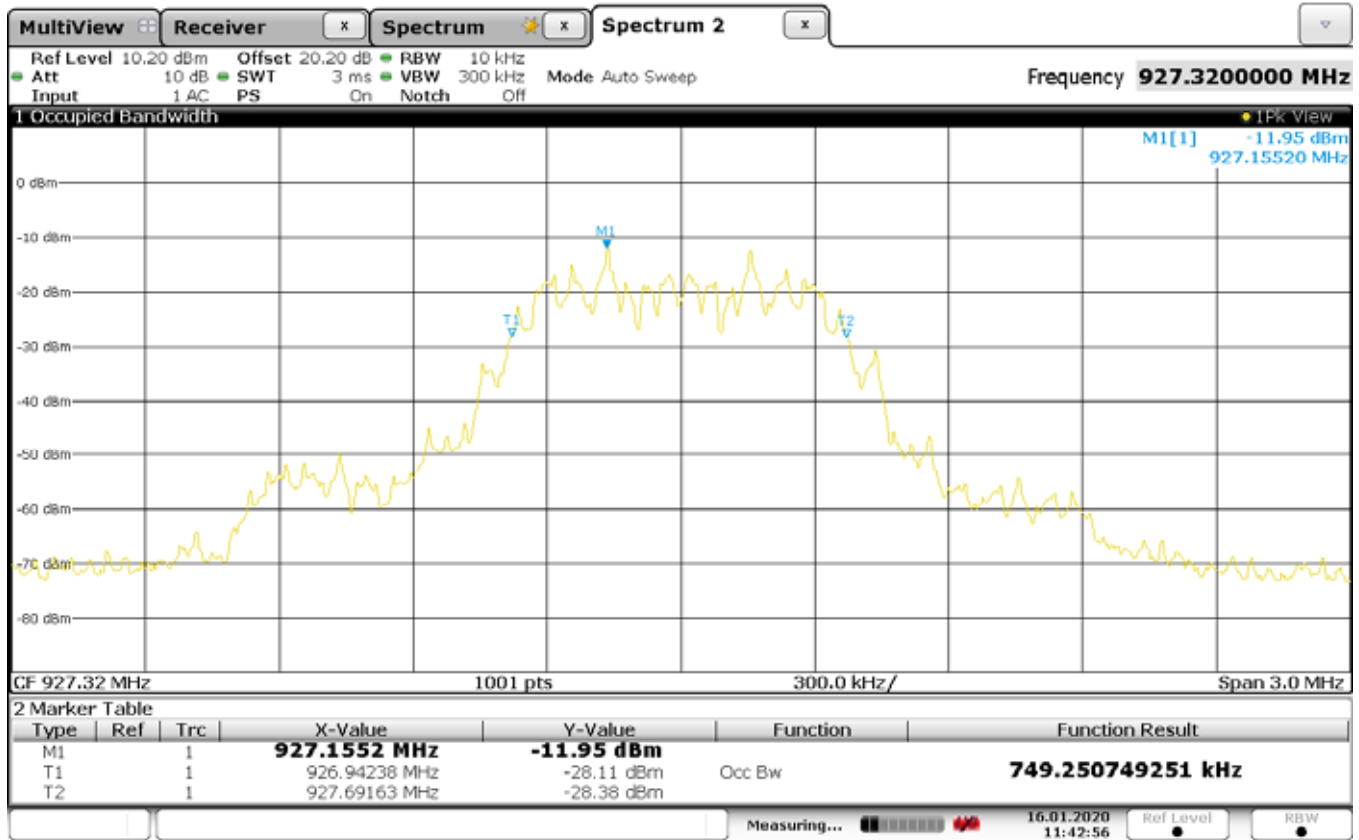

Date: 16 JAN 2020 11:42:56

99% Bandwidth


Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 927.32MHz
 Line Tested : Antenna Port
 Notes : 99% bandwidth = 749.25kHz

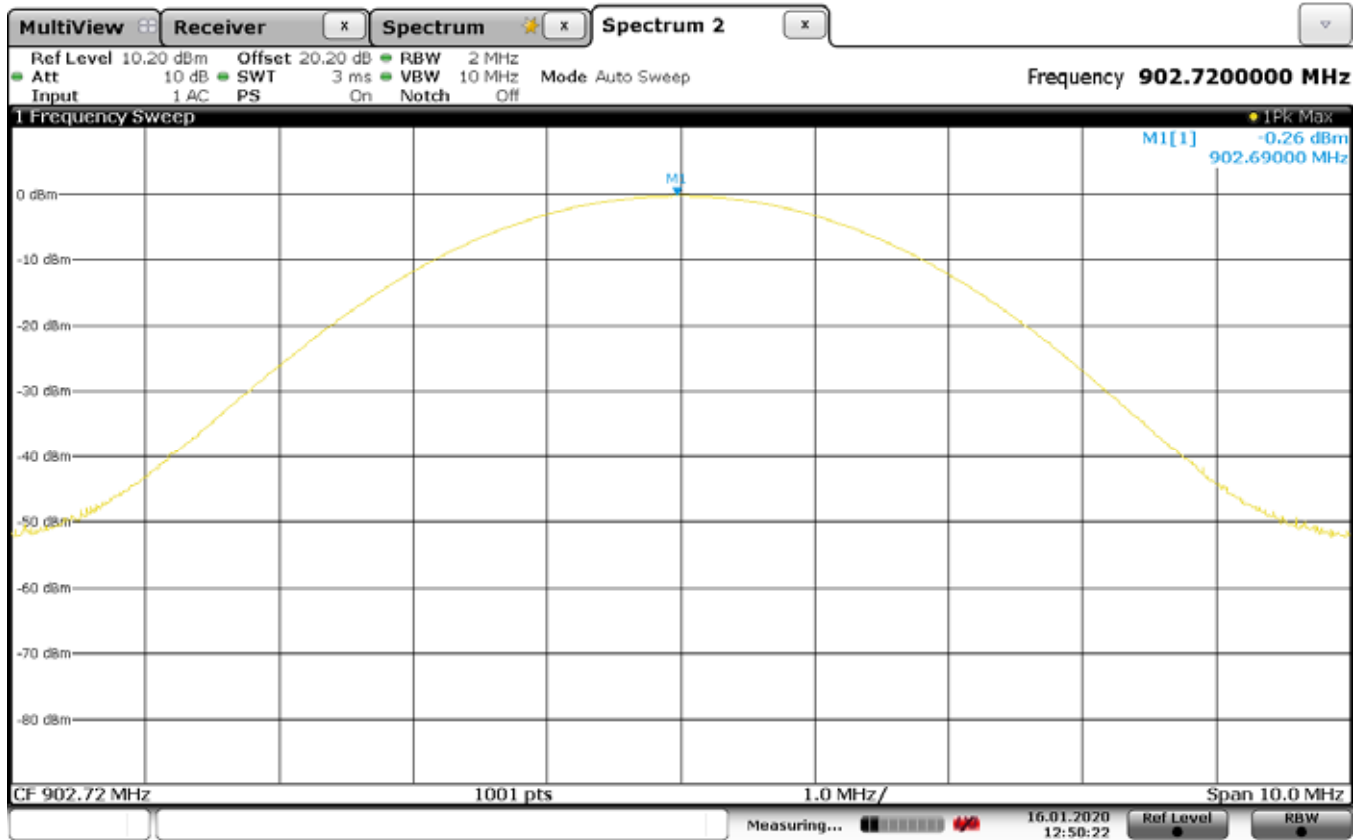

Date: 16 JAN 2020 12:50:22

Peak Conducted Output Power


Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 902.72MHz
 Line Tested : Antenna Port
 Notes : Peak Conducted Output Power = -0.26dBm

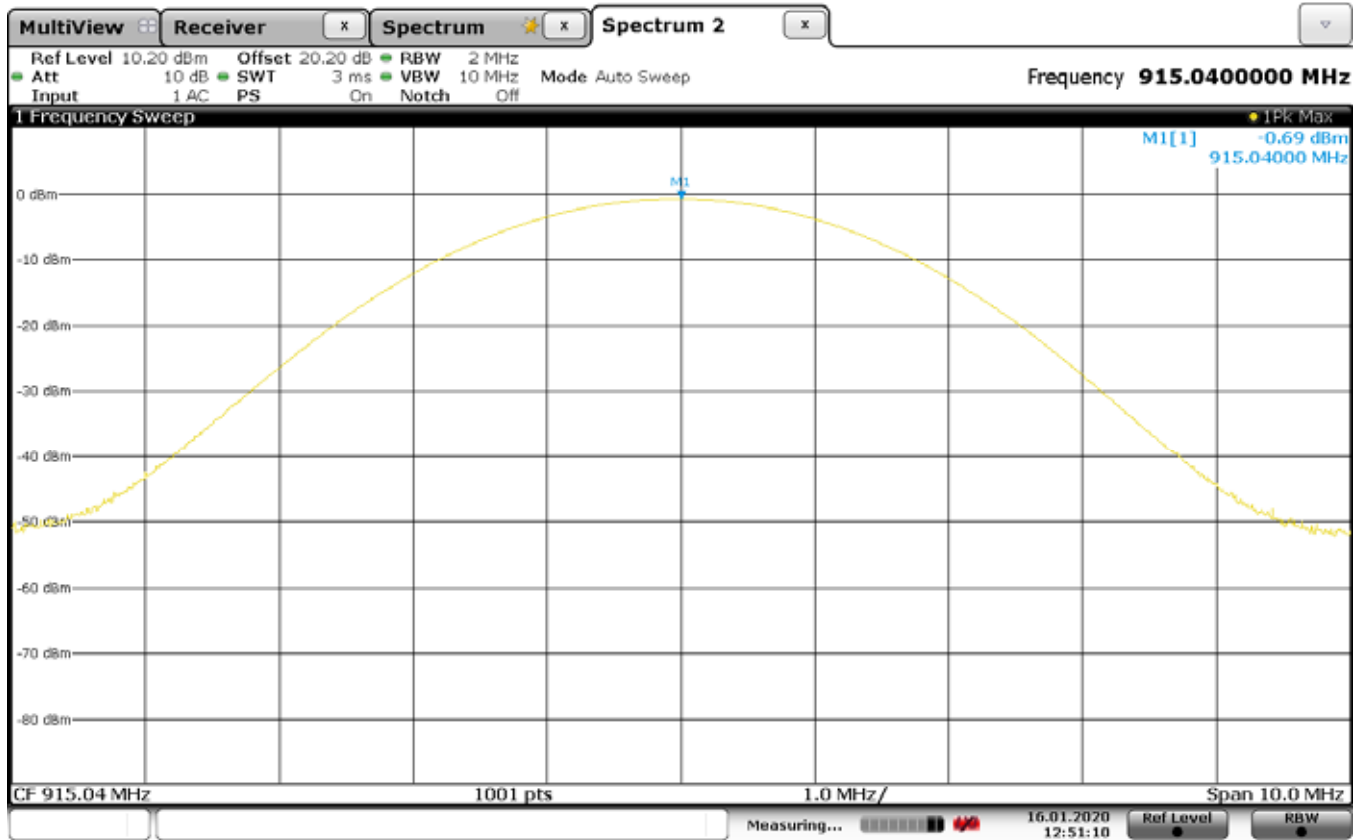

Date: 16 JAN 2020 12:51:10

Peak Conducted Output Power

Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 915.04MHz
 Line Tested : Antenna Port
 Notes : Peak Conducted Output Power = -0.69dBm

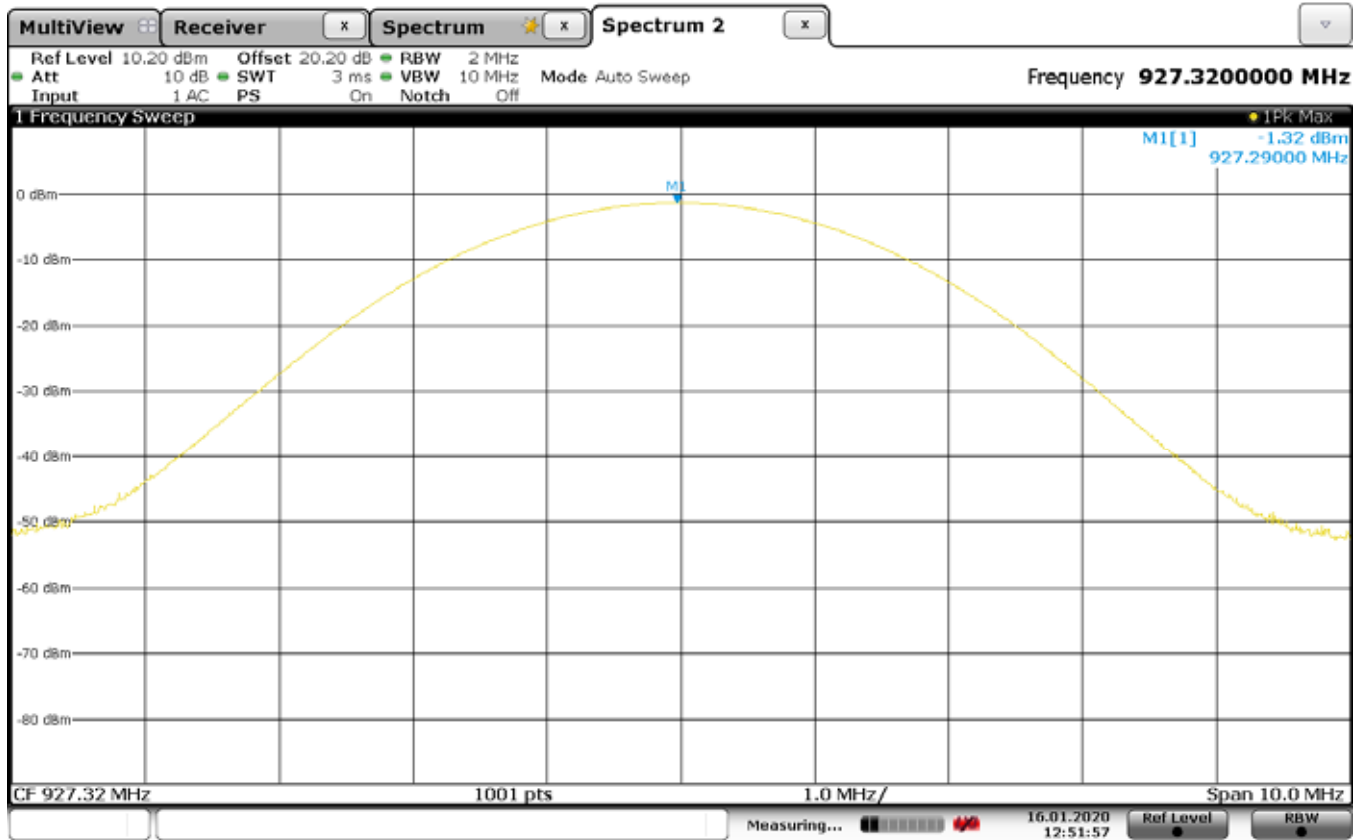

Date: 16 JAN 2020 12:51:57

Peak Conducted Output Power

Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 927.32MHz
 Line Tested : Antenna Port
 Notes : Peak Conducted Output Power = -1.32dBm



Manufacturer : Ideal Industries, Inc.
Test Item : 4 PORT Contact Closure Toggle Switch
Model No. : 59-IOBRIDGE
Serial No. : Sample #2
Mode : Transmit at 902.72MHz
Test Specification : FCC-15.247, RSS-247 Peak EIRP
Date : January 15, 2020 and January 16, 2020
Test Distance : 3 meters
Notes :

Freq. (MHz)	Ant Pol	Wide BW Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
902.72	H	64.1	-5.3	2.2	2.0	-5.2	30.0	-35.2
902.72	V	64.6	-1.6	2.2	2.0	-1.5	30.0	-31.5

$$\text{EIRP(dBm)} = \text{Sig. Gen. Reading (dBm)} + \text{Antenna Gain (dB)} - \text{Cable Loss (dB)}$$



Manufacturer : Ideal Industries, Inc.
Test Item : 4 PORT Contact Closure Toggle Switch
Model No. : 59-IOBRIDGE
Serial No. : Sample #2
Mode : Transmit at 915.04MHz
Test Specification : FCC-15.247, RSS-247 Peak EIRP
Date : January 15, 2020 and January 16, 2020
Test Distance : 3 meters
Notes :

Freq. (MHz)	Ant Pol	Wide BW Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
915.04	H	61.0	-8.4	2.2	2.1	-8.3	30.0	-38.3
915.04	V	62.1	-3.8	2.2	2.1	-3.7	30.0	-33.7


$$\text{EIRP(dBm)} = \text{Sig. Gen. Reading (dBm)} + \text{Antenna Gain (dB)} - \text{Cable Loss (dB)}$$





Manufacturer : Ideal Industries, Inc.
Test Item : 4 PORT Contact Closure Toggle Switch
Model No. : 59-IOBRIDGE
Serial No. : Sample #2
Mode : Transmit at 927.32MHz
Test Specification : FCC-15.247, RSS-247 Peak EIRP
Date : January 15, 2020 and January 16, 2020
Test Distance : 3 meters
Notes :


Freq. (MHz)	Ant Pol	Wide BW Meter Reading (dBuV)	Matched Sig. Gen. Reading (dBm)	Equivalent Antenna Gain (dB)	Cable Loss (dB)	EIRP (dBm)	Limit (dBm)	Margin (dB)
927.32	H	56.9	-12.2	2.2	2.1	-12.1	30.0	-42.1
927.32	V	60.1	-5.3	2.2	2.1	-5.2	30.0	-35.2

$$\text{EIRP(dBm)} = \text{Sig. Gen. Reading (dBm)} + \text{Antenna Gain (dB)} - \text{Cable Loss (dB)}$$

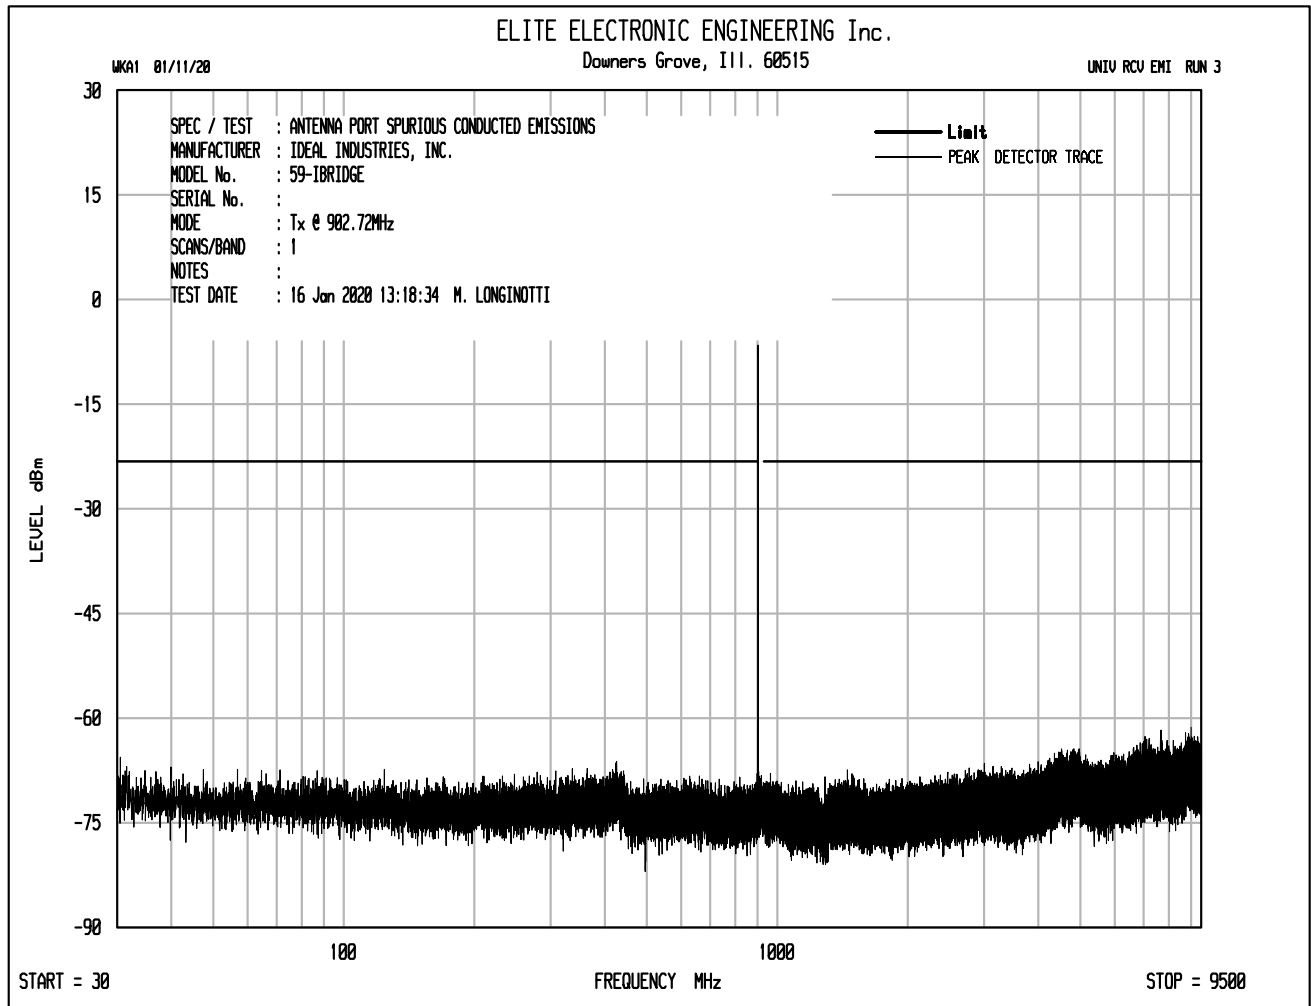

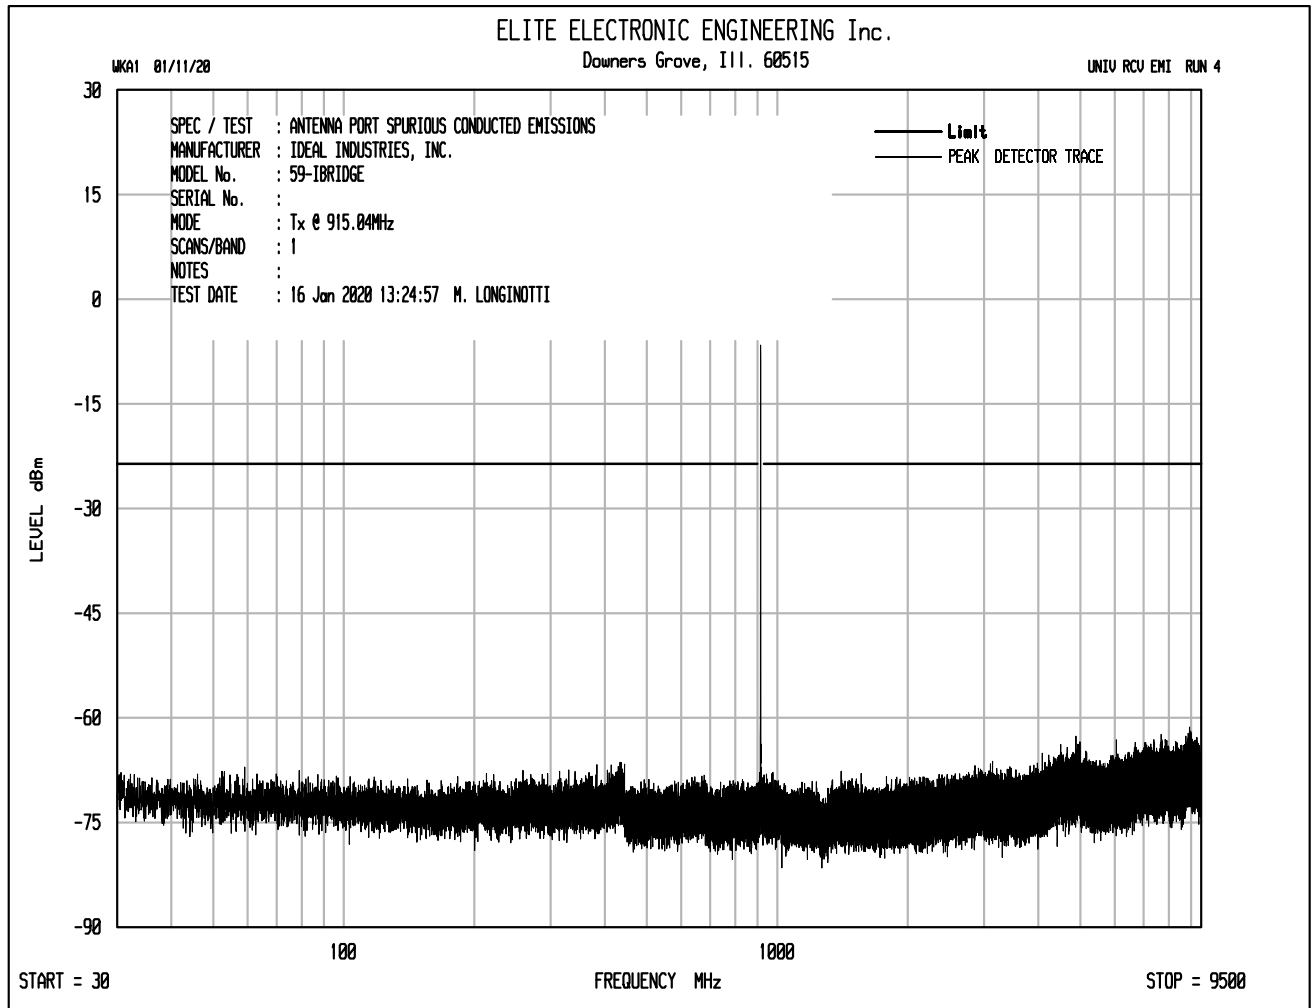

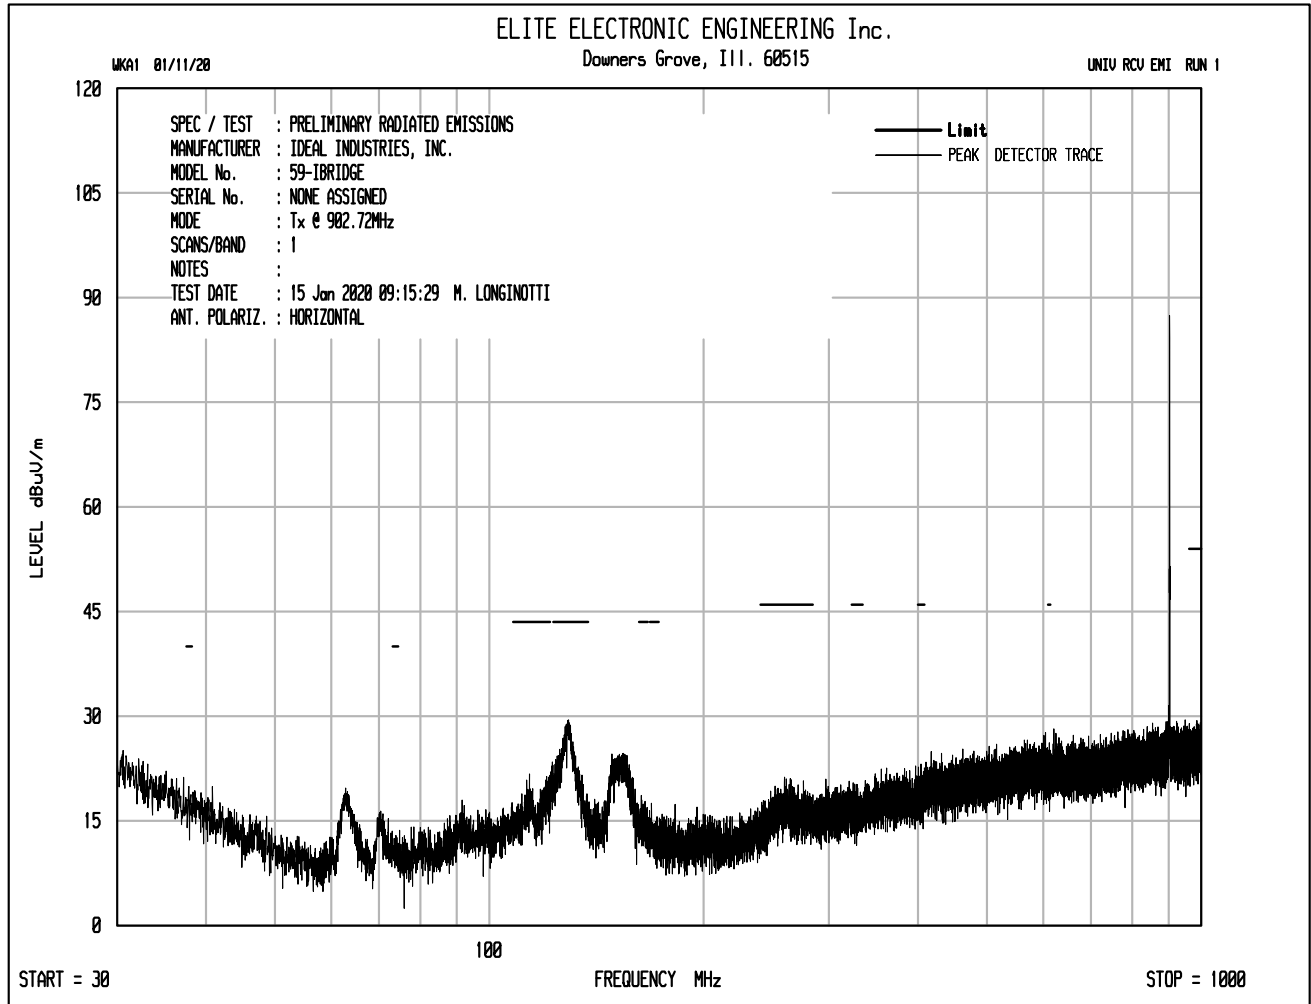

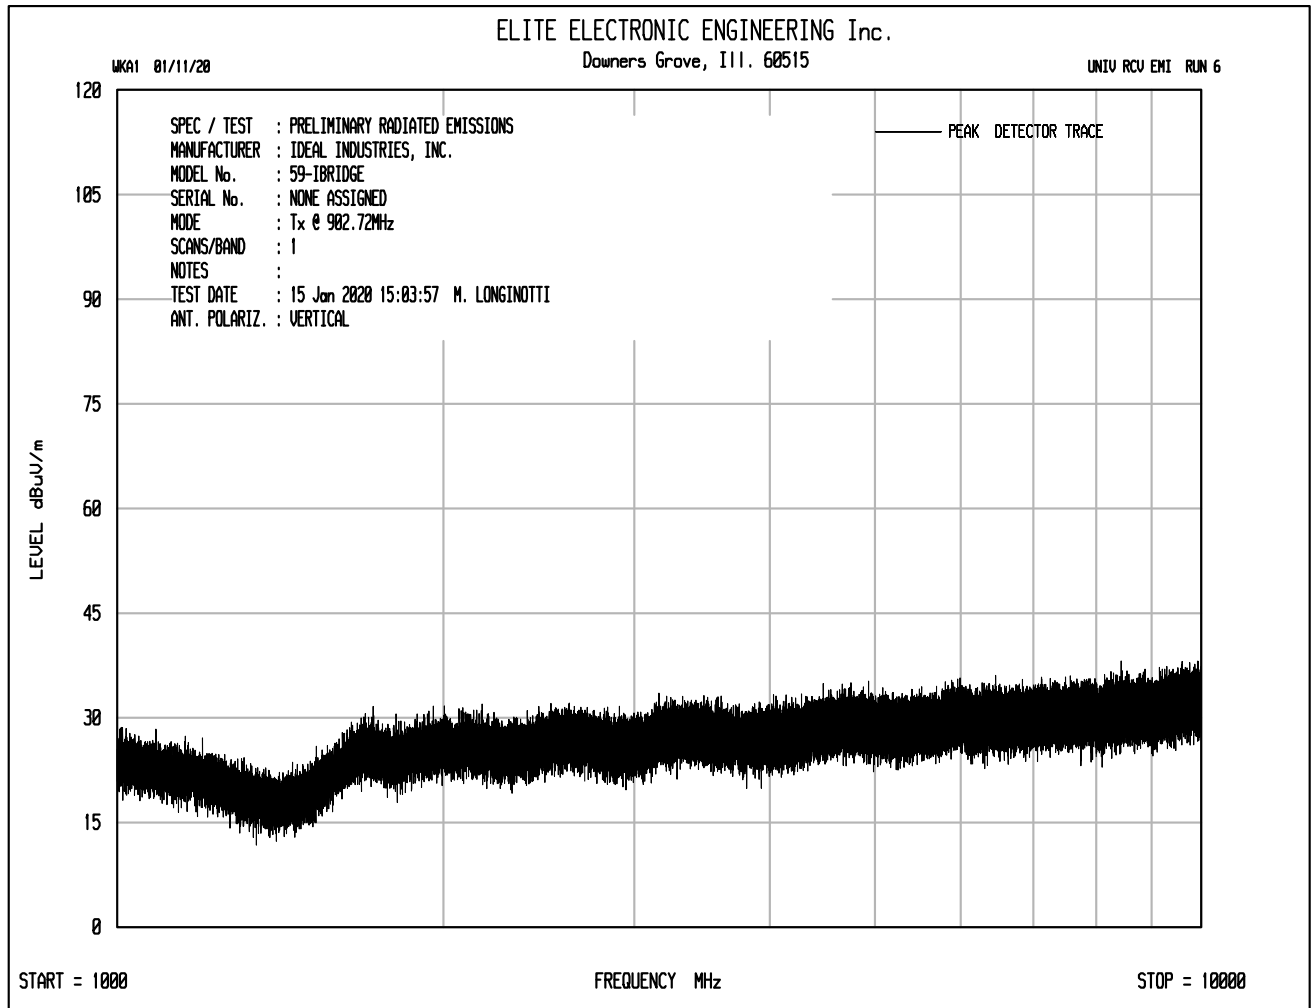



Manufacturer : Ideal Industries, Inc.
 Test Item : 4 PORT Contact Closure Toggle Switch
 Model No. : 59-IOBRIDGE
 Serial No. : Sample #2
 Mode : Transmit at 902.72MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : January 15, 2020 and January 16, 2020
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2708.15	H	51.3	Ambient	2.8	32.5	-40.8	45.8	194.0	5000.0	-28.2
2708.15	V	50.6	Ambient	2.8	32.5	-40.8	45.1	178.9	5000.0	-28.9
3610.87	H	49.5	Ambient	3.2	33.0	-40.1	45.6	189.6	5000.0	-28.4
3610.87	V	47.7	Ambient	3.2	33.0	-40.1	43.8	154.1	5000.0	-30.2
4513.59	H	52.3	Ambient	3.6	34.0	-40.6	49.4	294.1	5000.0	-24.6
4513.59	V	50.4	Ambient	3.6	34.0	-40.6	47.5	236.3	5000.0	-26.5
5416.30	H	48.4	Ambient	3.9	34.7	-39.9	47.1	227.2	5000.0	-26.8
5416.30	V	48.2	Ambient	3.9	34.7	-39.9	46.9	222.1	5000.0	-27.0
8124.45	H	49.3	Ambient	4.9	35.6	-40.2	49.7	304.6	5000.0	-24.3
8124.45	V	49.9	Ambient	4.9	35.6	-40.2	50.3	326.4	5000.0	-23.7
9027.17	H	49.9	Ambient	5.0	36.0	-40.1	50.7	343.9	5000.0	-23.3
9027.17	V	49.2	Ambient	5.0	36.0	-40.1	50.0	317.3	5000.0	-24.0

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp



Manufacturer : Ideal Industries, Inc.
 Test Item : 4 PORT Contact Closure Toggle Switch
 Model No. : 59-IOBRIDGE
 Serial No. : Sample #2
 Mode : Transmit at 902.72MHz
 Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
 Date : January 15, 2020 and January 16, 2020
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2708.15	H	36.10	Ambient	2.8	32.5	-40.8	30.6	33.7	500.0	-23.4
2708.15	V	36.0	Ambient	2.8	32.5	-40.8	30.5	33.3	500.0	-23.5
3610.87	H	35.1	Ambient	3.2	33.0	-40.1	31.2	36.1	500.0	-22.8
3610.87	V	35.3	Ambient	3.2	33.0	-40.1	31.4	37.0	500.0	-22.6
4513.59	H	35.0	Ambient	3.6	34.0	-40.6	32.1	40.1	500.0	-21.9
4513.59	V	35.0	Ambient	3.6	34.0	-40.6	32.1	40.1	500.0	-21.9
5416.30	H	34.0	Ambient	3.9	34.7	-39.9	32.7	43.3	500.0	-21.2
5416.30	V	34.0	Ambient	3.9	34.7	-39.9	32.7	43.3	500.0	-21.2
8124.45	H	33.9	Ambient	4.9	35.6	-40.2	34.3	51.7	500.0	-19.7
8124.45	V	34.0	Ambient	4.9	35.6	-40.2	34.4	52.3	500.0	-19.6
9027.17	H	33.8	Ambient	5.0	36.0	-40.1	34.6	53.9	500.0	-19.4
9027.17	V	33.6	Ambient	5.0	36.0	-40.1	34.4	52.7	500.0	-19.6


Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp + Duty Cycle




Manufacturer : Ideal Industries, Inc.
Test Item : 4 PORT Contact Closure Toggle Switch
Model No. : 59-IOBRIDGE
Serial No. : Sample #2
Mode : Transmit at 902.72MHz
Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions not in Restricted Bands
Date : January 15, 2020 and January 16, 2020
Test Distance : 3 meters
Notes : Peak Detector with 100kHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
902.72	H	61.1		1.6	26.7	0.0	89.3	29338.3		
902.72	V	62.0		1.6	26.7	0.0	90.2	32541.3		
1805.43	H	42.2	Ambient	2.2	30.6	-41.0	34.0	50.3	5000.0	-40.0
1805.43	V	40.2	Ambient	2.2	30.6	-41.0	32.0	39.9	5000.0	-42.0
6319.02	H	39.1	Ambient	4.3	35.4	-40.0	38.8	86.8	5000.0	-35.2
6319.02	V	39.1	Ambient	4.3	35.4	-40.0	38.8	86.8	5000.0	-35.2
7221.74	H	39.0	Ambient	4.6	35.6	-40.1	39.1	90.2	5000.0	-34.9
7221.74	V	39.0	Ambient	4.6	35.6	-40.1	39.1	90.2	5000.0	-34.9

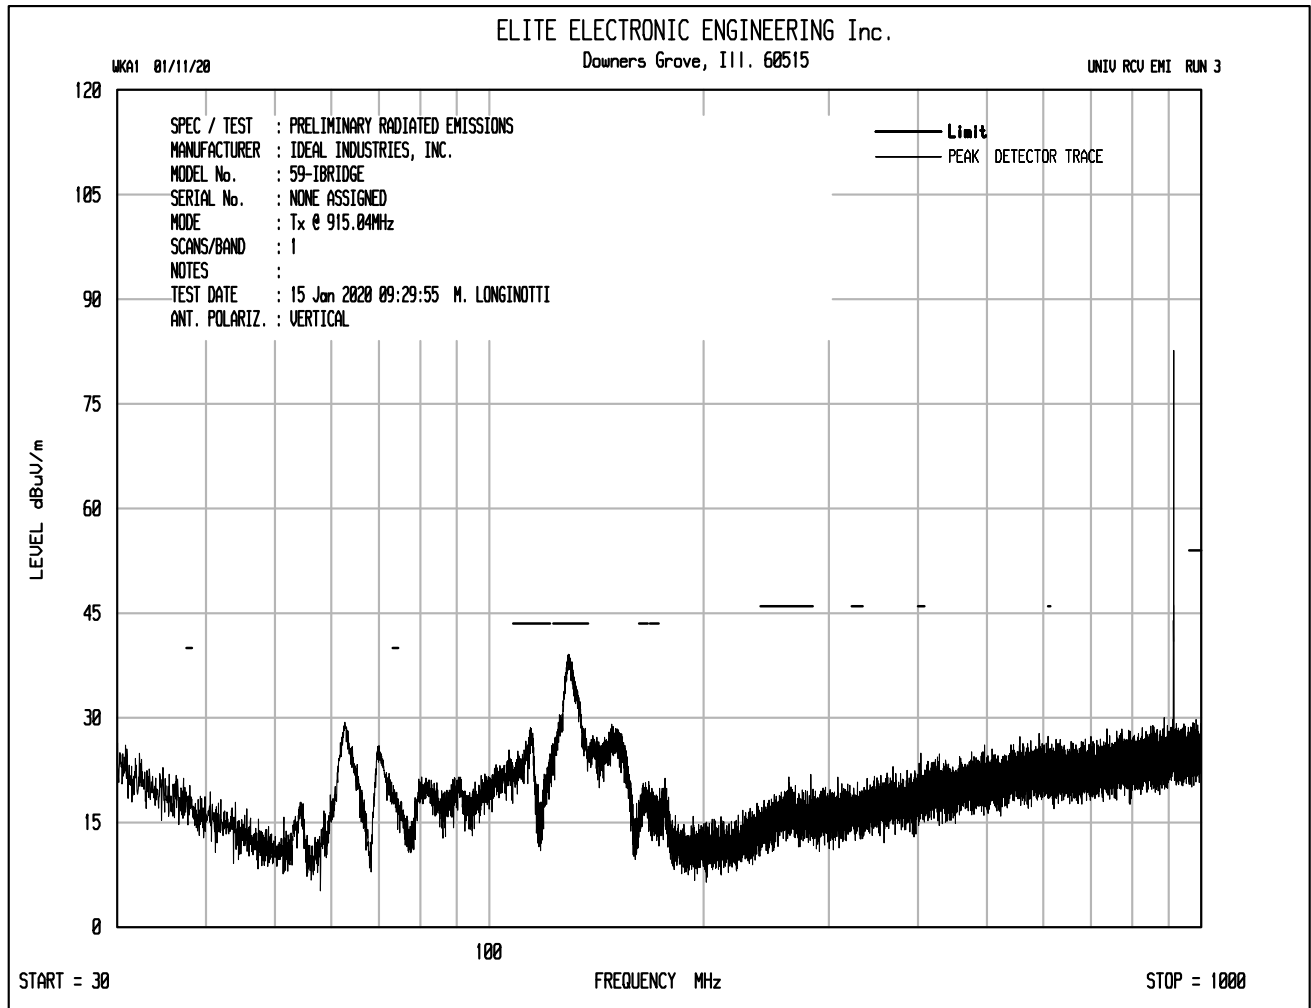

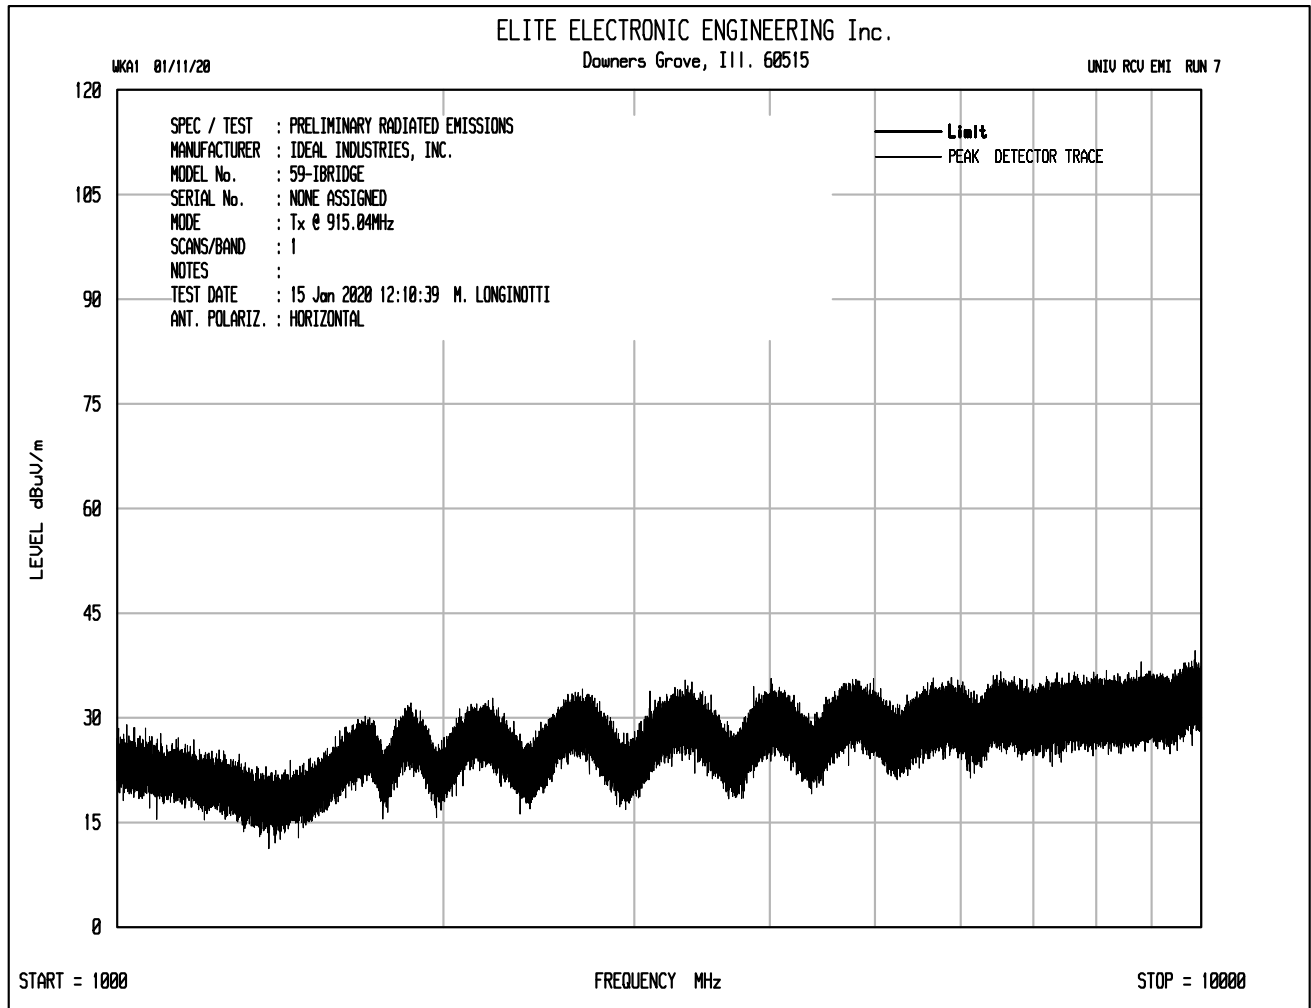

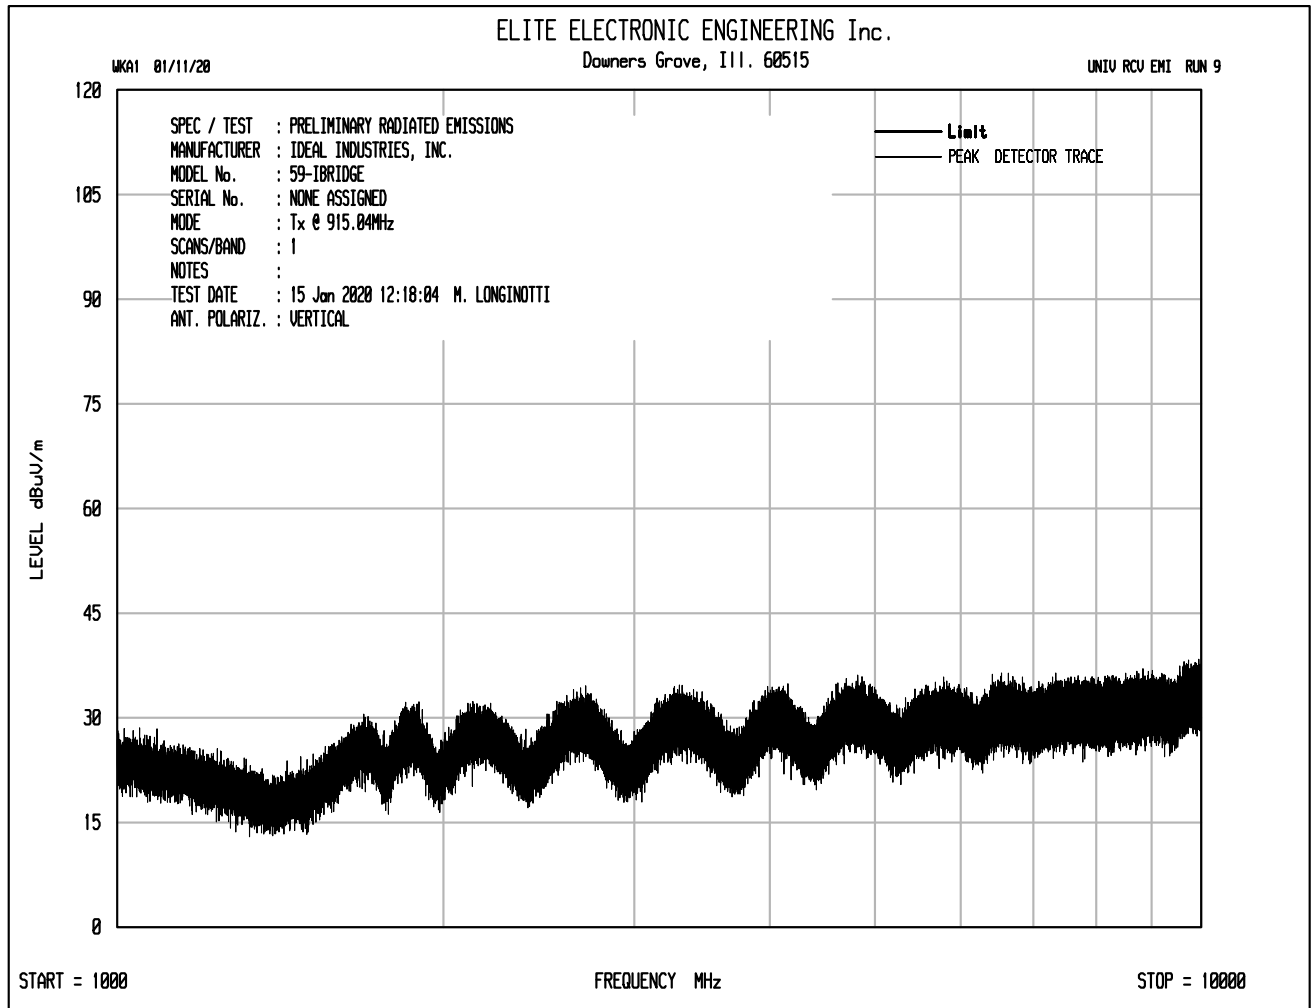



Manufacturer : Ideal Industries, Inc.
 Test Item : 4 PORT Contact Closure Toggle Switch
 Model No. : 59-IOBRIDGE
 Serial No. : Sample #2
 Mode : Transmit at 915.04MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
 Date : January 15, 2020 and January 16, 2020
 Test Distance : 3 meters
 Notes : Peak Detector with 1MHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2745.11	H	52.8	Ambient	2.8	32.6	-40.8	47.4	233.7	5000.0	-26.6
2745.11	V	52.7	Ambient	2.8	32.6	-40.8	47.3	231.0	5000.0	-26.7
3660.15	H	47.1	Ambient	3.3	33.0	-40.2	43.1	143.3	5000.0	-30.9
3660.15	V	47.2	Ambient	3.3	33.0	-40.2	43.2	145.0	5000.0	-30.8
4575.19	H	50.2	Ambient	3.6	34.2	-40.5	47.5	238.3	5000.0	-26.4
4575.19	V	50.3	Ambient	3.6	34.2	-40.5	47.6	241.1	5000.0	-26.3
7320.30	H	49.8	Ambient	4.7	35.6	-40.1	50.0	316.4	5000.0	-24.0
7320.30	V	50.1	Ambient	4.7	35.6	-40.1	50.3	327.5	5000.0	-23.7
8235.33	H	50.2	Ambient	4.9	35.7	-40.2	50.7	341.5	5000.0	-23.3
8235.33	V	50.2	Ambient	4.9	35.7	-40.2	50.7	341.5	5000.0	-23.3
9150.37	H	49.6	Ambient	5.0	36.1	-40.1	50.6	337.3	5000.0	-23.4
9150.37	V	50.3	Ambient	5.0	36.1	-40.1	51.3	365.6	5000.0	-22.7

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp



Manufacturer : Ideal Industries, Inc.
 Test Item : 4 PORT Contact Closure Toggle Switch
 Model No. : 59-IOBRIDGE
 Serial No. : Sample #2
 Mode : Transmit at 915.04MHz
 Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
 Date : January 15, 2020 and January 16, 2020
 Test Distance : 3 meters
 Notes : Average Detector with 1MHz Resolution Bandwidth


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2745.11	H	37.10	Ambient	2.8	32.6	-40.8	31.7	38.3	500.0	-22.3
2745.11	V	37.1	Ambient	2.8	32.6	-40.8	31.7	38.3	500.0	-22.3
3660.15	H	31.4	Ambient	3.3	33.0	-40.2	27.4	23.5	500.0	-26.6
3660.15	V	31.4	Ambient	3.3	33.0	-40.2	27.4	23.5	500.0	-26.6
4575.19	H	34.6	Ambient	3.6	34.2	-40.5	31.9	39.6	500.0	-22.0
4575.19	V	34.6	Ambient	3.6	34.2	-40.5	31.9	39.6	500.0	-22.0
7320.30	H	34.3	Ambient	4.7	35.6	-40.1	34.5	53.1	500.0	-19.5
7320.30	V	34.3	Ambient	4.7	35.6	-40.1	34.5	53.1	500.0	-19.5
8235.33	H	34.6	Ambient	4.9	35.7	-40.2	35.1	56.7	500.0	-18.9
8235.33	V	34.5	Ambient	4.9	35.7	-40.2	35.0	56.0	500.0	-19.0
9150.37	H	34.4	Ambient	5.0	36.1	-40.1	35.4	58.6	500.0	-18.6
9150.37	V	34.4	Ambient	5.0	36.1	-40.1	35.4	58.6	500.0	-18.6


Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp + Duty Cycle




Manufacturer : Ideal Industries, Inc.
 Test Item : 4 PORT Contact Closure Toggle Switch
 Model No. : 59-IOBRIDGE
 Serial No. : Sample #2
 Mode : Transmit at 915.04MHz
 Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions not in Restricted Bands
 Date : January 15, 2020 and January 16, 2020
 Test Distance : 3 meters
 Notes : Peak Detector with 100kHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
915.04	H	57.9		1.6	26.7	0.0	86.1	20283.5		
915.04	V	59.9		1.6	26.7	0.0	88.1	25535.4		
1830.07	H	42.7	Ambient	2.2	30.6	-41.0	34.6	53.7	5000.0	-39.4
1830.07	V	42.6	Ambient	2.2	30.6	-41.0	34.5	53.1	5000.0	-39.5
5490.22	H	39.6	Ambient	3.9	34.6	-39.9	38.2	81.6	5000.0	-35.7
5490.22	V	39.7	Ambient	3.9	34.6	-39.9	38.3	82.5	5000.0	-35.6
6405.26	H	39.5	Ambient	4.3	35.5	-40.0	39.3	92.1	5000.0	-34.7
6405.26	V	39.4	Ambient	4.3	35.5	-40.0	39.2	91.1	5000.0	-34.8

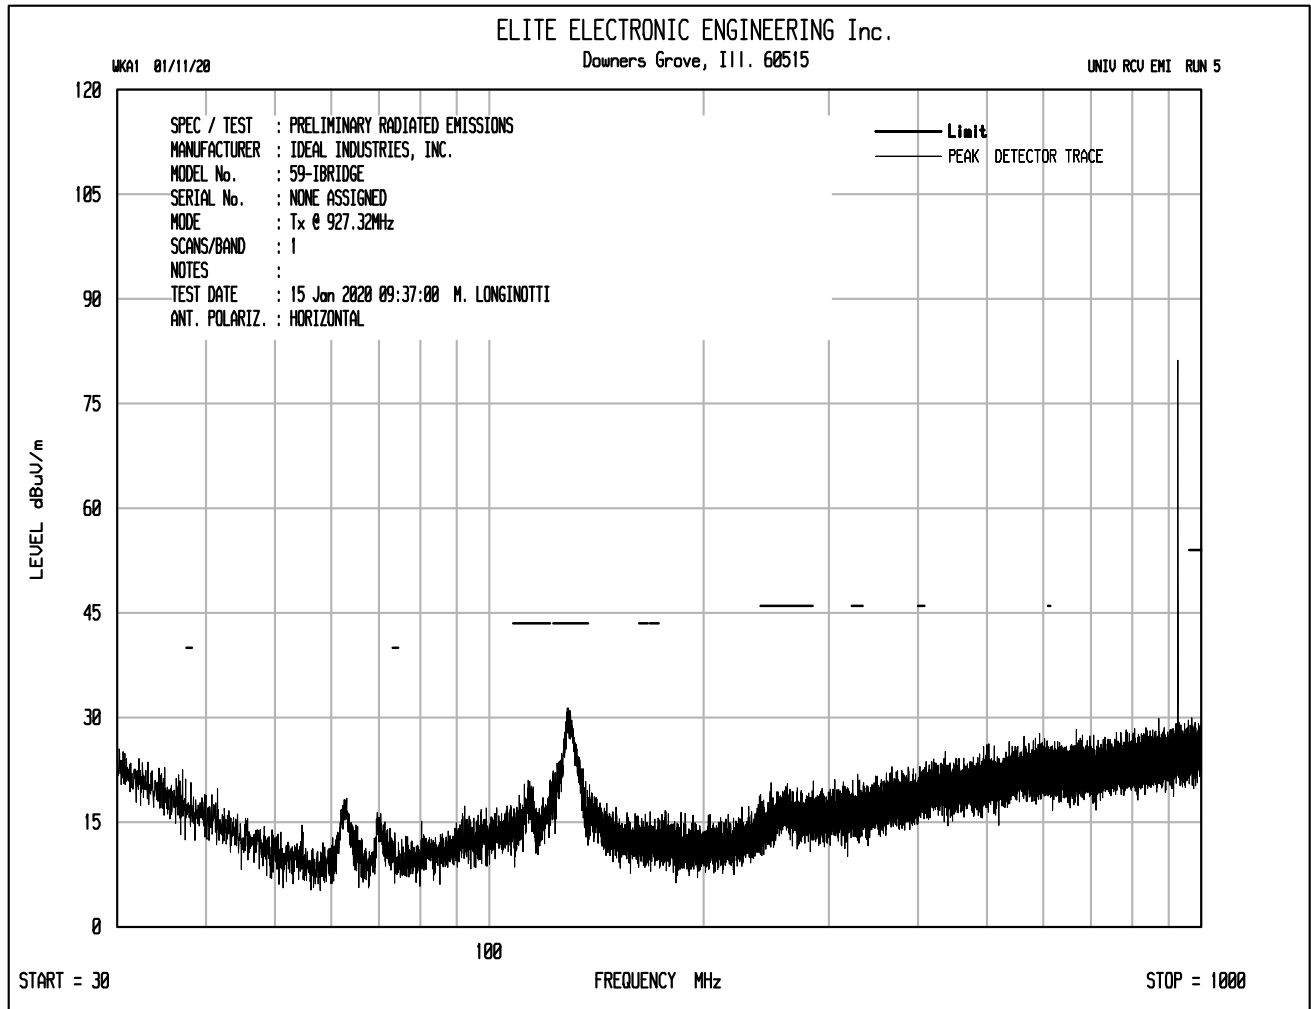

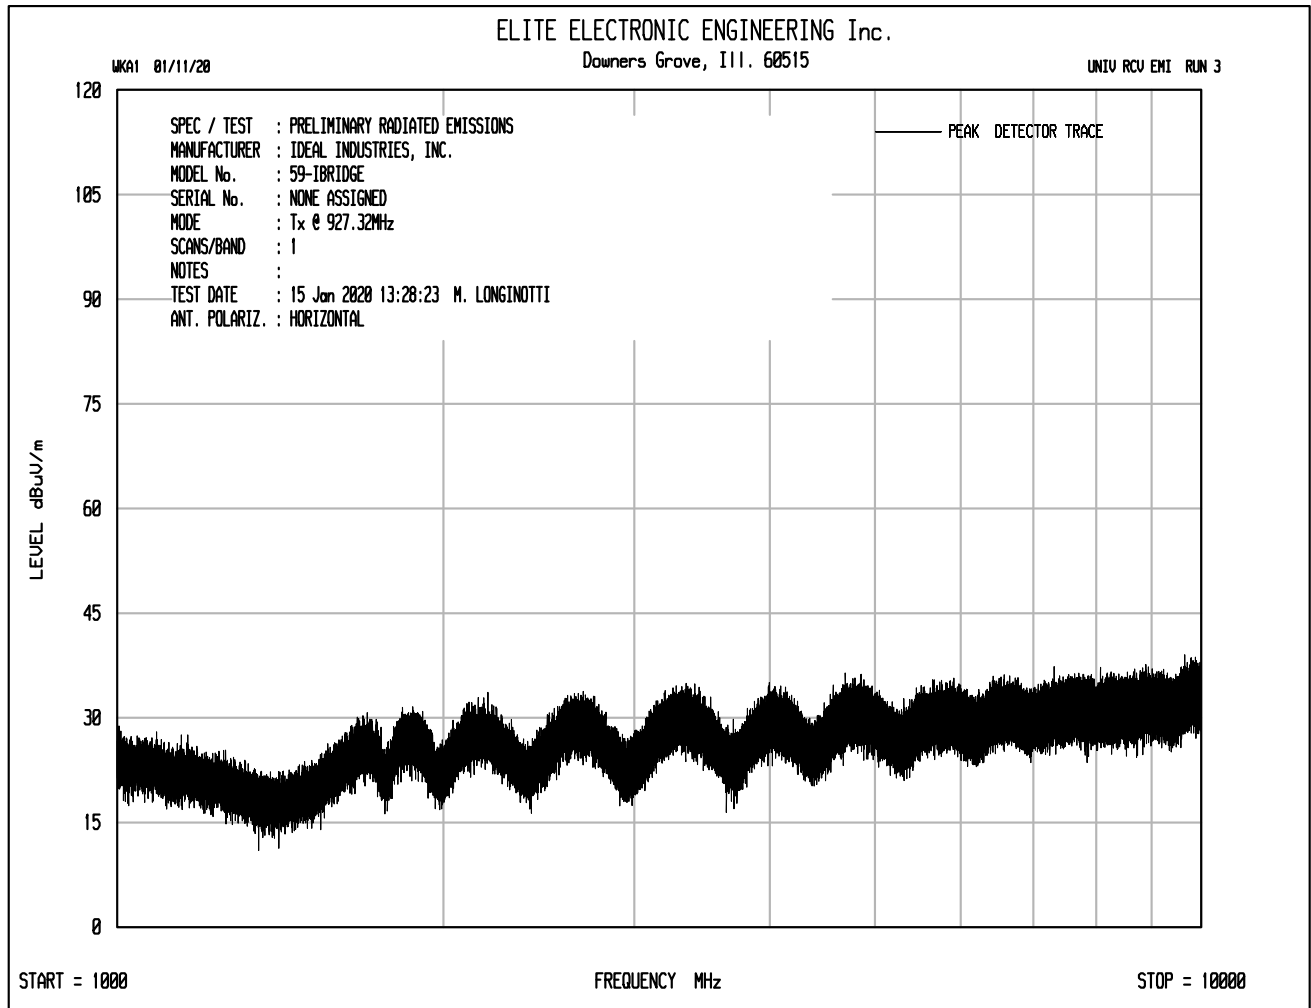

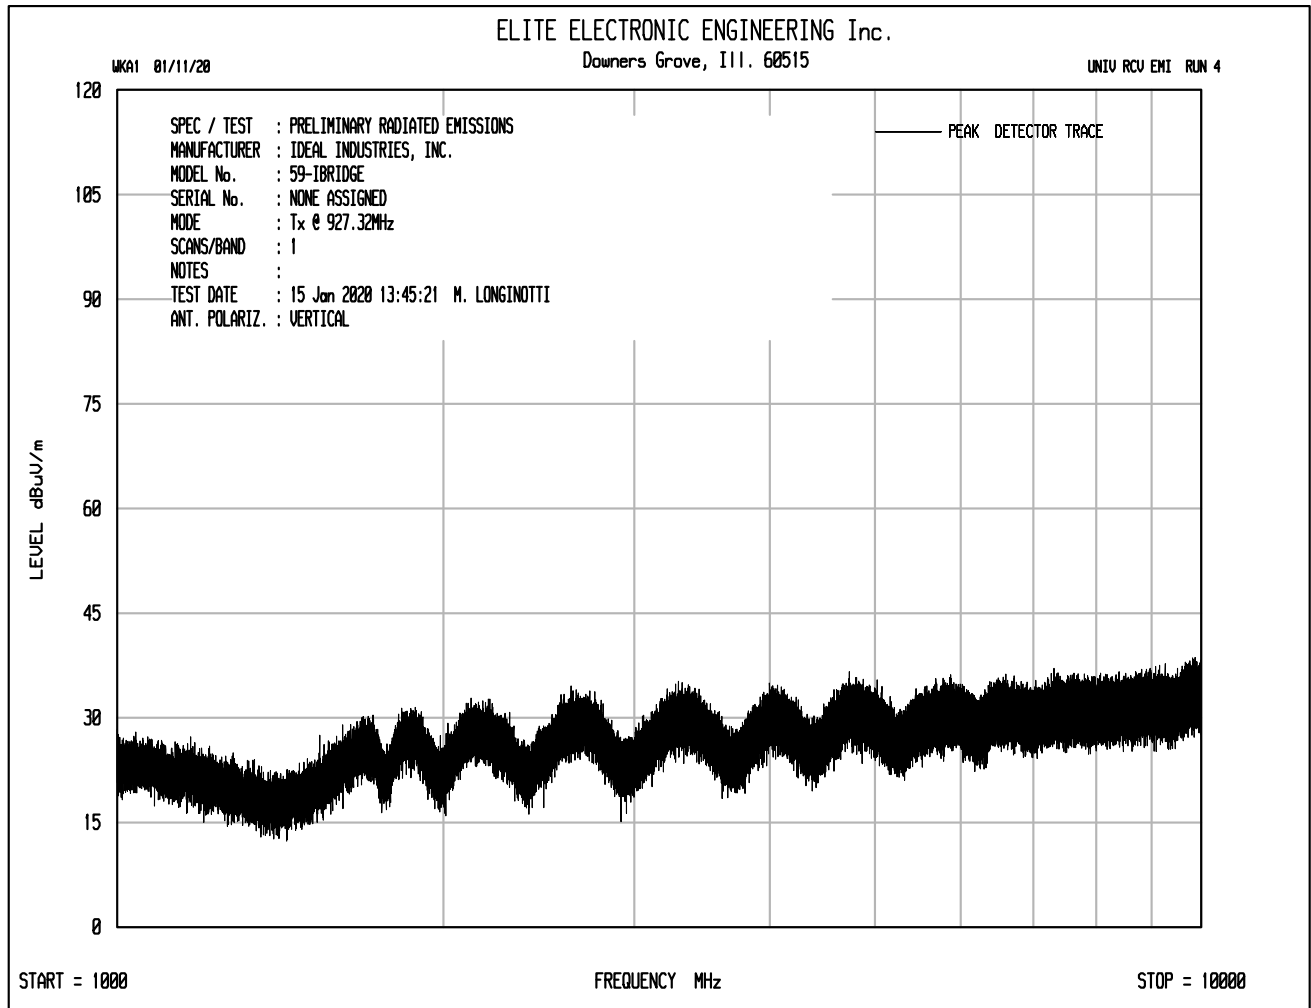



Manufacturer : Ideal Industries, Inc.
Test Item : 4 PORT Contact Closure Toggle Switch
Model No. : 59-IOBRIDGE
Serial No. : Sample #2
Mode : Transmit at 927.32MHz
Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions in Restricted Bands
Date : January 15, 2020 and January 16, 2020
Test Distance : 3 meters
Notes : Peak Detector with 1MHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
2781.95	H	52.2	Ambient	2.8	32.4	-40.8	46.7	216.6	5000.0	-27.3
2781.95	V	52.7	Ambient	2.8	32.4	-40.8	47.2	229.5	5000.0	-26.8
3709.26	H	46.6	Ambient	3.3	33.0	-40.3	42.6	134.6	5000.0	-31.4
3709.26	V	46.9	Ambient	3.3	33.0	-40.3	42.9	139.4	5000.0	-31.1
4636.58	H	50.8	Ambient	3.6	34.3	-40.4	48.4	263.3	5000.0	-25.6
4636.58	V	51.1	Ambient	3.6	34.3	-40.4	48.7	272.5	5000.0	-25.3
7418.52	H	50.1	Ambient	4.7	35.7	-40.1	50.3	328.8	5000.0	-23.6
7418.52	V	49.7	Ambient	4.7	35.7	-40.1	49.9	314.0	5000.0	-24.0
8345.84	H	50.2	Ambient	4.9	35.7	-40.2	50.7	343.1	5000.0	-23.3
8345.84	V	49.4	Ambient	4.9	35.7	-40.2	49.9	312.9	5000.0	-24.1

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp



Manufacturer : Ideal Industries, Inc.
Test Item : 4 PORT Contact Closure Toggle Switch
Model No. : 59-IOBRIDGE
Serial No. : Sample #2
Mode : Transmit at 927.32MHz
Test Specification : FCC-15.247, RSS-247 Average Radiated Emissions in Restricted Bands
Date : January 15, 2020 and January 16, 2020
Test Distance : 3 meters
Notes : Average Detector with 1MHz Resolution Bandwidth


Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Average Total dBuV/m at 3m	Average Total uV/m at 3 m	Average Limit uV/m at 3 m	Margin (dB)
2781.95	H	36.10	Ambient	2.8	32.4	-40.8	30.6	33.9	500.0	-23.4
2781.95	V	36.1	Ambient	2.8	32.4	-40.8	30.6	33.9	500.0	-23.4
3709.26	H	31.2	Ambient	3.3	33.0	-40.3	27.2	22.9	500.0	-26.8
3709.26	V	31.2	Ambient	3.3	33.0	-40.3	27.2	22.9	500.0	-26.8
4636.58	H	35.3	Ambient	3.6	34.3	-40.4	32.9	44.2	500.0	-21.1
4636.58	V	35.3	Ambient	3.6	34.3	-40.4	32.9	44.2	500.0	-21.1
7418.52	H	34.3	Ambient	4.7	35.7	-40.1	34.5	53.3	500.0	-19.4
7418.52	V	34.2	Ambient	4.7	35.7	-40.1	34.4	52.7	500.0	-19.5
8345.84	H	34.4	Ambient	4.9	35.7	-40.2	34.9	55.7	500.0	-19.1
8345.84	V	34.2	Ambient	4.9	35.7	-40.2	34.7	54.4	500.0	-19.3

Total (dBuV/m) = Meter Reading + CBL FAC + Ant Fac + Pre Amp + Duty Cycle



Manufacturer : Ideal Industries, Inc.
Test Item : 4 PORT Contact Closure Toggle Switch
Model No. : 59-IOBRIDGE
Serial No. : Sample #2
Mode : Transmit at 927.32MHz
Test Specification : FCC-15.247, RSS-247 Peak Radiated Emissions not in Restricted Bands
Date : January 15, 2020 and January 16, 2020
Test Distance : 3 meters
Notes : Peak Detector with 100kHz Resolution Bandwidth

Freq. MHz	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB/m)	Pre Amp (dB)	Peak Total dBuV/m at 3m	Peak Total uV/m at 3 m	Peak Limit uV/m at 3 m	Margin (dB)
927.32	H	53.9		1.6	26.7	0.0	82.2	12862.3		
927.32	V	57.8		1.6	26.7	0.0	86.1	20151.9		
1854.63	H	44.2	Ambient	2.3	30.7	-41.0	36.2	64.8	5000.0	-37.7
1854.63	V	43.2	Ambient	2.3	30.7	-41.0	35.2	57.8	5000.0	-38.7
5563.89	H	40.4	Ambient	4.0	34.5	-39.9	39.0	89.0	5000.0	-35.0
5563.89	V	40.2	Ambient	4.0	34.5	-39.9	38.8	87.0	5000.0	-35.2
6491.21	H	40.0	Ambient	4.3	35.6	-40.0	39.9	98.9	5000.0	-34.1
6491.21	V	39.8	Ambient	4.3	35.6	-40.0	39.7	96.7	5000.0	-34.3
9273.15	H	39.1	Ambient	5.0	36.1	-40.1	40.1	101.7	5000.0	-33.8
9273.15	V	39.1	Ambient	5.0	36.1	-40.1	40.1	101.7	5000.0	-33.8

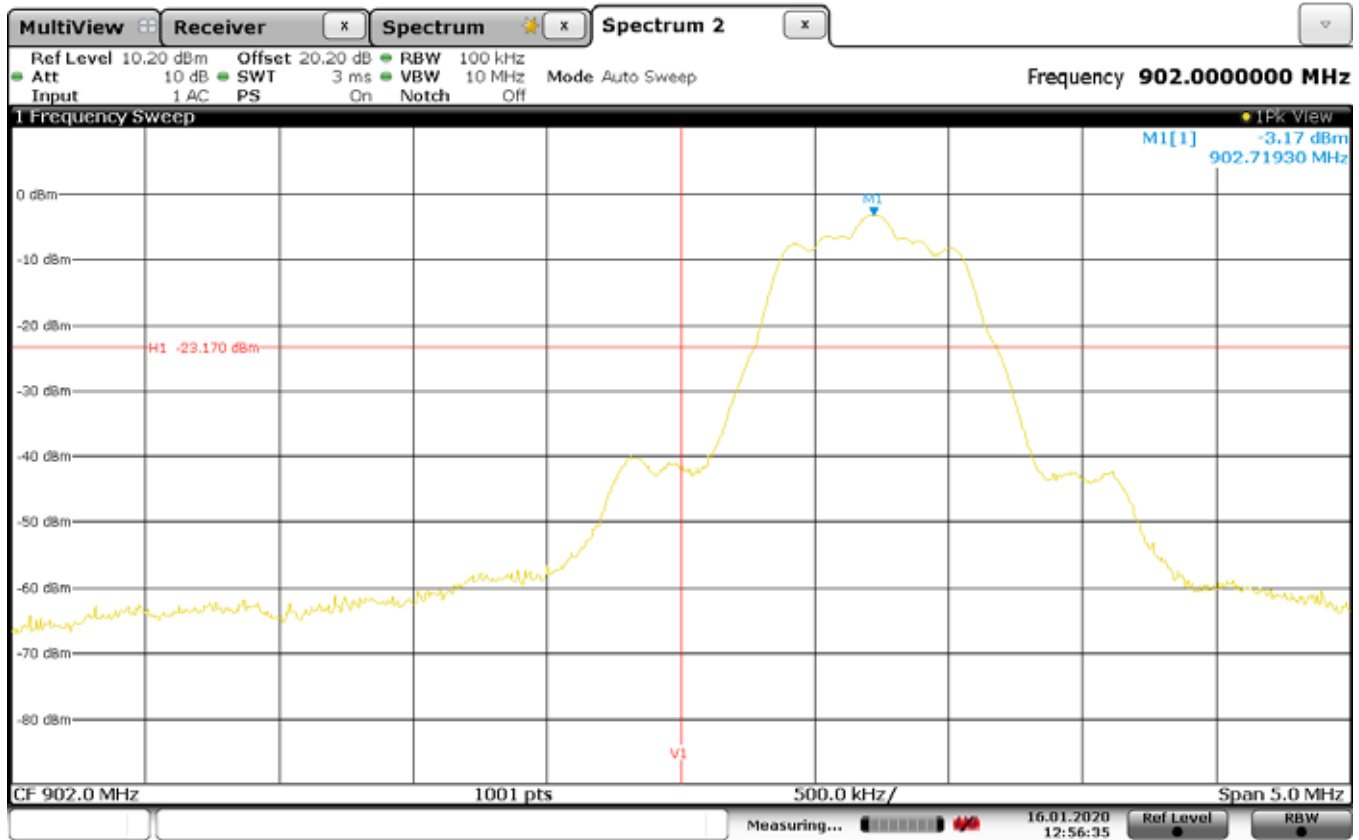

Date: 16 JAN 2020 12:56:35

Low Band Edge


Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 902.72
 Line Tested : Antenna Port
 Notes : Display Line V1 represents the low band edge (902MHz). Display Line D1 represents the level 20dB down from the peak of the transmit frequency in a 100kHz bandwidth



Date: 16 JAN 2020 12:58:26

High Band Edge


Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 927.32MHz
 Line Tested : Antenna Port
 Notes : Display Line V1 represents the high band edge (928MHz). Display Line H1 represents the level 20dB down from the peak of the transmit frequency in a 100kHz bandwidth

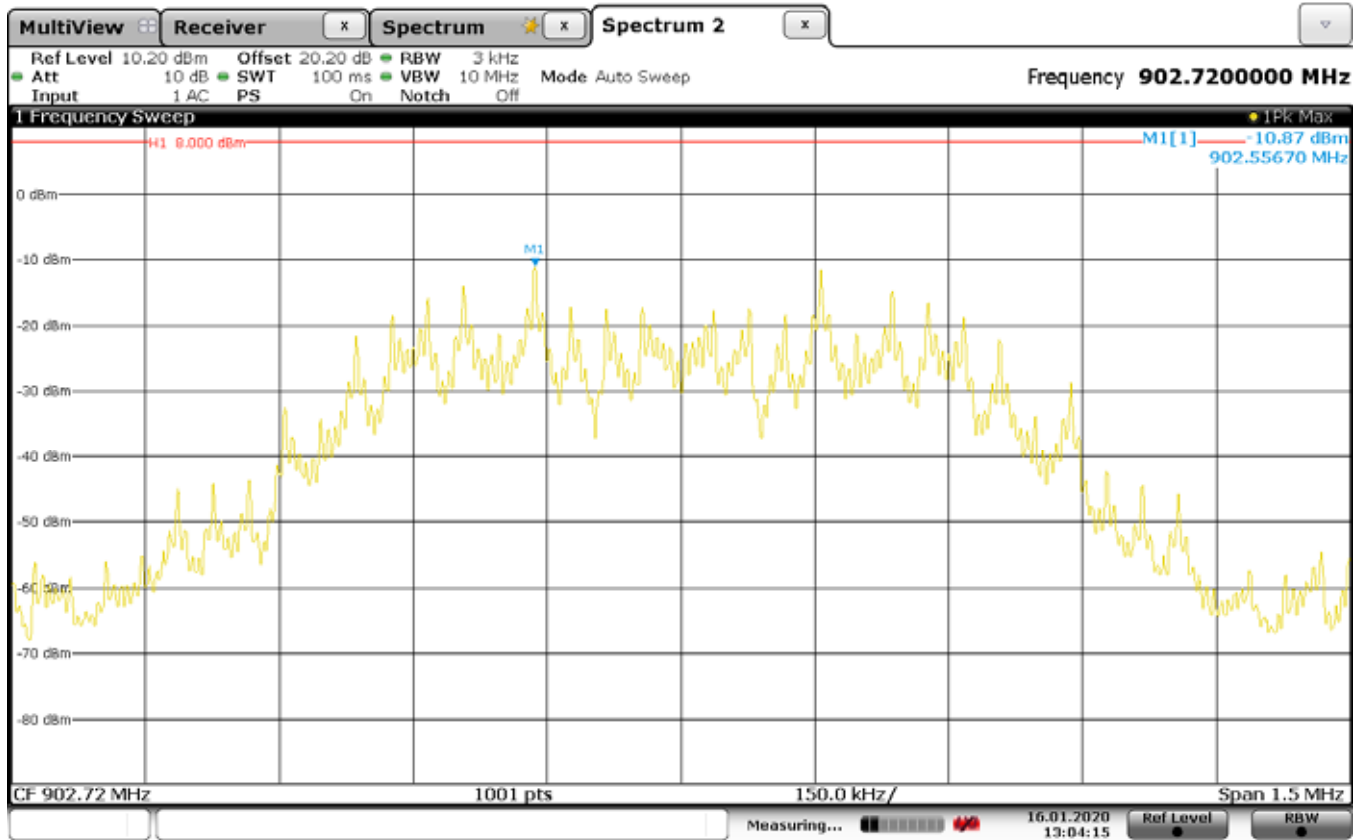

Date: 16 JAN 2020 13:04:15

Power Spectral Density


Manufacturer : Ideal Industries
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 902.72MHz
 Line Tested : Antenna Port
 Notes : PSD = -10.87dBm

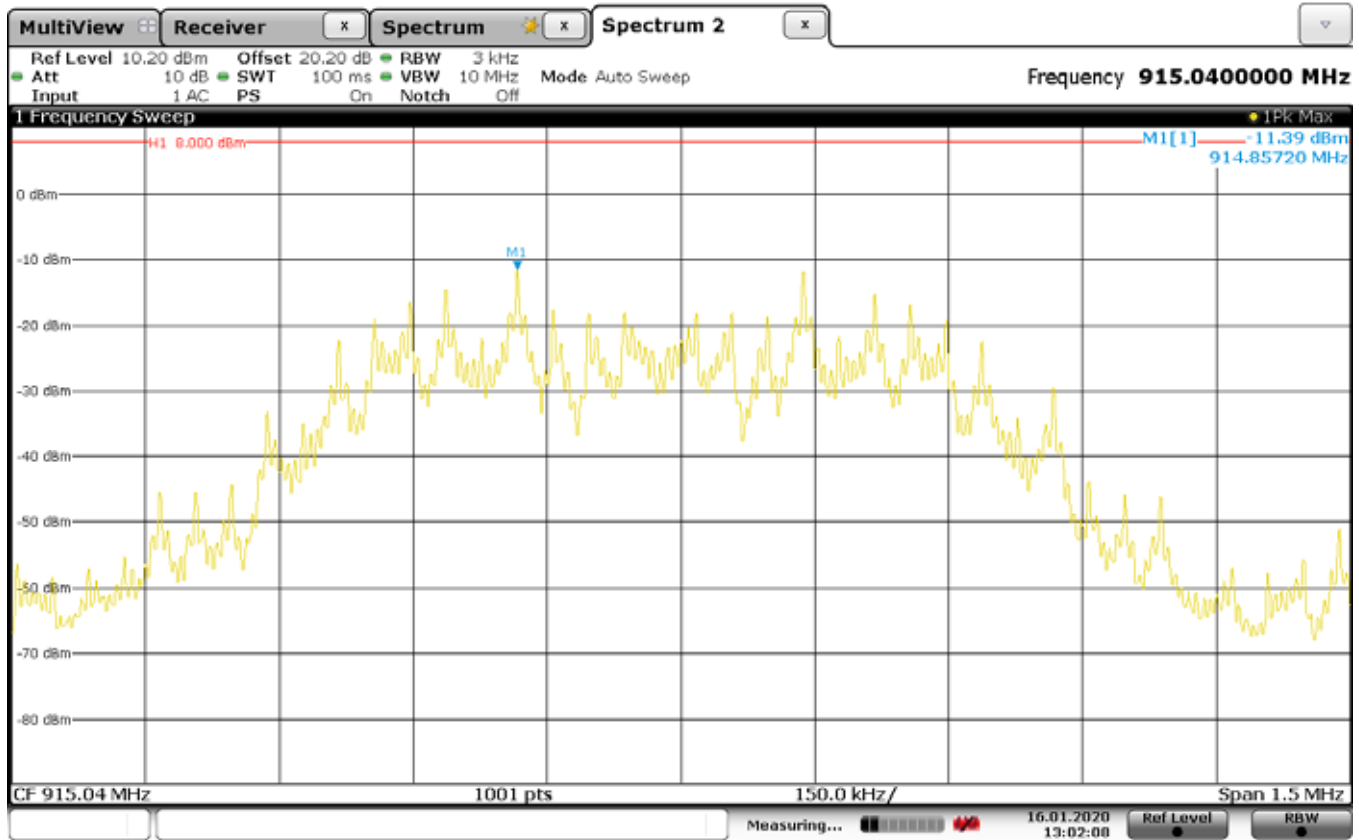

Date: 16 JAN 2020 13:02:07

Power Spectral Density

Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 915.04MHz
 Line Tested : Antenna Port
 Notes : PSD = -11.39dBm

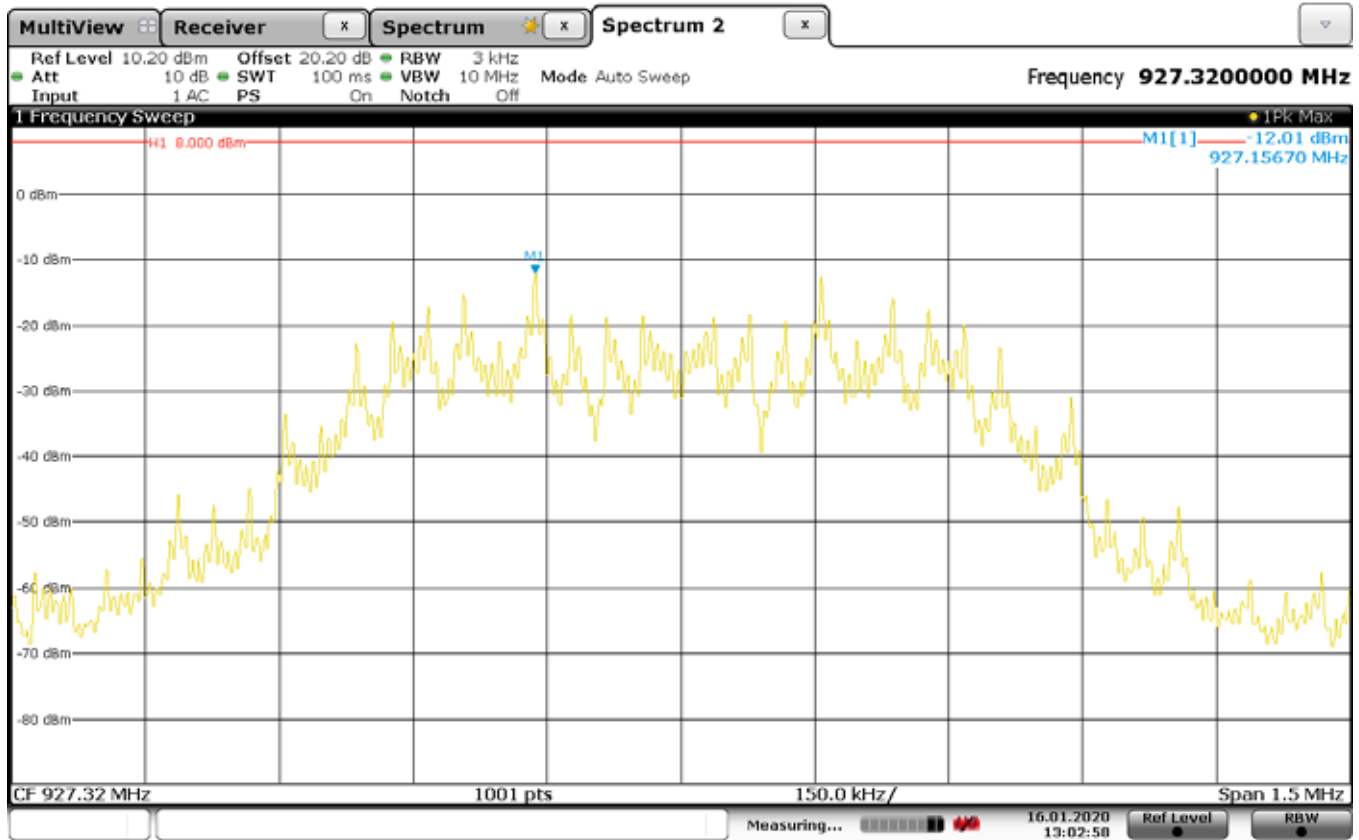

Date: 16 JAN 2020 13:02:58

Power Spectral Density

Manufacturer : Ideal Industries, Inc.
 Model Number : 59-IOBRIDGE
 Serial Number : Sample #1
 Mode : Transmit at 927.32MHz
 Line Tested : Antenna Port
 Notes : PSD = -12.01dBm