

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan District, Shenzhen, Guangdong, China 518057

 Telephone:
 +86 (0) 755 2601 2053

 Fax:
 +86 (0) 755 2671 0594

 Email:
 ee.shenzhen@sgs.com

Report No.: SZEM131200659101 Page: 1 of 84

FCC REPORT

Application No:	SZEM1312006591RF	
Applicant:	WOOX Innovations Limited	
Manufacturer:	Philips Electronics Hong Kong Ltd.	
Factory:	 Jadestar Electronics (Shenzhen) Co.Ltd. Arts Electronics Co. Ltd. 	
Product Name:	Clock Radio	
Model No.(EUT):	AJT3300/37	
FCC ID:	2AANUAJT3300	
Standards:	47 CFR Part 15, Subpart C (2012)	
Date of Receipt:	2013-12-11	
Date of Test:	2013-12-12 to 2013-12-13	
Date of Issue:	2013-01-10	
Test Result:	PASS *	

In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM131200659101 Page: 2 of 84

1 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Band Edge (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM131200659101 Page: 3 of 84

2 Contents

Page

B PAGE EBBOB	BOOKMARK NOT DEFINED.
ENTS	3
RAL INFORMATION	4
LIENT INFORMATION ENERAL DESCRIPTION OF EUT EST ENVIRONMENT ESCRIPTION OF SUPPORT UNITS	
	-
EVIATION FROM STANDARDS BNORMALITIES FROM STANDARD CONDITIONS THER INFORMATION REQUESTED BY THE CUSTOMER	
QUIPMENT LIST	
NTENNA REQUIREMENT DNDUCTED EMISSIONS DNDUCTED PEAK OUTPUT POWER DDB OCCUPY BANDWIDTH ARRIER FREQUENCIES SEPARATION DOPPING CHANNEL NUMBER WELL TIME AND-EDGE FOR RF CONDUCTED EMISSIONS PURIOUS RF CONDUCTED EMISSIONS SEUDORANDOM FREQUENCY HOPPING SEQUENCE ADIATED SPURIOUS EMISSION Radiated Emission below 1GHz Transmitter Emission above 1GHz AND EDGE (RADIATED EMISSION)	12 16 23 29 36 39 45 52 67 67 68 71 73
	ENT INFORMATION NERAL DESCRIPTION OF EUT ST ENVIRONMENT SCRIPTION OF SUPPORT UNITS ST LOCATION ST FACILITY VIATION FROM STANDARDS NORMALITIES FROM STANDARD CONDITIONS HER INFORMATION REQUESTED BY THE CUSTOMER UIPMENT LIST RESULTS AND MEASUREMENT DATA NDUCTED EMISSIONS NDUCTED PEAK OUTPUT POWER DB OCCUPY BANDWIDTH RRIER FREQUENCIES SEPARATION PPING CHANNEL NUMBER ELL TIME ND-EDGE FOR RF CONDUCTED EMISSIONS JRIOUS RF CONDUCTED EMISSIONS UIDORANDOM FREQUENCY HOPPING SEQUENCE DIATED SPURIOUS EMISSION Radiated Emission below 1GHz Transmitter Emission above 1GHz



Report No.: SZEM131200659101 Page: 4 of 84

3 General Information

3.1 Client Information

Applicant:	WOOX Innovations Limited	
Address of Applicant:	5/F,. Philips Electronics Building, 5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong	
Manufacturer:	Philips Electronics Hong Kong Ltd.	
Address of Manufacturer:	5/F,. Philips Electronics Building, 5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong	
Factory:	 Jadestar Electronics (Shenzhen) Co.Ltd. Arts Electronics Co. Ltd. 	
Address of Factory:	 Block 5, He Tai Industrial Zone, He Ping Community, Fu Yuan Town, Bao An District. 	
	 No.1 Shangxing Lu, Shangjiao Community, Changan Town, Dongguan City, Guangdong Province, China. 	

3.2 General Description of EUT

Product Name:	Clock Radio
Model No.:	AJT3300/37
Trade Mark:	Philips
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V3.0 (with EDR)
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Fixed production
Test Power Grade:	Level 3 (manufacturer declare)
Test Software of EUT:	RF Control Kit (manufacturer declare)
Antenna Type :	Integral
Antenna Gain:	0dBi
Power Supply:	Model: CS12F055180FUF Input: AC 100-240V 50/60Hz 500mA Ouput: DC 5.5V 1.8A
Test Voltage:	AC 120V 60Hz
AC cable:	150cm (Unshielded)

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM131200659101 Page: 5 of 84

Operation I	Operation Frequency each of channel						
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2402MHz
The Middle channel	2441MHz
The Highest channel	2480MHz

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM131200659101 Page: 6 of 84

3.3 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	50 % RH
Atmospheric Pressure:	1020mbar

3.4 Description of Support Units

The EUT has been tested independent unit.

3.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594 No tests were sub-contracted.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM131200659101 Page: 7 of 84

3.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• VCCI

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

3.7 Deviation from Standards

None.

3.8 Abnormalities from Standard Conditions

None.

3.9 Other Information Requested by the Customer

None.



Report No.: SZEM131200659101 Page: 8 of 84

3.10 Equipment List

	Conducted Emission				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2014-06-10
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2014-05-16
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2014-11-10
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2014-11-10
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2014-11-10
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2014-05-16
8	Coaxial Cable	SGS	N/A	SEL0025	2014-05-29
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
11	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24



Report No.: SZEM131200659101 Page: 9 of 84

	RE in Chamber				
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2014-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2014-05-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2014-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2014-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2014-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2014-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2014-05-29
13	Band filter	Amindeon	82346	SEL0094	2014-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2014-05-24
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2014-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2014-06-04

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM131200659101 Page: 10 of 84

	RF connected test					
ltem	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)	
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24	
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24	
4	Coaxial cable	SGS	N/A	SEL0178	2014-05-29	
5	Coaxial cable	SGS	N/A	SEL0179	2014-05-29	
6	Barometer	ChangChun	DYM3	SEL0088	2014-05-24	
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2014-05-16	
8	Band filter	amideon	82346	SEL0094	2014-05-16	
9	POWER METER	R & S	NRVS	SEL0144	2014-10-24	
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2014-05-16	
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24	

Note: The calibration interval is one year, all the instruments are valid.

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM131200659101 Page: 11 of 84

4 Test results and Measurement Data

4.1 Antenna Requirement

I	
Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
responsible party shall be use antenna that uses a unique co so that a broken antenna can electrical connector is prohibit 15.247(b) (4) requirement: The conducted output power antennas with directional gain section, if transmitting antenn power from the intentional rac	e designed to ensure that no antenna other than that furnished by the ed with the device. The use of a permanently attached antenna or of an oupling to the intentional radiator, the manufacturer may design the unit be replaced by the user, but the use of a standard antenna jack or ted. limit specified in paragraph (b) of this section is based on the use of hs that do not exceed 6 dBi. Except as shown in paragraph (c) of this has of directional gain greater than 6 dBi are used, the conducted output diator shall be reduced below the stated values in paragraphs (b)(1), on, as appropriate, by the amount in dB that the directional gain of the
EUT Antenna:	
of the antenna is OdBi.	the main PCB and no consideration of replacement. The best case gain






Report No.: SZEM131200659101 Page: 12 of 84

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:		Limit (c	lBuV)	
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
Test Procedure:	 * Decreases with the logarithm of the frequency. 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50µH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of 		linear e ot the T was ear The the the	

4.2 Conducted Emissions



Report No.: SZEM131200659101 Page: 13 of 84

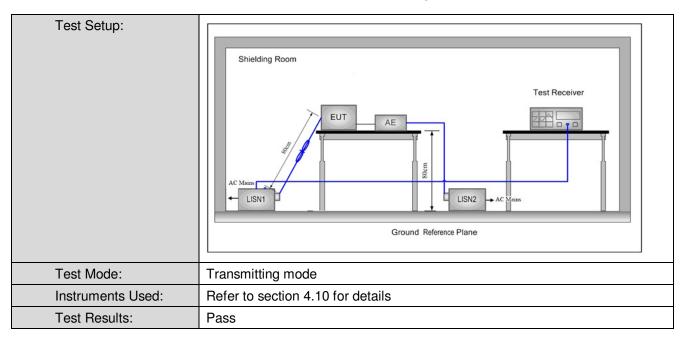

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM131200659101 Page: 14 of 84

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

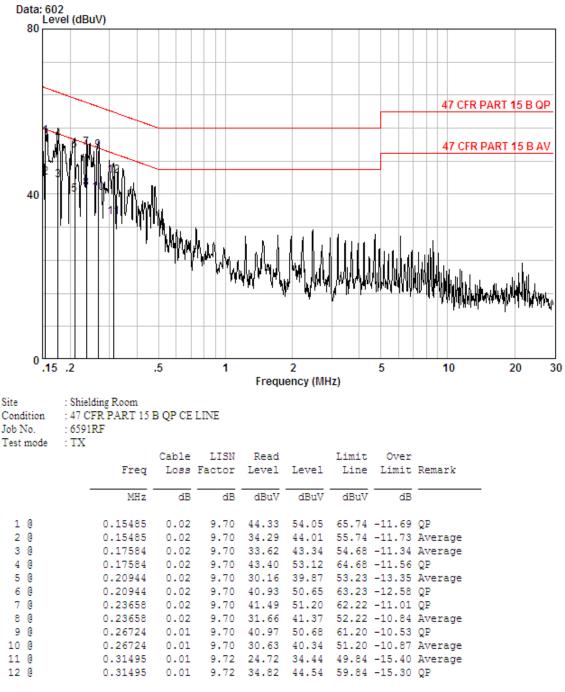



Report No.: SZEM131200659101 Page: 15 of 84

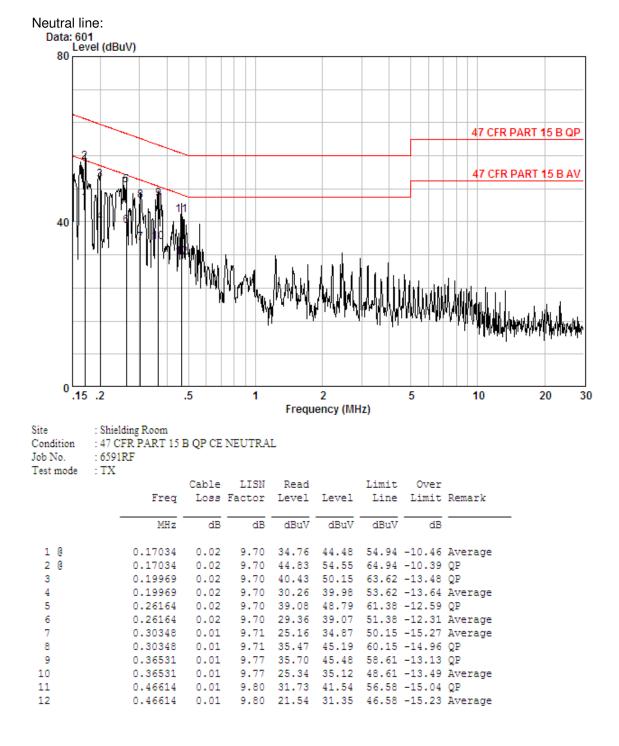

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:

2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM131200659101 Page: 16 of 84

4.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	20dBm	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	




Report No.: SZEM131200659101 Page: 17 of 84

Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	3.39	20.00	Pass
Middle	3.86	20.00	Pass
Highest	4.29	20.00	Pass
	π/4DQPSK mode		
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.47	20.00	Pass
Middle	2.08	20.00	Pass
Highest	2.58	20.00	Pass
	8DPSK mode		
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.74	20.00	Pass
Middle	2.32	20.00	Pass
Highest	2.76	20.00	Pass




Report No.: SZEM131200659101 Page: 18 of 84

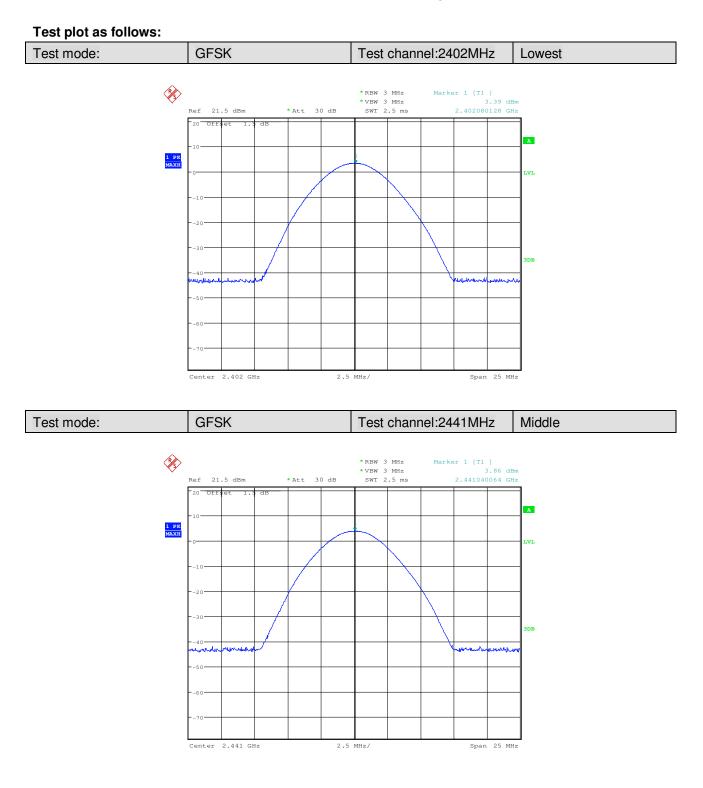





Report No.: SZEM131200659101 Page: 19 of 84

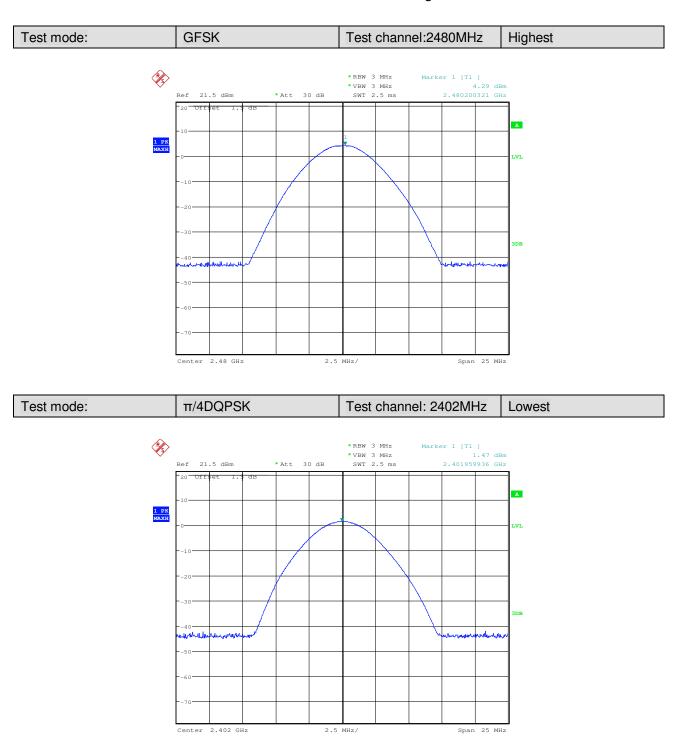




Report No.: SZEM131200659101 Page: 20 of 84

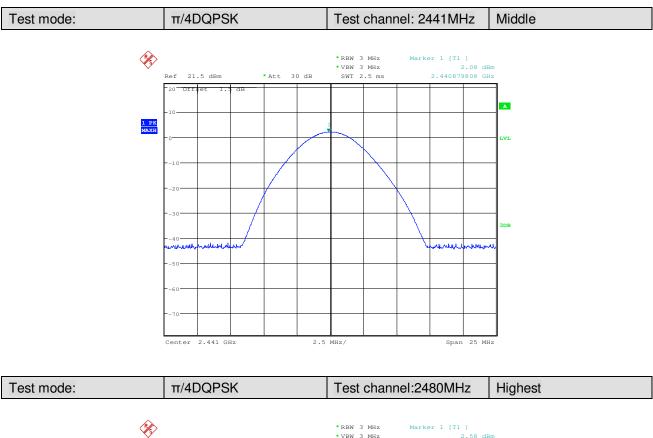

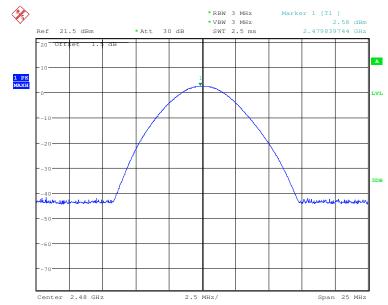




Report No.: SZEM131200659101 Page: 21 of 84

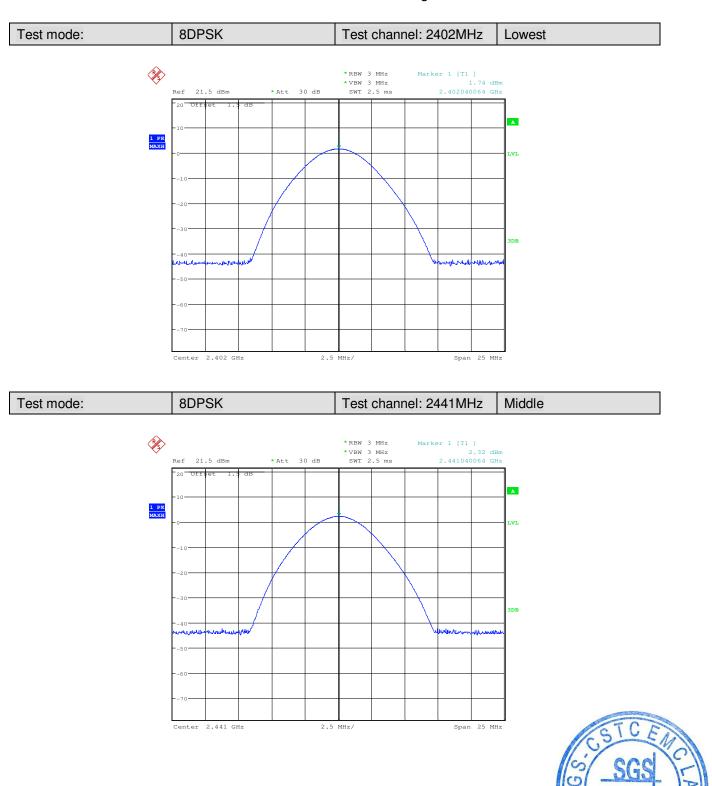



Report No.: SZEM131200659101 Page: 22 of 84

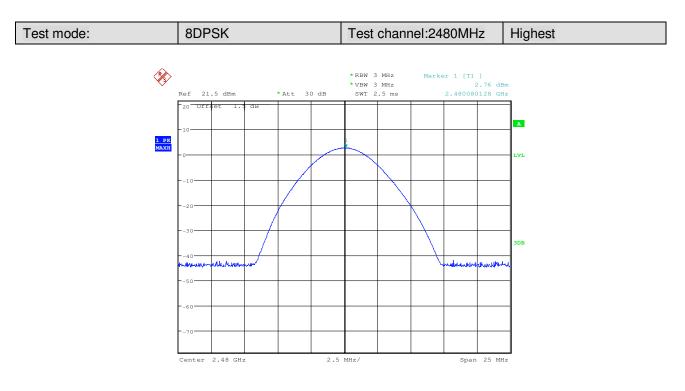



Report No.: SZEM131200659101 Page: 23 of 84

4.4 20dB Occupy Bandwidth


Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	NA	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of π /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	


Measurement Data

Test shannel	20dB Occupy Bandwidth (kHz)		z)
Test channel	GFSK	π/4DQPSK	8DPSK
Lowest	870.192307693	1206.730769	1206.730769
Middle	865.384615385	1211.538462	1206.730769
Highest	836.538461538	1206.730769	1211.538462



Report No.: SZEM131200659101 Page: 24 of 84

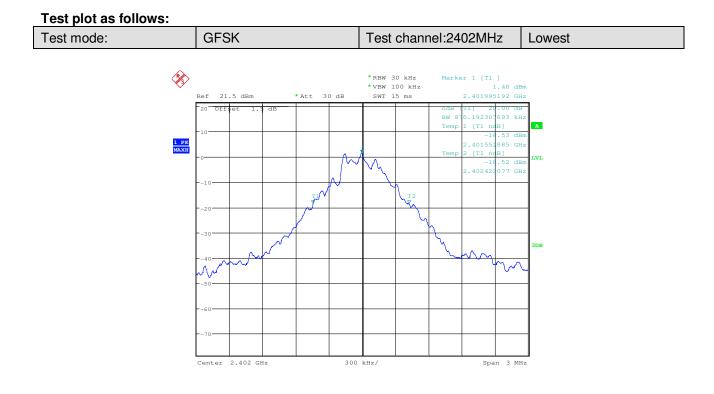

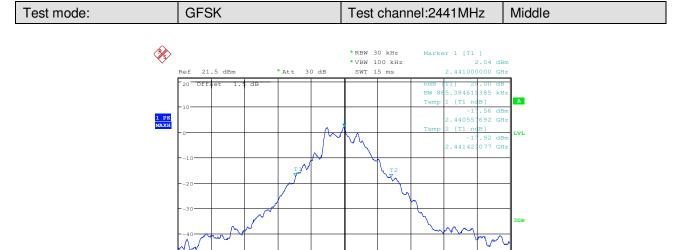

Center 2.441 GHz


"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


300 kHz/

Span 3 MHz




Report No.: SZEM131200659101 Page: 25 of 84

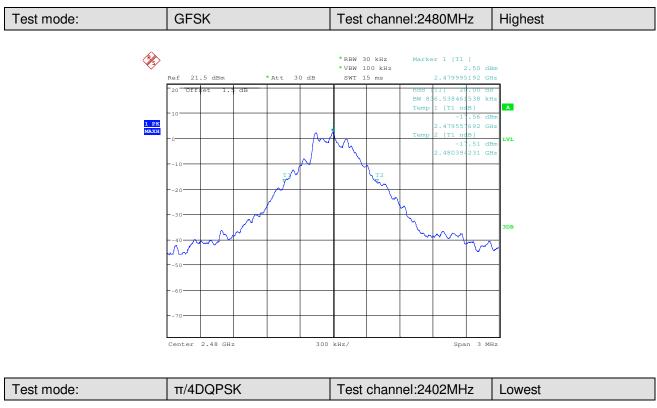

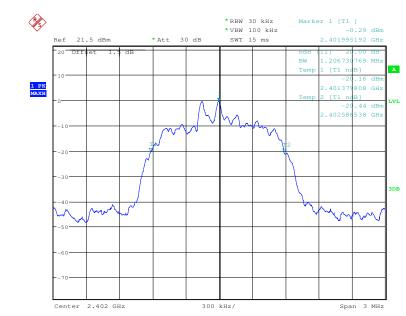




Report No.: SZEM131200659101 Page: 26 of 84

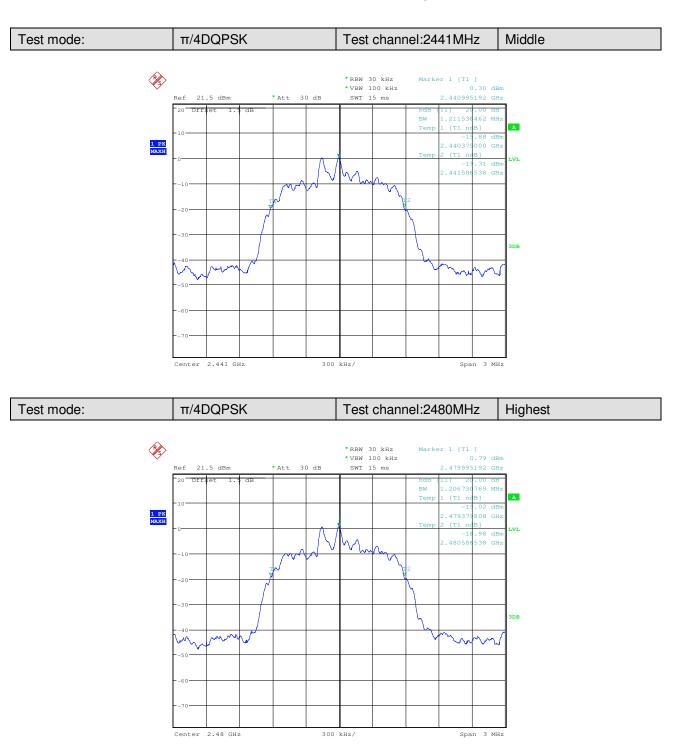




Report No.: SZEM131200659101 Page: 27 of 84

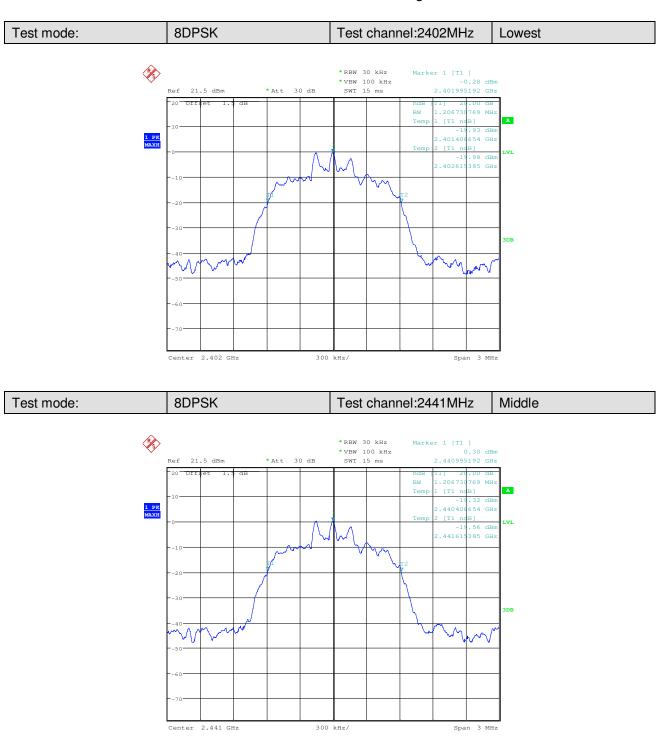



Report No.: SZEM131200659101 Page: 28 of 84

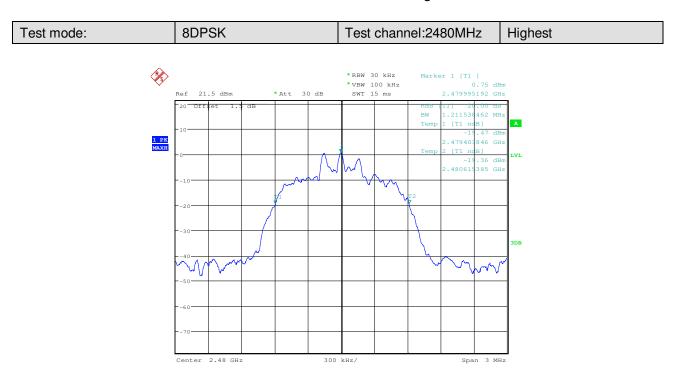



Report No.: SZEM131200659101 Page: 29 of 84

4.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Exploratory Test Mode:		
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of π /4DQPSK modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	



Report No.: SZEM131200659101 Page: 30 of 84

Measurement Data


GFSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1006	≥808	Pass
Middle	1002	≥808	Pass
Highest	1002	≥808	Pass
	π/4DQPSK m	ode	
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1002	≥808	Pass
Middle	1006	≥808	Pass
Highest	1006	≥808	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result
Lowest	1004	≥808	Pass
Middle	1002	≥808	Pass
Highest	1006	≥808	Pass

Note: According to section 5.4,

Mode	20dB bandwidth (kHz) (worse case)	Limit (kHz) (Carrier Frequencies Separation)
GFSK	870.192	580
π/4DQPSK	1211.538	808
8DPSK	1211.538	808



Report No.: SZEM131200659101 Page: 31 of 84

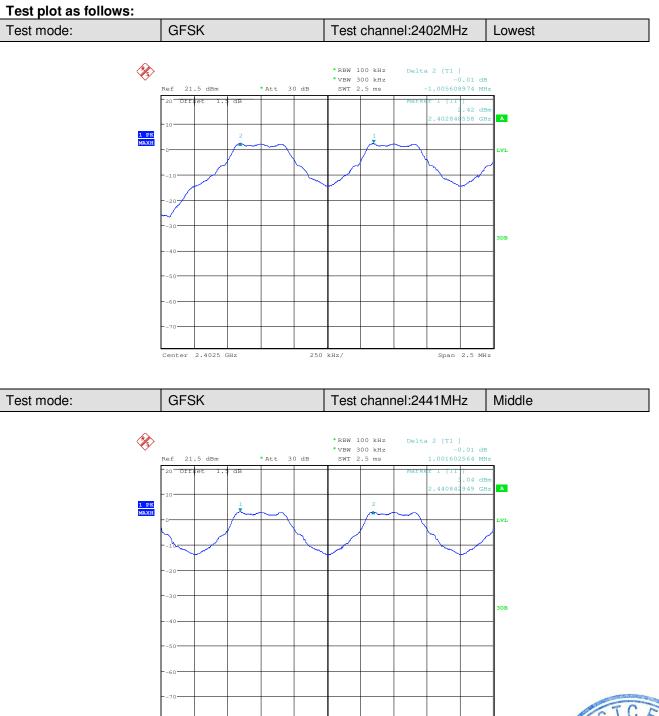


Center 2.4415 GHz 250 kHz/


Span 2.5 MHz






Report No.: SZEM131200659101 Page: 32 of 84

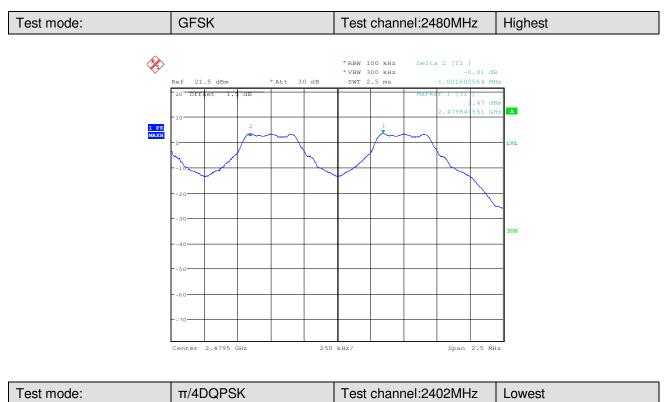

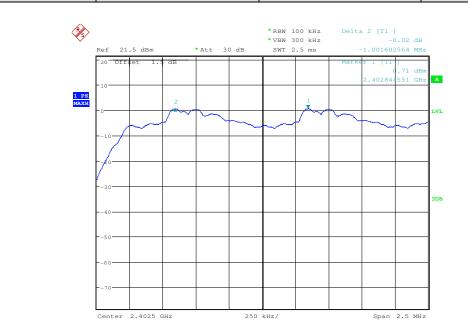




Report No.: SZEM131200659101 Page: 33 of 84

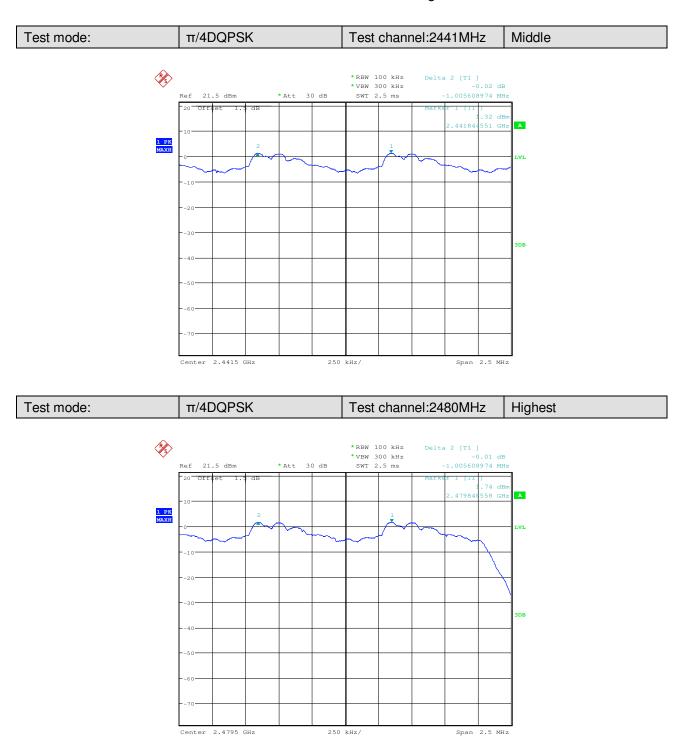




Report No.: SZEM131200659101 Page: 34 of 84

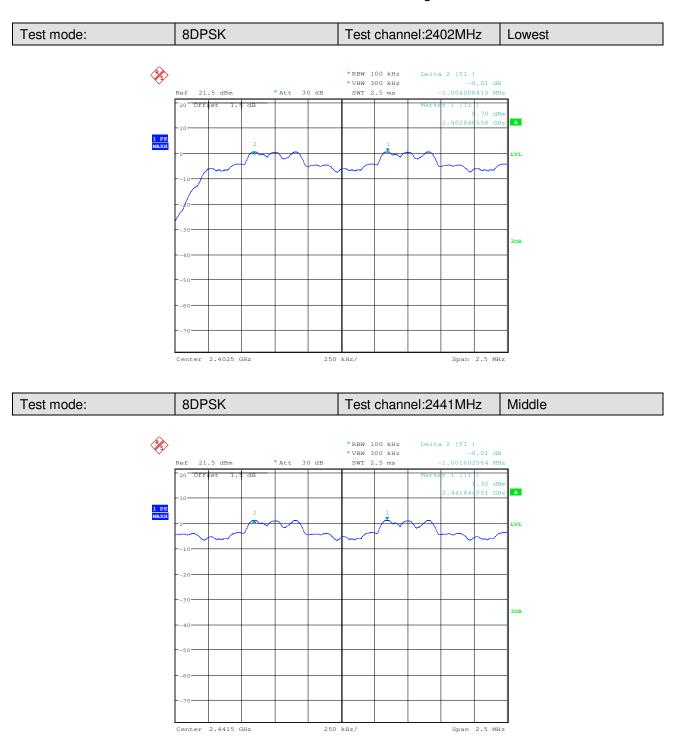



Report No.: SZEM131200659101 Page: 35 of 84

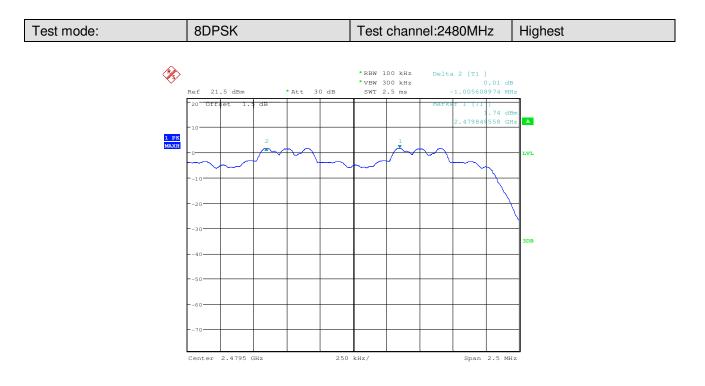



Report No.: SZEM131200659101 Page: 36 of 84

4.6 Hopping Channel Number

Test Requirement:	47 CFR Part 15C Section 15.247 (b)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane	
Limit:	At least 15 channels	
Test Mode:	Hopping transmitting with all kind of modulation.	
Instruments Used:	Refer to section 4.10 for details	
Test Results:	Pass	


Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM131200659101 Page: 37 of 84

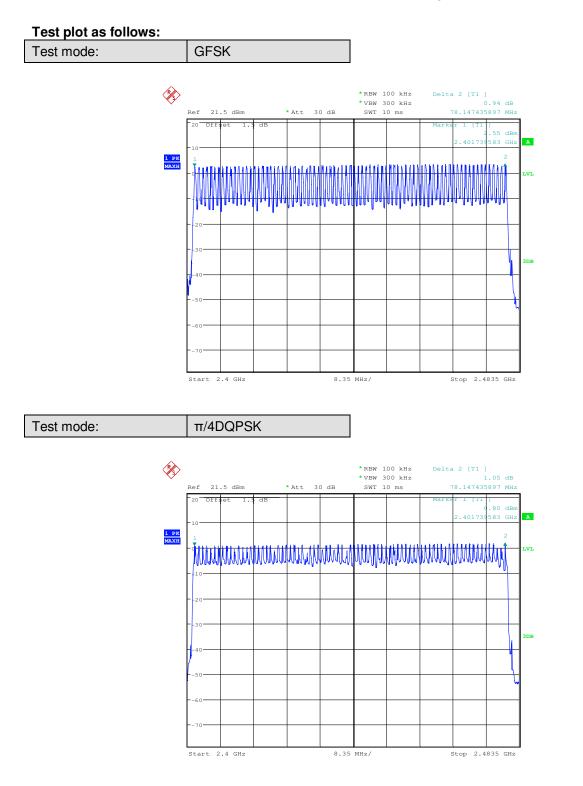



Report No.: SZEM131200659101 Page: 38 of 84

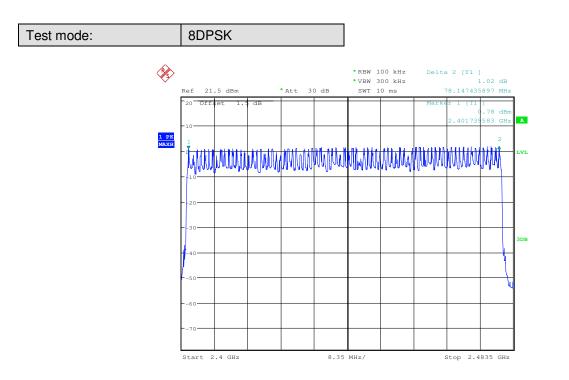



Report No.: SZEM131200659101 Page: 39 of 84

4.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)					
Test Method:	ANSI C63.10:2009					
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table					
	Ground Reference Plane					
Instruments Used:	Refer to section 4.10 for details					
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.					
Limit:	0.4 Second					
Test Results:	Pass					

Measurement Data

Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.12960	0.4
GFSK	DH3	0.26672	0.4
	DH5	0.31115	0.4
	2-DH1	0.13344	0.4
π/4DQPSK	2-DH3	0.26672	0.4
	2-DH5	0.31285	0.4
	3-DH1	0.13344	0.4
8DPSK	3-DH3	0.26672	0.4
	3-DH5	0.31115	0.4

Test Result:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

The lowest channel (2402MHz), middle channel (2441MHz), highest channel (2480MHz) as below


DH1 time slot=0.405(ms)*(1600/ (2*79))*31.6=129.60ms

DH3 time slot=1.667(ms)*(1600/ (4*79))*31.6=266.72ms

DH5 time slot=2.917(ms)*(1600/ (6*79))*31.6=311.15ms




Report No.: SZEM131200659101 Page: 40 of 84

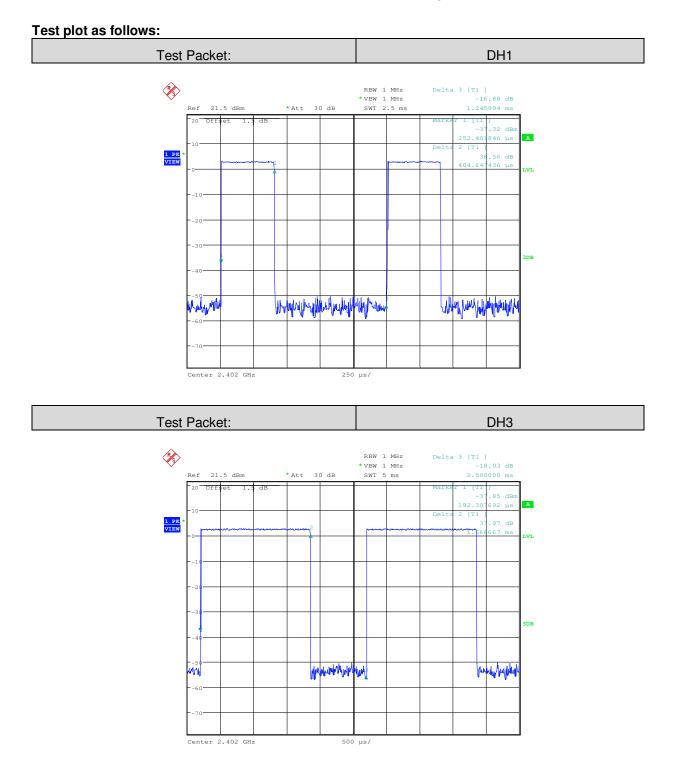




Report No.: SZEM131200659101 Page: 41 of 84

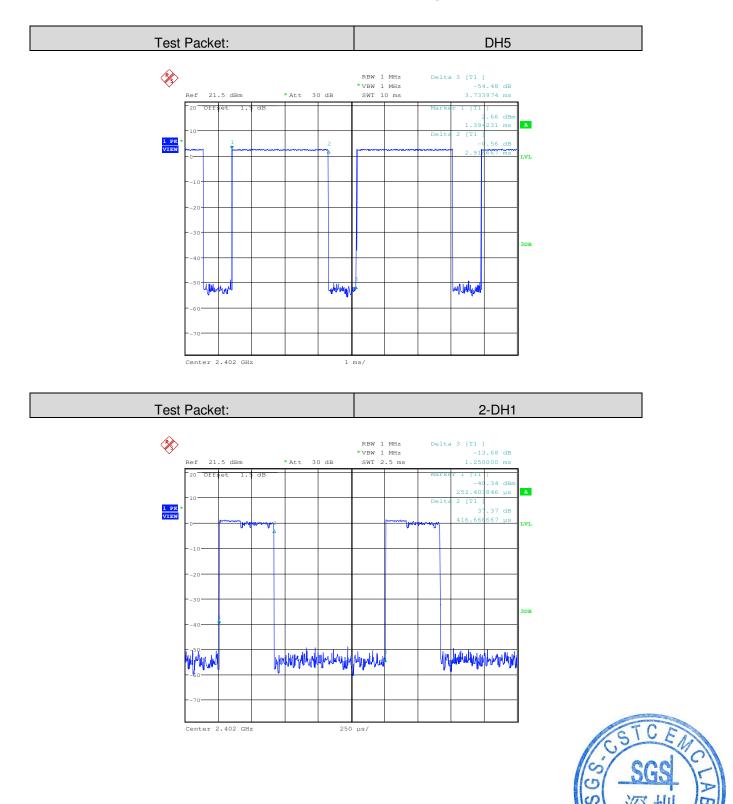



Report No.: SZEM131200659101 Page: 42 of 84

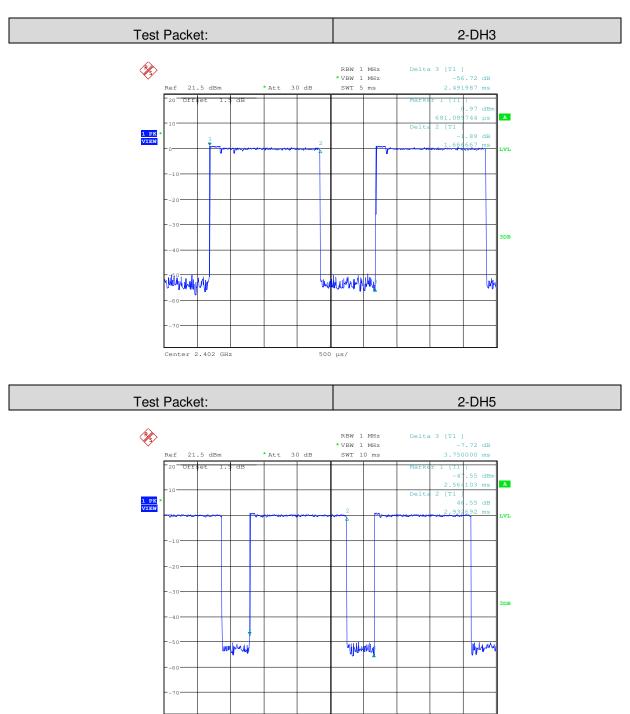


Center 2.402 GHz

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

1 ms/




Report No.: SZEM131200659101 Page: 43 of 84

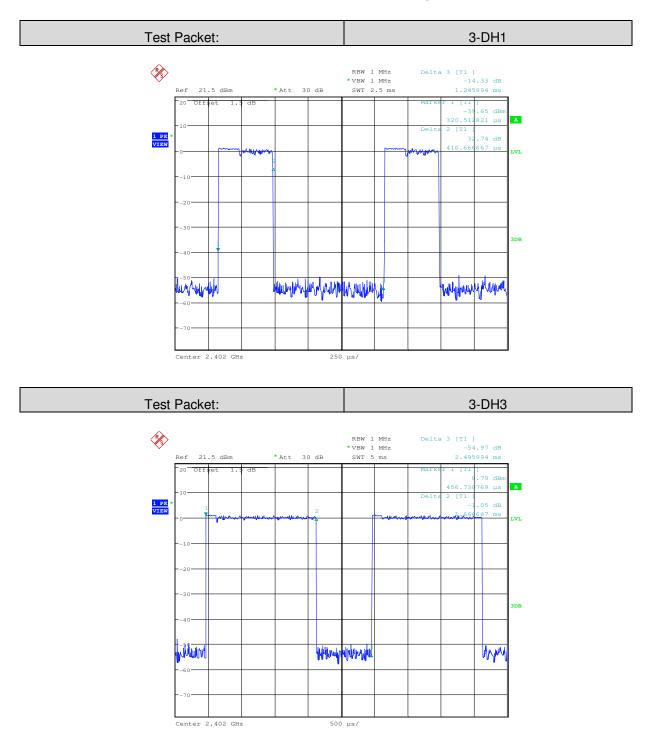



Report No.: SZEM131200659101 Page: 44 of 84

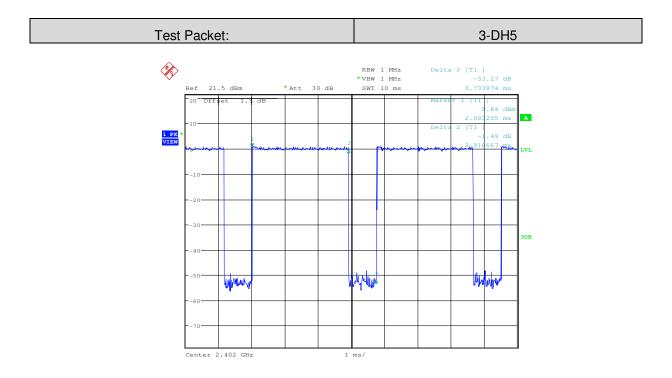



Report No.: SZEM131200659101 Page: 45 of 84


4.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)						
Test Method:	ANSI C63.10:2009						
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane						
	Remark:						
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type						
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.						
Instruments Used:	Refer to section 4.10 for details						
Test Results:	Pass						

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM131200659101 Page: 46 of 84

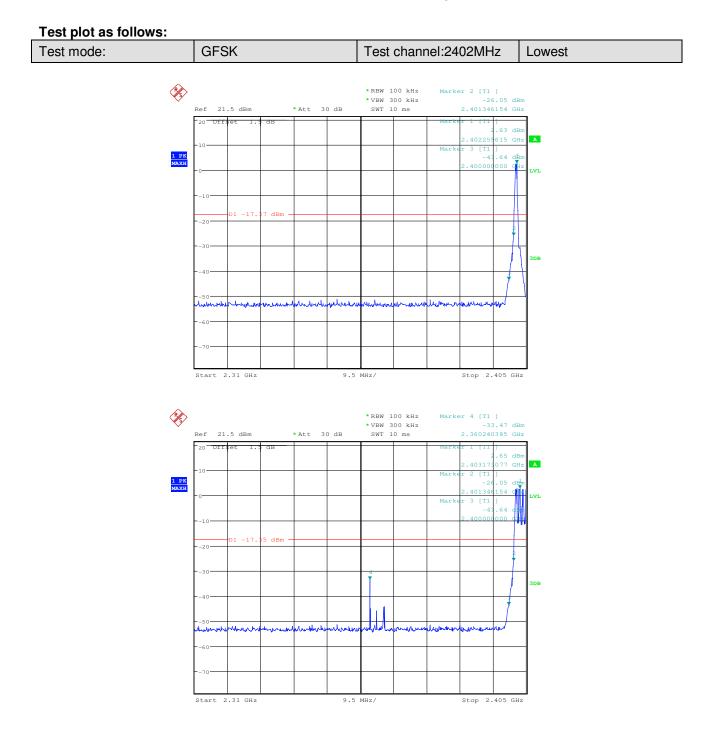




Report No.: SZEM131200659101 Page: 47 of 84

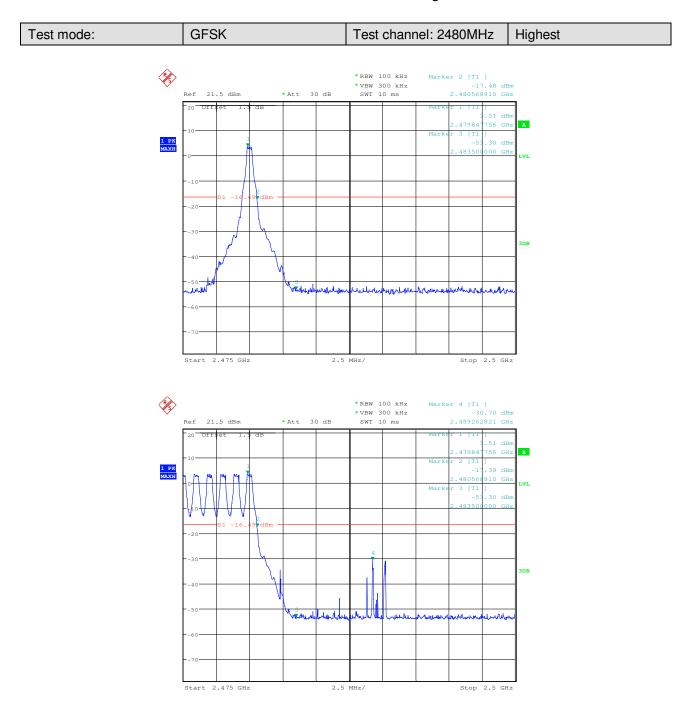




Report No.: SZEM131200659101 Page: 48 of 84

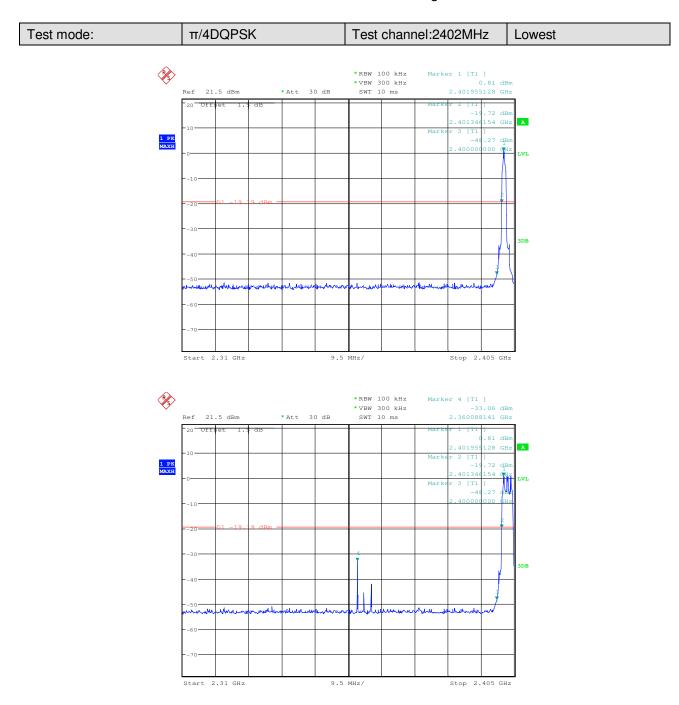




Report No.: SZEM131200659101 Page: 49 of 84

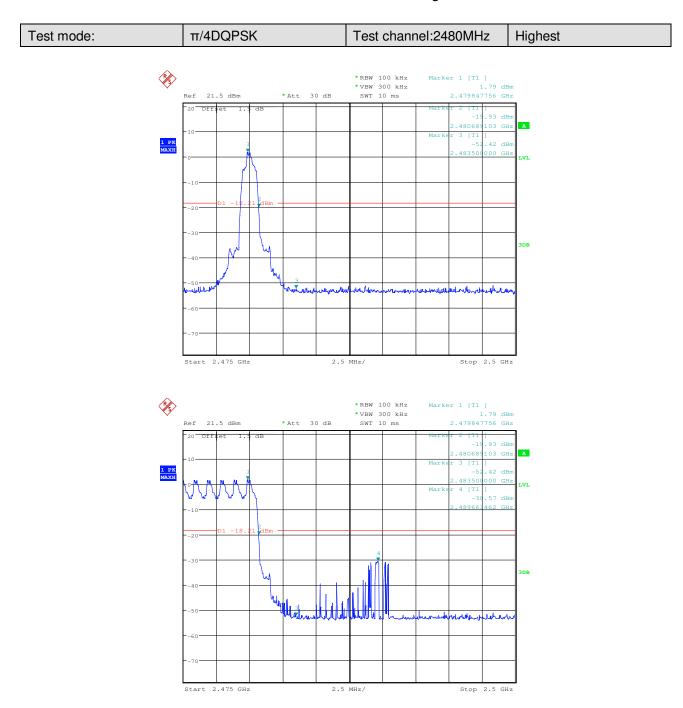




Report No.: SZEM131200659101 Page: 50 of 84

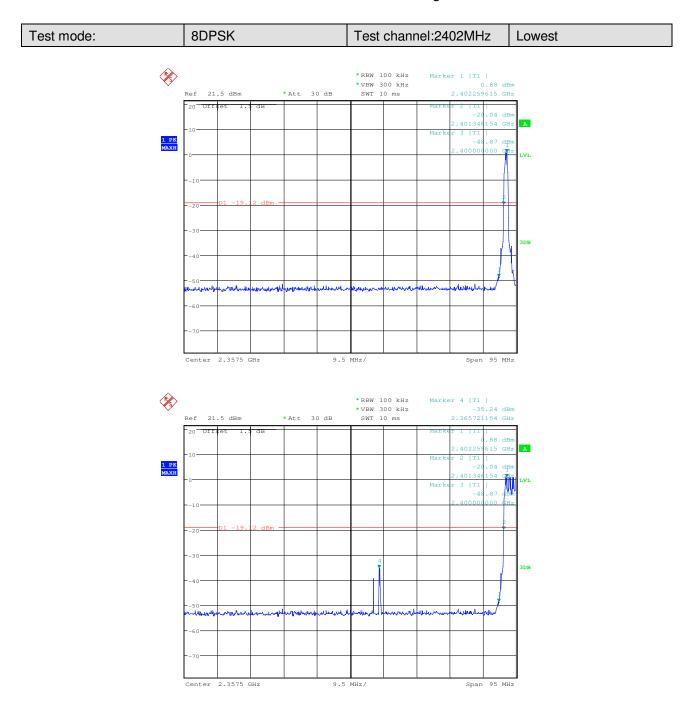



Report No.: SZEM131200659101 Page: 51 of 84

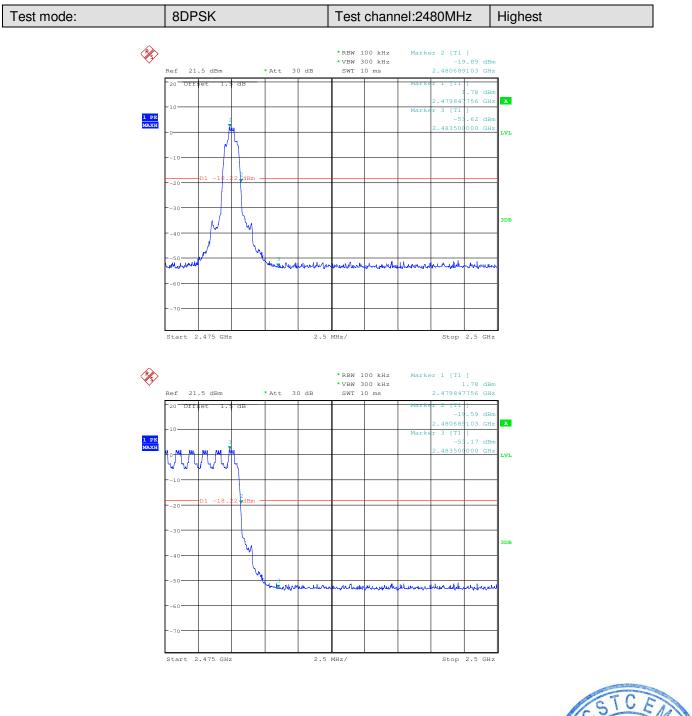

SCSTC EARCE SS SGS SS 深圳 STEN ZHE



Report No.: SZEM131200659101 Page: 52 of 84


4.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)				
Test Method:	ANSI C63.10:2009				
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:				
Limit:	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.				
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type				
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type, 2-DH1 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH1 of data type is worse case of 8DPSK modulation type.				
Instruments Used:	Refer to section 4.10 for details				
Test Results:	Pass				

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."





Report No.: SZEM131200659101 Page: 53 of 84

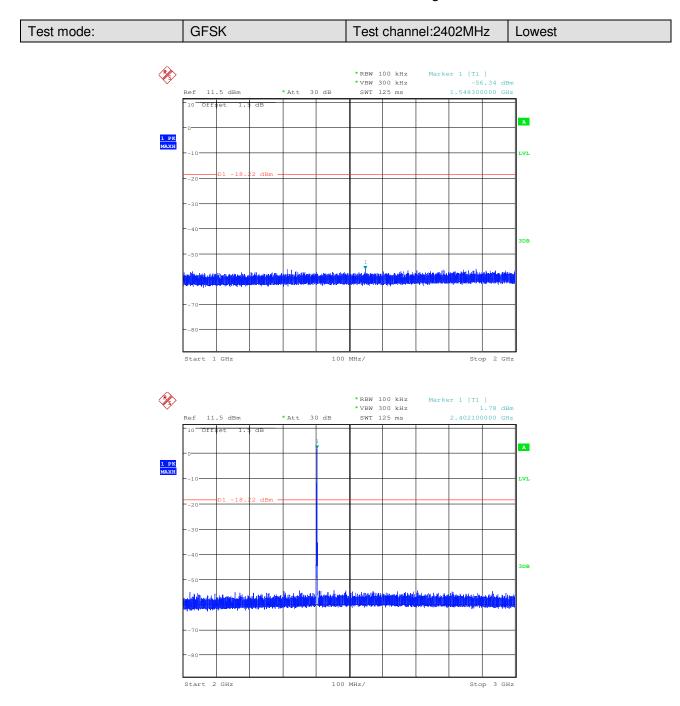



Report No.: SZEM131200659101 Page: 54 of 84

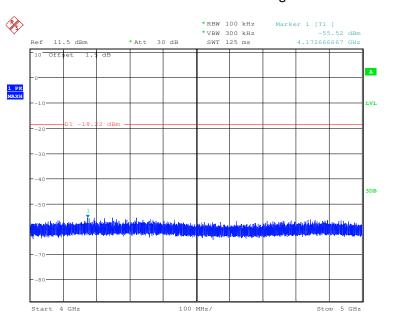

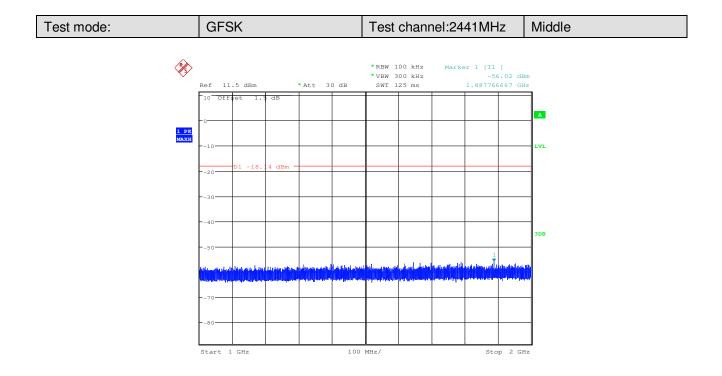



×

1 PK MAXH Ref


11.5 dBm

Off.

Start 2 GHz


SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM131200659101 55 of 84 Page: *RBW 100 kHz Marker 1 [T1] 1.86 dBm 2.440833333 GHz *VBW 300 kHz SWT 125 ms 30 dB * Att А LVL 100 MHz/ Stop 3 GHz *RBW 100 kHz Marker 1 [T1] *VBW 300 kHz SWT 125 ms -56.05 dBm 4.817933333 GHz 30 dB Att

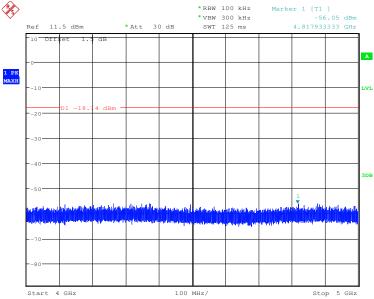





Report No.: SZEM131200659101 Page: 56 of 84

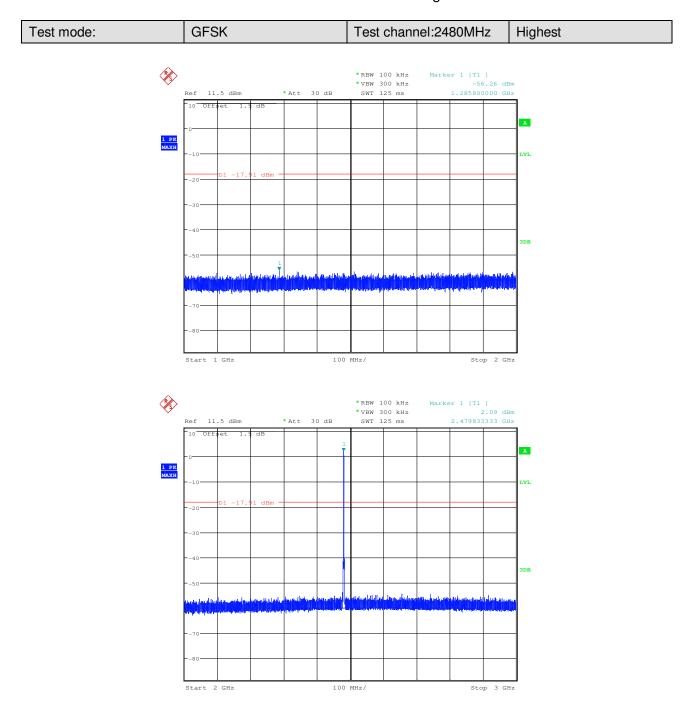



Report No.: SZEM131200659101 Page: 57 of 84

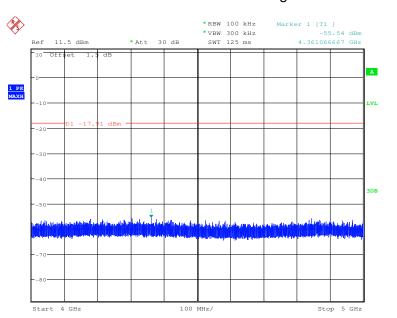

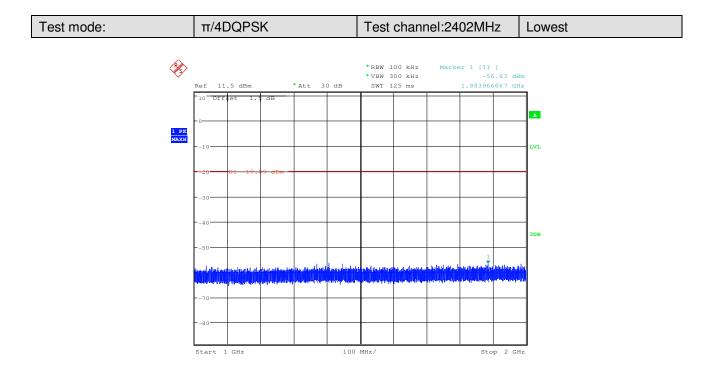



×

1 PK MAXH


×,

Ref

Offs


SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM131200659101 58 of 84 Page: *RBW 100 kHz Marker 1 [T1] 0.11 dBm 2.401833333 GHz *VBW 300 kHz SWT 125 ms 11.5 dBm * Att 30 dB А LVL 100 MHz/ Start 2 GHz Stop 3 GHz *RBW 100 kHz Marker 1 [T1] *VBW 300 kHz SWT 125 ms -56.22 dBm 4.395500000 GHz 30 dB Att dB А LVI

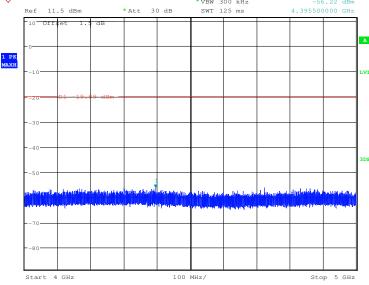




Report No.: SZEM131200659101 Page: 59 of 84

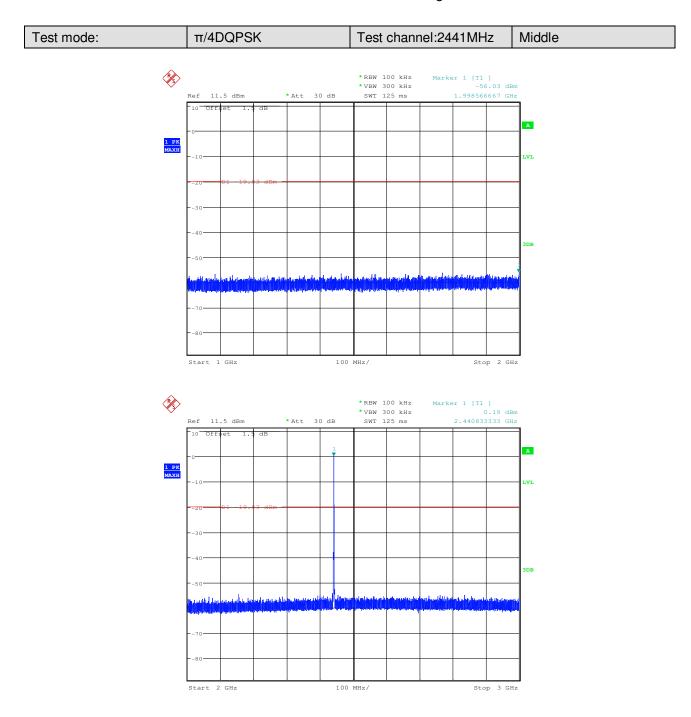




Report No.: SZEM131200659101 Page: 60 of 84

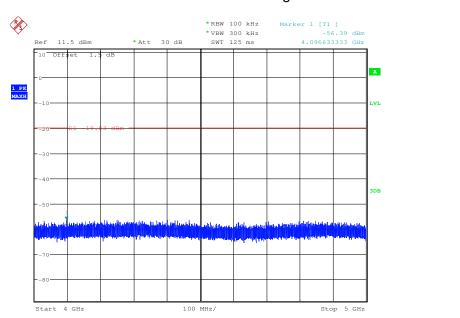


Test mode: π/4DQPSK	Test channel:2480MHz	Highest
---------------------	----------------------	---------

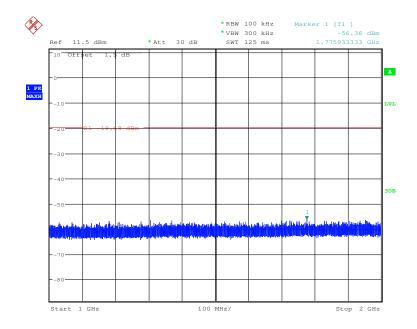




Report No.: SZEM131200659101 Page: 61 of 84

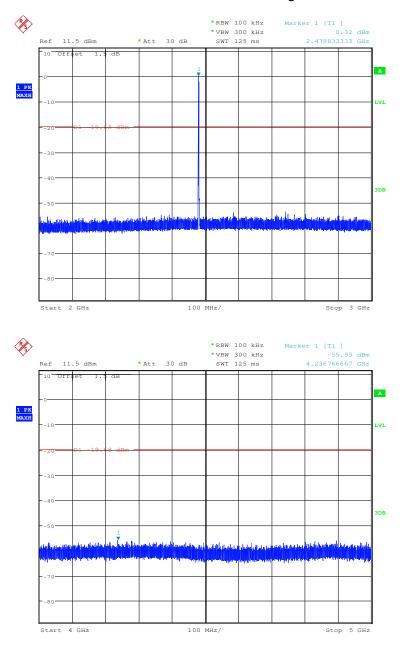







Report No.: SZEM131200659101 Page: 62 of 84

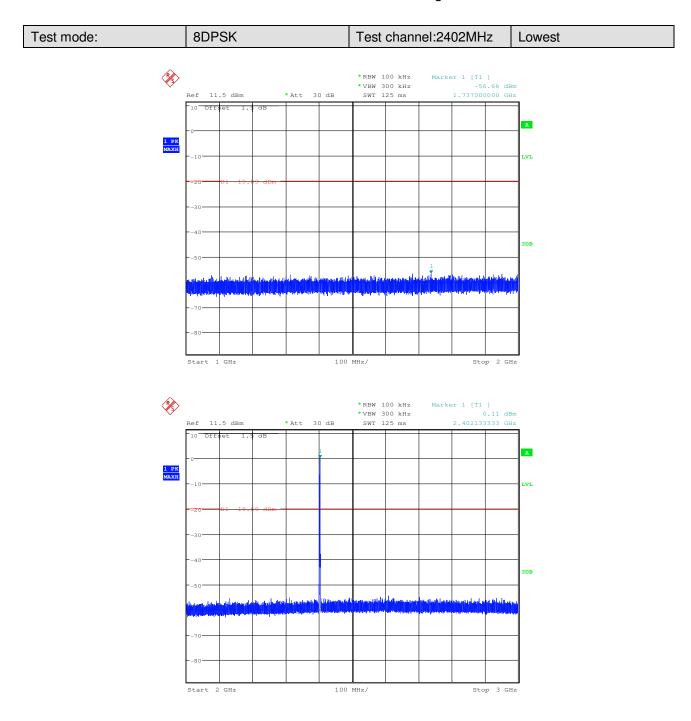




Report No.: SZEM131200659101 Page: 63 of 84

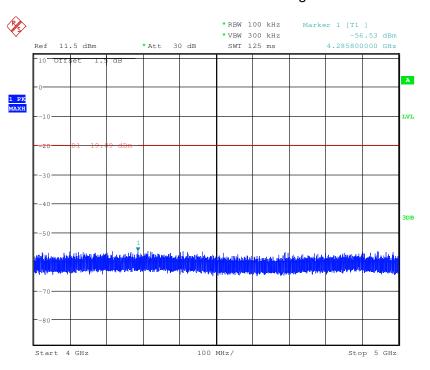

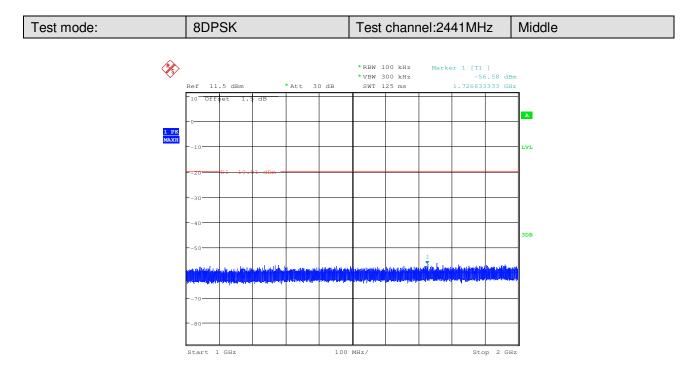




Report No.: SZEM131200659101 Page: 64 of 84

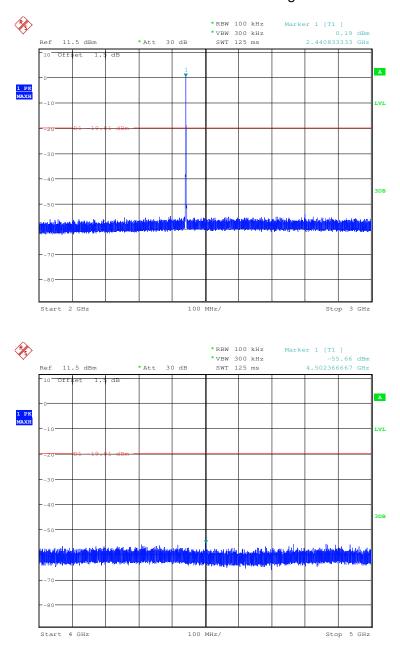




Report No.: SZEM131200659101 Page: 65 of 84

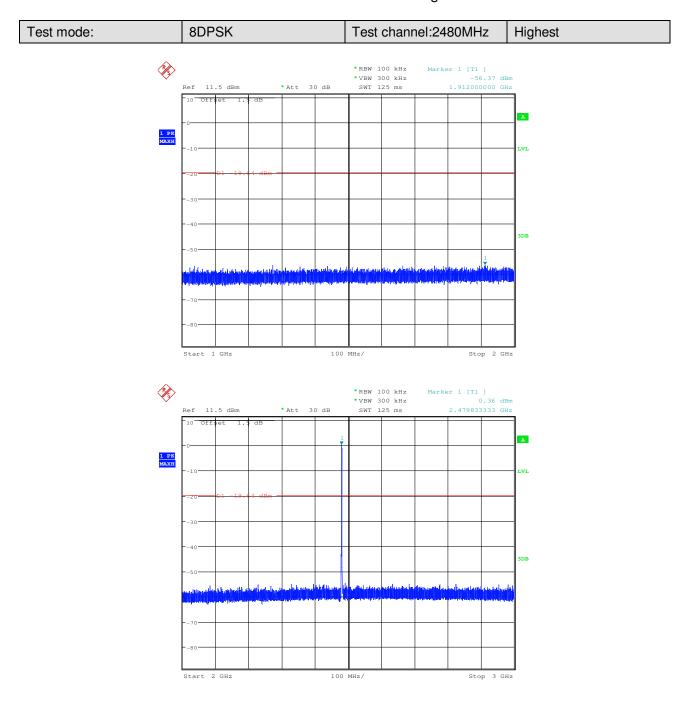



Report No.: SZEM131200659101 Page: 66 of 84

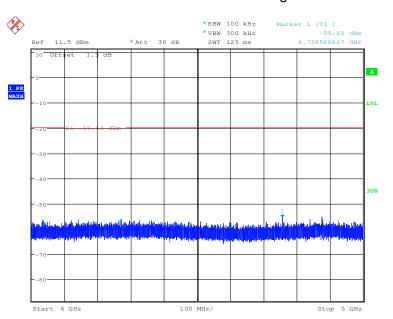

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.



Report No.: SZEM131200659101 Page: 67 of 84

4.10Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
Frequency hopping syste	tems shall have hopping channel carrier frequencies separated by a minimur
of 25 kHz or the 20 dB b	pandwidth of the hopping channel, whichever is greater.
Alternatively. Frequency	hopping systems operating in the 2400-2483.5 MHz band may have hoppir
channel carrier frequenc	cies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the
	ever is greater, provided the systems operate with an output power no greate
-	em shall hop to channel frequencies that are selected at the system hopping
	om ordered list of hopping frequencies. Each frequency must be used equal
	transmitter. The system receivers shall have input bandwidths that match th
	idths of their corresponding transmitters and shall shift frequencies in
synchronization with the	
EUT Pseudorandom Fr	requency Hopping Sequence
	uence may be generated in a nine-stage shift register whose 5th and 9th sta
outputs are added in a m	nodulo-two addition stage. And the result is fed back to the input of the first
stage. The sequence be	egins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initiali
with nine ones.	
 Number of shift register 	-
	lom sequence: 29 -1 = 511 bits
 Longest sequence of z 	zeros: 8 (non-inverted signal)
	•
	Ť.
	¥
Linear Feedbac	ck Shift Register for Generation of the PRBS sequence
	ck Shift Register for Generation of the PRBS sequence andom Frequency Hopping Sequence as follow:
	ck Shift Register for Generation of the PRBS sequence andom Frequency Hopping Sequence as follow: 7 64 8 73 16 75 1
An example of Pseudora	andom Frequency Hopping Sequence as follow:
An example of Pseudora	andom Frequency Hopping Sequence as follow:
An example of Pseudora	andom Frequency Hopping Sequence as follow:
An example of Pseudora	andom Frequency Hopping Sequence as follow:
An example of Pseudora 20 62 46 77 Each frequency used eq	andom Frequency Hopping Sequence as follow: 7 64 8 73 16 75 1 16 75 1 qually on the average by each transmitter.
An example of Pseudora 20 62 46 77 Each frequency used eq The system receivers ha	andom Frequency Hopping Sequence as follow:



Report No.: SZEM131200659101 Page: 68 of 84


4.11 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10: 2009								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency	Remark							
	0.009MHz-0.090MH	z	Peak	10kHz	z 30kHz	Peak			
	0.009MHz-0.090MH	z	Average	10kHz	z 30kHz	Average			
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	0.110MHz-0.490MH	z	Peak	10kHz	z 30kHz	Peak			
	0.110MHz-0.490MH	z	Average	10kHz	z 30kHz	Average			
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak			
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak			
	Above 1GHz		Peak	1MHz	z 3MHz	Peak			
	Above ronz		Peak	1MHz	z 10Hz	Average			
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (m			
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300			
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30			
	1.705MHz-30MHz		30	-	-	30			
	30MHz-88MHz		100	40.0	Quasi-peak	3			
	88MHz-216MHz		150	43.5	Quasi-peak	3			
	216MHz-960MHz		200	46.0	Quasi-peak	3			
	960MHz-1GHz		500	54.0	Quasi-peak	3			
	Above 1GHz50054.0Average3Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.								

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM131200659101 Page: 69 of 84

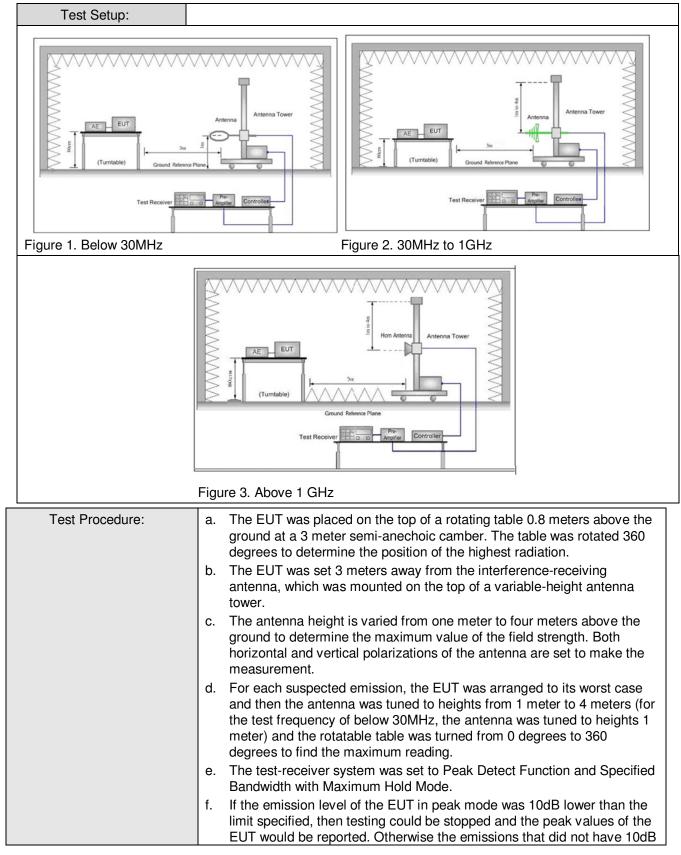



Report No.: SZEM131200659101 Page: 70 of 84


	margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)
	h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of
	data type
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worse case of GFSK modulation type
Instruments Used:	Refer to section 4.10 for details
Test Results:	Pass



Report No.: SZEM131200659101 Page: 71 of 84

4.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)				
Test mode:	Transmitting	Vertical		

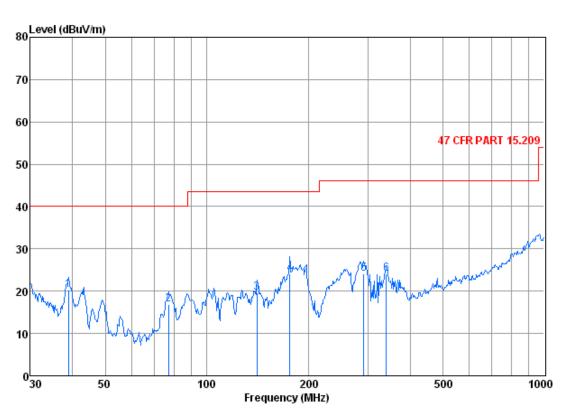


Condition: 47 CFR PART 15.209 3m 3142C VERTICAL Job No. : 6591RF Test mode: TX mode

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	38.89 77.05 140.84 176.27 292.06 340.78	0.60 1.01 1.30 1.36 1.87 2.03	11.47 4.79 8.68 7.73 9.38 10.50	27.32 27.23 26.95 26.79 26.42 26.73	35.57 38.26 36.52 41.78 39.30 38.28	16.83 19.55 24.08 24.13	40.00 43.50 43.50 46.00	





Report No.: SZEM131200659101 Page: 72 of 84

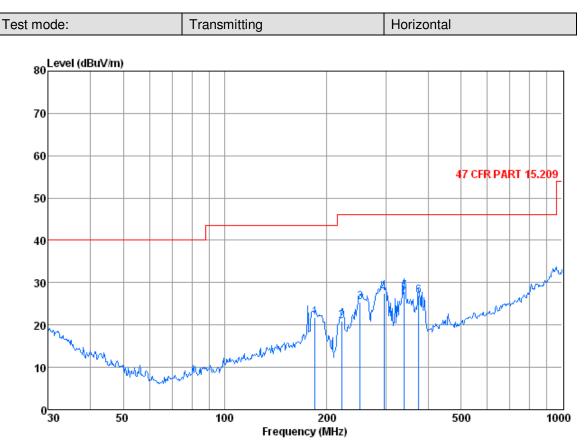

Condition: 47 CFR PART 15.209 3m 3142C HORIZONTAL Job No. : 6591RF Test mode: TX mode

	Freq			Preamp Factor	Read Level		Limit Line	Over Limit
,	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 2 3 4 5 6	185.14 222.17 252.06 296.18 340.78 375.94	1.38 1.53 1.68 1.88 2.03 2.13	6.70 7.20 8.63 9.54 10.50 11.49	26.75 26.62 26.53 26.41 26.73 26.97	40. 49 38. 87 41. 63 42. 44 42. 11 40. 21	21.82 20.98 25.41 27.45 27.91 26.86	46.00 46.00 46.00 46.00	-21.68 -25.02 -20.59 -18.55 -18.09 -19.14



Report No.: SZEM131200659101 Page: 73 of 84

Worse case r	mode:	GFSK(DH1)		Test channel: 2402MHz		Remar	Remark:	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2935.153	5.01	33.31	40.26	47.90	45.96	74	-28.04	Vertical
3854.077	6.26	33.63	40.93	47.73	46.69	74	-27.31	Vertical
4804.000	7.44	34.70	41.63	48.03	48.54	74	-25.46	Vertical
7206.000	8.72	35.88	39.87	47.55	52.28	74	-21.72	Vertical
9608.000	9.68	37.30	37.80	42.37	51.55	74	-22.45	Vertical
12178.980	11.36	39.09	38.35	40.28	52.38	74	-21.62	Vertical
2942.635	5.01	33.31	40.26	46.66	44.72	74	-29.28	Horizontal
3873.749	6.28	33.66	40.94	47.39	46.39	74	-27.61	Horizontal
4804.000	7.44	34.70	41.63	47.44	47.95	74	-26.05	Horizontal
7206.000	8.72	35.88	39.87	47.21	51.94	74	-22.06	Horizontal
9608.000	9.68	37.30	37.80	43.01	52.19	74	-21.81	Horizontal
12303.620	11.41	39.21	38.40	40.43	52.65	74	-21.35	Horizontal

4.11.2 Transmitter Emission above 1GHz

Worse case	mode:	GFSK(DH1)		channel: 1MHz	Middle		Remark:		Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Prea Fac (dl	tor	Read Level (dBuV)	Level (dBuV/m)	Limit (dBuʻ		Over Limit (dB)	Polarization
2972.750	5.04	33.35	40.	28	46.43	44.54	74	1	-29.46	Vertical
3854.077	6.26	33.63	40.	93	46.47	45.43	74	1	-28.57	Vertical
4882.000	7.48	34.59	41.	68	48.46	48.85	74		-25.15	Vertical
7323.000	8.87	35.93	39.	77	47.55	52.58	74		-21.42	Vertical
9764.000	9.74	37.48	37.	66	41.83	51.39	74	1	-22.61	Vertical
12303.620	11.41	39.21	38.	40	38.80	51.02	74		-22.98	Vertical
2846.851	4.94	33.19	40.	19	46.52	44.46	74	1	-29.54	Horizontal
3776.385	6.16	33.53	40.	87	47.89	46.71	74	1	-27.29	Horizontal
4882.000	7.48	34.59	41.	68	47.28	47.67	74	1	-26.33	Horizontal
7323.000	8.87	35.93	39.	77	46.71	51.74	74	1	-22.26	Horizontal
9764.000	9.74	37.48	37.	66	42.48	52.04	74	1	-21.96	Horizontal
12334.980	11.42	39.24	38.	42	40.64	52.88	74	1	-21.12	Horizontal



Report No.: SZEM131200659101 Page: 74 of 84

Worse case	mode:	GFSK(DH1		t channel: Highest 0MHz		Re	emark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m	I Imit	Polarization
2972.750	5.04	33.35	40.28	46.59	44.70	74	-29.30	Vertical
3805.334	6.18	33.57	40.90	47.06	45.91	74	-28.09	Vertical
4960.000	7.53	34.46	41.74	48.01	48.26	74	-25.74	Vertical
7440.000	9.01	35.98	39.67	47.38	52.70	74	-21.30	Vertical
9920.000	9.81	37.63	37.53	42.53	52.44	74	-21.56	Vertical
12366.420	11.43	39.28	38.43	40.43	52.71	52.71 74		Vertical
2972.750	5.04	33.35	40.28	47.27	45.38	74	-28.62	Horizontal
3913.393	6.33	33.70	40.97	47.59	46.65	74	-27.35	Horizontal
4960.000	7.53	34.46	41.74	48.20	48.45	74	-25.55	Horizontal
7440.000	9.01	35.98	39.67	46.34	51.66	74	-22.34	Horizontal
9920.000	9.81	37.63	37.53	41.98	51.89	74	-22.11	Horizontal
12303.620	11.41	39.21	38.40	39.39	51.61	74	-22.39	Horizontal

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



Report No.: SZEM131200659101 Page: 75 of 84

4.12Band edge (Radiated Emission)

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10: 2009									
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)									
Limit:	Frequency	Limit (dBuV/m @3m)	Remark							
	30MHz-88MHz	40.0	Quasi-peak Value							
	88MHz-216MHz	43.5	Quasi-peak Value							
	216MHz-960MHz	46.0	Quasi-peak Value							
	960MHz-1GHz	54.0	Quasi-peak Value							
	Above 1GHz	54.0	Average Value							
	Above IGHz	74.0	Peak Value							
Test Setup:										
AE EUT (Turntable) Ground Reference Pla Test Receiver		AE EUT (Turntable) Ground Reference Pit Test Receiver	Horn Antenna Tower							
Figure 1. 30MHz to 1GHz	Fig	gure 2. Above 1 GHz								




Report No.: SZEM131200659101 Page: 76 of 84

Test Procedure:	 a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel g. Test the EUT in the lowest channel , the Highest channel h. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of GFSK modulation type
Instruments Used:	Refer to section 4.10 for details

[&]quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM131200659101 Page: 77 of 84

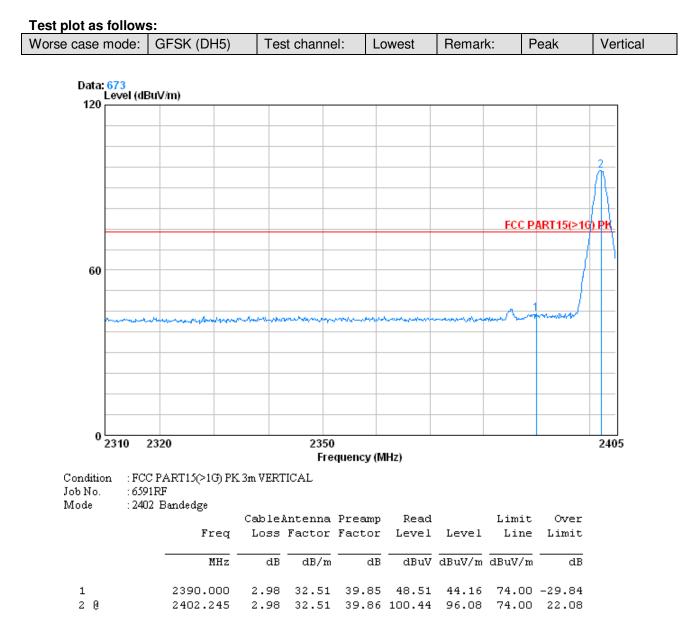




Report No.: SZEM131200659101 Page: 78 of 84

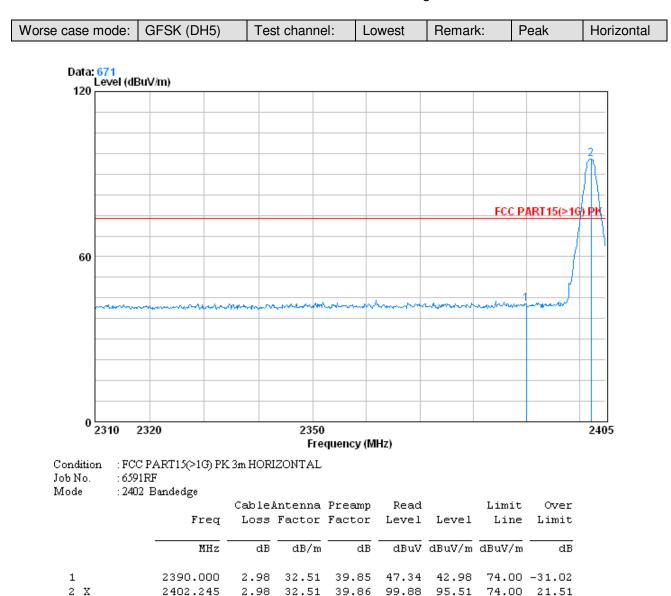




Report No.: SZEM131200659101 Page: 79 of 84

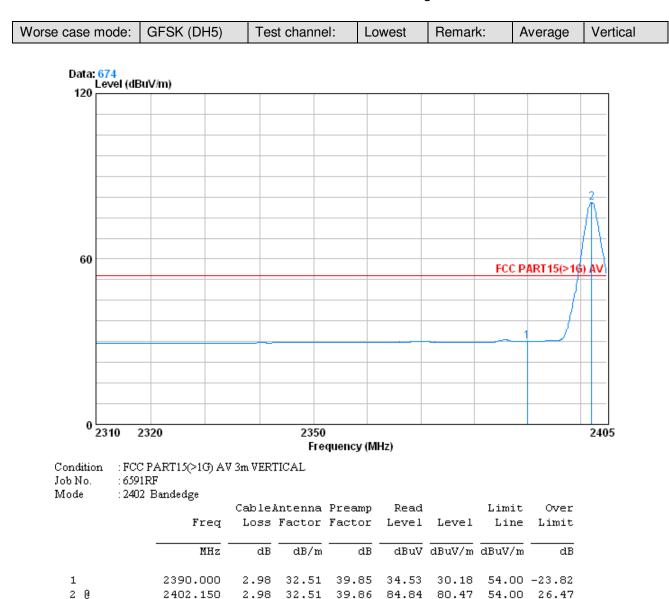




Report No.: SZEM131200659101 Page: 80 of 84

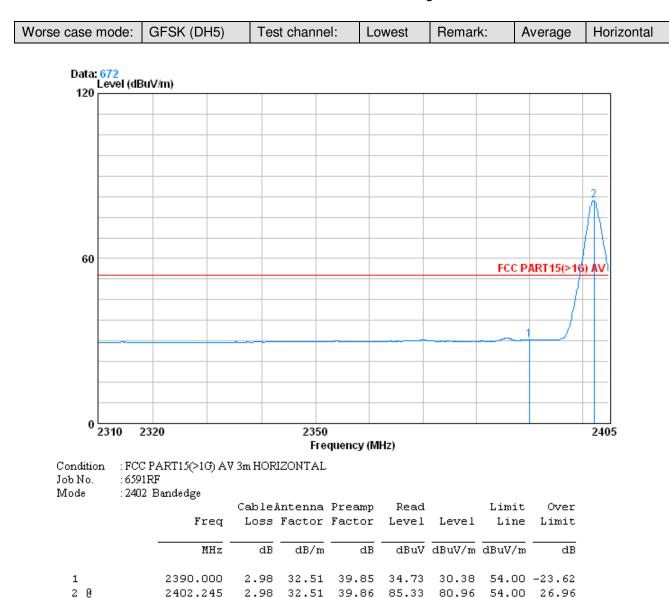



Report No.: SZEM131200659101 Page: 81 of 84

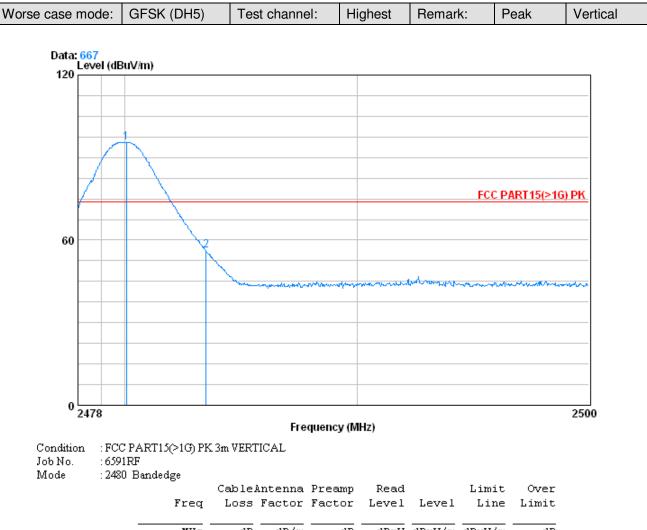

	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10 2	2480.068 2483.500							





1 X

2


2479.804

2483.500

SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEM131200659101 Page: 82 of 84



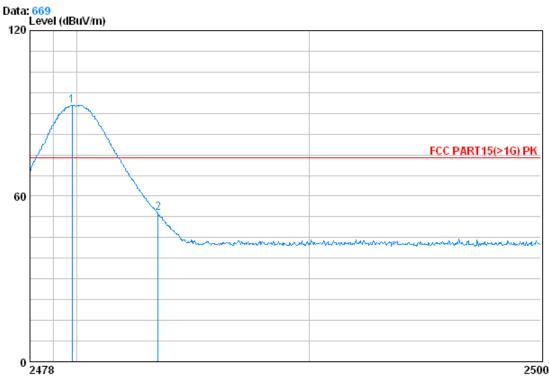

Frequency (MHz)

3.03 32.67 39.92 97.10 92.88 74.00 18.88


3.03 32.67 39.92 58.03 53.81 74.00 -20.19

Condition Job No. Mode	: FCC PART15(>1G) PK : 6591RF : 2480 Bandedge	3m HORI	IZONTAL					
	-	Cablei	Antenna	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB



Report No.: SZEM131200659101 Page: 83 of 84



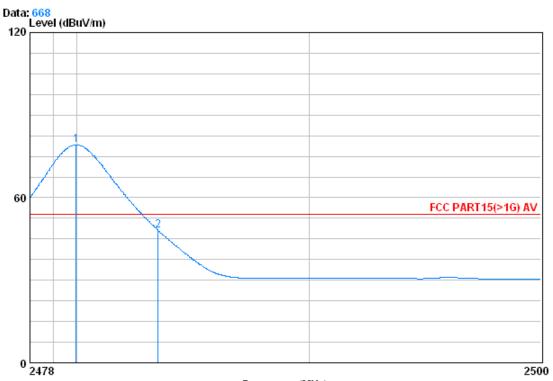

Frequency (MHz)


Condition : FCC PART15(>1G) AV 3m VERTICAL Job No. : 6591RF Mode : 2480 Bandedge

		CableAntenna		Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
10	2479.980	3.03	32.67	39.92	83.45	79.23	54.00	25.23
2	2483.500	3.03	32.67	39.92	52.42	48.20	54.00	-5.80



Report No.: SZEM131200659101 Page: 84 of 84



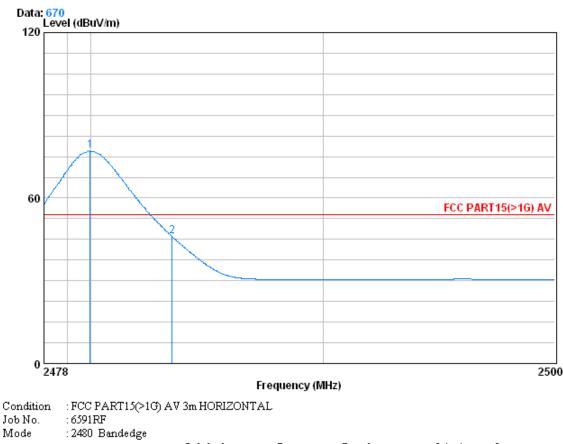

		CableAntenna		Preamp Read		Limit		Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
10	2479.980	3.03	32.67	39.92	81.24	77.03	54.00	23.03	
2	2483.500	3.03	32.67	39.92	50.29	46.07	54.00	-7.93	

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor