

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM141100639001

Email: ee.shenzhen@sgs.com Page: 1 of 99

# **FCC REPORT**

**Application No.:** SZEM1411006390CR(SGS GZ No.:GZEM1411006137AV)

**Applicant:** WOOX Innovations Limited WOOX Innovations Limited

Factory: Foshan City Nanhai Commtech Technology Co., Ltd

Product Name: Bluetooth Headset

Model No.(EUT): SHB9250

Add Model No.: SHB9250/XX, SHB9250YY/XX (X=0 to 9, Y=A to Z)

Trade mark: Philips

FCC ID: 2AANUSHB9250

**Standards:** 47 CFR Part 15, Subpart C (2013)

**Date of Receipt:** 2014-11-21

**Date of Test:** 2014-11-28 to 2014-12-17

**Date of Issue:** 2015-04-23

Test Result: PASS \*

#### Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM141100639001

Page: 2 of 99

# 2 Version

Revision Record						
Version	Chapter	Date	Modifier	Remark		
00		2014-12-19		Original		

Authorized for issue by:		
Tested By	Jack Liery  (Jack Liang) /Project Engineer	2014-12-17  Date
Prepared By	Cintin W	2014-12-19
	(Linlin Lv) /Clerk	Date
Checked By	Owen Zhou	2015-01-06
	(Owen Zhou) /Reviewer	Date



Report No.: SZEM141100639001

Page: 3 of 99

# 3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 (2009)	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 (2009)	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10 (2009)	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10 (2009)	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10 (2009)	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List(7 July 2002)	ANSI C63.10 (2009)	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 (2009)	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 (2009)	PASS

#### Remark:

Model No.: SHB9250, SHB9250/XX, SHB9250YY/XX (X=0 to 9, Y=A to Z)

Only the model SHB9250 was tested, since the circuit design, PCB layout, electrical components used, internal wiring and functions were identical for the above models, with difference being the model numbers indicate. Being sold to different countries.



Report No.: SZEM141100639001

Page: 4 of 99

# 4 Contents

			Page
1	CC	OVER PAGE	1
2	VF	ERSION	2
3	TE	EST SUMMARY	3
4	CC	ONTENTS	4
5	CI	ENERAL INFORMATION	E
J	G		
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
6	EC	QUIPMENT LIST	9
7	TE	EST RESULTS AND MEASUREMENT DATA	12
	7.1	Antenna Requirement	12
	7.2	CONDUCTED EMISSIONS	
	7.3	CONDUCTED PEAK OUTPUT POWER	
	7.4	20DB OCCUPY BANDWIDTH	24
	7.5	CARRIER FREQUENCIES SEPARATION	30
	7.6	HOPPING CHANNEL NUMBER	37
	7.7	DWELL TIME	
	7.8	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	7.9	Spurious RF Conducted Emissions	
	7.10		
	7.11	RADIATED SPURIOUS EMISSION	
		11.1 Radiated Emission below 1GHz	
		11.2 Transmitter Emission above 1GHz	





Report No.: SZEM141100639001

Page: 5 of 99

# 5 General Information

#### 5.1 Client Information

Applicant:	WOOX Innovations Limited
Address of Applicant:	5/F, Philips Electronics Building, No. 5 Science Park East Avenue, Hong Kong Science Park, Shatin, N.T., HONG KONG.
Manufacturer:	WOOX Innovations Limited
Address of Manufacturer:	5/F, Philips Electronics Building, No. 5 Science Park East Avenue, Hong Kong Science Park, Shatin, N.T., HONG KONG.
Factory:	Foshan City Nanhai Commtech Technology Co., Ltd
Address of Factory:	Yi Zhong, DaZhen, Da Li, Nan Hai District, FoShan City, Guangdong Province, P.R.C

# 5.2 General Description of EUT

Product Name:	Bluetooth Headset
Model No.:	SHB9250
Trade Mark:	Philips
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	V4.0
	This test report is for classic mode
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, π/4DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Portable production
Antenna Type:	Integral
Antenna Gain:	3.33dBi
EUT Power Supply:	AC/DC:
	3.7V rechargeable battery
	120V SUPPLIED BY ADAPTOR



Report No.: SZEM141100639001

Page: 6 of 99

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency	
The Lowest channel	2402MHz	
The Middle channel	2441MHz	
The Highest channel	2480MHz	



Report No.: SZEM141100639001

Page: 7 of 99

#### 5.3 Test Environment

Operating Environment:		
Temperature:	24.0 °C	
Humidity:	52% RH	
Atmospheric Pressure:	1005mbar	

# 5.4 Description of Support Units

The EUT has been tested independently.

#### 5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM141100639001

Page: 8 of 99

# 5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

#### FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

#### Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1 & 4620C-2.

#### 5.7 Deviation from Standards

None.

#### 5.8 Abnormalities from Standard Conditions

None.

#### 5.9 Other Information Requested by the Customer

None.



Report No.: SZEM141100639001

Page: 9 of 99

# 6 Equipment List

	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)		
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-06-10		
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2015-10-24		
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-16		
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T8-02	SEL0162	2015-08-30		
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T4-02	SEL0163	2015-08-30		
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN- T2-02	SEL0164	2015-08-30		
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-16		
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-29		
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24		
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24		
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16		



Report No.: SZEM141100639001

Page: 10 of 99

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-06-10
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2015-10-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-16
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-29
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-29
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-29
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
13	Band filter	Amindeon	82346	SEL0094	2015-05-16
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-16
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-16
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-06-04



Report No.: SZEM141100639001

Page: 11 of 99

	RF connected test				
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2015-10-24
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2015-10-24
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2015-10-24
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-29
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-29
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-16
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-05-16
8	Band filter	amideon	82346	SEL0094	2015-05-16
9	POWER METER	R&S	NRVS	SEL0144	2015-10-24
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-05-16
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2015-10-24

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM141100639001

Page: 12 of 99

# 7 Test results and Measurement Data

# 7.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### **EUT Antenna:**

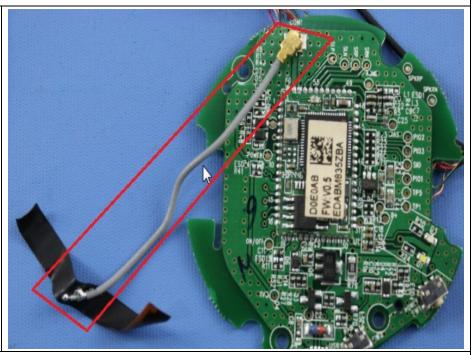

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.33dBi.



Report No.: SZEM141100639001

Page: 13 of 99


#### 7.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Fueron and the (MILE)	Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithn	n of the frequency.		
Test Procedure:	The mains terminal disturl room.	bance voltage test was	s conducted in a shie	∍lded
	<ol> <li>The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to</li> </ol>			



Report No.: SZEM141100639001

Page: 14 of 99

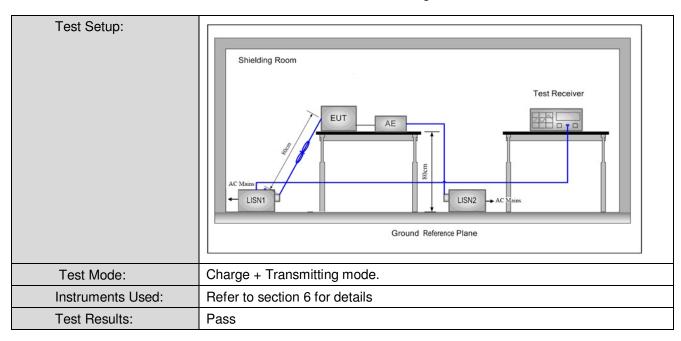





Report No.: SZEM141100639001


Page: 15 of 99

#### **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

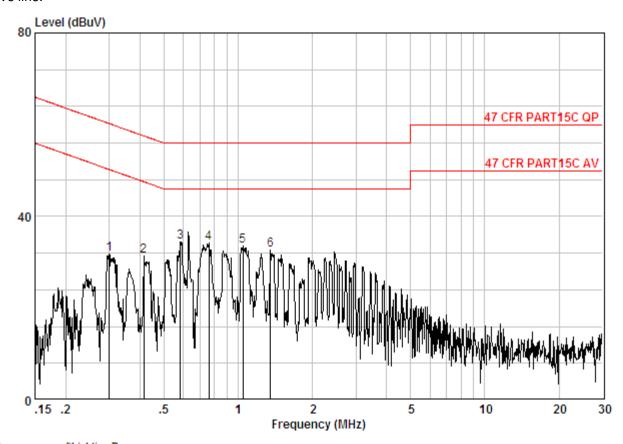

Site : Shielding Room

Condition : 47 CFR PART15C AV CE LINE

Job.No : 6390CR

Mode : Charge +TX mode


	Freq		LISN Factor					Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.30028	0.01	9.70	22.07	31.78	50.24	-18.46	Peak
2	0.41485	0.01	9.80	21.60	31.41	47.55	-16.14	Peak
3	0.58231	0.01	9.80	24.65	34.46	46.00	-11.54	Peak
4	0.75894	0.02	9.80	24.35	34.17	46.00	-11.83	Peak
5	1.043	0.02	9.80	23.80	33.62	46.00	-12.38	Peak
6	1.352	0.02	9.80	22.89	32.71	46.00	-13.29	Peak



Report No.: SZEM141100639001

Page: 16 of 99

#### Neutral line:

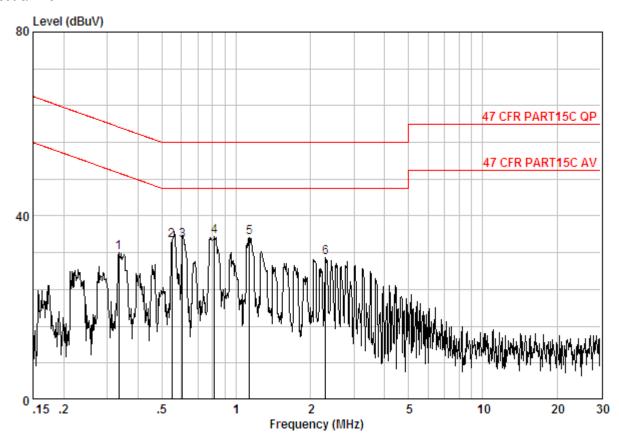

Site : Shielding Room

Condition : 47 CFR PART15C AV CE NEUTRAL

Job.No : 6390CR

Mode : Charge +TX mode

	Freq		LISN Factor					Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.33385	0.01	9.74	22.29	32.04	49.35	-17.32	Peak
2	0.54934	0.01	9.80	24.88	34.70	46.00	-11.30	Peak
3	0.60431	0.02	9.80	24.84	34.66	46.00	-11.34	Peak
4	0.81737	0.02	9.80	25.78	35.60	46.00	-10.40	Peak
5	1.129	0.02	9.80	25.50	35.32	46.00	-10.68	Peak
6	2.297	0.02	9.82	21.12	30.95	46.00	-15.05	Peak

#### Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM141100639001

Page: 17 of 99

# 7.3 Conducted Peak Output Power

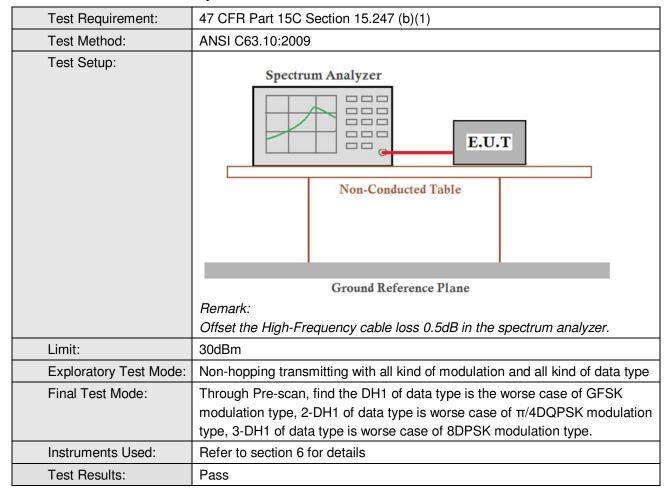



Report No.: SZEM141100639001

Page: 18 of 99

#### **Measurement Data**

modean official Bata						
	GFSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-1.52	30.00	Pass			
Middle	2.03	30.00	Pass			
Highest	2.35	30.00	Pass			
	π/4DQPSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-4.29	30.00	Pass			
Middle	-0.91	30.00	Pass			
Highest	-0.55	30.00	Pass			
	8DPSK mode					
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result			
Lowest	-3.83	30.00	Pass			
Middle	-0.22	30.00	Pass			
Highest	0.11	30.00	Pass			





Report No.: SZEM141100639001


Page: 19 of 99

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

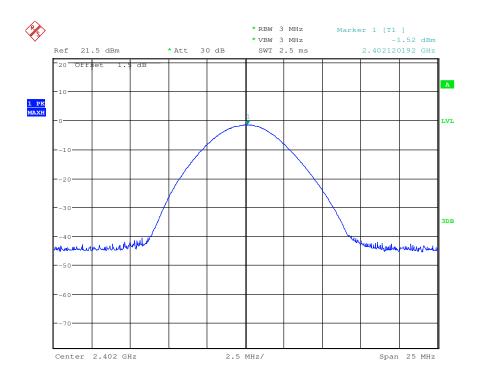



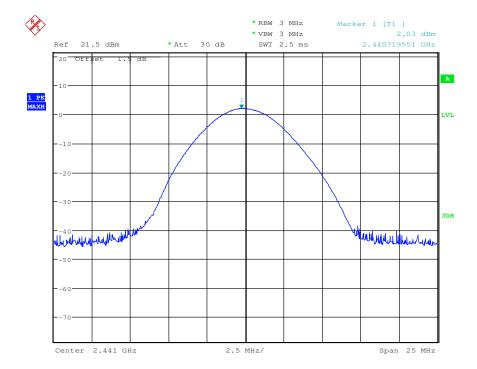





Report No.: SZEM141100639001

Page: 20 of 99

Test mode: GFSK Test channel: Highest

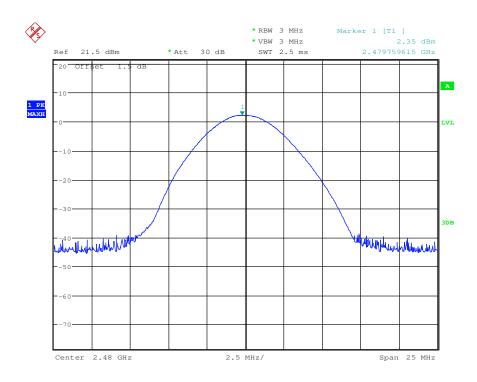



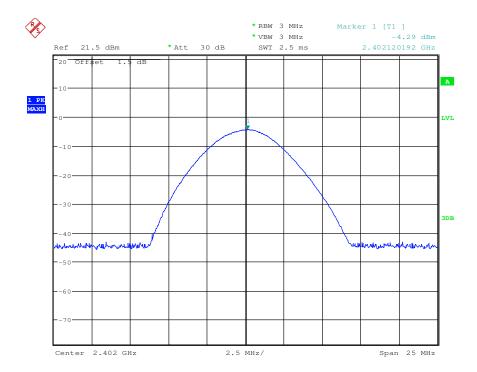





Report No.: SZEM141100639001

Page: 21 of 99

Test mode: π/4DQPSK Test channel: Middle

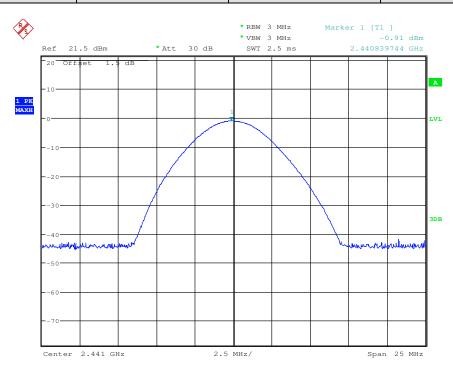

Test mode:	π/4DQPSK	Test channel:	Highest
------------	----------	---------------	---------

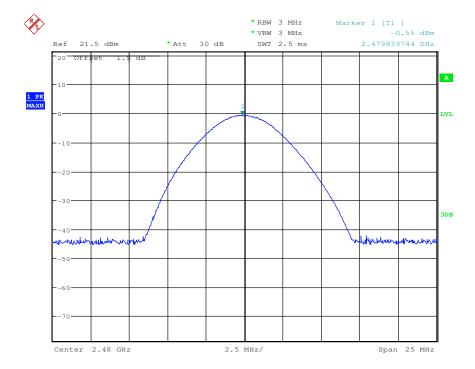





Report No.: SZEM141100639001

Page: 22 of 99

Test mode: 8DPSK Test channel: Lowest

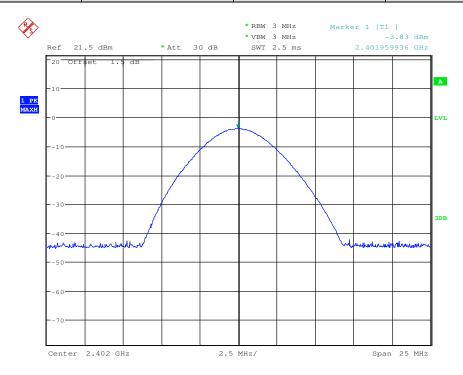



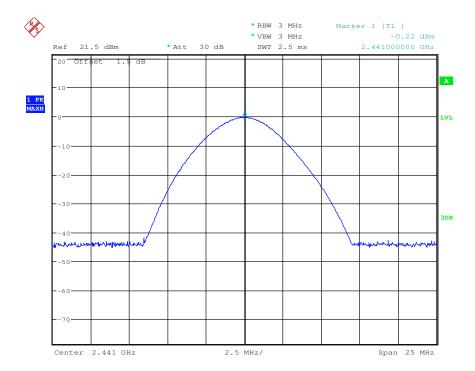




Report No.: SZEM141100639001

Page: 23 of 99

Test mode: 8DPSK Test channel: Highest

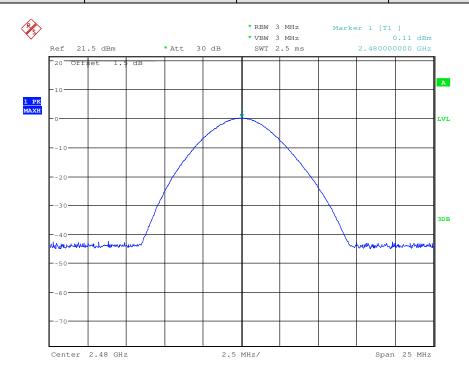


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100639001

Page: 24 of 99

# 7.4 20dB Occupy Bandwidth

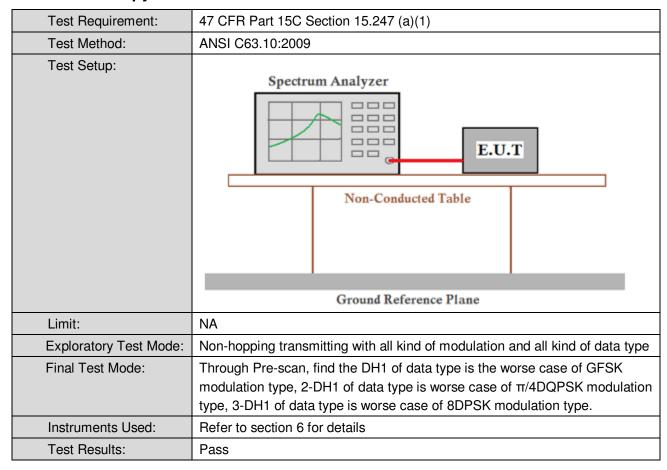

#### **Measurement Data**

Toot channel	20dB Occupy Bandwidth (kHz)			
Test channel	GFSK	π/4DQPSK	8DPSK	
Lowest	894.230769231	1206.730769	1211.538462	
Middle	899.038461539	1216.346154	1230.769231	
Highest	899.038461539	1233.974359	1225.961538	






Report No.: SZEM141100639001


Page: 25 of 99

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

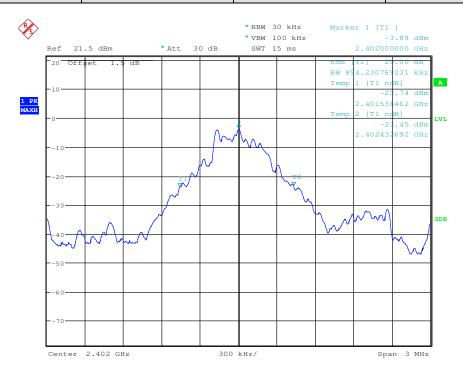



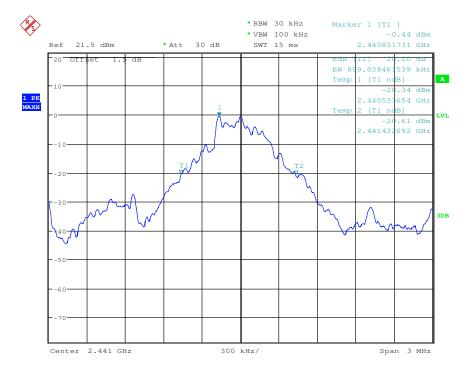





Report No.: SZEM141100639001

Page: 26 of 99

Test mode: GFSK Test channel: Highest

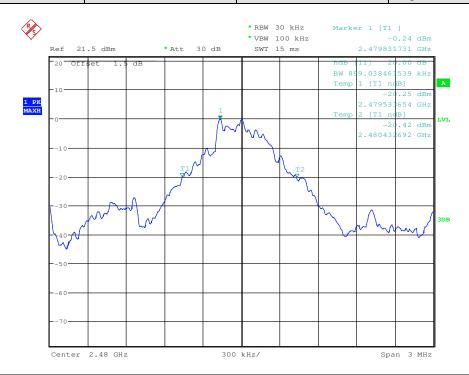

Test mode: π/4DQPSK Test channel: Lowest

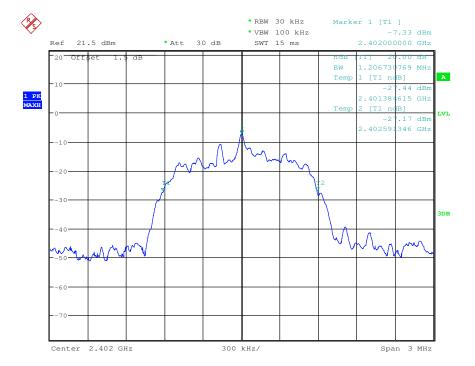





Report No.: SZEM141100639001

Page: 27 of 99

Test mode: π/4DQPSK Test channel: Middle

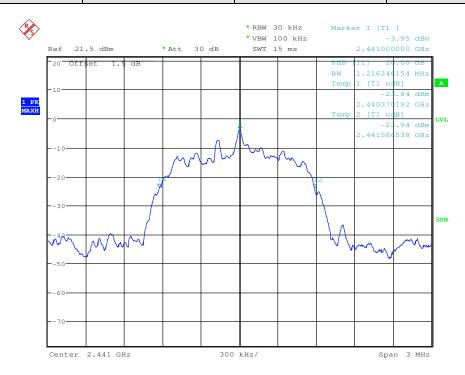



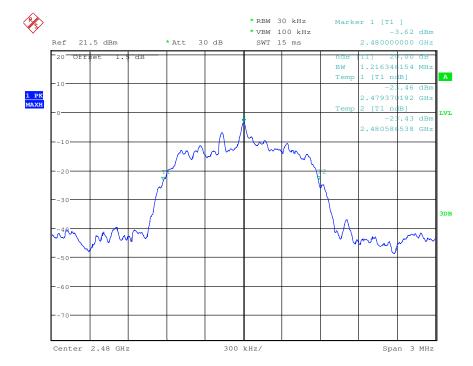





Report No.: SZEM141100639001

Page: 28 of 99

Test mode: 8DPSK Test channel: Lowest

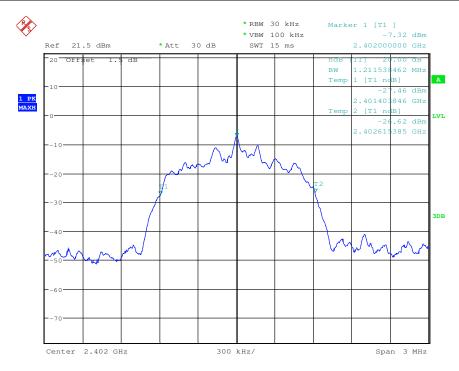



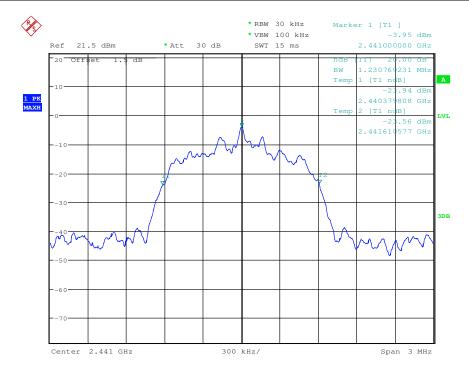




Report No.: SZEM141100639001

Page: 29 of 99

Test mode: 8DPSK Test channel: Highest

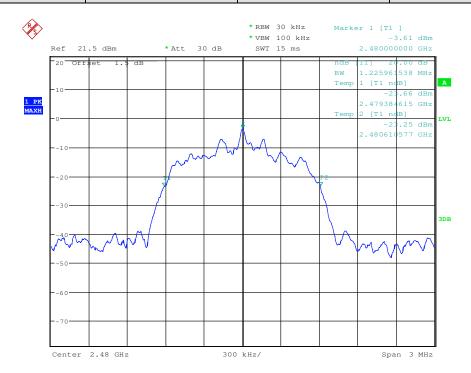




Report No.: SZEM141100639001

Page: 30 of 99

# 7.5 Carrier Frequencies Separation

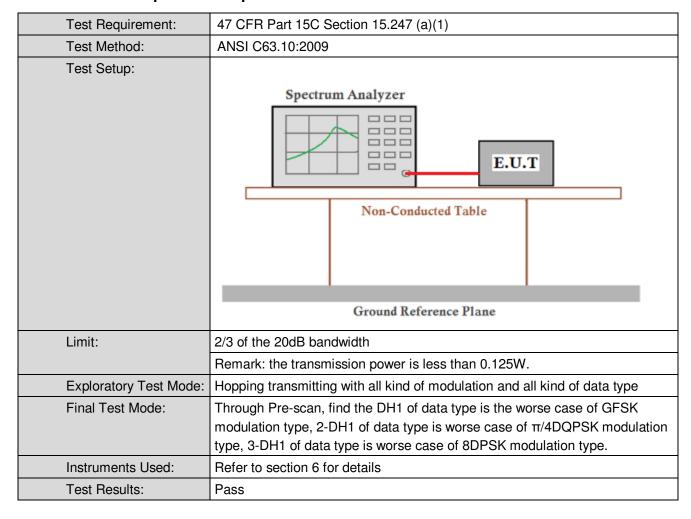



Report No.: SZEM141100639001

Page: 31 of 99

#### **Measurement Data**

GFSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	≥599	Pass		
Middle	1002	≥599	Pass		
Highest	1006	≥599	Pass		
	π/4DQPSK m	node			
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	≥776	Pass		
Middle	1002	≥776	Pass		
Highest	1002	≥776	Pass		
8DPSK mode					
Test channel	Carrier Frequencies Separation (kHz)	Limit (kHz)	Result		
Lowest	1002	≥766	Pass		
Middle	1006	≥766	Pass		
Highest	1002	≥766	Pass		

Note: According to section 5.4,

Mode	20dB bandwidth (kHz)	Limit (kHz)	
Wiode	(worse case)	(Carrier Frequencies Separation)	
GFSK	899.038461538	599	
π/4DQPSK	1163.461538	776	
8DPSK	1149.038462	766	




Report No.: SZEM141100639001


Page: 32 of 99

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

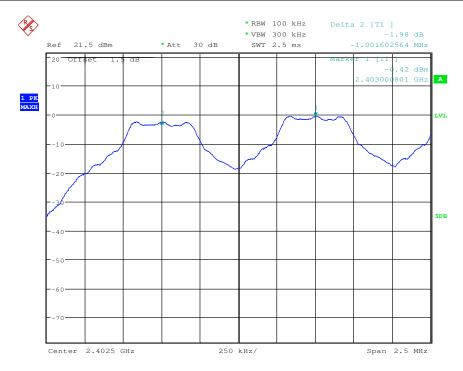

Test mode: GFSK Test channel: Middle

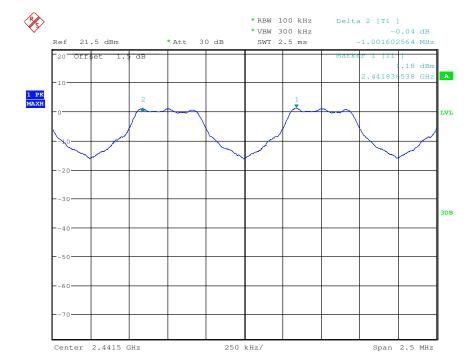





Report No.: SZEM141100639001

Page: 33 of 99

Test mode: GFSK Test channel: Highest

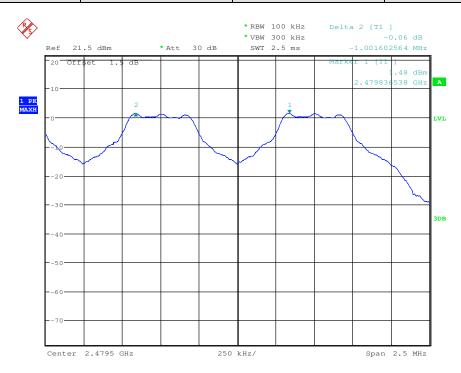



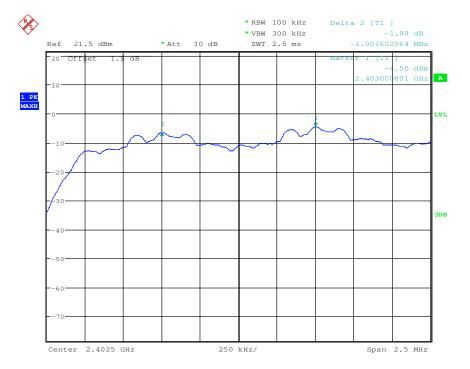





Report No.: SZEM141100639001

Page: 34 of 99

Test mode: π/4DQPSK Test channel: Middle

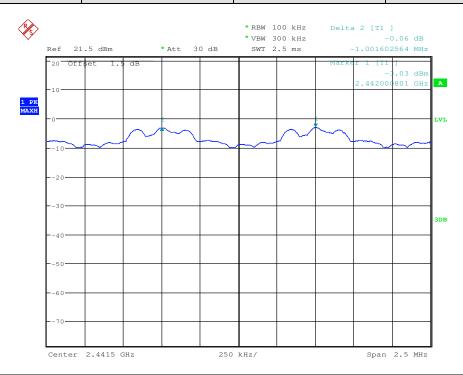

Test mode: π/4DQPSK Test channel: Highest

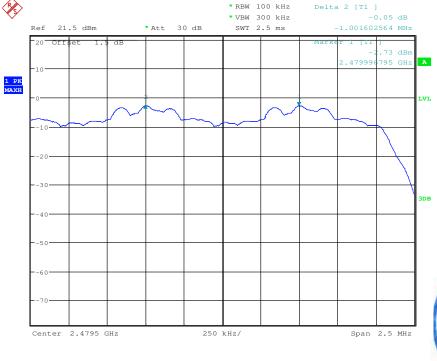







Report No.: SZEM141100639001

Page: 35 of 99

Test mode: 8DPSK Test channel: Lowest

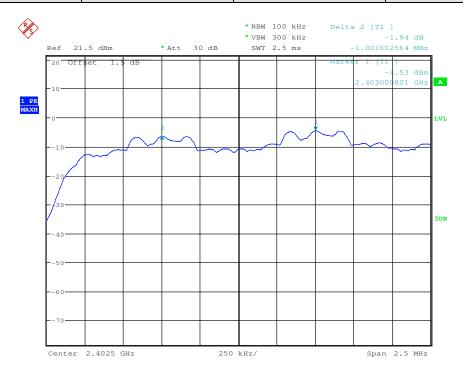

Test mode: 8DPSK Test channel: Middle

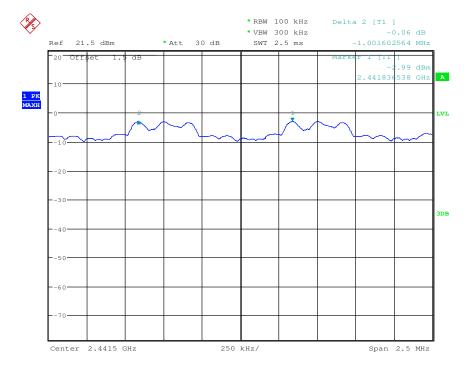




Report No.: SZEM141100639001

Page: 36 of 99

Test mode: 8DPSK Test channel: Highest

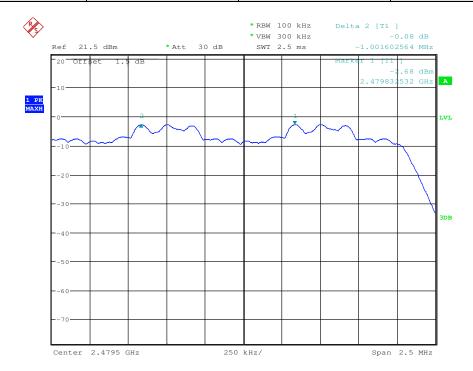


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100639001

Page: 37 of 99

# 7.6 Hopping Channel Number

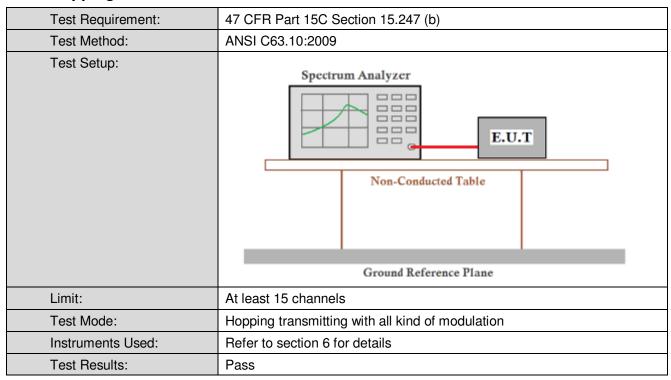

#### **Measurement Data**


Mode	Hopping channel numbers	Limit
GFSK	79	≥15
π/4DQPSK	79	≥15
8DPSK	79	≥15




Report No.: SZEM141100639001

Page: 38 of 99

Test plot as follows

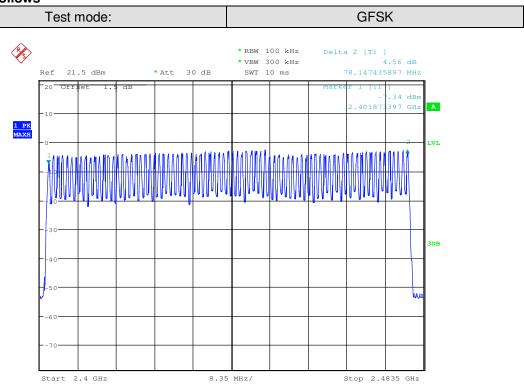



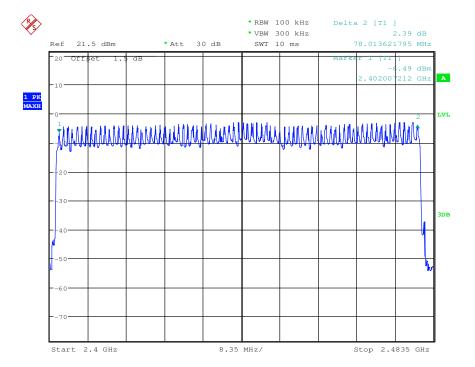




Report No.: SZEM141100639001

Page: 39 of 99

Test mode: 8DPSK

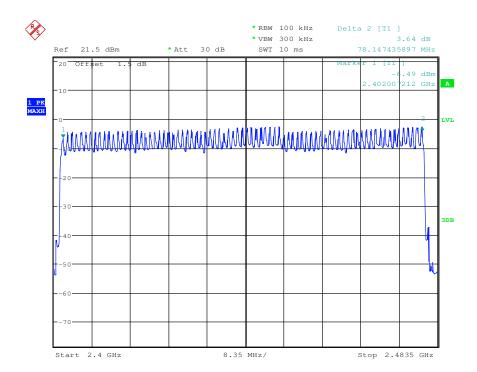




Report No.: SZEM141100639001

Page: 40 of 99

# 7.7 Dwell Time

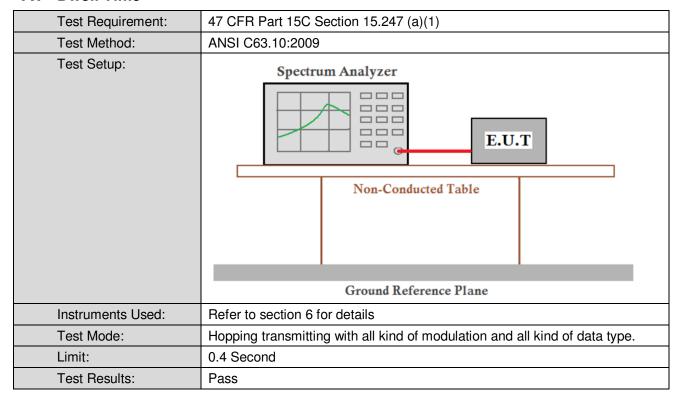



Report No.: SZEM141100639001

Page: 41 of 99

#### **Measurement Data**

Mode	Packet	Dwell time (second)	Limit (second)
GFSK	DH1	0.12704	0.4
	DH3	0.26608	0.4
	DH5	0.31911	0.4
π/4DQPSK	2-DH1	0.13216	0.4
	2-DH3	0.26608	0.4
	2-DH5	0.32175	0.4
8DPSK	3-DH1	0.13088	0.4
	3-DH3	0.26416	0.4
	3-DH5	0.32175	0.4

#### Remark:

The test period: T= 0.4 Second/Channel x 79 Channel = 31.6 s

On (ms)\*total number=dwell time (ms)

The lowest channel (2402MHz), as below:

DH1 time slot=0.397 (ms)\*total number=127.04 (ms)

DH3 time slot=1.663 (ms)\* total number = 266.08 (ms)

DH5 time slot=2.901 (ms)\* total number =319.11 (ms)

2-DH1 time slot=0.413 (ms)\*total number=132.16 (ms)

2-DH3 time slot=1.663 (ms)\* total number =266.08 (ms)

2-DH5 time slot=2.925 (ms)\* total number = 321.75 (ms)

3-DH1 time slot=0.409 (ms)\*total number=130.88 (ms)

3-DH3 time slot=1.651 (ms)\* total number = 264.16 (ms)

3-DH5 time slot=2.925 (ms)\* total number =321.75 (ms)





Report No.: SZEM141100639001

Page: 42 of 99

# Test plot as follows:



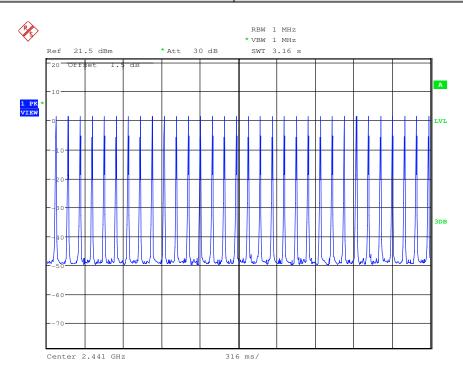


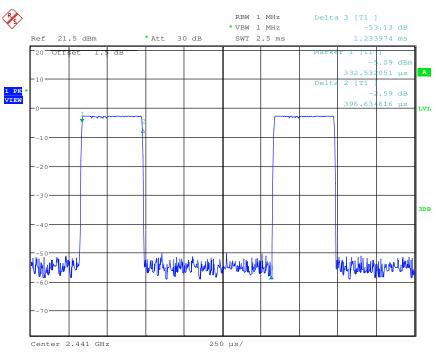



Report No.: SZEM141100639001

Page: 43 of 99

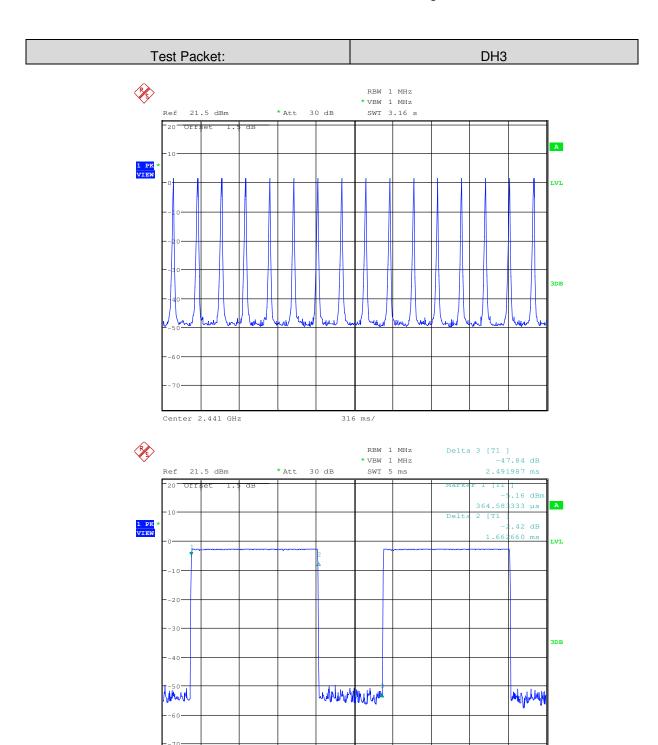

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

500 μs/


Center 2.441 GHz




Report No.: SZEM141100639001

Page: 44 of 99



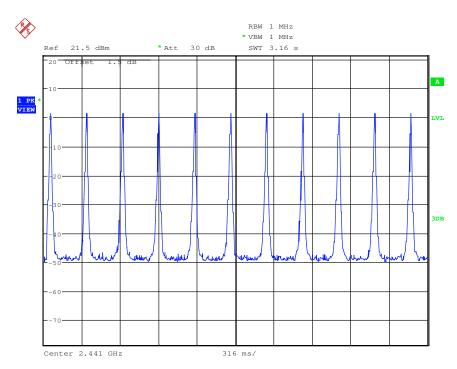

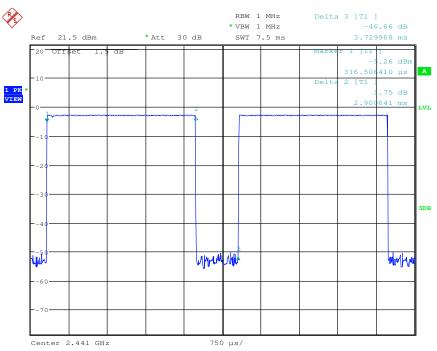








Report No.: SZEM141100639001

Page: 45 of 99



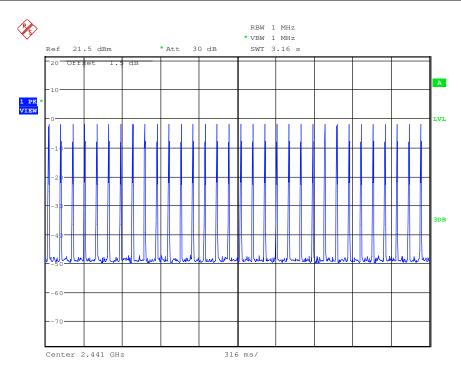

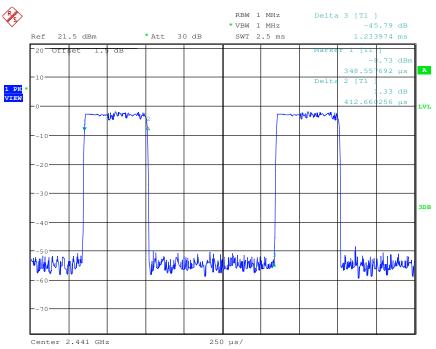




Report No.: SZEM141100639001

Page: 46 of 99



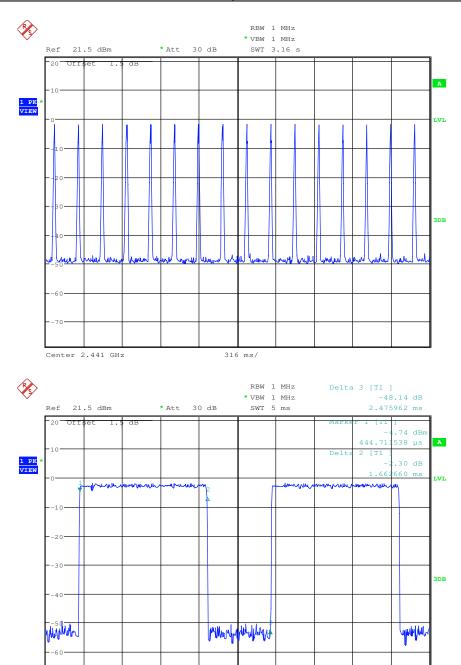

500 μs/


Center 2.441 GHz


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties at transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100639001

Page: 47 of 99



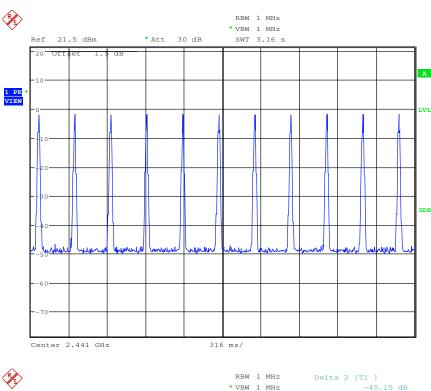

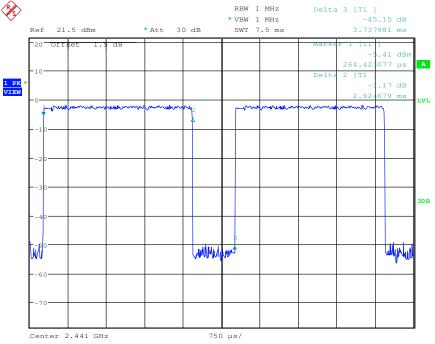




Report No.: SZEM141100639001

Page: 48 of 99



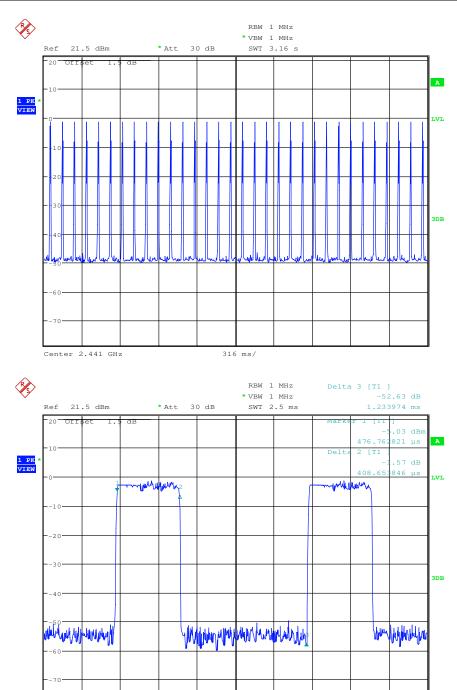

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties at transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

250 μs/


Center 2.441 GHz




Report No.: SZEM141100639001

Page: 49 of 99



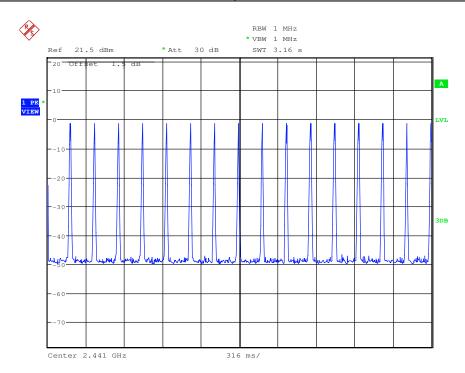

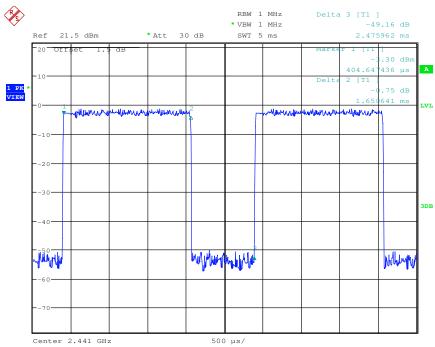




Report No.: SZEM141100639001

Page: 50 of 99



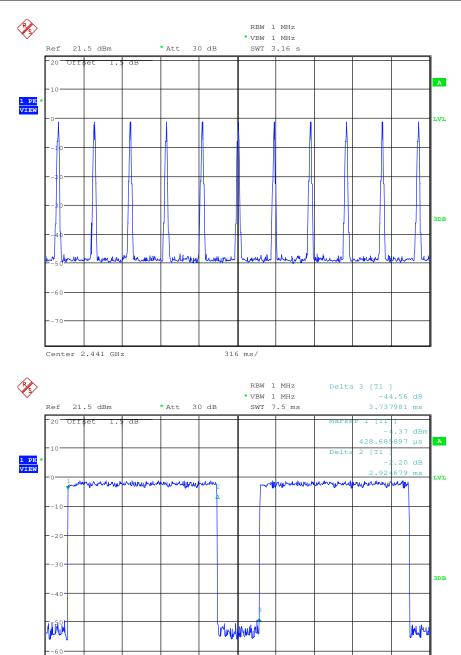

750 µs/

Center 2.441 GHz

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties at transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100639001

Page: 51 of 99

# 7.8 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 0.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of GFSK modulation type, 2-DH5 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH5 of data type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 6 for details	
Test Results:	Pass	





Report No.: SZEM141100639001

Page: 52 of 99

Test plot as follows: Test plot as follows:

Test mode: GFSK Test channel: Lowest

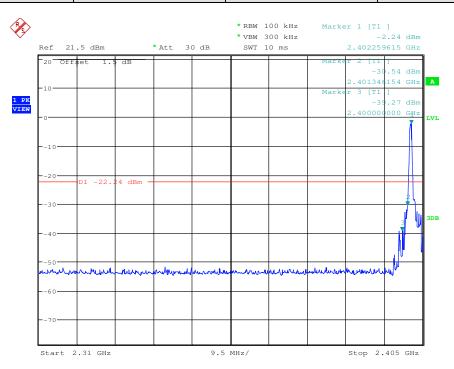

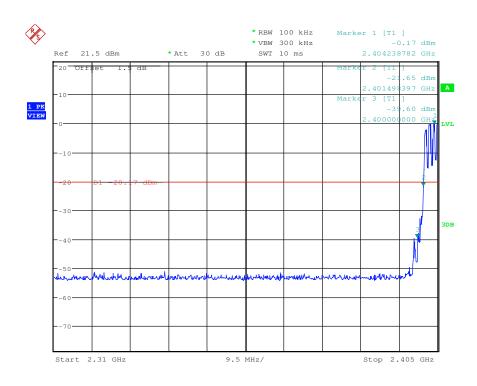





Report No.: SZEM141100639001

Page: 53 of 99

Test mode: GFSK Test channel: Highest

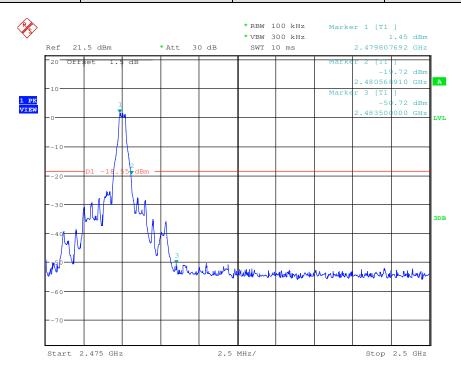

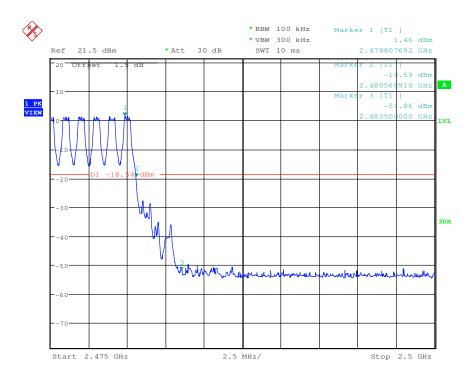





Report No.: SZEM141100639001

Page: 54 of 99

Test mode: π/4DQPSK Test channel: Lowest

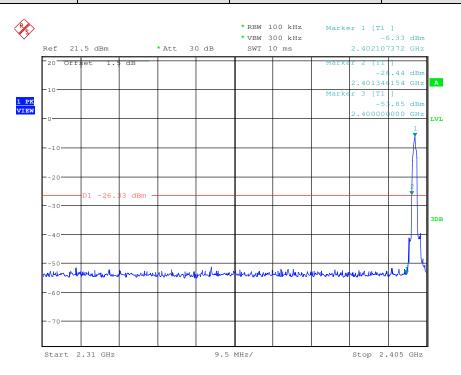

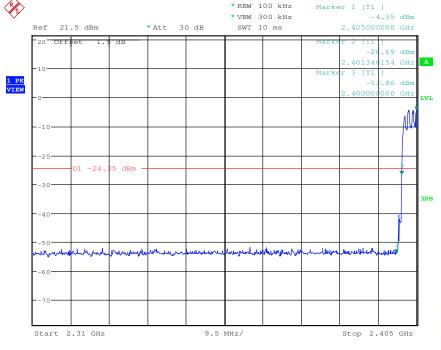







Report No.: SZEM141100639001

Page: 55 of 99

Test mode: π/4DQPSK Test channel: Highest

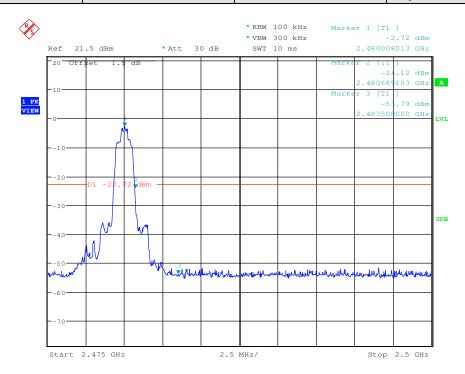

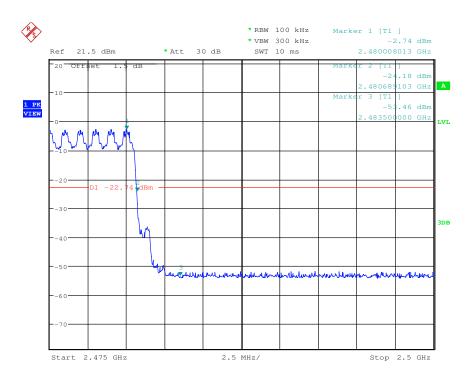





Report No.: SZEM141100639001

Page: 56 of 99

Test mode: 8DPSK Test channel: Lowest

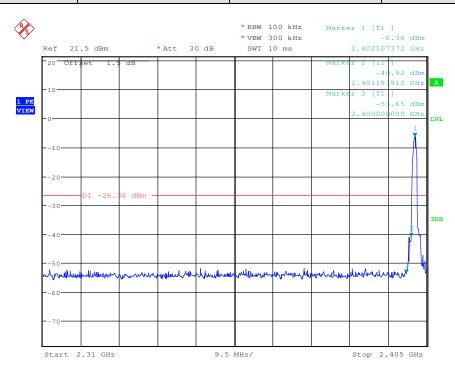

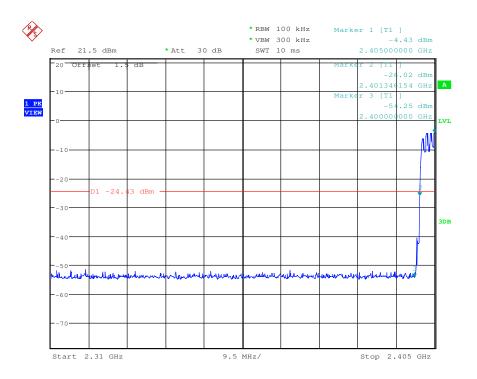





Report No.: SZEM141100639001

Page: 57 of 99

Test mode: 8DPSK Test channel: Highest

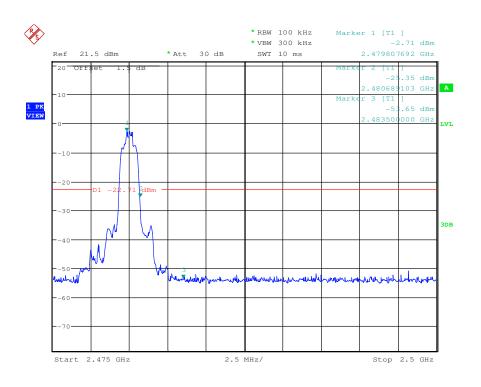

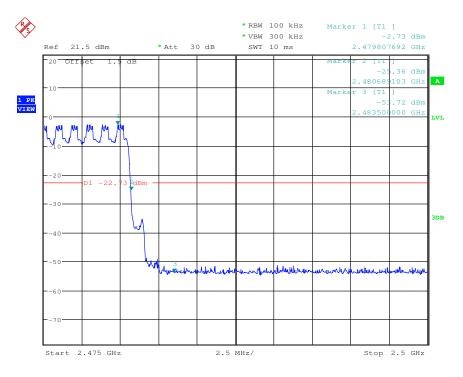



Report No.: SZEM141100639001

Page: 58 of 99

# 7.9 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10:2009	
Test Setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane	
	Remark: Offset the High-Frequency cable loss 0.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type	
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of GFSK modulation type, 2-DH5 of data type is worse case of $\pi/4DQPSK$ modulation type, 3-DH5 of data type is worse case of 8DPSK modulation type.	
Instruments Used:	Refer to section 6 for details	
Test Results:	Pass	





Report No.: SZEM141100639001

Page: 59 of 99

#### Test plot as follows:

Test mode: GFSK Test channel: Lowest

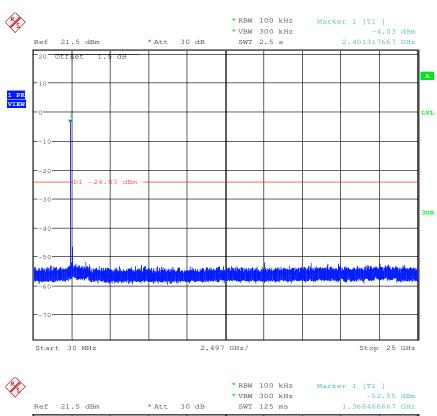

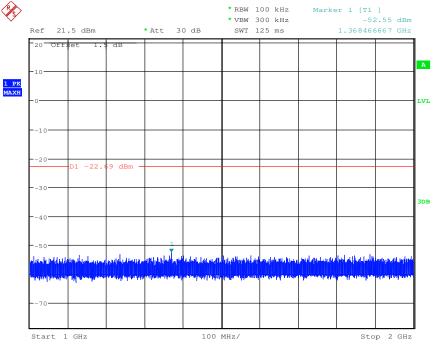




Report No.: SZEM141100639001

Stop 5 GHz

Page: 60 of 99

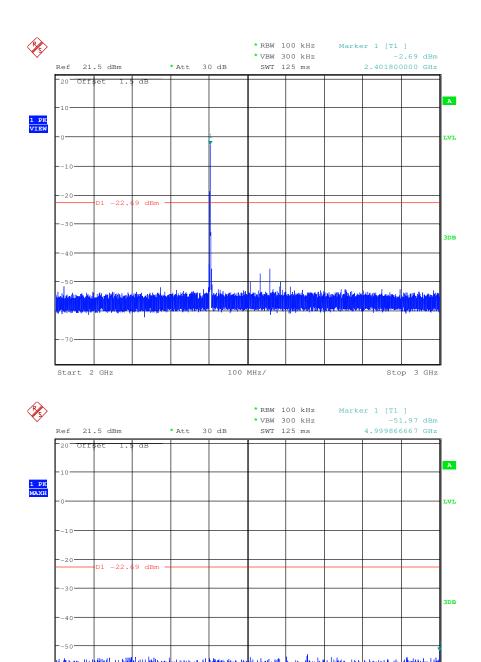

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties at transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

100 MHz/


Start 4 GHz




Report No.: SZEM141100639001

Page: 61 of 99

Test mode: GFSK Test channel: Middle

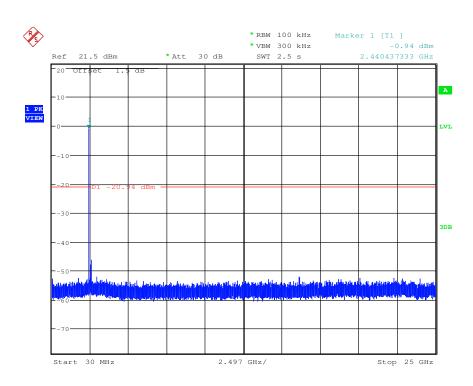


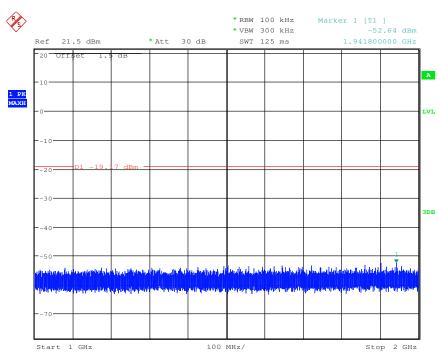




Report No.: SZEM141100639001

Page: 62 of 99

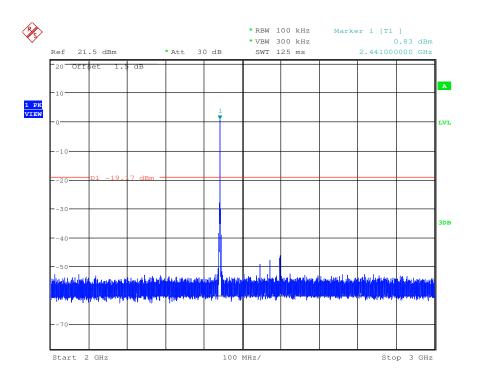

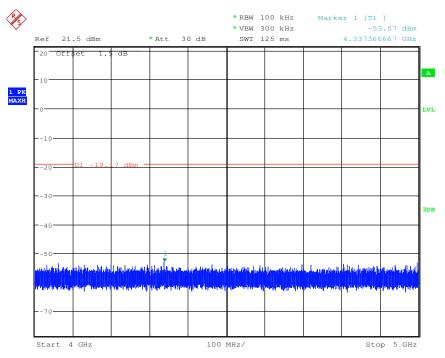





Report No.: SZEM141100639001

Page: 63 of 99

Test mode: GFSK Test channel: Highest

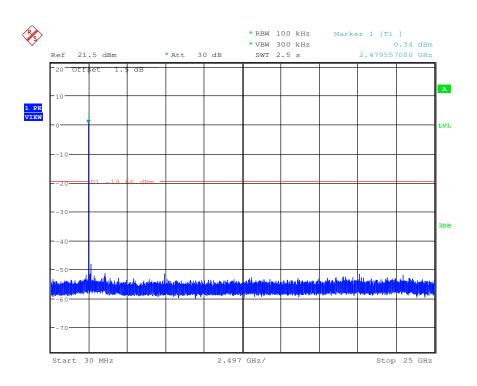


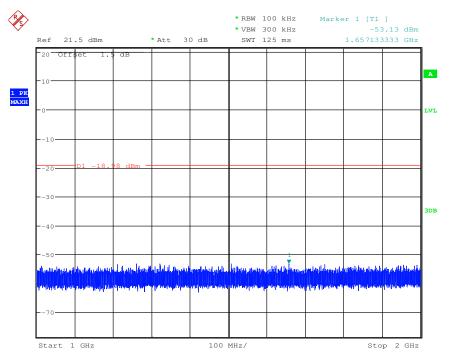




Report No.: SZEM141100639001

Page: 64 of 99

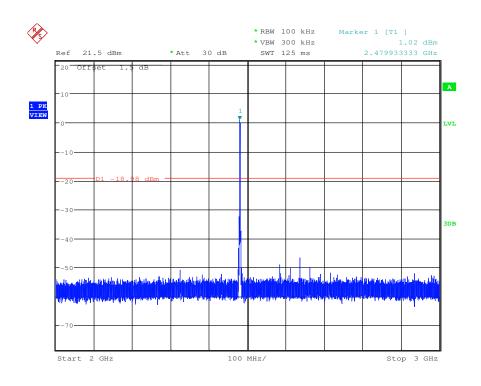

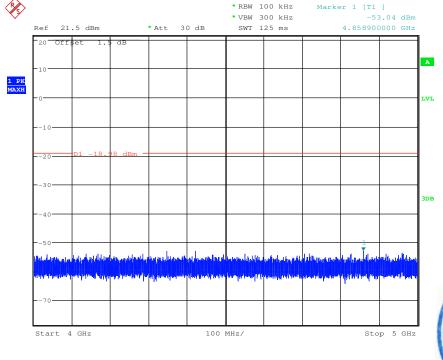






Report No.: SZEM141100639001

Stop 2 GHz

Page: 65 of 99

Test mode: π/4DQPSK Test channel: Lowest

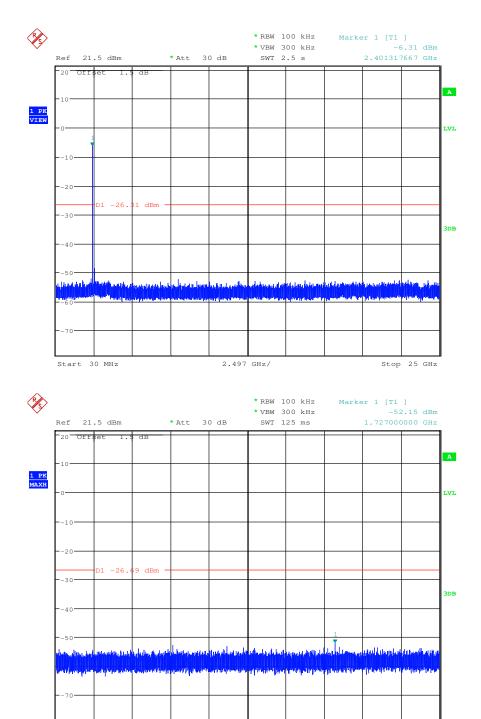

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."


100 MHz/

Start 1 GHz



Report No.: SZEM141100639001

Page: 66 of 99

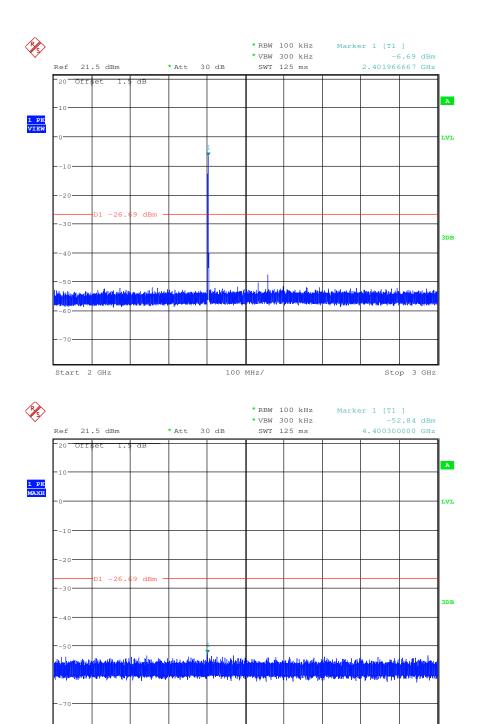

100 MHz/

Start 4 GHz


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100639001

Page: 67 of 99

Test mode: π/4DQPSK Test channel: Middle

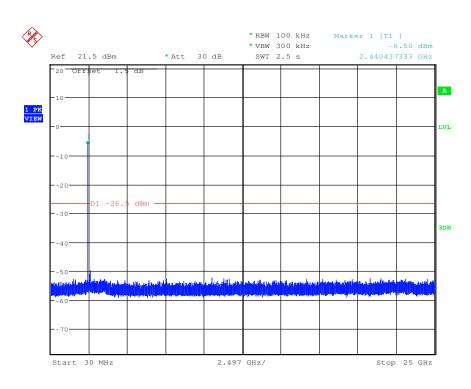


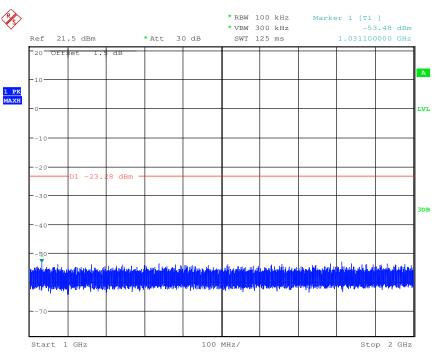




Report No.: SZEM141100639001

Page: 68 of 99

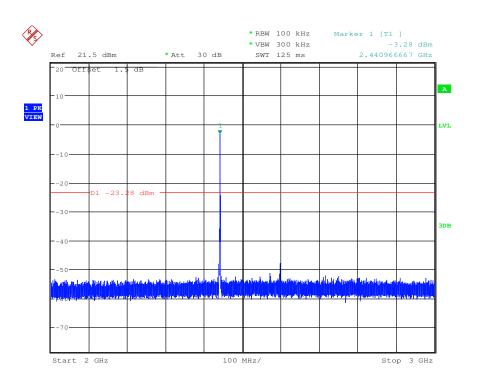

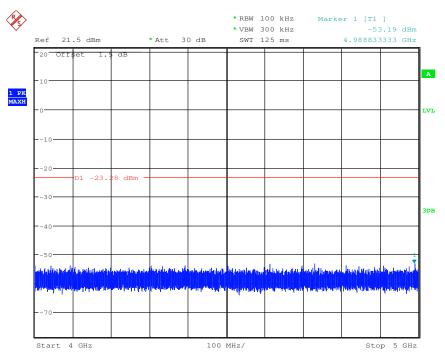





Report No.: SZEM141100639001

Page: 69 of 99

Test mode: π/4DQPSK Test channel: Highest

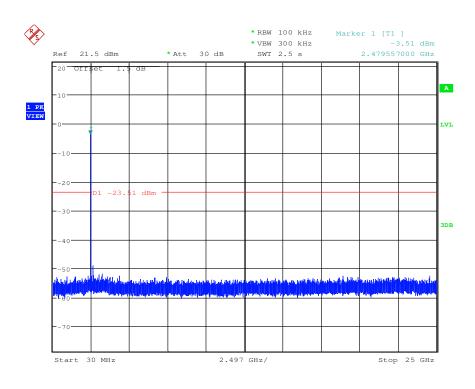


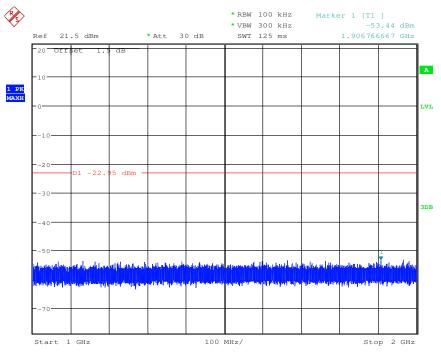




Report No.: SZEM141100639001

Page: 70 of 99

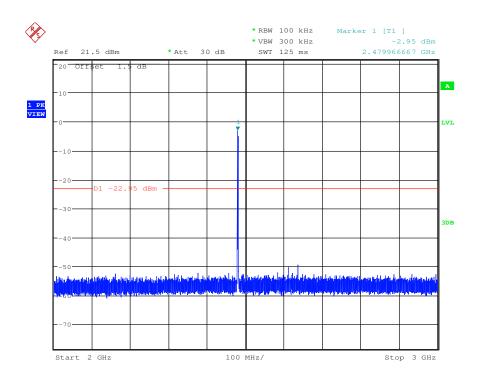

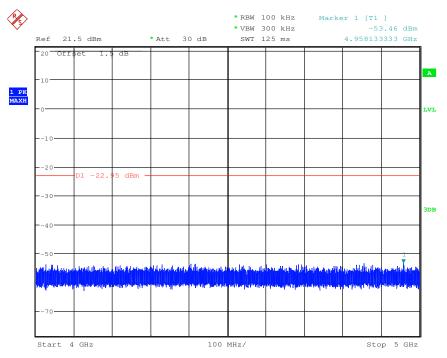





Report No.: SZEM141100639001

Page: 71 of 99

Test mode: 8DPSK Test channel: Lowest

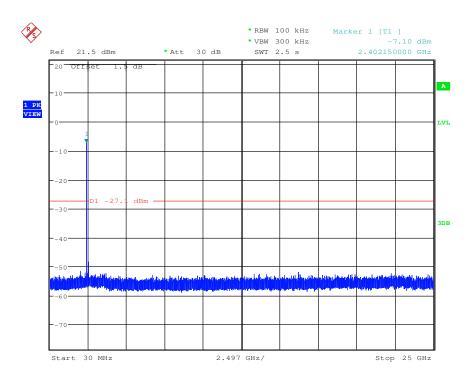


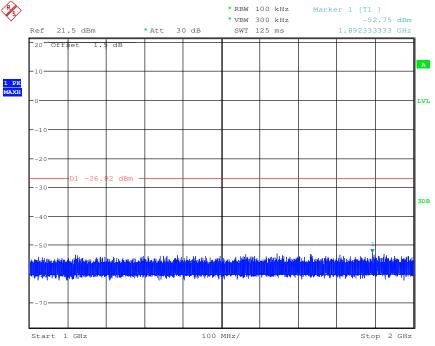




Report No.: SZEM141100639001

Page: 72 of 99

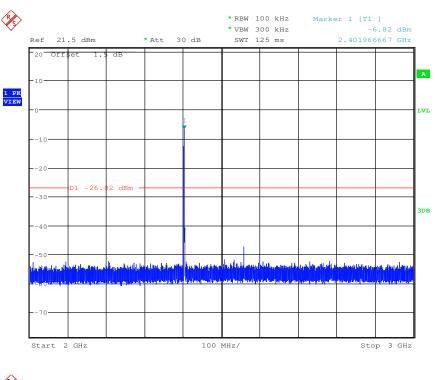

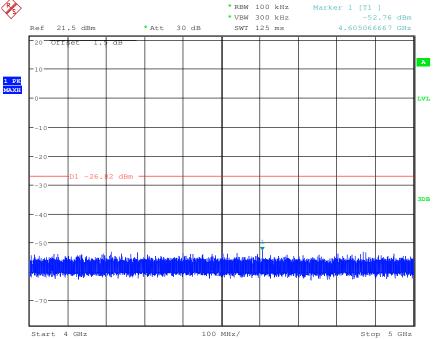





Report No.: SZEM141100639001

Page: 73 of 99

Test mode: 8DPSK Test channel: Middle

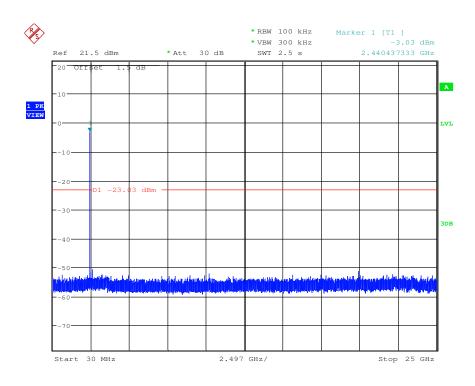


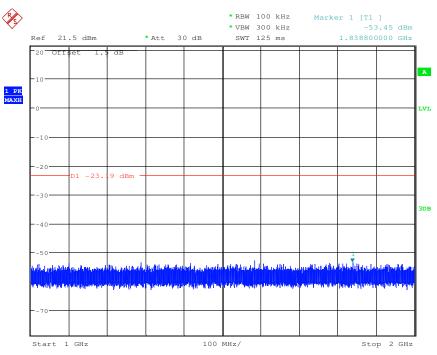




Report No.: SZEM141100639001

Page: 74 of 99

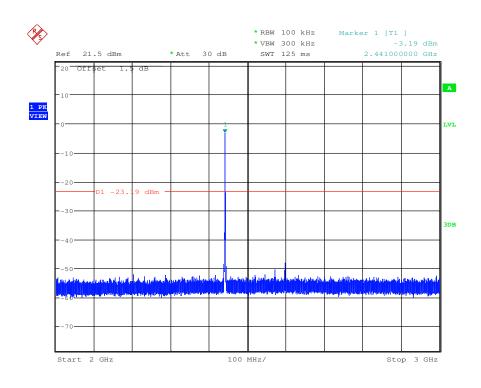

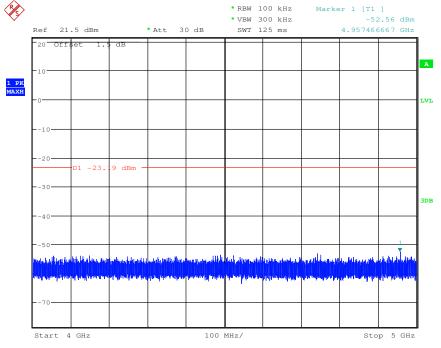







Report No.: SZEM141100639001

Page: 75 of 99

Test mode: 8DPSK Test channel: Highest

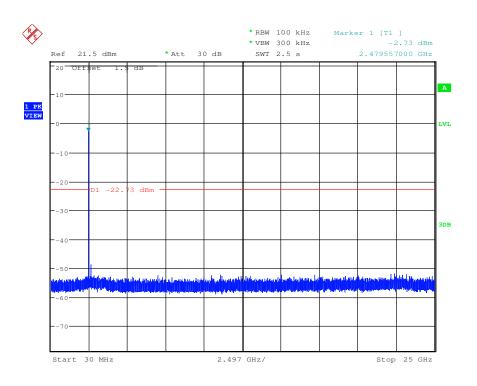


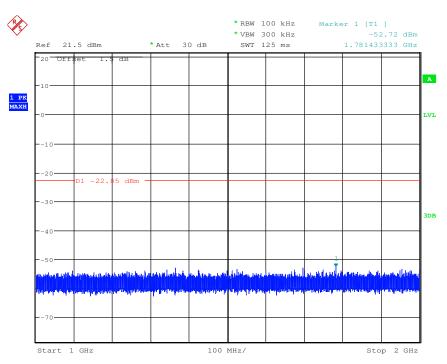




Report No.: SZEM141100639001

Page: 76 of 99

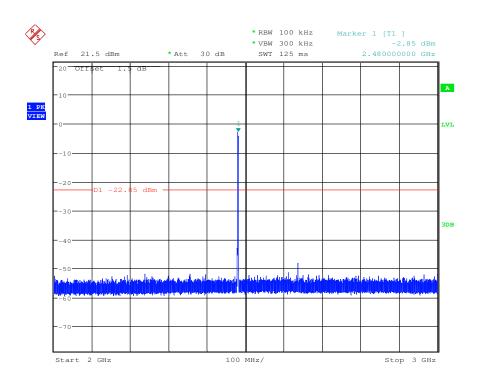

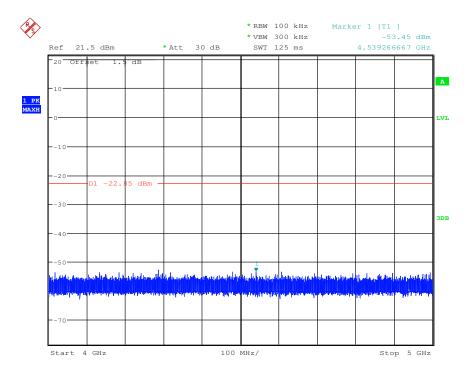

#### Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report.



Report No.: SZEM141100639001

Page: 77 of 99

# 7.10 Pseudorandom Frequency Hopping Sequence

#### Test Requirement: 47 CFR Part 15C Section 15.247 (a)(1) requirement:

The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.


The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### Compliance for section 15.247(a)(1)

According to Bluetooth Core Specification, the pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage


outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- · Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:



Each frequency used equally on the average by each transmitter.

According to Bluetooth Core Specification, Bluetooth receivers are designed to have input and IF bandwidths that match the hopping channel bandwidths of any Bluetooth transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEM141100639001

Page: 78 of 99

#### Compliance for section 15.247(g)

According to Bluetooth Core Specification, the Bluetooth system transmits the packet with the pseudorandom hopping frequency with a continuous data and the short burst transmission from the Bluetooth system is also transmitted under the frequency hopping system with the pseudorandom hopping frequency system.

#### Compliance for section 15.247(h)

According to Bluetooth Core specification, the Bluetooth system incorporates with an adaptive system to detect other user within the spectrum band so that it individually and independently to avoid hopping on the occupied channels.

According to the Bluetooth Core specification, the Bluetooth system is designed not have the ability to coordinated with other FHSS System in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitter.



Report No.: SZEM141100639001

Page: 79 of 99

# 7.11 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205									
Test Method:	ANSI C63.10: 2009									
Test Site:	Measurement Distance	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark				
	0.009MHz-0.090MH	Z	Peak	10kHz	z 30kHz	Peak				
	0.009MHz-0.090MH	Z	Average	10kHz	z 30kHz	Average				
	0.090MHz-0.110MH	Z	Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	0.110MHz-0.490MH	Z	Peak	10kHz	30kHz	Peak				
	0.110MHz-0.490MH	Z	Average	10kHz	30kHz	Average				
	0.490MHz -30MHz		Quasi-peak	10kHz	z 30kHz	Quasi-peak				
	30MHz-1GHz		Quasi-peak	100 kH	lz 300kHz	Quasi-peak				
	Above 1GHz		Peak	1MHz	3MHz	Peak				
	Above Tariz		Peak	1MHz	10Hz	Average				
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (n				
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24	1000/F(kHz)	-	-	30				
	1.705MHz-30MHz		30	-	-	30				
	30MHz-88MHz		100	40.0	Quasi-peak	3				
	88MHz-216MHz		150	43.5	Quasi-peak	3				
	216MHz-960MHz		200	46.0	Quasi-peak	3				
	960MHz-1GHz		500	54.0	Quasi-peak	3				
	Above 1GHz		500	54.0	Average	3				
	Note: 15.35(b), Unless emissions is 20dE applicable to the e peak emission lev	3 ab equi	ove the maxim pment under to	num perm est. This p	itted average	emission limit				


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100639001

Page: 80 of 99

#### Test Setup:






Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

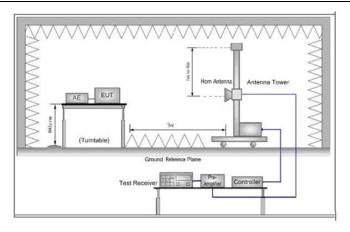


Figure 3. Above 1 GHz

#### Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average



Report No.: SZEM141100639001

Page: 81 of 99

	method as specified and then reported in a data sheet.  g. Test the EUT in the lowest channel (2402MHz),the middle channel (2441MHz),the Highest channel (2480MHz)  h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.  i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode
Final Test Mode:	Through Pre-scan, find the DH1 of data type is the worst case of GFSK modulation type at highest channel. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 6 for details
Test Results:	Pass




Report No.: SZEM141100639001

Page: 82 of 99

#### 7.11.1 Radiated Emission below 1GHz

30MHz~1GHz (QP)			
Test mode:	Charge +Transmitting mode	Vertical	Low channel

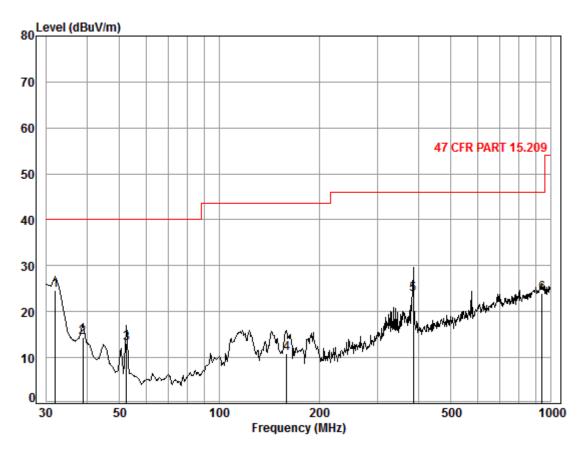

Condition: 47 CFR PART 15.209 3m Vertical

eut : 6390CR

mode : Charge+TX mode


ouc		u1 8c	/ IIIOuc					
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	31.95	0.60	17.61	27.35	33.81	24.67	40.00	-15.33
2	38.75	0.60	13.80	27.32	27.33	14.41	40.00	-25.59
3	52.39	0.80	8.34	27.28	31.18	13.04	40.00	-26.96
4	159.78	1.34	9.59	26.86	26.84	10.91	43.50	-32.59
5	385.28	2.16	16.12	27.03	32.41	23.66	46.00	-22.34
6	942.13	3.64	23.30	26.58	23.69	24.05	46.00	-21.95



Report No.: SZEM141100639001

Page: 83 of 99

Test mode: Charge +Transmitting mode Horizontal Low channel

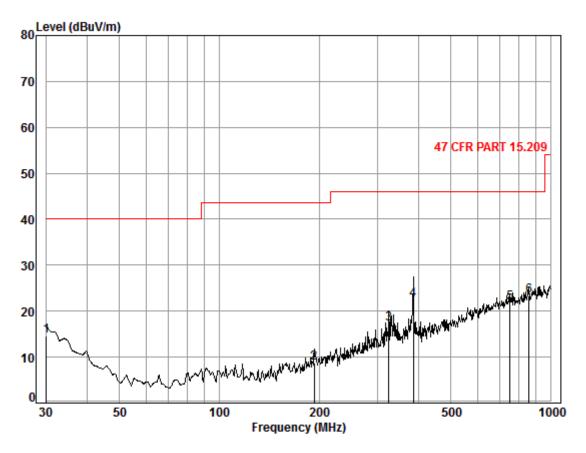

Condition: 47 CFR PART 15.209 3m Horizontal

eut : 6390CR

mode : Charge+TX mode

		0						
		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.00	0.60	18.70	27.36	22.65	14.59	40.00	-25.41
2	193.09	1.39	10.13	26.73	23.87	8.66	43.50	-34.84
3	324.46	1.98	14.78	26.58	26.97	17.15	46.00	-28.85
4	385.28	2.16	16.12	27.03	31.30	22.55	46.00	-23.45
5	752.74	3.07	21.73	27.35	24.31	21.76	46.00	-24.24
6	860.04	3.45	22.64	26.99	24.13	23.23	46.00	-22.77

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEM141100639001

Page: 84 of 99

30MHz~1GHz (QP)			
Test mode:	Charge +Transmitting mode	Vertical	Middle channel

Data: 71

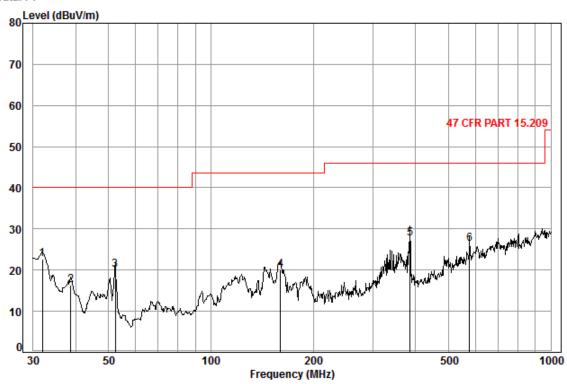

Condition: 47 CFR PART 15.209 3m Vertical

eut : 6390CR

mode : Charge+TX mode

	Freq			Preamp Factor				Over Limit
•	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	31.95	0.60	17.61	27.35	31.81	22.67	40.00	-17.33
2	38.75	0.60	13.80	27.32	29.33	16.41	40.00	-23.59
3	52.39	0.80	8.34	27.28	38.18	20.04	40.00	-19.96
4	160.35	1.34	9.60	26.86	36.00	20.08	43.50	-23.42
5	385.28	2.16	16.12	27.03	36.41	27.66	46.00	-18.34
6	576.64	2.68	19.15	27.57	32.09	26.35	46.00	-19.65






Report No.: SZEM141100639001

Page: 85 of 99

Test mode: Charge +Transmitting mode Horizontal Middle channel

Data: 72

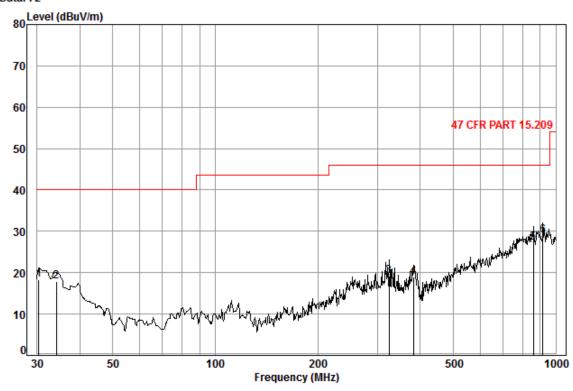

Condition: 47 CFR PART 15.209 3m Horizontal

eut : 6390CR

mode : Charge+TX mode


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	20.22	0.60	40 50	27.26	26.40	40.05	40.00	24 75
1	30.32	0.60	18.52	27.36	26.49	18.25	40.00	-21./5
2	34.16	0.60	16.37	27.34	28.33	17.96	40.00	-22.04
3	324.46	1.98	14.78	26.58	28.97	19.15	46.00	-26.85
4	382.59	2.15	16.09	27.01	27.64	18.87	46.00	-27.13
5	860.04	3.45	22.64	26.99	28.13	27.23	46.00	-18.77
6	916.07	3.62	23.26	26.71	28.77	28.94	46.00	-17.06



Report No.: SZEM141100639001

Page: 86 of 99

30MHz~1GHz (QP)			
Test mode:	Charge +Transmitting mode	Vertical	High channel

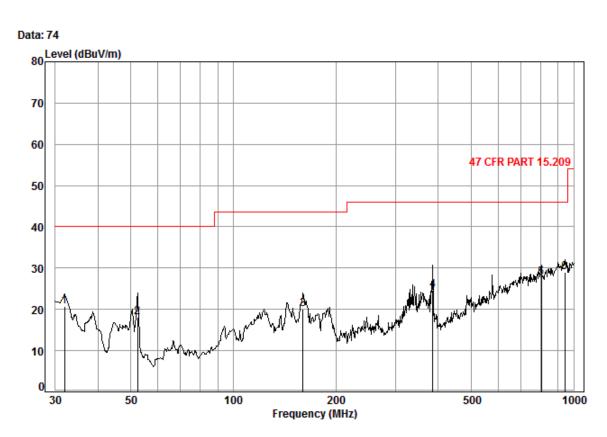

Condition: 47 CFR PART 15.209 3m Vertical

eut : 6390CR

mode : Charge+TX mode


		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	•							
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
			,			,	,	
1	31.95	0.60	17.61	27.35	29.81	20.67	40.00	-19.33
2	52.39	0.80	8.34	27.28	36.18	18.04	40.00	-21.96
3	160.35	1.34	9.60	26.86	36.00	20.08	43.50	-23.42
4	385.28	2.16	16.12	27.03	33.41	24.66	46.00	-21.34
5	804.60	3.22	22.16	27.27	29.60	27.71	46.00	-18.29
6	942.13	3.64	23.30	26.58	28.69	29.05	46.00	-16.95



Report No.: SZEM141100639001

Page: 87 of 99

Data: 73

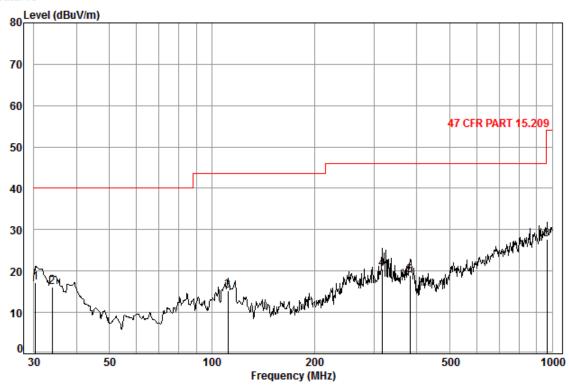

Condition: 47 CFR PART 15.209 3m Horizontal

eut : 6390CR

mode : Charge+TX mode

		Cable	Ant	Preamp	Read		Limit	0ver
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	30.32	0.60	18.52	27.36	25.49	17.25	40.00	-22.75
2	33.92	0.60	16.51	27.34	26.30	16.07	40.00	-23.93
3	111.35	1.23	8.51	27.13	32.61	15.22	43.50	-28.28
4	316.59	1.95	14.50	26.52	30.52	20.45	46.00	-25.55
5	382.59	2.15	16.09	27.01	27.64	18.87	46.00	-27.13
6	965.54	3.67	23.30	26.47	27.27	27.77	54.00	-26.23



Report No.: SZEM141100639001

Page: 88 of 99

#### 7.11.2 Transmitter Emission above 1GHz

Worse case mode:		GFSK(DH5	i) Test	channel:	Lowest	Rema	ırk:	Peak	
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization	
1809.605	4.08	30.18	38.41	47.21	43.06	74	-30.94	Vertical	
3598.087	5.85	33.00	38.78	47.38	47.45	74	-26.55	Vertical	
4804.000	5.49	34.70	39.24	48.58	49.53	74	-24.47	Vertical	
7206.000	8.27	35.63	39.07	48.08	52.91	74	-21.09	Vertical	
9608.000	9.26	37.33	37.93	44.61	53.27	74	-20.73	Vertical	
11312.310	9.91	38.14	38.38	44.12	53.79	74	-20.21	Vertical	
1805.005	4.08	30.14	38.41	48.57	44.38	74	-29.62	Horizontal	
3561.636	5.87	32.96	38.77	48.98	49.04	74	-24.96	Horizontal	
4804.000	5.49	34.70	39.24	49.03	49.98	74	-24.02	Horizontal	
7206.000	8.27	35.63	39.07	48.97	53.80	74	-20.20	Horizontal	
9608.000	9.26	37.33	37.93	43.77	52.43	74	-21.57	Horizontal	
11545.040	10.09	38.26	38.49	42.43	52.29	74	-21.71	Horizontal	

Worse case mode:		GFSK(DH5)	Test channel:		Middle	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1894.450	4.19	30.88	38.42	47.75	44.40	74	-29.60	Vertical
3747.656	5.75	33.11	38.85	48.25	48.26	74	-25.74	Vertical
4882.000	5.69	34.78	39.26	48.79	50.00	74	-24.00	Vertical
7323.000	8.41	35.50	39.06	47.71	52.56	74	-21.44	Vertical
9764.000	9.18	37.81	37.84	43.32	52.47	74	-21.53	Vertical
11254.860	9.86	38.13	38.35	43.91	53.55	74	-20.45	Vertical
1875.258	4.16	30.72	38.41	47.84	44.31	74	-29.69	Horizontal
3625.669	5.83	33.02	38.80	48.35	48.40	74	-25.60	Horizontal
4882.000	5.69	34.78	39.26	49.37	50.58	74	-23.42	Horizontal
7323.000	8.41	35.50	39.06	47.94	52.79	74	-21.21	Horizontal
9764.000	9.18	37.81	37.84	44.02	53.17	74	-20.83	Horizontal
11112.520	9.74	38.11	38.28	42.55	52.12	74	-21.88	Horizontal



Report No.: SZEM141100639001

Page: 89 of 99

Worse case mode:		GFSK(DH5	) Test	t channel:	Highest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1842.139	4.12	30.45	38.41	46.56	42.72	74	-31.28	Vertical
3393.477	5.88	32.76	38.69	47.21	47.16	74	-26.84	Vertical
4960.000	5.89	34.86	39.29	48.68	50.14	74	-23.86	Vertical
7440.000	8.54	35.43	39.05	48.08	53.00	74	-21.00	Vertical
9920.000	9.09	38.27	37.75	43.81	53.42	74	-20.58	Vertical
11226.250	9.84	38.12	38.33	44.33	53.96	74	-20.04	Vertical
1875.258	4.16	30.72	38.41	46.31	42.78	74	-31.22	Horizontal
3644.175	5.82	33.03	38.80	48.27	48.32	74	-25.68	Horizontal
4960.000	5.89	34.86	39.29	48.13	49.59	74	-24.41	Horizontal
7440.000	8.54	35.43	39.05	48.51	53.43	74	-20.57	Horizontal
9920.000	9.09	38.27	37.75	44.02	53.63	74	-20.37	Horizontal
11283.550	9.89	38.13	38.36	42.58	52.24	74	-21.76	Horizontal

#### Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
  - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM141100639001

Page: 90 of 99

# 7.12 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205						
Test Method:	ANSI C63.10: 2009						
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)						
Limit:	Frequency	Limit (dBuV/m @3m)	Remark				
	30MHz-88MHz	40.0	Quasi-peak Value				
	88MHz-216MHz	43.5	Quasi-peak Value  Quasi-peak Value				
	216MHz-960MHz	46.0					
	960MHz-1GHz	54.0	Quasi-peak Value				
	Above 1GHz	54.0	Average Value				
	Above IGHZ	74.0	Peak Value				
			·				
Test Setup:							






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM141100639001

Page: 91 of 99

Test Procedure:	<ul> <li>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>b. The EUT was set 3 meters away from the interference-receiving</li> </ul>
	antenna, which was mounted on the top of a variable-height antenna tower.
	<ul> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength.</li> <li>Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> </ul>
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	f. Place a marker at the end of the restricted band closest to the
	transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	g. Test the EUT in the lowest channel, the Highest channel
	h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.
	Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type Transmitting mode
Final Test Mode:	Through Pre-scan, find the DH5 of data type is the worse case of GFSK
	modulation type. Only the worst case is recorded in the report.
Instruments Used:	Refer to section 6 for details
Test Results:	Pass




Report No.: SZEM141100639001

Page: 92 of 99

Test plot as follows:

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Vertical



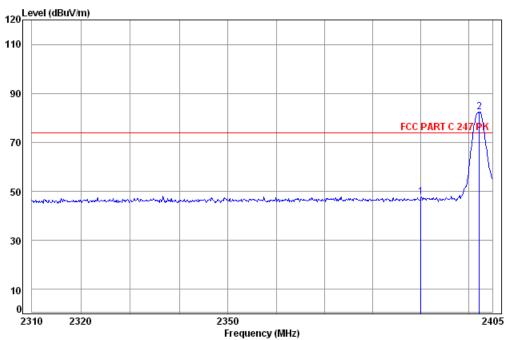

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 6390CR

Mode: : 2402 BT Band edge

Cable Ant Preamp Read Limit 0ver Limit Freq Loss Factor Factor Level Level Line MHz dΒ dB/m dBuV dBuV/m dBuV/m 2390.00 4.90 32.35 38.46 48.87 47.66 74.00 -26.34 2402.29 4.92 32.41 38.46 83.66 82.53 74.00




Report No.: SZEM141100639001

2405

Page: 93 of 99

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Peak Horizontal

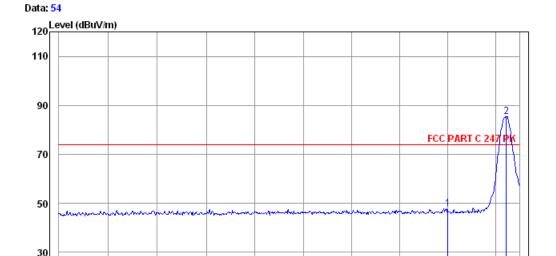

2350

Frequency (MHz)

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 6390CR

2310

10

Mode: : 2402 BT Band edge

2320

Cable Ant Preamp Read Limit 0ver Loss Factor Factor Limit Level Level Line MHz dΒ dB/m dB dBuV dBuV/m dBuV/m 48.84 47.63 74.00 -26.37 2390.00 4.90 32.35 38.46 2402.29 4.92 32.41 38.46 86.63 85.50 74.00 11.50




Report No.: SZEM141100639001

Page: 94 of 99

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Average Vertical



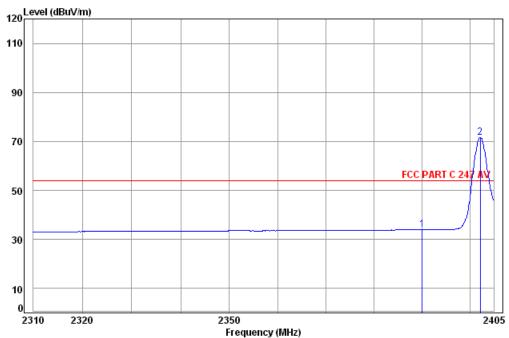

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 6390CR

Mode: : 2402 BT Band edge

Ant Preamp Cable 0ver Read limit Loss Factor Factor Level Level Limit Line MHz dΒ dB/m dBuV dBuV/m dBuV/m 1 2390.00 4.90 32.35 38.46 35.14 33.93 54.00 -20.07 4.92 32.41 38.46 72.84 71.71 54.00 17.71 2402.19






Report No.: SZEM141100639001

Page: 95 of 99

Worse case mode: GFSK (DH5) Test channel: Lowest Remark: Average Horizontal



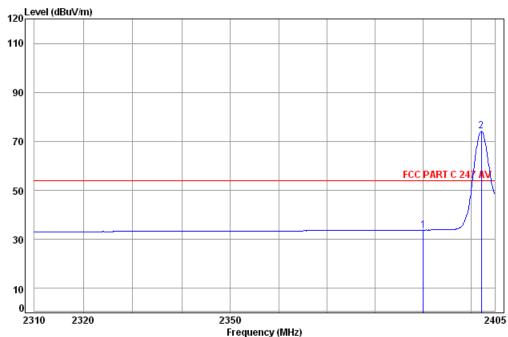

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 6390CR

1

Mode: : 2402 BT Band edge

Ant Preamp Cable Limit 0ver Read Freq Loss Factor Factor Level Level Line Limit MHz dΒ dB/m dBuV dBuV/m dBuV/m 4.90 32.35 38.46 2390.00 35.00 33.79 54.00 -20.21 4.92 32.41 38.46 75.28 74.15 54.00 20.15 2402.19




Report No.: SZEM141100639001

Page: 96 of 99

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Vertical



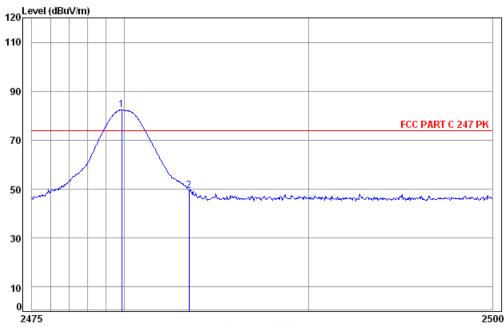

Frequency (MHz)

Site : chamber

Condition: FCC PART C 247 PK 3m Vertical

Job No: : 6390CR

Mode: : 2480 BT Band edge

Cable Ant Preamp Read Limit 0ver Loss Factor Factor Limit Level Level Line MHz dΒ dB/m dB dBuV dBuV/m dBuV/m dB 2479.86 5.02 32.44 38.47 83.35 82.34 74.00 8.34 2483.50 5.03 32.44 38.47 50.49 49.49 74.00 -24.51


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100639001

Page: 97 of 99

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Peak Horizontal

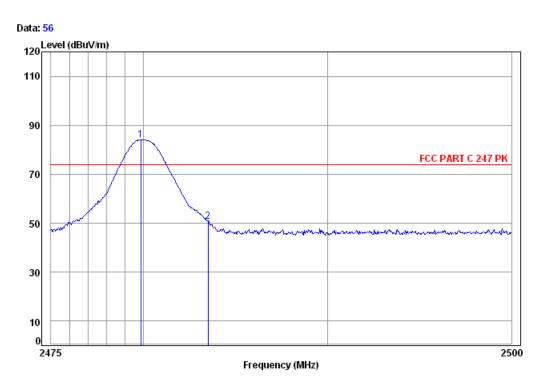

Site : chamber

Condition: FCC PART C 247 PK 3m Horizontal

Job No: : 6390CR

Mode: : 2480 BT Band edge


Cable Ant Preamp Read Limit 0∨er Loss Factor Factor Freq Level Level Line Limit MHz dΒ dB/m dΒ dBuV dBuV/m dBuV/m dB 5.02 32.44 38.47 85.10 84.09 74.00 10.09 2479.86 2483.50 5.03 32.44 38.47 51.73 50.73 74.00 -23.27



Report No.: SZEM141100639001

Page: 98 of 99

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Average Vertical

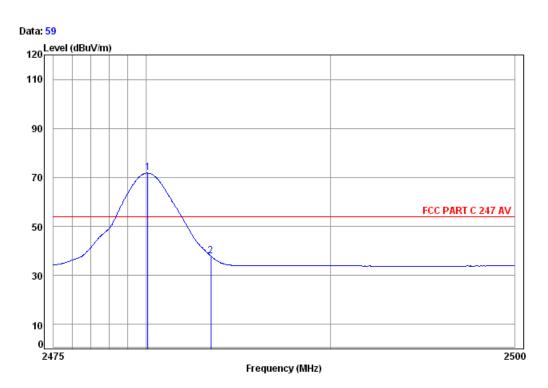

Site : chamber

Condition: FCC PART C 247 AV 3m Vertical

Job No: : 6390CR

Mode: : 2480 BT Band edge

Ant Preamp 0ver Cable Read limit Freq Loss Factor Factor Level Level Line Limit MHz dΒ dB/m dBuV dBuV/m dBuV/m 2480.10 5.02 32.44 38.47 72.79 71.78 54.00 17.78 5.03 32.44 38.47 2483.50 39.00 38.00 54.00 -16.00


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEM141100639001

Page: 99 of 99

Worse case mode: GFSK (DH5) Test channel: Highest Remark: Average Horizontal

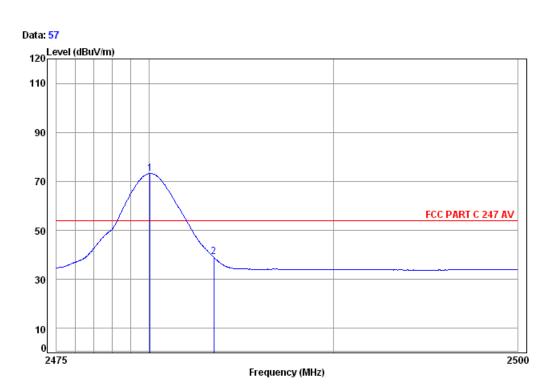

Site : chamber

Condition: FCC PART C 247 AV 3m Horizontal

Job No: : 6390CR

Mode: : 2480 BT Band edge

	Freq			Preamp Factor				
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
	2480.06 2483.50							

#### Note

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms\_and\_conditions.htm">www.sgs.com/terms\_and\_conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms\_e-document.htm">www.sgs.com/terms\_e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."