

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEM150800502903

Email: ee.shenzhen@sgs.com Page: 1 of 55

FCC REPORT

Application No: SZEM1508005029CR

Applicant:Gibson Innovations LimitedManufacturer:Gibson Innovations Limited

Factory: TCL Technoly Electronics(Huizhou) Co.,Ltd

Product Name: Bluetooth Headphones

Model No.(EUT): SHB9850NC Trade Mark: PHILIPS

FCC ID: 2AANUSHB9850NC

Standards: 47 CFR Part 15, Subpart C (2014)

Date of Receipt: 2015-08-17

Date of Test: 2015-08-24 to 2015-08-25

Date of Issue: 2015-08-26

Test Result: PASS *

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

^{*} In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEM150800502903

Page: 2 of 55

2 Version

Revision Record							
Version Chapter Date Modifier Remark							
00		2015-08-26		Original			

Authorized for issue by:		
Tested By	Eric Fu	2015-08-25
	(Eric Fu) /Project Engineer	Date
Prepared By	Jarole Chen	2015-08-26
	(Jade Chen) /Clerk	Date
Checked By	Orven Zhon	2015-08-26
	(Owen Zhou) /Reviewer	Date



Report No.: SZEM150800502903

Page: 3 of 55

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2009	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207 ANSI C63.10 20		PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2009	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2009	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2009	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2009	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2009	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2009	PASS



Report No.: SZEM150800502903

Page: 4 of 55

4 Contents

			Page
1	CC	OVER PAGE	1
2	VE	ERSION	2
3	TE	EST SUMMARY	3
4		ONTENTS	
Ī		ENERAL INFORMATION	
5	GE		
	5.1	CLIENT INFORMATION	
	5.2	GENERAL DESCRIPTION OF EUT	
	5.3	TEST ENVIRONMENT	
	5.4	DESCRIPTION OF SUPPORT UNITS	
	5.5	TEST LOCATION	
	5.6	TEST FACILITY	
	5.7	DEVIATION FROM STANDARDS	
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	5.10	EQUIPMENT LIST	9
6	TE	EST RESULTS AND MEASUREMENT DATA	12
	6.1	Antenna Requirement	12
	6.2	CONDUCTED EMISSIONS	13
	6.3	CONDUCTED PEAK OUTPUT POWER	17
	6.4	6DB OCCUPY BANDWIDTH	20
	6.5	Power Spectral Density	23
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	26
	6.7	Spurious RF Conducted Emissions	28
	6.8	RADIATED SPURIOUS EMISSION	
		8.1 Spurious Emissions	
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	44
7	PH	HOTOGRAPHS - EUT TEST SETUP	54
	7.1	CONDUCTED EMISSION	54
	7.2	RADIATED SPURIOUS EMISSION	54
Ω	DL	ACTOCRADHS - EUT CONSTRUCTIONAL DETAILS	55



Report No.: SZEM150800502903

Page: 5 of 55

5 General Information

5.1 Client Information

Applicant:	Gibson Innovations Limited
Address of Applicant:	5/F, Philips Electronics Building,5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong
Manufacturer:	Gibson Innovations Limited
Address of Manufacturer:	5/F, Philips Electronics Building,5 Science Park East Avenue, Hong Kong Science Park, Shatin, New Territories, Hong Kong
Factory:	TCL Technoly Electronics(Huizhou) Co.,Ltd
Address of Factory:	Section 37, Zhongkai High-tech Development Zone, Huizhou City, Guang Dong Province, China, 516006.

5.2 General Description of EUT

Product Name:	Bluetooth Headphones
Model No.:	SHB9850NC
Trade Mark:	PHILIPS
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	BT 4.0 Dual mode
Modulation Type:	GFSK
Number of Channel:	40
Sample Type:	Portable production
Test Power Grade:	ClassII (manufacturer declare)
Test Software of EUT:	Blue test 3
Antenna Type:	Integral
Antenna Gain:	3.07dbi
Power Supply:	by USB 5V
Battery:	3.7V/530mAh
Test Voltage:	DC 3.7V



Report No.: SZEM150800502903

Page: 6 of 55

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
3	2406MHz	13	2426MHz	23	2446MHz	33	2466MHz
4	2408MHz	14	2428MHz	24	2448MHz	34	2468MHz
5	2410MHz	15	2430MHz	25	2450MHz	35	2470MHz
6	2412MHz	16	2432MHz	26	2452MHz	36	2472MHz
7	2414MHz	17	2434MHz	27	2454MHz	37	2474MHz
8	2416MHz	18	2436MHz	28	2456MHz	38	2476MHz
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency		
The Lowest channel	2402MHz		
The Middle channel	2440MHz		
The Highest channel	2480MHz		



Report No.: SZEM150800502903

Page: 7 of 55

5.3 Test Environment

Operating Environment:			
Temperature:	25.0 °C		
Humidity:	53 % RH		
Atmospheric Pressure:	1010mbar		

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab, No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM150800502903

Page: 8 of 55

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

VCCI

The 10m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers of SGS-CSTC Standards Technical Services Co., Ltd. have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-2.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.





Report No.: SZEM150800502903

Page: 9 of 55

5.10 Equipment List

	Conducted Emission								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	2015-05-13	2016-05-13			
2	LISN	Rohde & Schwarz	ENV216	SEL0152	2014-10-24	2015-10-24			
3	LISN	ETS-LINDGREN	3816/2	SEL0021	2015-05-13	2016-05-13			
4	8 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T8-02	SEL0162	2015-08-30	2016-08-30			
5	4 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T4-02	SEL0163	2015-08-30	2016-08-30			
6	2 Line ISN	Fischer Custom Communications Inc.	FCC-TLIS N-T2-02	SEL0164	2015-08-30	2016-08-30			
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2015-05-13	2016-05-13			
8	Coaxial Cable	SGS	N/A	SEL0025	2015-05-13	2016-05-13			
9	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	2015-10-24			
10	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24	2015-10-24			
11	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13			



Report No.: SZEM150800502903

Page: 10 of 55

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2015-05-13	2016-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEL0312	2014-09-16	2015-09-16
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2014-10-24	2015-10-24
5	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2014-10-24	2015-10-24
6	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2014-11-24	2015-11-24
7	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2015-05-13	2016-05-13
8	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2014-10-24	2015-10-24
9	Coaxial cable	SGS	N/A	SEL0027	2015-05-13	2016-05-13
10	Coaxial cable	SGS	N/A	SEL0189	2015-05-13	2016-05-13
11	Coaxial cable	SGS	N/A	SEL0121	2015-05-13	2016-05-13
12	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13
13	Band filter	Amindeon	82346	SEL0094	2015-05-13	2016-05-13
14	Barometer	Chang Chun	DYM3	SEL0088	2015-05-13	2016-05-13
15	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	2015-10-24
16	Humidity/ Temperature Indicator	Shanhai Qixiang	ZJ1-2B	SEL0103	2014-10-24	2015-10-24
17	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2015-05-13	2016-05-13
18	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2014-10-24	2015-10-24
19	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2015-05-13	2016-05-13



Report No.: SZEM150800502903

Page: 11 of 55

	RF connected test								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)			
1	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2014-10-24	2015-10-24			
2	Humidity/ Temperature Indicator	HYGRO	ZJ1-2B	SEL0033	2014-10-24	2015-10-24			
3	Spectrum Analyzer	Rohde & Schwarz	FSP	SEL0154	2014-10-24	2015-10-24			
4	Coaxial cable	SGS	N/A	SEL0178	2015-05-13	2016-05-13			
5	Coaxial cable	SGS	N/A	SEL0179	2015-05-13	2016-05-13			
6	Barometer	ChangChun	DYM3	SEL0088	2015-05-13	2016-05-13			
7	Signal Generator	Rohde & Schwarz	SML03	SEL0068	2015-04-25	2016-04-25			
8	Band filter	amideon	82346	SEL0094	2015-05-13	2016-05-13			
9	POWER METER	R&S	NRVS	SEL0144	2014-10-24	2015-10-24			
10	Attenuator	Beijin feihang taida	TST-2-6dB	SEL0205	2015-04-25	2016-04-25			
11	Power Divider(splitter)	Agilent Technologies	11636B	SEL0130	2014-10-24	2015-10-24			

Note: The calibration interval is one year, all the instruments are valid.



Report No.: SZEM150800502903

Page: 12 of 55

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

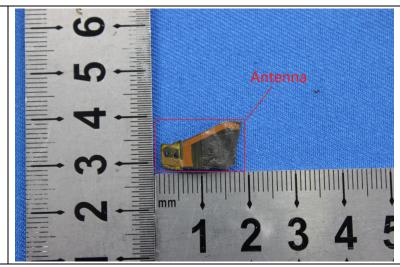

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.07dbi.



Report No.: SZEM150800502903

Page: 13 of 55


6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2009			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Francisco van de (MIII-)	Limit (dBuV)		
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		-
Test Procedure:	 The mains terminal disturb room. 	bance voltage test was	s conducted in a shie	elded
	•			he was ear he of 2.



Report No.: SZEM150800502903

Page: 14 of 55

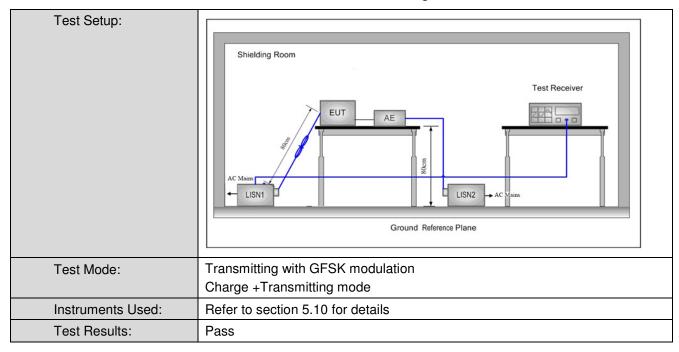



Report No.: SZEM150800502903


Page: 15 of 55

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:

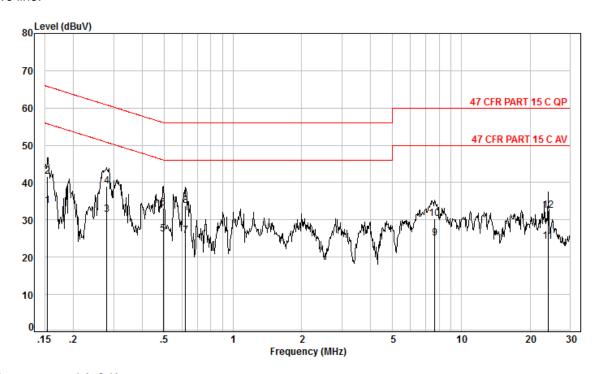

Site : Shielding Room

Condition: 47 CFR PART 15 C AV CE Line

Job No. : 5029CR

Test Mode: Charge + TX mode


		Cable	LISN	Read		Limit	0ver	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15	0.08	9.82	23.87	33.77	55.78	-22.01	Average
2	0.15	0.08	9.82	31.83	41.73	65.78	-24.05	QP
3	0.28	0.06	9.84	21.54	31.44	50.81	-19.37	Average
4	0.28	0.06	9.84	29.03	38.93	60.81	-21.88	QP
5	0.49	0.05	9.86	16.23	26.14	46.10	-19.96	Average
6	0.49	0.05	9.86	23.16	33.07	56.10	-23.03	QP
7	0.62	0.04	9.87	15.83	25.74	46.00	-20.26	Average
8	0.62	0.04	9.87	23.95	33.86	56.00	-22.14	QP
9	7.65	0.30	10.15	14.51	24.96	50.00	-25.04	Average
10	7.65	0.30	10.15	19.91	30.36	60.00	-29.64	QP
11	24.01	1.82	9.94	12.35	24.11	50.00	-25.89	Average
12	24.01	1.82	9.94	20.70	32.46	60.00	-27.54	QP



Report No.: SZEM150800502903

Page: 16 of 55

Neutral line:

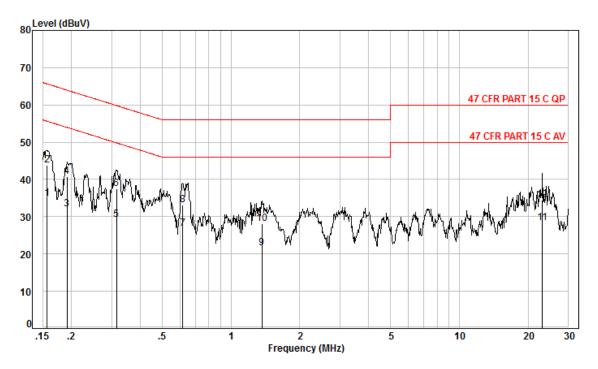

Site : Shielding Room

Condition: 47 CFR PART 15 C AV CE Neutral

Job No. : 5029CR

Test Mode: Charge + TX mode

		Cable	LISN	Read		Limit	0ver	
	Freq	Loss	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16	0.08	9.79	25.00	34.87	55.65	-20.78	Average
2	0.16	0.08	9.79	33.97	43.84	65.65	-21.81	QP
3	0.19	0.06	9.84	22.23	32.13	53.98	-21.85	Average
4	0.19	0.06	9.84	30.86	40.76	63.98	-23.22	QP
5	0.31	0.06	9.86	19.35	29.27	49.84	-20.57	Average
6	0.31	0.06	9.86	27.55	37.47	59.84	-22.37	QP
7	0.61	0.04	9.93	16.89	26.86	46.00	-19.14	Average
8	0.61	0.04	9.93	23.14	33.11	56.00	-22.89	QP
9	1.37	0.03	10.06	11.55	21.64	46.00	-24.36	Average
10	1.37	0.03	10.06	18.13	28.22	56.00	-27.78	QP
11	23.14	1.76	10.26	16.31	28.33	50.00	-21.67	Average
12	23.14	1.76	10.26	22.52	34.54	60.00	-25.46	QP

Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM150800502903

Page: 17 of 55

6.3 Conducted Peak Output Power

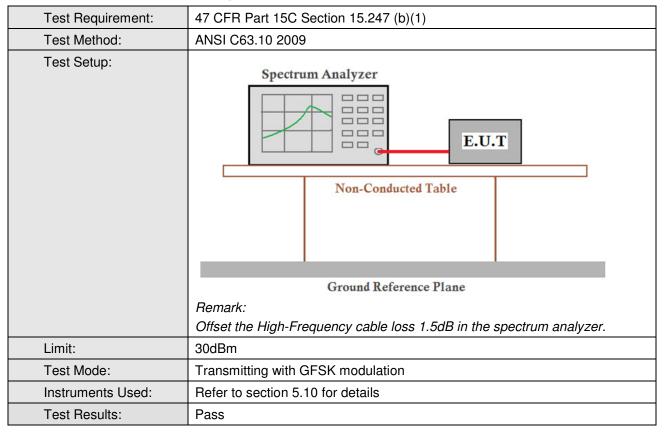

Measurement Data

	GFSK mod	le	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.88	30.00	Pass
Middle	1.54	30.00	Pass
Highest	0.95	30.00	Pass




Report No.: SZEM150800502903


Page: 18 of 55

Test plot as follows:

Test mode: GFSK Test channel: Lowest

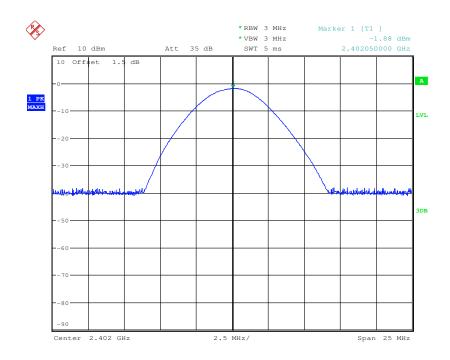



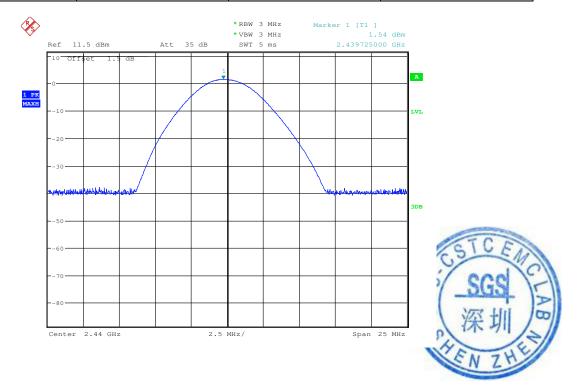




Report No.: SZEM150800502903

Page: 19 of 55



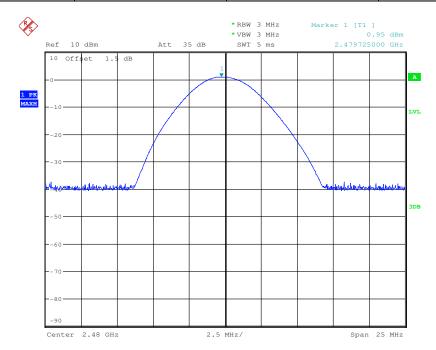




Report No.: SZEM150800502903

Page: 20 of 55

6.4 6dB Occupy Bandwidth

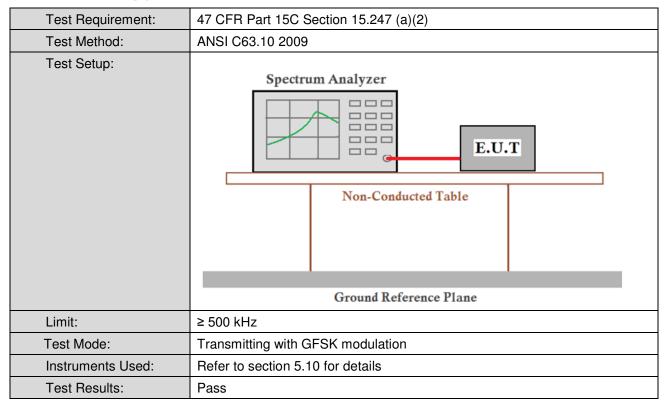

Measurement Data

	GFSK mode		
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.708	≥500	Pass
Middle	0.705	≥500	Pass
Highest	0.699	≥500	Pass




Report No.: SZEM150800502903


Page: 21 of 55

Test plot as follows:

Test mode: GFSK Test channel: Lowest

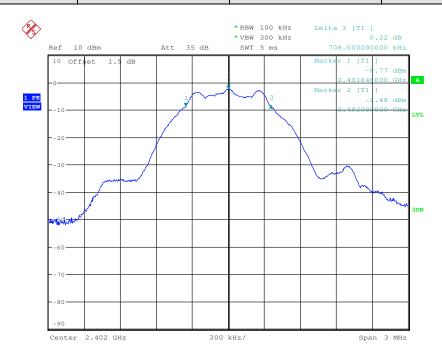




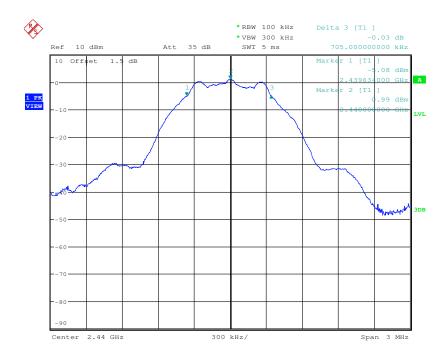




Report No.: SZEM150800502903

Page: 22 of 55



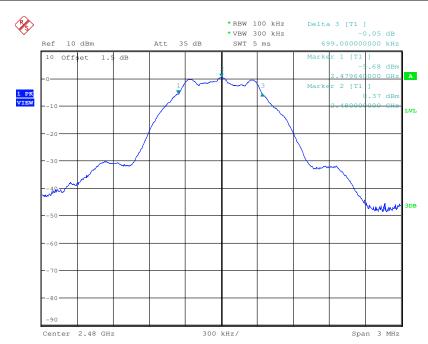




Report No.: SZEM150800502903

Page: 23 of 55

6.5 Power Spectral Density

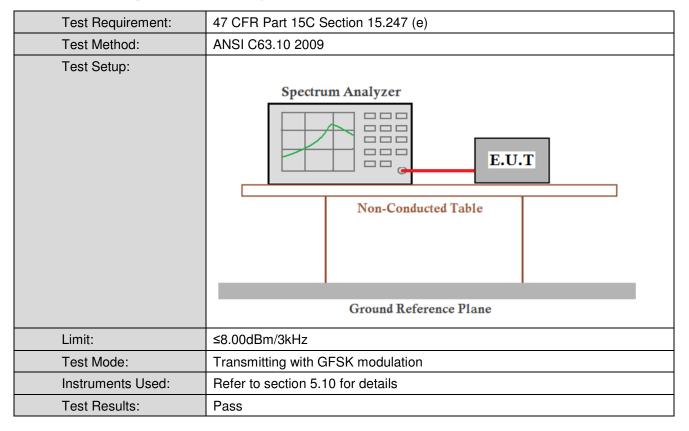

	GFSK mode		
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-18.14	≤8.00	Pass
Middle	-14.53	≤8.00	Pass
Highest	-15.14	≤8.00	Pass




Report No.: SZEM150800502903


Page: 24 of 55

Test plot as follows:



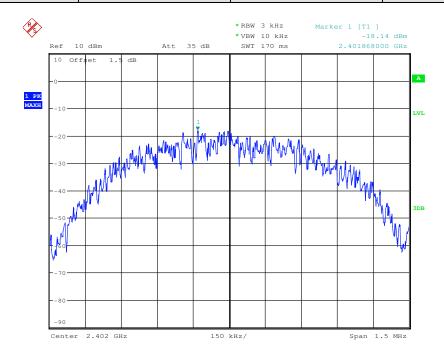



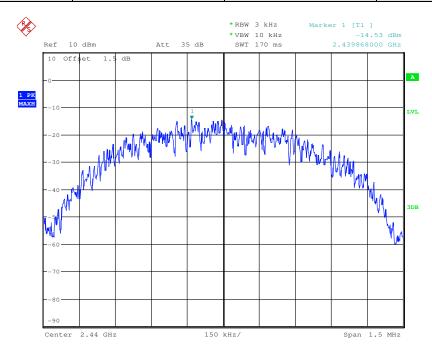




Report No.: SZEM150800502903

Page: 25 of 55



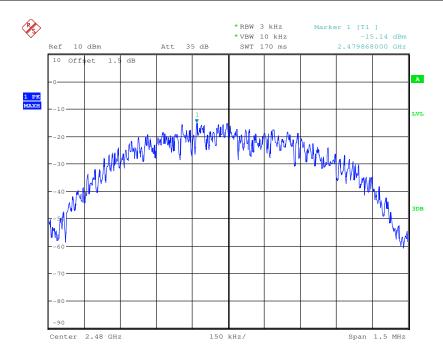




Report No.: SZEM150800502903

Page: 26 of 55

6.6 Band-edge for RF Conducted Emissions

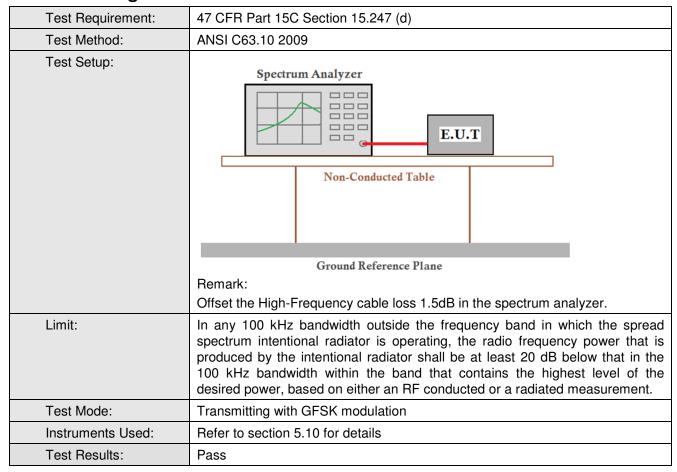





Report No.: SZEM150800502903


Page: 27 of 55

Test plot as follows:

Test mode: GFSK Test channel: Lowest

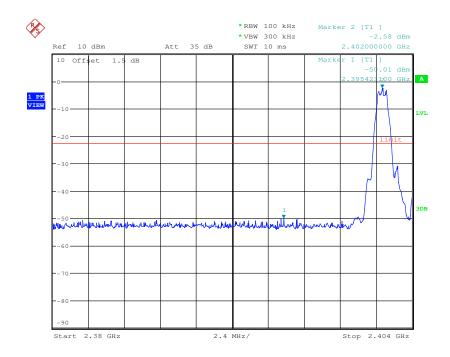



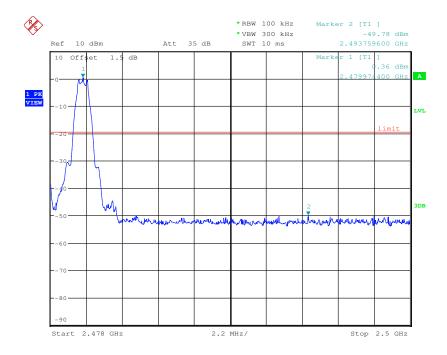



Report No.: SZEM150800502903

Page: 28 of 55

6.7 Spurious RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)	
Test Method:	ANSI C63.10 2009	
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark:	
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test Mode:	Transmitting with GFSK modulation	
Instruments Used:	Refer to section 5.10 for details	
Test Results:	Pass	







Report No.: SZEM150800502903

Page: 29 of 55


Test mode: GFSK Test channel: Lowest

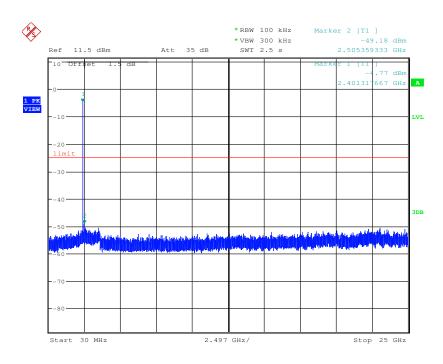


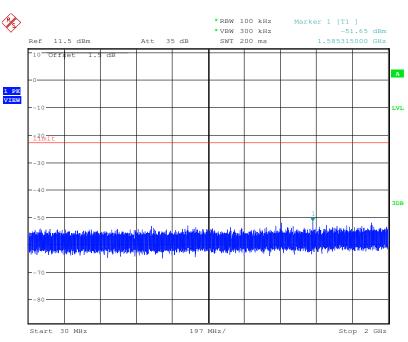




Report No.: SZEM150800502903

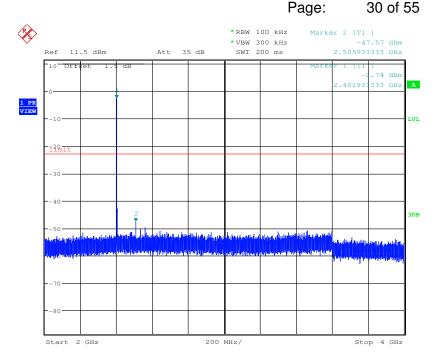


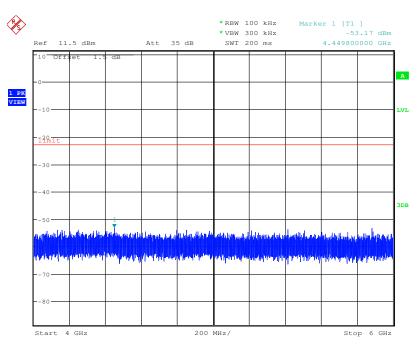



Report No.: SZEM150800502903

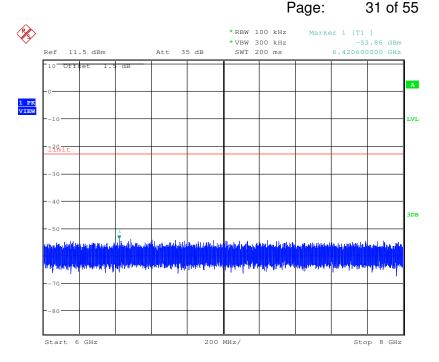

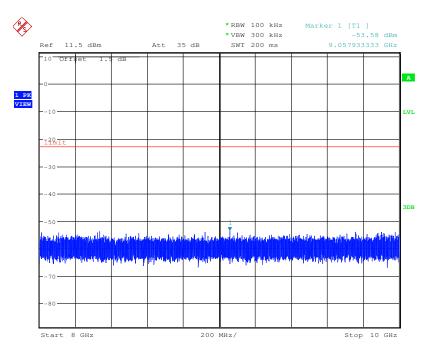





Report No.: SZEM150800502903

Page: 32 of 55


Test mode: GFSK Test channel: Middle

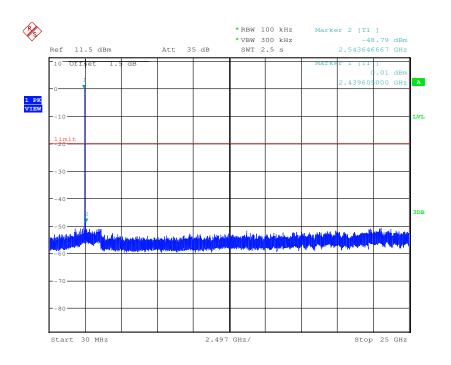


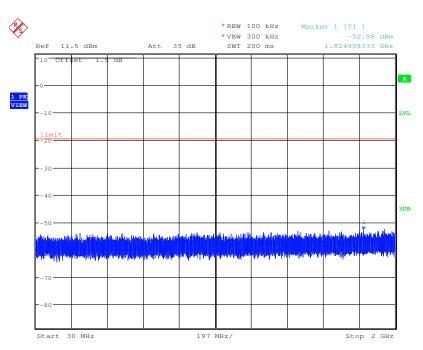




Report No.: SZEM150800502903

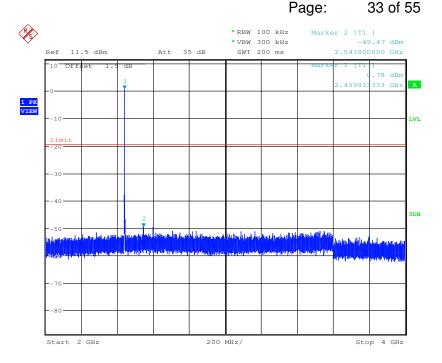


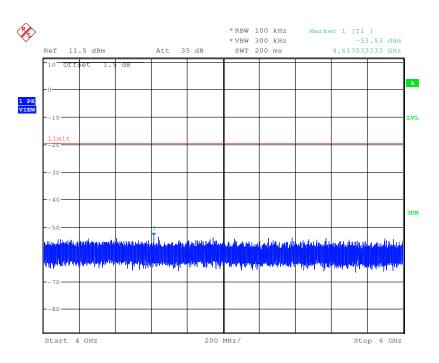



Report No.: SZEM150800502903

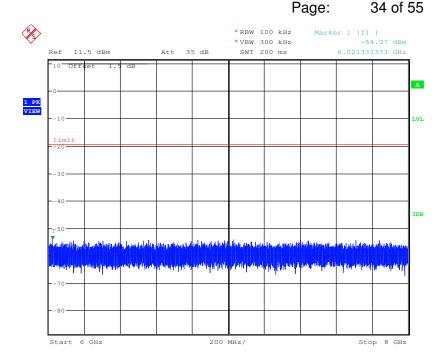

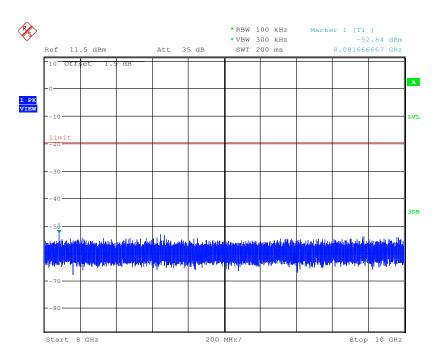





Report No.: SZEM150800502903

Page: 35 of 55


Test mode: GFSK Test channel: Highest

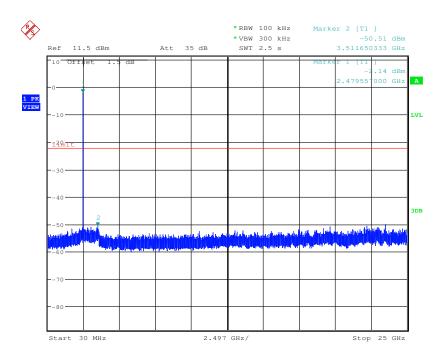


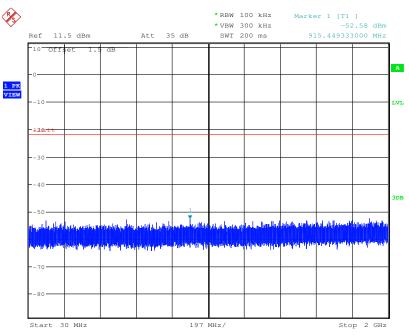



Report No.: SZEM150800502903

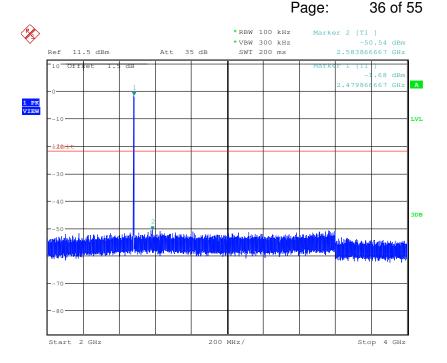


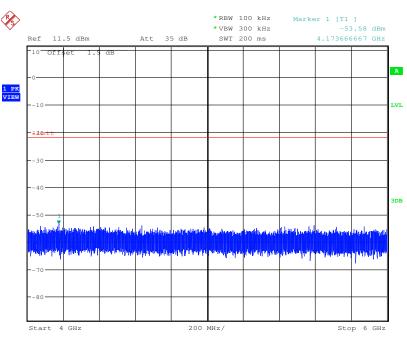




Report No.: SZEM150800502903

Page: 37 of 55

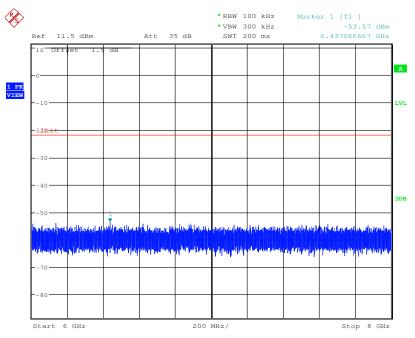

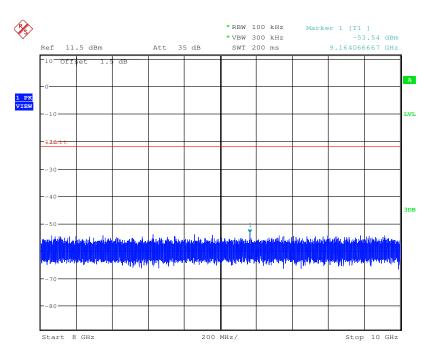

Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.





Report No.: SZEM150800502903

Page: 38 of 55

6.8 Radiated Spurious Emission

6.8.1 Spurious Emiss	sions							
Test Requirement:	47 CFR Part 15C Secti	on 1	15.209 and 15	.205				
Test Method:	ANSI C63.10 2009							
Test Site:	Measurement Distance	: 3n	n (Semi-Anecl	hoic Cham	ber)			
Receiver Setup:	Frequency		Detector	RBW	VBW	Remark		
	0.009MHz-0.090MH	z	Peak	10kHz	30kHz	Peak		
	0.009MHz-0.090MH	Z	Average	10kHz	30kHz	Average		
	0.090MHz-0.110MH	z	Quasi-peak	10kHz	30kHz	Quasi-peak		
	0.110MHz-0.490MH	z	Peak	10kHz	30kHz	Peak		
	0.110MHz-0.490MH	Z	Average	10kHz	30kHz	Average		
	0.490MHz -30MHz		Quasi-peak	10kHz	30kHz	Quasi-peak		
	30MHz-1GHz	30MHz-1GHz			z 300kHz	Quasi-peak		
	Above 1GHz		Peak	1MHz	3MHz	Peak		
	Above Tariz		Peak	1MHz	10Hz	Average		
Limit:	Frequency		eld strength crovolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)		
	0.009MHz-0.490MHz	2	400/F(kHz)	-	-	300		
	0.490MHz-1.705MHz	24	4000/F(kHz)	-	-	30		
	1.705MHz-30MHz		30	-	-	30		
	30MHz-88MHz		100	40.0	Quasi-peak	3		
	88MHz-216MHz		150	43.5	Quasi-peak	3		
	216MHz-960MHz		200	46.0	Quasi-peak	3		
	960MHz-1GHz		500	54.0	Quasi-peak	3		
	Above 1GHz		500	54.0	Average	3		
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.							
Test Setup:					V.	深圳		







Test Results:

Pass

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM150800502903

Page: 39 of 55


Figure 2. 30MHz to 1GHz Figure 1. Below 30MHz Figure 3. Above 1 GHz Test Procedure: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. Test the EUT in the lowest channel (2402MHz), the middle channel (2440MHz), the Highest channel (2480MHz) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. Repeat above procedures until all frequencies measured was complete. Transmitting with GFSK modulation **Exploratory** Test Mode: Transmitting mode Final Test Mode: Transmitting with GFSK modulation Only the worst case is recorded in the report. Instruments Used: Refer to section 5.10 for details



Report No.: SZEM150800502903

Page: 40 of 55

Radiated Emission below 1GHz						
30MHz~1GHz (QP)						
Test mode:	Transmitting	Vertical				

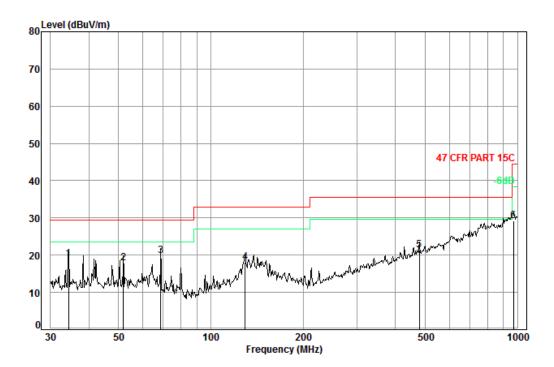

Condition: 47 CFR PART 15C 10m Vertical

Job No. : 5029CR


Test Mode: a


	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	34.40	6.70	11.64	32.66	33.23	18.91	29.50	-10.59
2	51.84	6.94	11.78	32.66	31.80	17.86	29.50	-11.64
3 рр	68.63	6.93	10.62	32.64	34.95	19.86	29.50	-9.64
4	129.47	7.35	11.87	32.63	31.41	18.00	33.00	-15.00
5	478.85	8.50	17.13	32.58	28.39	21.44	35.60	-14.16
6	972.34	9.60	24.03	31.15	26.83	29.31	44.40	-15.09



Report No.: SZEM150800502903

41 of 55 Page:



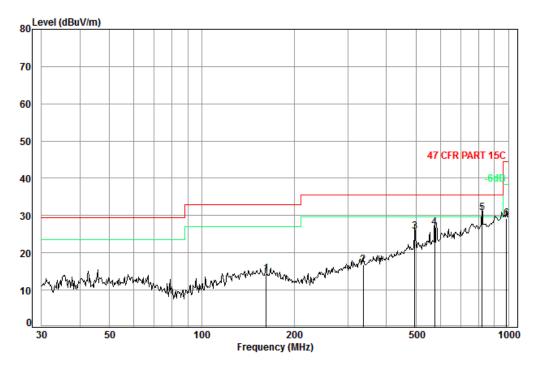

Condition: 47 CFR PART 15C 10m Horizontal

Job No. : 5029CR Test Mode: a

1

2

3

4

Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit dBuV dBuV/m dBuV/m MHz dB dB/m dB 162.04 26.47 7.50 13.03 32.61 14.39 33.00 -18.61 336.04 8.18 13.99 32.54 27.26 16.89 35.60 -18.71 495.93 8.58 17.30 32.59 32.50 25.79 35.60 -9.81 574.63 32.62 31.77 8.84 18.87 26.86 35.60 -8.74 5 pp 821.71 9.30 22.45 32.26 31.24 30.73 35.60 -4.87 986.07 9.60 24.04 31.02 26.69 29.31 44.40 -15.09



Report No.: SZEM150800502903

Page: 42 of 55

Transmitte	Transmitter Emission above 1GHz										
Test mode:	(GFSK	Te	st channel:	Lowest		Rema	rk:	Peak		
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Pream Facto (dB)		Level (dBuV/m)		t Line uV/m)	Over Limit (dB)	Polarization		
1750.702	2.83	29.89	38.40	45.49	39.81		74	-34.19	Vertical		
3616.451	4.15	33.01	38.79	45.73	44.10		74	-29.90	Vertical		
4804.000	4.29	34.70	39.24	44.04	43.79		74	-30.21	Vertical		
7206.000	5.30	35.63	39.07	45.05	46.91		74	-27.09	Vertical		
9608.000	6.52	37.33	37.93	42.48	48.40		74	-25.60	Vertical		
11457.210	7.74	38.19	38.45	43.16	50.64		74	-23.36	Vertical		
1814.218	2.89	30.22	38.41	46.60	41.30		74	-32.70	Horizontal		
3472.118	3.89	32.86	38.73	46.95	44.97		74	-29.03	Horizontal		
4804.000	4.29	34.70	39.24	44.99	44.74		74	-29.26	Horizontal		
7206.000	5.30	35.63	39.07	44.97	46.83		74	-27.17	Horizontal		
9608.000	6.52	37.33	37.93	42.84	48.76		74	-25.24	Horizontal		
11283.550	7.60	38.13	38.36	43.52	50.89		74	-23.11	Horizontal		

Test mode:		GFSK	Test	channel:	Middle	Rema	ırk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Limit (dBµV/m)	Over limit (dB)	Polarization
1750.702	2.83	29.89	38.40	47.13	41.45	74	-32.55	Vertical
3653.463	4.12	33.04	38.81	46.76	45.11	74	-28.89	Vertical
4880.000	4.36	34.78	39.26	45.48	45.36	74	-28.64	Vertical
7320.000	5.21	35.51	39.06	45.25	46.91	74	-27.09	Vertical
9760.000	6.49	37.80	37.84	41.52	47.97	74	-26.03	Vertical
11399.030	7.86	38.15	38.42	44.33	51.92	74	-22.08	Vertical
1724.166	2.81	29.77	38.40	46.70	40.88	74	-33.12	Horizontal
3653.463	4.12	33.04	38.81	46.76	45.11	74	-28.89	Horizontal
4880.000	4.36	34.78	39.26	44.62	44.50	74	-29.50	Horizontal
7320.000	5.21	35.51	39.06	45.25	46.91	74	-27.09	Horizontal
9760.000	6.49	37.80	37.84	42.86	49.31	74	-24.69	Horizontal
11515.680	7.62	38.24	38.47	43.96	51.35	74	-22.65	Horizontal



Report No.: SZEM150800502903

Page: 43 of 55

Test mode:		GFSK	Test	channel:	Highest		Rema	rk:	Peak
Frequency (MHz)	Cable loss (dB)	Antenna factors (dB/m)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBµV/m)	Lir (dBµ	mit V/m)	Over limit (dB)	Polarization
1933.424	2.97	31.19	38.42	45.96	41.70	7	4	-32.30	Vertical
3728.625	4.05	33.10	38.84	46.83	45.14	7	4	-28.86	Vertical
4960.000	4.43	34.86	39.29	45.42	45.42	7	4	-28.58	Vertical
7440.000	5.15	35.43	39.05	42.26	43.79	7	4	-30.21	Vertical
9920.000	6.83	38.27	37.75	41.60	48.95	7	4	-25.05	Vertical
11933.470	7.25	38.63	38.67	44.20	51.41	7	4	-22.59	Vertical
1880.038	2.93	30.76	38.41	45.19	40.47	7	4	-33.53	Horizontal
3719.146	4.06	33.09	38.84	45.15	43.46	7	4	-30.54	Horizontal
4960.000	4.43	34.86	39.29	43.74	43.74	7	4	-30.26	Horizontal
7440.000	5.15	35.43	39.05	43.12	44.65	7	4	-29.35	Horizontal
9920.000	6.83	38.27	37.75	39.88	47.23	7	4	-26.77	Horizontal
12556.750	6.82	39.24	39.17	44.50	51.39	7	4	-22.61	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level =Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM150800502903

Page: 44 of 55

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15	17 CFR Part 15C Section 15.209 and 15.205							
Test Method:	ANSI C63.10 2009	ANSI C63.10 2009							
Test Site:	Measurement Distance: 3m	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Limit:	Frequency	Limit (dBuV/m @3m)	Remark						
	30MHz-88MHz	40.0	Quasi-peak Value						
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value						
	960MHz-1GHz	54.0	Quasi-peak Value						
	Above 1GHz	54.0	Average Value						
	Above IGHZ	74.0	Peak Value						
Test Setup:									






Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz

Test Procedure:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel



Report No.: SZEM150800502903

Page: 45 of 55

	 g. Test the EUT in the lowest channel , the Highest channel h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case. i. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with GFSK modulation
	Transmitting mode
Final Test Mode:	Transmitting with GFSK modulation
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM150800502903

Page: 46 of 55

Test plot as follows:

Restricted bands around fundamental frequency									
Test mode: GFSK Test channel: Lowest Remark: Peak Vertical									



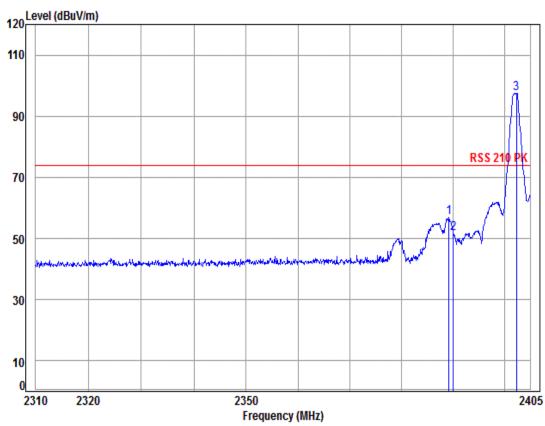

Site : chamber

Condition: RSS 210 PK 3m Vertical

Job No: : 5029 CR

Mode: : 2402 BLE Band edge

	Freq			Preamp Factor					
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	uV/m
1	2389.16	4.90	32.34	38.46	57.96	56.74	74.00	-17.26	5012
2	2390.00	4.90	32.35	38.46	52.84	51.63	74.00	-22.37	5012
3 рр	2402.38	4.92	32.41	38.46	98.59	97.46	74.00	23.46	5012




Report No.: SZEM150800502903

Page: 47 of 55

Test mode	e: GFSK	Test channel:	Lowest	Remark:	Peak	Horizontal
-----------	---------	---------------	--------	---------	------	------------



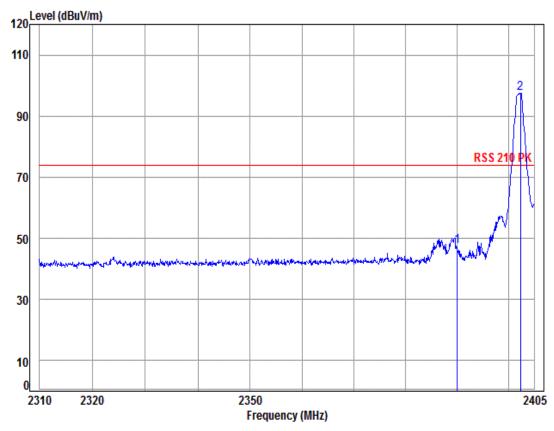

Site : chamber

Condition: RSS 210 PK 3m Horizontal

Job No: : 5029 CR

Mode: : 2402 BLE Band edge

	Cable	Ant	Preamp	Read		Limit	0ver	Limit
Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Line
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	uV/m
2390.00 2402.38								




Report No.: SZEM150800502903

48 of 55 Page:

	Test mode:	GFSK	Test channel:	Lowest	Remark:	Average	Vertical	l
--	------------	------	---------------	--------	---------	---------	----------	---



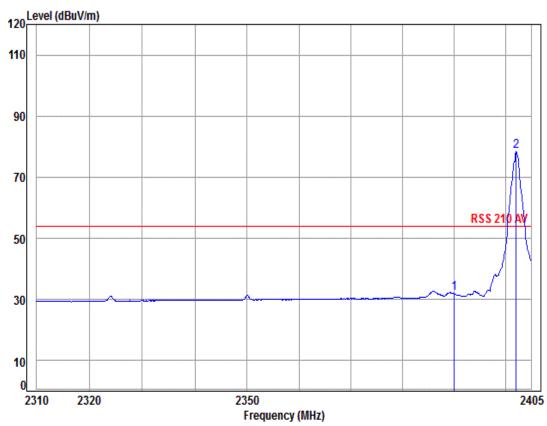

: chamber

Condition: RSS 210 AV 3m Vertical

Job No: : 5029 CR

1

: 2402 BLE Band edge Mode:

Cable Ant Preamp Read Limit Over Limit Loss Factor Factor Level Level Line Limit Line dBuV dBuV/m dBuV/m MHz dB dB/m dB uV/m 2390.00 4.90 32.35 38.46 33.28 32.07 54.00 -21.93 501 2 pp 2402.09 4.92 32.41 38.46 79.47 78.34 54.00 24.34 501






Report No.: SZEM150800502903

Page: 49 of 55

Test mode:	GFSK	Test channel:	Lowest	Remark:	Average	Horizontal
------------	------	---------------	--------	---------	---------	------------



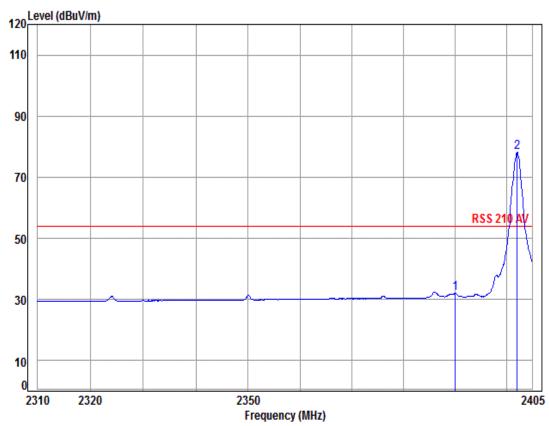

Site : chamber

Condition: RSS 210 AV 3m Horizontal

Job No: : 5029 CR

Mode: : 2402 BLE Band edge

				Preamp Read Factor Level Level						
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	uV/m	
1 2 pp	2390.00 2402.09									




Report No.: SZEM150800502903

Page: 50 of 55

Test mode: GFSK Test channel: Highest Remark: Peak Vertical



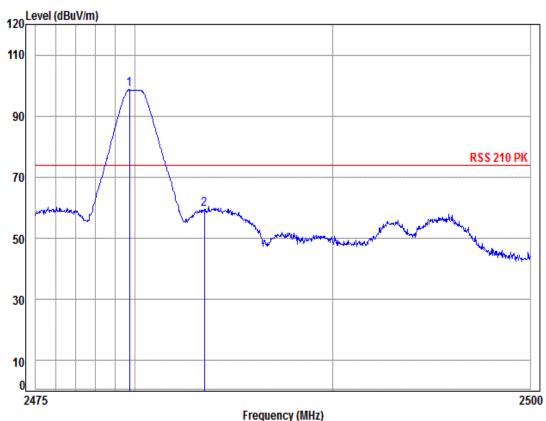

Site : chamber

Condition: RSS 210 PK 3m Vertical

Job No: : 5029 CR

Mode: : 2480 BLE Band edge

Freq				Over Limit	
	 	 	 	dB	
 2479.73 2483.50					




Report No.: SZEM150800502903

Page: 51 of 55

Test mode:	GFSK	Test channel:	Highest	Remark:	Peak	Horizontal
------------	------	---------------	---------	---------	------	------------



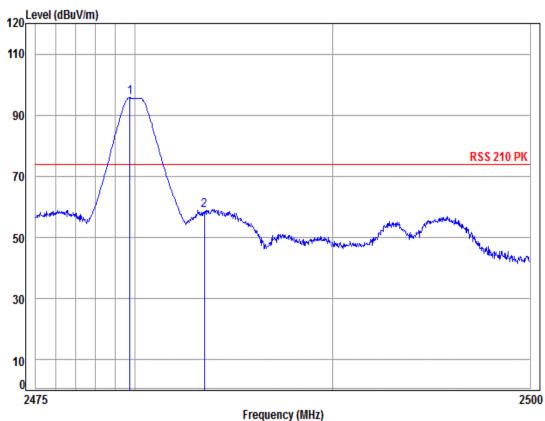

Site : chamber

Condition: RSS 210 PK 3m Horizontal

Job No: : 5029 CR

Mode: : 2480 BLE Band edge


				Preamp Read Factor Level Lev						
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	uV/m	
	2479.76 2483.50									



Report No.: SZEM150800502903

Page: 52 of 55



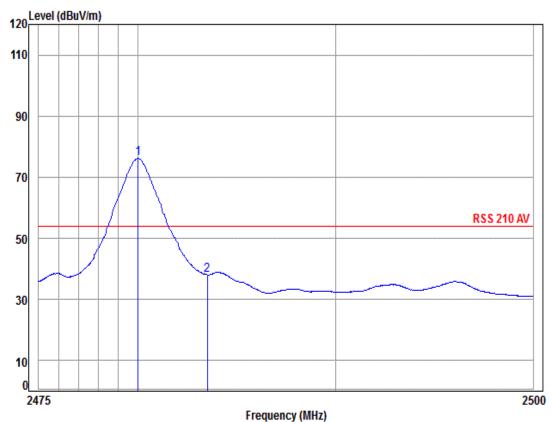

Site : chamber

Condition: RSS 210 AV 3m Vertical

Job No: : 5029 CR

Mode: : 2480 BLE Band edge

			Cable	Ant	Preamp	Read		Limit	0ver	Limit
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Line
	-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	uV/m
		2480.01 2483.50								
_		2403.30	5.05	32.44	50.47	33.00	30.00	34.00	-13.32	201




Report No.: SZEM150800502903

Page: 53 of 55

Test mode:	GFSK	Test channel:	Highest	Remark:	Average	Horizontal
------------	------	---------------	---------	---------	---------	------------

Data: 1216

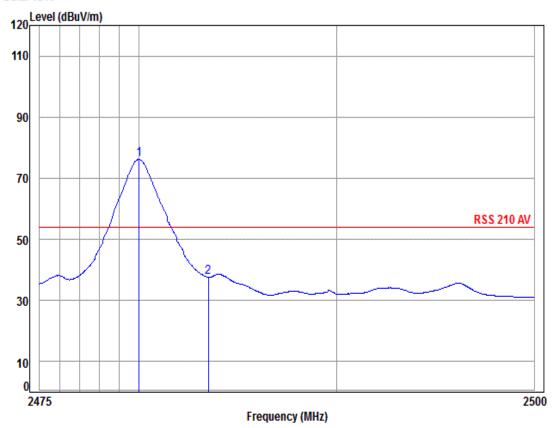

Site : chamber

Condition: RSS 210 AV 3m Horizontal

Job No: : 5029 CR

Mode: : 2480 BLE Band edge

		Cable	Ant	Preamp	Read		Limit	0ver	Limit
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Line
_									
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	uV/m
1 pp	2480.01	5.02	32.44	38.47	77.18	76.17	54.00	22.17	501
2	2483.50	5.03	32.44	38.47	38.62	37.62	54.00	-16.38	501

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM150800502903

Page: 54 of 55


7 Photographs - EUT Test Setup

Test model No.: SHB9850NC

7.1 Conducted Emission




7.2 Radiated Spurious Emission

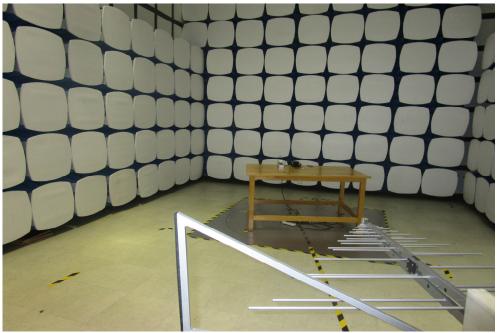



Report No.: SZEM150800502903

Page: 55 of 55

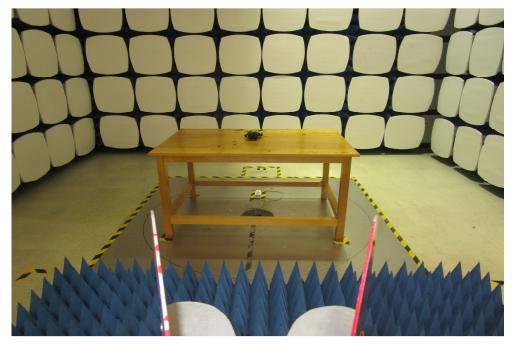

8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1508005029CR.