

# TEST REPORT FOR NR TESTING

Report No.: PSU-NQN2412170317RF02

Product Name: Edge Router

Product Model: ER815-NRQ3-WLAN



Brand Name: inhand

Applicant: Beijing InHand Networks Technology Co., Ltd.

Manufacturer: Beijing InHand Networks Technology Co., Ltd.

Specification: FCC Part 2, Part 24E, Part 22H, Part 27, Part 90, FCC Part  
96, Part 96.47 (2023)

FCC ID: 2AANY-ER815NRQ3

|   |  |
|---|--|
| Prepared by Simon Wang<br>Engineer / Mobile Department  | Approved by Luke Lu<br>Manager / Mobile Department   |
| <br>Date: Dec. 16, 2024  | <br>Date: Dec. 16, 2024 |
| <small>This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <a href="http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/">http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/</a> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.</small> |  |

## CONTENTS

|   |    |
|---|----|
| 1. GENERAL INFORMATION .....  | 3  |
| 2. DESCRIPTION OF THE EQUIPMENT UNDER TEST .....                          | 4  |
| 3. REFERENCE SPECIFICATION .....  | 21 |
| 4. KEY TO NOTES AND RESULT CODES .....                                    | 21 |
| 5. RESULT SUMMARY .....   | 22 |
| 6. TEST RESULT .....  | 23 |
| 6.1 RF POWER OUTPUT .....   | 23 |
| 6.2 EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER ..... | 24 |
| 6.3 OCCUPIED BANDWIDTH .....  | 26 |
| 6.4 EMISSION BANDWIDTH .....  | 27 |
| 6.5 PEAK-AVERAGE RATIO .....  | 28 |
| 6.6 SPURIOUS EMISSIONS AT ANTENNA TERMINAL .....                          | 29 |
| 6.7 BAND EDGES COMPLIANCE .....   | 30 |
| 6.8 FREQUENCY STABILITY .....   | 33 |
| 6.9 RADIATED SPURIOUS EMISSIONS .....                                     | 34 |
| 6.10 END USER DEVICE ADDITIONAL REQUIREMENTS .....                        | 36 |
| 7. MEASUREMENT UNCERTAINTIES .....  | 37 |
| 8. TEST EQUIPMENTS .....  | 38 |
| APPENDIX A – TEST DATA OF CONDUCTED EMISSION .....                        | 38 |
| APPENDIX B – TEST DATA OF RADIATED EMISSION .....                         | 38 |



## **1. GENERAL INFORMATION**

### **1.1 Notes of the test report**

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission. The test results relate only to individual items of the samples which have been tested. The certification and accreditation identifiers used in this report shall not be applicable to the tested or calibrated samples thereof. The manufacturer shall not mark the tested samples or items (or a separate part of the item) with the identifiers of certification and accreditation to mislead relevant parties about the tested samples or items.

### **1.2 Information about the testing laboratory**

|                      |  |
|----------------------|--|
| Company:             | BV 7Layers Communications Technology (Shenzhen) Co., Ltd   |
| Address:             | Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District Shenzhen, Guangdong, People's Republic of China |
| City:                | Shenzhen   |
| Country or Region:   | P.R.China  |
| Tel:                 | +86 755 8869 6566  |
| Fax:                 | +86 755 8869 6577  |
| Email:               | customerservice.sw@bureauveritas.com   |
| Designation Number:  | CN1171   |
| Registration number: | 525120   |

### **1.3 Applicant's details**

|                    |  |
|--------------------|--|
| Company:           | Beijing InHand Networks Technology Co., Ltd.                                   |
| Address:           | Room 501, floor 5, building 3, yard 18, ziyue road, chaoyang district, Beijing |
| City:              | Beijing  |
| Country or Region: | China  |
| Contacted person:  | GuJichi  |
| Tel:               | 15281366255  |
| Email:             | gujc@inhand.com.cn   |

### **1.4 Manufacturer's details**

|                    |  |
|--------------------|--|
| Company:           | Beijing InHand Networks Technology Co., Ltd.                                   |
| Address:           | Room 501, floor 5, building 3, yard 18, ziyue road, chaoyang district, Beijing |
| City:              | Beijing  |
| Country or Region: | China  |
| Contacted person:  | GuJichi  |
| Tel:               | 15281366255  |
| Email:             | gujc@inhand.com.cn   |



## 1.5 Test Environment

|                                 |            |
|---------------------------------|------------|
| Date of Receipt of test sample: | 2024/11/27 |
| Testing Start Date:             | 2024/11/28 |
| Testing End Date:               | 2024/12/16 |

|                     |                  |              |
|---------------------|------------------|--------------|
| Environmental Data: | Temperature (°C) | Humidity (%) |
| Ambient             | 25               | 40           |
| Maximum Extreme     | 50               | ---          |
| Minimum Extreme     | -10              | ---          |

|  |    |
|--|----|
| Normal Supply Voltage (V d.c.):          | 12 |
| Maximum Extreme Supply Voltage (V d.c.): | 15 |
| Minimum Extreme Supply Voltage (V d.c.): | 9  |

## 2. DESCRIPTION OF THE EQUIPMENT UNDER TEST

### 2.1 Final Equipment Build Status

|                                       |   |
|---------------------------------------|---|
| Frequency Range:                      | n2: Tx:1850~1910 MHz Rx:1930~1990 MHz<br>n5: Tx: 824~849 MHz Rx:869~894 MHz<br>n7: Tx:2500~2570 MHz Rx:2620~2690 MHz<br>n12: Tx: 699~716 MHz Rx:729~746 MHz<br>n13: Tx: 777~787 MHz Rx:746~756 MHz<br>n14: Tx: 788~798 MHz Rx:758~768 MHz<br>n25: Tx: 1850~1915 MHz Rx:1930~1995 MHz<br>n26: Tx: 814~849 MHz Rx:859~894 MHz<br>n30: Tx: 2305~2315 MHz Rx:2350~2360 MHz<br>n38: Tx: 2570~2620 MHz Rx:2570~2620 MHz<br>n41: Tx:2496~2690 MHz Rx: 2496~2690 MHz<br>n48: Tx: 3550~3700 MHz Rx:3550~3700 MHz<br>n66: Tx:1710~1780 MHz Rx:1995~2020 MHz<br>n70: Tx: 1695~1710 MHz Rx:617~652 MHz<br>n71: Tx: 663~698 MHz Rx:617~652 MHz<br>n77: Tx: 3450~3550 MHz Rx:3450~3550 MHz<br>3700~3980 MHz Rx:3700~3980 MHz<br>n78: Tx: 3450~3550 MHz Rx:3450~3800 MHz<br>3700~3800 MHz Rx:3700~3800 MHz |
| Frequency Range:(CA)                  | UL: n25A-n41A;n41A-n66A;n41A-n71A;n7A-n78A;n5A-n78An66A-n78A:n7A-n77A:n2A-n77A:n5A-n77A:n66A-n77An30A-n77A;n71A-n77A:n71A-n78A:n25A-n78A:n38A-n66An25A-n77A;n25A-n38A;n13A-n77A; n2A-n41A   |
| Single band single SCS single carrier | n2/n5/n7/n12/ n13/n14/n25/ n26/n30/ n38/n41/n48/n66/ n70/n71/n77/n78  |



|                                |   |                   |                    |
|--------------------------------|---|-------------------|--------------------|
| Single band single<br>SCS HPUE | n41/n77/n78   |                   |                    |
| SA Bandwidth                   | n2: 5MHz/ 10MHz/ 15MHz/ 20MHz<br>n5: 5MHz/ 10MHz/ 15MHz/ 20MHz<br>n7: 5MHz/ 10MHz/ 15MHz/ 20MHz/ 25MHz/ 30MHz/ 40MHz<br>n12: 5MHz/ 10MHz/ 15MHz<br>n13: 5MHz/ 10MHz<br>n14: 5MHz/ 10MHz<br>n25: 5MHz/ 10MHz/ 15MHz/ 20MHz/ 25MHz/ 30MHz/ 40MHz<br>n26: 5MHz/ 10MHz/ 15MHz/ 20MHz<br>n30: 5MHz/ 10MHz<br>n38: 10MHz/ 15MHz/ 20MHz/ 30MHz/ 40MHz<br>n41: 20MHz/ 30MHz/ 40MHz/ 50MHz/ 60MHz/ 70MHz/ 80MHz/ 90MHz/ 100MHz<br>n48: 10MHz/ 20MHz/ 30MHz/ 40MHz<br>n66: 5MHz/ 10MHz/ 15MHz/ 20MHz/ 30MHz/ 40MHz<br>n70: 5MHz/ 10MHz/ 15MHz<br>n71: 5MHz/ 10MHz/ 15MHz/ 20MHz<br>n77: 10MHz/ 15MHz/ 20MHz/ 30MHz/ 40MHz/ 50MHz/ 60MHz/70MHz/ 80MHz/90MHz/100MHz<br>n78: 10MHz/ 15MHz/20MHz/ 30MHz/ 40MHz/ 50MHz/ 60MHz/ 70MHz/ 80MHz/ 90MHz/ 100MHz |                   |                    |
| NSA Band                       | See note2   |                   |                    |
| Modulation Type:               | PI/2 BPSK, QPSK,16QAM,64QAM,256QAM  |                   |                    |
| Antenna Type:                  | External antenna  |                   |                    |
| Antenna Gain:                  | n2: 2.74dBi(Max)  | n5: 2.52dBi(Max)  | n7: 3.05dBi(Max)   |
|                                | n12: 1.80dBi(Max)   | n13: 1.83dBi(Max) | n14: 2.14dBi(Max)  |
|                                | n25: 2.74dBi(Max)   | n26: 2.52dBi(Max) | n30: -0.68dBi(Max) |
|                                | n38: 2.86dBi(Max)   | n41: 3.05dBi(Max) | n48: 0.14dBi(Max)  |
|                                | n66: 3.18dBi(Max)   | n70:2.74dBi(Max)  | n71: 1.80dBi(Max)  |
|                                | n77:2.74dBi(Max)  | n78: 2.74dBi(Max) |                    |
|                                | ERP = EIRP(Power +Gain) – 2.15 (dB)   |                   |                    |
| Power Supply:                  | DC supply   |                   |                    |
| Software Revision:             | V2.0  |                   |                    |
| Hardware Revision:             | V1.1  |                   |                    |
| IMEI/SN:                       | 867922070005233   |                   |                    |

**Note1:** Test Model No.: ER815-NRQ3-WLAN  
Series Model:

These models are the same in these: appearance, PCB layout and basic software function;  
The only difference is that the products are used in different markets.



**Note2:**

NSA Band

|             |             |             |             |             |
|-------------|-------------|-------------|-------------|-------------|
| DC_13A_n66A | DC_66A_n71A | DC_13A_n2A  | DC_66A_n41A | DC_66A_n30A |
| DC_5A_n2A   | DC_66A_n25A | DC_7A_n66A  | DC_2A_n7A   | DC_71A_n7A  |
| DC_14A_n2A  | DC_25A_n41A | DC_4A_n78A  | DC_7A_n2A   | DC_7A_n12A  |
| DC_30A_n2A  | DC_12A_n78A | DC_20A_n77A | DC_5A_n40A  | DC_5A_n77A  |
| DC_2A_n5A   | DC_13A_n78A | DC_5A_n78A  | DC_30A_n77A | DC_66A_n77A |
| DC_30A_n5A  | DC_25A_n78A | DC_4A_n41A  | DC_41A_n77A | DC_71A_n77A |
| DC_66A_n5A  | DC_12A_n77A | DC_66A_n38A | DC_7A_n78A  | DC_4A_n2A   |
| DC_2A_n12A  | DC_13A_n77A | DC_2A_n38A  | DC_66A_n28A | DC_7A_n25A  |
| DC_66A_n12A | DC_14A_n77A | DC_12A_n38A | DC_71A_n41A | DC_71A_n25A |
| DC_2A_n66A  | DC_26A_n78A | DC_4A_n38A  | DC_28A_n66A | DC_5A_n25A  |
| DC_5A_n66A  | DC_2A_n78A  | DC_5A_n38A  | DC_30A_n12A | DC_26A_n25A |
| DC_12A_n66A | DC_26A_n41A | DC_66A_n78A | DC_2A_n14A  | DC_4A_n7A   |
| DC_14A_n66A | DC_2A_n41A  | DC_12A_n25A | DC_30A_n14A | DC_13A_n25A |
| DC_30A_n66A | DC_7A_n5A   | DC_25A_n77A | DC_66A_n14A | DC_7A_n77A  |
| DC_12A_n2A  | DC_38A_n78A | DC_2A_n77A  | DC_2A_n30A  | DC_12A_n7A  |
| DC_66A_n2A  | DC_7A_n71A  | DC_71A_n78A | DC_5A_n30A  | DC_66A_n7A  |
| DC_71A_n2A  | DC_41A_n78A | DC_71A_n38A | DC_12A_n30A | DC_5A_n41A  |
| DC_12A_n41A | DC_5A_n7A   | DC_13A_n7A  | DC_14A_n30A | DC_71A_n66A |
| DC_2A_n71A  |             |             |             |             |

Note: The combination of the above frequency bands is not the worst case, and the evaluated data for the relevant individual frequency bands are shown in Appendix A. Therefore, data for the CA frequency band will not be displayed

## 2.2 Support Equipment

NA

**Note3:** This product uses the module model RM520N-GL and supports NR frequency bands 2/5/7/12/13/14/25/26/30/38/41/48/66/70/71/77/78. Therefore, for this product, we referred to the test data reported by the RM520N-GL module and reevaluated the spectrum of radiated emissions and EIRP.

For module RM520N-GL: Report No.: SEWM2304000122RG02

FCC ID: XMR2023RM520NGL

**Note4:** The manufacturer asks to reverify the manufacturer B48, Therefore, we tested the B48 frequency band of the entire machine, and the data for other frequency bands and Part 96.47 came from the module report.



## 2.3 Test Frequencies

### Reference test frequencies for NR operating band n2

Test frequencies for NR operating band n2 and SCS 15 kHz

| CBW [MHz] | Range    |      | Carrier centre [MHz] | Carrier centre [ARFCN] | SS block SCS [kHz] |
|-----------|----------|------|----------------------|------------------------|--------------------|
| 5         | Downlink | Low  | 1932.5               | 386500                 | 15                 |
|           |          | Mid  | 1960                 | 392000                 |                    |
|           |          | High | 1987.5               | 397500                 |                    |
|           | Uplink   | Low  | 1852.5               | 370500                 | -                  |
|           |          | Mid  | 1880                 | 376000                 |                    |
|           |          | High | 1907.5               | 381500                 |                    |
| 10        | Downlink | Low  | 1935                 | 387000                 | 15                 |
|           |          | Mid  | 1960                 | 392000                 |                    |
|           |          | High | 1985                 | 397000                 |                    |
|           | Uplink   | Low  | 1855                 | 371000                 | -                  |
|           |          | Mid  | 1880                 | 376000                 |                    |
|           |          | High | 1905                 | 381000                 |                    |
| 15        | Downlink | Low  | 1937.5               | 387500                 | 15                 |
|           |          | Mid  | 1960                 | 392000                 |                    |
|           |          | High | 1982.5               | 396500                 |                    |
|           | Uplink   | Low  | 1857.5               | 371500                 | -                  |
|           |          | Mid  | 1880                 | 376000                 |                    |
|           |          | High | 1902.5               | 380500                 |                    |
| 20        | Downlink | Low  | 1940                 | 388000                 | 15                 |
|           |          | Mid  | 1960                 | 392000                 |                    |
|           |          | High | 1980                 | 396000                 |                    |
|           | Uplink   | Low  | 1860                 | 372000                 | -                  |
|           |          | Mid  | 1880                 | 376000                 |                    |
|           |          | High | 1900                 | 380000                 |                    |

### Reference test frequencies for NR operating band n5

Test frequencies for NR operating band n5 and SCS 15 kHz

| CBW [MHz] | Range    |      | Carrier centre [MHz] | Carrier centre [ARFCN] | SS block SCS [kHz] |
|-----------|----------|------|----------------------|------------------------|--------------------|
| 5         | Downlink | Low  | 871.5                | 174300                 | 15                 |
|           |          | Mid  | 881.5                | 176300                 |                    |
|           |          | High | 891.5                | 178300                 |                    |
|           | Uplink   | Low  | 826.5                | 165300                 | -                  |
|           |          | Mid  | 836.5                | 167300                 |                    |
|           |          | High | 846.5                | 169300                 |                    |
| 10        | Downlink | Low  | 874                  | 174800                 | 15                 |
|           |          | Mid  | 881.5                | 176300                 |                    |
|           |          | High | 889                  | 177800                 |                    |
|           | Uplink   | Low  | 829                  | 165800                 | -                  |
|           |          | Mid  | 836.5                | 167300                 |                    |
|           |          | High | 844                  | 168800                 |                    |
| 15        | Downlink | Low  | 876.5                | 175300                 | 15                 |
|           |          | Mid  | 881.5                | 176300                 |                    |
|           |          | High | 886.5                | 177300                 |                    |
|           | Uplink   | Low  | 831.5                | 166300                 | -                  |
|           |          | Mid  | 836.5                | 167300                 |                    |
|           |          | High | 841.5                | 168300                 |                    |
| 20        | Downlink | Low  | 879                  | 175800                 | 15                 |
|           |          | Mid  | 881.5                | 176300                 |                    |
|           |          | High | 884                  | 176800                 |                    |
|           | Uplink   | Low  | 834                  | 166800                 | -                  |
|           |          | Mid  | 836.5                | 167300                 |                    |
|           |          | High | 839                  | 167800                 |                    |



## Reference test frequencies for NR operating band n7

### Test frequencies for NR operating band n7 and SCS 15 kHz

| Bandwidth<br>[MHz] | Range    |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------------|----------|------|----------------------------|------------------------------|-----------------------|
| 5                  | Downlink | Low  | 2622.5                     | 524500                       | 15                    |
|                    |          | Mid  | 2655                       | 531000                       |                       |
|                    |          | High | 2687.5                     | 537500                       |                       |
|                    | Uplink   | Low  | 2502.5                     | 500500                       | --                    |
|                    |          | Mid  | 2535                       | 507000                       |                       |
|                    |          | High | 2567.5                     | 513500                       |                       |
| 10                 | Downlink | Low  | 2625                       | 525000                       | 15                    |
|                    |          | Mid  | 2655                       | 531000                       |                       |
|                    |          | High | 2685                       | 537000                       |                       |
|                    | Uplink   | Low  | 2505                       | 501000                       | --                    |
|                    |          | Mid  | 2535                       | 507000                       |                       |
|                    |          | High | 2565                       | 513000                       |                       |
| 15                 | Downlink | Low  | 2627.5                     | 525500                       | 15                    |
|                    |          | Mid  | 2655                       | 531000                       |                       |
|                    |          | High | 2682.5                     | 536500                       |                       |
|                    | Uplink   | Low  | 2507.5                     | 501500                       | --                    |
|                    |          | Mid  | 2535                       | 507000                       |                       |
|                    |          | High | 2562.5                     | 512500                       |                       |
| 20                 | Downlink | Low  | 2630                       | 526000                       | 15                    |
|                    |          | Mid  | 2655                       | 531000                       |                       |
|                    |          | High | 2680                       | 536000                       |                       |
|                    | Uplink   | Low  | 2510                       | 502000                       | --                    |
|                    |          | Mid  | 2535                       | 507000                       |                       |
|                    |          | High | 2560                       | 512000                       |                       |
| 25                 | Downlink | Low  | 2632.5                     | 526500                       | 15                    |
|                    |          | Mid  | 2655                       | 531000                       |                       |
|                    |          | High | 2677.5                     | 535500                       |                       |
|                    | Uplink   | Low  | 2512.5                     | 502500                       | --                    |
|                    |          | Mid  | 2535                       | 507000                       |                       |
|                    |          | High | 2557.5                     | 511500                       |                       |
| 30                 | Downlink | Low  | 2635                       | 52700                        | 15                    |
|                    |          | Mid  | 2655                       | 531000                       |                       |
|                    |          | High | 2675                       | 535000                       |                       |
|                    | Uplink   | Low  | 2515                       | 503000                       | --                    |
|                    |          | Mid  | 2535                       | 507000                       |                       |
|                    |          | High | 2555                       | 511000                       |                       |
| 40                 | Downlink | Low  | 2640                       | 528000                       | 15                    |
|                    |          | Mid  | 2655                       | 531000                       |                       |
|                    |          | High | 2670                       | 534000                       |                       |
|                    | Uplink   | Low  | 2520                       | 504000                       | --                    |
|                    |          | Mid  | 2535                       | 507000                       |                       |
|                    |          | High | 2550                       | 510000                       |                       |



**Reference test frequencies for NR operating band n12**

Test frequencies for NR operating band n12 and SCS 15 kHz

| Bandwidth [MHz] | Range    |      | Carrier centre [MHz] | Carrier centre [ARFCN] | SS block SCS [kHz] |
|-----------------|----------|------|----------------------|------------------------|--------------------|
| 5               | Downlink | Low  | 731.5                | 146300                 | 15                 |
|                 |          | Mid  | 737.5                | 147500                 |                    |
|                 |          | High | 743.5                | 148700                 |                    |
|                 | Uplink   | Low  | 701.5                | 140300                 | --                 |
|                 |          | Mid  | 707.5                | 141500                 |                    |
|                 |          | High | 713.5                | 142700                 |                    |
| 10              | Downlink | Low  | 734                  | 146800                 | 15                 |
|                 |          | Mid  | 737.5                | 147500                 |                    |
|                 |          | High | 741                  | 148200                 |                    |
|                 | Uplink   | Low  | 704                  | 140800                 | --                 |
|                 |          | Mid  | 707.5                | 141500                 |                    |
|                 |          | High | 711                  | 142200                 |                    |
| 15              | Downlink | Low  | 736.5                | 147300                 | 15                 |
|                 |          | Mid  | 737.5                | 147500                 |                    |
|                 |          | High | 738.5                | 147700                 |                    |
|                 | Uplink   | Low  | 706.5                | 141300                 | --                 |
|                 |          | Mid  | 707.5                | 141500                 |                    |
|                 |          | High | 708.5                | 141700                 |                    |

**Reference test frequencies for NR operating band n13**

Test frequencies for NR operating band n13 and SCS 15 kHz

| Bandwidth [MHz] | Range    |      | Carrier centre [MHz] | Carrier centre [ARFCN] | SS block SCS [kHz] |
|-----------------|----------|------|----------------------|------------------------|--------------------|
| 5               | Downlink | Low  | 748.5                | 149700                 | 15                 |
|                 |          | Mid  | 751                  | 150200                 |                    |
|                 |          | High | 753.5                | 150700                 |                    |
|                 | Uplink   | Low  | 779.5                | 155900                 | --                 |
|                 |          | Mid  | 782                  | 156400                 |                    |
|                 |          | High | 784.5                | 156900                 |                    |
| 10              | Downlink | Low  | /                    | /                      | 15                 |
|                 |          | Mid  | 751                  | 150200                 |                    |
|                 |          | High | /                    | /                      |                    |
|                 | Uplink   | Low  | /                    | /                      | --                 |
|                 |          | Mid  | 782                  | 156400                 |                    |
|                 |          | High | /                    | /                      |                    |

**Reference test frequencies for NR operating band n14**

Test frequencies for NR operating band n14 and SCS 15 kHz

| Bandwidth [MHz] | Range    |      | Carrier centre [MHz] | Carrier centre [ARFCN] | SS block SCS [kHz] |
|-----------------|----------|------|----------------------|------------------------|--------------------|
| 5               | Downlink | Low  | 760.5                | 151200                 | 15                 |
|                 |          | Mid  | 763                  | 152600                 |                    |
|                 |          | High | 765.5                | 153100                 |                    |
|                 | Uplink   | Low  | 790.5                | 158100                 | --                 |
|                 |          | Mid  | 793                  | 158600                 |                    |
|                 |          | High | 795.5                | 159100                 |                    |
| 10              | Downlink | Low  | /                    | /                      | 15                 |
|                 |          | Mid  | 793                  | 158600                 |                    |
|                 |          | High | /                    | /                      |                    |
|                 |          | Low  | /                    | /                      |                    |
|                 |          | Mid  | 793                  | 158600                 |                    |



|  |        |      |   |   |    |
|--|--------|------|---|---|----|
|  | Uplink | High | / | / | -- |
|--|--------|------|---|---|----|

## Reference test frequencies for NR operating band n25

Test frequencies for NR operating band n25 and SCS 15 kHz

| CBW<br>[MHz] | Range    |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|------|----------------------------|------------------------------|-----------------------|
| 5            | Downlink | Low  | 1932.5                     | 386500                       | 15                    |
|              |          | Mid  | 1962.5                     | 392500                       |                       |
|              |          | High | 1992.5                     | 398500                       |                       |
|              | Uplink   | Low  | 1852.5                     | 370500                       | -                     |
|              |          | Mid  | 1882.5                     | 376500                       |                       |
|              |          | High | 1912.5                     | 382500                       |                       |
| 10           | Downlink | Low  | 1935                       | 387000                       | 15                    |
|              |          | Mid  | 1962.5                     | 392500                       |                       |
|              |          | High | 1990                       | 398000                       |                       |
|              | Uplink   | Low  | 1855                       | 371000                       | -                     |
|              |          | Mid  | 1882.5                     | 376500                       |                       |
|              |          | High | 1910                       | 382000                       |                       |
| 15           | Downlink | Low  | 1937.5                     | 387500                       | 15                    |
|              |          | Mid  | 1962.5                     | 392500                       |                       |
|              |          | High | 1987.5                     | 397500                       |                       |
|              | Uplink   | Low  | 1857.5                     | 371500                       | -                     |
|              |          | Mid  | 1882.5                     | 376500                       |                       |
|              |          | High | 1907.5                     | 381500                       |                       |
| 20           | Downlink | Low  | 1940                       | 388000                       | 15                    |
|              |          | Mid  | 1962.5                     | 392500                       |                       |
|              |          | High | 1985                       | 397000                       |                       |
|              | Uplink   | Low  | 1860                       | 372000                       | -                     |
|              |          | Mid  | 1882.5                     | 376500                       |                       |
|              |          | High | 1905                       | 381000                       |                       |
| 25           | Downlink | Low  | 1942.5                     | 388500                       | 15                    |
|              |          | Mid  | 1962.5                     | 392500                       |                       |
|              |          | High | 1982.5                     | 396500                       |                       |
|              | Uplink   | Low  | 1862.5                     | 372500                       | -                     |
|              |          | Mid  | 1882.5                     | 376500                       |                       |
|              |          | High | 1902.5                     | 380500                       |                       |
| 30           | Downlink | Low  | 1945                       | 389000                       | 15                    |
|              |          | Mid  | 1962.5                     | 392500                       |                       |
|              |          | High | 1980                       | 396000                       |                       |
|              | Uplink   | Low  | 1865                       | 373000                       | -                     |
|              |          | Mid  | 1882.5                     | 376500                       |                       |
|              |          | High | 1900                       | 380000                       |                       |
| 40           | Downlink | Low  | 1950                       | 390000                       | 15                    |
|              |          | Mid  | 1962.5                     | 392500                       |                       |
|              |          | High | 1975                       | 395000                       |                       |
|              | Uplink   | Low  | 1870                       | 374000                       | -                     |
|              |          | Mid  | 1882.5                     | 376500                       |                       |
|              |          | High | 1895                       | 379000                       |                       |



## Reference test frequencies for NR operating band n26

Test frequencies for NR operating band n26 and SCS 15 kHz

### 814-824:

| CBW<br>[MHz] | Range    |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|------|----------------------------|------------------------------|-----------------------|
| 5            | Downlink | Low  | 861.5                      | 172300                       | 15                    |
|              |          | Mid  | 864                        | 172800                       |                       |
|              |          | High | 866.5                      | 173300                       |                       |
|              | Uplink   | Low  | 816.5                      | 163300                       | -                     |
|              |          | Mid  | 819                        | 163800                       |                       |
|              |          | High | 821.5                      | 164300                       |                       |
| 10           | Downlink | Low  | /                          | /                            | 15                    |
|              |          | Mid  | 864                        | 172800                       |                       |
|              |          | High | /                          | /                            |                       |
|              | Uplink   | Low  | /                          | /                            | -                     |
|              |          | Mid  | 819                        | 163800                       |                       |
|              |          | High | /                          | /                            |                       |

### 824-849:

| CBW<br>[MHz] | Range    |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|------|----------------------------|------------------------------|-----------------------|
| 5            | Downlink | Low  | 871.5                      | 174300                       | 15                    |
|              |          | Mid  | 881.5                      | 176300                       |                       |
|              |          | High | 891.5                      | 178300                       |                       |
|              | Uplink   | Low  | 826.5                      | 165300                       | -                     |
|              |          | Mid  | 836.5                      | 167300                       |                       |
|              |          | High | 846.5                      | 169300                       |                       |
| 10           | Downlink | Low  | 874                        | 174800                       | 15                    |
|              |          | Mid  | 881.5                      | 176300                       |                       |
|              |          | High | 889                        | 177800                       |                       |
|              | Uplink   | Low  | 829                        | 165800                       | -                     |
|              |          | Mid  | 836.5                      | 167300                       |                       |
|              |          | High | 844                        | 168800                       |                       |
| 15           | Downlink | Low  | 876.5                      | 175300                       | 15                    |
|              |          | Mid  | 881.5                      | 176300                       |                       |
|              |          | High | 886.5                      | 177300                       |                       |
|              | Uplink   | Low  | 831.5                      | 166300                       | -                     |
|              |          | Mid  | 836.5                      | 167300                       |                       |
|              |          | High | 841.5                      | 168300                       |                       |
| 20           | Downlink | Low  | 879                        | 175800                       | 15                    |
|              |          | Mid  | 881.5                      | 176300                       |                       |
|              |          | High | 884                        | 176800                       |                       |
|              | Uplink   | Low  | 834                        | 166800                       | -                     |
|              |          | Mid  | 836.5                      | 167300                       |                       |
|              |          | High | 839                        | 167800                       |                       |



### Reference test frequencies for NR operating band n30

Test frequencies for NR operating band n30 and SCS 15 kHz

| CBW [MHz] | Range    |      | Carrier centre [MHz] | Carrier centre [ARFCN] | SS block SCS [kHz] |
|-----------|----------|------|----------------------|------------------------|--------------------|
| 5         | Downlink | Low  | 2352.5               | 470500                 | 15                 |
|           |          | Mid  | 2355                 | 471000                 |                    |
|           |          | High | 2357.5               | 471500                 |                    |
|           | Uplink   | Low  | 2307.5               | 461500                 | -                  |
|           |          | Mid  | 2310                 | 462000                 |                    |
|           |          | High | 2312.5               | 462500                 |                    |
| 10        | Downlink | Low  | 2355                 | 471000                 | 15                 |
|           |          | Mid  | 2355                 | 471000                 |                    |
|           |          | High | 2355                 | 471000                 |                    |
|           | Uplink   | Low  | 2310                 | 462000                 | -                  |
|           |          | Mid  | 2310                 | 462000                 |                    |
|           |          | High | 2310                 | 462000                 |                    |

### Reference test frequencies for NR operating band n38

Test frequencies for NR operating band n38 and SCS 30 kHz

| Bandwidth [MHz] | Range             |      | Carrier centre [MHz] | Carrier centre [ARFCN] | SS block SCS [kHz] |
|-----------------|-------------------|------|----------------------|------------------------|--------------------|
| 10              | Downlink & Uplink | Low  | 2575                 | 515000                 | 30                 |
|                 |                   | Mid  | 2595                 | 519000                 |                    |
|                 |                   | High | 2615                 | 523000                 |                    |
| 15              | Downlink & Uplink | Low  | 2577.5               | 515500                 | 30                 |
|                 |                   | Mid  | 2595                 | 519000                 |                    |
|                 |                   | High | 2612.5               | 522500                 |                    |
| 20              | Downlink & Uplink | Low  | 2580                 | 516000                 | 30                 |
|                 |                   | Mid  | 2595                 | 519000                 |                    |
|                 |                   | High | 2610                 | 522000                 |                    |
| 30              | Downlink & Uplink | Low  | 2585                 | 517000                 | 30                 |
|                 |                   | Mid  | 2595                 | 519000                 |                    |
|                 |                   | High | 2605                 | 521000                 |                    |
| 40              | Downlink & Uplink | Low  | 2590                 | 518000                 | 30                 |
|                 |                   | Mid  | 2595                 | 519000                 |                    |
|                 |                   | High | 2600                 | 520000                 |                    |



## Reference test frequencies for NR operating band n41

Test frequencies for NR operating band n41 and SCS 30 kHz

| CBW<br>[MHz] | Range                   |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|-------------------------|------|----------------------------|------------------------------|-----------------------|
| 20           | Downlink<br>&<br>Uplink | Low  | 2506.02                    | 501204                       | 30                    |
|              |                         | Mid  | 2592.99                    | 518598                       |                       |
|              |                         | High | 2670                       | 534000                       |                       |
| 30           | Downlink<br>&<br>Uplink | Low  | 2511                       | 502200                       | 30                    |
|              |                         | Mid  | 2592.99                    | 518598                       |                       |
|              |                         | High | 2675                       | 535000                       |                       |
| 40           | Downlink<br>&<br>Uplink | Low  | 2516.01                    | 503202                       | 30                    |
|              |                         | Mid  | 2592.99                    | 518598                       |                       |
|              |                         | High | 2670                       | 534000                       |                       |
| 50           | Downlink<br>&<br>Uplink | Low  | 2521.02                    | 504204                       | 30                    |
|              |                         | Mid  | 2592.99                    | 518598                       |                       |
|              |                         | High | 2664.99                    | 532998                       |                       |
| 60           | Downlink<br>&<br>Uplink | Low  | 2526                       | 505200                       | 30                    |
|              |                         | Mid  | 2592.99                    | 518598                       |                       |
|              |                         | High | 2659.98                    | 531996                       |                       |
| 70           | Downlink<br>&<br>Uplink | Low  | 2531                       | 506200                       | 30                    |
|              |                         | Mid  | 2592.29                    | 518598                       |                       |
|              |                         | High | 2655                       | 531000                       |                       |
| 80           | Downlink<br>&<br>Uplink | Low  | 2536.02                    | 507204                       | 30                    |
|              |                         | Mid  | 2592.99                    | 518598                       |                       |
|              |                         | High | 2649.99                    | 529998                       |                       |
| 90           | Downlink<br>&<br>Uplink | Low  | 2541                       | 508200                       | 30                    |
|              |                         | Mid  | 2592.99                    | 518598                       |                       |
|              |                         | High | 2644.98                    | 528996                       |                       |
| 100          | Downlink<br>&<br>Uplink | Low  | 2546.01                    | 509202                       | 30                    |
|              |                         | Mid  | 2592.99                    | 518598                       |                       |
|              |                         | High | 2640                       | 528000                       |                       |



## Reference test frequencies for NR operating band n48

Test frequencies for NR operating band n48 and SCS 30 kHz

**3550-3700:**

| CBW<br>[MHz] | Range                   |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|-------------------------|------|----------------------------|------------------------------|-----------------------|
| 10           | Downlink<br>&<br>Uplink | Low  | 3555                       | 637000                       | 30                    |
|              |                         | Mid  | 3624.99                    | 641666                       |                       |
|              |                         | High | 3694.98                    | 646332                       |                       |
| 20           | Downlink<br>&<br>Uplink | Low  | 3560.01                    | 637334                       | 30                    |
|              |                         | Mid  | 3624.99                    | 641666                       |                       |
|              |                         | High | 3690                       | 646000                       |                       |
| 30           | Downlink<br>&<br>Uplink | Low  | 3565.02                    | 637668                       | 30                    |
|              |                         | Mid  | 3624.99                    | 641666                       |                       |
|              |                         | High | 3684.99                    | 645666                       |                       |
| 40           | Downlink<br>&<br>Uplink | Low  | 3570                       | 638000                       | 30                    |
|              |                         | Mid  | 3624.99                    | 641666                       |                       |
|              |                         | High | 3679.98                    | 645332                       |                       |



## Reference test frequencies for NR operating band n66

Test frequencies for NR operating band n66 and SCS 15 kHz

| CBW<br>[MHz] | Range    |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|------|----------------------------|------------------------------|-----------------------|
| 5            | Downlink | Low  | 2112.5                     | 422500                       | 15                    |
|              |          | Mid  | 2155                       | 431000                       |                       |
|              |          | High | 2197.5                     | 439500                       |                       |
|              | Uplink   | Low  | 1712.5                     | 342500                       | -                     |
|              |          | Mid  | 1745                       | 349000                       |                       |
|              |          | High | 1777.5                     | 355500                       |                       |
| 10           | Downlink | Low  | 2115                       | 423000                       | 15                    |
|              |          | Mid  | 2155                       | 431000                       |                       |
|              |          | High | 2195                       | 439000                       |                       |
|              | Uplink   | Low  | 1715                       | 343000                       | -                     |
|              |          | Mid  | 1745                       | 349000                       |                       |
|              |          | High | 1775                       | 355000                       |                       |
| 15           | Downlink | Low  | 2117.5                     | 423500                       | 15                    |
|              |          | Mid  | 2155                       | 431000                       |                       |
|              |          | High | 2192.5                     | 438500                       |                       |
|              | Uplink   | Low  | 1717.5                     | 343500                       | -                     |
|              |          | Mid  | 1745                       | 349000                       |                       |
|              |          | High | 1772.5                     | 354500                       |                       |
| 20           | Downlink | Low  | 2120                       | 424000                       | 15                    |
|              |          | Mid  | 2155                       | 431000                       |                       |
|              |          | High | 2190                       | 438000                       |                       |
|              | Uplink   | Low  | 1720                       | 344000                       | -                     |
|              |          | Mid  | 1745                       | 349000                       |                       |
|              |          | High | 1770                       | 354000                       |                       |
| 30           | Downlink | Low  | 2125                       | 425000                       | 15                    |
|              |          | Mid  | 2155                       | 431000                       |                       |
|              |          | High | 2185                       | 437000                       |                       |
|              | Uplink   | Low  | 1725                       | 345000                       | -                     |
|              |          | Mid  | 1745                       | 349000                       |                       |
|              |          | High | 1765                       | 353000                       |                       |
| 40           | Downlink | Low  | 2130                       | 426000                       | 15                    |
|              |          | Mid  | 2155                       | 431000                       |                       |
|              |          | High | 2180                       | 436000                       |                       |
|              | Uplink   | Low  | 1730                       | 346000                       | -                     |
|              |          | Mid  | 1745                       | 349000                       |                       |
|              |          | High | 1760                       | 352000                       |                       |



## Reference test frequencies for NR operating band n70

Test frequencies for NR operating band n70 and SCS 15 kHz

| Bandwidth<br>[MHz] | Range    |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------------|----------|------|----------------------------|------------------------------|-----------------------|
| 5                  | Downlink | Low  | 1997.5                     | 399500                       | 15                    |
|                    |          | Mid  | 2002.5                     | 400500                       |                       |
|                    |          | High | 2007.5                     | 401500                       |                       |
|                    | Uplink   | Low  | 1697.5                     | 339500                       | --                    |
|                    |          | Mid  | 1702.5                     | 340500                       |                       |
|                    |          | High | 1707.7                     | 341500                       |                       |
| 10                 | Downlink | Low  | 2000                       | 400000                       | 15                    |
|                    |          | Mid  | 2002.5                     | 400500                       |                       |
|                    |          | High | 2005                       | 401000                       |                       |
|                    | Uplink   | Low  | 1700                       | 340000                       | --                    |
|                    |          | Mid  | 1702.5                     | 340500                       |                       |
|                    |          | High | 1705                       | 341000                       |                       |
| 15                 | Downlink | Low  | /                          | /                            | 15                    |
|                    |          | Mid  | 2002.5                     | 400500                       |                       |
|                    |          | High | /                          | /                            |                       |
|                    | Uplink   | Low  | /                          | /                            | --                    |
|                    |          | Mid  | 1702.5                     | 340500                       |                       |
|                    |          | High | /                          | /                            |                       |

## Reference test frequencies for NR operating band n71

Test frequencies for NR operating band n71 and SCS 15 kHz

| CBW<br>[MHz] | Range    |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|----------|------|----------------------------|------------------------------|-----------------------|
| 5            | Downlink | Low  | 619.5                      | 123900                       | 15                    |
|              |          | Mid  | 634.5                      | 126900                       |                       |
|              |          | High | 649.5                      | 129900                       |                       |
|              | Uplink   | Low  | 665.5                      | 133100                       | -                     |
|              |          | Mid  | 680.5                      | 136100                       |                       |
|              |          | High | 695.5                      | 139100                       |                       |
| 10           | Downlink | Low  | 622                        | 124400                       | 15                    |
|              |          | Mid  | 634.5                      | 126900                       |                       |
|              |          | High | 647                        | 129400                       |                       |
|              | Uplink   | Low  | 668                        | 133600                       | -                     |
|              |          | Mid  | 680.5                      | 136100                       |                       |
|              |          | High | 693                        | 138600                       |                       |
| 15           | Downlink | Low  | 624.5                      | 124900                       | 15                    |
|              |          | Mid  | 634.5                      | 126900                       |                       |
|              |          | High | 644.5                      | 128900                       |                       |
|              | Uplink   | Low  | 670.5                      | 134100                       | -                     |
|              |          | Mid  | 680.5                      | 136100                       |                       |
|              |          | High | 690.5                      | 138100                       |                       |
| 20           | Downlink | Low  | 627                        | 125400                       | 15                    |
|              |          | Mid  | 634.5                      | 126900                       |                       |
|              |          | High | 642                        | 128400                       |                       |
|              | Uplink   | Low  | 673                        | 134600                       | -                     |
|              |          | Mid  | 680.5                      | 136100                       |                       |
|              |          | High | 688                        | 137600                       |                       |





## Reference test frequencies for NR operating band n77

Test frequencies for NR operating band n77 and SCS 30 kHz

### 3700-3980:

| CBW<br>[MHz] | Range                   |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|-------------------------|------|----------------------------|------------------------------|-----------------------|
| 10           | Downlink<br>&<br>Uplink | Low  | 3705                       | 647000                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3975                       | 665000                       |                       |
| 15           | Downlink<br>&<br>Uplink | Low  | 3707.52                    | 647168                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3972.48                    | 664832                       |                       |
| 20           | Downlink<br>&<br>Uplink | Low  | 3710.01                    | 647334                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3969.99                    | 664666                       |                       |
| 30           | Downlink<br>&<br>Uplink | Low  | 3714.99                    | 647666                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3965.01                    | 664334                       |                       |
| 40           | Downlink<br>&<br>Uplink | Low  | 3720                       | 648000                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3960                       | 664000                       |                       |
| 50           | Downlink<br>&<br>Uplink | Low  | 3725.01                    | 648334                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3954.99                    | 663666                       |                       |
| 60           | Downlink<br>&<br>Uplink | Low  | 3730.02                    | 648668                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3949.98                    | 663332                       |                       |
| 70           | Downlink<br>&<br>Uplink | Low  | 3735                       | 649000                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3945                       | 663000                       |                       |
| 80           | Downlink<br>&<br>Uplink | Low  | 3740.01                    | 649334                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3939.99                    | 662666                       |                       |
| 90           | Downlink<br>&<br>Uplink | Low  | 3745.02                    | 649668                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3934.98                    | 662332                       |                       |
| 100          | Downlink<br>&<br>Uplink | Low  | 3750                       | 650000                       | 30                    |
|              |                         | Mid  | 3840                       | 656000                       |                       |
|              |                         | High | 3930                       | 662000                       |                       |



**3450-3550:**

| CBW<br>[MHz] | Range                   |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|-------------------------|------|----------------------------|------------------------------|-----------------------|
| 10           | Downlink<br>&<br>Uplink | Low  | 3455.01                    | 630334                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3545.01                    | 636334                       |                       |
| 15           | Downlink<br>&<br>Uplink | Low  | 3457.5                     | 630500                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3542.49                    | 636166                       |                       |
| 20           | Downlink<br>&<br>Uplink | Low  | 3460.02                    | 630668                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3540                       | 636000                       |                       |
| 30           | Downlink<br>&<br>Uplink | Low  | 3465                       | 631000                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3534.99                    | 635666                       |                       |
| 40           | Downlink<br>&<br>Uplink | Low  | 3470.01                    | 631334                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3530.01                    | 635334                       |                       |
| 50           | Downlink<br>&<br>Uplink | Low  | 3475.02                    | 631668                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3525                       | 635000                       |                       |
| 60           | Downlink<br>&<br>Uplink | Low  | 3480                       | 632000                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3519.99                    | 634666                       |                       |
| 70           | Downlink<br>&<br>Uplink | Low  | 3485.01                    | 632334                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3515.01                    | 634334                       |                       |
| 80           | Downlink<br>&<br>Uplink | Low  | 3490.02                    | 632668                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3510                       | 634000                       |                       |
| 90           | Downlink<br>&<br>Uplink | Low  | 3495                       | 633000                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3504.99                    | 633666                       |                       |
| 100          | Downlink<br>&<br>Uplink | Low  | \                          | \                            | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | \                          | \                            |                       |



## Reference test frequencies for NR operating band n78

Test frequencies for NR operating band n78 and SCS 30 kHz

### 3700-3800:

| CBW<br>[MHz] | Range                   |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|-------------------------|------|----------------------------|------------------------------|-----------------------|
| 10           | Downlink<br>&<br>Uplink | Low  | 3705                       | 647000                       | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | 3795                       | 653000                       |                       |
| 15           | Downlink<br>&<br>Uplink | Low  | 3707.52                    | 647168                       | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | 3792.48                    | 652832                       |                       |
| 20           | Downlink<br>&<br>Uplink | Low  | 3710.01                    | 647334                       | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | 3789.99                    | 652666                       |                       |
| 30           | Downlink<br>&<br>Uplink | Low  | 3715.02                    | 647668                       | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | 3785.01                    | 652334                       |                       |
| 40           | Downlink<br>&<br>Uplink | Low  | 3720                       | 648000                       | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | 3780                       | 652000                       |                       |
| 50           | Downlink<br>&<br>Uplink | Low  | 3725.01                    | 648334                       | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | 3774.99                    | 651666                       |                       |
| 60           | Downlink<br>&<br>Uplink | Low  | 3730.02                    | 648668                       | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | 3769.98                    | 651332                       |                       |
| 70           | Downlink<br>&<br>Uplink | Low  | 3735                       | 649000                       | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | 3765                       | 651000                       |                       |
| 80           | Downlink<br>&<br>Uplink | Low  | 3740.01                    | 649334                       | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | 3759.99                    | 650666                       |                       |
| 90           | Downlink<br>&<br>Uplink | Low  | 3745.02                    | 649668                       | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | 3754.98                    | 650332                       |                       |
| 100          | Downlink<br>&<br>Uplink | Low  | /                          | /                            | 30                    |
|              |                         | Mid  | 3750                       | 650000                       |                       |
|              |                         | High | /                          | /                            |                       |



### 3450-3550:

| CBW<br>[MHz] | Range                   |      | Carrier<br>centre<br>[MHz] | Carrier<br>centre<br>[ARFCN] | SS block SCS<br>[kHz] |
|--------------|-------------------------|------|----------------------------|------------------------------|-----------------------|
| 10           | Downlink<br>&<br>Uplink | Low  | 3455.01                    | 630334                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3545.01                    | 636334                       |                       |
| 15           | Downlink<br>&<br>Uplink | Low  | 3457.5                     | 630500                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3542.49                    | 636166                       |                       |
| 20           | Downlink<br>&<br>Uplink | Low  | 3460.02                    | 630668                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3540                       | 636000                       |                       |
| 30           | Downlink<br>&<br>Uplink | Low  | 3465                       | 631000                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3534.99                    | 635666                       |                       |
| 40           | Downlink<br>&<br>Uplink | Low  | 3470.01                    | 631334                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3530.01                    | 635334                       |                       |
| 50           | Downlink<br>&<br>Uplink | Low  | 3475.02                    | 631668                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3525                       | 635000                       |                       |
| 60           | Downlink<br>&<br>Uplink | Low  | 3480                       | 632000                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3519.99                    | 634666                       |                       |
| 70           | Downlink<br>&<br>Uplink | Low  | 3485.01                    | 632334                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3515.01                    | 634334                       |                       |
| 80           | Downlink<br>&<br>Uplink | Low  | 3490.02                    | 632668                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3510                       | 634000                       |                       |
| 90           | Downlink<br>&<br>Uplink | Low  | 3495                       | 633000                       | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | 3504.99                    | 633666                       |                       |
| 100          | Downlink<br>&<br>Uplink | Low  | \                          | \                            | 30                    |
|              |                         | Mid  | 3500.01                    | 633334                       |                       |
|              |                         | High | \                          | \                            |                       |



### **3. REFERENCE SPECIFICATION**

| Specification     | Version          | Title   |
|-------------------|------------------|---|
| FCC Part 2        | 2023             | Frequency allocations and radio treaty matters; general rules and regulations                     |
| FCC Part 22       | 2023             | Public mobile services  |
| FCC Part 24       | 2023             | Personal communications services  |
| FCC Part 27       | 2023             | Miscellaneous wireless communications services  |
| FCC Part 90       | 2023             | Private Land Mobile Radio Services  |
| FCC Part 96       | 2023             | Citizens Broadband Radio Service  |
| FCC Part 96.47    | 2023             | End user device additional requirements   |
| ANSI C63.26       | 2015             | American national standard for compliance testing of transmitters used in licensed radio services |
| KDB 971168<br>D01 | April 9,<br>2018 | Measurement guidance for certification of licensed digital transmitters                           |
| TIA-603-E-2016    | March<br>2016    | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards               |

### **4. KEY TO NOTES AND RESULT CODES**

The following are the definition of the test result.

| Code | Meaning  |
|------|--|
| PASS | Test result shows that the requirements of the relevant specification have been met.     |
| FAIL | Test result shows that the requirements of the relevant specification have not been met. |
| NT   | Normal Temperature   |
| NV   | Nominal voltage  |
| HV   | High voltage   |
| LV   | Low voltage  |



## 5. RESULT SUMMARY

| No. | Test case   | FCC reference  | Verdict | Test Lab |
|-----|---|--|---------|----------|
| 1   | RF Power Output   | 2.1046   | Pass    | A        |
| 2   | Effective Radiated Power and Effective Isotropic Radiated Power | 22.913(a)(5),24.232(c),27.50(b)(10), 27.50(c)(10), 27.50(h)(2), 27.50(d)(4), 27.50(a)(3), 27.50(j)(3),27.50(k)(3),90.542(a),90.635(b),96.41(b) | Pass    | A        |
| 3   | Occupied Bandwidth  | 2.1049   | Pass    | A        |
| 4   | Peak-Average Ratio  | 22.913(d), 24.232(d),27.50(d)(5), 27.50(k)(4),96.41(g)   | Pass    | A        |
| 5   | Emission Bandwidth  | 2.1049   | Pass    | A        |
| 6   | Spurious Emissions at antenna terminals                         | 2.1051, 22.917(a), 24.238(a)(b),27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a), 27.53(l)(2), 27.50(n)(2), 90.543(e)(f), 90.691(a), 96.41(e)  | Pass    | A        |
| 7   | Band Edges Compliance   | 2.1051, 22.917(a), 24.238(a)(b), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a), 96.41(e)  | Pass    | A        |
| 8   | Frequency Stability   | 2.1055, 22.355, 24.235,27.54, 90.213, 90.539   | Pass    | A        |
| 9   | Radiated Spurious Emissions                                     | 2.1053, 24.238(a)(b), 27.53(c), 27.53(g), 27.53(h), 27.53(f), 27.53(a), 27.53(m), 27.53(l)(2),27.50(n)(2),90.543(e)(f),90.691(a), 96.41(e)     | Pass    | A        |

### Lab A:

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

### Lab Address:

Room B37, Warehouse A5, No.3 Chiwan 4th Road, Zhaoshang Street, Nanshan District  
Shenzhen, Guangdong, People's Republic of China

**Accredited Test Lab Cert 3939.01**

The FCC Site Registration No. is 525120; The Designation No. is CN1171.




## **6. TEST RESULT**

### **6.1 RF Power Output**

Rule Part(s)  
FCC: 2.1046

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

Limits: No RF Power Output requirements in part 2.1046.

Test result:

The test results are shown in Appendix A.




## 6.2 Effective Radiated Power and Effective Isotropic Radiated Power

Rule Part(s)

FCC: 22.913(a) (5), 24.232(c), 27.50(b)(10), 27.50(c)(10), 27.50(h)(2), 27.50(d)(4), 27.50(a)(3), 27.50(j)(3), 27.50(k)(3), 90.542(a), 90.635(b)

Test setup:



Test procedure:

KDB 971168 D01 v03r01 – Section 5.6

Test Settings

Subclause 5.2.5.5 of ANSI C63.26-2015 is applicable, along with the following provisions. For personal/portable radios utilizing an integral antenna, the factor LC is typically negligible. However, in a fixed station transmit system that utilizes a long cable run between the transmitter and the transmitting antenna, this factor can be significant. The minimum cable loss should be used in this equation.

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured is:

$$\text{ERP/EIRP} = \text{PMeas} - \text{LC} + \text{GT}$$

Where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm)

PMeas = measured transmitter output power or PSD, in dBW or dBm

LC = signal attenuation in the connecting cable between the transmitter and antenna in dB

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

### ERP/EIRP LIMIT

22.913(a)(5)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

24.232(c)

Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

27.50(b) (10)

Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

27.50(c) (10)

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

27.50(h) (2)

Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

27.50(d) (4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum





necessary for successful communications.

27.50(a) (3)

Mobile and portable stations (i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP NR standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth.

27.50(j)(3)

Mobile and portable stations are limited to 1 Watt EIRP. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

27.50(k)(3)

According to the specific rule Part 27.50 (k)(3) Mobile devices are limited to 1Watt (30 dBm) EIRP, Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

90.542(a)

47 CFR 90.542(a)(6)

Control stations and mobile stations transmitting in the 758–768 MHz band and the 788–798 MHz band are limited to 30 watts ERP.

47 CFR 90.542(a)(7)

Portable stations (hand-held devices) transmitting in the 758–768 MHz band and the 788–798 MHz band are limited to 3 watts ERP.

90.635(a)(b)

The maximum output power of the transmitter for mobile stations is 100 watts (20 dBw).

96.41(b)

| Device          | Maximum EIRP<br>(dBm/10 MHz) |
|-----------------|------------------------------|
| End User Device | 23                           |
| Category A CBSD | 30                           |
| Category B CBSD | 47                           |

Test result:


The test results are shown in Appendix A.



### 6.3 Occupied Bandwidth

Rule Part(s)  
FCC: 2.1049

Test Setup:

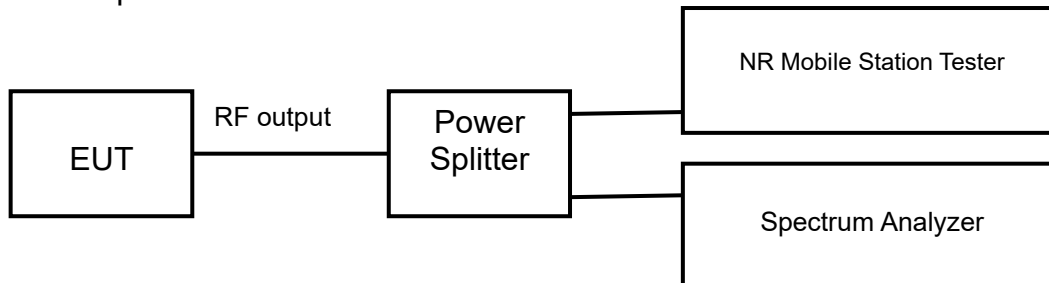

Test procedure:  
KDB 971168 D01 v03r01 – Section 4.2

Test Setting:

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2.  $RBW = 1 - 5\%$  of the expected OBW
3.  $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


The test results are shown in Appendix A.



## 6.4 Emission Bandwidth

Rule Part(s)  
FCC: 2.1049

Test Setup:

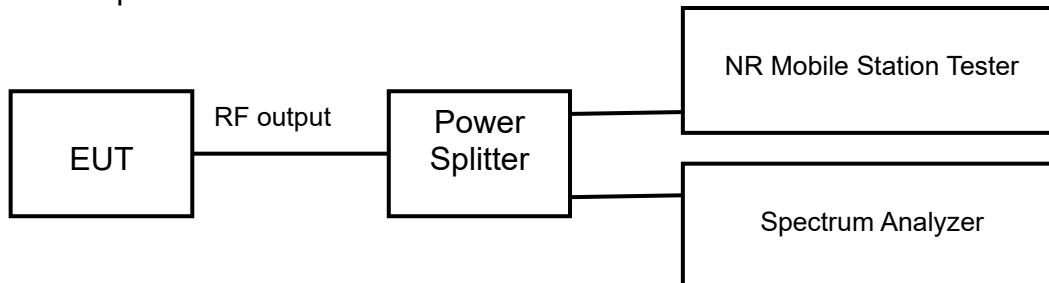

Test procedure:  
KDB 971168 D01 v03r01 – Section 4.2

Test Setting:

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW  $\geq 3 \times$  RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of 26dB bandwidth observed in Step 7

Limits: No specific emission bandwidth requirements in part 2.1049.

Test result:  
The test results are shown in Appendix A.




## 6.5 Peak-Average Ratio

Rule Part(s)

FCC: 22.913(d), 24.232(d), 27.50(d)(5), 96.41(g)

Test Setup:

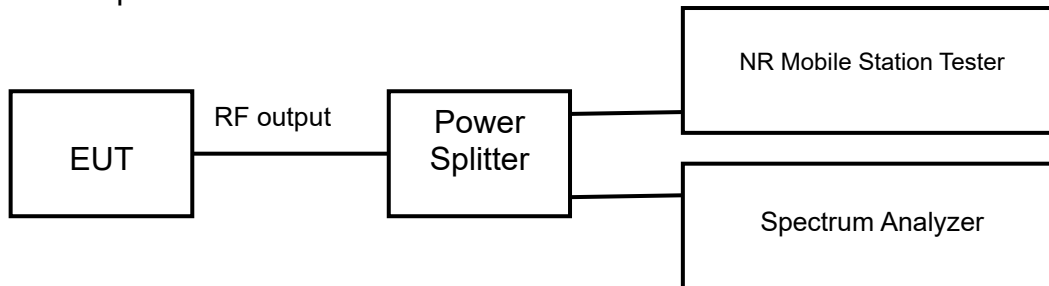

Test procedure:

KDB 971168 D01 v03r01 – Section 5.7.1

Test Setting:

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW  $\geq$  OBW or specified reference bandwidth
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Limits

24.232(d), 27.50(d) (5)

In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test result:

The test results are shown in Appendix A.




## 6.6 Spurious Emissions at antenna terminal

Rule Part(s)

FCC: 2.1051,22.917(a),24.238(a)(b),27.53(c),27.53(g),27.53(h),27.53(m),27.53(a), 27.53(l)(2), 27.50(n)(2), 90.543(e)(f),90.691(a),96.41(e)

Test Setup:

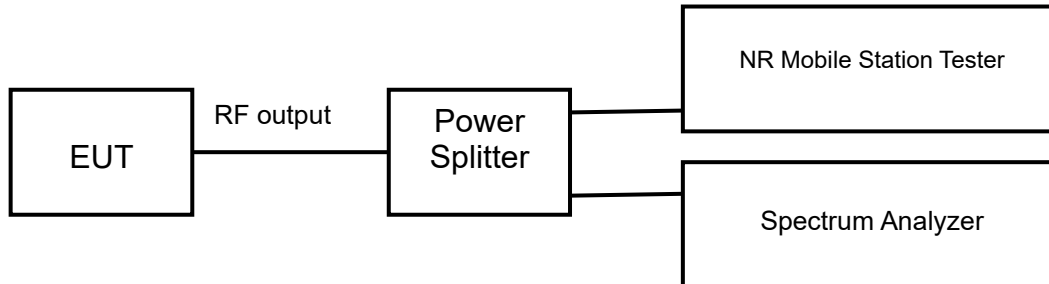

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Setting:

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 \* the fundamental frequency
2. Detector = RMS
3. RBW=1MHz
4. VBW=3MHz
5. Trace mode = trace average for continuous emissions, max hold for pulse emissions
6. Sweep time = auto couple
7. The trace was allowed to stabilize

Limits

The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P \text{ [Watts]})$ , where P is the transmitter power in Watts.

For Band 30, the minimum permissible attenuation level of any spurious emission <2288MHz and >2365MHz is  $70 + \log_{10}(P \text{ [Watts]})$ .

For Band 7 and 41, the minimum permissible attenuation level of any spurious emission is  $55 + \log_{10}(P \text{ [Watts]})$ .

Test result:

The test results are shown in Appendix A.




## 6.7 Band Edges Compliance

Rule Part(s)

FCC: 2.1051, 22.917(a), 24.238(a)(b), 27.53(c), 27.53(g), 27.53(h), 27.53(m), 27.53(a), 27.53(l)(2), 27.50(n)(2), 90.543(e)(f), 90.691(a), 96.41(e)

Test Setup:

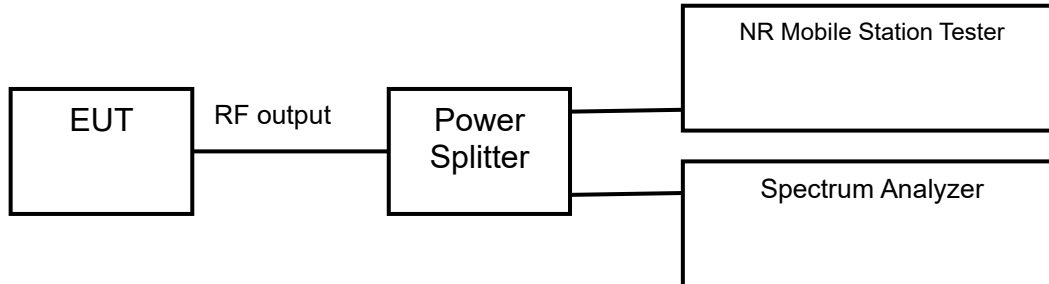

Test procedure:

KDB 971168 D01 v03r01 – Section 6.0

Test Setting:

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW > 1% of the emission bandwidth
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points  $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Limits

The minimum permissible attenuation level of any spurious emission is  $43 + \log_{10}(P)$  [Watts], where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 30 is  $> 43 + 10\log_{10}(P)$  [Watts] at 2300-2305MHz & 2345-2360MHz,  $> 55 + 10\log_{10}(P)$  [Watts] at 2320-2324MHz & 2341-2345MHz,  $> 61 + 10\log_{10}(P)$  [Watts] at 2324-2328MHz & 2337-2341MHz,  $> 67 + 10\log_{10}(P)$  [Watts] at 2288-2292MHz & 2328-2337MHz, and  $> 70 + 10\log_{10}(P)$  [Watts] at frequencies < 2288MHz & > 2365MHz.

Per 24.238(a) 27.53(h) in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to demonstrate compliance with the out-of-band emissions limit. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may



be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c)(5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c)(4) is  $65 + 10\log_{10}(P) = -35\text{dBm}$  in a 6.25kHz bandwidth.

Per 27.53(a)(5) in the 1 MHz bands immediately outside and adjacent to the channel blocks at 2305, 2310, 2315, 2320, 2345, 2350, 2355, and 2360 MHz, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5MHz.

27.50(n)(2):

According to FCC Part 27.53 (n)(2) For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this [paragraph \(l\)\(2\)](#) is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

90.543

(e)

Click to open paragraph tools





For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least  $43 + 10 \log (P)$  dB.
- (4) Compliance with the provisions of [paragraphs \(e\)\(1\)](#) and [\(2\)](#) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
- (5) Compliance with the provisions of [paragraph \(e\)\(3\)](#) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.
- (f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

90.691(a)

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

- (1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $116 \log_{10}(f/6.1)$  decibels or  $50 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.
- (2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz

96.41(e)

The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed  $-40$  dBm/MHz.

Test result:

The test results are shown in Appendix A.






## 6.8 Frequency Stability

Rule Part(s)

FCC: 2.1055, 22.355, 24.235, 27.54, 90.213, 90.539

Test setup:

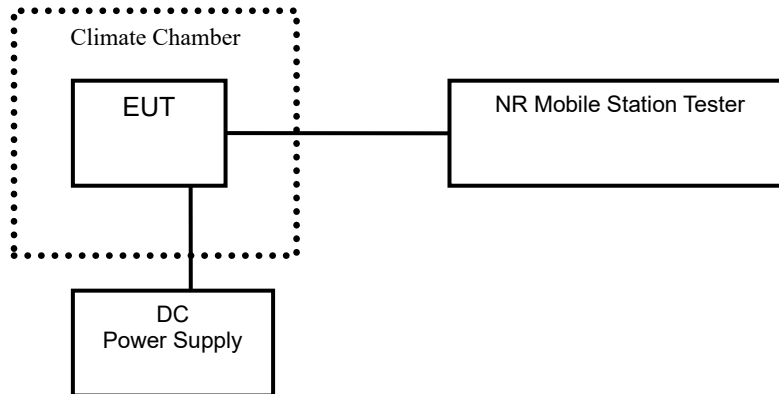

Test Procedure:

ANSI/TIA-603-E-2016

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C (The temperature range can be declared by the manufacturer). A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Limits: For Part 24, Part 27, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test result:

The test results are shown in Appendix A.




## 6.9 Radiated Spurious Emissions

Rule Part(s)

FCC: 2.1053, 24.238(a)(b), 27.53(c), 27.53(g), 27.53(h), 27.53(f), 27.53(a), 27.53(m),  
27.53(l)(2), 27.50(n)(2), 90.543(e)(f), 90.691, 96.41(e)

Test Setup:

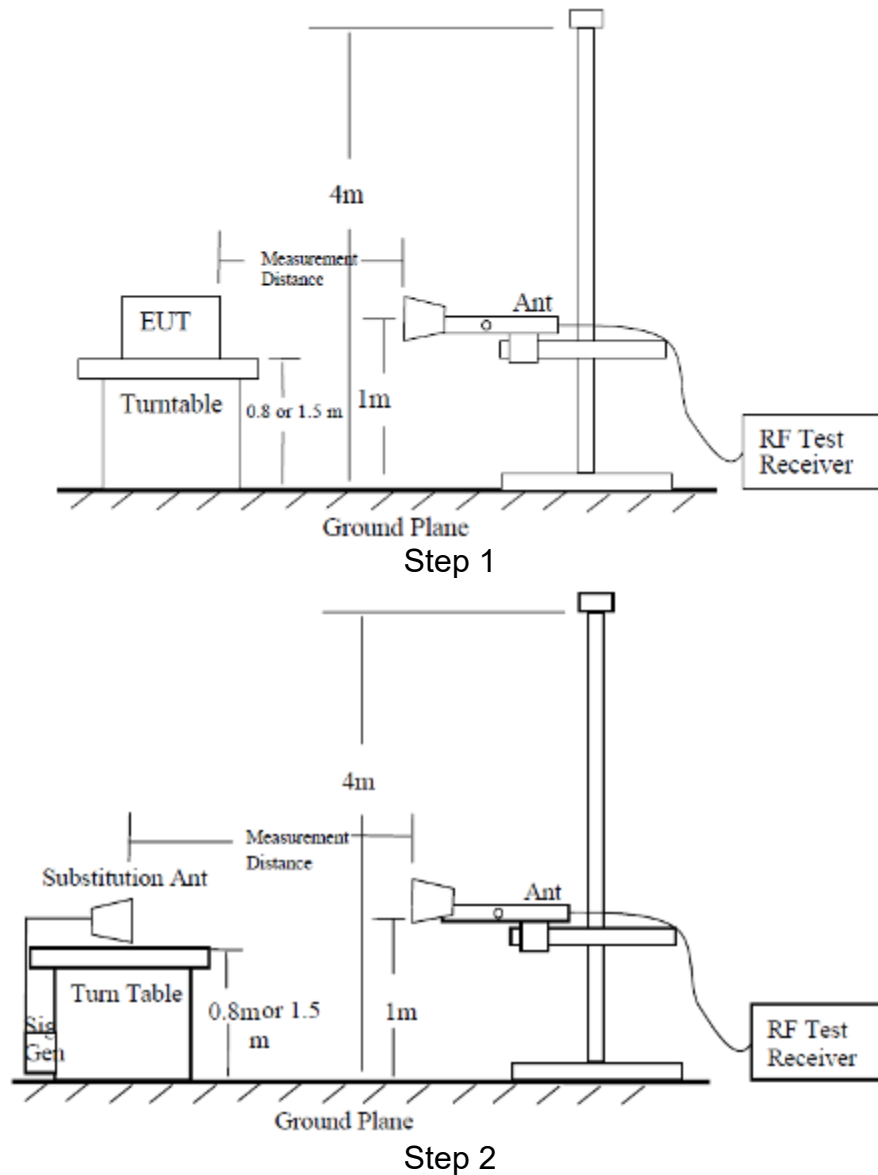



#### Test procedure:

The measurements procedures in TIA-603-E-2016 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

#### Step 1:

The measurement is carried out in the chamber. EUT was placed on a 0.8m ( $f < 1\text{GHz}$ )/1.5m ( $f > 1\text{GHz}$ ) high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna from 1m to 4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 100 kHz ( $f < 1\text{GHz}$ )/1MHz ( $f > 1\text{GHz}$ ). The antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 10th harmonic of the carrier. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power ( $P_{\text{mea}}$ ) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{\text{mea}}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna ( $P_{\text{ca}}$ ) and the Substitution Antenna Gain ( $G_a$ ).

#### Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power (EIRP)} = P_{\text{mea}} + P_{\text{ca}} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15 \text{ (dB)}$ .

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

Note: We tested both horizontal and vertical polarization, but only the largest numerical polarity of the two polarities was recorded in the final report.

#### Test result:

The test results are shown in Appendix B.




## 6.10 End user device additional requirements

Rule Part(s)

Part96.47

Test Setup:

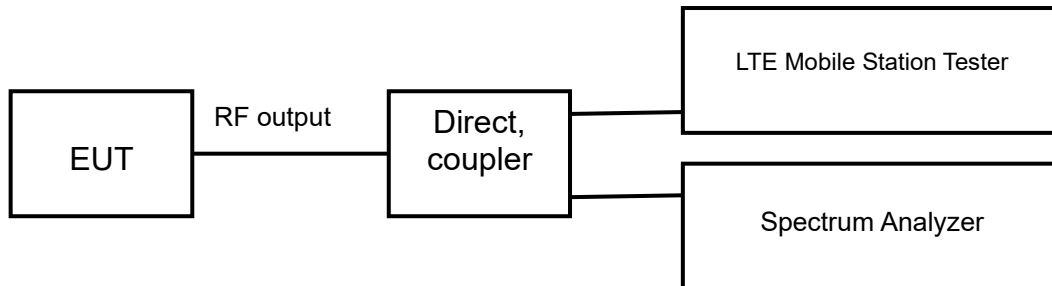

Test Procedure:

WINNF-18-IN-00178

Test Setting:

1. Setup with frequency and power level 20dBm/MHz
2. Enable AP service from Ruckus Cloud managementCheck
3. Check EUD Tx Frequency and power
4. Disable AP service from Ruckus Cloud management
5. Check EUD stops transmission within 10seconds.
6. Setup with frequency and power level 8dBm/MHz
7. Enable AP service from Ruckus Cloud management
8. Check EUD Tx Frequency and power
9. Disable AP service from Ruckus Cloud management
10. Check EUD stops transmission within 10seconds.

Test result:

The test results are shown in Appendix A.



## **7. MEASUREMENT UNCERTAINTIES**

| Items  | Uncertainty  |        |
|--|--------------|--------|
| RF Power Output  | 0.6 dB       |        |
| Effective Radiated Power and<br>Effective Isotropic Radiated Power | 0.6 dB       |        |
| Occupied Bandwidth   | 3kHz         |        |
| Emission Bandwidth   | 3kHz         |        |
| Peak-Average Ratio   | 0.8dB        |        |
| Frequency Stability  | 48Hz         |        |
| Band Edges Compliance  | 1.2dB        |        |
| Spurious Emissions at antenna<br>terminal                          | 9kHz~2GHz    | 1.2dB  |
|  | 2G~3.6GHz    | 1.4dB  |
|  | 3.6G~8GHz    | 2.2dB  |
|  | 8G~12.75GHz  | 2.7dB  |
| Radiated Emission Measurement                                      | 30MHz~200MHz | 4.88dB |
|  | 200MHz~1GHz  | 4.87dB |
|  | 1GHz~18GHz   | 4.58dB |
|  | 18GHz~40GHz  | 4.35dB |

Note 1: According to the test specification limit (The test results fully compliance with the test standard limit requirements)

Note 2: According to test specification limits plus uncertainties (The test results exceed the standard limit requirements and meet the standard requirements after adding the system uncertainty)

Note 3: Test operation mode is Note 1

**8. TEST EQUIPMENTS**

| No. | Name/Model                                    | Manufacturer | S/N          | Calibration Date | Calibration Due Date |
|-----|---|--------------|--------------|------------------|----------------------|
| 1   | Mobile Station Tester / MT8820C               | Anritsu      | 6201300660   | 2024.06.21       | 2025.06.20           |
| 2   | Radio Communication Station / CMW500          | R&S          | 161702       | 2024.06.21       | 2025.06.20           |
| 3   | Spectrum Analyzer / FSV40                     | R&S          | 101065       | 2024.06.21       | 2025.06.20           |
| 4   | Spectrum Analyzer / N9020A                    | Agilent      | MY48010771   | 2024.03.06       | 2025.03.05           |
| 5   | Power Divider / 11667A                        | HP           | 19632        | 2024.06.21       | 2025.06.20           |
| 6   | Switching box/CBOX-FULL                       | TSTPASS      | SN5308466    | 2024.07.21       | 2025.07.20           |
| 7   | DC Power Supply / E3645A                      | Agilent      | MY40000741   | 2024.03.06       | 2025.03.05           |
| 8   | Temperature chamber / SH241                   | ESPEC        | 92013758     | 2024.06.21       | 2025.06.20           |
| 9   | Fully-Anechoic Chamber / 12.65m×8.03m×7.50m   | FRANKONIA    | -----        | -----            | -----                |
| 10  | Semi-Anechoic/Chamber / 23.18m×16.88m×9.60m   | FRANKONIA    | ---          | -----            | -----                |
| 11  | Turn table Diameter:1m                        | FRANKONIA    | -----        | -----            | -----                |
| 12  | Turn table Diameter:5m                        | FRANKONIA    | -----        | -----            | -----                |
| 13  | Antenna master FAC(MA4.0)                     | MATURO       | -----        | -----            | -----                |
| 14  | Antenna master SAC(MA4.0)                     | MATURO       | -----        | -----            | -----                |
| 15  | Shielding room / 9.080m×5.255m×3.525m         | FRANKONIA    | -----        | -----            | -----                |
| 16  | Double-Ridged Waveguide Horn Antenna / HF 907 | R&S          | 100512       | 2024.06.21       | 2025.06.20           |
| 17  | Double-Ridged Waveguide Horn Antenna / HF 907 | R&S          | 100513       | 2024.06.21       | 2025.06.20           |
| 18  | Ultra log antenna / HL562                     | R&S          | 100016       | 2024.06.21       | 2025.06.20           |
| 19  | Receive antenna /3160-09                      | SCHWARZ-BECK | 002058-002   | 2024.06.21       | 2025.06.20           |
| 20  | EMI test receiver / ESI 40                    | R&S          | 100015       | 2024.06.21       | 2025.06.20           |
| 21  | EMI test receiver / ESCS30                    | R&S          | 100029       | 2024.06.21       | 2025.06.20           |
| 22  | Receive antenna / HL562                       | R&S          | 100167       | 2024.06.21       | 2025.06.20           |
| 23  | AMN / ENV216                                  | R&S          | 3560.6550.12 | 2024.06.21       | 2025.06.20           |
| 24  | FCC auto test system / RT9100L-2              | Radiosky     | V1.0         | /                | /                    |
| 25  | EMI test software / EMC32                     | R&S          | V10.20.01    | /                | /                    |

**APPENDIX A – TEST DATA OF CONDUCTED EMISSION**

The worst channel results are reflected in the report,Please refer to the attachment.

**APPENDIX B – TEST DATA OF RADIATED EMISSION**

The worst channel results are reflected in the report,Please refer to the attachment.

---End of Test Report---