

TEST REPORT

Report No.: SRTC2024-9004(F)-24091203(T)
Product Name: Edge Computing Gateway
Model Name: IG902-FQ39, IG904-FQ39
Applicant: Beijing InHand Networks Technology Co., Ltd.
Manufacturer: Beijing InHand Networks Technology Co., Ltd.
Specification: FCC Part 15B (Certification)
(2023 edition)
ANSI C63.4-2014
FCC ID: 2AANY-IG902FQ39

The State Radio_monitoring_center Testing Center (SRTC)
15th Building, No.30 Shixing Street, Shijingshan District,
Beijing, China

Tel: 86-10-57996183 Fax: 86-10-57996388

CONTENTS

1. General information	3
1.1 Notes of the test report.....	3
1.2 Information about the testing laboratory	3
1.3 Applicant's details	3
1.4 Manufacturer's details	3
1.5 Application details	3
1.6 Reference specification	3
1.7 Information of EUT	4
1.7.1 General information	4
1.7.2EUT details	4
1.7.3 Auxiliary equipment details	4
1.7.4 Test mode	4
2. Test information	5
2.1 Summary of the test results	5
2.2 Test result	6
2.2.1Conducted Emissions-FCC Part15.107	6
2.2.2RadiatedEmissions-FCC Part15.109	10
2.3. List of test equipments	14

1. General information

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company: The State Radio_monitoring_center Testing Center (SRTC)
Address: 15th Building, No.30 Shixing Street, Shijingshan District
Testing location: No.80, Zhaojiachang, BeizangCun, Daxing District, Beijing, China.
City: Beijing
Country or Region: China
Contacted person: Liu Jia
Tel: +86 10 57996183
Fax: +86 10 57996388
Email: liujiaf@srtc.org.cn

1.3 Applicant's details

Company: Beijing InHand Networks Technology Co., Ltd.
Address: Room 501, floor 5, building 3, yard 18, ziyue road, chaoyang district, Beijing

1.4 Manufacturer's details

Company: Beijing InHand Networks Technology Co., Ltd.
Address: Room 501, floor 5, building 3, yard 18, ziyue road, chaoyang district, Beijing

1.5 Application details

Date of reception of test sample: 12th September 2024

Date of test: 13th September to March 14th October 2024

1.6 Reference specification

FCC Part 15B, 2023 (Certification)

ANSI C63.4-2014

1.7 Information of EUT

1.7.1 General information

Name of EUT	Edge Computing Gateway
Model Name	IG902-FQ39, IG904-FQ39
Frequency Range	LTE: FDD 2/ FDD 4/ FDD 5/ FDD 7/ FDD 12/FDD 13/ FDD 14/FDD 17/ FDD 25/FDD 26/ FDD 30/TDD 41/ TDD 42/ TDD 43/ TDD 48/ FDD 66/ FDD 71 WiFi: 2.412GHz~2.462GHz
Equipment Class	Class B
Power Supply	Charger
HW Version	V1.1
SW Version	V2.1

1.7.2 EUT details

No.	Model Name	IMEI
EUT1	IG902-FQ39, IG904-FQ39	868517074337829

1.7.3 Auxiliary equipment details

AE (Auxiliary Equipment) 1#: AC Adaptor

Manufacturer	SHENZHEN KUANTEN LIMITED
Model Number	KT241120200EUL
Input Voltage	100V-240V AC
Output Voltage	12V 2A


1.7.4 Test mode

Mode No.	Description of test mode
Mode 1	LTE/ WLAN receiver

2. Test information

2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	Conducted emissions	15.107	Pass
2	Radiated emissions	15.109	Pass

Approved By: Mr.LiuWei Director of the test department 	Checked By: Mr.Guoyu Vice director of the test department 
Tested By: Mr.Wu Chengwang 	Issued date: 2024.10.14

2.2 Test result

2.2.1Conducted Emissions-FCC Part15.107

Ambient condition:

Temperature	Relative humidity	Pressure
21.5°C	40.4%	100.8kPa

Test Setup with charger:

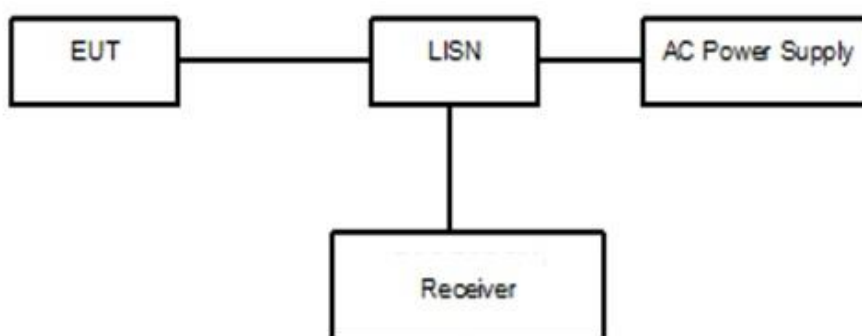


Figure 1

Test Procedure:

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The EUT is connected with LISN via the charger. The LISN is connected to the reference ground. The accessories of the EUT are connected with the EUT such as headset etc. Open the following functions of EUT: GPS, Camera and video.

The test set-up and the test methods are performed according to ANSI C63.4:2014. Then start the test software EMC32. Sweep the whole frequency band through the range from 150 KHz to 30 MHz with RBW 9kHz, VBW 30kHz. The measurement should be done for both L line and N line. During pre-test, the receiver uses both peak detector and average detector. And the final test, the receiver uses both average detector and Quasi-peak detector.

The data of cable loss has been calibrated in full testing frequency range before the testing.

A "reference path loss" Corr.(dB) is established and the $L_{cable}+ATT+VDF$ is the attenuation of "reference path loss", and including the cable loss, the attenuation of the attenuator, the voltage division factor of AMN.

The measurement results are obtained as described below:

$$P_{\text{result}} = P_{\text{mea}} + \text{Corr. (dB)}$$

Sample calculation: $(38.96\text{dB}\mu\text{V}) = (9.36\text{dB}\mu\text{V}) + (29.6\text{ dB})$, the corresponding frequency is 0.15MHz.

Limit:


Frequency of Emission(MHz)	Limits(dB μ V)	
	Quasi-peak	Average
0.15~0.5	66 to 56*	56 to 46*
0.5~5	56	46
5~30	60	50

Note: * Decreases with the logarithm of the frequency

Test result:

Noise Level of the Measuring Instrument


Full Spectrum

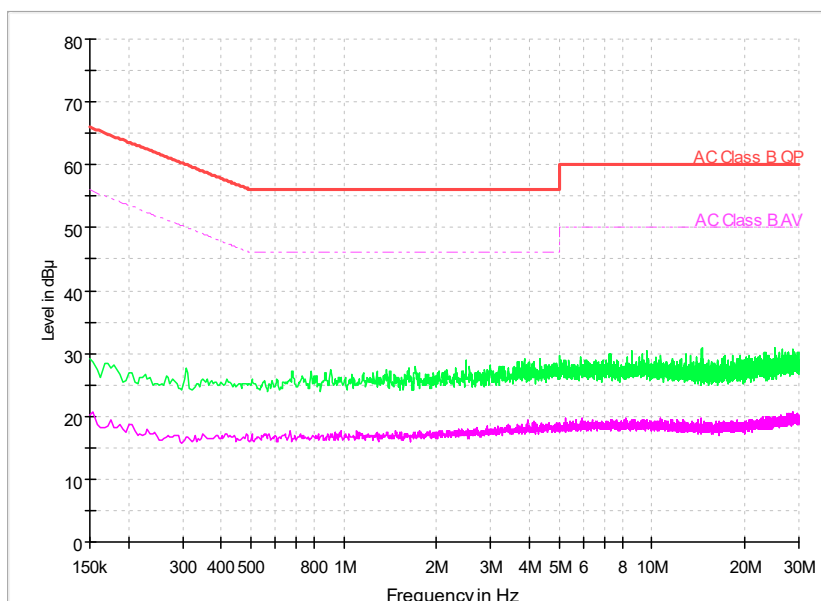

Pic1. Conducted emission L and N Line

120V AC:
EUT +1#Charger:

Full Spectrum

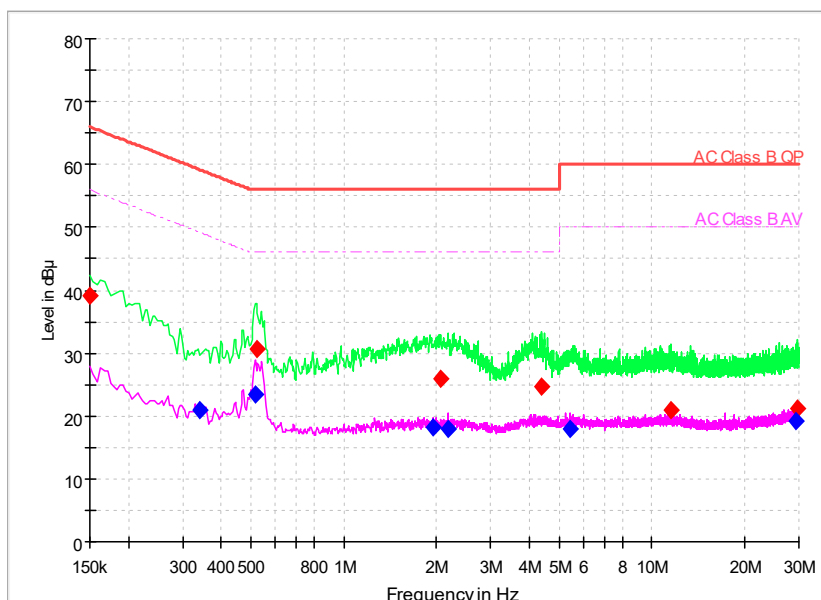


Pic2. Conducted emission L&N Line

Frequency	QuasiPeak	Average	Limit	Margin	Line	Corr.	Pmea QuasiPeak	Pmea Average
(MHz)	(dBμV)	(dBμV)	(dBμV)	(dB)		(dB)	(dBμV)	(dBμV)
0.15000	39.20	---	66.00	26.80	L1	29.60	9.60	---
0.34189	---	20.97	49.16	28.19	L1	29.60	---	-8.63
0.51673	---	23.31	46.00	22.69	N	29.60	---	-6.29
0.52099	30.69	---	56.00	25.31	N	29.60	1.09	---
1.95379	---	18.12	46.00	27.88	N	29.60	---	-11.48
2.05614	26.04	---	56.00	29.96	L1	29.60	-3.56	---
2.17980	---	17.93	46.00	28.07	N	29.60	---	-11.67
4.38017	24.64	---	56.00	31.36	L1	29.70	-5.06	---
5.43771	---	17.98	50.00	32.02	N	29.70	---	-11.72
11.53564	20.82	---	60.00	39.18	L1	29.90	-9.08	---
29.44138	---	19.12	50.00	30.88	L1	30.70	---	-11.58
29.69724	21.14	---	60.00	38.86	L1	30.70	-9.56	---

240V AC:

EUT +1#Charger:

Full Spectrum

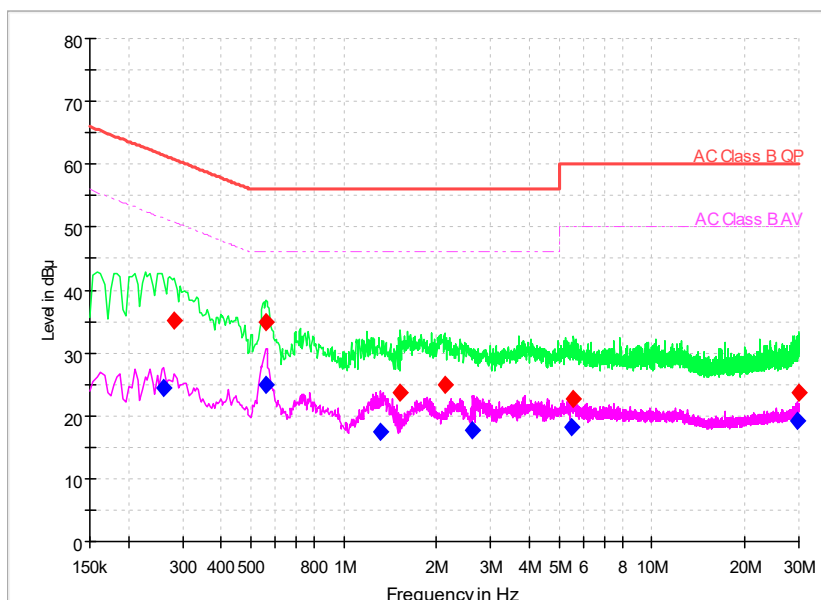

Pic3. Conducted emission L&N Line

Frequency	QuasiPeak	Average	Limit	Margin	Line	Corr.	Pmea QuasiPeak	Pmea Average
(MHz)	(dBμV)	(dBμV)	(dBμV)	(dB)		(dB)	(dBμV)	(dBμV)
0.26087	---	24.30	51.40	27.10	L1	29.60	---	-5.30
0.28219	35.16	---	60.75	25.59	L1	29.60	5.56	---
0.55937	---	24.90	46.00	21.10	L1	29.60	---	-4.70
0.55937	34.79	---	56.00	21.21	L1	29.60	5.19	---
1.31415	---	17.43	46.00	28.57	L1	29.60	---	-12.17
1.52736	23.78	---	56.00	32.22	L1	29.60	-5.82	---
2.12436	24.89	---	56.00	31.11	L1	29.60	-4.71	---
2.62329	---	17.76	46.00	28.24	L1	29.60	---	-11.84
5.46756	---	18.18	50.00	31.82	L1	29.70	---	-11.52
5.57844	22.73	---	60.00	37.27	N	29.70	-6.97	---
29.74414	---	19.23	50.00	30.77	L1	30.70	---	-11.47
30.00000	23.59	---	60.00	36.41	L1	30.70	-7.11	---

2.2.2RadiatedEmissions-FCC Part15.109

Ambient condition:

Temperature	Relative humidity	Pressure
21.5°C	40.4%	100.8kPa

Test Setup:

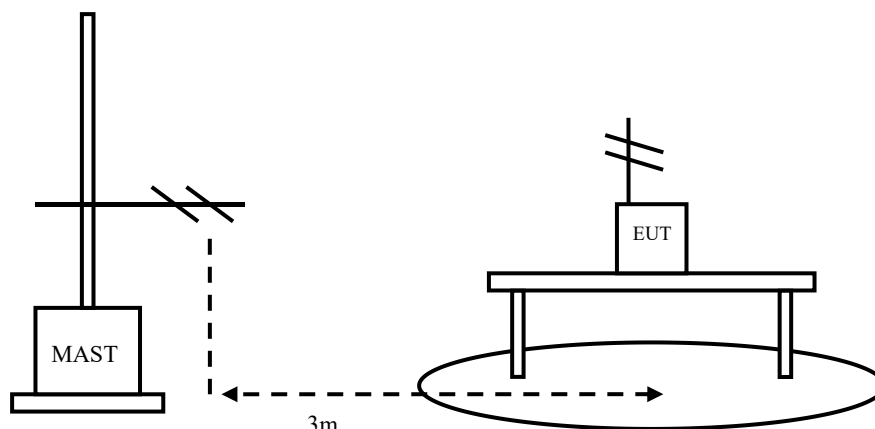


Figure 2

Test Procedure:

EUT+Charger:

The EUT should be placed on a non-metallic table 80cm above the ground plane. The receive antennas shall be moved from 1 to 4 meters. The distance between EUT and receive antenna should be 3 meters.

The EUT should work in idle mode. The accessories of the EUT are connected with the EUT such as headset etc. Open the following functions of EUT: GPS, Camera and video. The test set-up and the test methods are performed according to ANSI C63.4:2014.

Then start the test software EMC32. Sweep the whole frequency band through the range from 30MHz to 1GHz, using receive log period antenna VULB 9163.

During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The EUT is laid in two modes as follow:
1. put the EUT in horizontal direction; 2. put the EUT in vertical direction.

The data of cable loss and antenna factor have been calibrated in full testing frequency range before the testing. All test results are performed with max hold at the horizontal and vertical polarity.

RBW=120kHz, VBW=300kHz, when the test frequency: 30MHz<f<1GHz

RBW=1MHz, VBW=3MHz, when the test frequency: f>1GHz

A “reference path loss” is established and the A_{Rpl} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:

Result= $P_{mea} + A_{Rpl}$

Limit:

Frequency of Emission(MHz)	Limits	
	Detector	Unit (dB μ V/m)
30~88	Quasi-peak	40
88~216	Quasi-peak	43.5
216~960	Quasi-peak	46
960~1000	Quasi-peak	54
1000~5th harmonic of the highest frequency or 40GHz, whichever is lower	Average	54
	Peak	74


Test result:

Sample calculation: (33.36dB μ V/m) = (22.16dB μ V/m) + (11.2dB), the corresponding frequency is 45.617MHz.

EUT +1#Charger:


Frequency(MHz)	Result(dB μ V/m)	Limit (dB μ V/m)	A_{Rpl} (dB)	P_{mea} (dB μ V/m)	Polarity
45.617	33.36	40.0	11.2	22.16	V
55.9475	26.57	40.0	7.2	19.37	V
118.416	21.97	43.5	12.2	9.77	V
301.891	21.72	46.0	15.2	6.52	V
374.981	38.65	46.0	15.4	23.25	V
875.016	36.27	46.0	23.7	12.57	V

EUT +1#Charger: refer to Pic4,Pic5, Pic6, Pic7

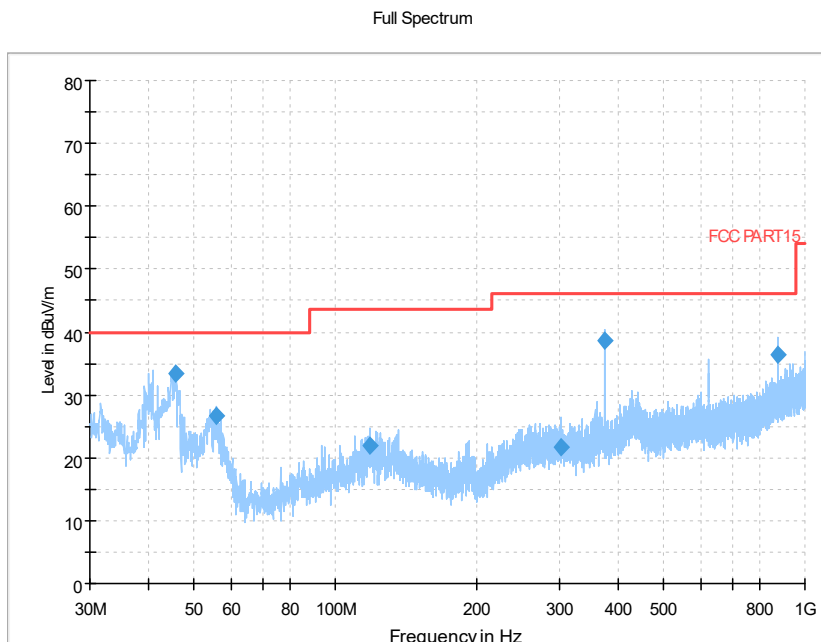


Pic4. Radiated emission(30MHz – 1GHz)

Note: The test data in the graph includes two polarizations: horizontal and vertical

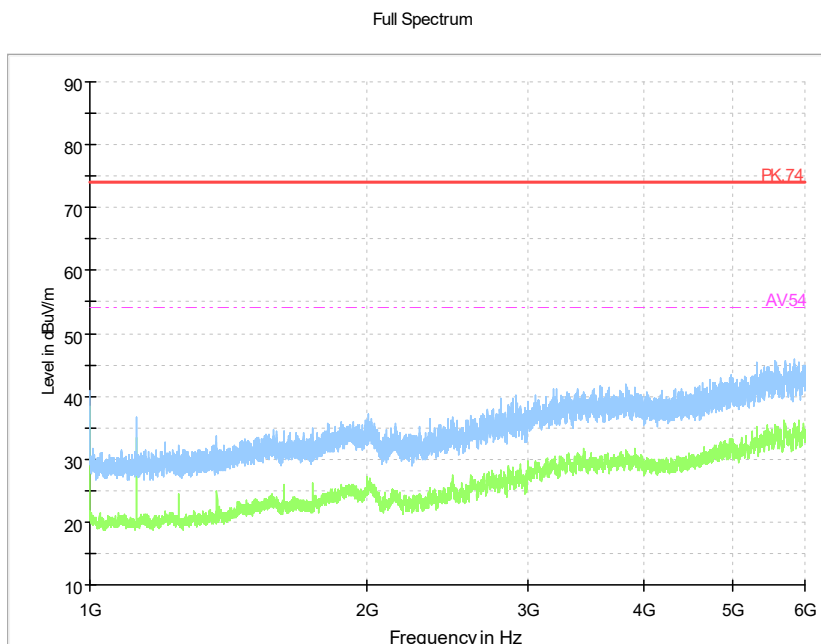


Pic5. Radiated emission (1GHz –6GHz)

Note: The test data in the graph includes two polarizations: horizontal and vertical.

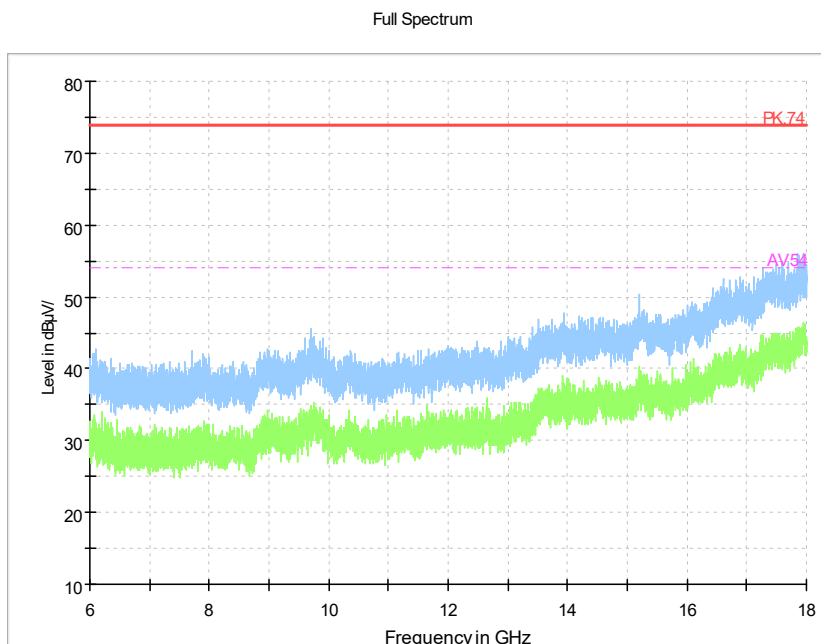

Pic6. Radiated emission (6GHz –18GHz)

Note: The test data in the graph includes two polarizations: horizontal and vertical.

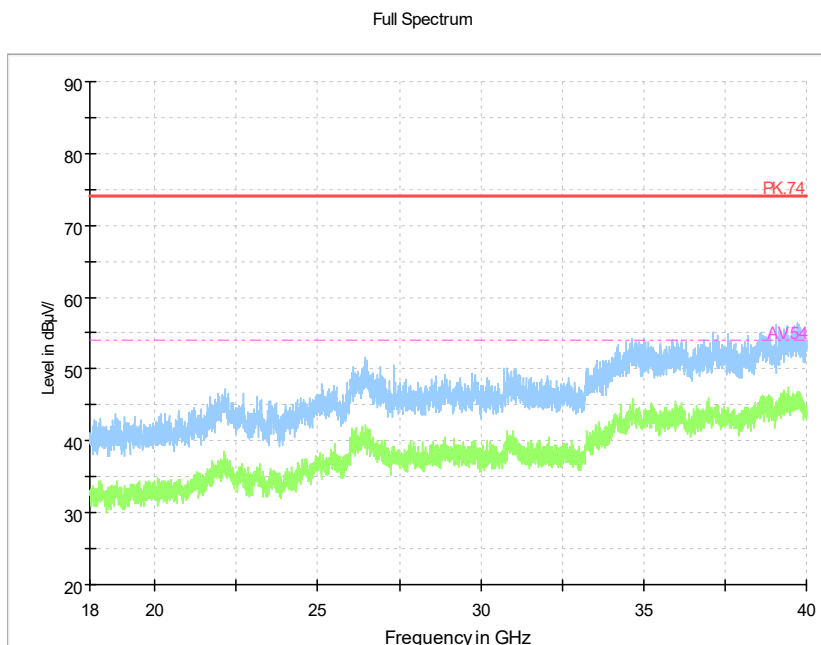

Pic7. Radiated emission (18GHz –40GHz)

Note: The test data in the graph includes two polarizations: horizontal and vertical.

2.3. List of test equipments

No.	Name/Model	Manufacturer	S/N	Calibration Due Date	Calibration Date
1	23.18m×16.88m×9.60mS emi-AnechoicChamber	FRANKONIA	-----	2028.09.05	2023.09.05
2	ESW EMI test receiver	R&S	101574	2025.03.06	2024.03.06
3	ESR3 EMI test receiver	R&S	102361	2025.03.06	2024.03.06
4	9.080m×5.255m×3.525m Shielding room	FRANKONIA	-----	2027.03.25	2022.03.25
5	VULB 9163 Ultra log test antenna	schwarzbeck	727	2025.05.28	2023.05.28
6	HF 907 Double-Ridged Waveguide Horn Antenna	R&S	100512	2025.07.20	2023.07.20
7	SAS-574 Horn Antenna	schwarzbeck	535	2025.05.12	2023.05.12
8	ENV216 AMN	R&S	101881	2025.06.21	2024.06.21
9	EMC32EMI test software	R&S	V10	-----	-----

-----The End-----