

FCC Test Report

Report No.: AGC02170230701FR02

FCC ID : 2AANZAIR

APPLICATION PURPOSE: Class II Equipment

PRODUCT DESIGNATION: QUIRKY AIR

BRAND NAME : QUIRKY

MODEL NAME QKY-AIR, QKY-AIR-5, QKY-AIR-5-BLK, EU-QKY-AIR,

EU-QKY-AIR-5, EU-QKY-AIR-7

APPLICANT : DGL Group LTD.

DATE OF ISSUE : Jul. 21, 2023

STANDARD(S) FCC Part 15.407

TEST PROCEDURE(S) KDB 789033 D02 v02r01

REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 24

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 21, 2023	Valid	Initial Release

Note:

The original test report AGC01559190610FE06 (dated Oct. 19, 2019 and tested from Sep. 12, 2019 to Sep.

20, 2019) was modified on Apr. 10, 2023, including the following changes and additions:

- Changed the address of the applicant and Manufacturer;
- -Added the name and address of the factory;
- Reduced the series model;
- -Optimize charging port grounding;
- -Change in product appearance color.

For the above described change(s) the following tests was considered to be necessary:

Clause	Testing
15.209	Radiated Emission
15.207	Line Conduction Emission



Report No.: AGC02170230701FR02 Page 3 of 24

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
2.3. RELATED SUBMITTAL(S) / GRANT (S)	6
2.4. TEST METHODOLOGY	6
2.5. SPECIAL ACCESSORIES	
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	6
3. MEASUREMENT UNCERTAINTY	7
4. DESCRIPTION OF TEST MODES	8
5. SYSTEM TEST CONFIGURATION	9
5.1. CONFIGURATION OF EUT SYSTEM	9
5.2. EQUIPMENT USED IN EUT SYSTEM	9
5.3. SUMMARY OF TEST RESULTS	9
6. TEST FACILITY	10
7. RADIATED EMISSION	11
7.1. MEASUREMENT PROCEDURE	11
7.2. TEST SETUP	12
7.3. LIMITS AND MEASUREMENT RESULT	13
7.4. TEST RESULT	13
8. FCC LINE CONDUCTED EMISSION TEST	19
8.1. LIMITS OF LINE CONDUCTED EMISSION TEST	19
8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	19
8.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	20
8.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	21
8.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	22
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	24
ADDENDIY B. DUOTOGD ADUS OF FUT	24



Page 4 of 24

1. VERIFICATION OF CONFORMITY

Applicant	DGL Group LTD.		
Address	2045 Lincoln Highway, 3rd Floor, Edison, NJ 08817, United States		
Manufacturer	DGL Group LTD.		
Address	2045 Lincoln Highway, 3rd Floor, Edison, NJ 08817, United States		
Product Designation	QUIRKY AIR		
Brand Name	QUIRKY		
Test Model	QKY-AIR		
Series Model QKY-AIR-5, QKY-AIR-5-BLK, EU-QKY-AIR, EU-QKY-AIR-5, EU-QKY			
Model Difference All the same except for the model name and different appearance co			
Date of receipt of test item	Jun. 14, 2023		
Date of test	Jun. 14, 2023 to Jun. 21, 2023		
Deviation None			
Condition of Test Sample Normal			
Test Result	Pass		
Report Template	AGCRT-US-BGN/RF		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with requirement of FCC Part 15 Rules requirement.

Prepared By	Cool cheng			
	Cool Cheng (Project Engineer)	Jul. 21, 2023		
Reviewed By	Calin Lin			
	Calvin Liu (Reviewer)	Jul. 21, 2023		
Approved By	Max Zhang			
	Max Zhang (Authorized Officer)	Jul. 21, 2023		



2. GENERAL INFORMATION

Report No.: AGC02170230701FR02 Page 5 of 24

2.1. PRODUCT DESCRIPTION

The EUT is designed as "QUIRKY AIR". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	5727 MHz~5800MHz
Output Power(Max)	9.21dBm
Modulation	GFSK
Number of channels	16
Hardware Version	V1.1
Software Version	V1.0
Antenna Designation	FPC Antenna
Number of transmit chain	1
Antenna Gain	0.5dBi
Power Supply	DC 3.7V by battery or DC 5V by adapter

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	Channel Number	Frequency	
	1	5727	9	5767	
	2	5731	10	5771	
	3 5734		11	5774	
5707 MILL 5000MILL	4	5738	12	5778	
5727 MHz~5800MHz	5	5749	13	5789	
	6	5753	14	5793	
	7	5756	15	5796	
	8	5760	16	5800	



Page 6 of 24

2.3. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2AANZAIR** filing to comply with the FCC Part 15 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

Others testing (listed at item 5.3) was performed according to the procedures in FCC Part 15.407 rules KDB 789033 D02

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 7 of 24

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±2.9 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.9 dB



4. DESCRIPTION OF TEST MODES

Report No.: AGC02170230701FR02 Page 8 of 24

Mode	Available channel	Tested channel	Date rate(Mbps)
GFSK	1~16	1,8,16	1

Note:


- 1. The EUT has been set to operate continuously on tested channel individually, and the EUT is operating at its maximum duty cycle>or equal 98%
- 2. All modes under which configure applicable have been tested and the worst mode test data recording in the test report, if no other mode data.
- 3. Use engineering instruction set the EUT into the individual test modes.



5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1:



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark	
1	QUIRKY AIR	QKY-AIR	2AANZAIR	EUT	
2	2 Xiaomi phone Mi 10		N/A	AE	
3	3 Huawei adapter HW-200325CP0		N/A	AE	

Report No.: AGC02170230701FR02

Page 9 of 24

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.209	Radiated Emission	Compliant
§15.207	Line Conduction Emission	Compliant



6. TEST FACILITY

Report No.: AGC02170230701FR02 Page 10 of 24

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Comm Fuhai Street, Bao'an District, Shenzhen, Guangdong, China	
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Jun. 03, 2023	Jun. 02, 2024
LISN	R&S	ESH2-Z5	100086	Jun. 03, 2023	Jun. 02, 2024
Test software	FARA	EZ-EMC (Ver. AGC- CON03A1)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
5GHz Fliter	EM Electronics	5150-5880MHz	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2023	Apr. 22, 2024
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 01, 2022	Sep. 02, 2024
ANTENNA	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2025
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



7. RADIATED EMISSION

Report No.: AGC02170230701FR02 Page 11 of 24


7.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3M VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




7.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

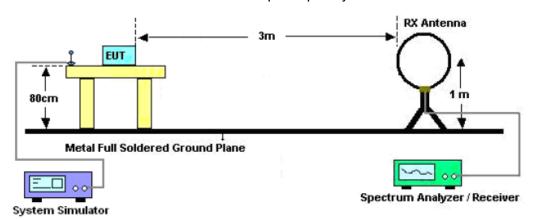

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

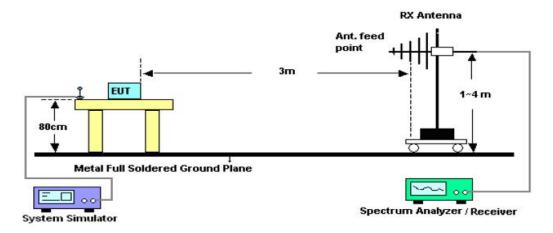

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

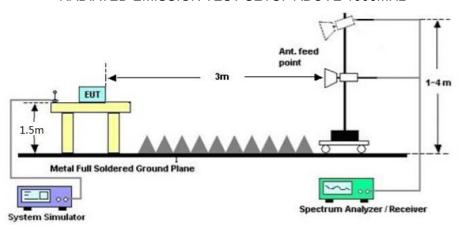

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 13 of 24

7.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ


No emission found between lowest internal used/generated frequencies to 30MHz.






RADIATED EMISSION BELOW 1GHZ

EUT	QUIRKY AIR	Model Name	QKY-AIR
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	5727MHz	Antenna	Horizontal

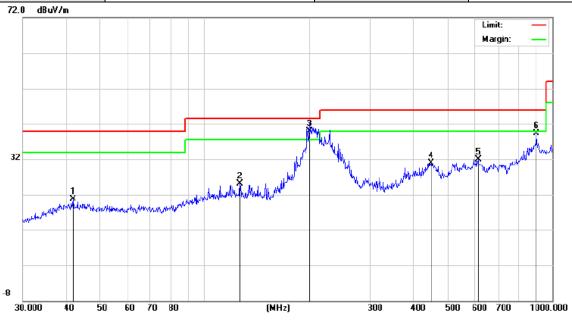


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		41.8596	6.97	13.77	20.74	40.00	-19.26	peak
2		126.3286	9.10	16.02	25.12	43.50	-18.38	peak
3	*	200.6881	25.38	14.50	39.88	43.50	-3.62	QP
4		447.9822	6.17	24.82	30.99	46.00	-15.01	peak
5		612.0642	6.73	25.16	31.89	46.00	-14.11	peak
6		900.1474	7.59	31.78	39.37	46.00	-6.63	peak

RESULT: PASS





EUT	QUIRKY AIR	Model Name	QKY-AIR
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	5727MHz	Antenna	Vertical

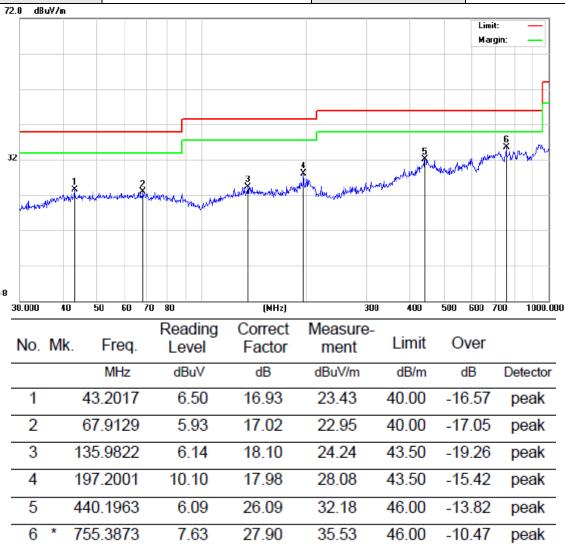

RESULT: PASS

Note: All test channels had been tested. The 5727MHz is the worst case and recorded in the test report. Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.



Page 16 of 24

RADIATED EMISSION ABOVE 1GHZ

EUT	QUIRKY AIR	Model Name	QKY-AIR
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	5727MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11454.062	46.34	9.42	55.76	74.00	-18.24	peak
11454.062	36.24	9.42	45.66	54.00	-8.34	AVG
17181.093 40.15 10.51 50.66 68.20 -17.54 peak						peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11454.062	46.35	9.42	55.77	74.00	-18.23	peak
11454.062	37.15	9.42	46.57	54.00	-7.43	AVG
17181.093	41.59	10.51	52.10	68.20	-16.10	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Page 17 of 24

EUT	QUIRKY AIR	Model Name	QKY-AIR
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	5760MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11520.062	46.25	9.42	55.67	74.00	-18.33	peak
11520.062	36.25	9.42	45.67	54.00	-8.33	AVG
17280.093 40.23 10.51 50.74 68.20 -17.46 peak						peak
Remark:						
Factor = Ante	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
11520.062	45.39	9.42	54.81	74.00	-19.19	peak
11520.062	36.94	9.42	46.36	54.00	-7.64	AVG
17280.093	41.97	10.51	52.48	68.20	-15.72	peak
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						



Page 18 of 24

EUT	QUIRKY AIR	Model Name	QKY-AIR
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	5800MHz	Antenna	Horizontal/Vertical

RADIATED EMISSION ABOVE 1GHZ-Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11600.062	46.34	9.62	55.96	74.00	-18.04	peak		
11600.062	35.18	9.62	44.80	54.00	-9.20	AVG		
17400.093	41.25	10.75	52.00	68.20	-16.20	peak		
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

RADIATED EMISSION ABOVE 1GHZ-Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type		
11600.062	45.29	9.62	54.91	74.00	-19.09	peak		
11600.062	37.48	9.62	47.10	54.00	-6.90	AVG		
17400.093 40.25 10.75 51.00 68.20 -17.20 peak								
Remark:								
Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

Note: Other frequencies radiation emission from 1GHz to 40GHz at least have 20dB margin and not recorded in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Margin= Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.



Page 19 of 24

8. FCC LINE CONDUCTED EMISSION TEST


8.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

8.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

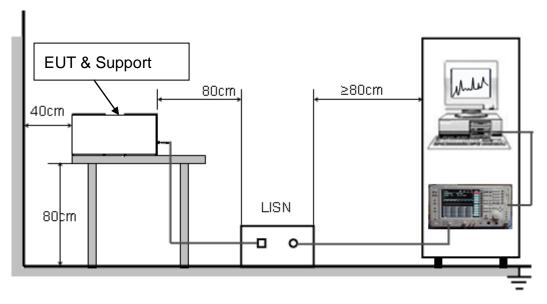



Page 20 of 24

8.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.



Page 21 of 24


8.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



8.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

LINE CONDUCTED EMISSION TEST-L

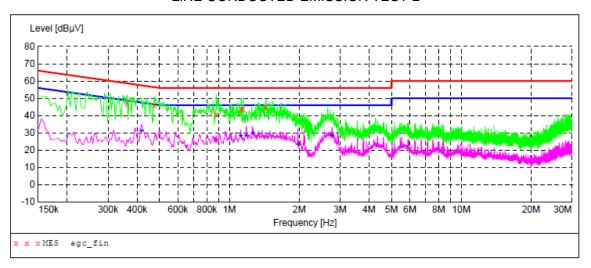

MEASUREMENT RESULT: "agc_fin"

2023/7/17 21:01

_	020///1/	01					
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
	0.362000	46.80	6.1	59	11.9	QP	L1
	0.474000	45.80	6.1	56	10.6	QP	L1
	0.878000	40.70	6.2	56	15.3	QP	L1
	1.126000	43.80	6.2	56	12.2	QP	L1
	1.146000	43.50	6.2	56	12.5	QP	L1
	1.438000	44.80	6.2	56	11.2	QP	L1

MEASUREMENT RESULT: "agc fin2"


2023/7/17 20:59

Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.410000	20.00	<i>c</i> 1		16.6		- 1
1.118000	28.40	6.2	48			L1 L1
1.186000	28.30	6.2	46	17.7	AV	L1
1.258000	29.50	6.2	46	16.5	AV	L1
1.978000	23.20	6.2	46	22.8	AV	L1
2.774000	28.20	6.3	46	17.8	AV	L1
	0.418000 1.118000 1.258000 1.978000	MHz dBμV 0.418000 30.90 1.118000 28.40 1.186000 28.30 1.258000 29.50 1.978000 23.20	Frequency MHz dBμV dB 0.418000 30.90 6.1 1.118000 28.40 6.2 1.186000 28.30 6.2 1.258000 29.50 6.2 1.978000 23.20 6.2	Frequency MHz dBμV dB dBμV 0.418000 30.90 6.1 48 1.118000 28.40 6.2 46 1.186000 28.30 6.2 46 1.258000 29.50 6.2 46 1.978000 23.20 6.2 46	Frequency MHz Level Transd Limit Margin dB dBμV dB dB dBμV dB dBμV dB dB dBμν dBμν	Frequency MHz Level Transd dBμV dB dBμV dB Detector dBμV dB dBμV dB l6.6 AV l.118000 28.40 6.2 46 17.6 AV l.186000 28.30 6.2 46 17.7 AV l.258000 29.50 6.2 46 16.5 AV l.978000 23.20 6.2 46 22.8 AV

RESULT: PASS



LINE CONDUCTED EMISSION TEST-N

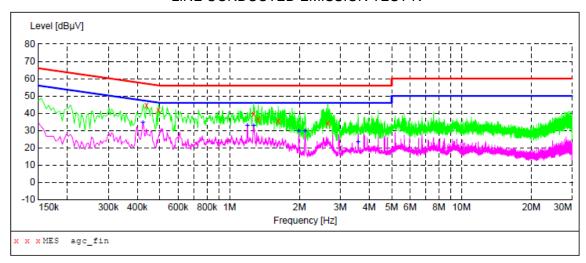

MEASUREMENT RESULT: "agc_fin"

2023/7/17 21:04

023/1/11 21.	04					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.438000	44.70	6.1	57	12.4	QP	N
0.494000	41.80	6.1	56	14.3	QP	N
1.270000	39.70	6.2	56	16.3	QP	N
1.330000	36.40	6.2	56	19.6	QP	N
1.622000	35.40	6.2	56	20.6	QP	N
2.654000	34.40	6.3	56	21.6	QP	N

MEASUREMENT RESULT: "agc fin2"

2023/7/17 21:03

123/1/11 21.	0.5					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.422000	34.70	6.1	47	12.7	AV	N
1.194000	32.70	6.2	46	13.3	AV	N
1.270000	32.90	6.2	46	13.1	AV	N
1.990000	29.70	6.2	46	16.3	AV	N
2.110000	29.50	6.2	46	16.5	AV	N
3.582000	23.30	6.3	46	22.7	AV	N
	Frequency MHz 0.422000 1.194000 1.270000 1.990000 2.110000	Frequency MHz dBμV 0.422000 34.70 1.194000 32.70 1.270000 32.90 1.990000 29.70 2.110000 29.50	Frequency MHz dBµV dB 0.422000 34.70 6.1 1.194000 32.70 6.2 1.270000 32.90 6.2 1.990000 29.70 6.2 2.110000 29.50 6.2	Frequency MHz dBμV dB dBμV 0.422000 34.70 6.1 47 1.194000 32.70 6.2 46 1.270000 32.90 6.2 46 1.990000 29.70 6.2 46 2.110000 29.50 6.2 46	Frequency MHz dBμV dB dBμV dB 0.422000 34.70 6.1 47 12.7 1.194000 32.70 6.2 46 13.3 1.270000 32.90 6.2 46 13.1 1.990000 29.70 6.2 46 16.3 2.110000 29.50 6.2 46 16.5	Frequency MHz Level Transd Limit Margin Detector dB μV dB dBμV dB Detector dB

RESULT: PASS

Note: All the test modes had been tested, the 5727MHz was the worst case. Only the data of the worst case would be record in this test report.



Page 24 of 24

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC02170230701AP01

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC02170230701AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.