



Shenzhen Certification Technologh Service Co., Ltd  
2F, Building B, East Area of Nanchang Second Industrial Zone,  
Gushu 2<sup>nd</sup> Road, Bao'an District, Shenzhen 518126, P.R. China

# TEST REPORT

**FCC ID: O5L-3DP**

**Applicant** **Delta Micro Factory Corporation**  
**Address** **Rm 1008, Tower A, Third Property Building, No.1 Shuguang Xili,  
Chaoyang District, Beijing, 100028, P.R.China**

**Equipment under Test (EUT):**

Name : UP! 3D Printer

Model : 3DP-14-4A, 3DP-14-4B, 3DP-14-4C, 3DP-10-4A, 3DP-16-4A

**Standards** : FCC PART 15, Subpart B Class B 2011  
**Report No.** : STE120509501

**Date of Test** : May 13-May 15, 2012

**Date of Issue** : May 16, 2012

<b>Test Result :</b>	<b>PASS *</b>
----------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above

Authorized Signature

A handwritten signature in black ink that appears to read 'Mark Zhu'.

(Mark Zhu)  
General Manager

The manufacture should ensure that all the products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of Shenzhen Certification Technology Service Co., Ltd. Or test done by Shenzhen Certification Technology Service Co., Ltd. Approvals in connection with, distribution or use of the product described in this report must be approved by Shenzhen Certification Technology Service Co., Ltd. Approvals in writing.

## TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
Test Report Declaration .....	3
1. <b>Summary of standards and results</b> .....	4
1.1. Description of Standards and Results.....	4
2. <b>GENERAL INFORMATION</b> .....	5
2.1. Description of Device (EUT) .....	5
2.2. Tested Supporting System Details .....	6
2.3. Block Diagram of connection between EUT and simulators .....	6
2.4. Test Facility .....	7
2.5. Measurement Uncertainty .....	7
3. <b>POWER LINE CONDUCTED Emission test</b> .....	8
3.1. Test Equipment.....	8
3.2. Block Diagram of Test Setup .....	8
3.3. Power Line Conducted Emission Test Limits .....	8
3.4. Configuration of EUT on Test.....	9
3.5. Operating Condition of EUT .....	9
3.6. Test Procedure .....	9
3.7. Conducted Disturbance at Mains Terminals Test Results.....	9
4. <b>Radiated emission Test</b> .....	14
4.1. Test Equipment.....	14
4.2. Block Diagram of Test Setup .....	14
4.3. Radiated Emission Limit .....	15
4.4. EUT Configuration on Test.....	15
4.5. Operating Condition of EUT .....	16
4.6. Test Procedure .....	16
4.7. Radiated Disturbance Test Results.....	16
5. <b>Photograph</b> .....	21
5.1. Photos of Power Line Conducted Emission Test .....	21
5.2. Photos of Radiated Emission Test (In Anechoic Chamber).....	22
6. <b>Photos of the EUT</b> .....	23

## TEST REPORT VERIFICATION

Applicant : Delta Micro Factory Corporation  
Manufacturer : Delta Micro Factory Corporation  
EUT Description : UP! 3D Printer

(A) Model No.	: 3DP-14-4A, 3DP-14-4B, 3DP-14-4C, 3DP-10-4A, 3DP-16-4A
(B) Trademark	: N/A
(C) Serial No.	: N/A
(D) Power Supply	: DC 19V From Adapter
(E) Test Voltage	: DC 19V From Adapter With AC 120V/60Hz

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart B Class B 2011

The device described above is tested by Shenzhen Certification Technology Service Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Certification Technology Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Certification Technology Service Co., Ltd.

## 1. SUMMARY OF STANDARDS AND RESULTS

### 1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION				
Description of Test Item	Standard	Limits	Results	
Power Line Conducted Emission Test	FCC Part 15: 2011 ANSI C63.4: 2003	Class B	PASS	Minimargin with respect to the limits: -7.36 dB at 13.17MHz
Radiated Emission Test	FCC Part 15: 2011 ANSI C63.4: 2003	Class B	PASS	Minimargin with respect to the limits: -3.10 dB at 44.55 MHz

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

Description : UP! 3D Printer

Model Number : 3DP-14-4A, 3DP-14-4B, 3DP-14-4C, 3DP-10-4A, 3DP-16-4A

DIFF : Only the appearance is not the same, as the other exactly the same.

Trademark : N/A

Power Supply : DC 19V From Adapter  
Adapter : Manufacturer: HP  
Model: series HSTNN-LA03

Highest frequency : Crystal frequency: 8MHz

Applicant : Delta Micro Factory Corporation  
Rm 1008, Tower A, Third Property Building, No.1 Shuguang Xili,  
Chaoyang District, Beijing, 100028, P.R.China

Manufacturer : Rm 1008, Tower A, Third Property Building, No.1 Shuguang Xili,  
Chaoyang District, Beijing, 100028, P.R.China  
Rm 1008, Tower A, Third Property Building, No.1 Shuguang Xili,


Date of Test : May 13-May 15, 2012

Sample Type : Series production

## 2.2. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1.	Personal Computer	ACER	ASPIRE M1830	PTSF90C00305005CAC3000
2.	Monitor	ACER	G205HV	SNID:10306738385
3.	USB Keyboard	ACER	SK-9625	KBUSB1580500037E0100
4.	USB Mouse	ACER	MS.11200.014	M-UAY-ACR2
5.	Printer	HP	HP1020	CNCJ410726

## 2.3. Block Diagram of connection between EUT and simulators

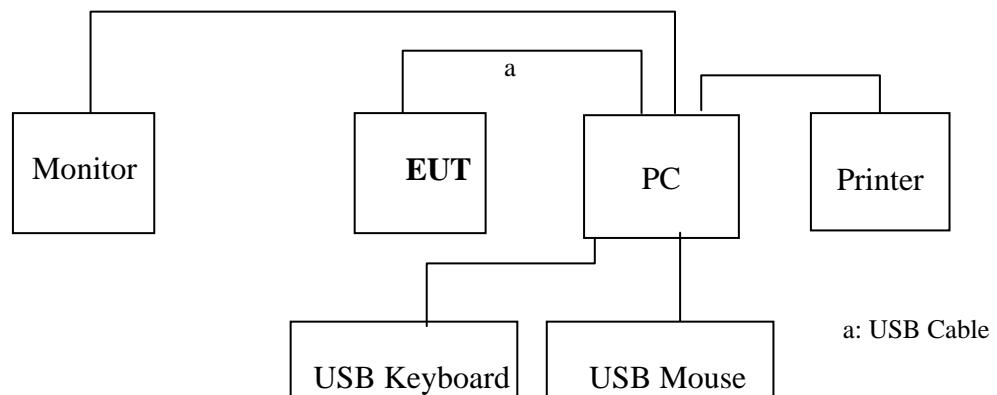

※ EUT: UP! 3D Printer

## 2.4. Test Facility

JAN 13, 2012 File on Federal Communication Commission  
Registration Number: 197647

October 11, 2011 Certificated by IC  
Registration Number: 8528B

## 2.5. Measurement Uncertainty

(95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test	2.50dB
Uncertainty for Radiation Emission test	3.04 dB (Distance: 3m Polarize: V)
	3.02 dB (Distance: 3m Polarize: H)
Uncertainty for test site temperature and humidity	0.6°C
	3%

### 3. POWER LINE CONDUCTED EMISSION TEST

#### 3.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde&Schwarz	ESCI	1166.5950K03 -1011	Oct. 17, 11	1 Year
2.	L.I.S.N.	Schwarzbeck	NSLK8126	8126466	Oct. 17, 11	1 Year
3.	L.I.S.N.-2	Kyoritsu	KNW-407	8-1628-5	Oct. 17, 11	1 Year
4.	Terminator	Hubersuhner	50Ω	No. 1	Oct. 17, 11	1 Year
5.	RF Cable	Schwarzbeck	9111505/20 0	5995-12-161-6 890#	Oct. 17, 11	1 Year
6.	Coaxial Switch	Schwarzbeck	CX-210	N/A	Oct. 17, 11	1 Year
7.	Pulse Limiter	Schwarzbeck	VTSD9516 F	9618	Oct. 17, 11	1 Year

#### 3.2. Block Diagram of Test Setup

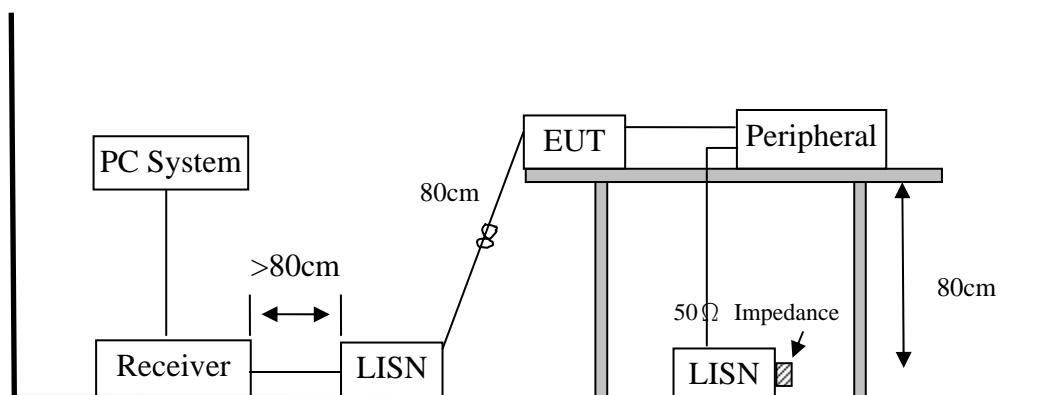

#### 3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(µV)	Average Level dB(µV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. Emission level=Read level+ LISN factor+Preamp factor+ Cable loss

2\* Decreasing linearly with logarithm of frequency.

3. The lower limit shall apply at the transition frequencies.

### 3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

Support Equipments : As Tested Supporting System Detail, in Section 2.2.

### 3.5. Operating Condition of EUT

- 3.5.1. Setup the EUT and simulator as shown as Section 3.2.
- 3.5.2. Turn on the power of all equipment.
- 3.5.3. Let the EUT work in test mode (Link PC) and measure it.

### 3.6. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N. #2), this provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4-2003 on conducted Emission test.

The bandwidth of test receiver (R&S TEST RECEIVER ESCI) is set at 10kHz.

The frequency range from 150KHz to 30MHz is checked. The test result are reported on Section 3.7.

### 3.7. Conducted Disturbance at Mains Terminals Test Results

**PASS.** (All emissions not reported below are too low against the prescribed limits.)

The EUT with the following test mode was tested and read Q.P values and average values, the test results are listed in next pages.


Temperature: 29.5°C      Humidity: 55%

The details of test mode is as follows :

No.	Test Mode
1.	Transmission data
2.	Print data



Shenzhen Certification Technology Service Co., Ltd.  
2F, Building B, East Area of Nanchang Second Industrial Zone,  
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
Tel: 4006786199 Fax: +86-755-26736857  
Website: <http://www.cessz.com> Email: [Service@cessz.com](mailto:Service@cessz.com)

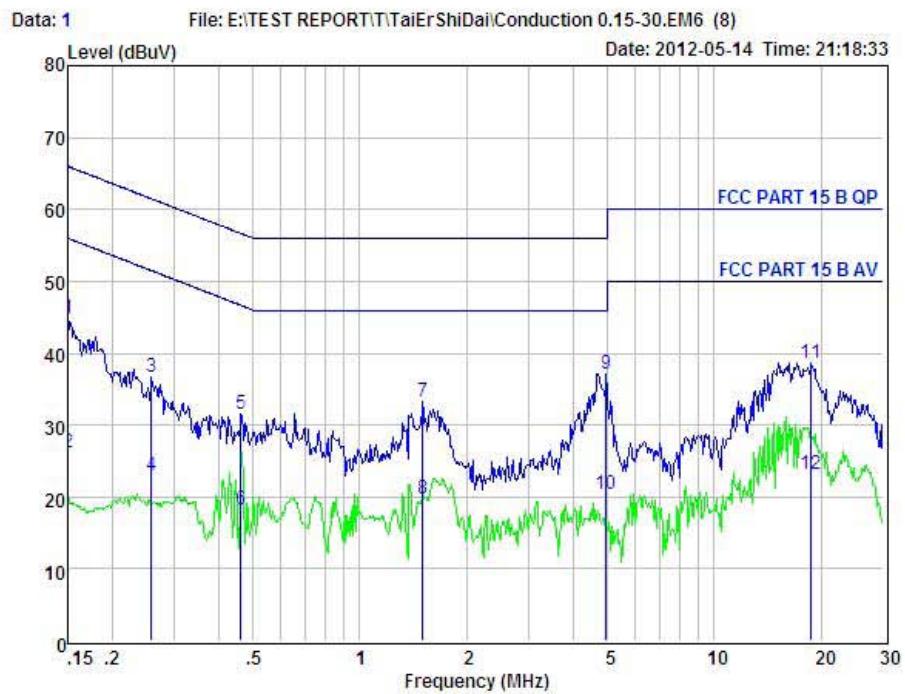


Condition : FCC PART 15 B QP  
EUT : UP!3D Printer  
Model No. : 3DP-14-4A  
Test Mode : Copy Data  
Power : AC 120V/60Hz  
Test Engineer: Store  
Remark :

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	dB	dBuV	dBuV	dBuV	
1	0.150	34.93	0.03	-9.72	0.10	44.78	66.00	-21.22	QP
2	0.150	16.31	0.03	-9.72	0.10	26.16	56.00	-29.84	Average
3	0.259	26.90	0.03	-9.72	0.10	36.75	61.47	-24.72	QP
4	0.259	13.07	0.03	-9.72	0.10	22.92	51.47	-28.55	Average
5	0.461	21.75	0.03	-9.72	0.10	31.60	56.67	-25.07	QP
6	0.461	8.45	0.03	-9.72	0.10	18.30	46.67	-28.37	Average
7	1.503	23.47	0.05	-9.71	0.10	33.33	56.00	-22.67	QP
8	1.503	9.78	0.05	-9.71	0.10	19.64	46.00	-26.36	Average
9	4.952	27.24	0.10	-9.68	0.12	37.14	56.00	-18.86	QP
10	4.952	10.44	0.10	-9.68	0.12	20.34	46.00	-25.66	Average
11	18.820	28.60	0.31	-9.46	0.33	38.70	60.00	-21.30	QP
12	18.820	12.98	0.31	-9.46	0.33	23.08	50.00	-26.92	Average



Shenzhen Certification Technology Service Co., Ltd.  
2F, Building B, East Area of Nanchang Second Industrial Zone,  
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
Tel: 4006786199 Fax: +86-755-26736857  
Website: <http://www.cessz.com> Email: [Service@cessz.com](mailto:Service@cessz.com)

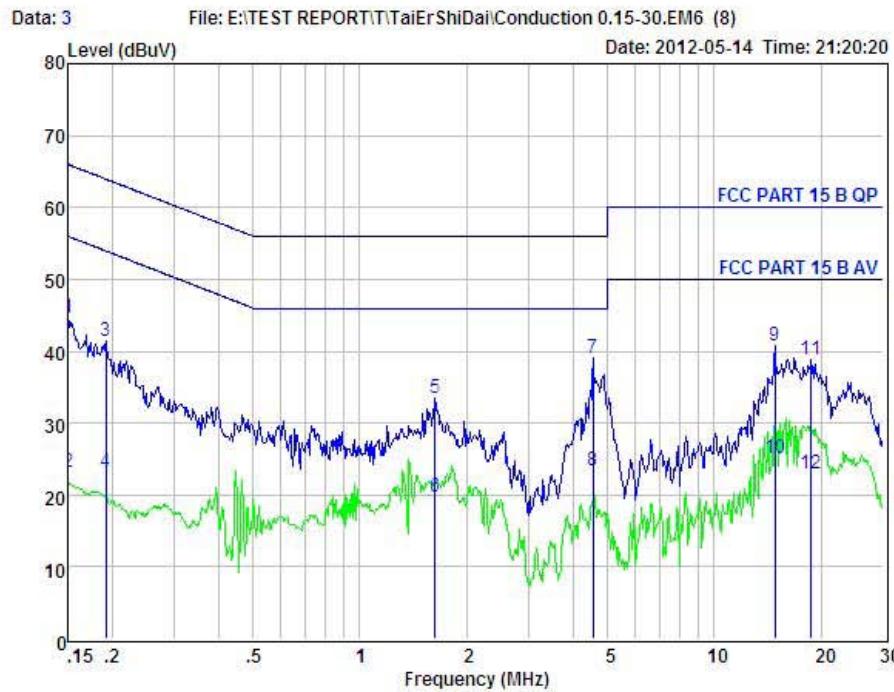


Condition : FCC PART 15 B QP POL: NEUTRAL  
 EUT : UP!3D Printer  
 Model No. : 3DP-14-4A  
 Test Mode : Copy Data  
 Power : AC 120V/60Hz  
 Test Engineer: Store  
 Remark :

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	dB	dBuV	dBuV	dBuV	
1	0.150	34.84	0.03	-9.72	0.10	44.69	66.00	-21.31	QP
2	0.150	13.39	0.03	-9.72	0.10	23.24	56.00	-32.76	Average
3	0.192	31.63	0.03	-9.72	0.10	41.48	63.93	-22.45	QP
4	0.192	13.30	0.03	-9.72	0.10	23.15	53.93	-30.78	Average
5	1.628	23.57	0.05	-9.71	0.10	33.43	56.00	-22.57	QP
6	1.628	9.77	0.05	-9.71	0.10	19.63	46.00	-26.37	Average
7	4.549	29.12	0.09	-9.68	0.12	39.01	56.00	-16.99	QP
8	4.549	13.44	0.09	-9.68	0.12	23.33	46.00	-22.67	Average
9	14.828	30.98	0.24	-9.39	0.23	40.84	60.00	-19.16	QP
10	14.828	15.24	0.24	-9.39	0.23	25.10	50.00	-24.90	Average
11	18.820	28.79	0.30	-9.46	0.33	38.88	60.00	-21.12	QP
12	18.820	12.80	0.30	-9.46	0.33	22.89	50.00	-27.11	Average



Shenzhen Certification Technology Service Co., Ltd.  
2F, Building B, East Area of Nanchang Second Industrial Zone,  
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
Tel: 4006786199 Fax: +86-755-26736857  
Website: <http://www.cessz.com> Email: [Service@cessz.com](mailto:Service@cessz.com)

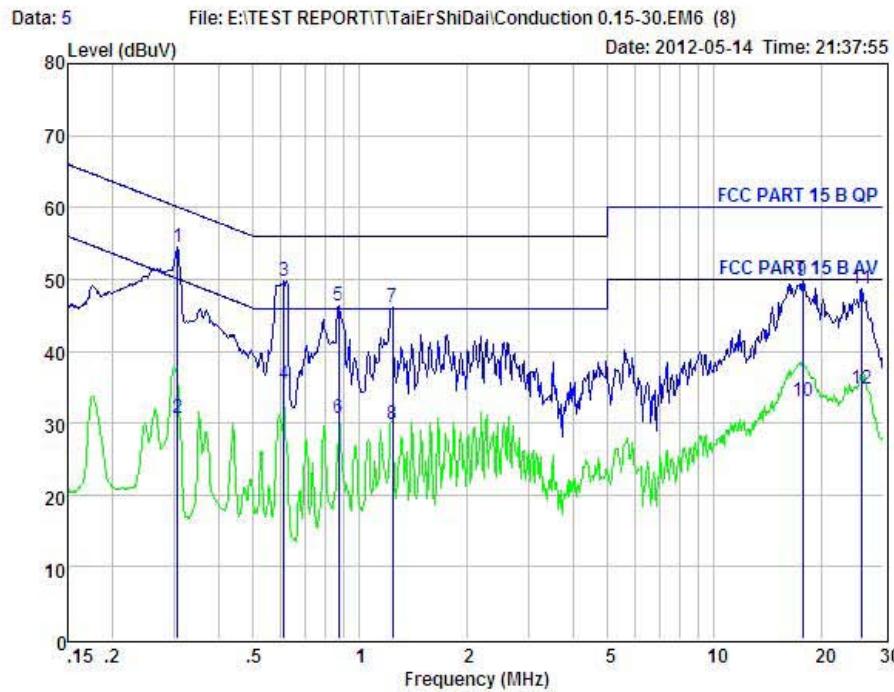


Condition : FCC PART 15 B QP POL: NEUTRAL  
 EUT : UP!3D Printer  
 Model No. : 3DP-14-4A  
 Test Mode : Print  
 Power : AC 120V/60Hz  
 Test Engineer: Store  
 Remark :

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	dB	dB	dBuV	dBuV	
1	0.307	44.59	0.03	-9.72	0.10	54.44	60.06	-5.62	QP
2	0.307	20.85	0.03	-9.72	0.10	30.70	50.06	-19.36	Average
3	0.611	39.94	0.03	-9.72	0.10	49.79	56.00	-6.21	QP
4	0.611	25.45	0.03	-9.72	0.10	35.30	46.00	-10.70	Average
5	0.871	36.39	0.04	-9.71	0.10	46.24	56.00	-9.76	QP
6	0.871	20.84	0.04	-9.71	0.10	30.69	46.00	-15.31	Average
7	1.236	36.29	0.04	-9.71	0.10	46.14	56.00	-9.86	QP
8	1.236	19.89	0.04	-9.71	0.10	29.74	46.00	-16.26	Average
9	17.755	39.69	0.29	-9.44	0.31	49.73	60.00	-10.27	QP
10	17.755	22.89	0.29	-9.44	0.31	32.93	50.00	-17.07	Average
11	26.139	38.12	0.46	-9.65	0.52	48.75	60.00	-11.25	QP
12	26.139	24.02	0.46	-9.65	0.52	34.65	50.00	-15.35	Average



Shenzhen Certification Technology Service Co., Ltd.  
2F, Building B, East Area of Nanchang Second Industrial Zone,  
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
Tel: 4006786199 Fax: +86-755-26736857  
Website: <http://www.cessz.com> Email: [Service@cessz.com](mailto:Service@cessz.com)

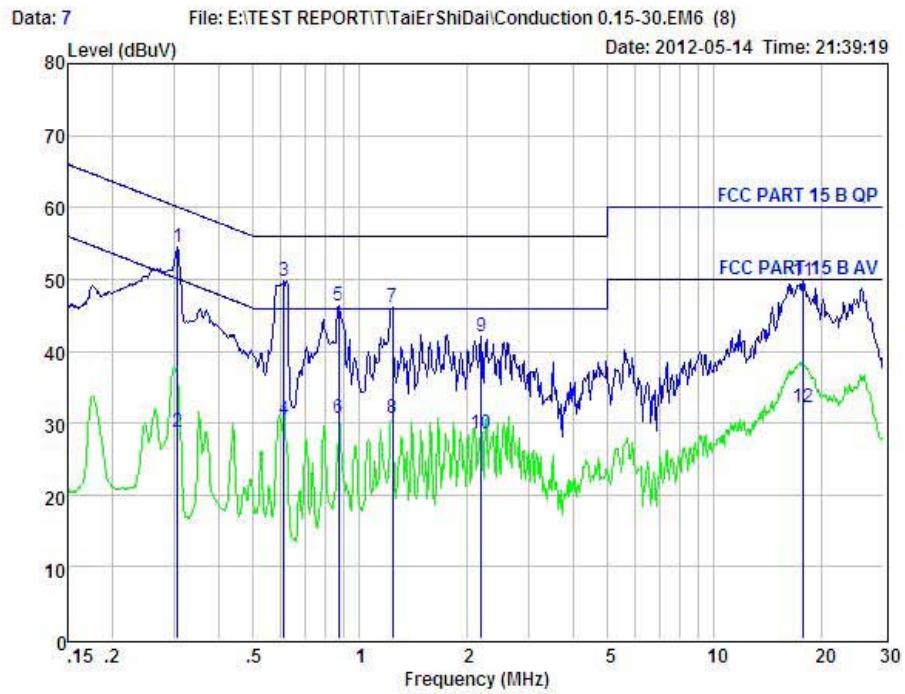

Condition : FCC PART 15 B QP POL: LINE  
 EUT : UP!3D Printer  
 Model No. : 3DP-14-4A  
 Test Mode : Print  
 Power : AC 120V/60Hz  
 Test Engineer: Store  
 Remark :

Item	Freq	Read	LISN	Preamp	Cable	Level	Limit	Margin	Remark
	MHz	dBuV	Factor	Factor	dB	dB	dBuV	dBuV	
1	0.307	44.59	0.03	-9.72	0.10	54.44	60.06	-5.62	QP
2	0.307	18.85	0.03	-9.72	0.10	28.70	50.06	-21.36	Average
3	0.611	39.94	0.03	-9.72	0.10	49.79	56.00	-6.21	QP
4	0.611	20.50	0.03	-9.72	0.10	30.35	46.00	-15.65	Average
5	0.871	36.39	0.04	-9.71	0.10	46.24	56.00	-9.76	QP
6	0.871	20.84	0.04	-9.71	0.10	30.69	46.00	-15.31	Average
7	1.236	36.29	0.04	-9.71	0.10	46.14	56.00	-9.86	QP
8	1.236	20.88	0.04	-9.71	0.10	30.73	46.00	-15.27	Average
9	2.201	32.16	0.06	-9.70	0.10	42.02	56.00	-13.98	QP
10	2.201	18.56	0.06	-9.70	0.10	28.42	46.00	-17.58	Average
11	17.755	39.69	0.30	-9.44	0.31	49.74	60.00	-10.26	QP
12	17.755	22.09	0.30	-9.44	0.31	32.14	50.00	-17.86	Average

## 4. RADIATED EMISSION TEST

### 4.1. Test Equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde&Schwarz	ESCI	1166.5950K06-1012	Oct. 17, 11	1 Year
2	Amplifier	Schwarzbeck	BBV9743	9743-019	Oct. 17, 11	1 Year
3	Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	Feb. 10, 12	1 Year
4	RF Cable	Schwarzbeck	AK9515E	95891-2m	Oct. 17, 11	1 Year
5	RF Cable	Schwarzbeck	AK9515E	95891-11m	Oct. 17, 11	1 Year
6	RF Cable	Schwarzbeck	AK9515E	95891-0.5m	Oct. 17, 11	

For frequency range 1GHz~5GHz (At Semi Anechoic Chamber)


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Spectrum Analyzer	Agilent	E4446A	US44300459	Oct. 17, 11	1 Year
2	Horn Antenna	EMCO	BBV9743	9743-019	Feb. 10, 12	1 Year
3	Amplifier	Schwarzbeck	SCHWARZBEC K	N/A	Oct. 17, 11	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX102	28620/2	Oct. 17, 11	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX102	271471/4	Oct. 17, 11	1 Year
6	RF Cable	Hubersuhner	SUCOFLEX102	29086/2	Oct. 17, 11	1 Year

### 4.2. Block Diagram of Test Setup

#### 4.2.1. In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

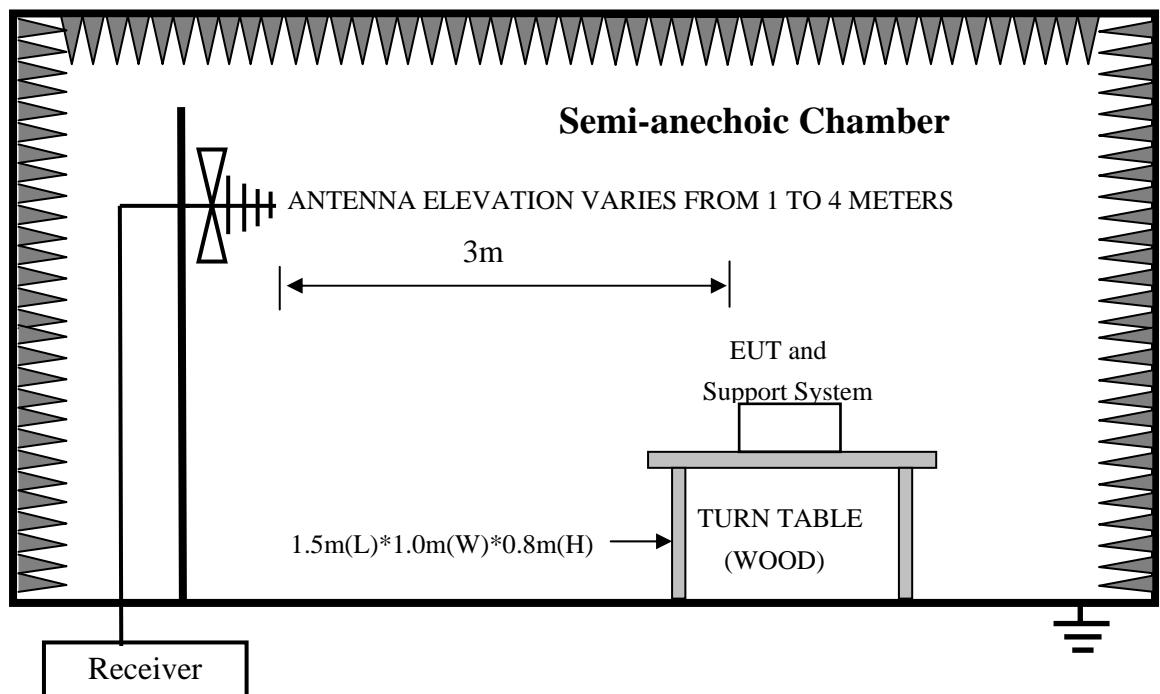

## 4.2.2. In Semi Anechoic Chamber (3m) Test Setup Diagram for 1-5GHz

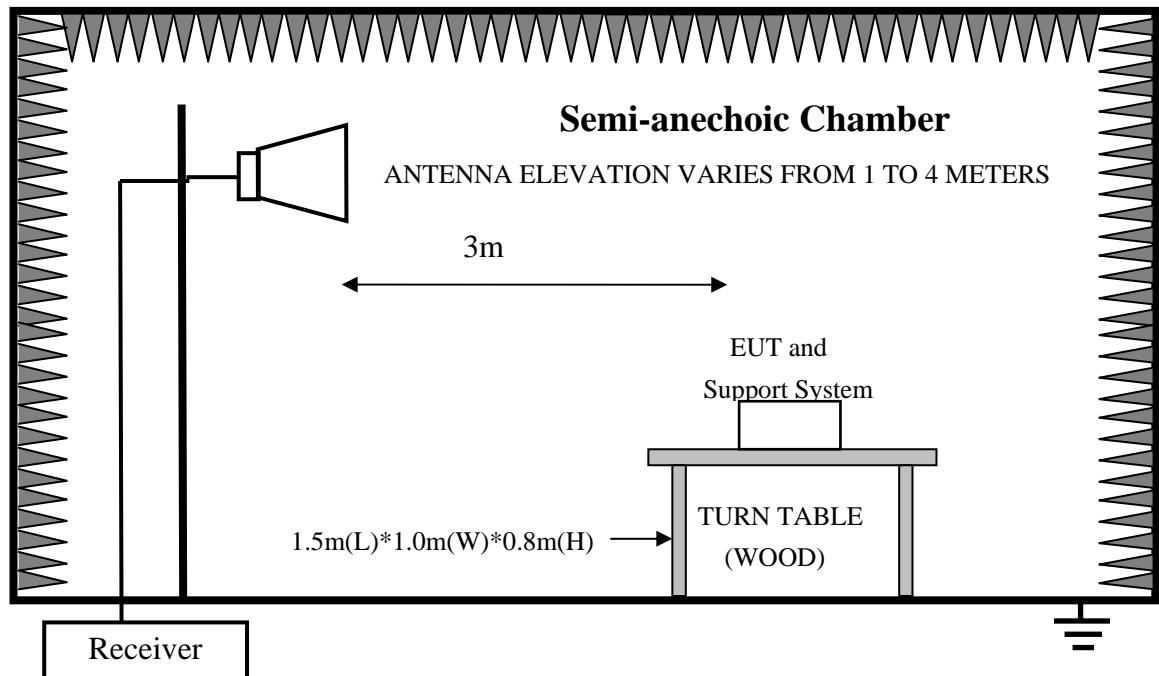

## 4.3. Radiated Emission Limit

Frequency MHz	Distance (Meters)	Field Strengths Limits dB( $\mu$ V)/m
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
960 ~ 1000	3	54.0
1000 ~ 5000	3	74(Peak) 54(Average)

Remark: (1) Emission level = Read level + Antenna Factor + Preamp Factor + Cable Loss  
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 4.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner that tends to maximize its emission characteristics in normal application.

## 4.4.1. Support Equipments : As Tested Supporting System Detail, in Section 2.2.

#### 4.5. Operating Condition of EUT

- 4.5.1. Setup the EUT as shown in Section 4.2.
- 4.5.2. Turn on the power of all equipment.
- 4.5.3. Let the EUT work in test mode (Link PC) and test it.

#### 4.6. Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4-2003 on Radiated Emission test.

The bandwidth setting on the test receiver (ROHDE&SCHWARZ TEST RECEIVER ESCI) is 120 kHz.

The resolution bandwidth of the Agilent Spectrum Analyzer E4446A was set at 1MHz. (For above 1GHz)

The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values.

The frequency range from 1GHz to 5GHz was checked with peak and average detector, measurement distance is 3m in 3m chamber.

Finally, selected operating situations at Anechoic Chamber measurement, all the test results are listed in section 4.7.

#### 4.7. Radiated Disturbance Test Results

**PASS.** (All emissions not reported below are too low against the prescribed limits.)

**For frequency range 30MHz~1000MHz**

The EUT with the following test mode was tested and read Q.P values, all the test results listed in next pages.

Temperature: 24°C      Humidity: 56%

The details of test mode is as follows :


NO.	Test Mode
1.	Transmission data
2.	Print data

**For frequency range above 1GHz**

The highest frequency of the internal sources of the EUT is Crystal frequency is 8 MHz less than 108 MHz, the measurement shall only be made up to 1 GHz. So the frequency above 1GHz radiation test not applicable.



Shenzhen Certification Technology Service Co., Ltd.  
2F, Building B, East Area of Nanchang Second Industrial Zone,  
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
Tel: 4006786199 FAX: +86-755-26736857  
Website: <http://www.cessz.com> Email: [Service@cessz.com](mailto:Service@cessz.com)

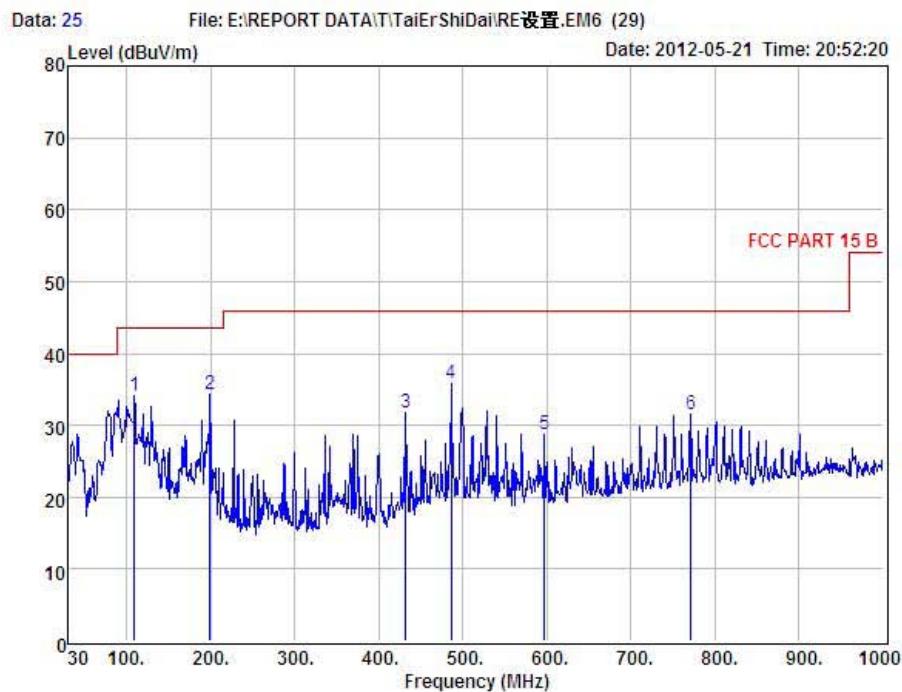


Condition : FCC PART 15 B 3m POL: VERTICAL  
 EUT : UPI3D Printer  
 Model No. : 3DP-14-4A  
 Test Mode : Copy Data  
 Power : AC 120V/60Hz  
 Test Engineer : Store  
 Remark :

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Lose	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	109.54	48.85	11.13	26.86	0.92	34.04	43.50	-9.46	QP
2	198.78	49.98	10.01	26.97	1.39	34.41	43.50	-9.09	QP
3	431.58	40.99	15.53	27.46	2.63	31.69	46.00	-14.31	QP
4	485.90	44.17	16.33	27.58	2.92	35.84	46.00	-10.16	QP
5	597.45	35.13	18.28	27.82	3.19	28.78	46.00	-17.22	QP
6	771.08	35.12	20.50	27.67	3.54	31.49	46.00	-14.51	QP



Shenzhen Certification Technology Service Co., Ltd.  
2F, Building B, East Area of Nanchang Second Industrial Zone,  
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
Tel: 4006786199 FAX: +86-755-26736857  
Website: <http://www.cessz.com> Email: [Service@cessz.com](mailto:Service@cessz.com)

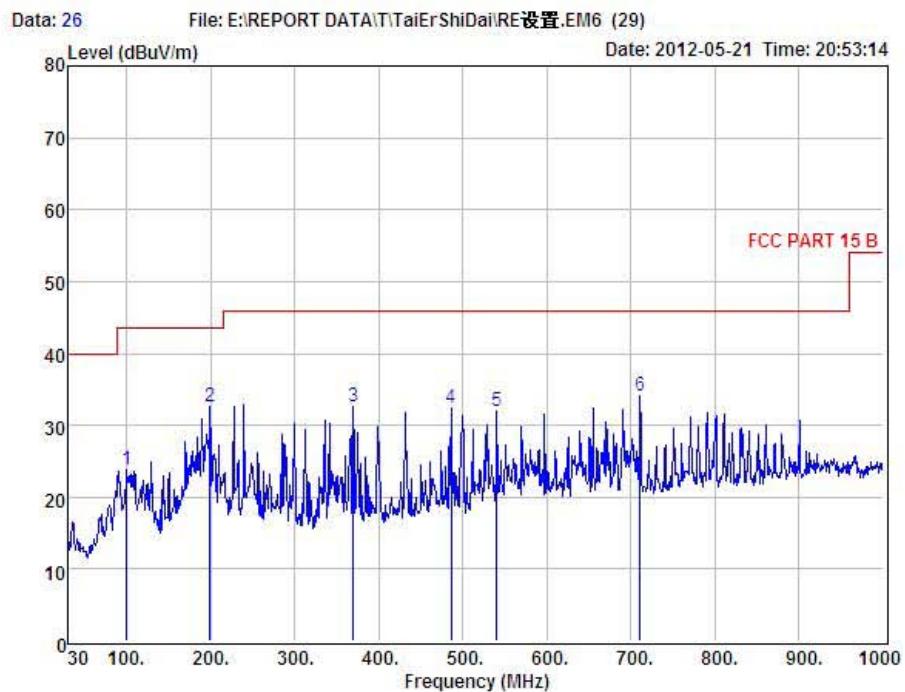


Condition : FCC PART 15 B 3m POL: HORIZONTAL  
 EUT : UPI3D Printer  
 Model No. : 3DP-14-4A  
 Test Mode : Copy Data  
 Power : AC 120V/60Hz  
 Test Engineer : Store  
 Remark :

Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Lose dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	99.84	39.53	10.15	26.84	0.86	23.70	43.50	-19.80	QP
2	198.78	48.23	10.01	26.97	1.39	32.66	43.50	-10.84	QP
3	369.50	43.36	14.24	27.33	2.30	32.57	46.00	-13.43	QP
4	485.90	40.76	16.33	27.58	2.92	32.43	46.00	-13.57	QP
5	540.22	39.44	17.22	27.69	3.08	32.05	46.00	-13.95	QP
6	710.94	38.56	19.79	27.74	3.42	34.03	46.00	-11.97	QP



Shenzhen Certification Technology Service Co., Ltd.  
2F, Building B, East Area of Nanchang Second Industrial Zone,  
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
Tel: 4006786199 FAX: +86-755-26736857  
Website: <http://www.cessz.com> Email: [Service@cessz.com](mailto:Service@cessz.com)

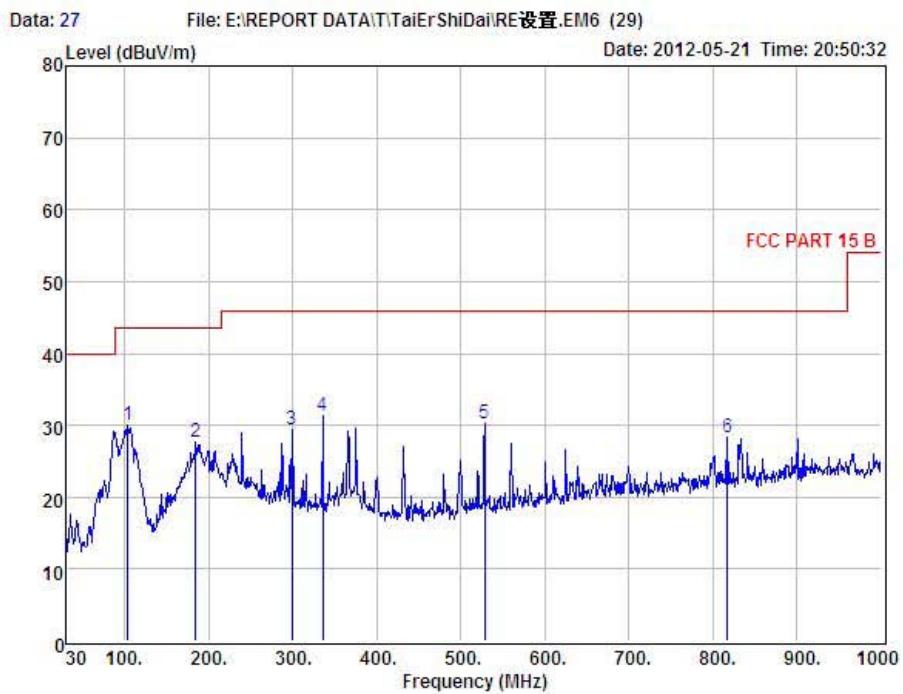


Condition : FCC PART 15 B 3m POL: HORIZONTAL  
 EUT : UPI3D Printer  
 Model No. : 3DP-14-4A  
 Test Mode : Print  
 Power : AC 120V/60Hz  
 Test Engineer : Store  
 Remark :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	103.72	45.54	10.54	26.85	0.88	30.11	43.50	-13.39	QP
2	184.23	42.01	11.20	26.94	1.31	27.58	43.50	-15.92	QP
3	298.69	41.80	12.80	27.19	1.92	29.33	46.00	-16.67	QP
4	335.55	42.78	13.58	27.24	2.12	31.24	46.00	-14.76	QP
5	528.58	37.76	17.03	27.68	3.06	30.17	46.00	-15.83	QP
6	816.67	31.45	20.80	27.67	3.63	28.21	46.00	-17.79	QP



Shenzhen Certification Technology Service Co., Ltd.  
2F, Building B, East Area of Nanchang Second Industrial Zone,  
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China  
Tel: 4006786199 FAX: +86-755-26736857  
Website: <http://www.cessz.com> Email: [Service@cessz.com](mailto:Service@cessz.com)

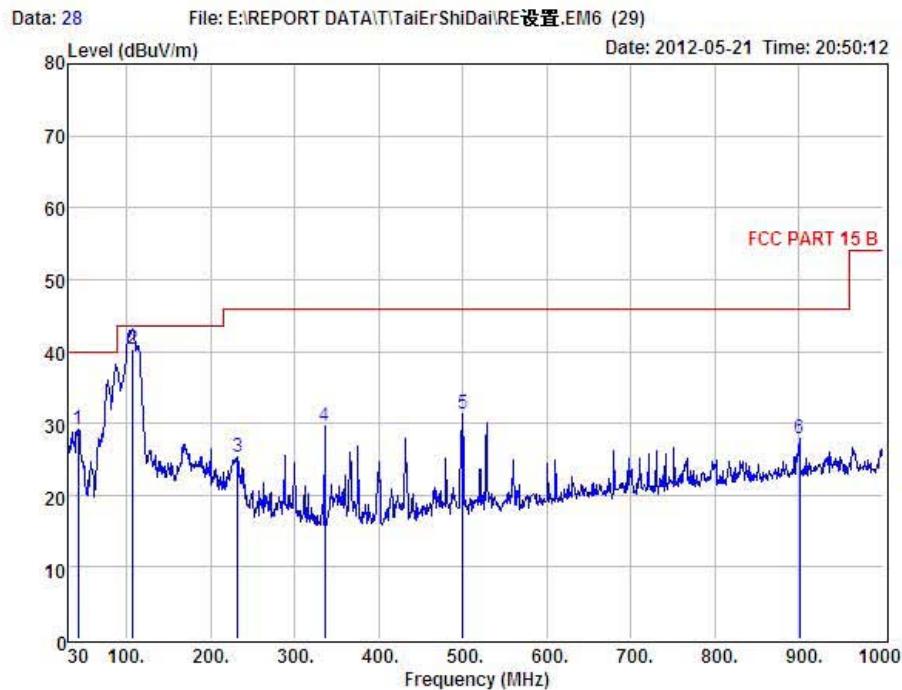

Condition : FCC PART 15 B 3m POL: VERTICAL  
 EUT : UPI3D Printer  
 Model No. : 3DP-14-4A  
 Test Mode : Print  
 Power : AC 120V/60Hz  
 Test Engineer : Store  
 Remark :


Item	Freq	Read Level	Antenna Factor	Preamp Factor	Cable Lose	Level	Limit	Margin	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dBuV	
1	42.61	42.50	13.93	27.81	0.56	29.18	40.00	-10.82	QP
2	107.50	55.25	10.93	26.86	0.91	40.23	43.50	-3.27	QP
3	231.76	39.65	11.26	27.08	1.57	25.40	46.00	-20.60	QP
4	335.55	41.10	13.58	27.24	2.12	29.56	46.00	-16.44	QP
5	499.48	39.48	16.51	27.62	2.99	31.36	46.00	-14.64	QP
6	900.09	30.11	21.64	27.64	3.80	27.91	46.00	-18.09	QP

## 5. PHOTOGRAPH

### 5.1. Photos of Power Line Conducted Emission Test




## 5.2.Photos of Radiated Emission Test (In Anechoic Chamber)

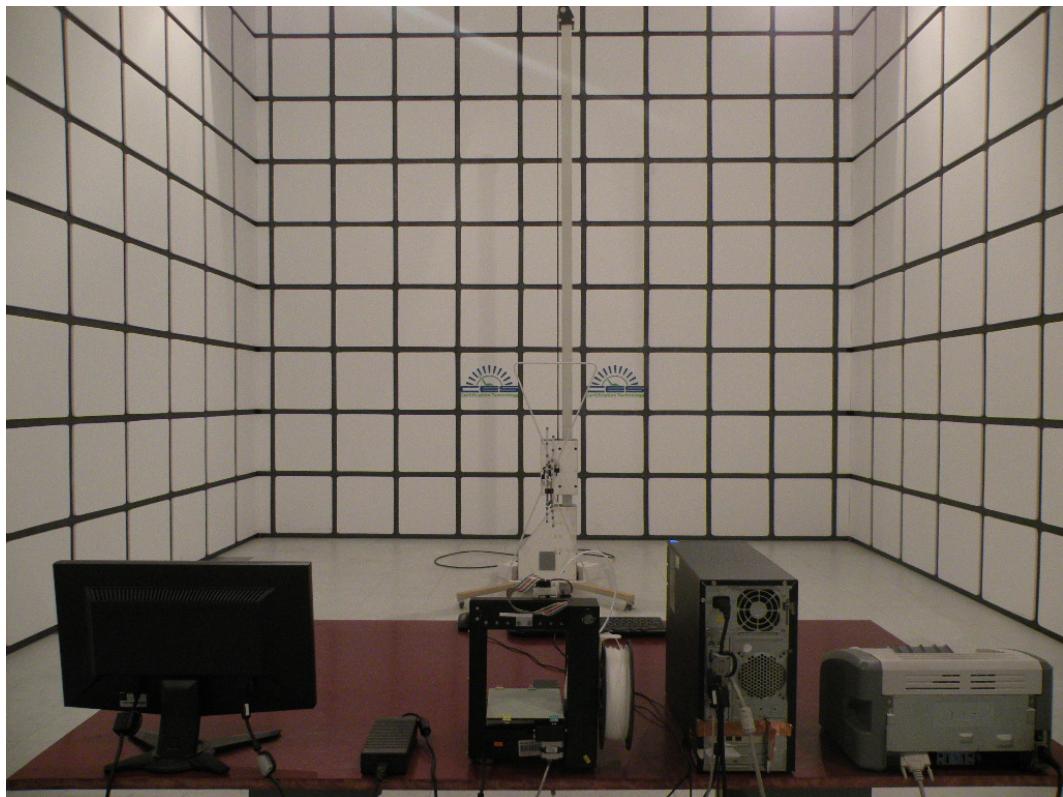


## 6. PHOTOS OF THE EUT

**Full View**

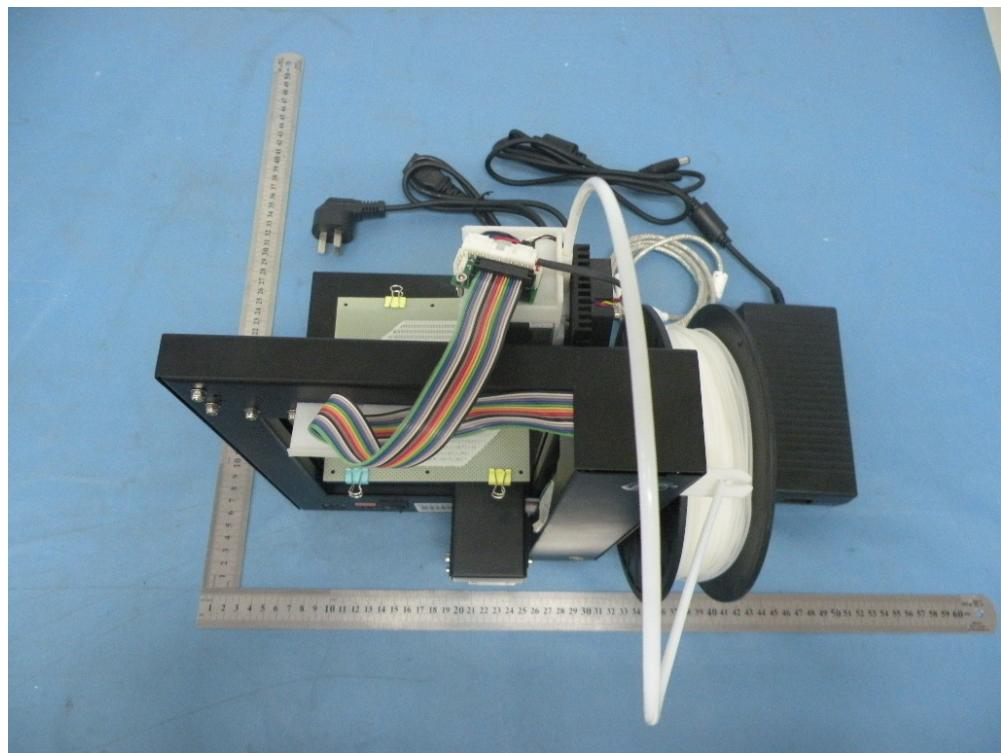


**Top View**

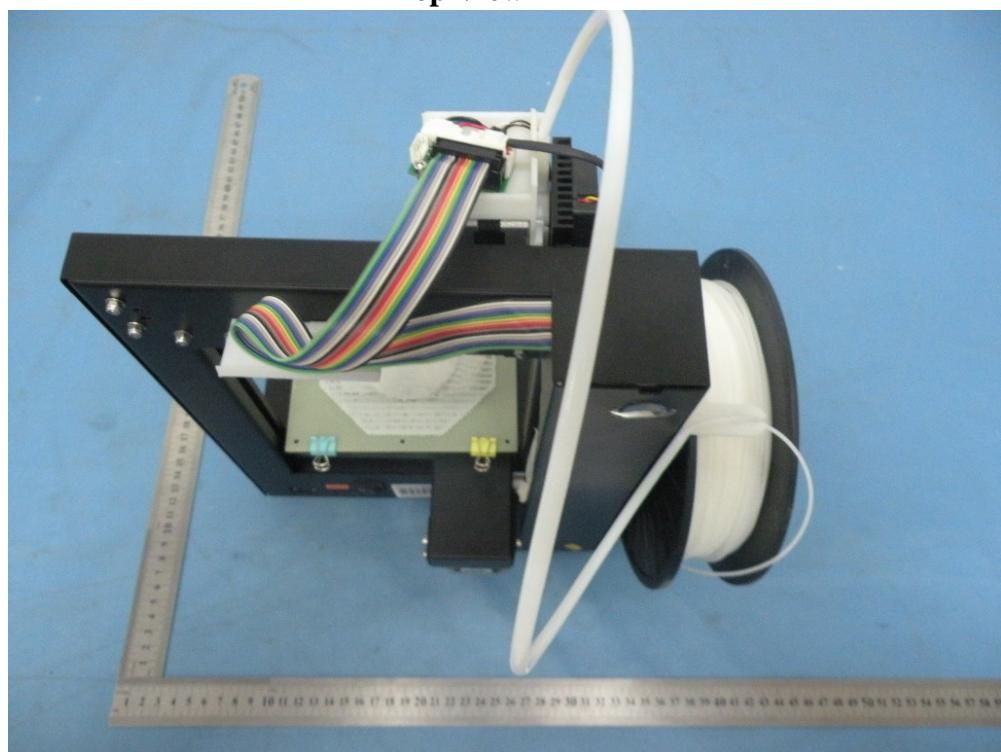


**Bottom View**




**Rear View**

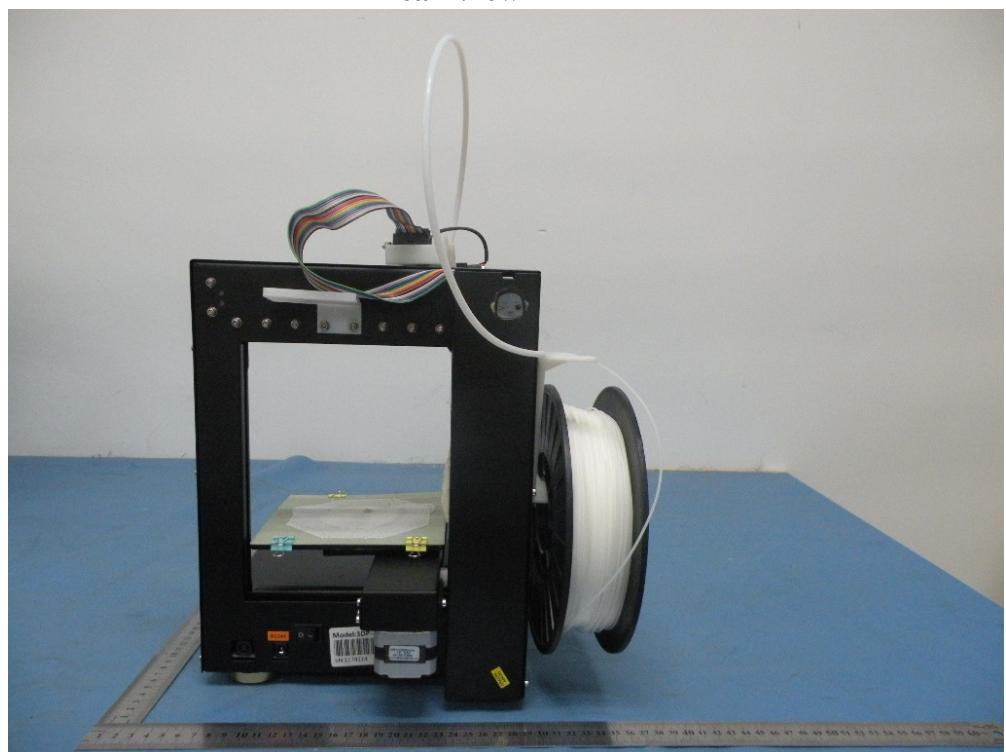


**Left View**

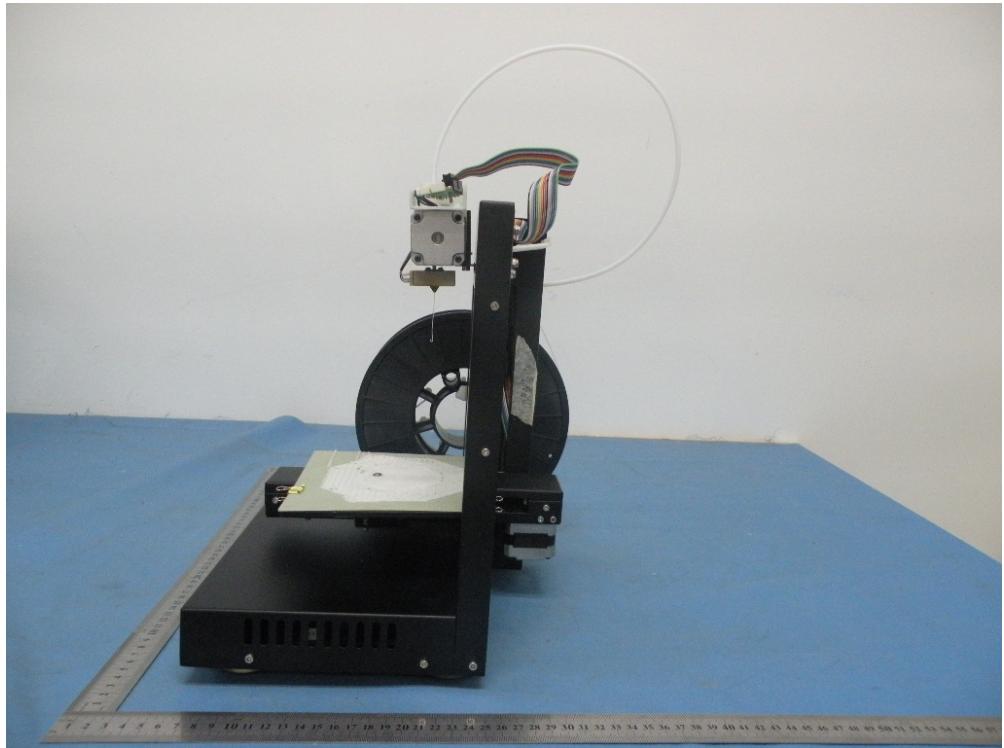


**Right View**


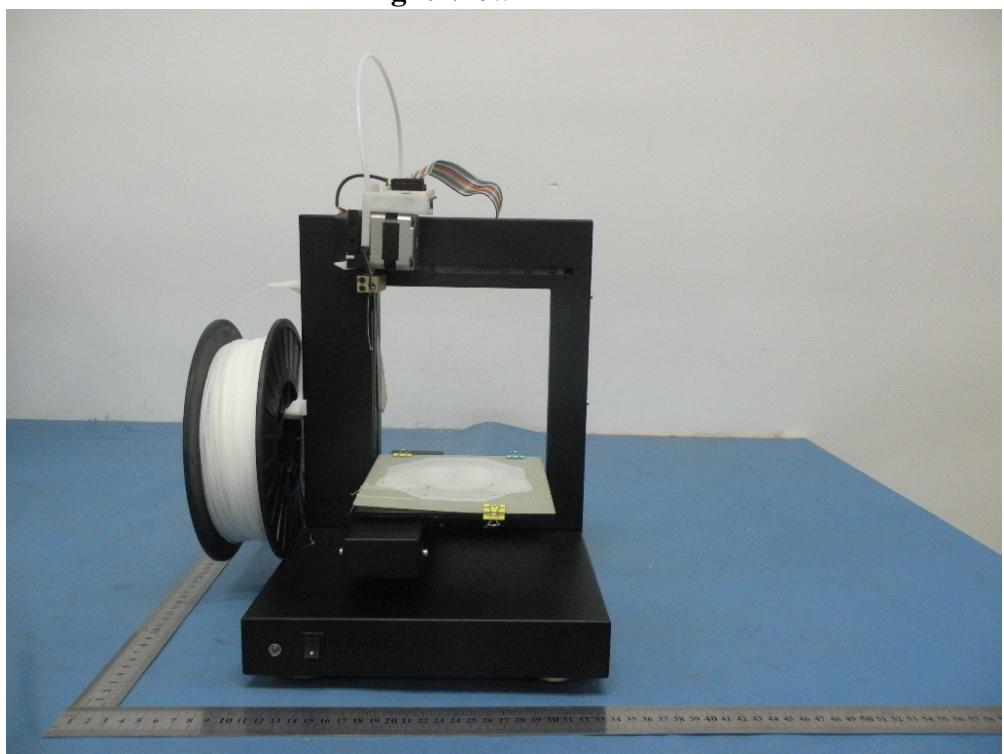




**Front View**

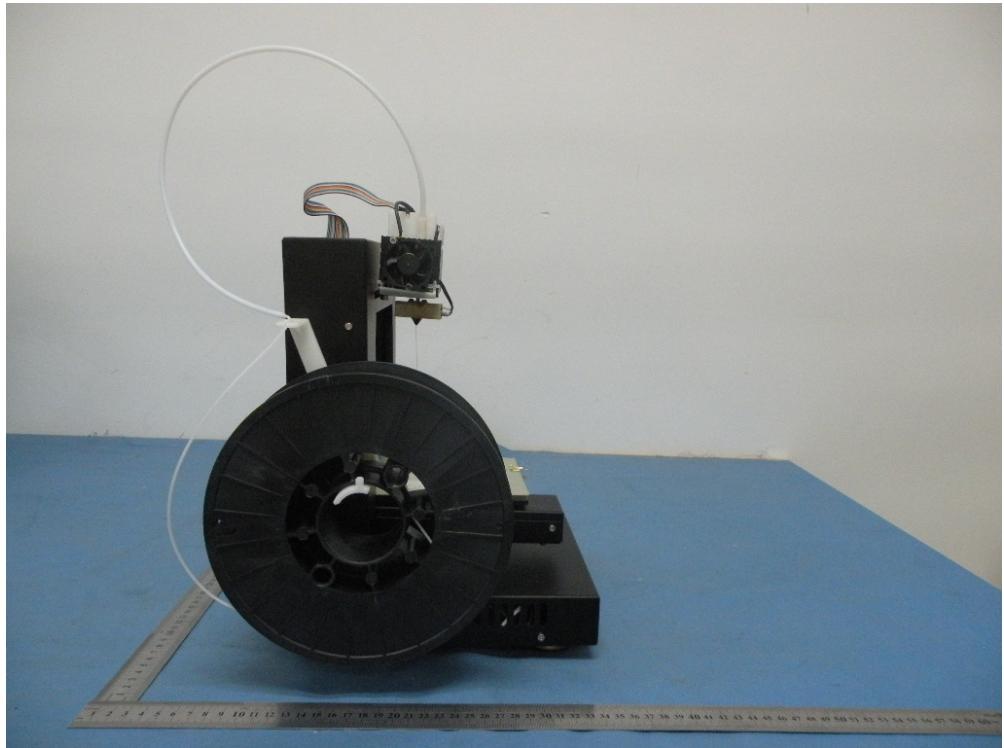

**Inside View**

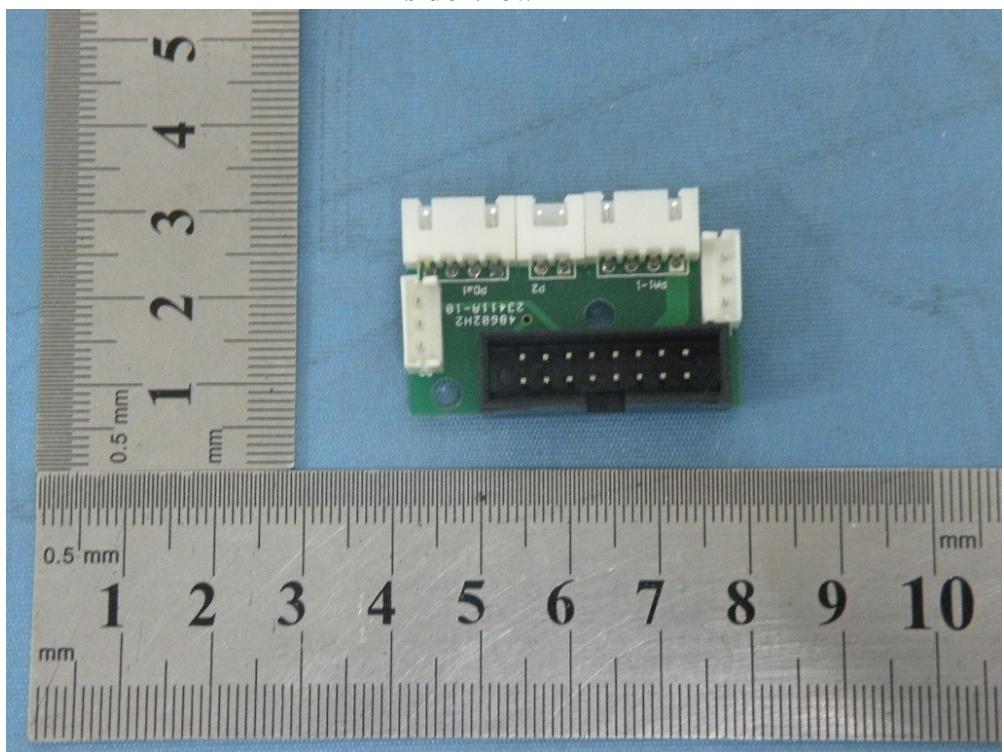

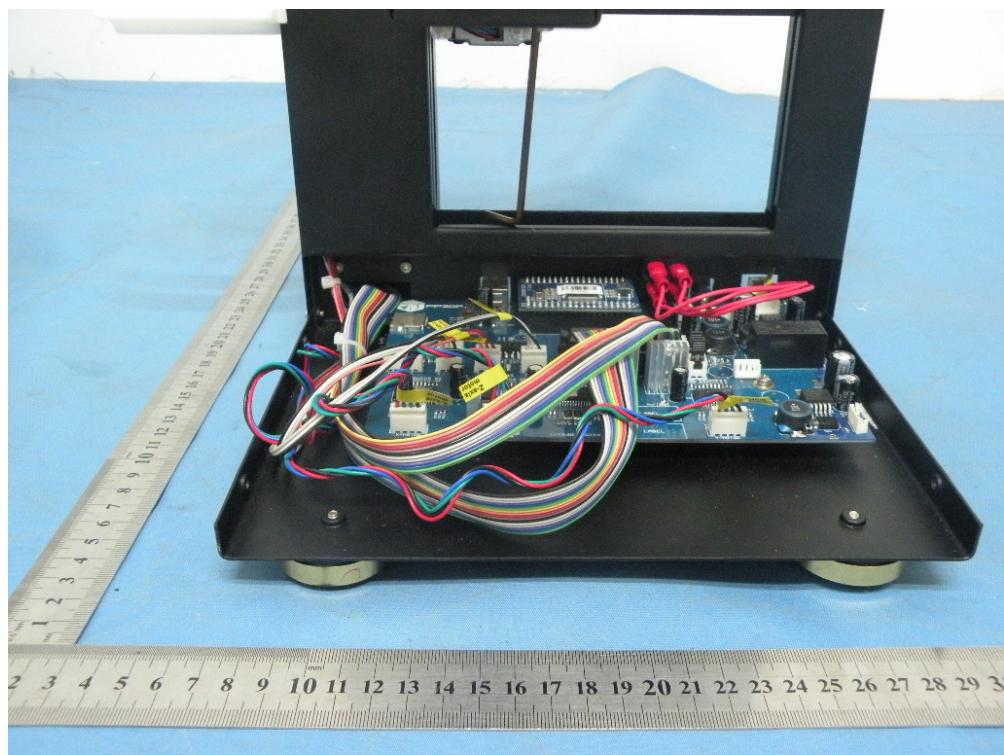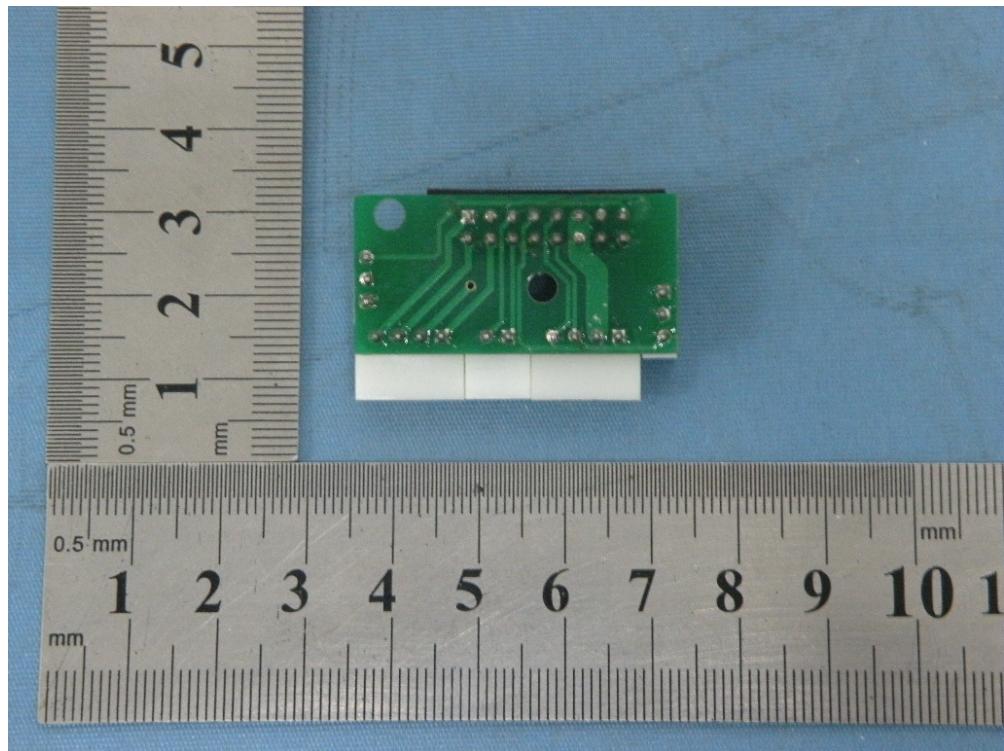

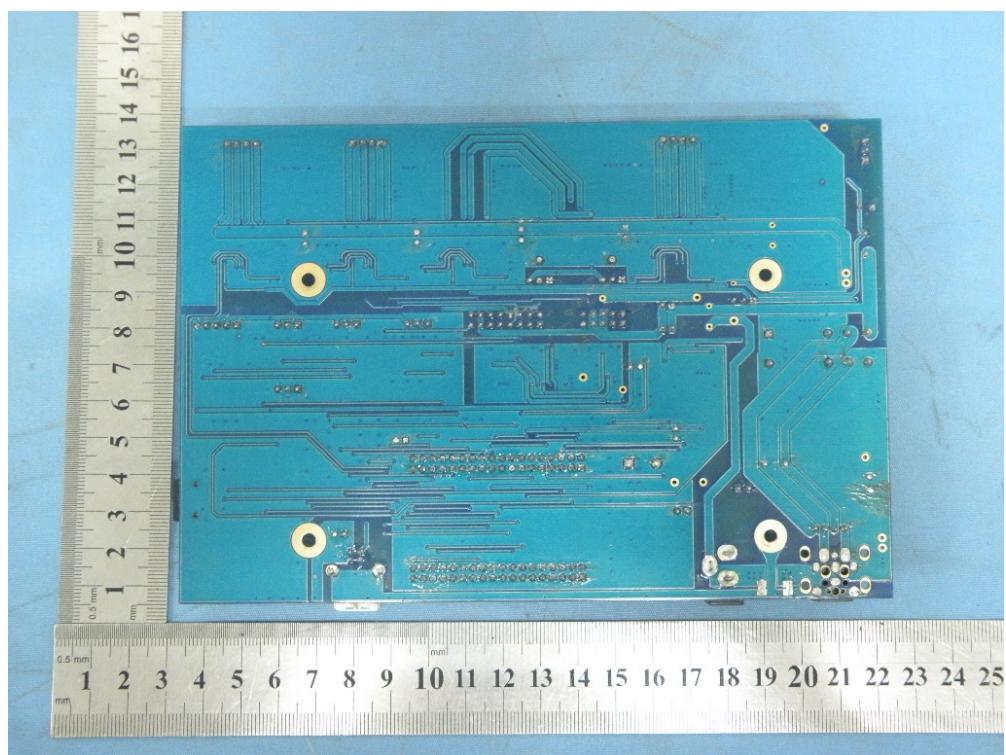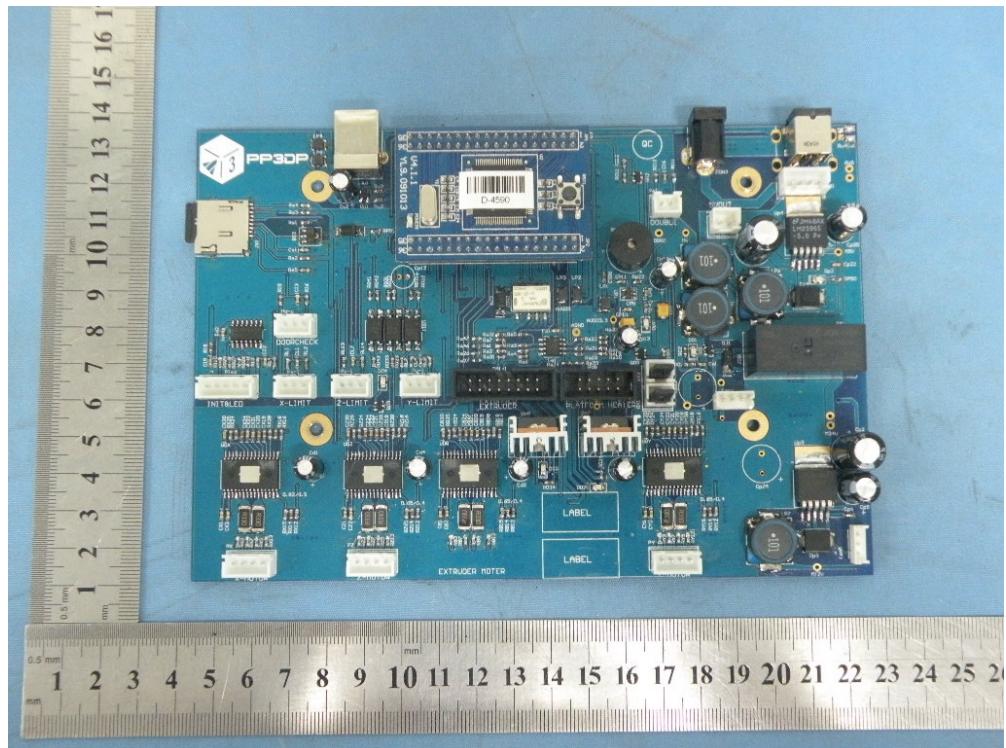

-----THE END OF REPORT-----