



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.249

Report Reference No.: **CTL1508262464-WF**

Compiled by:
(position+printed name+signature) **Jacky Chen**
(File administrators)

Tested by:
(position+printed name+signature) **Allen Wang**
(Test Engineer)

Approved by:
(position+printed name+signature) **Tracy Qi**
(Manager)

Jacky Chen

Allen Wang

Tracy Qi

Product Name	Bluetooth Speaker
Model/Type reference	HY-PULSE
List Model(s)	/
Trade Mark	/
FCC ID	2AANZHY-PULSE
Applicant's name	DGL Group LTD.
Address of applicant	195 Raritan Center Parkway, Edison, NJ 08837, USA
Test Firm	Shenzhen CTL Testing Technology Co., Ltd.
Address of Test Firm	Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055
Test specification	
Standard	FCC Part 15.249: Operation within the bands 920-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.
TRF Originator	Shenzhen CTL Testing Technology Co., Ltd.
Master TRF	Dated 2011-01
Date of Receipt	Aug. 24, 2015
Date of Test Date	Aug. 24 2015– Aug. 29, 2015
Data of Issue	Aug. 30, 2015
Result	Positive
Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	

TEST REPORT

Test Report No. :	CTL1508262464-WF	Aug. 30, 2015
		Date of issue

Equipment under Test : Bluetooth Speaker

Model /Type : HY-PULSE

Listed Models : /

Applicant : DGL Group LTD.

Address : 195 Raritan Center Parkway, Edison, NJ 08837, USA

Manufacturer : Elite Electronics(D.G.) Co. Ltd.

Address : # 1, Qing Tong Industrial 3-way Yau Kam Po Village Feng Gang Town,Dongguan,China,523708

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.


The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****



	Table of Contents	Page
1. SUMMARY.....		5
1.1. TEST STANDARDS.....		5
1.2. TEST DESCRIPTION.....		5
1.3. TEST FACILITY		6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....		6
2. GENERAL INFORMATION.....		7
2.1. ENVIRONMENTAL CONDITIONS		7
2.2. GENERAL DESCRIPTION OF EUT		7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....		7
2.4. EQUIPMENTS USED DURING THE TEST		8
2.5. RELATED SUBMITTAL(S) / GRANT(S).....		8
2.6. MODIFICATIONS.....		8
3. TEST CONDITIONS AND RESULTS		9
3.1. CONDUCTED EMISSIONS TEST		9
3.2. RADIATED EMISSIONS AND BAND EDGE		12
3.3. OCCUPIED BANDWIDTH MEASUREMENT.....		18
3.4. ANTENNA REQUIREMENT.....		22
4. TEST SETUP PHOTOS OF THE EUT		23
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....		25

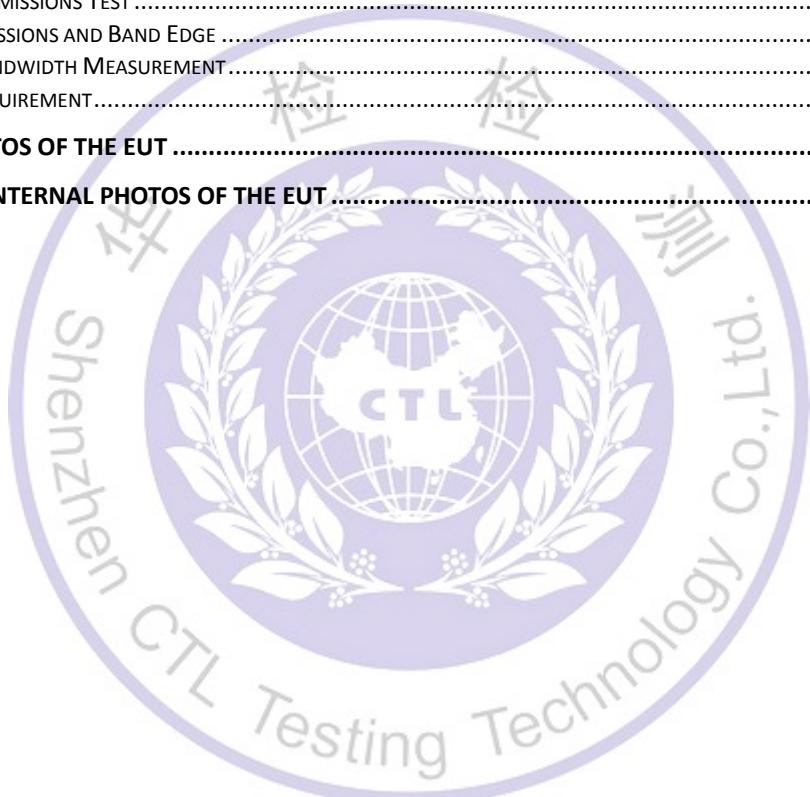

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[**FCC Rules Part 15.249**](#): Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

[**ANSI C63.10:2013**](#) American National Standard for Testing Unlicensed Wireless Devices.

1.2. Test Description

FCC PART 15.249		
FCC Part 15.249(a)	Field Strength of Fundamental	PASS
FCC Part 15.209	Spurious Emission	PASS
FCC Part 15.209	Band edge	PASS
FCC Part 15.215(c)	20dB bandwidth	PASS
FCC Part 15.207	Conducted Emission	N/A
FCC Part 15.203	Antenna Requirement	PASS



1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Bluetooth Speaker
Model/Type reference:	HY-PULSE
Power supply:	DC 3.7V from battery
Bluetooth	
Version:	Supported BT2.1+EDR
Modulation:	GFSK, π/4DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	1.2 dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

Operation Frequency :

Channel	Frequency (MHz)
00	2402
1	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Exploratory measurement performed at GFSK, π/4 DQPSK and 8DPSK mode of each test frequency and recorded worst case at GFSK DH5 mode.

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2015/06/02	2016/06/01
EMI Test Receiver	R&S	ESCI	103710	2015/06/02	2016/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2015/05/21	2016/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2015/05/21	2016/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2015/05/19	2016/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2015/05/19	2016/05/18
Amplifier	Agilent	8349B	3008A02306	2015/05/19	2016/05/18
Amplifier	Agilent	8447D	2944A10176	2015/05/19	2016/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2015/05/20	2016/05/19
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2015/05/20	2016/05/19
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2015/05/20	2016/05/19
RF Cable	HUBER+SUHN ER	RG214	N/A	2015/05/20	2016/05/19

The calibration interval was one year

2.5. Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended for FCC ID:2AANZHY-PULSE filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

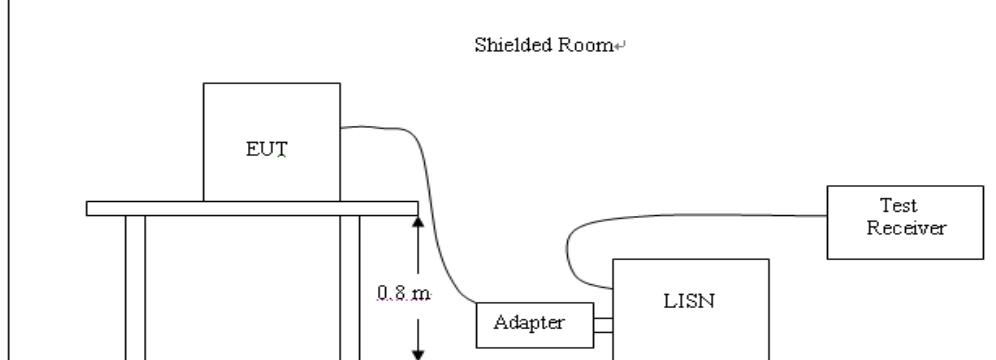


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013 .
2. Support equipment, if needed, was placed as per ANSI C63.10:2013 .
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013 .
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"
Short Description: 150K-30M Voltage

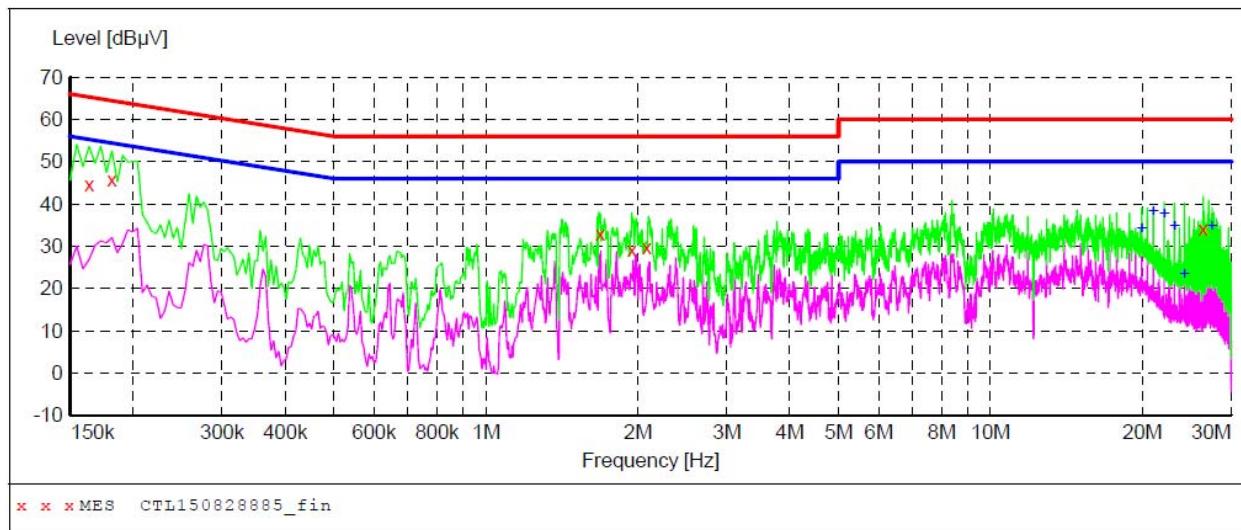

MEASUREMENT RESULT: "CTL150828885_fin"

8/28/2015 7:18PM


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.163501	44.50	10.2	65	20.8	QP	L1	GND
0.181501	45.80	10.2	64	18.6	QP	L1	GND
1.684501	33.00	10.3	56	23.0	QP	L1	GND
1.945501	29.00	10.3	56	27.0	QP	L1	GND
2.080501	29.80	10.4	56	26.2	QP	L1	GND
26.412001	34.20	11.2	60	25.8	QP	L1	GND

MEASUREMENT RESULT: "CTL150828885_fin2"

8/28/2015 7:18PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
19.936501	34.20	10.9	50	15.8	AV	L1	GND
21.016501	38.10	11.0	50	11.9	AV	L1	GND
22.092001	37.70	11.0	50	12.3	AV	L1	GND
23.172001	34.60	11.1	50	15.4	AV	L1	GND
24.243001	23.40	11.1	50	26.6	AV	L1	GND
27.483001	34.60	11.2	50	15.4	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

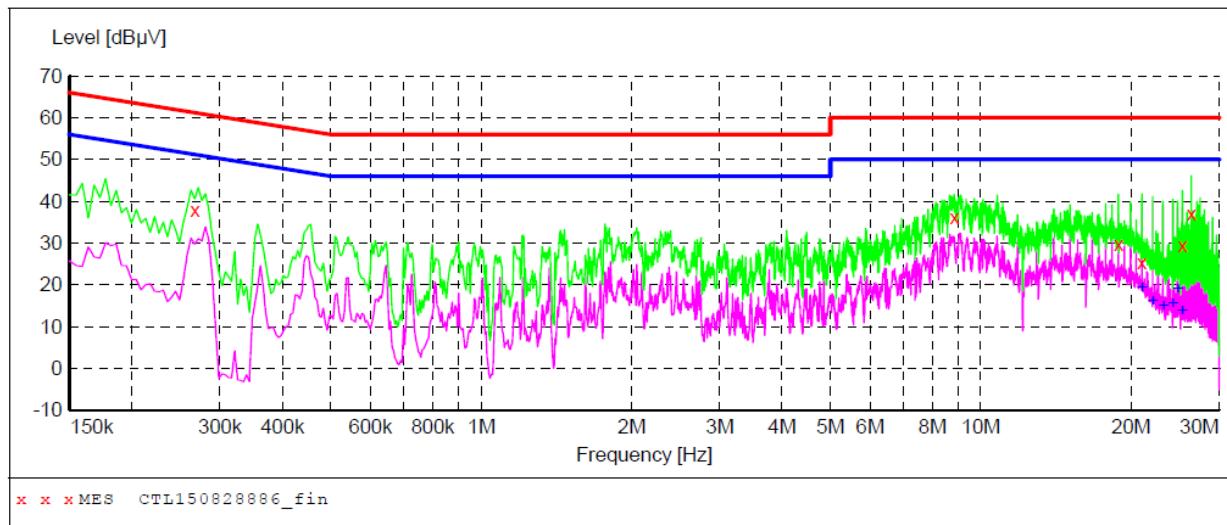

MEASUREMENT RESULT: "CTL150828886_fin"

8/28/2015 7:21PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.267001	38.00	10.2	61	23.2	QP	N	GND
8.853001	36.20	10.6	60	23.8	QP	N	GND
18.861001	29.60	10.9	60	30.4	QP	N	GND
21.021001	25.20	11.0	60	34.8	QP	N	GND
25.327501	29.50	11.1	60	30.5	QP	N	GND
26.412001	37.10	11.2	60	22.9	QP	N	GND

MEASUREMENT RESULT: "CTL150828886_fin2"

8/28/2015 7:21PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
21.021001	19.10	11.0	50	30.9	AV	N	GND
22.096501	15.90	11.0	50	34.1	AV	N	GND
23.181001	14.90	11.1	50	35.1	AV	N	GND
24.243001	15.30	11.1	50	34.7	AV	N	GND
24.787501	18.90	11.1	50	31.1	AV	N	GND
25.318501	13.60	11.1	50	36.4	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

According 15.249, the field strength of emissions from intentional radiators operated within 2400MHz-2483.5 MHz shall not exceed 94dB μ V/m (50mV/m):

FCC PART 15.249(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

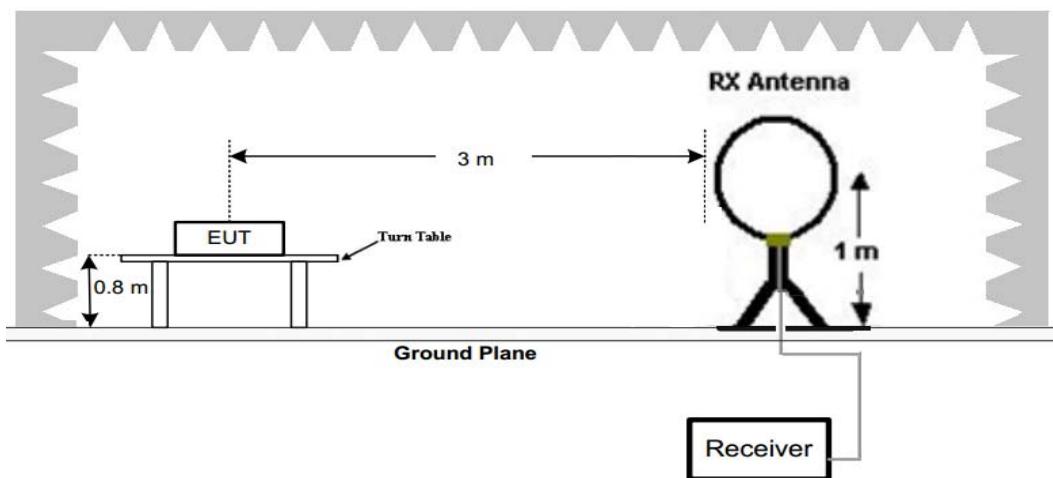

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

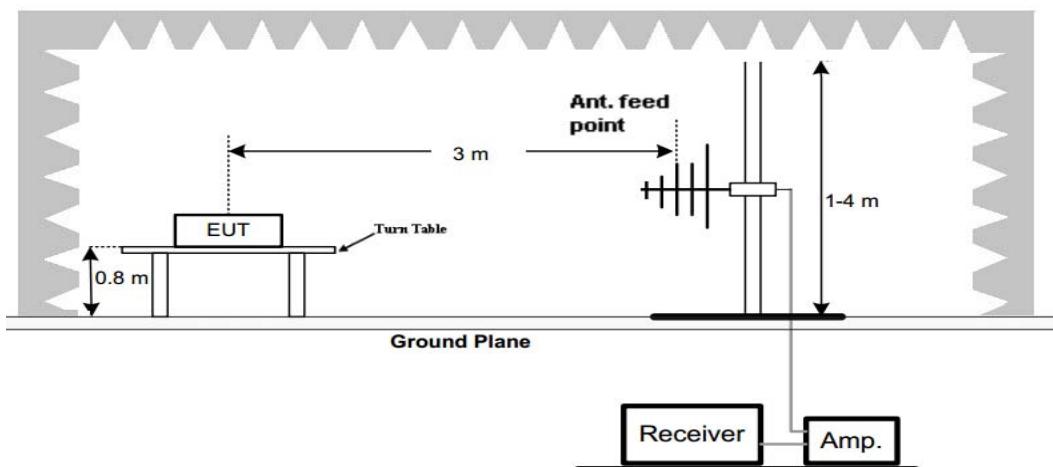

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

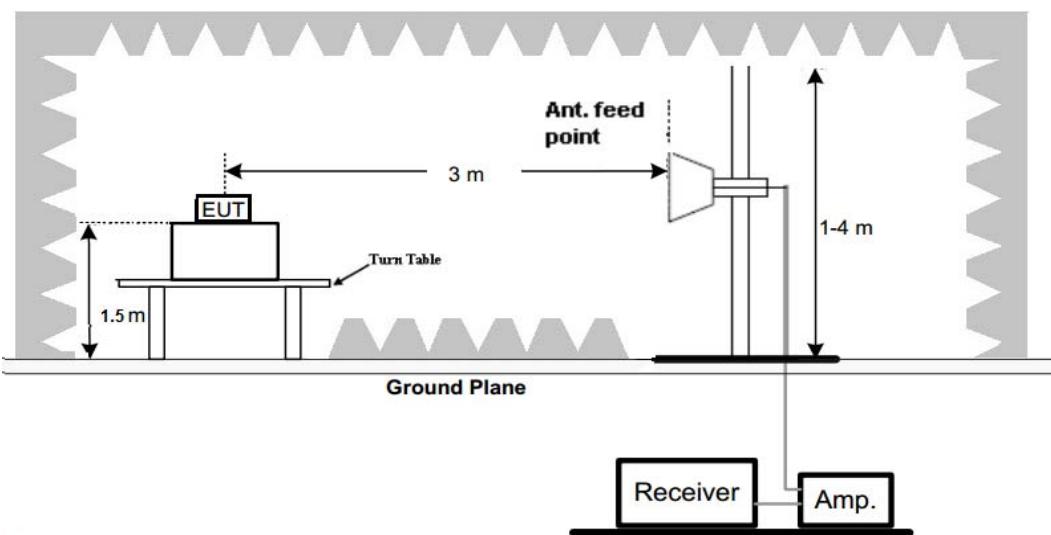**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:

1. We measured Radiated Emission at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
3. For below 1GHz testing recorded worst at GFSK DH5 low channel.

For 9 KHz-30MHz


Frequency (MHz)	Corrected Reading (dBuV/m)@3m	FCC Limit (dBuV/m) @3m	Margin (dB)	Detector	Result
0.19	52.65	102.03	49.38	QP	PASS
1.59	49.64	63.58	13.94	QP	PASS
15.65	57.42	69.54	12.12	QP	PASS
22.58	49.26	69.54	20.28	QP	PASS

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

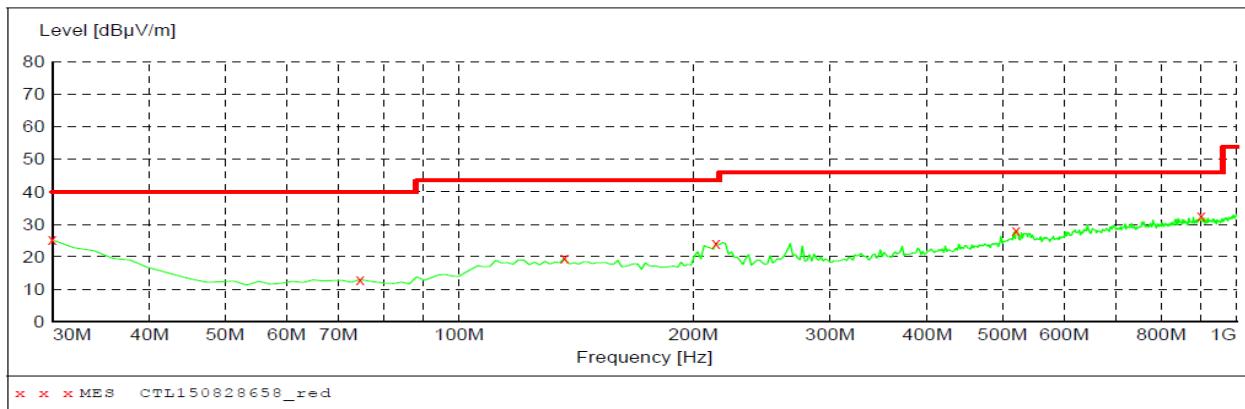**MEASUREMENT RESULT: "CTL150828658_red"**


8/28/2015 7:27PM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	25.20	20.8	40.0	14.8	---	0.0	0.00	HORIZONTAL
74.620000	13.00	8.3	40.0	27.0	---	0.0	0.00	HORIZONTAL
136.700000	19.60	14.4	43.5	23.9	---	0.0	0.00	HORIZONTAL
214.300000	24.20	14.0	43.5	19.3	---	0.0	0.00	HORIZONTAL
520.820000	27.90	20.3	46.0	18.1	---	0.0	0.00	HORIZONTAL
901.060000	32.50	26.0	46.0	13.5	---	0.0	0.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

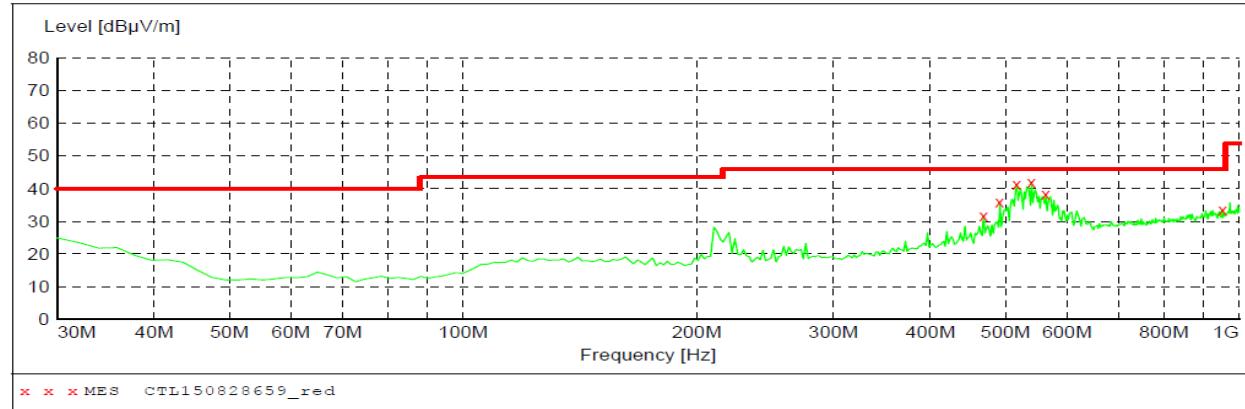**MEASUREMENT RESULT: "CTL150828659_red"**

8/28/2015 7:30PM

Frequency MHz	Level dB μ V/m	Transd dB	Limit dB μ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
468.440000	31.70	19.7	46.0	14.3	---	0.0	0.00	VERTICAL
491.720000	35.90	20.1	46.0	10.1	---	0.0	0.00	VERTICAL
516.940000	41.40	20.3	46.0	4.6	---	0.0	0.00	VERTICAL
540.220000	42.10	20.7	46.0	3.9	---	0.0	0.00	VERTICAL
563.500000	38.30	21.2	46.0	7.7	---	0.0	0.00	VERTICAL
953.440000	33.50	26.6	46.0	12.5	---	0.0	0.00	VERTICAL

For 1GHz to 25GHz

GFSK Mode (above 1GHz)

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	95.69 PK	114	18.31	62.29	28.78	4.61	0.00	33.40
1	2402.00	88.47 AV	94	5.53	55.07	28.78	4.61	0.00	33.40
2	2390.00	37.54 PK	74	36.46	4.22	28.72	4.60	0.00	33.32
2	2390.00	-- AV	54	--	--	--	--	--	--
3	2400.00	44.26 PK	74	29.74	10.87	28.78	4.61	0.00	33.39
3	2400.00	-- AV	54	--	--	--	--	--	--
4	4804.00	56.45 PK	74	17.55	51.94	33.49	6.91	35.89	4.51
4	4804.00	44.15 AV	54	9.85	39.64	33.49	6.91	35.89	4.51
5	5175.52	42.87 PK	74	31.13	35.55	34.49	7.13	34.29	7.32
5	5175.52	-- AV	54	--	--	--	--	--	--
6	7206.00	41.48 PK	74	32.52	30.37	36.95	9.18	35.03	11.11
6	7206.00	-- AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2402.00	96.58 PK	114	17.42	63.18	28.78	4.61	0.00	33.40
1	2402.00	88.98 AV	94	5.02	55.58	28.78	4.61	0.00	33.40
2	2390.00	37.25 PK	74	36.75	3.93	28.72	4.60	0.00	33.32
2	2390.00	-- AV	54	--	--	--	--	--	--
3	2400.00	43.25 PK	74	30.75	9.86	28.78	4.61	0.00	33.39
3	2400.00	-- AV	54	--	--	--	--	--	--
4	4804.00	56.59 PK	74	17.41	52.08	33.49	6.91	35.89	4.51
4	4804.00	45.84 AV	54	8.16	41.33	33.49	6.91	35.89	4.51
5	5056.25	41.20 PK	74	32.8	34.21	34.18	7.06	34.25	6.99
5	5056.25	-- AV	54	--	--	--	--	--	--
6	7206.00	42.65 PK	74	31.35	31.54	36.95	9.18	35.03	11.11
6	7206.00	-- AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

Frequency(MHz):			2441		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	96.69	PK	114	17.31	63.18	28.85	4.66	0.00
1	2441.00	89.65	AV	94	4.35	56.14	28.85	4.66	0.00
2	4125.50	42.55	PK	74	31.45	37.99	32.81	6.48	34.73
2	4125.50	--	AV	54	--	--	--	--	--
3	4882.00	54.20	PK	74	19.8	47.94	33.60	6.95	34.30
3	4882.00	46.95	AV	54	7.05	40.69	33.60	6.95	34.30
4	6510.75	41.25	PK	74	32.75	31.05	35.20	8.37	33.37
4	6510.75	--	AV	54	--	--	--	--	--
5	7323.00	46.42	PK	74	27.58	34.72	37.46	9.23	35.00
5	7323.00	--	AV	54	--	--	--	--	--

Frequency(MHz):			2441		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2441.00	97.36	PK	114	16.64	63.85	28.85	4.66	0.00
1	2441.00	90.20	AV	94	3.8	56.69	28.85	4.66	0.00
2	3250.75	43.64	PK	74	30.36	42.04	31.39	5.53	35.32
2	3250.75	--	AV	54	--	--	--	--	--
3	4882.00	55.54	PK	74	18.46	49.18	33.60	6.95	34.19
3	4882.00	47.23	AV	54	6.77	40.87	33.60	6.95	34.19
4	5050.75	42.74	PK	74	31.26	35.72	34.16	7.06	34.20
4	5050.75	--	AV	54	--	--	--	--	--
5	7323.00	45.14	PK	74	28.86	33.44	37.46	9.23	35.00
5	7323.00	--	AV	54	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	95.41	PK	114	18.59	61.79	28.92	4.70	0.00
1	2480.00	88.96	AV	94	5.04	55.34	28.92	4.70	0.00
2	2483.50	44.26	PK	74	29.74	10.63	28.93	4.70	0.00
2	2483.50	--	AV	54	--	--	--	--	--
3	2500.00	38.62	PK	74	35.38	4.94	28.96	4.72	0.00
3	2500.00	--	AV	54	--	--	--	--	--
4	4960.00	56.78	PK	74	17.22	51.86	33.84	7.00	35.92
4	4960.00	48.66	AV	54	5.34	43.74	33.84	7.00	35.92
5	5215.75	43.41	PK	74	30.59	36.01	34.56	7.15	34.31
5	5215.75	--	AV	54	--	--	--	--	--
6	7440.00	39.24	PK	74	34.76	27.29	37.64	9.28	34.97
6	7440.00	--	AV	54	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	2480.00	96.74	PK	114	17.26	63.12	28.92	4.70	0.00
1	2480.00	89.69	AV	94	4.31	56.07	28.92	4.70	0.00
2	2483.50	43.47	PK	74	30.53	9.84	28.93	4.70	0.00
2	2483.50	--	AV	54	--	--	--	--	--
3	2500.00	37.42	PK	74	36.58	3.74	28.96	4.72	0.00
3	2500.00	--	AV	54	--	--	--	--	--
4	4960.00	56.36	PK	74	17.64	51.44	33.84	7.00	35.92
4	4960.00	44.41	AV	54	9.59	39.49	33.84	7.00	35.92
5	5325.00	40.48	PK	74	33.52	32.95	34.67	7.22	34.35
5	5325.00	--	AV	54	--	--	--	--	--
6	7440.00	41.74	PK	74	32.26	29.79	37.64	9.28	34.97
6	7440.00	--	AV	54	--	--	--	--	--

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor
3. Margin value = Limit value - Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

3.3. Occupied Bandwidth Measurement

Limit

N/A

Test Configuration

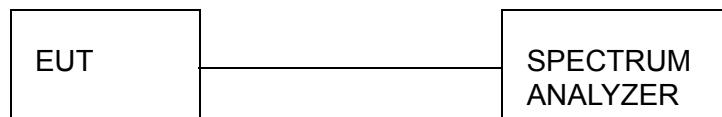

Test Procedure


The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.


The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.




Test Results

Modulation	Channel	99% OBW (MHz)	20dB bandwidth (MHz)	Result
GFSK	CH00	0.876	0.932	Pass
	CH39	0.873	0.931	
	CH78	0.878	0.934	
$\pi/4$ DQPSK	CH00	1.190	1.302	Pass
	CH39	1.186	1.285	
	CH78	1.191	1.302	
8DPSK	CH00	1.192	1.291	
	CH39	1.189	1.285	
	CH78	1.210	1.309	

Test plot as follows:

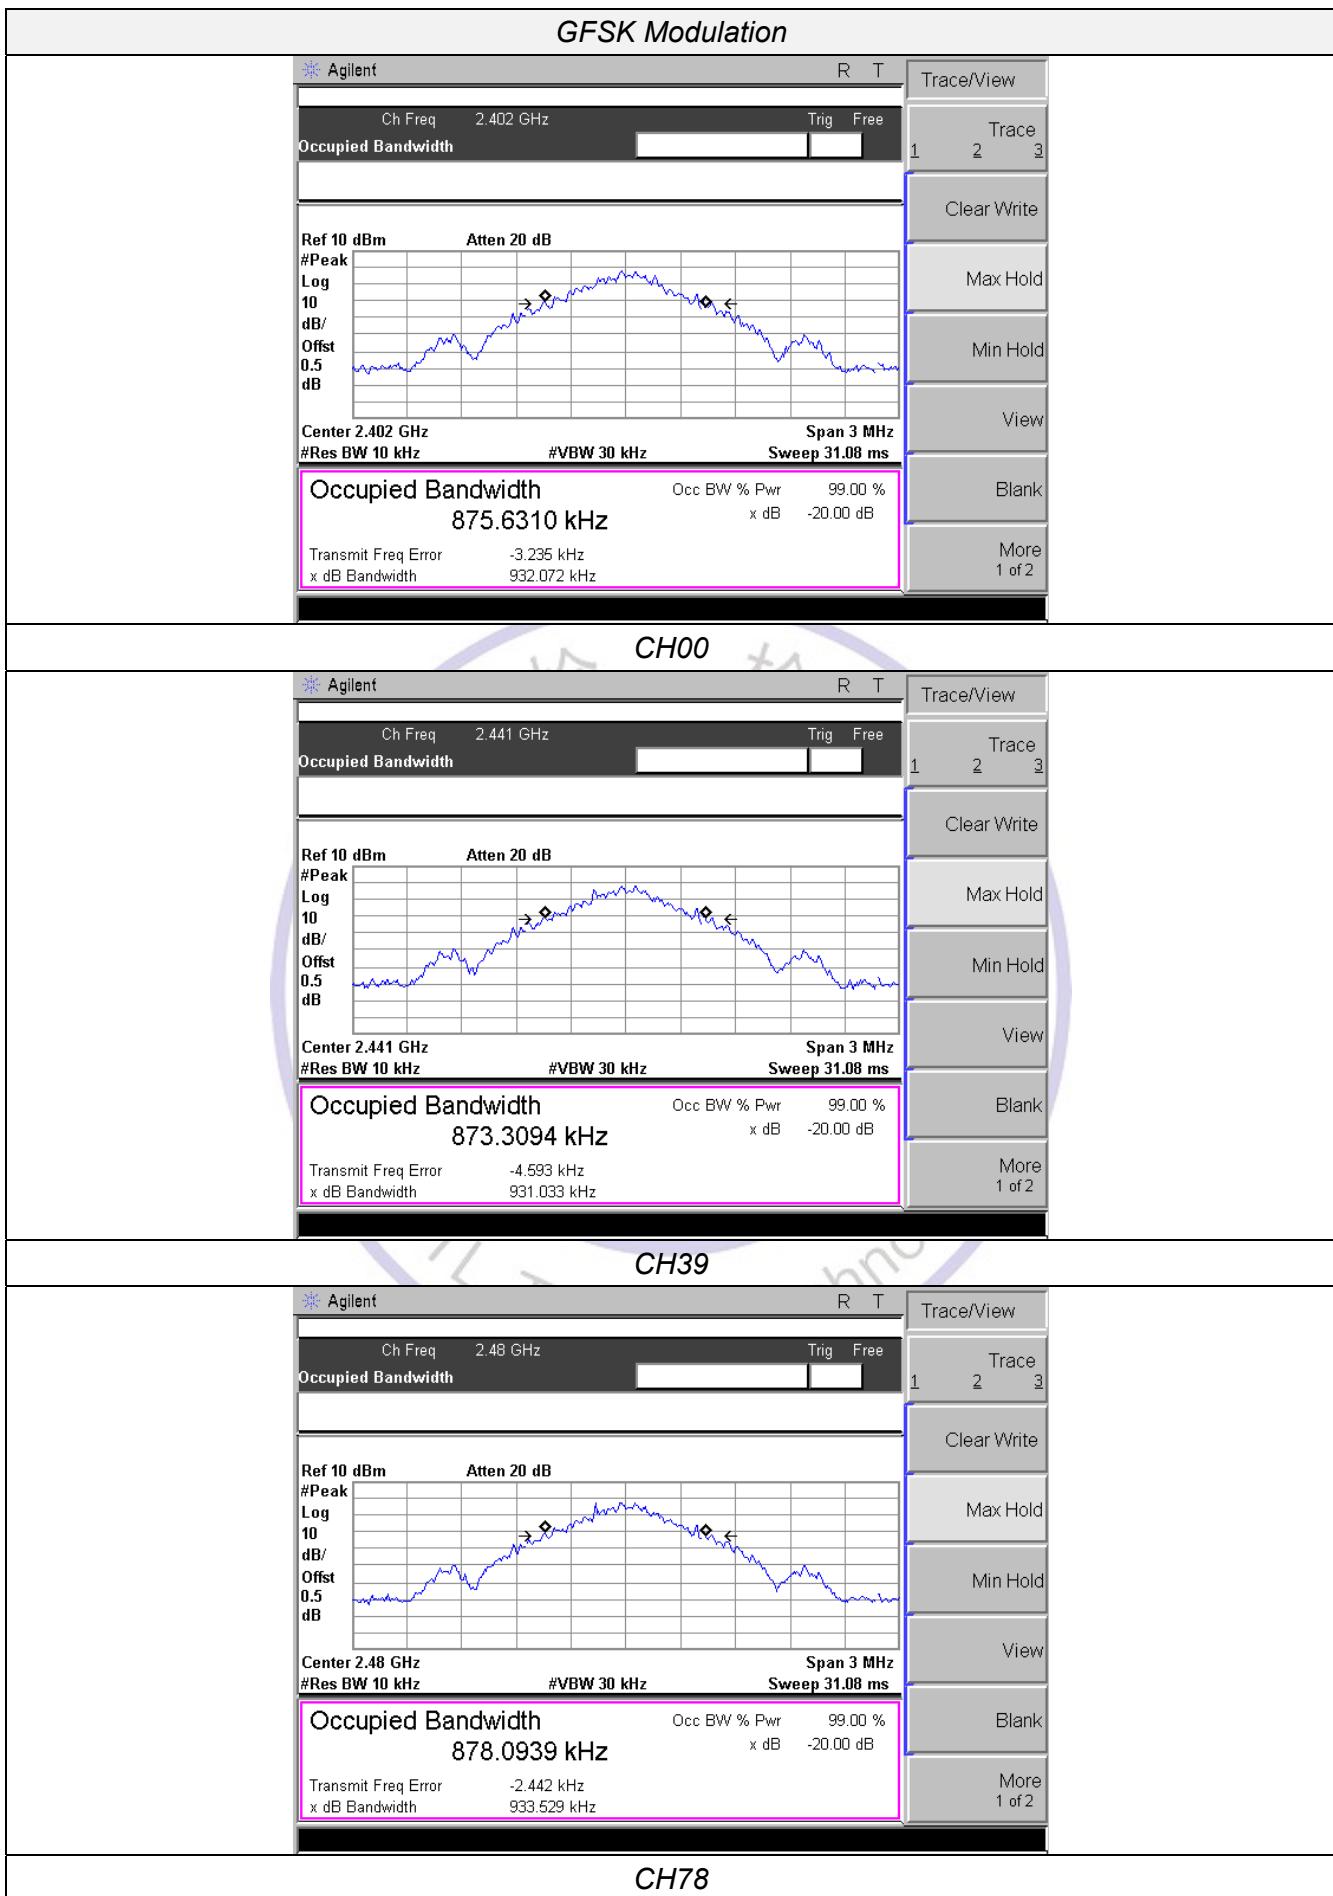

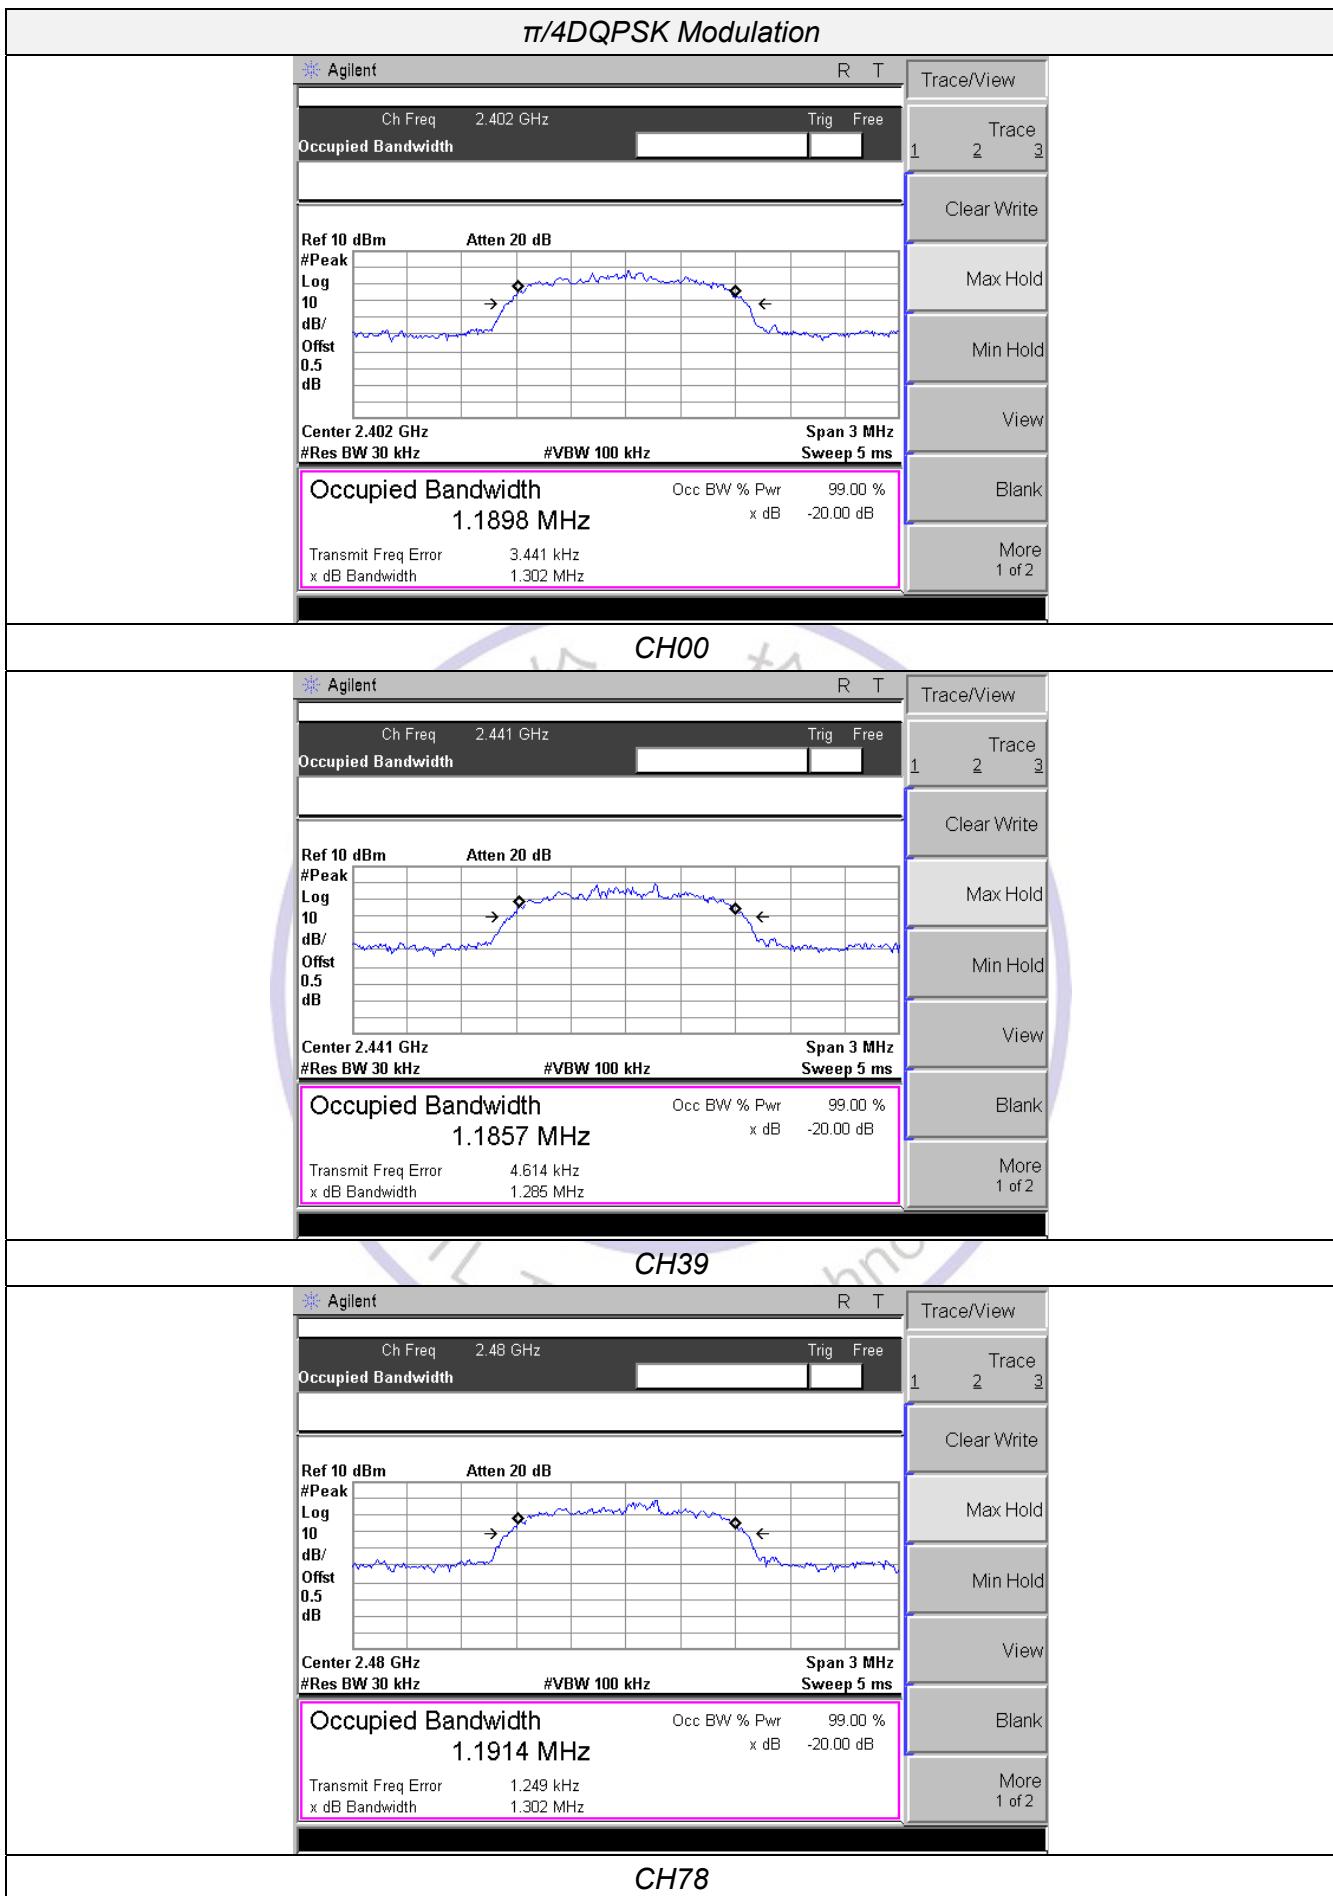

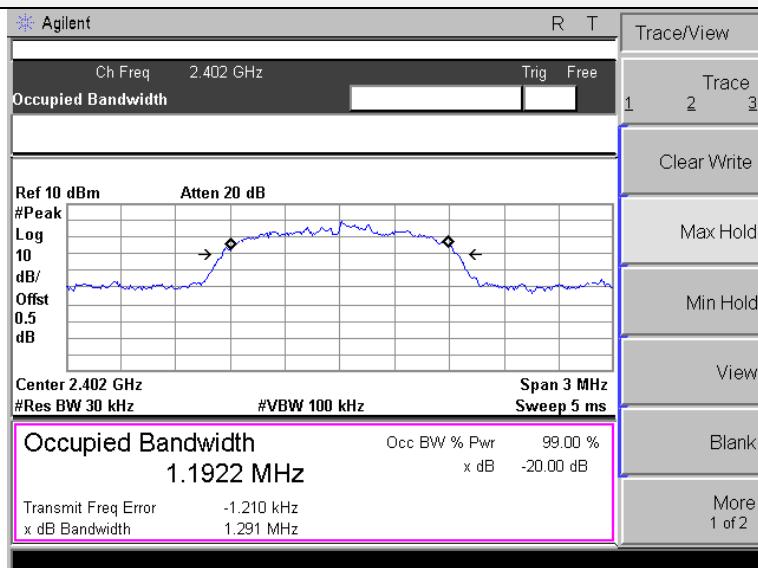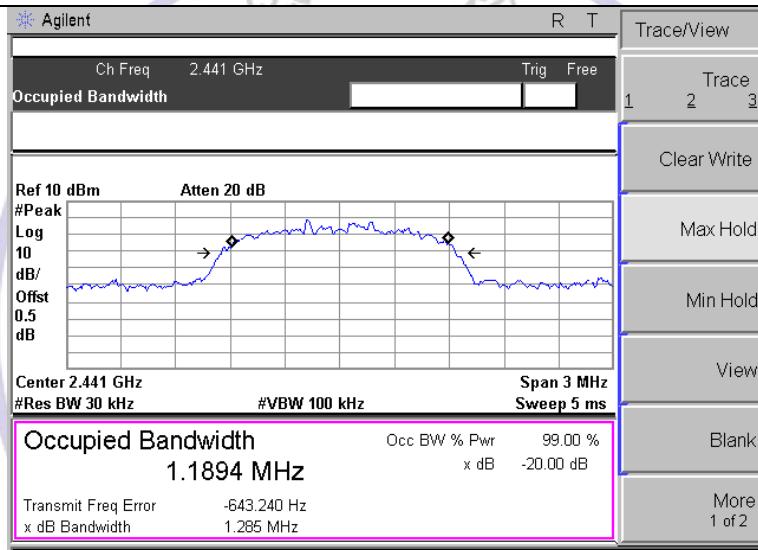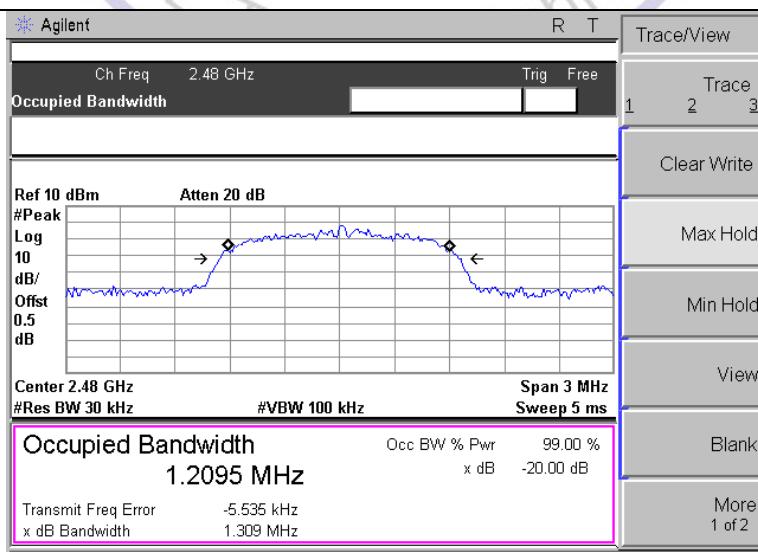8DPSK Modulation*CH00**CH39**CH78*

3.4. Antenna Requirement

Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is an internal Antenna, The directional gains of antenna used for transmitting is 1.2 dBi.

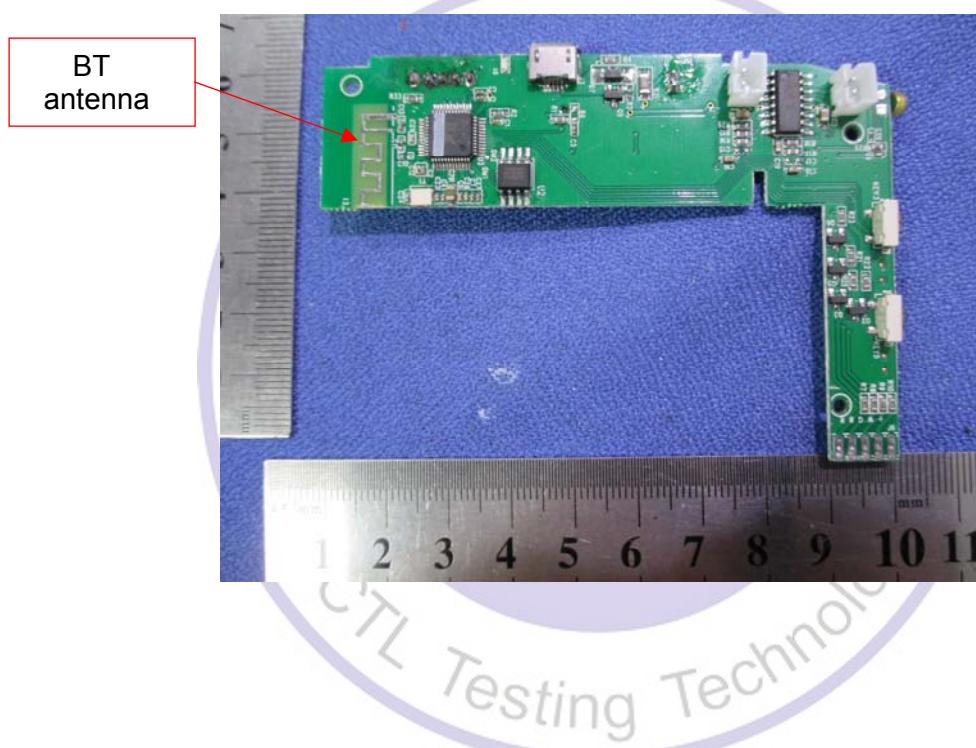

4. Test Setup Photos of the EUT

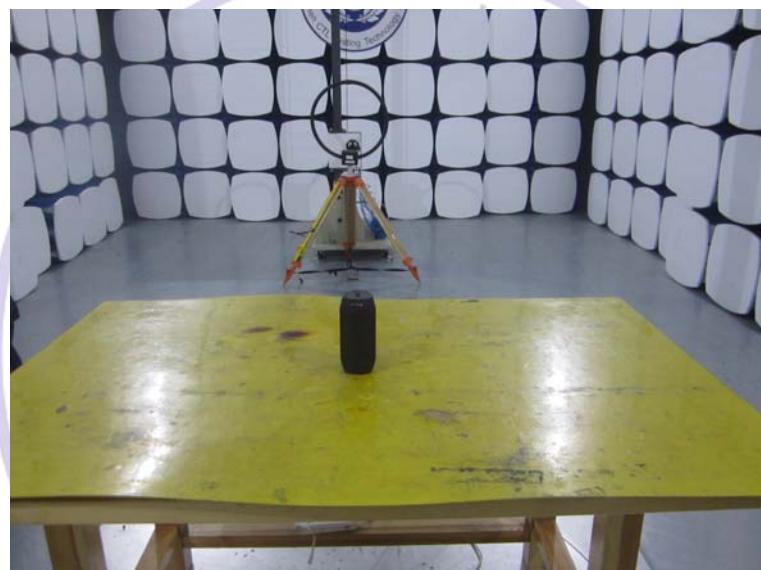





5. External and Internal Photos of the EUT


External Photos of EUT





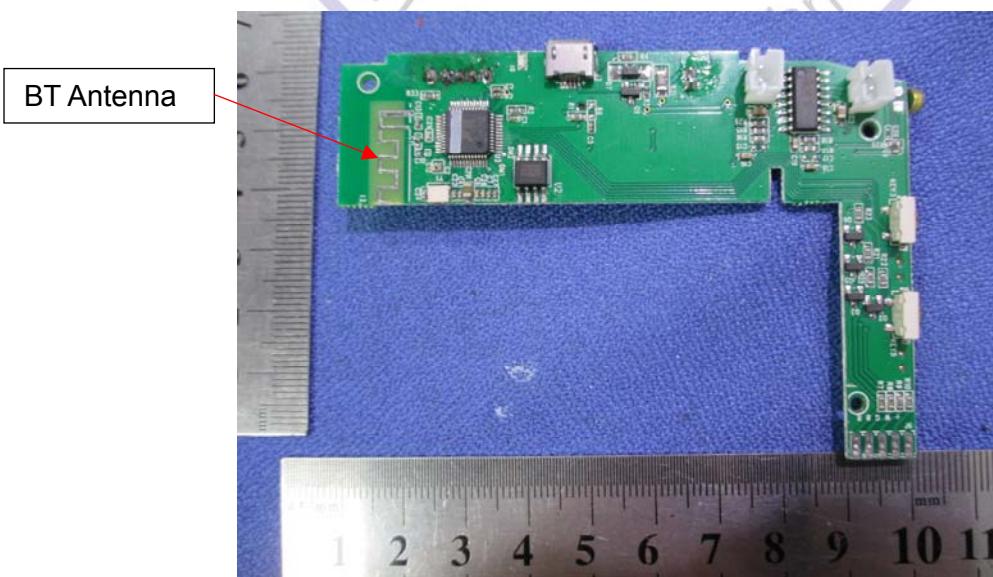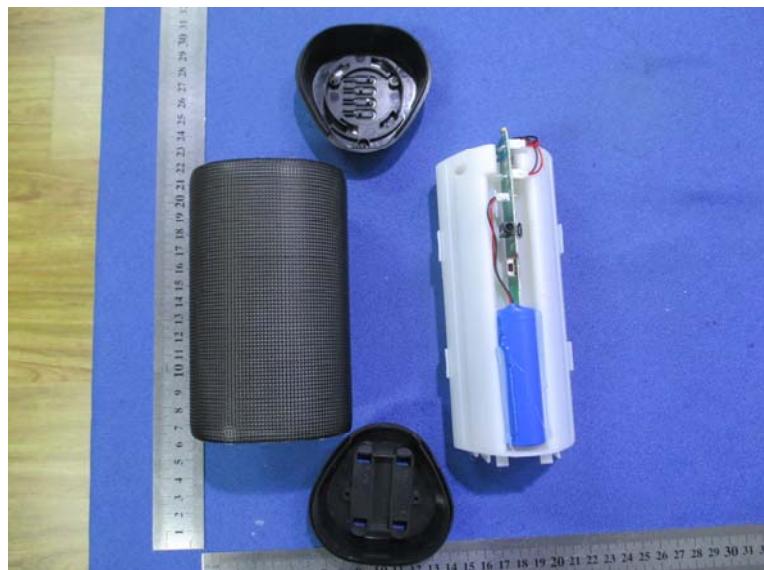

Internal Photos of EUT

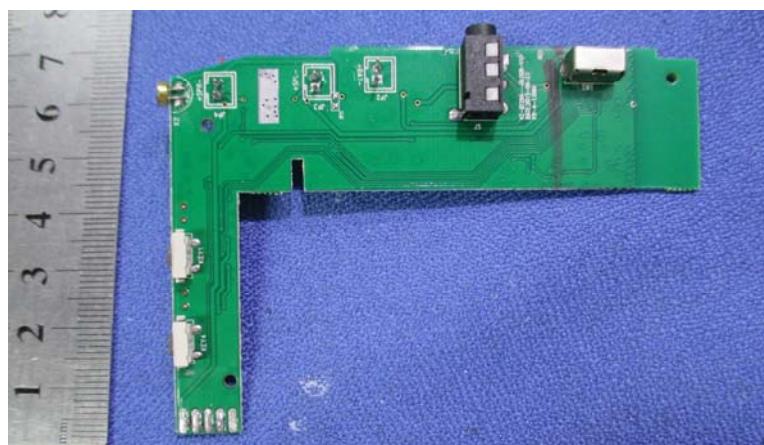

***** End of Report *****