
FCC Test Report

Report No.: AGC01559180518FE03

FCC ID : 2AANZNKSLM
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : WIRELESS BEHIND THE NECK SLIM HEADSET
BRAND NAME : N/A
MODEL NAME : See Page 4
CLIENT : DGL Group LTD.
DATE OF ISSUE : Jun. 06, 2018
STANDARD(S)
TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jun. 06, 2018	Valid	Initial release

TABLE OF CONTENTS

- 1. VERIFICATION OF CONFORMITY 4**
- 2. GENERAL INFORMATION 5**
 - 2.1. PRODUCT DESCRIPTION 5
 - 2.2. TABLE OF CARRIER FREQUENCIES 5
- 3. MEASUREMENT UNCERTAINTY 6**
- 4. DESCRIPTION OF TEST MODES 6**
- 5. SYSTEM TEST CONFIGURATION 8**
 - 5.1. CONFIGURATION OF EUT SYSTEM 8
 - 5.2. EQUIPMENT USED IN EUT SYSTEM 8
 - 5.3. SUMMARY OF TEST RESULTS 9
- 6. TEST FACILITY 10**
- 7. TEST METHOD 11**
- 8. TEST EQUIPMENT LIST 11**
- 9. RADIATED EMISSION 12**
 - 9.1. TEST LIMIT 12
 - 9.2. MEASUREMENT PROCEDURE 13
 - 9.3. TEST SETUP 15
 - 9.4. TEST RESULT 17
- 10. BAND EDGE EMISSION 39**
 - 10.1. MEASUREMENT PROCEDURE 39
 - 10.2. TEST SETUP 39
 - 10.3. RADIATED TEST RESULT 40
- 11. 20DB BANDWIDTH 44**
 - 11.1. MEASUREMENT PROCEDURE 44
 - 11.2. TEST SET-UP 44
 - 11.3. LIMITS AND MEASUREMENT RESULTS 44
- 12. FCC LINE CONDUCTED EMISSION TEST 51**
 - 12.1. LIMITS OF LINE CONDUCTED EMISSION TEST 51
 - 12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST 51
 - 12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST 52
 - 12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST 52
 - 12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST 52
- APPENDIX A: PHOTOGRAPHS OF TEST SETUP 53**
- APPENDIX B: PHOTOGRAPHS OF EUT 55**

1. VERIFICATION OF CONFORMITY

Applicant	DGL Group LTD.
Address	195 Raritan Center Parkway Edison, New Jersey United States 08837
Manufacturer	DGL Group LTD.
Address	195 Raritan Center Parkway Edison, New Jersey United States 08837
Product Designation	WIRELESS BEHIND THE NECK SLIM HEADSET
Brand Name	N/A
Test Model	BDY-NKSLM-BLU
Series Model	BDY-NKSLM, BDY-NKSLM-BLK, BDY-NKSLM-PRP, BDY-NKSLM-PNK
Difference description	All the same except for the mode name and appearance color.
Date of test	May 17, 2018 to May 29, 2018
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-BR/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249. The test results of this report relate only to the tested sample identified in this report.

Tested By Henry Zhang
Henry Zhang(Zhang Zhuorui) May 29, 2018

Reviewed By Cool Cheng
Cool Cheng(Cheng Mengguo) Jun. 06, 2018

Approved By Forrest Lei
Forrest Lei(Lei Yonggang)
Authorized Officer Jun. 06, 2018

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	3.48dBm(Max EIRP Power=Max radiation field-95.2)
Bluetooth Version	V4.2
Modulation	BR <input checked="" type="checkbox"/> GFSK, EDR <input checked="" type="checkbox"/> π /4-DQPSK, <input checked="" type="checkbox"/> 8DPSK BLE <input type="checkbox"/> GFSK
Number of channels	79 for BR/EDR
Hardware Version	V4.0
Software Version	V4.0
Antenna Designation	PCB Antenna
Antenna Gain	1dBi
Power Supply	DC 3.7V by battery
Note: 1. The BT function of EUT didn't work when charging. 2. The test model has four kinds of color samples, all recorded in the test report.	

2.2. TABLE OF CARRIER FREQUENCIES

BR/EDR channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

- Uncertainty of Conducted Emission, $U_c = \pm 3.2$ dB
- Uncertainty of Radiated Emission below 1GHz, $U_c = \pm 3.9$ dB
- Uncertainty of Radiated Emission above 1GHz, $U_c = \pm 4.8$ dB

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link

Note:

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.

Software Setting

AppoTech RF Control Kit V4.0

IC Model: CW66xx

COM Port Info
Port: COM1 Rate: 921600

DUT MODE: FCC Mode

RF Trim
 Fix_RX_24xx SingleTone Hopping: OFF
 Channel 41 (2-80) Tx Modulation: ON
 Power 6 (0-7) Packet Type: 3DH5

Test scenario: 3 Transmitter test - 1010 pattern

Specification
FIX RX mode: (1) check FIX_RX_24xx
(2) check channel to set channel number
FIX TX mode: (1) uncheck FIX_RX_24xx
(2) check channel to set channel number
(3) check power to set TX signal amplitude
(4) Modulation Enable OFF
TX Modulation mode: (1) uncheck FIX_RX_24xx
(2) check channel to set channel number
(3) check power to set TX signal amplitude
(4) Modulation Enable ON
(5) select Packet Type
Hopping mode: (1) uncheck FIX_RX_24xx
(2) uncheck channel to enable Hopping ON and TX Modulation OFF
(3) check power
(4) select Packet Type

语言

RF: R12 60BD Write Read Address: 0206 Val: 04 Write_xSFR Read_xSFR

<input checked="" type="checkbox"/> Enable Patch 1	<input checked="" type="checkbox"/> Enable Patch 2
00C845 00C0CF	019E68 019E69
048280 0482AE	048040 048073

PFile


Show HCI Clear Save Read MROM Send

```
01 19 FC 40 0F 40 B2 41 04 06 A0 40 00 81 00 00 80 0
04 0E 04 01 19 FC 00
01 08 FC 03 68 4F 00
04 0E 04 01 08 FC 00
01 0F FC 0A 02 03 00 27 00 06 28 2F FD 03
04 0E 04 01 0F FC 00
01 09 FC 01 0C
04 0E 07 01 09 FC 00 0C BD 60
```


5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)

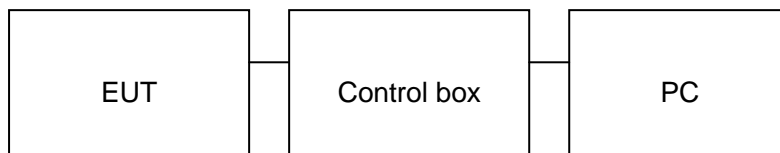

5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	WIRELESS BEHIND THE NECK SLIM HEADSET	DGL	BDY-NKSLM-BLU	EUT
2	Battery	Beizeer	TNA08170-65mAh	Accessory
3	PC	APPLE	A1465	A.E
4	Control box	DOFLY	LY-USB-TIL V2.2	A.E
5	USB Cable	N/A	1m unshielded	A.E
6	USB Cable	N/A	0.8m unshielded	Accessory
7	IPOD	APPLE	A1367	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	N/A
§15.215	Bandwidth	Compliant

Note: N/A means it's not applicable to this item.

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. TEST EQUIPMENT LIST

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun.20, 2017	Jun.19, 2018
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
preamplifier	ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May 18, 2017	May 17, 2019
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2017	Jun.19, 2018
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
Loop Antenna	A.H.Systems,Inc	SAS-562B	--	Mar. 01, 2018	Feb. 28, 2019
Radiation Cable 1	MXT	RS1	R005	June 6, 2017	June 5, 2018
Radiation Cable 2	MXT	RS1	R006	June 6, 2017	June 5, 2018
Filter (2.4-2.483GHz)	Micro-tronics	087	--	Jun.20, 2017	Jun.19, 2018

9. RADIATED EMISSION

9.1 TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		μ V/m	dB(μ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	

Remark: (1) Emission level dB μ V = 20 log Emission level μ V/m
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

9.2. MEASUREMENT PROCEDURE


1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

9.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

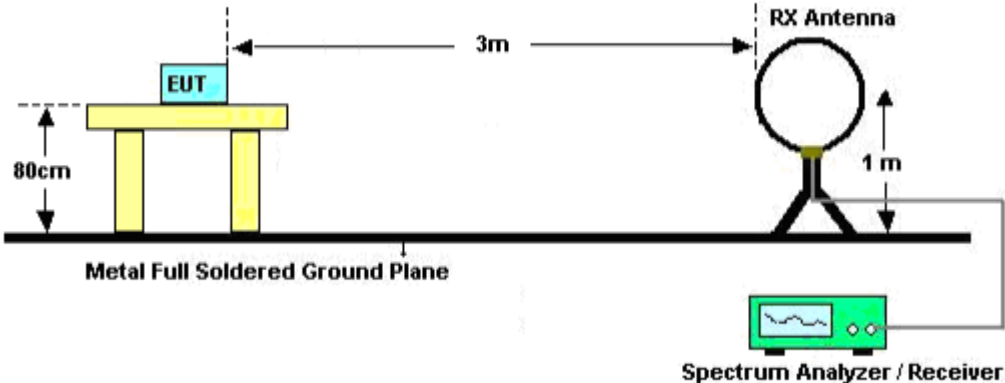

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

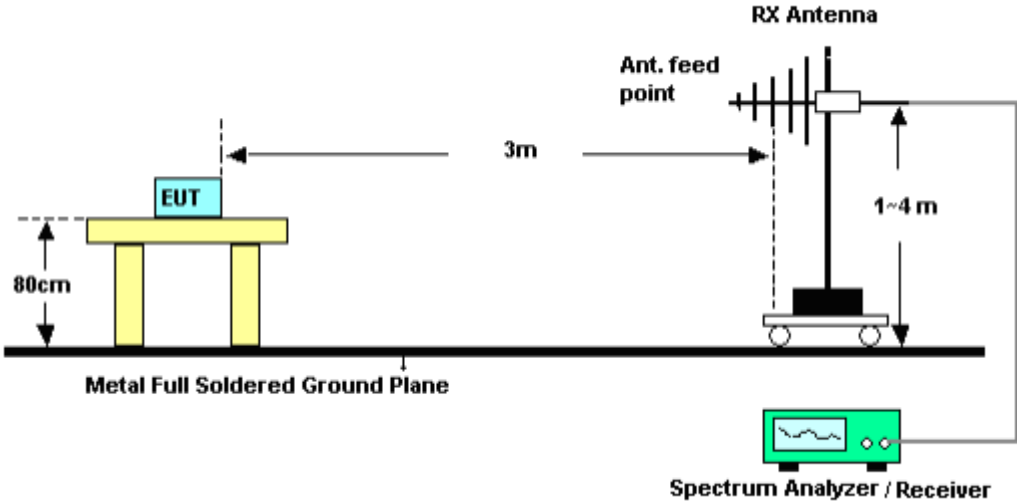

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

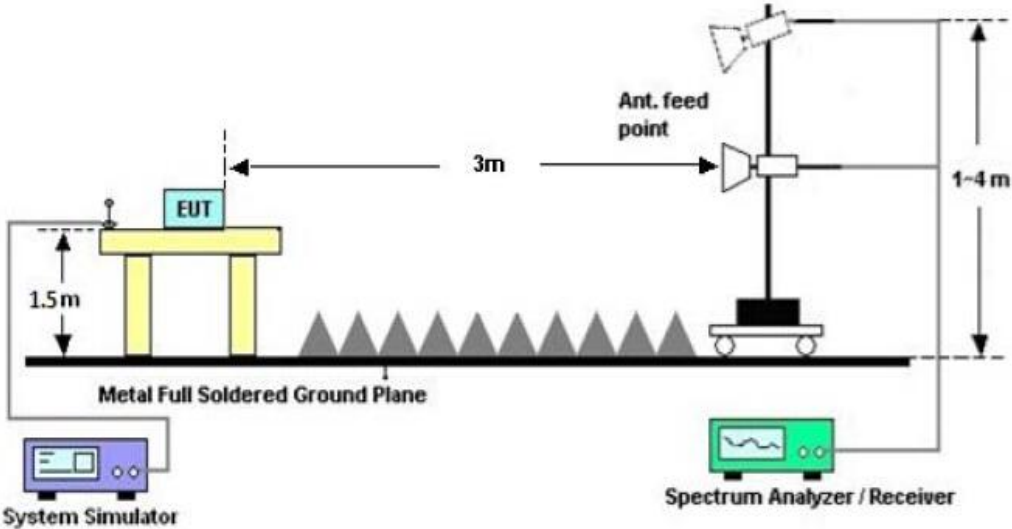

9.4. TEST RESULT

FOR BR/EDR


(Worst modulation: GFSK)

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

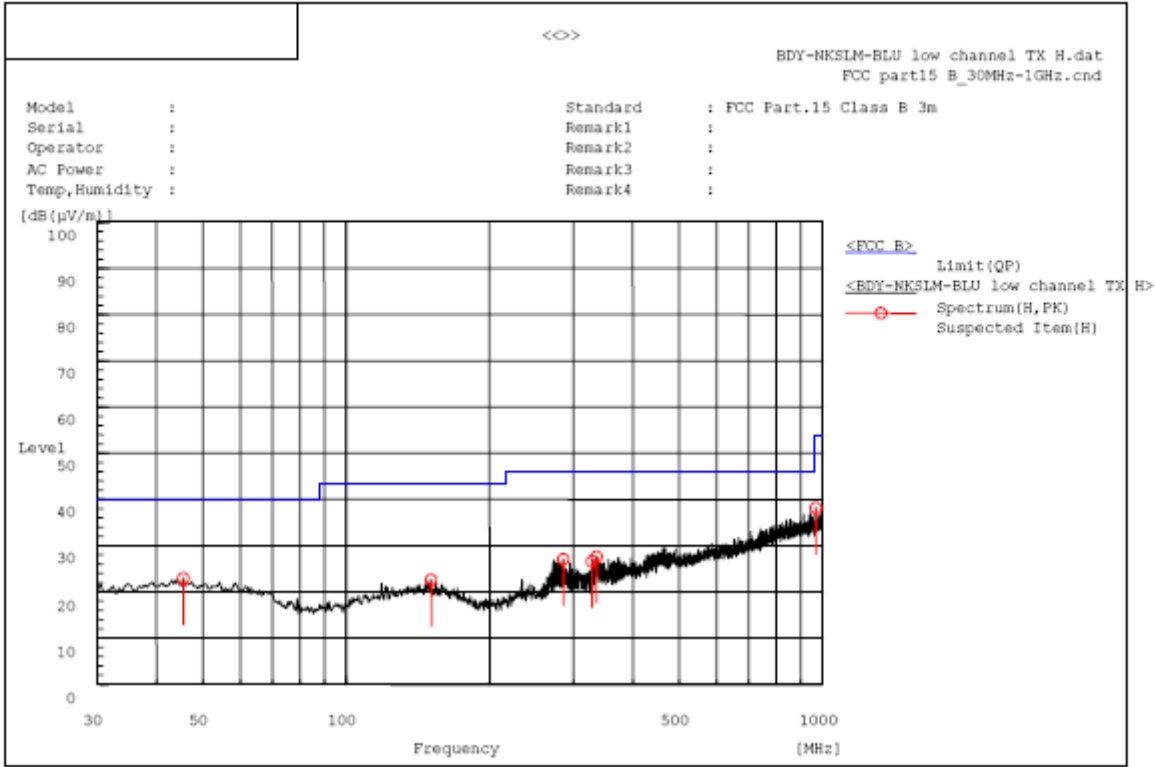


A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
45.520	H	5.6	17.3	22.9	40.0	17.1	Pass	200.0	71.7
150.765	H	6.0	16.6	22.6	43.5	20.9	Pass	100.0	92.4
285.595	H	9.4	17.7	27.1	46.0	18.9	Pass	150.0	250.1
328.275	H	8.5	18.1	26.6	46.0	19.4	Pass	200.0	287.8
335.550	H	9.3	18.3	27.6	46.0	18.4	Pass	200.0	180.7
968.475	H	7.4	30.8	38.2	54.0	15.8	Pass	150.0	288.1

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

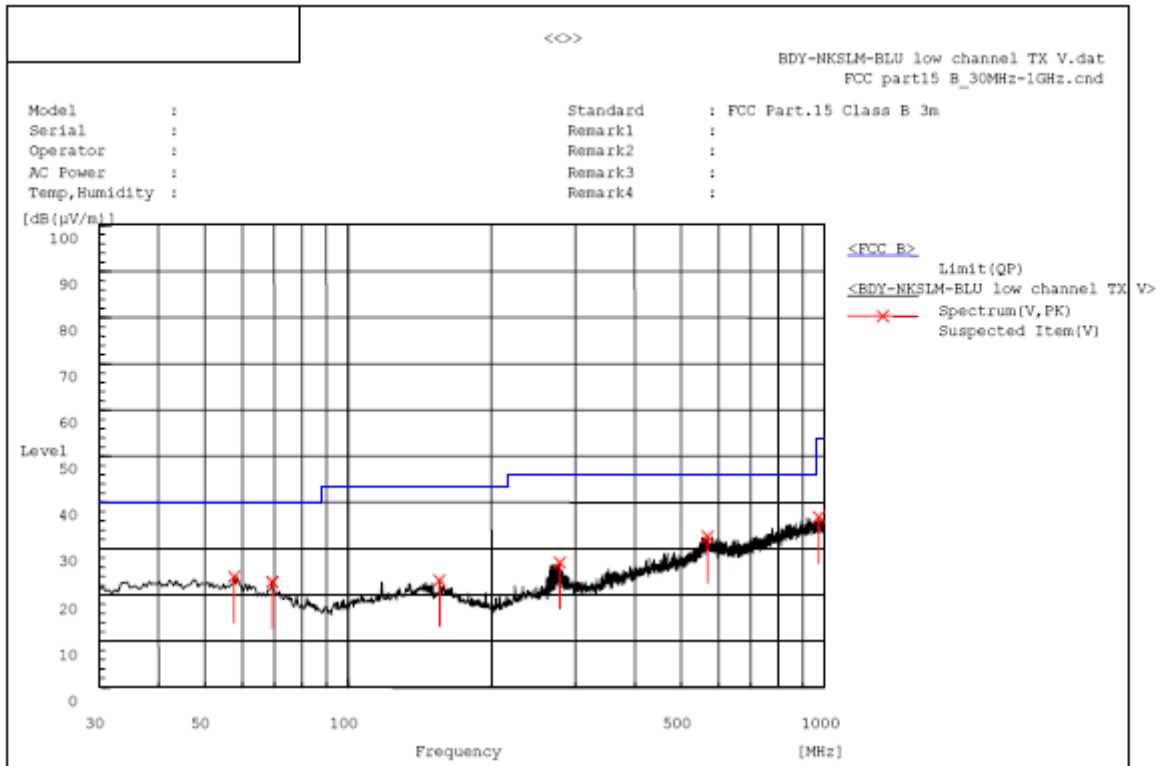

A. Suspected List:


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
57.645	V	7.4	16.5	23.9	40.0	16.1	Pass	200.0	193.0
69.285	V	8.2	14.6	22.8	40.0	17.2	Pass	150.0	71.8
155.615	V	6.6	16.6	23.2	43.5	20.3	Pass	150.0	145.4
278.320	V	9.3	17.7	27.0	46.0	19.0	Pass	200.0	85.8
568.350	V	8.3	24.3	32.6	46.0	13.4	Pass	150.0	71.8
972.355	V	6.0	30.9	36.9	54.0	17.1	Pass	200.0	98.4

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHZ-1GHZ)-MIDDLE CHANNEL-HORIZONTAL

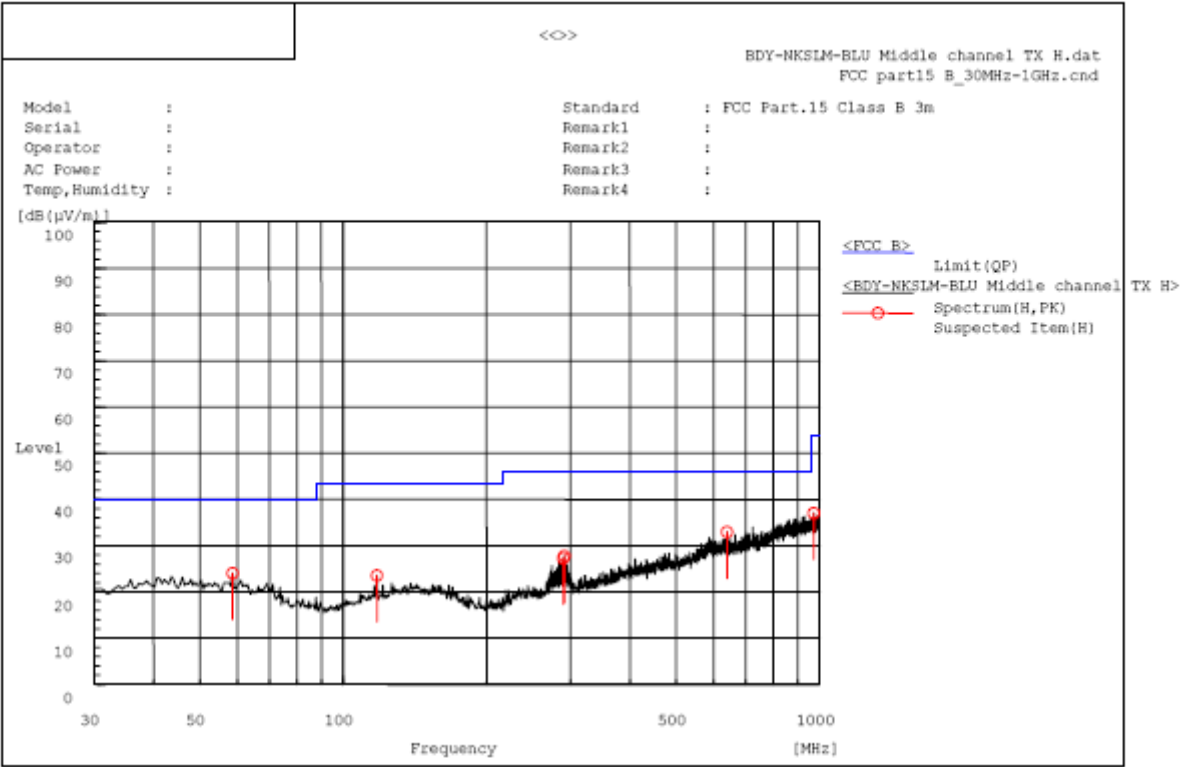


A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
58.615	H	7.6	16.4	24.0	40.0	16.0	Pass	100.0	92.5
117.785	H	8.3	15.2	23.5	43.5	20.0	Pass	100.0	20.3
289.960	H	9.7	17.6	27.3	46.0	18.7	Pass	200.0	107.2
291.415	H	10.2	17.5	27.7	46.0	18.3	Pass	100.0	92.5
639.645	H	7.4	25.5	32.9	46.0	13.1	Pass	200.0	144.4
972.355	H	6.1	30.9	37.0	54.0	17.0	Pass	150.0	35.1

RESULT: PASS

RADIATED EMISSION TEST- (30MHZ-1GHZ)- MIDDLE CHANNEL -VERTICAL

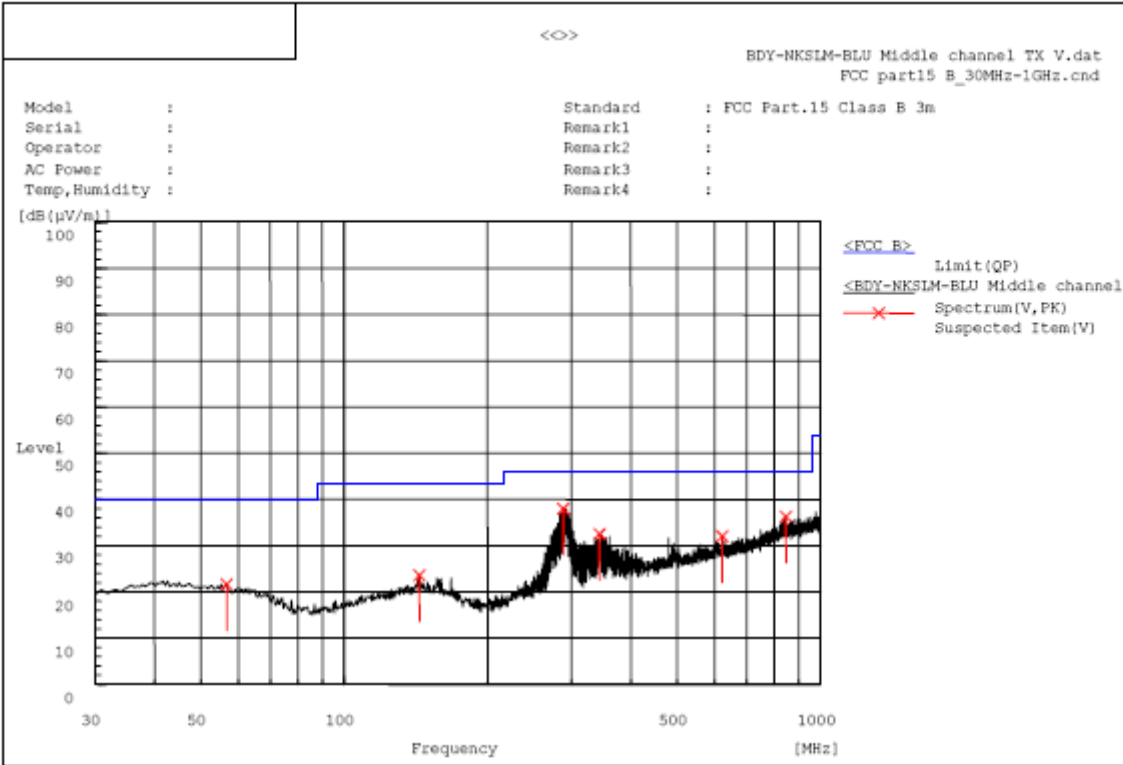

A. Suspected List:


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
56.675	V	5.1	16.6	21.7	40.0	18.3	Pass	150.0	251.4
143.975	V	7.0	16.6	23.6	43.5	19.9	Pass	100.0	56.6
288.505	V	20.4	17.6	38.0	46.0	8.0	Pass	100.0	56.6
343.795	V	13.9	18.6	32.5	46.0	13.5	Pass	100.0	56.6
621.700	V	6.7	25.3	32.0	46.0	14.0	Pass	150.0	69.2
846.255	V	6.8	29.5	36.3	46.0	9.7	Pass	150.0	287.8

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

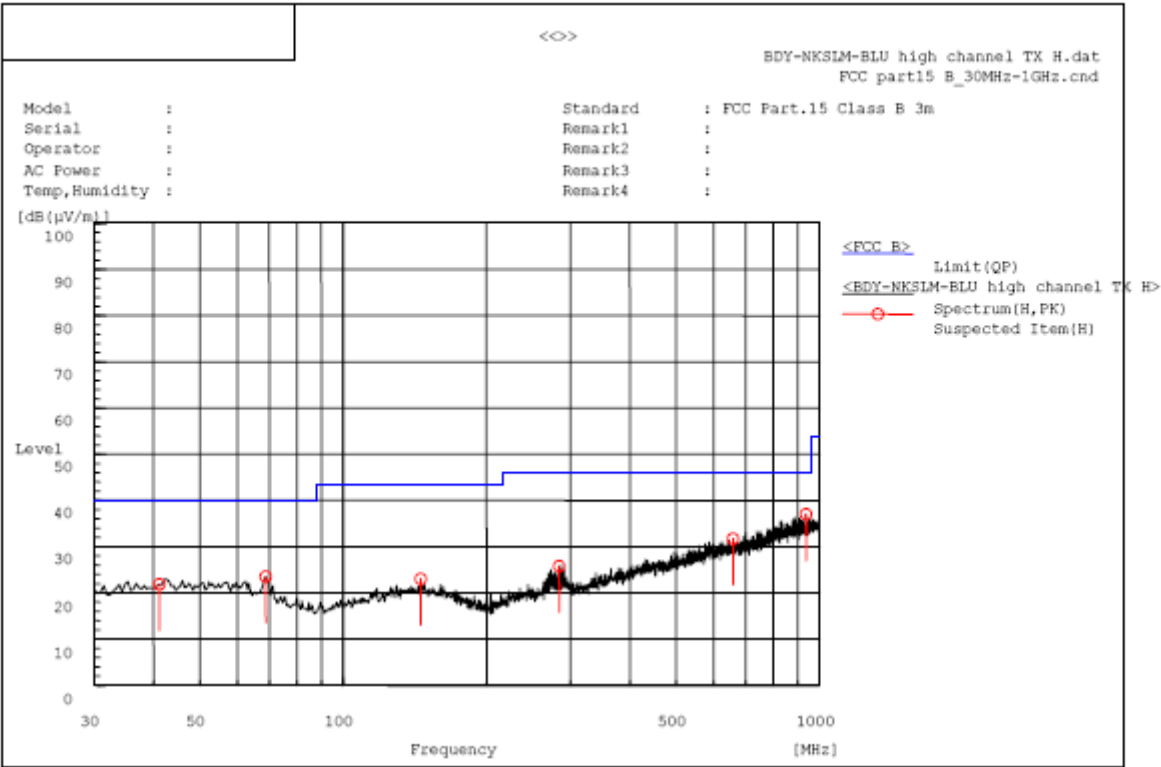


A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
41.155	H	4.5	17.4	21.9	40.0	18.1	Pass	200.0	91.1
68.800	H	8.7	14.8	23.5	40.0	16.5	Pass	150.0	37.4
145.430	H	6.4	16.6	23.0	43.5	20.5	Pass	100.0	287.2
284.140	H	8.1	17.7	25.8	46.0	20.2	Pass	150.0	72.9
658.560	H	6.0	25.7	31.7	46.0	14.3	Pass	150.0	287.2
937.435	H	6.5	30.5	37.0	46.0	9.0	Pass	100.0	35.9

RESULT: PASS

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

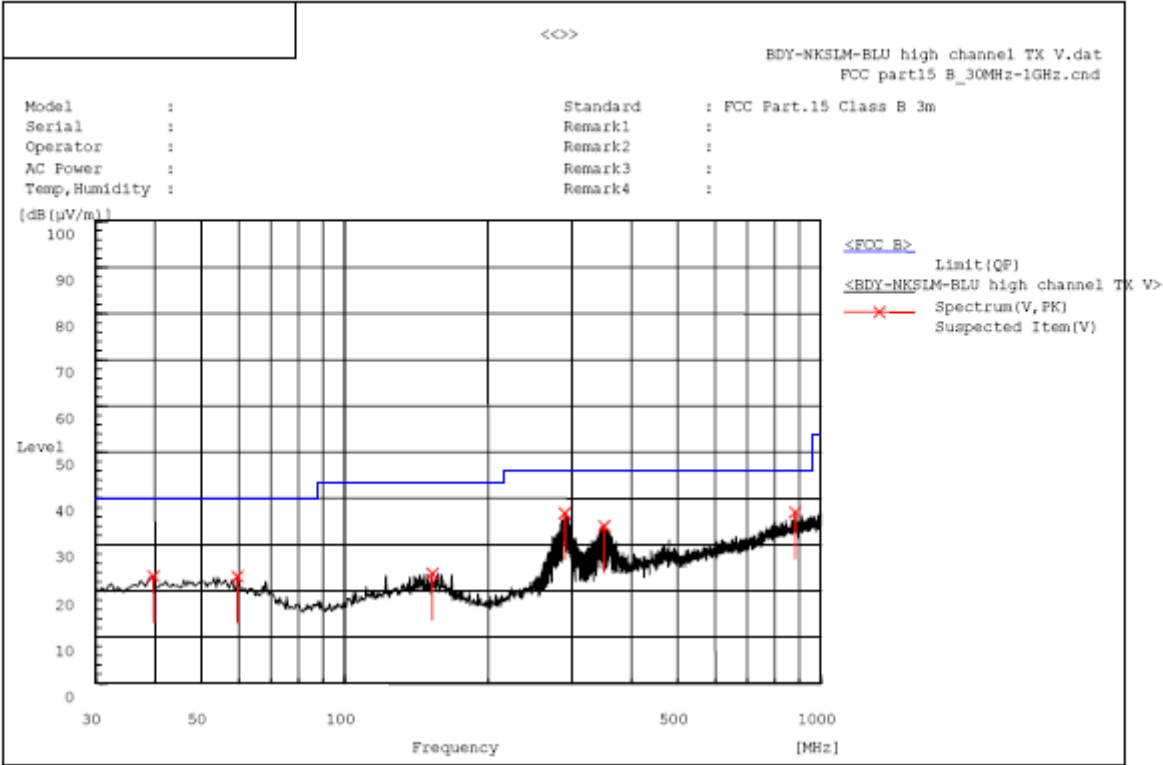

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
39.700	V	5.8	17.4	23.2	40.0	16.8	Pass	200.0	200.7
59.585	V	6.9	16.2	23.1	40.0	16.9	Pass	200.0	20.0
152.705	V	7.1	16.6	23.7	43.5	19.8	Pass	150.0	250.5
289.960	V	19.2	17.6	36.8	46.0	9.2	Pass	150.0	176.9
350.585	V	15.1	18.9	34.0	46.0	12.0	Pass	200.0	272.9
882.630	V	7.0	30.0	37.0	46.0	9.0	Pass	150.0	322.7

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

**RADIATED EMISSION ABOVE 1GHz
 FOR BR/EDR
 (Worst modulation: GFSK)**

For Fundamental


RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

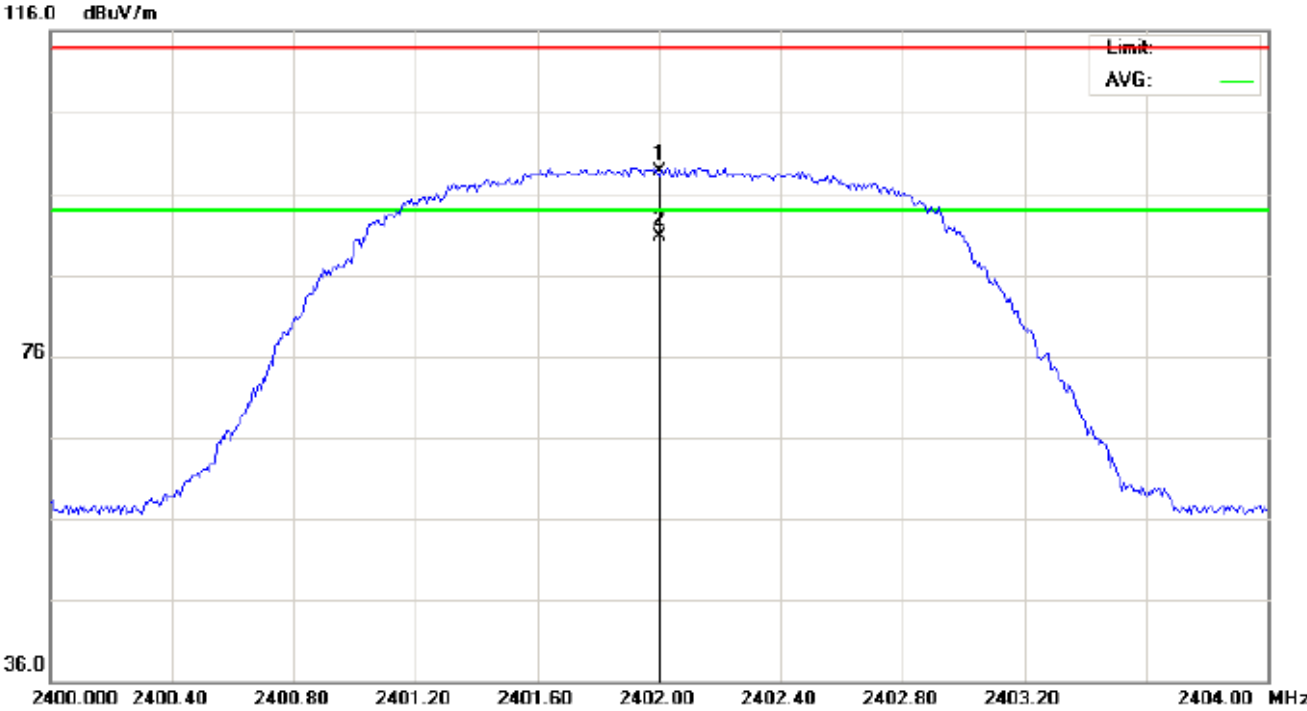

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	88.36	10.32	98.68	114.00	-15.32	peak			
2	*	2402.000	80.41	10.32	90.73	94.00	-3.27	AVG	100	233	

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

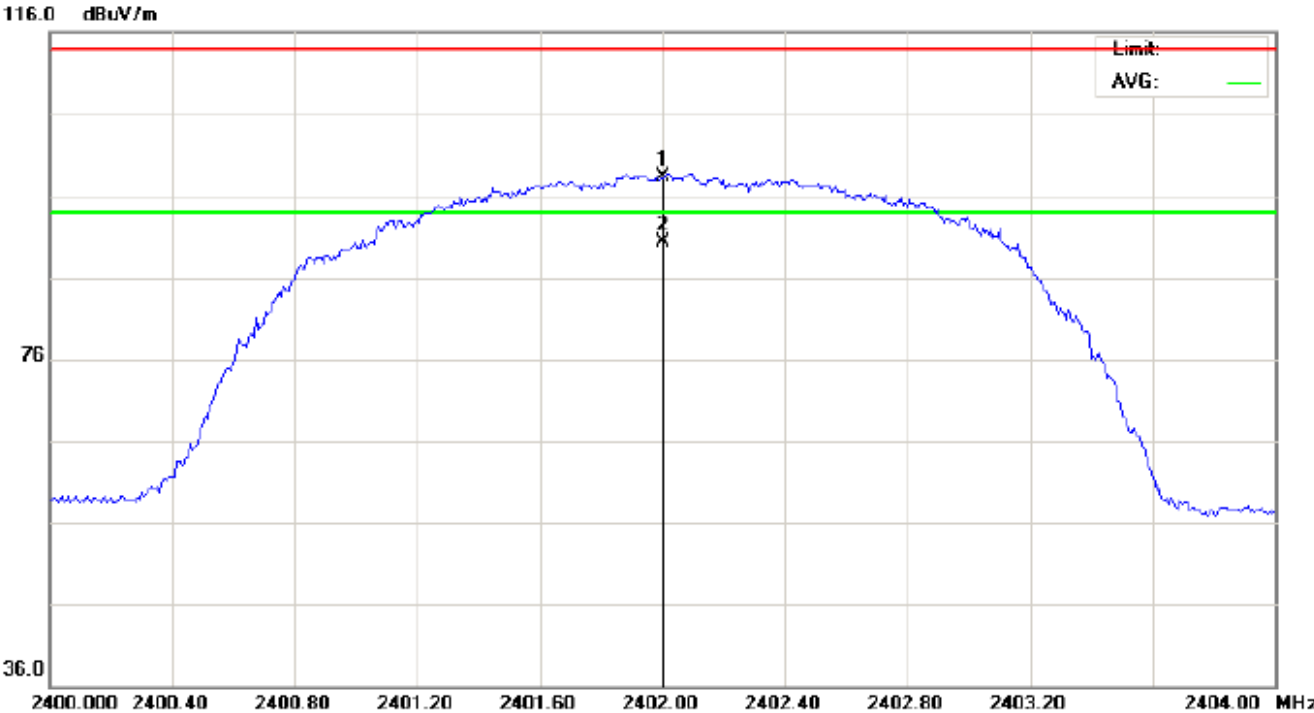

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2402.000	87.92	10.32	98.24	114.00	-15.76	peak			
2	*	2402.000	79.94	10.32	90.26	94.00	-3.74	AVG	100	258	

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

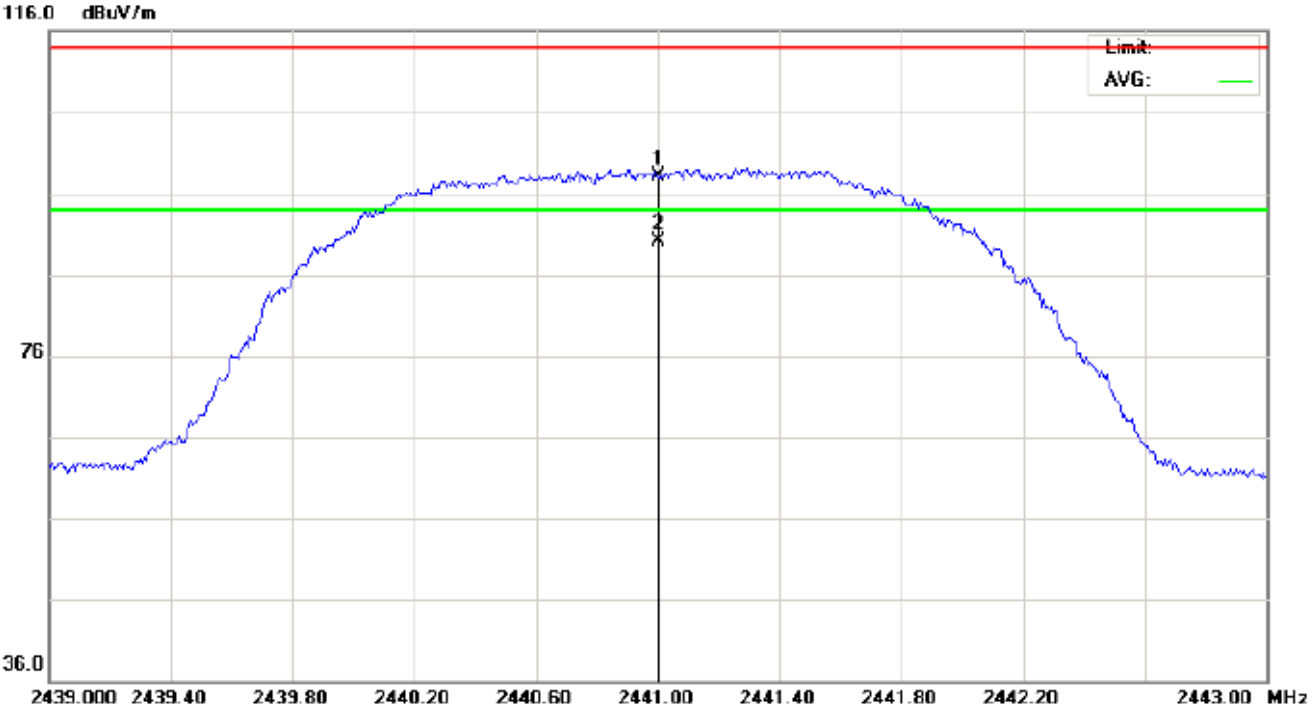

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	87.69	10.36	98.05	114.00	-15.95	peak			
2	*	2441.000	79.74	10.36	90.10	94.00	-3.90	AVG	100	236	

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

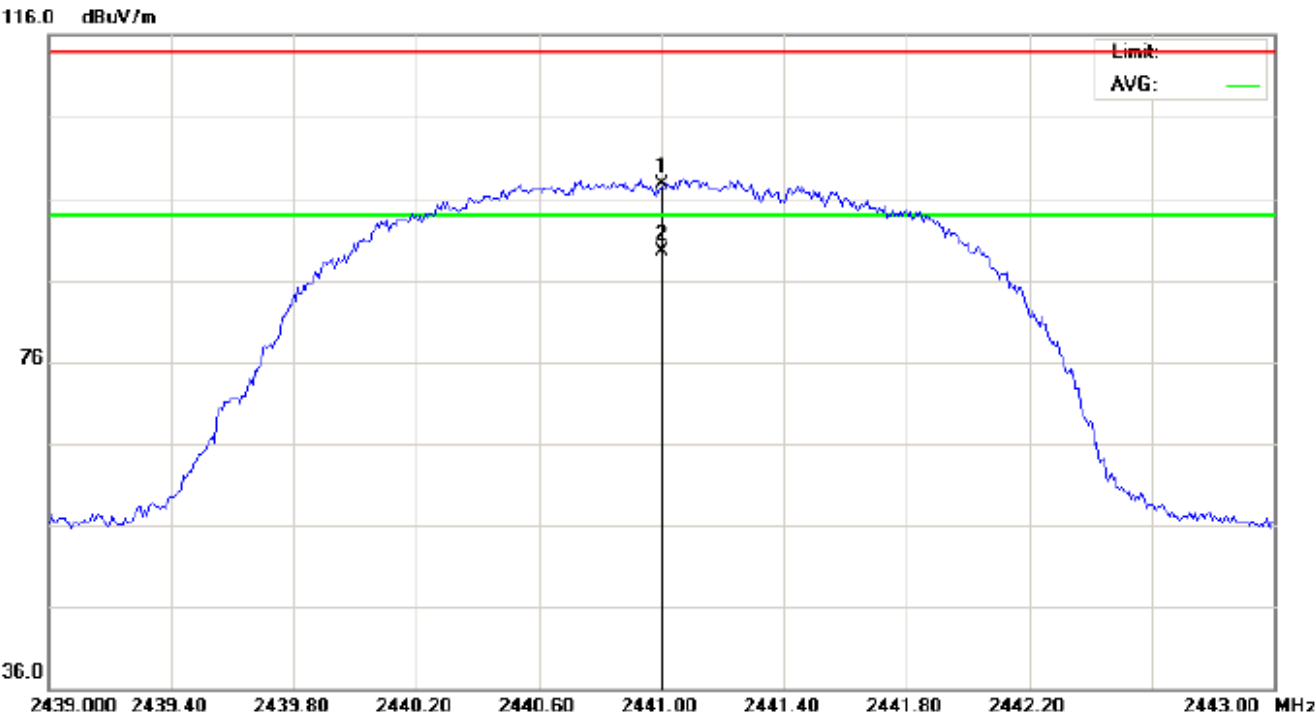

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2441.000	87.27	10.36	97.63	114.00	-16.37	peak			
2	*	2441.000	79.24	10.36	89.60	94.00	-4.40	AVG	100	158	

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

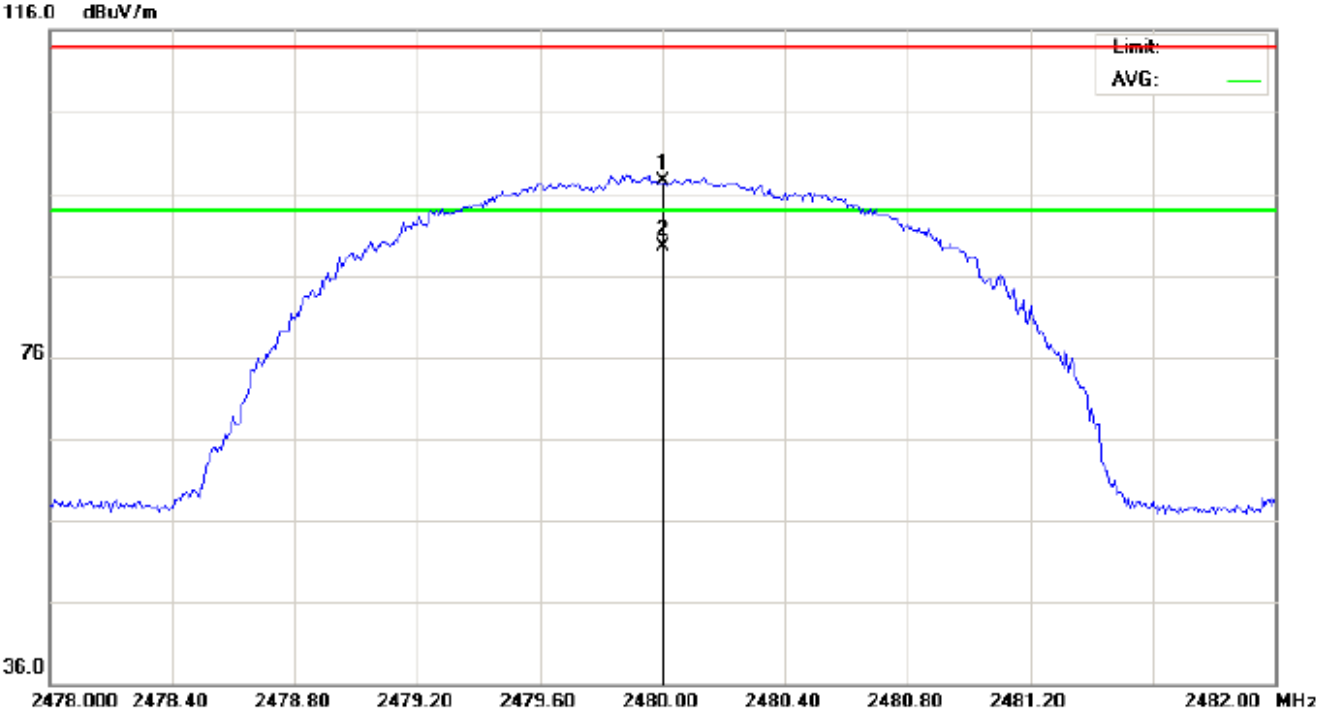

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	87.04	10.41	97.45	114.00	-16.55	peak			
2	*	2480.000	79.11	10.41	89.52	94.00	-4.48	AVG	100	358	

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

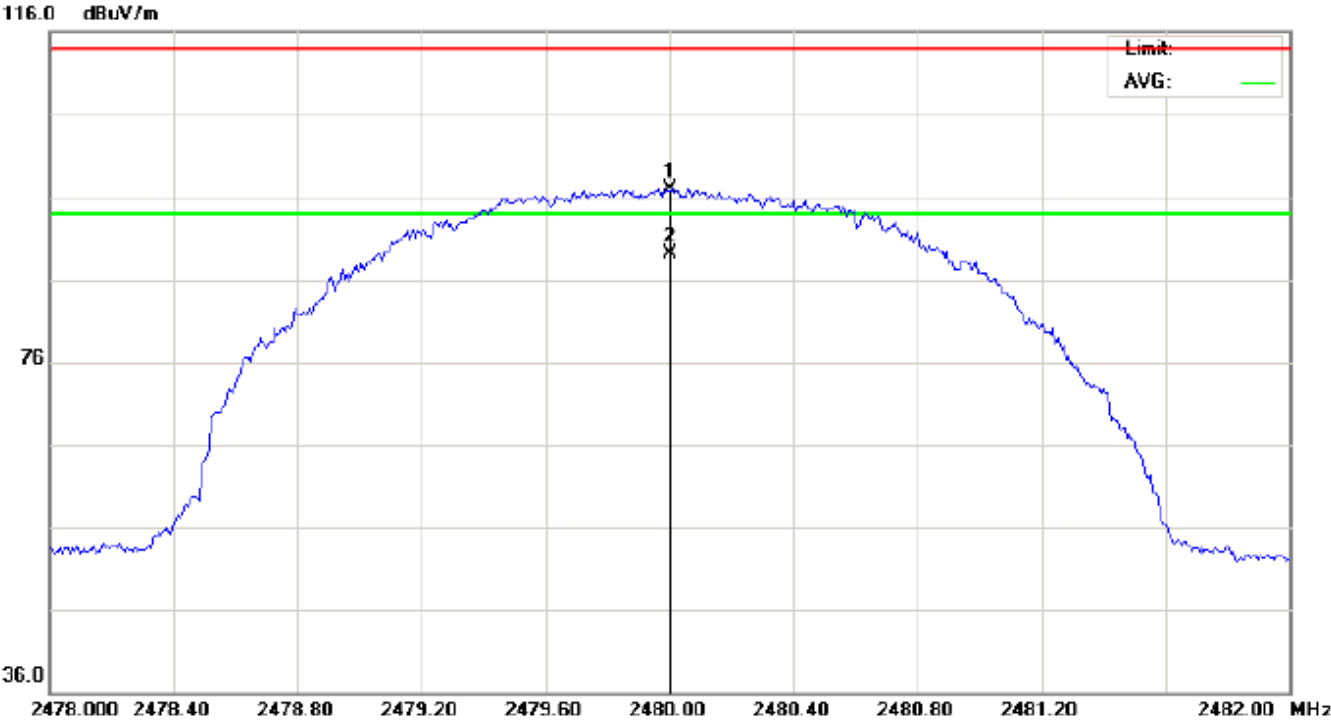

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2480.000	86.56	10.41	96.97	114.00	-17.03	peak			
2	*	2480.000	78.61	10.41	89.02	94.00	-4.98	AVG	100		

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	88.36	10.32	98.68	114	-15.32	Horizontal
2402	87.92	10.32	98.24	114	-15.76	Vertical
2441	87.69	10.36	98.05	114	-15.95	Horizontal
2441	87.27	10.36	97.63	114	-16.37	Vertical
2480	87.04	10.41	97.45	114	-16.55	Horizontal
2480	86.56	10.41	96.97	114	-17.03	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	80.41	10.32	90.73	94	-3.27	Horizontal
2402	79.94	10.32	90.26	94	-3.74	Vertical
2441	79.74	10.36	90.10	94	-3.90	Horizontal
2441	79.24	10.36	89.60	94	-4.40	Vertical
2480	79.11	10.41	89.52	94	-4.48	Horizontal
2480	78.61	10.41	89.02	94	-4.98	Vertical

2Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	87.92	10.32	98.24	114	-15.76	Horizontal
2402	87.46	10.32	97.78	114	-16.22	Vertical
2441	87.27	10.36	97.63	114	-16.37	Horizontal
2441	86.84	10.36	97.20	114	-16.80	Vertical
2480	86.56	10.41	96.97	114	-17.03	Horizontal
2480	86.14	10.41	96.55	114	-17.45	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	79.94	10.32	90.26	94	-3.74	Horizontal
2402	79.50	10.32	89.82	94	-4.18	Vertical
2441	79.25	10.36	89.61	94	-4.39	Horizontal
2441	78.79	10.36	89.15	94	-4.85	Vertical
2480	78.66	10.41	89.07	94	-4.93	Horizontal
2480	78.13	10.41	88.54	94	-5.46	Vertical

3Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	87.47	10.32	97.79	114	-16.21	Horizontal
2402	87.01	10.32	97.33	114	-16.67	Vertical
2441	86.86	10.36	97.22	114	-16.78	Horizontal
2441	86.35	10.36	96.71	114	-17.29	Vertical
2480	86.14	10.41	96.55	114	-17.45	Horizontal
2480	85.72	10.41	96.13	114	-17.87	Vertical


Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	79.46	10.32	89.78	94	-4.22	Horizontal
2402	79.04	10.32	89.36	94	-4.64	Vertical
2441	78.75	10.36	89.11	94	-4.89	Horizontal
2441	78.38	10.36	88.74	94	-5.26	Vertical
2480	78.19	10.41	88.60	94	-5.40	Horizontal
2480	77.67	10.41	88.08	94	-5.92	Vertical

FOR BR/EDR
(Worst modulation: GFSK)

For Harmonics


RADIATED EMISSION TEST- (ABOVE 1GHZ)-LOW CHANNEL-HORIZONTAL

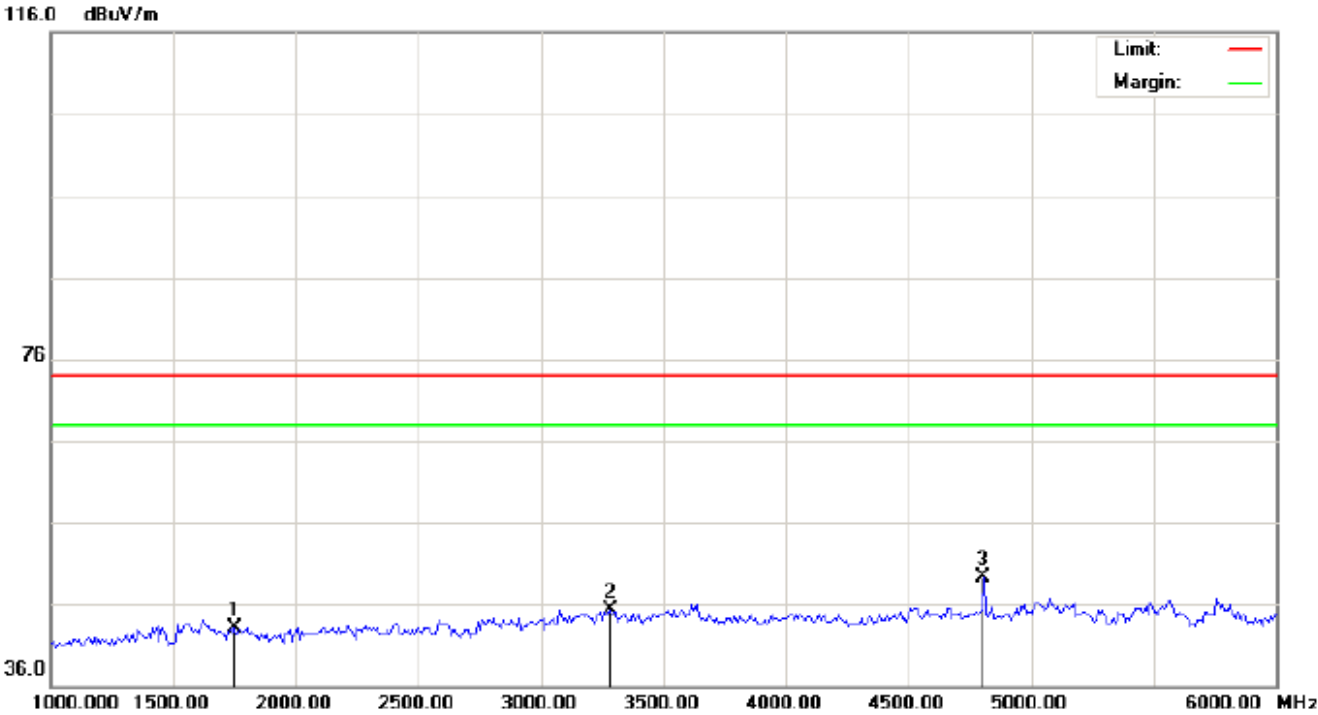

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1750.000	35.85	7.25	43.10	74.00	-30.90	peak			
2		3283.333	33.30	11.91	45.21	74.00	-28.79	peak			
3	*	4804.000	41.71	7.69	49.40	74.00	-24.60	peak			

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

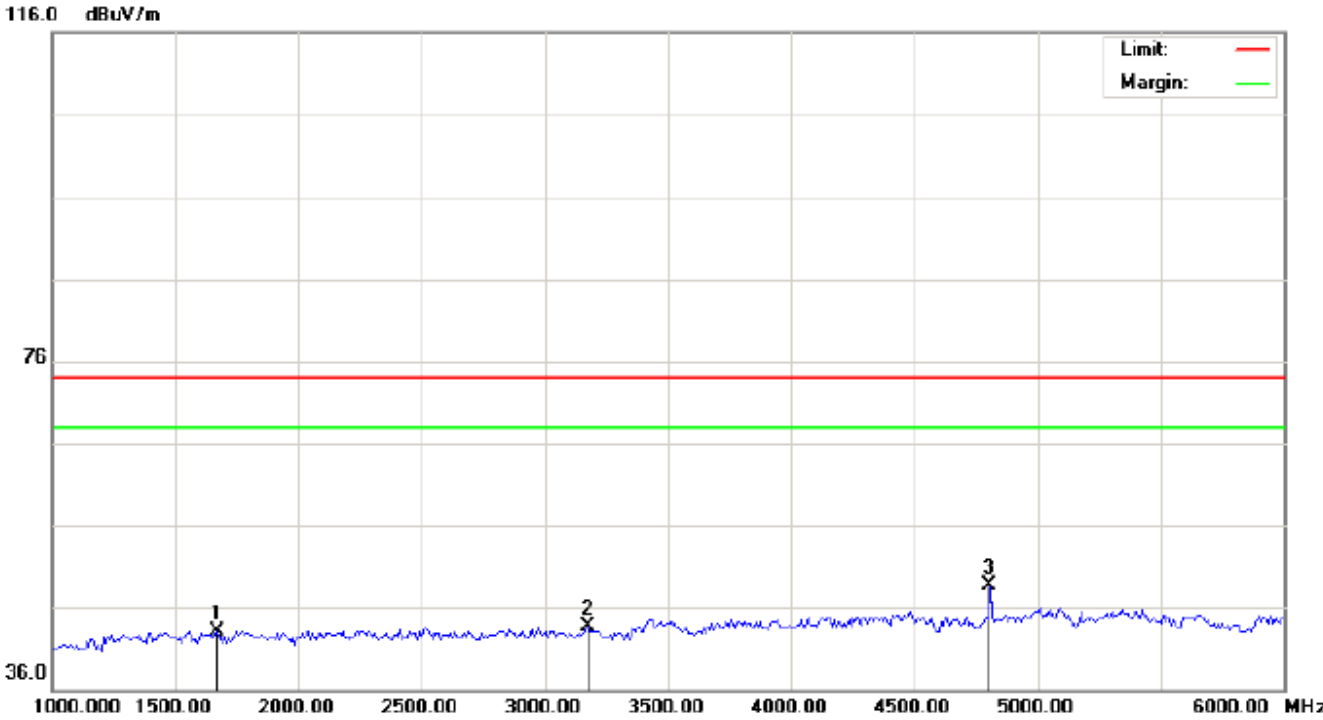

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1666.667	36.69	6.37	43.06	74.00	-30.94	peak			
2		3175.000	31.84	11.80	43.64	74.00	-30.36	peak			
3	*	4804.000	41.05	7.69	48.74	74.00	-25.26	peak			

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

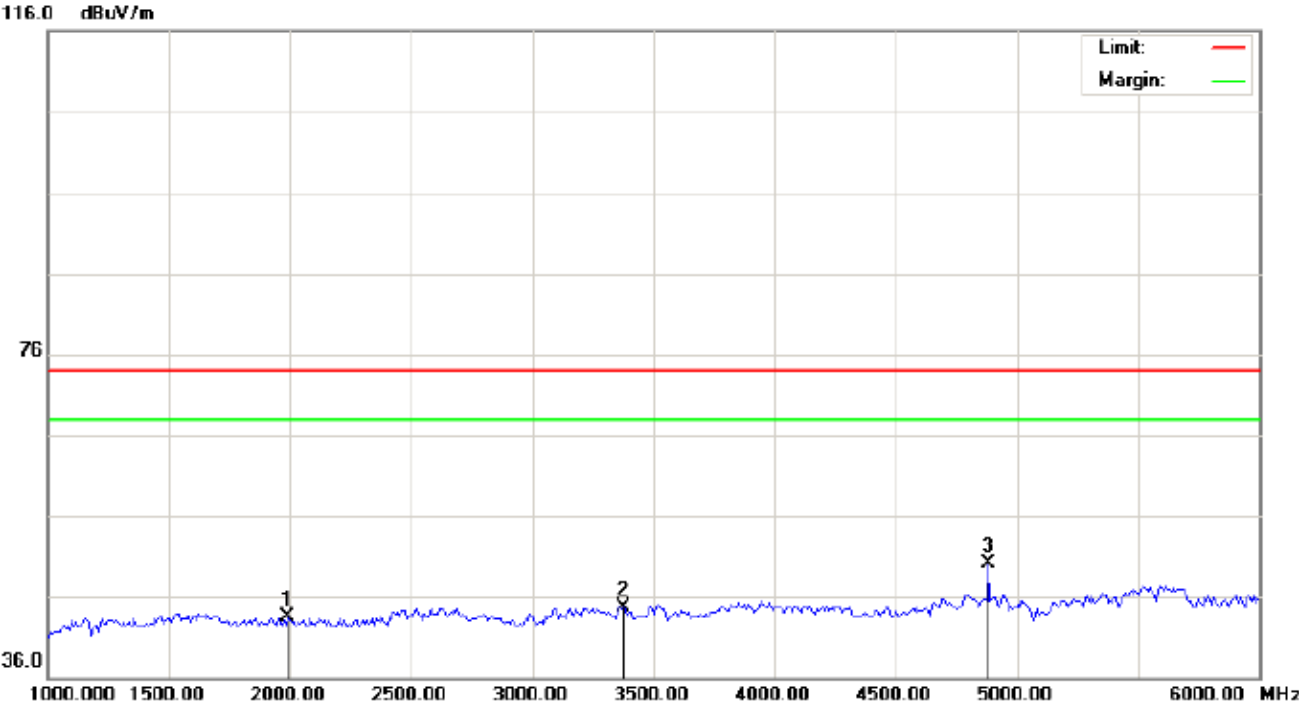

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1991.667	33.70	9.79	43.49	74.00	-30.51	peak			
2		3375.000	32.64	11.99	44.63	74.00	-29.37	peak			
3	*	4882.000	42.16	7.89	50.05	74.00	-23.95	peak			

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

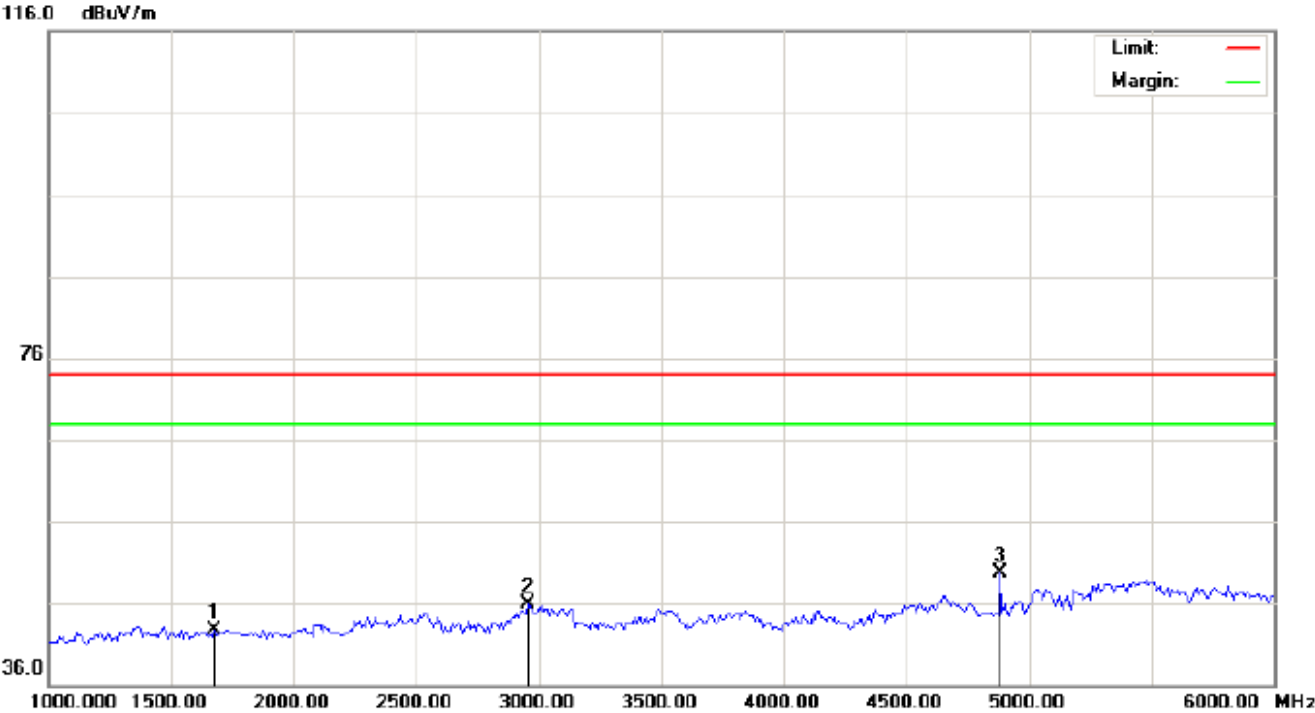

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1675.000	36.22	6.46	42.68	74.00	-31.32	peak			
2		2958.333	34.27	11.54	45.81	74.00	-28.19	peak			
3	*	4882.000	41.89	7.89	49.78	74.00	-24.22	peak			

RESULT: PASS


RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

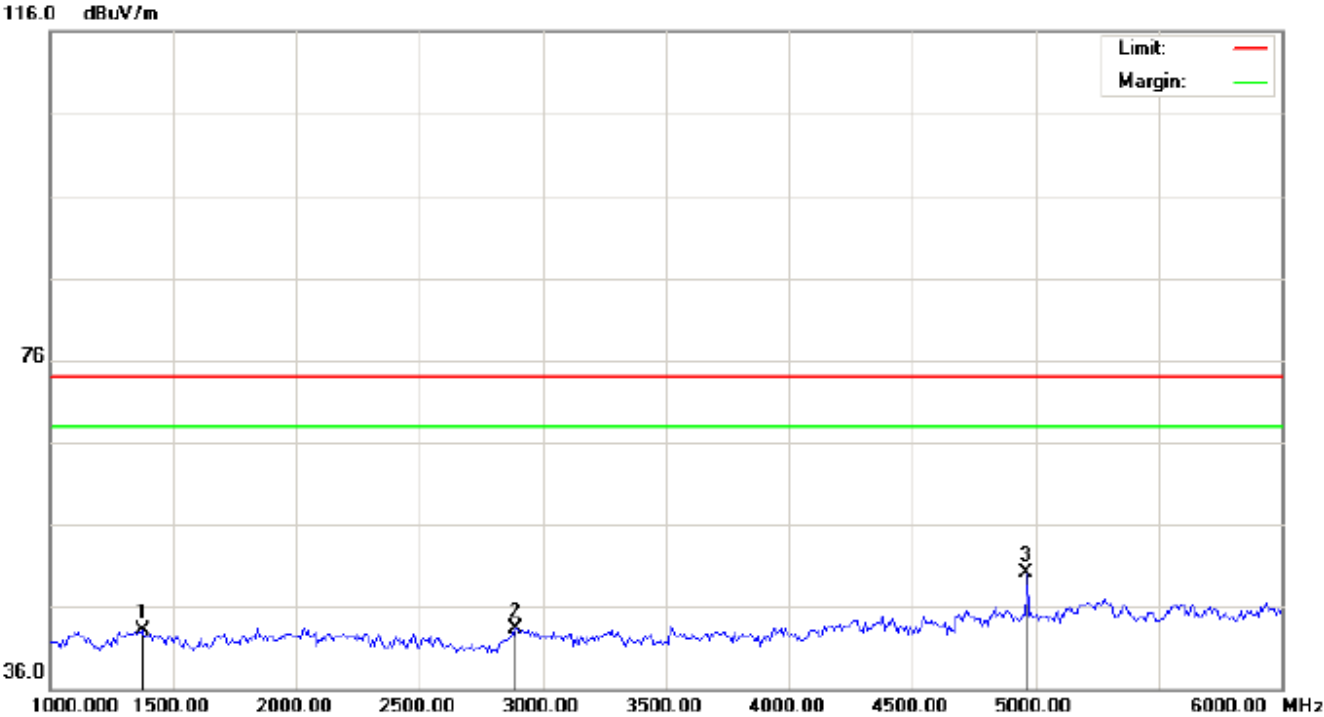

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1375.000	38.52	4.57	43.09	74.00	-30.91	peak			
2		2891.667	31.85	11.38	43.23	74.00	-30.77	peak			
3	*	4960.000	42.10	8.09	50.19	74.00	-23.81	peak			

RESULT: PASS

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

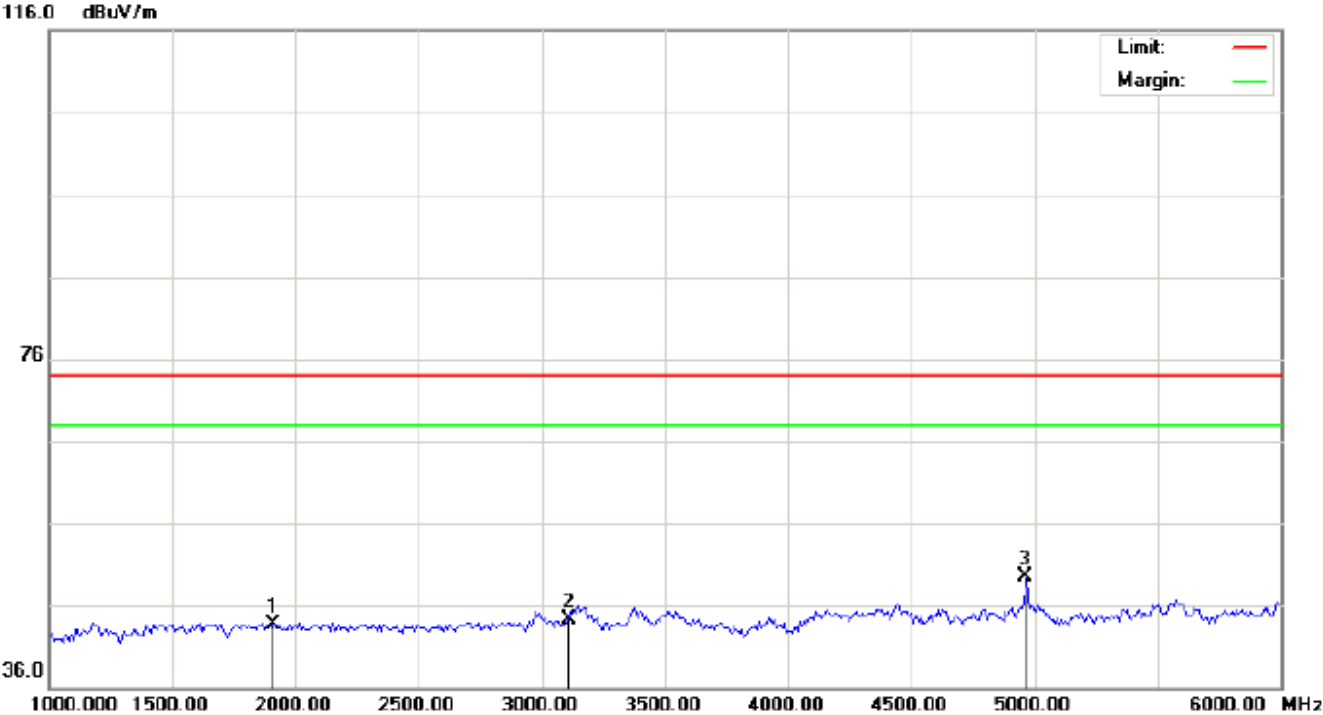

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		1908.333	34.81	8.92	43.73	74.00	-30.27	peak			
2		3108.333	32.58	11.74	44.32	74.00	-29.68	peak			
3	*	4960.000	41.41	8.09	49.50	74.00	-24.50	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

10. BAND EDGE EMISSION


10.1. MEASUREMENT PROCEDURE

1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency(MHz)	Stop frequency(MHz)
2200	2405
2478	2500


10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

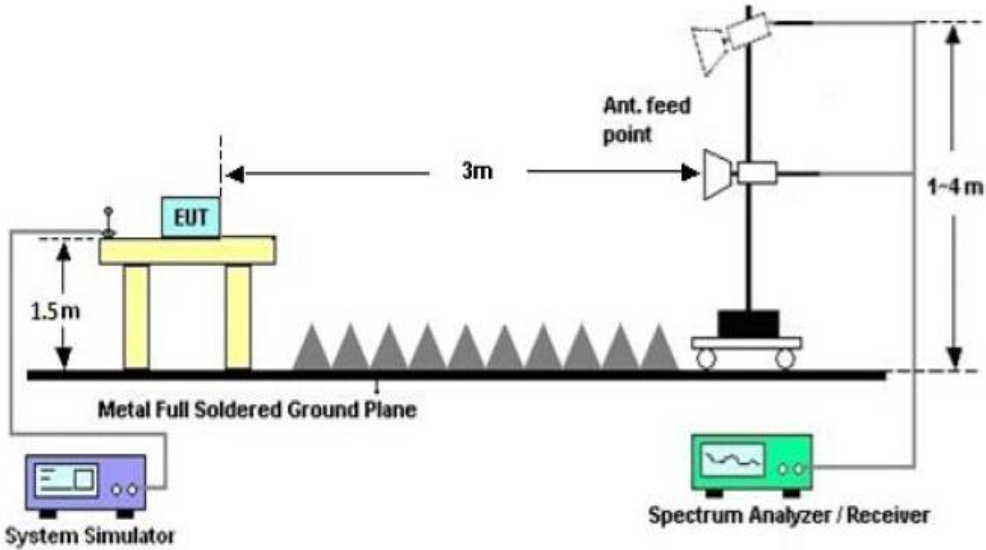


**10.3 RADIATED TEST RESULT
 FOR BR/EDR
 (Worst modulation: GFSK)**

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

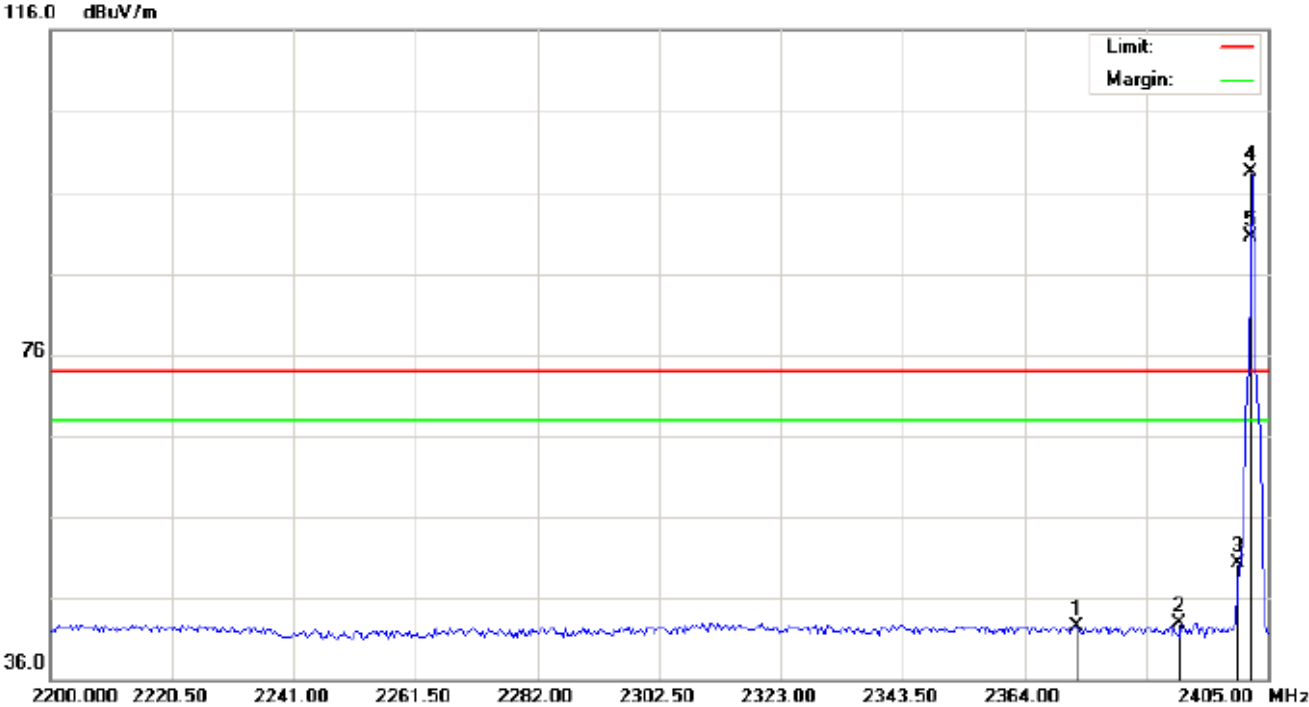


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2372.883	32.16	10.29	42.45	74.00	-31.55	peak			
2		2390.000	32.50	10.31	42.81	74.00	-31.19	peak			
3		2400.000	39.97	10.32	50.29	74.00	-23.71	peak			
4	*	2402.000	88.22	10.32	98.54	74.00	24.54	peak			
5	X	2402.000	80.28	10.32	90.60	74.00	16.60	AVG	100	247	

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

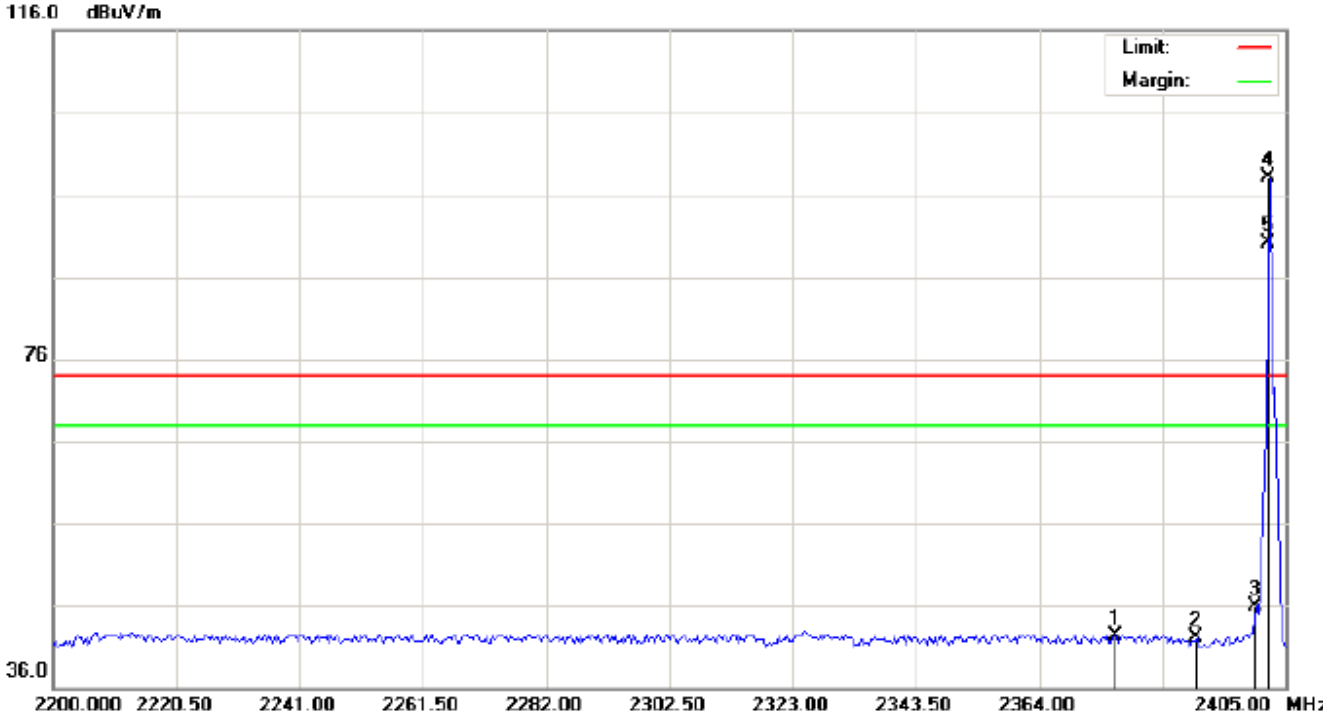


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2376.642	32.09	10.29	42.38	74.00	-31.62	peak			
2		2390.000	31.71	10.31	42.02	74.00	-31.98	peak			
3		2400.000	35.56	10.32	45.88	74.00	-28.12	peak			
4	*	2402.000	87.80	10.32	98.12	74.00	24.12	peak			
5	X	2402.000	79.83	10.32	90.15	74.00	16.15	AVG	100	157	

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

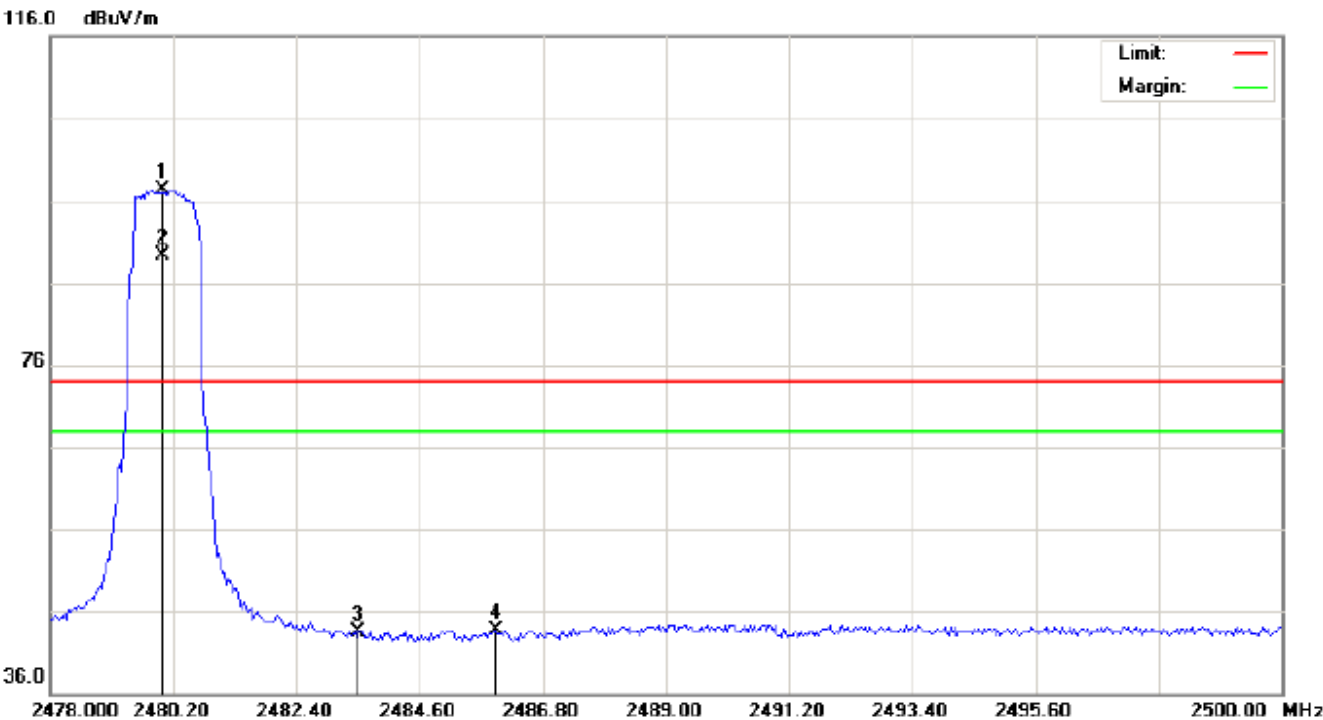

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	*	2480.000	86.92	10.41	97.33	74.00	23.33	peak			
2	X	2480.000	78.99	10.41	89.40	74.00	15.40	AVG	100	261	
3		2483.500	33.19	10.41	43.60	74.00	-30.40	peak			
4		2485.957	33.25	10.41	43.66	74.00	-30.34	peak			

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

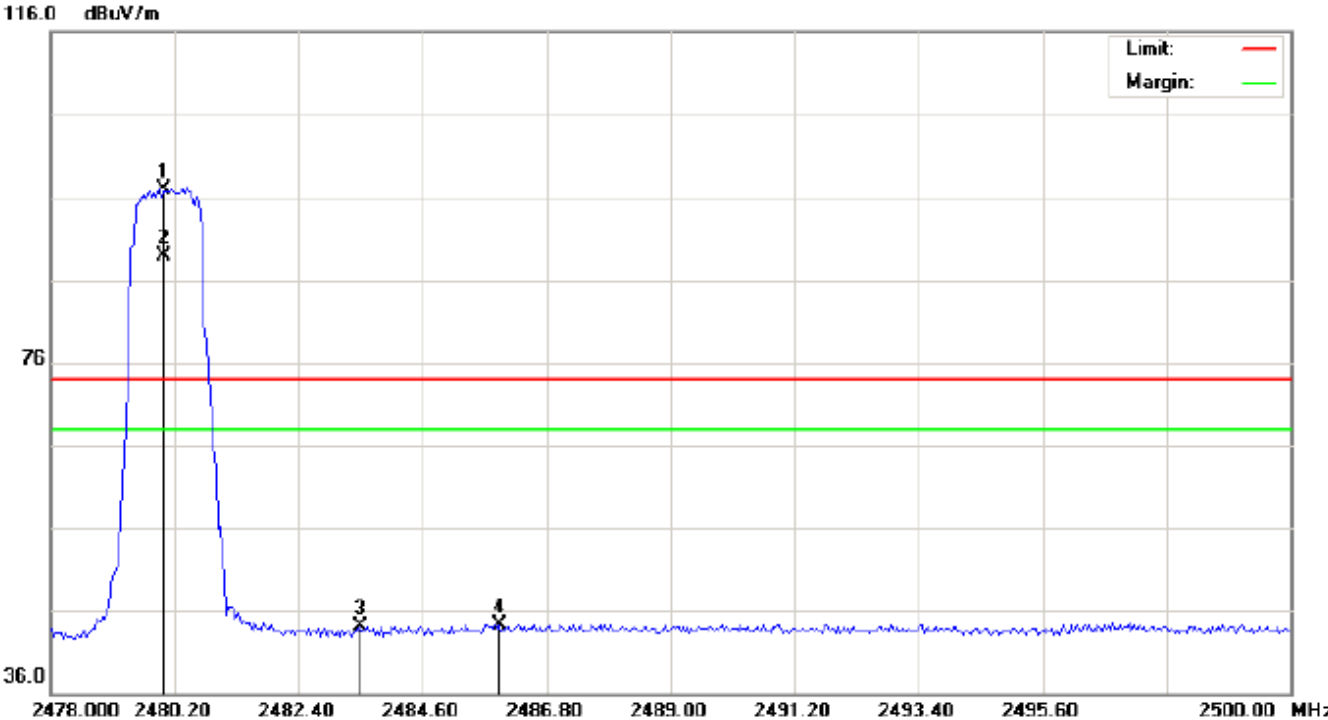

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	*	2480.000	86.45	10.41	96.86	74.00	22.86	peak			
2	X	2480.000	78.50	10.41	88.91	74.00	14.91	AVG	100	134	
3		2483.500	33.76	10.41	44.17	74.00	-29.83	peak			
4		2485.957	33.98	10.41	44.39	74.00	-29.61	peak			

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.
 Hopping on mode and Hopping off mode have been tested, but only worst case reported.

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
 RBW \geq 1% of the 20 dB bandwidth, VBW \geq 3RBW; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

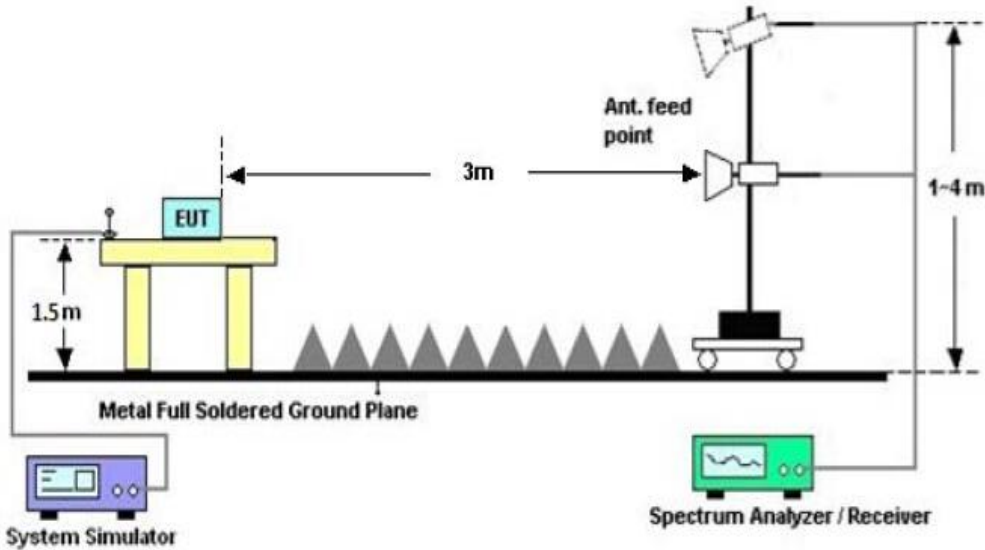


11.3. LIMITS AND MEASUREMENT RESULTS


FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.027	1.133	PASS
	Middle Channel	1.016	1.134	PASS
	High Channel	0.993	1.119	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

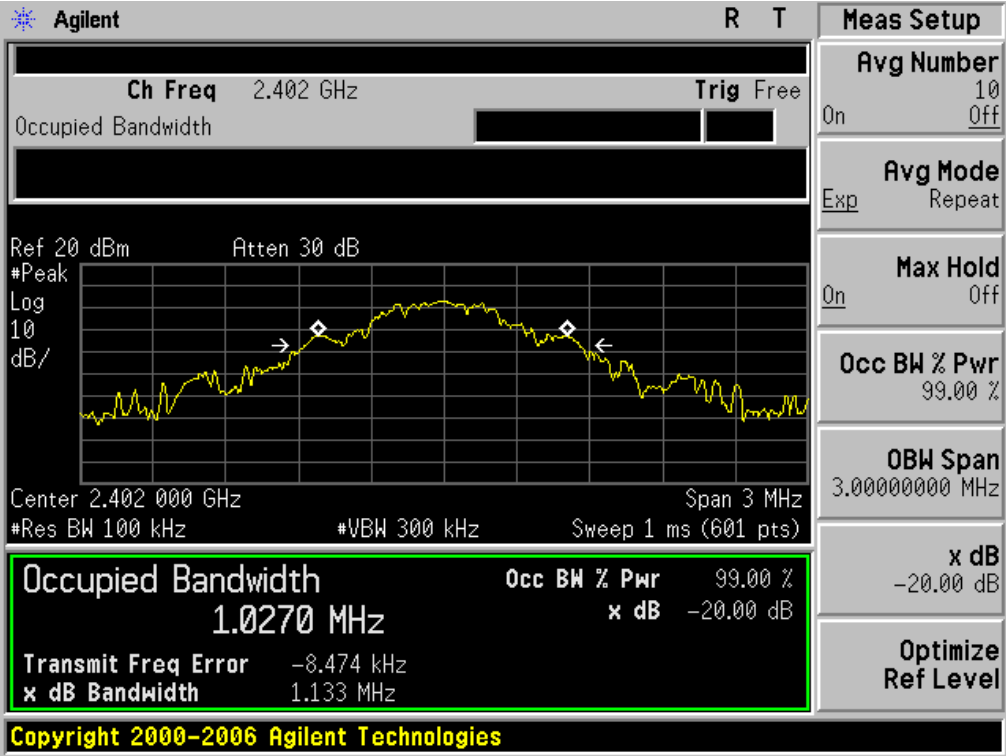

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

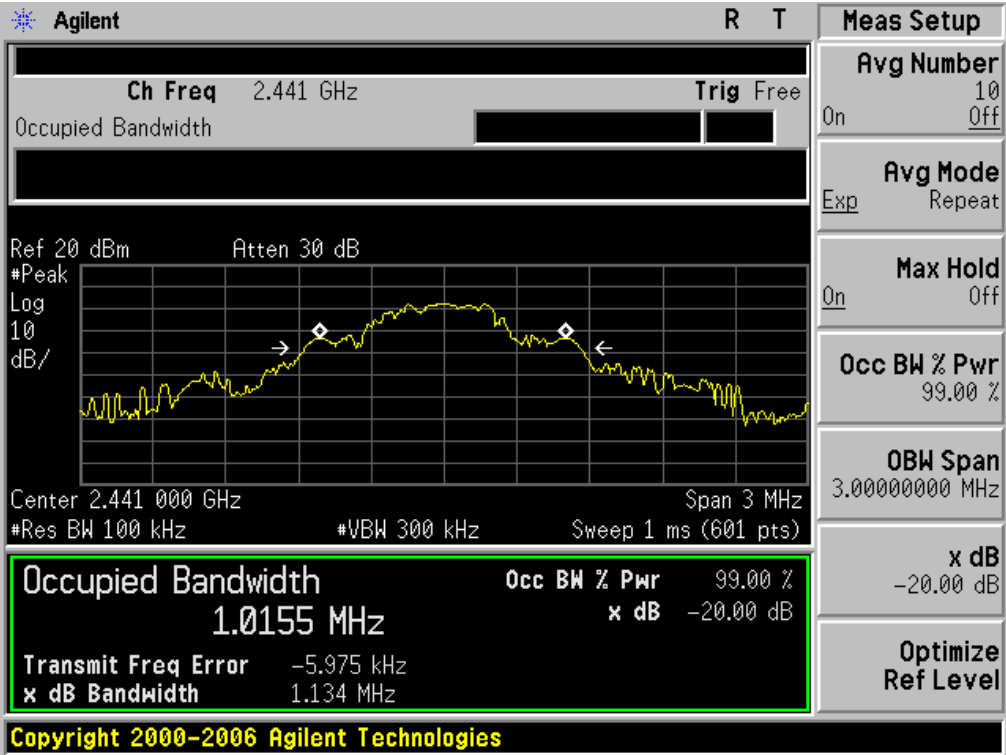


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

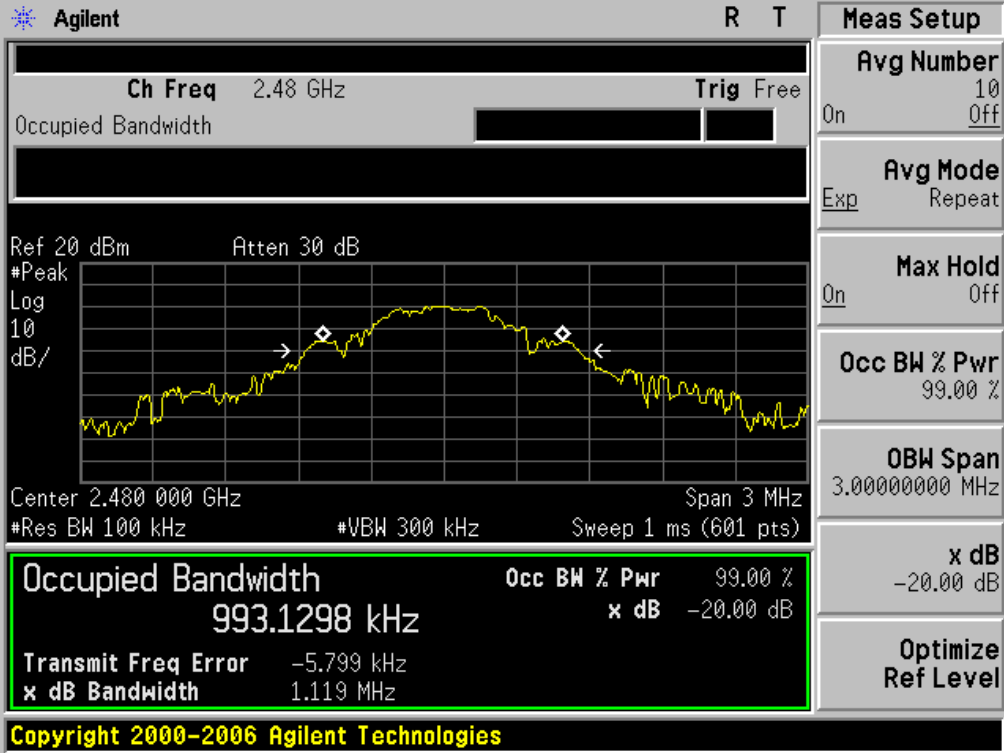


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.221	1.368	PASS
	Middle Channel	1.213	1.388	PASS
	High Channel	1.221	1.376	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

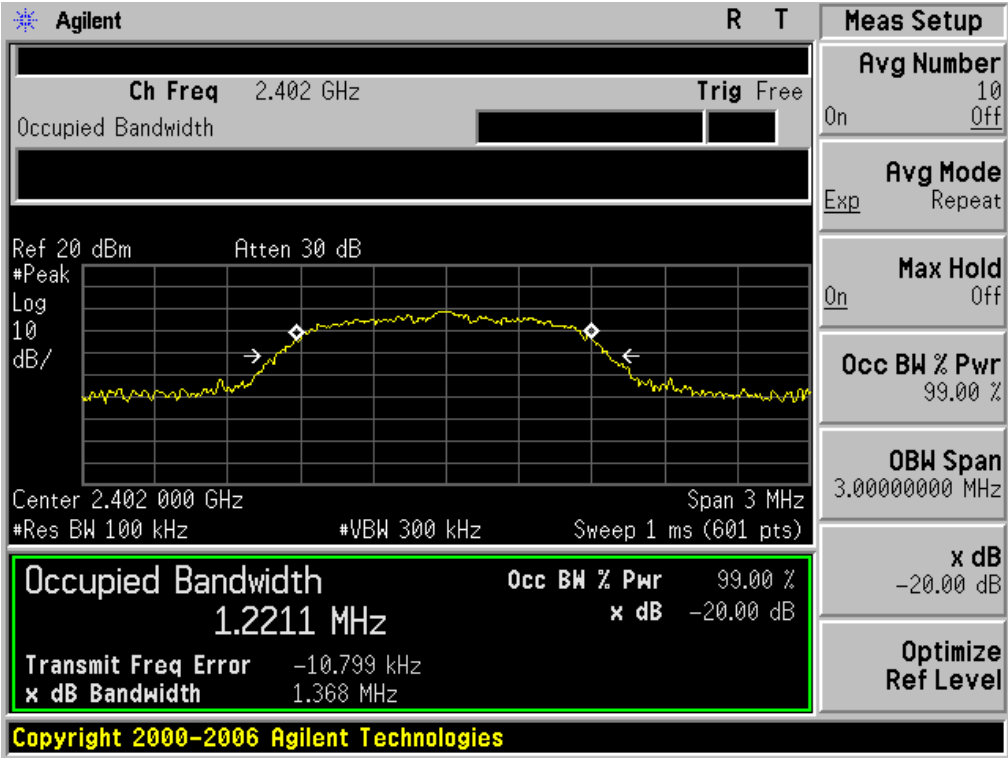

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

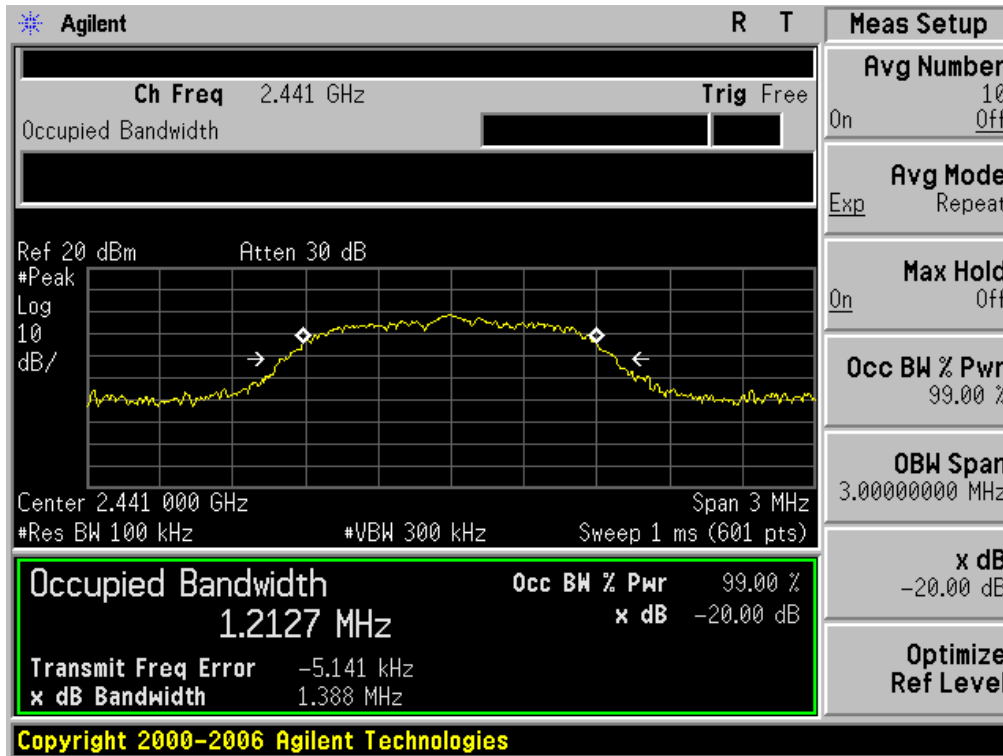


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

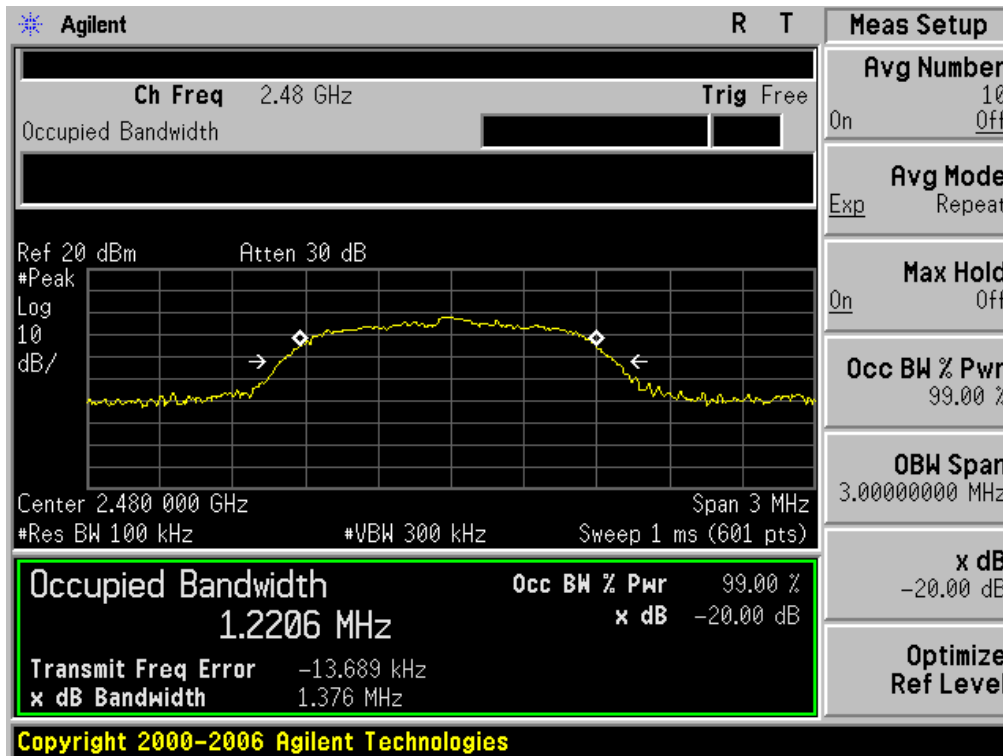


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.216	1.370	PASS
	Middle Channel	1.215	1.376	PASS
	High Channel	1.201	1.364	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

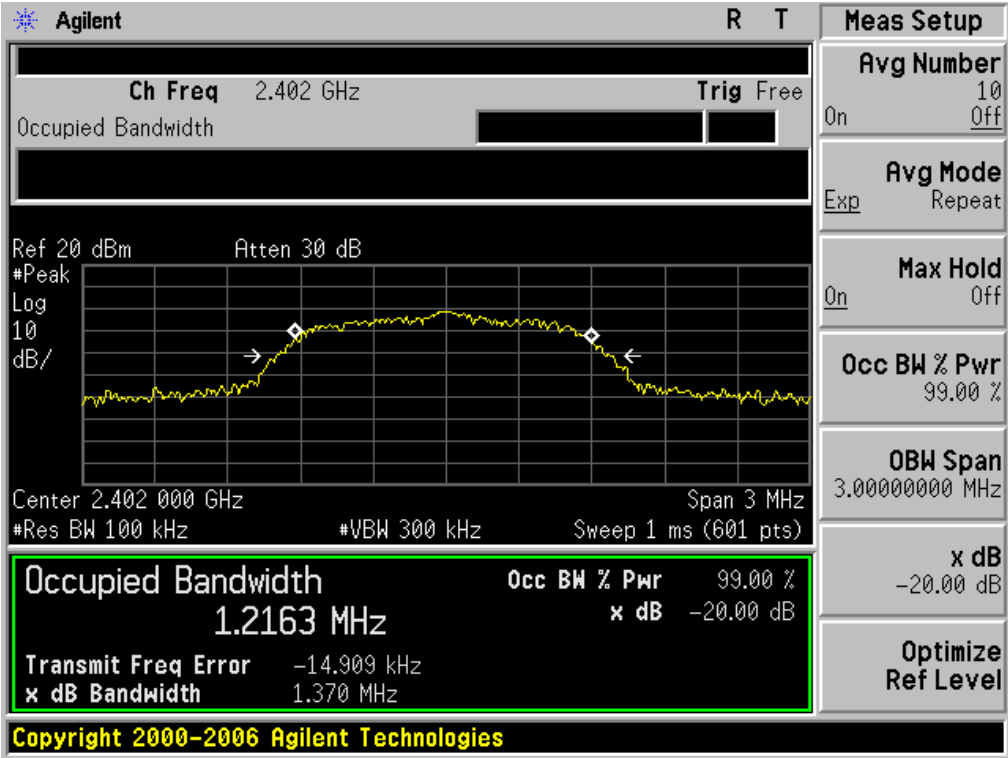

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

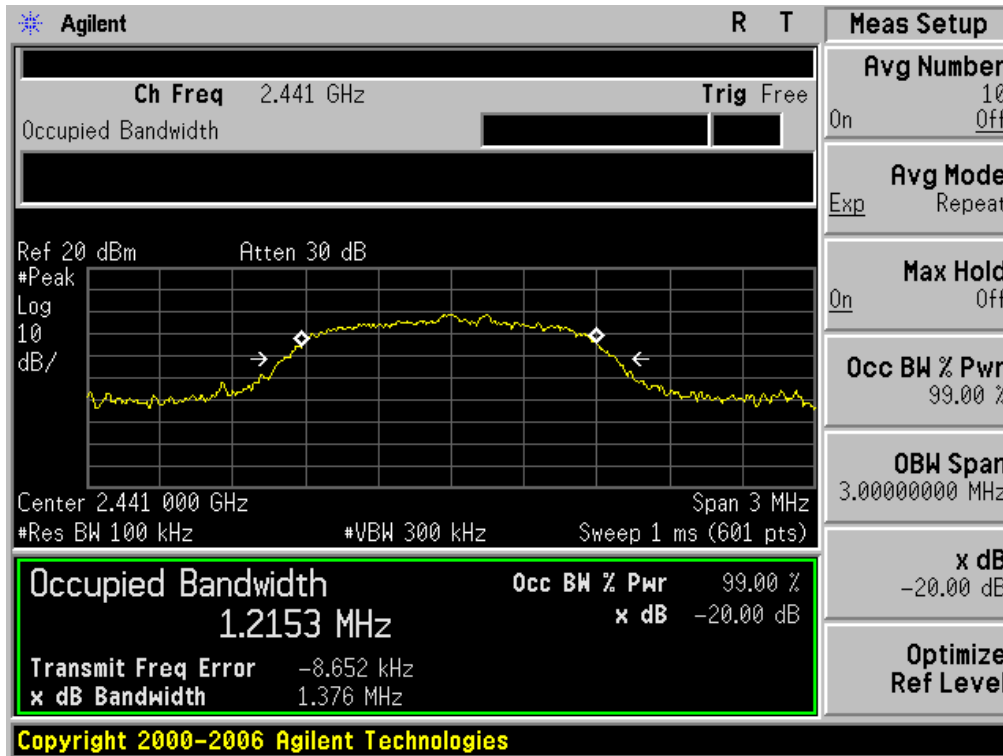

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

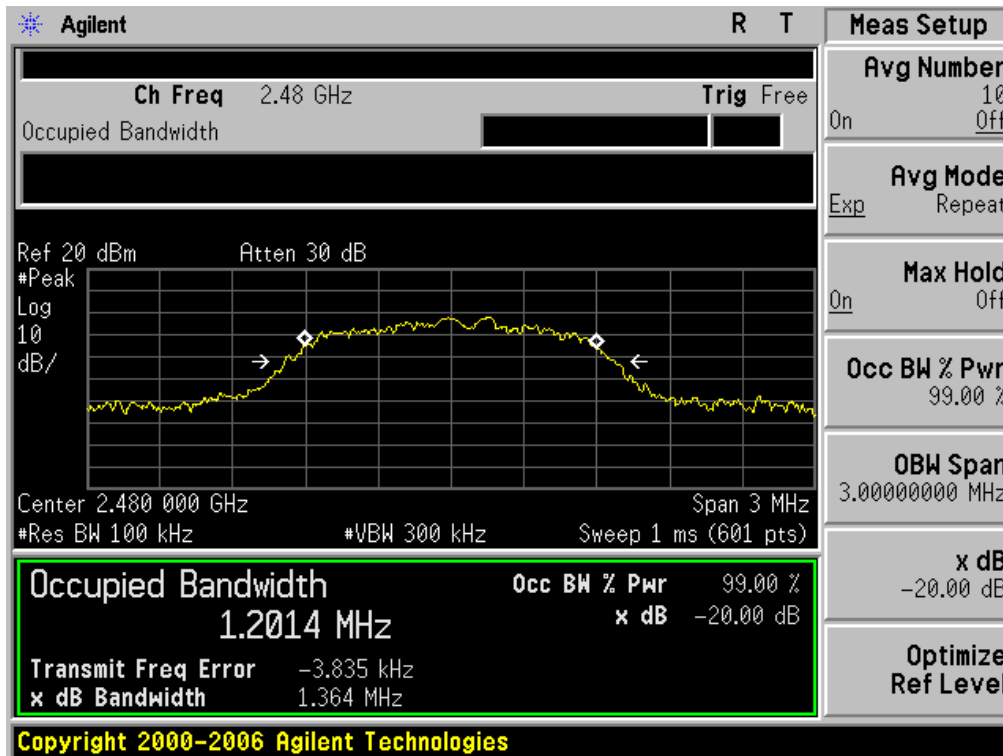

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

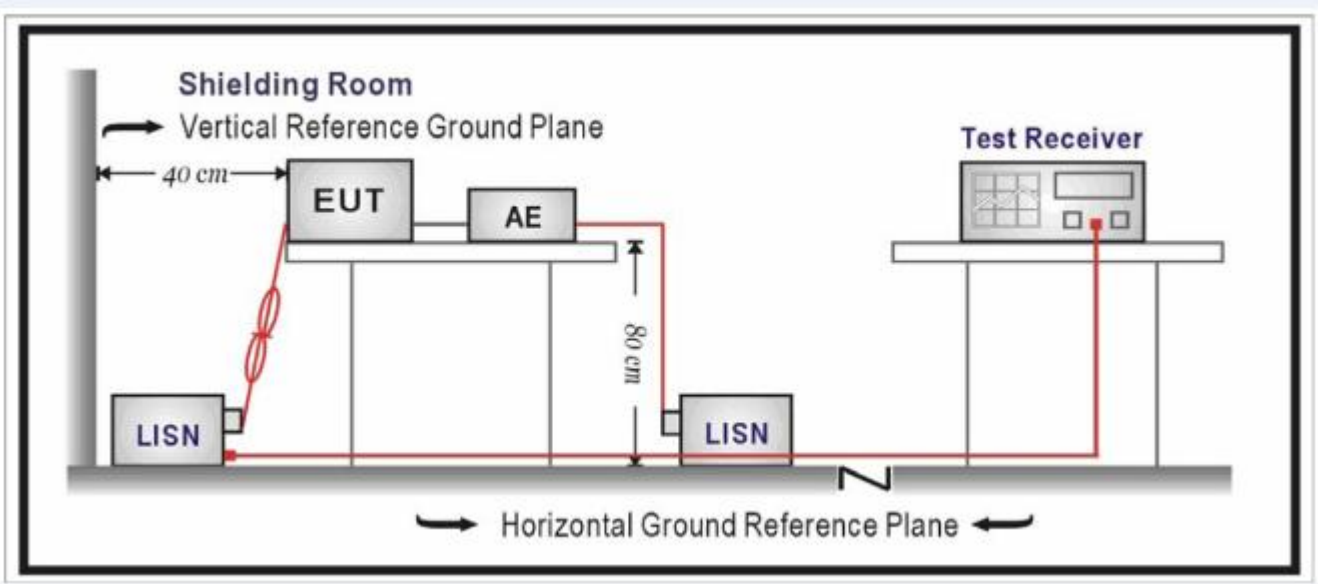

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.


12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The BT function of EUT didn't work when charging.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP
FCC RADIATED EMISSION TEST SETUP



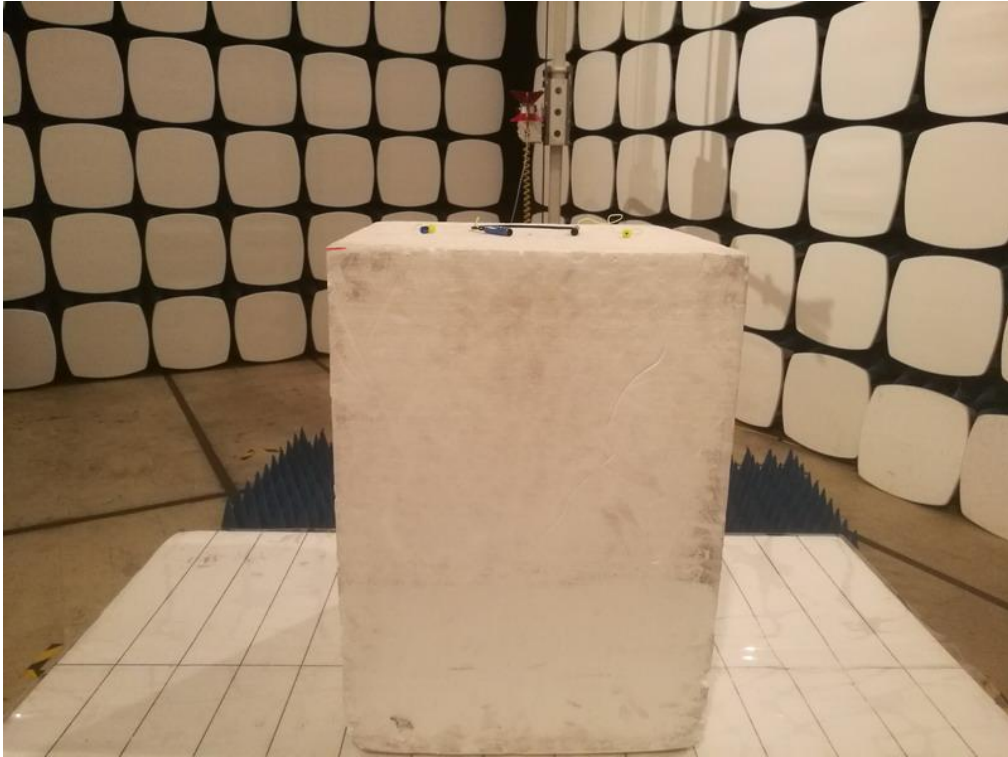

APPENDIX B: PHOTOGRAPHS OF EUT
TOTAL VIEW OF EUT




TOP VIEW OF EUT



BOTTOM VIEW OF EUT




FRONT VIEW OF EUT

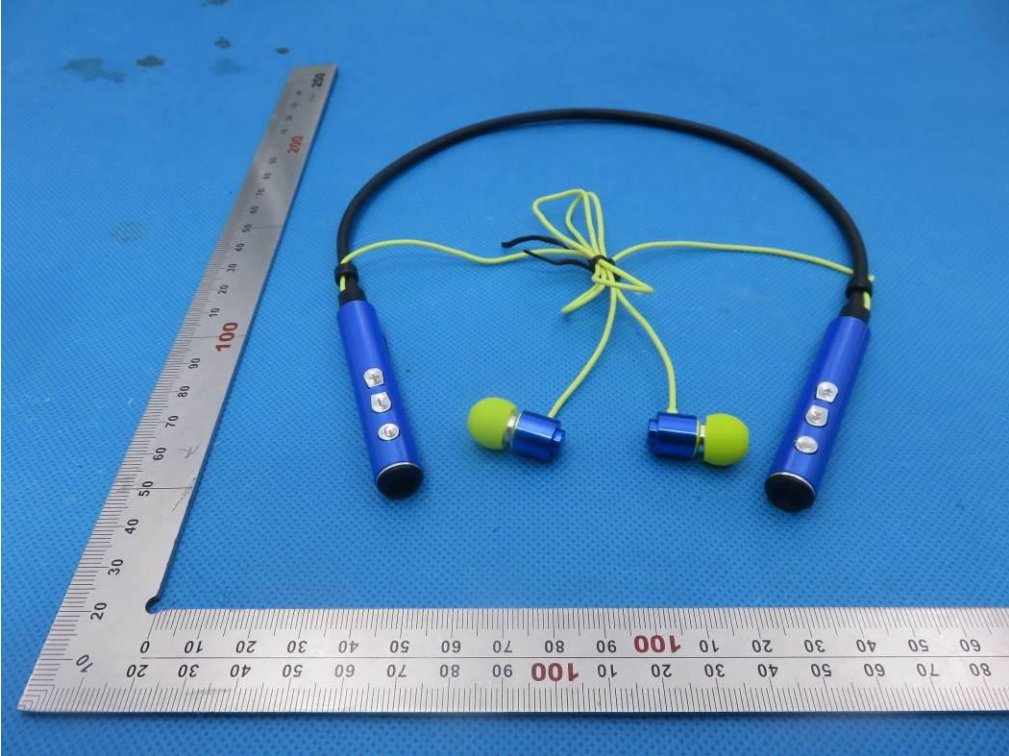


BACK VIEW OF EUT



LEFT VIEW OF EUT

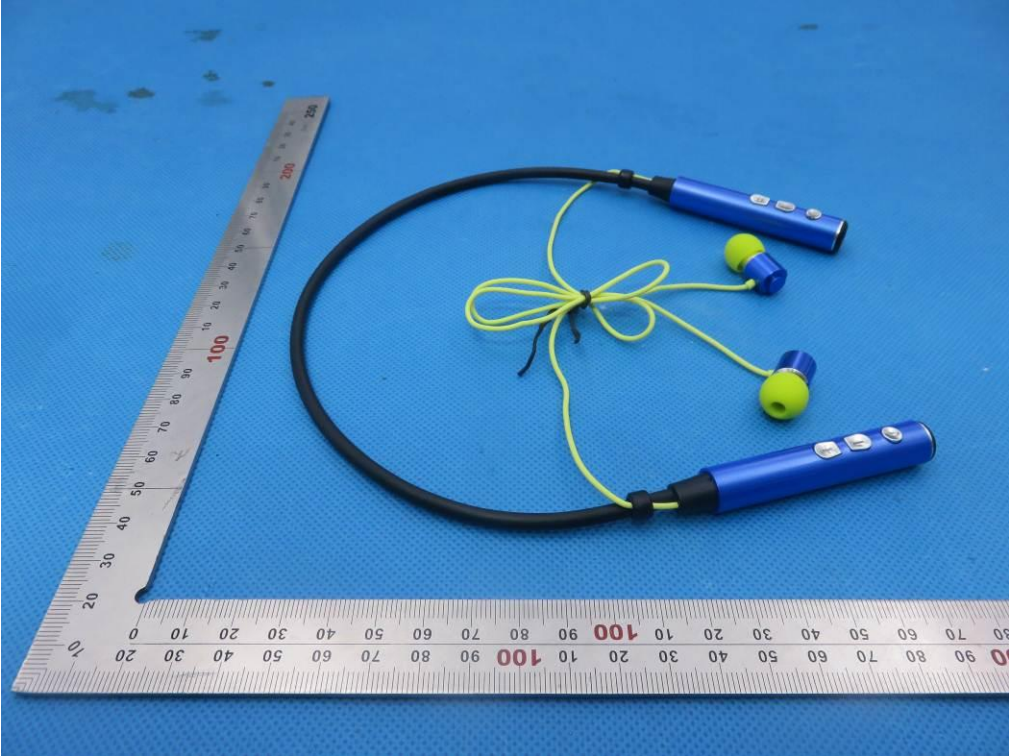

RIGHT VIEW OF EUT

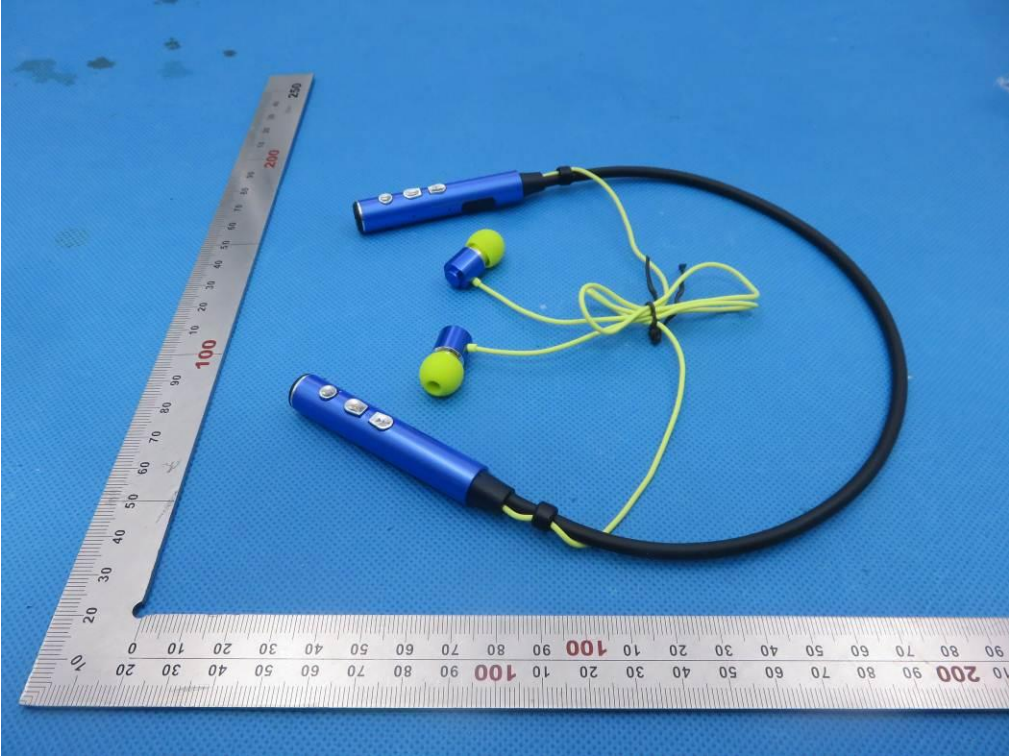

VIEW OF EUT (Port)




OPEN VIEW OF EUT




VIEW OF BATTERY




INTERNAL VIEW OF EUT-1

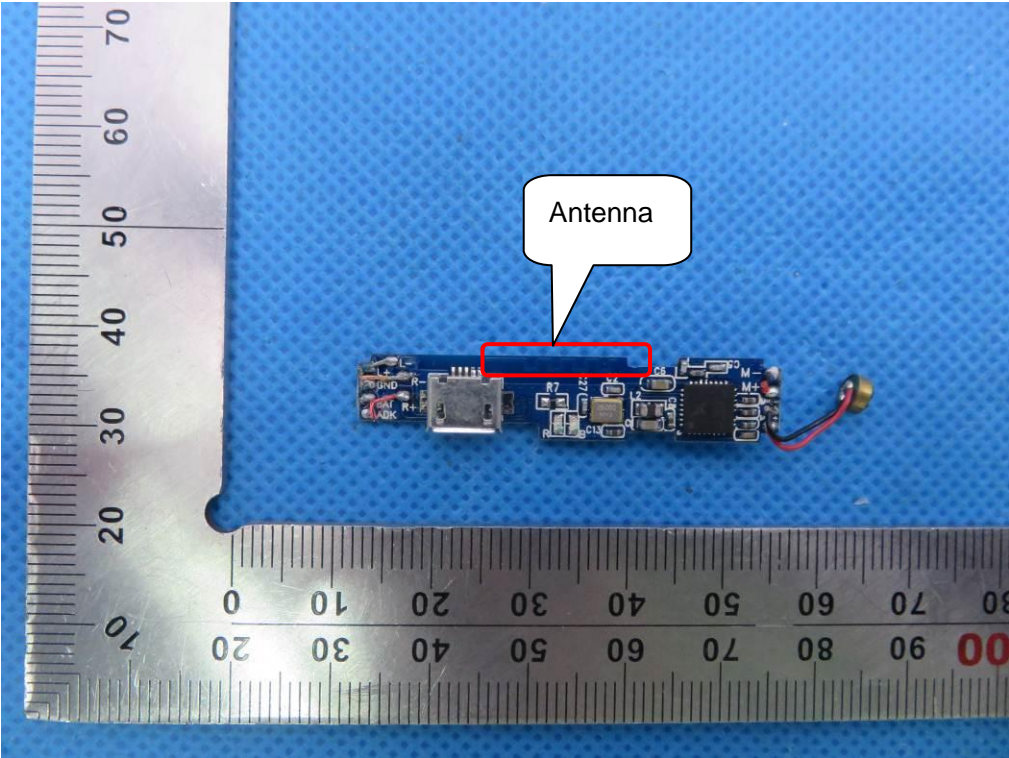


INTERNAL VIEW OF EUT-2

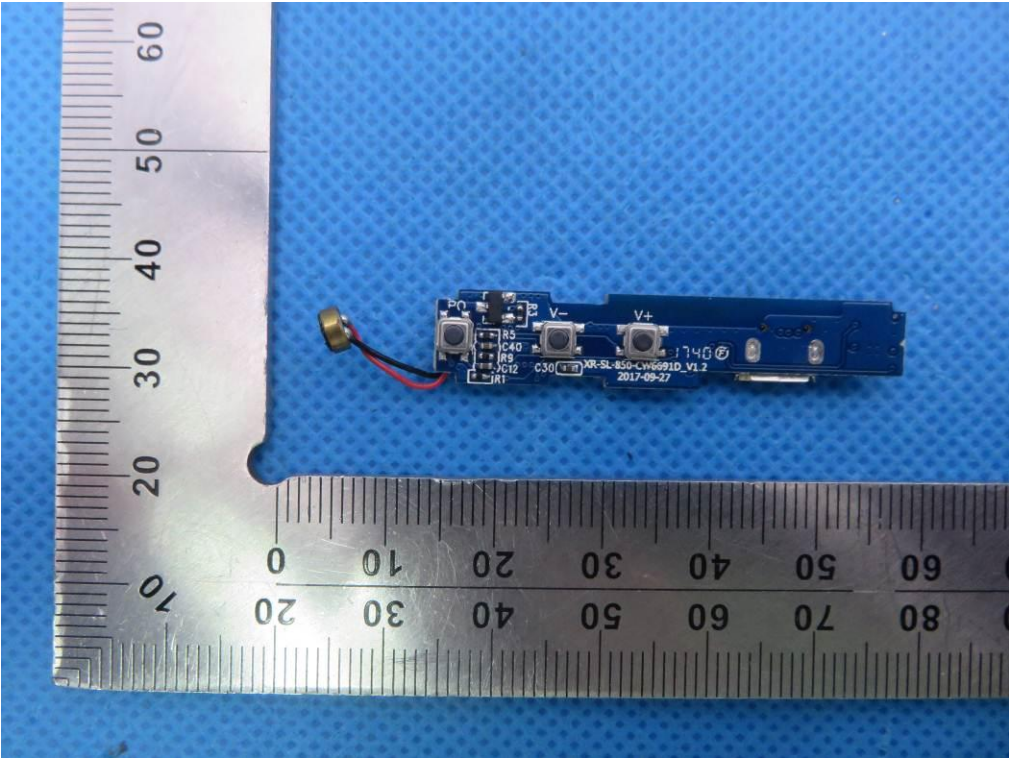


INTERNAL VIEW OF EUT-3

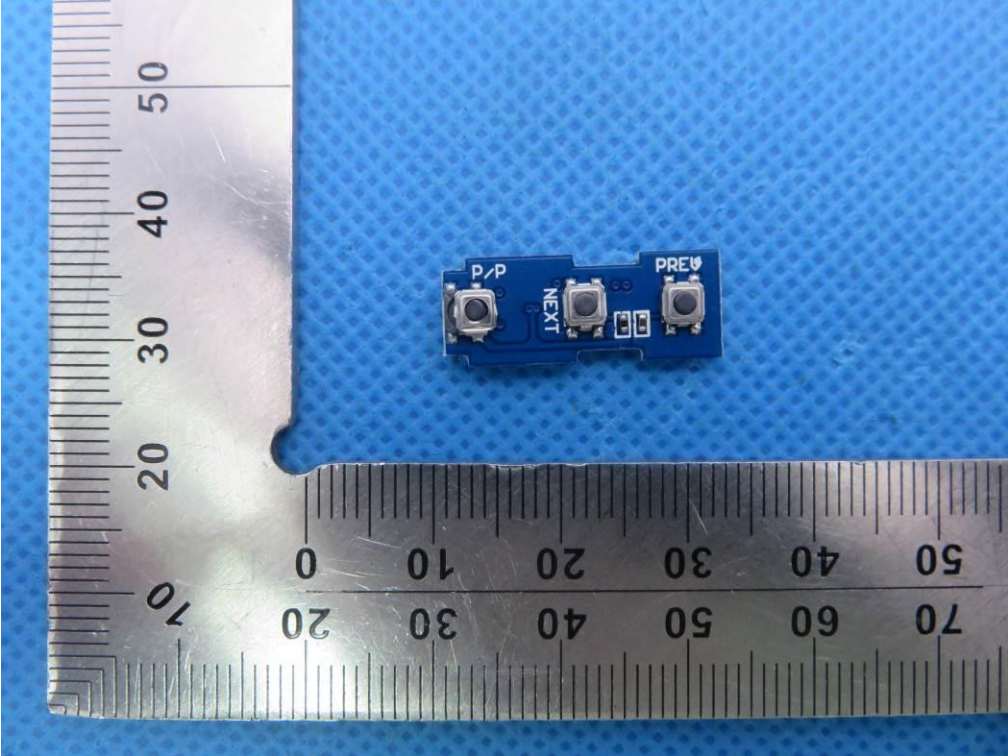

INTERNAL VIEW OF EUT-4

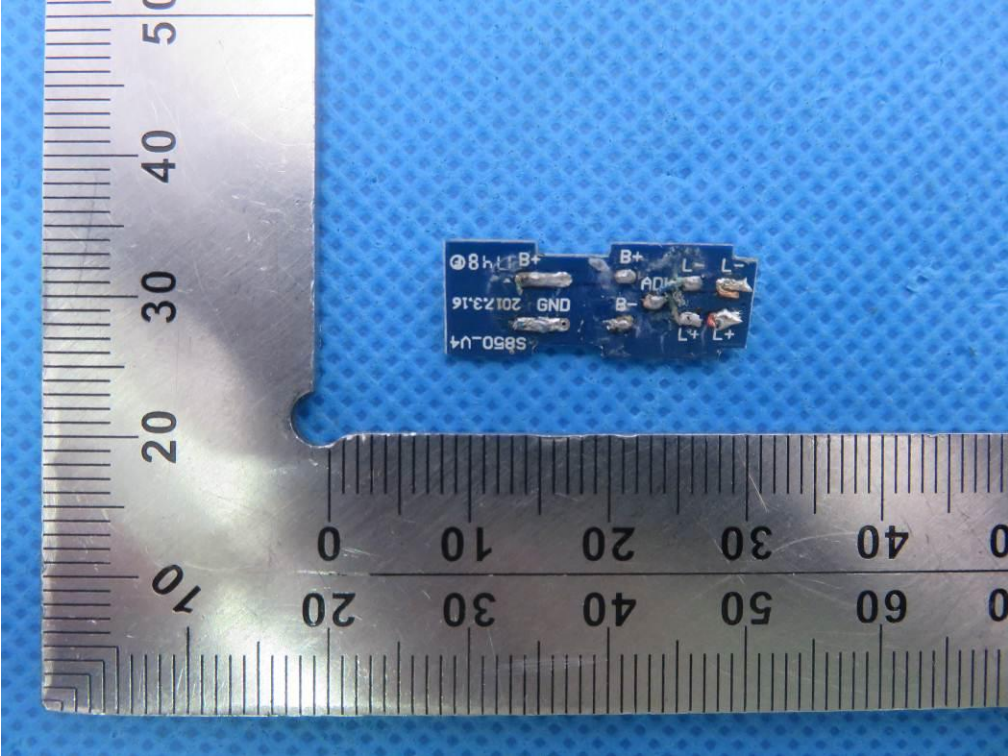

INTERNAL VIEW OF EUT-5

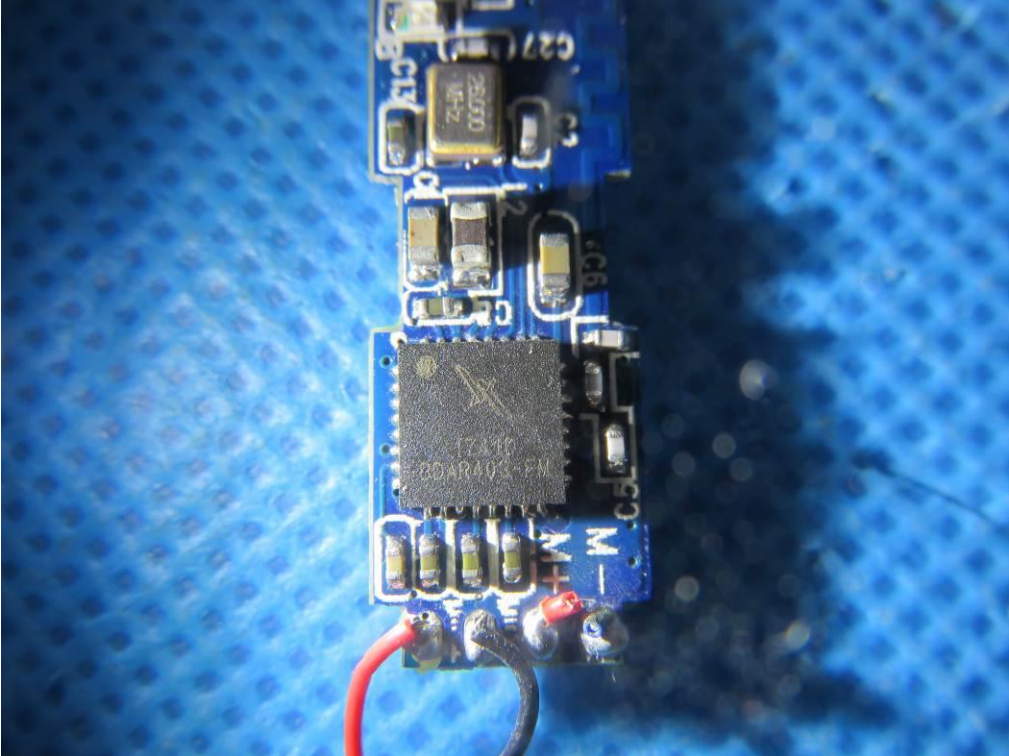

Series color Samples



----END OF REPORT----