


## FCC CERTIFICATION TEST REPORT

For  
**FCC ID:2AAOY278003657**


Report Reference No..... : 18EFAS05035 71  
Date of issue..... : 2018-06-20  
Testing Laboratory..... : DongGuan ShuoXin Electronic Technology Co., Ltd.  
Address..... : Zone A, 1F, No. 6, XinGang Road YuanGang Street,  
XinAn District, ChangAn Town, DongGuan City,  
GuangDong, China  
Applicant's name ..... : Mitek corp  
Address..... : 1 Mitek Plaza Winslow IL 61089,United States  
Manufacturer..... : Mitek corp  
Test specification:  
Test item description..... : BRP AUDIO PORTABLE  
Trade Mark ..... : --  
Model/Type reference ..... : 278003657, 278003820, 278003819  
(These models are the same except for the model name)  
Ratings..... : I/P: 19V/3A From AC Adapter

Responsible Engineer :



Smile Wang

Authorized Signatory:



Maoxing Wang

## TABLE OF CONTENTS

1.	Summary of test results .....	5
2.	General test information.....	6
2.1.	Description of EUT.....	6
2.2.	Accessories of EUT .....	6
2.3.	Assistant equipment used for test .....	6
2.4.	Block diagram of EUT configuration for test .....	7
2.5.	Test environment conditions .....	7
2.6.	Measurement uncertainty .....	8
3.	20dB Bandwidth &99% Bandwidth.....	9
3.1.	Test equipment.....	9
3.2.	Block diagram of test setup .....	9
3.3.	Limits.....	9
3.4.	Test Procedure .....	9
3.5.	Test Result .....	10
3.6.	Original test data .....	10
4.	CARRIER FREQUENCY SEPARATION TEST .....	14
4.1.	Test equipment.....	14
4.2.	The Requirement For Section 15.247(a)(1).....	14
4.3.	EUT Configuration on Measurement.....	14
4.4.	Operating Condition of EUT .....	14
4.5.	Test Procedure .....	14
4.6.	Test Result .....	15
5.	NUMBER OF HOPPING FREQUENCY TEST .....	19
5.1.	Test equipment.....	19
5.2.	The Requirement For Section 15.247(a)(1)(iii).....	19
5.3.	EUT Configuration on Measurement.....	19
5.4.	Operating Condition of EUT .....	19
5.5.	Test Procedure .....	19
5.6.	Test Result .....	20
6.	DWELL TIME TEST.....	21
6.1.	Test equipment.....	21
6.2.	The Requirement For Section 15.247(a)(1)(iii).....	21
6.3.	EUT Configuration on Measurement.....	21
6.4.	Operating Condition of EUT .....	21
6.5.	Test Procedure .....	21

6.6.	Test Result .....	22
7.	Maxmum Output Power .....	26
7.1.	Test equipment.....	26
7.2.	Block diagram of test setup .....	26
7.3.	Limits.....	26
7.4.	Test Procedure .....	27
7.5.	Test Result .....	27
7.6.	Original test data .....	28
8.	Spurious Emission .....	31
8.1.	Test equipment.....	31
8.2.	Block diagram of test setup .....	31
8.3.	Limit.....	33
8.4.	Test Procedure .....	34
8.5.	Test Result .....	36
9.	100 kHz BANDWIDTH OF FREQUENCY BAND EDGE .....	63
9.1.	Test Equipment .....	63
9.2.	Limit.....	63
9.3.	Test Procedure .....	63
9.4.	Test result.....	64
10.	Antenna Requirements.....	73
10.1.	Limit.....	73
10.2.	EUT ANTENNA.....	73

## TEST REPORT DECLARE

<b>Applicant</b>	:	Mitek corp
<b>Address</b>	:	1 Mitek Plaza Winslow IL 61089,United States
<b>Equipment under Test</b>	:	BRP AUDIO PORTABLE
<b>Test Model No</b>	:	278003657
<b>Manufacturer</b>	:	Mitek corp
<b>Address</b>	:	1 Mitek Plaza Winslow IL 61089,United States

**Test Standard Used:** FCC Part 15 Subpart C: 2018, 15.247.

**Test procedure used:** ANSI C63.4: 2014, ANSI C63.10-2013 , DA 00-705.

**We Declare:**

The equipment described above is tested by DongGuan ShuoXin Electronic Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and DongGuan ShuoXin Electronic Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

**After test and evaluation, our opinion is that the equipment provided for test compliance with the requirement of the above FCC standards.**

<b>Report No:</b>	18EFAS05035 71		
<b>Date of Test:</b>	2018-05-16 To 2018-06-19	<b>Date of Report:</b>	2018-06-20

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of DongGuan ShuoXin Electronic Technology Co., Ltd.

## 1. SUMMARY OF TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below.		
Description of Test Item	Standard	Results
Bandwidth	FCC Part 15: 15.247(a)(1)	PASS
Carrier Frequency Separation Test	FCC Part 15: 15.247(a)(1)	PASS
Number Of Hopping Frequency	FCC Part 15: 15.247(a)(1)(iii)	PASS
Dwell Time Test	FCC Part 15: 15.247(a)(1)(iii)	PASS
Maximum Output Power	FCC Part 15: 15.247(b)(1)	PASS
Band Edge Emission	FCC Part 15: 15.247(d)	PASS
Radiated Spurious Emissions	FCC Part 15.205 / 15.209	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Conducted Emission	FCC Part 15.207	PASS

## 2. GENERAL TEST INFORMATION

### 2.1. DESCRIPTION OF EUT

EUT* Name	:	BRP AUDIO PORTABLE
Model Number	:	278003657
EUT function description	:	Please reference user manual of this device
Power supply	:	19Vdc 3A
Adaptor	:	100V-240Vac 50/60Hz 1.5A
Radio Technology	:	V4.1(EDR)
Operation frequency	:	2402-2480MHz
Modulation	:	GFSK, $\pi/4$ DQPSK,8DPSK
Antenna Type	:	PCB antenna, maximum PK gain: 0dBi
Date of Receipt	:	2018/05/16
Sample Type	:	Single production

### 2.2. ACCESSORIES OF EUT

Description of Accessories	Manufacturer	Model number or Type	Output.
/	/	/	/

### 2.3. ASSISTANT EQUIPMENT USED FOR TEST

Description of Assistant equipment	Manufacturer	Model number or Type	EMC Compliance	SN
Notebook	acer	Aspire E1-472G	FCC DoC	/

## 2.4. BLOCK DIAGRAM OF EUT CONFIGURATION FOR TEST

See Setup photo

EUT work in Continuous TX mode

Remark: GFSK, 8DPSK,  $\pi/4$ DQPSK all these modulation all have been tested , GFSK and 8DPSK is found as worst case and only reported .

Tested mode, channel, and data rate information			
Mode	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
GFSK	1	Low :CH0	2402
	1	Middle: CH39	2441
	1	High: CH78	2480
$\pi/4$ DQPSK	2	Low :CH0	2402
	2	Middle: CH39	2441
	2	High: CH78	2480
8DPSK	3	Low :CH0	2402
	3	Middle: CH39	2441
	3	High: CH78	2480

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

## 2.5. TEST ENVIRONMENT CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

## 2.6. MEASUREMENT UNCERTAINTY

Test Item	Uncertainty
Uncertainty for Conduction emission test (9kHz-150kHz)	3.7 dB
Uncertainty for Conduction emission test (150kHz-30MHz)	3.3 dB
Uncertainty for Radiation Emission test (30MHz-200MHz)	4.60 dB (Polarize: V)
	4.60 dB (Polarize: H)
Uncertainty for Radiation Emission test (200MHz-1GHz)	6.10 dB (Polarize: V)
	5.08 dB (Polarize: H)
Uncertainty for Radiation Emission test (1GHz-6GHz)	5.01 dB (Polarize: V)
	5.01 dB (Polarize: H)
Uncertainty for Radiation Emission test (6GHz-18GHz)	5.26 dB (Polarize: V)
	5.26 dB (Polarize: H)
Uncertainty for Radiation Emission test (18GHz-40GHz)	5.06 dB (Polarize: V)
	5.06 dB (Polarize: H)
Uncertainty for radio frequency	$\pm 0.048\text{kHz}$
Uncertainty for conducted RF Power	$\pm 0.32\text{dB}$

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.




## 3. 20dB BANDWIDTH & 99% BANDWIDTH

### 3.1. TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Due.	Cal. Interval
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2019/05/25	1 Year
2	Attenuator	Mini-Circuits	BW-S10W2	101109	2018/12/17	1 Year
3	RF Cable	Micable	C10-01-01-1	100309	2018/12/17	1 Year

### 3.2. BLOCK DIAGRAM OF TEST SETUP



### 3.3. LIMITS

No limit requirement.

### 3.4. TEST PROCEDURE

- (1) Configure EUT and assistant system according clause 2.4 and 3.2.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (3) Configure EUT work in test mode as stated in clause 2.4.
- (4) Set the spectrum analyzer as follows:

RBW:	30KHz
VBW:	100KHz
Detector Mode:	Peak
Sweep time:	auto
Trace mode:	Max hold


- (5) Allow the trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB and 99% bandwidth relative to the maximum level measured in the fundamental emission.



### 3.5. TEST RESULT

Mode	Freq	20dB	99%OBW	Conclusion
	(MHz)	(MHz)	(MHz)	
GFSK	2402	0.664	0.731	PASS
	2441	0.652	0.730	PASS
	2480	0.666	0.734	PASS
8DPSK	2402	1.148	1.088	PASS
	2441	1.153	1.095	PASS
	2480	1.148	1.093	PASS



### 3.6. ORIGINAL TEST DATA


#### GFSK

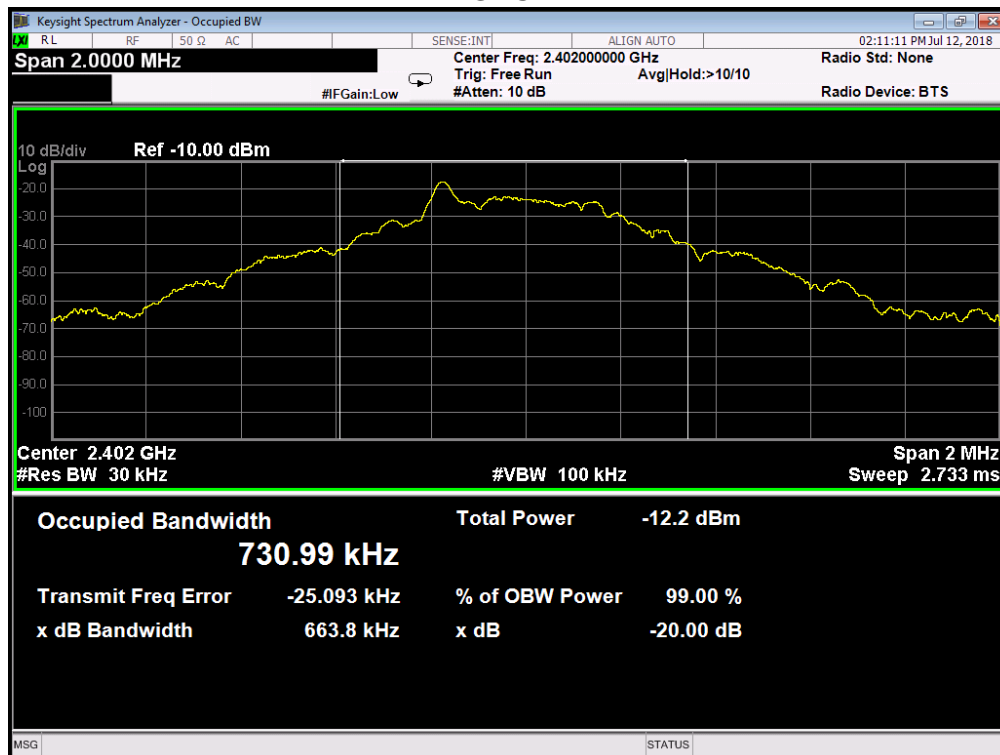

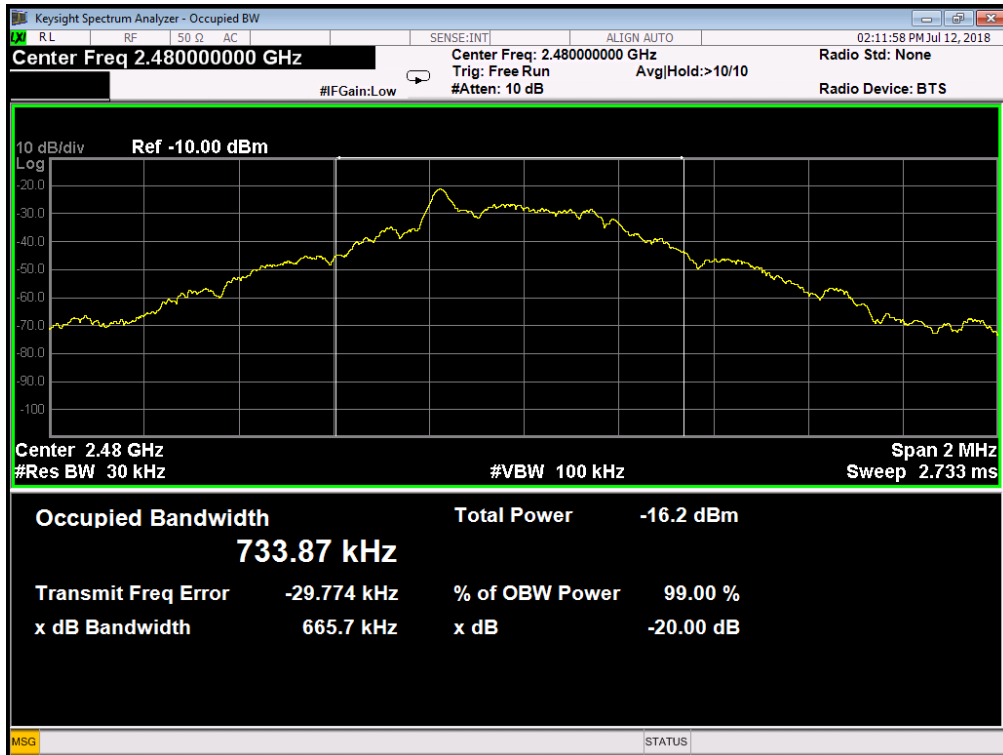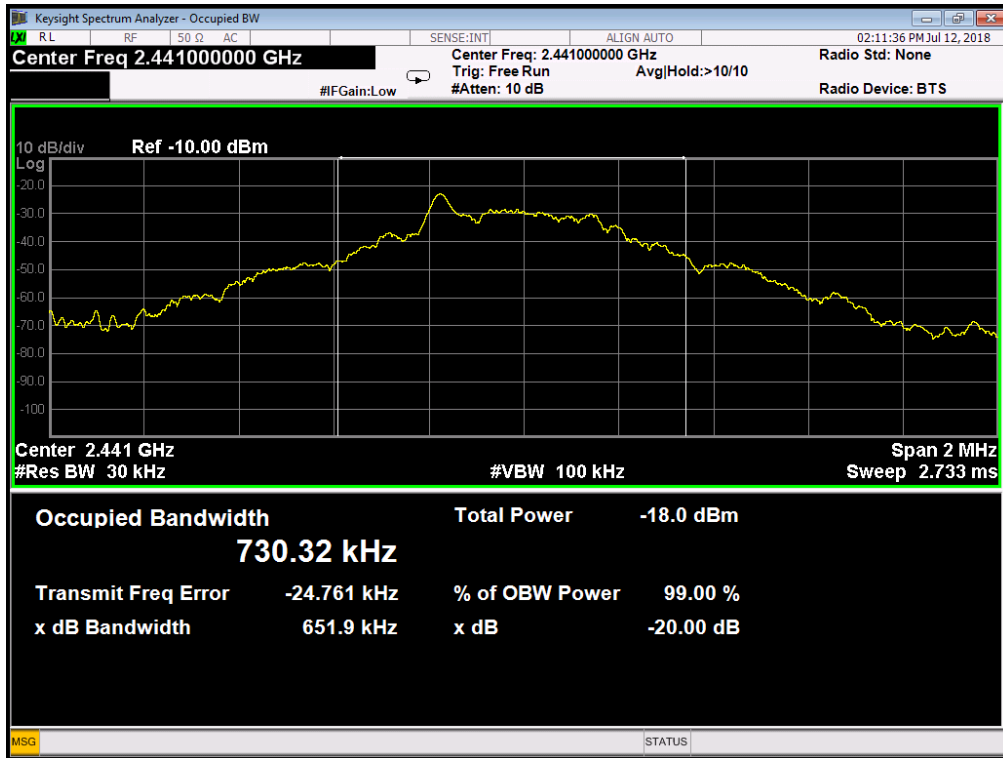

## 8DPSK

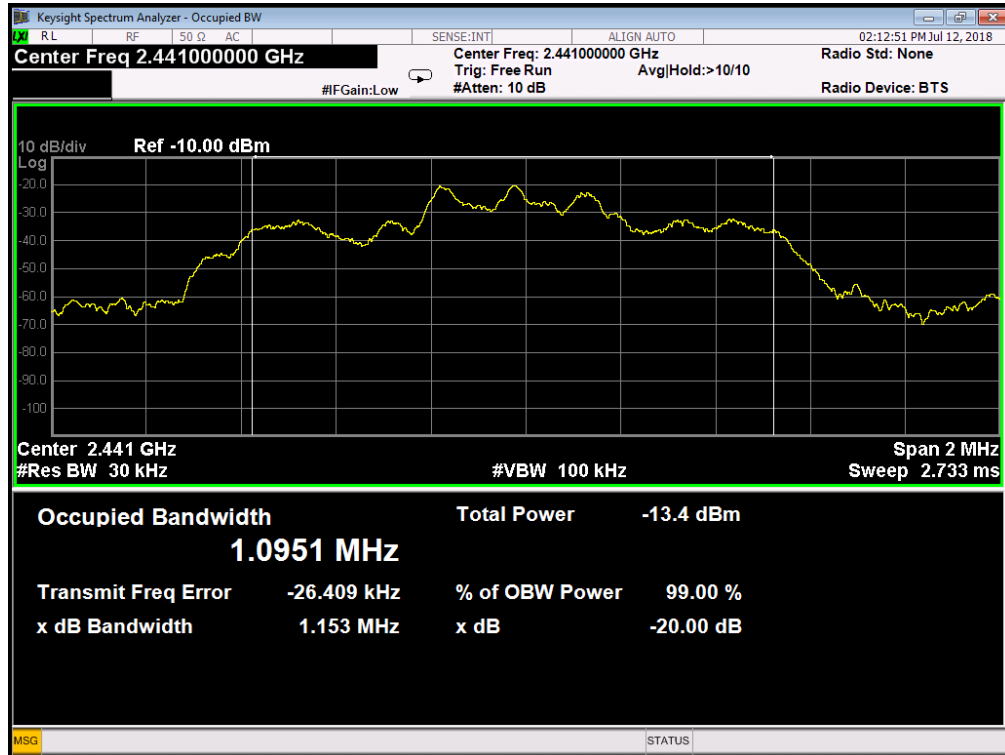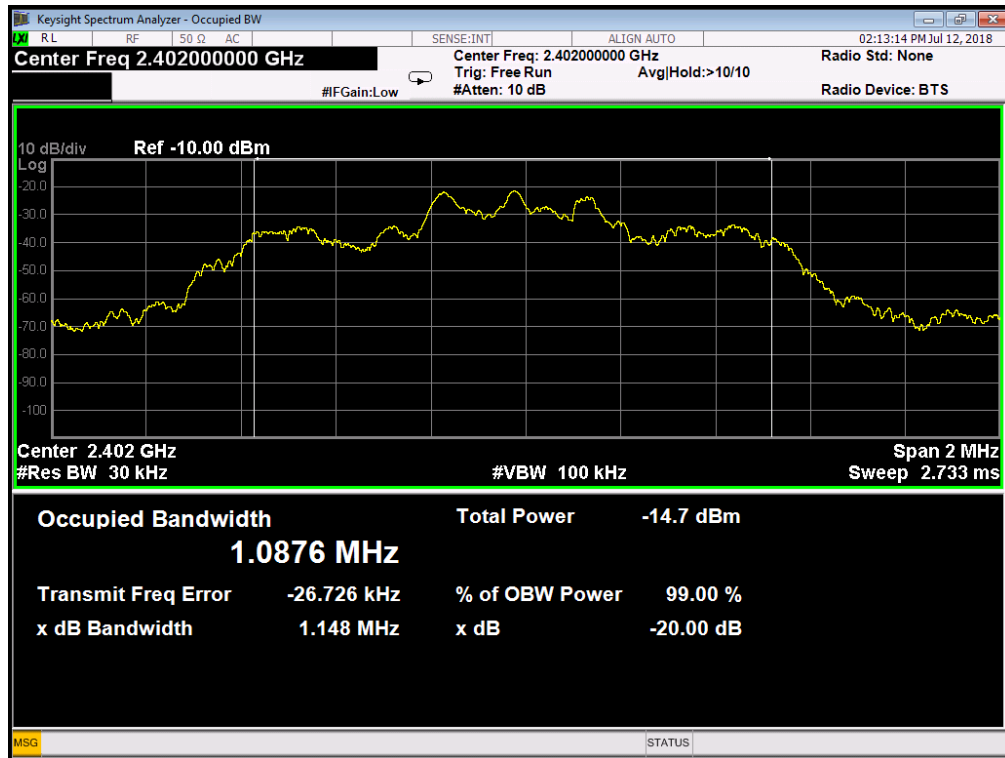

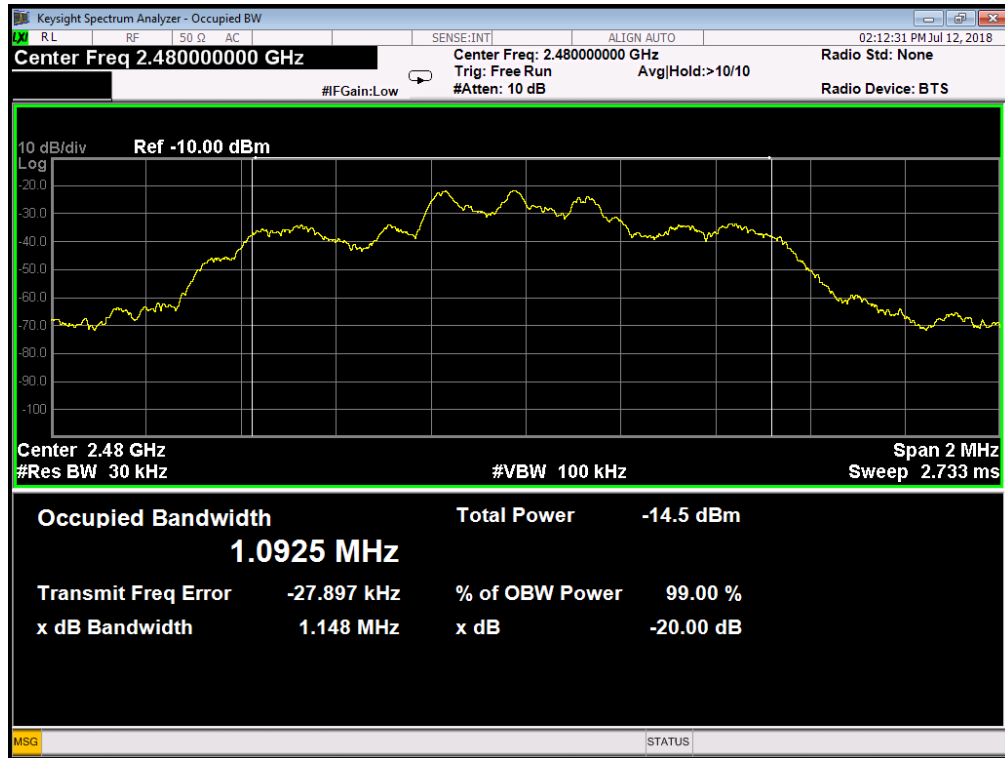

## 4. CARRIER FREQUENCY SEPARATION TEST

### 4.1. TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Due.	Cal. Interval
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2019/05/25	1 Year
2	Attenuator	Mini-Circuits	BW-S10W2	101109	2018/12/17	1 Year
3	RF Cable	Micable	C10-01-01-1	100309	2018/12/17	1 Year

### 4.2. THE REQUIREMENT FOR SECTION 15.247(a)(1)

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 4.3. EUT CONFIGURATION ON MEASUREMENT

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 4.4. OPERATING CONDITION OF EUT

- (1) Setup the EUT and simulator as shown as Section 6.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

### 4.5. TEST PROCEDURE

- (1) The transmitter output was connected to the spectrum analyzer through a low loss cable.
- (2) .Set RBW of spectrum analyzer to 30 kHz and VBW to 100 kHz. Adjust Span to 3 MHz.
- (3) Set the adjacent channel of the EUT maxhold another trace.
- (4) Measurement the channel separation

## 4.6. TEST RESULT

### GFSK


Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	0.996	>(25KHz or 2/3*20dB Bandwidth)	PASS
Middle	2441	1.002	>(25KHz or 2/3*20dB Bandwidth)	PASS
High	2480	1.002	>(25KHz or 2/3*20dB Bandwidth)	PASS

### 8DPSK

Channel	Frequency (MHz)	Channel Separation(MHz)	Limit (MHz)	Result
Low	2402	1.002	>(25KHz or 2/3*20dB Bandwidth)	PASS
Middle	2441	1.005	>(25KHz or 2/3*20dB Bandwidth)	PASS
High	2480	1.002	>(25KHz or 2/3*20dB Bandwidth)	PASS

The spectrum analyzer plots are attached as below.

## GFSK


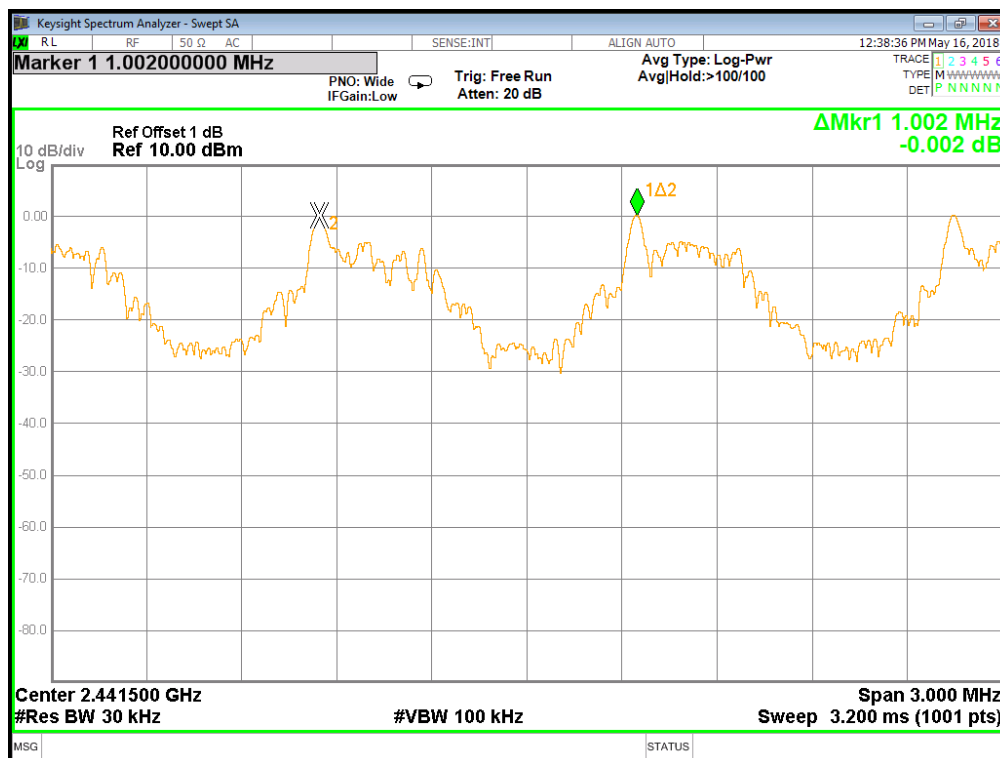






8DPSK



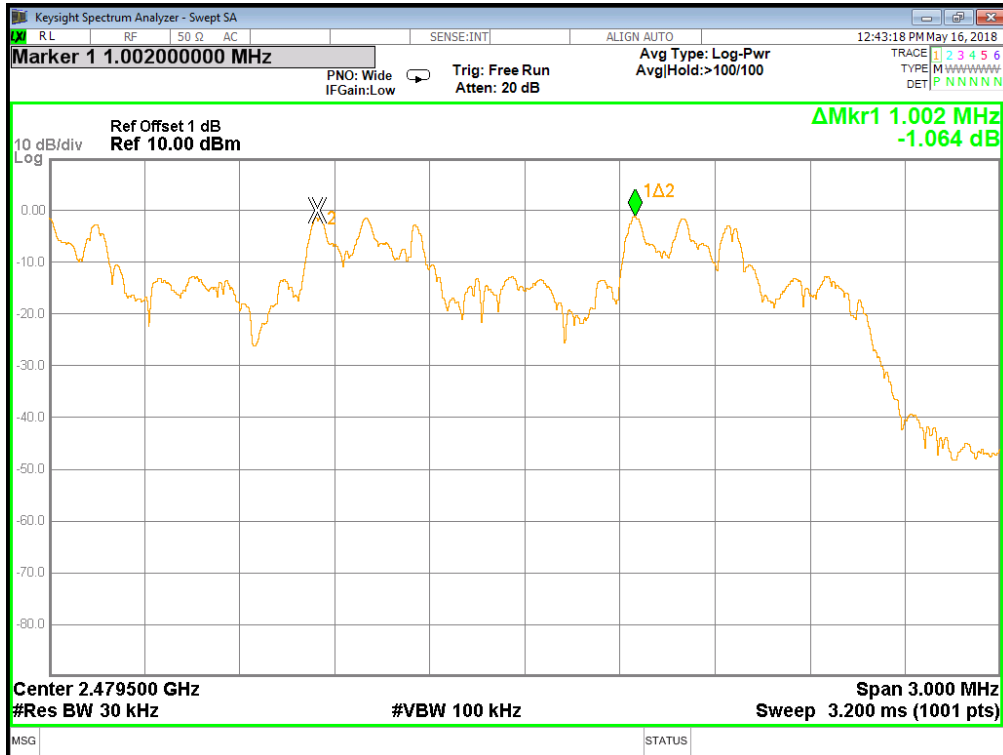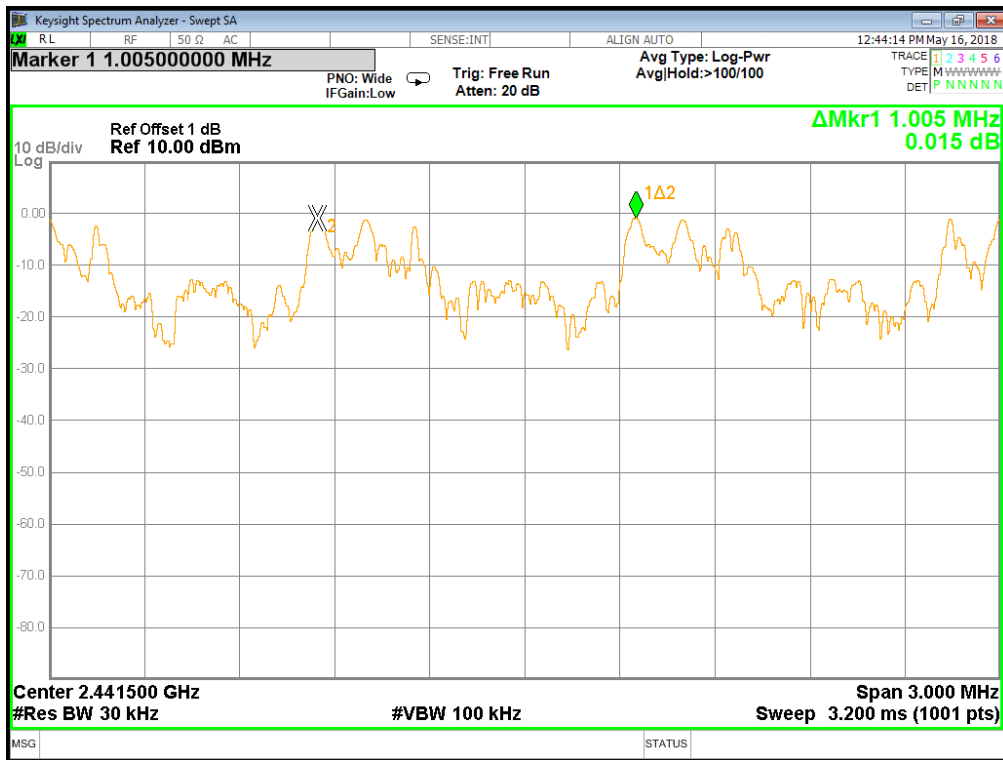

## 5. NUMBER OF HOPPING FREQUENCY TEST

### 5.1. TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Due.	Cal. Interval
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2019/05/25	1 Year
2	Attenuator	Mini-Circuits	BW-S10W2	101109	2018/12/19	1 Year
3	RF Cable	Micable	C10-01-01-1	100309	2018/12/19	1 Year

### 5.2. THE REQUIREMENT FOR SECTION 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

### 5.3. EUT CONFIGURATION ON MEASUREMENT

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 5.4. OPERATING CONDITION OF EUT

- (1) Setup the EUT and simulator as shown as Section 7.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in TX (Hopping on) modes measure it.

### 5.5. TEST PROCEDURE


- (1) The transmitter output was connected to the spectrum analyzer through a low loss cable.
- (2) Set the spectrum analyzer as Span=83.5MHz, RBW=100 kHz, VBW=300 kHz.
- (3) Max hold, view and count how many channel in the band.

## 5.6. TEST RESULT

Total number of hopping channel	Measurement result(CH)	Limit(CH)
		79

The spectrum analyzer plots are attached as below

Number of hopping channels

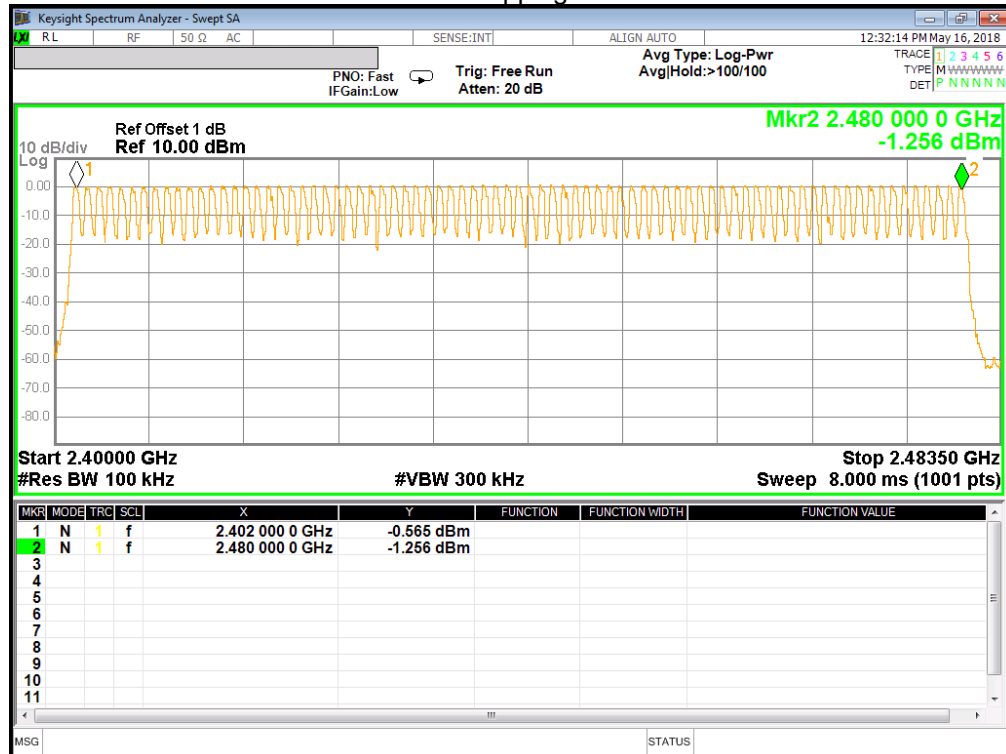

Channle information

CH	Frequency	CH	Frequency	CH	Frequency	CH	Frequency	CH	Frequency
0	2402	16	2418	32	2434	48	2450	64	2466
1	2403	17	2419	33	2435	49	2451	65	2467
2	2404	18	2420	34	2436	50	2452	66	2468
3	2405	19	2421	35	2437	51	2453	67	2469
4	2406	20	2422	36	2438	52	2454	68	2470
5	2407	21	2423	37	2439	53	2455	69	2471
6	2408	22	2424	38	2440	54	2456	70	2472
7	2409	23	2425	39	2441	55	2457	71	2473
8	2410	24	2426	40	2442	56	2458	72	2474
9	2411	25	2427	41	2443	57	2459	73	2475
10	2412	26	2428	42	2444	58	2460	74	2476
11	2413	27	2429	43	2445	59	2461	75	2477
12	2414	28	2430	44	2446	60	2462	76	2478
13	2415	29	2431	45	2447	61	2463	77	2479
14	2416	30	2432	46	2448	62	2464	78	2480
15	2417	31	2433	47	2449	63	2465	-	-

## 6. DWELL TIME TEST

### 6.1. TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Due.	Cal. Interval
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2019/05/025	1 Year
2	Attenuator	Mini-Circuits	BW-S10W2	101109	2018/12/17	1 Year
3	RF Cable	Micable	C10-01-01-1	100309	2018/12/17	1 Year

### 6.2. THE REQUIREMENT FOR SECTION 15.247(a)(1)(iii)

Section 15.247(a)(1)(iii): Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 6.3. EUT CONFIGURATION ON MEASUREMENT

The equipment are installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

### 6.4. OPERATING CONDITION OF EUT

- (1) Setup the EUT and simulator as shown as Section 8.1.
- (2) Turn on the power of all equipment.
- (3) Let the EUT work in TX (Hopping on) modes measure it. The transmit frequency are 2402-2480MHz. We select 2402MHz, 2441MHz, and 2480MHz TX frequency to transmit.

### 6.5. TEST PROCEDURE

- (1) The transmitter output was connected to the spectrum analyzer through a low loss cable.
- (2) Set center frequency of spectrum analyzer = operating frequency.
- (3) Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span=0Hz
  - A Period Time = (channel number)\*0.4
  - DH1 Time Slot: Reading \* (1600/2)\*31.6/(channel number)
  - DH3 Time Slot: Reading \* (1600/4)\*31.6/(channel number)
  - DH5 Time Slot: Reading \* (1600/6)\*31.6/(channel number)

## 6.6. TEST RESULT

### GFSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2441	0.42	134.4	400
DH3	2441	1.72	275.2	400
DH5	2441	3.00	320.01	400

### 8DPSK Mode

Mode	Channel Frequency (MHz)	Pulse Time (ms)	Dwell Time (ms)	Limit (ms)
DH1	2441	0.4256	136.192	400
DH3	2441	1.74	278.4	400
DH5	2441	3.00	320.01	400


The spectrum analyzer plots are attached as below:

## GFSK Mode

### DH1



### DH3

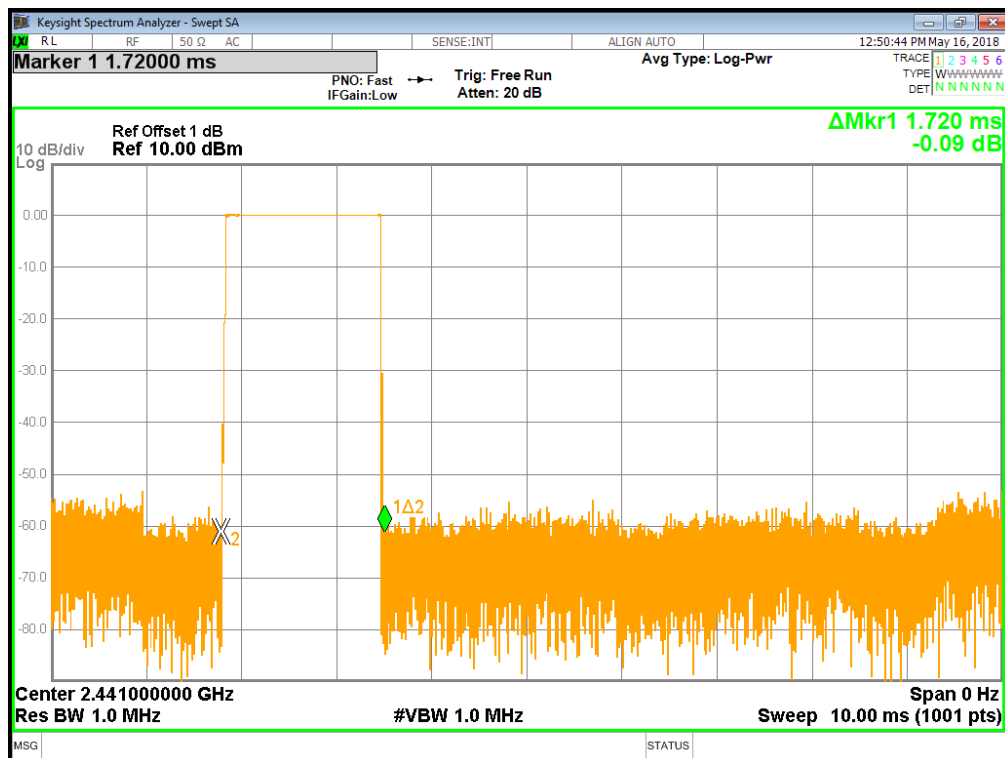


## DH5




## 8DPSK Mode

## DH1

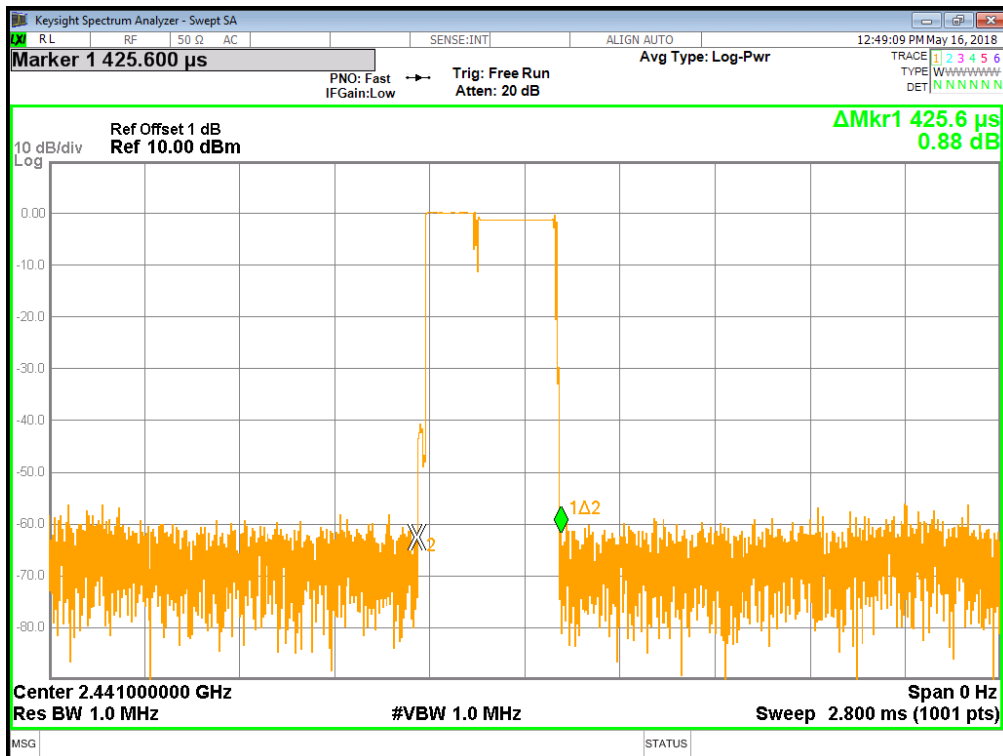




## DH3

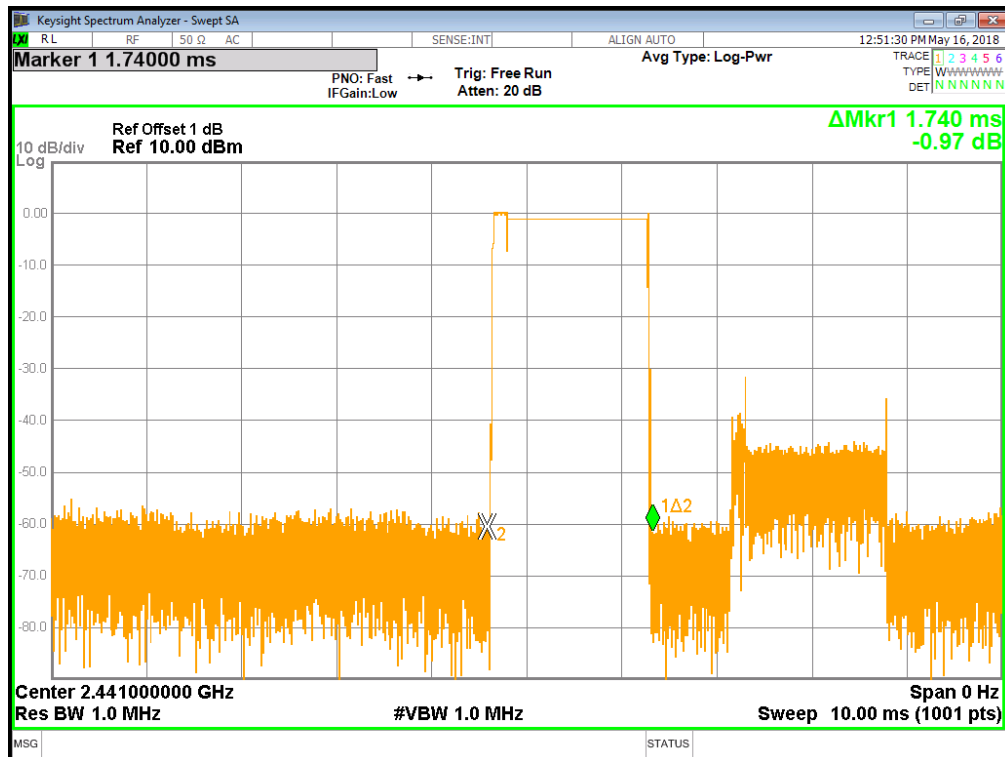

## DH5

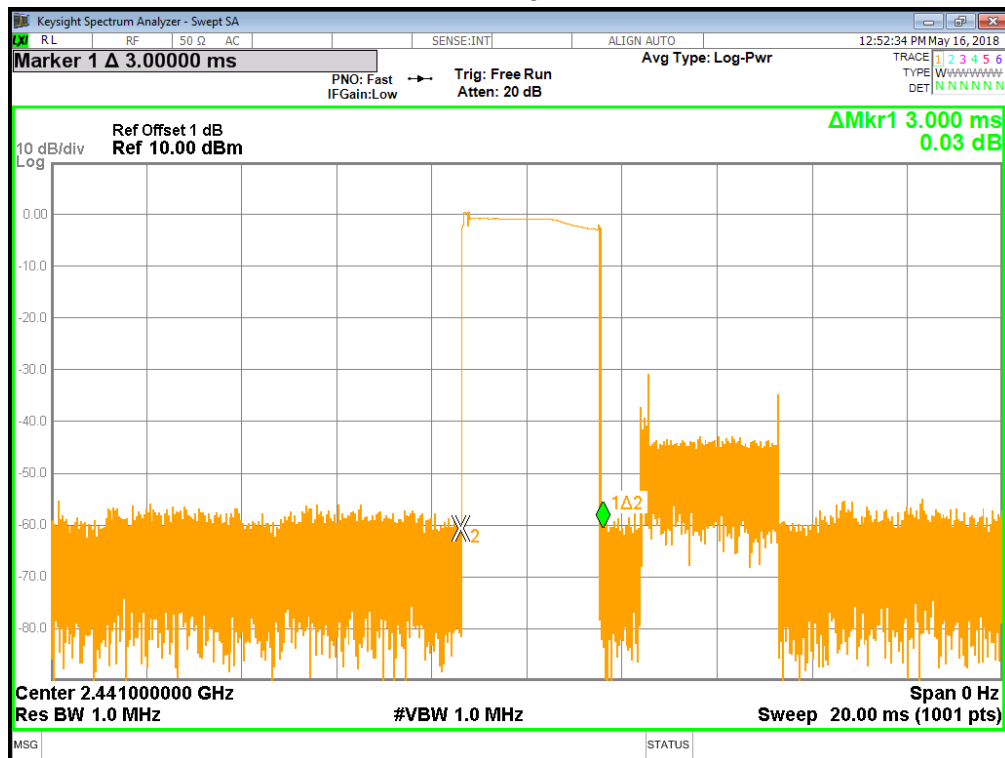

## 7. MAXMUM OUTPUT POWER

### 7.1. TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Due.	Cal. Interval
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2019/05/25	1 Year
2	Attenuator	Mini-Circuits	BW-S10W2	101109	2018/12/17	1 Year
3	RF Cable	Micable	C10-01-01-1	100309	2018/12/17	1 Year

### 7.2. BLOCK DIAGRAM OF TEST SETUP

FCC:Same with 3.2

### 7.3. LIMITS

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz bands: 0.125 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

## 7.4. TEST PROCEDURE

- (1) Configure EUT and assistant system according clause 2.4 and 3.2
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (3) Configure EUT work in test mode as stated in clause 2.4.
- (4) Set the spectrum analyzer as follows:

GFSK	RBW:	1MHz
	VBW:	3MHz
8DPSK	RBW:	3MHz
	VBW:	3MHz
Span		>1.5x 20dB bandwidth
Detector Mode:		Peak
Sweep time:		auto
Trace mode		Max hold



- (5) Allow the trace to stabilize, Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges measure out the Average and PK output power.


## 7.5. TEST RESULT

EUT Set Mode	Data Rate (Mbps)	Frequency (MHz)	Result(dBm)
			Peak
GFSK	1	2402	-0.186
		2441	0.322
		2480	-0.005
8DPSK	3	2402	0.498
		2441	1.054
		2480	0.743
Limit: 21dBm		Conclusion: PASS	


## 7.6. Original test data



### GFSK

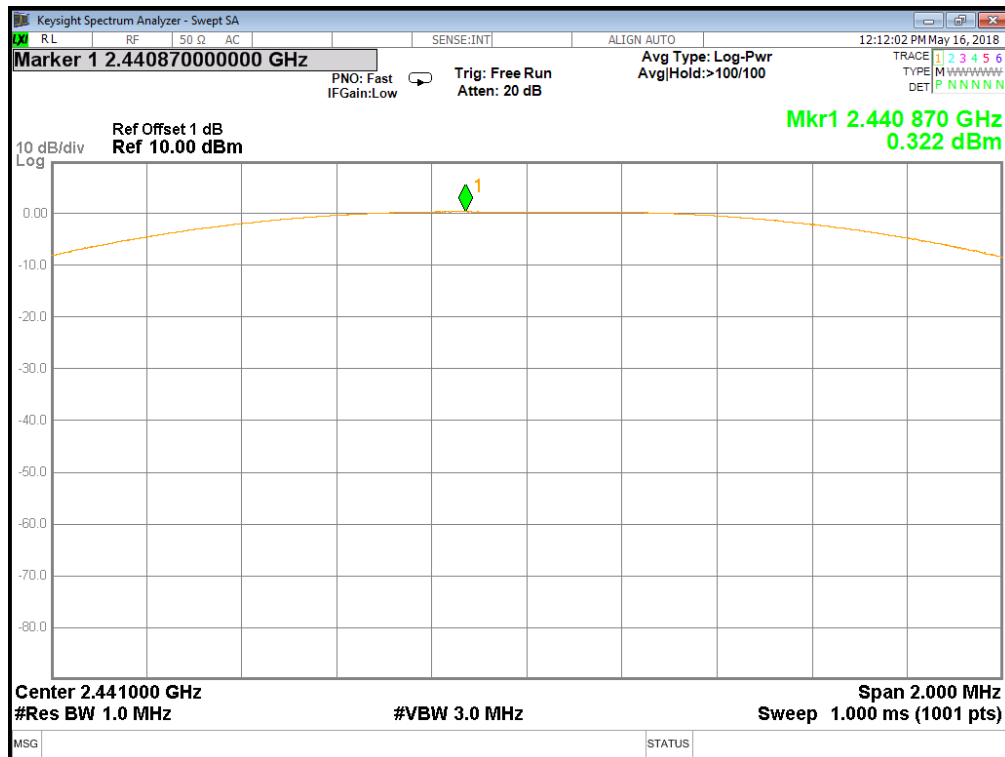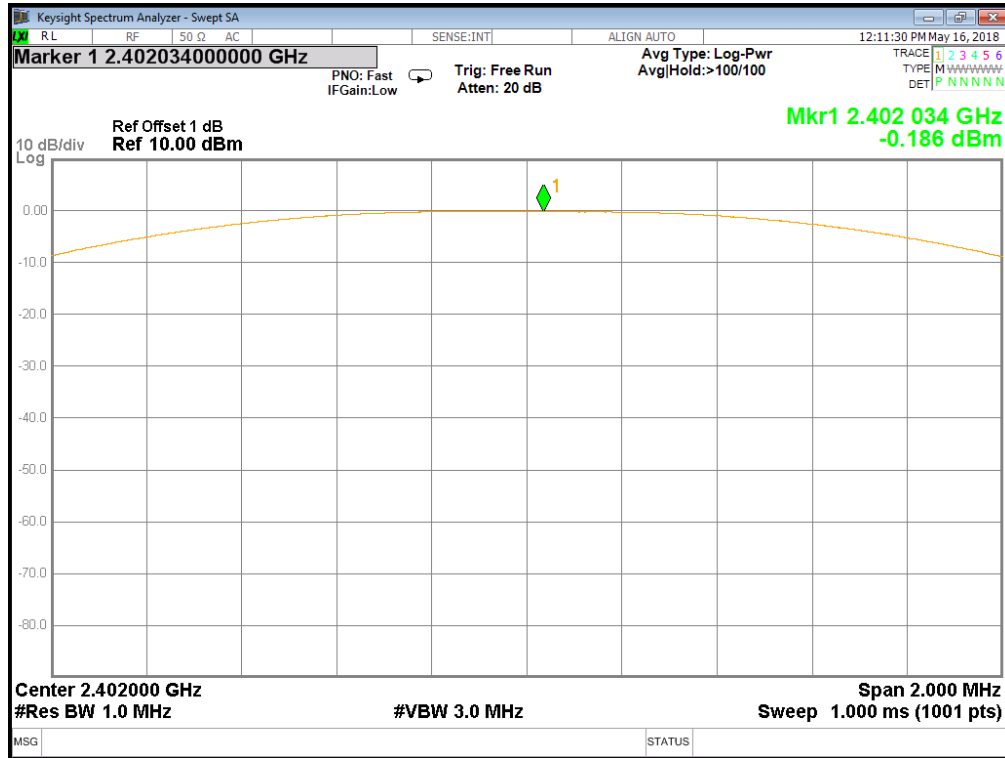

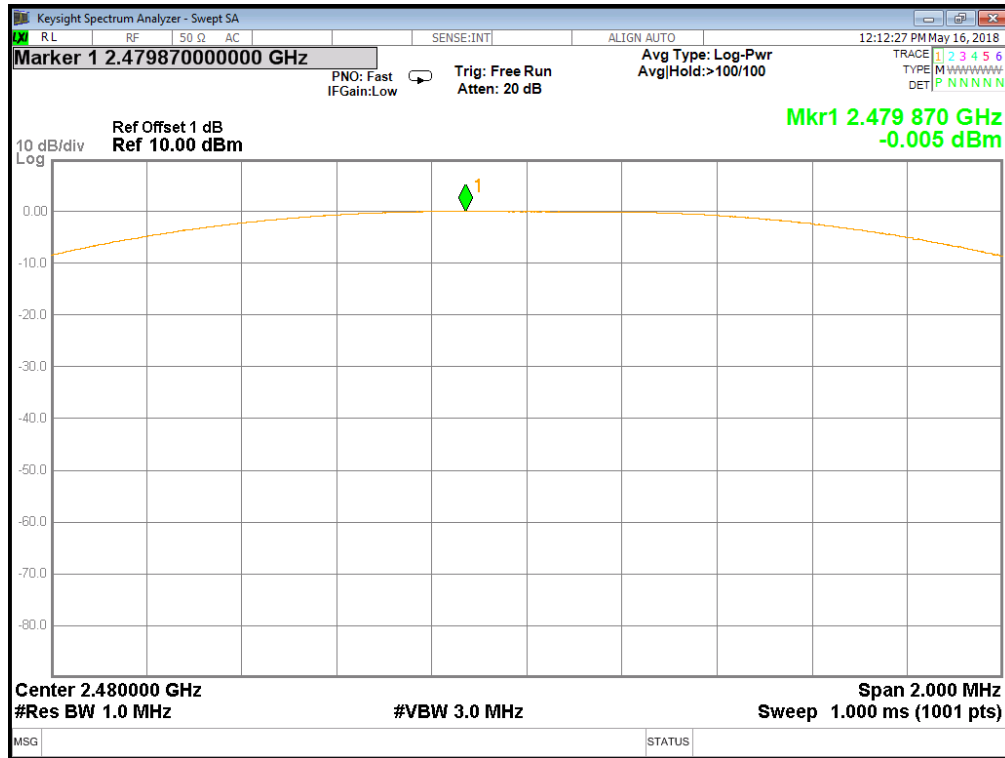

8DPSK

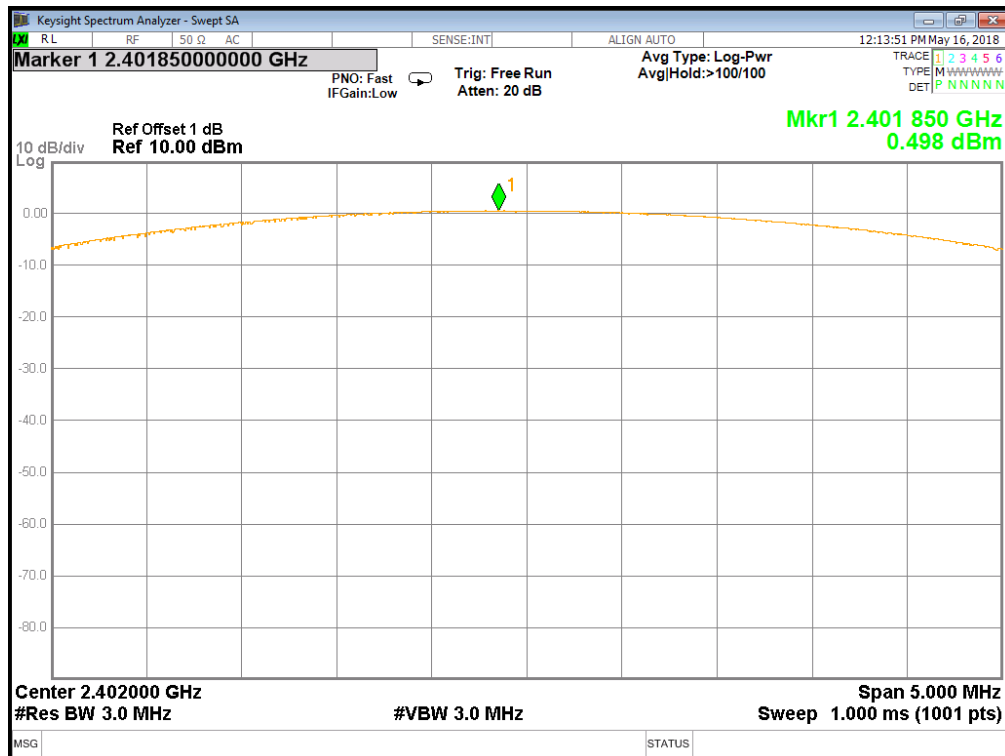

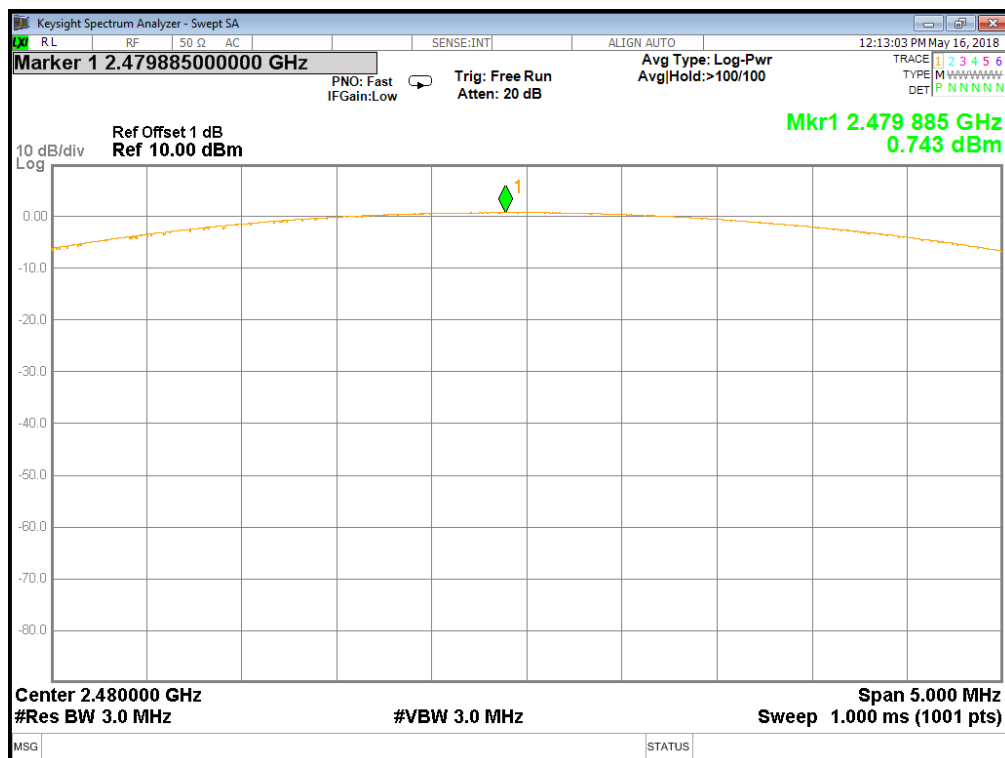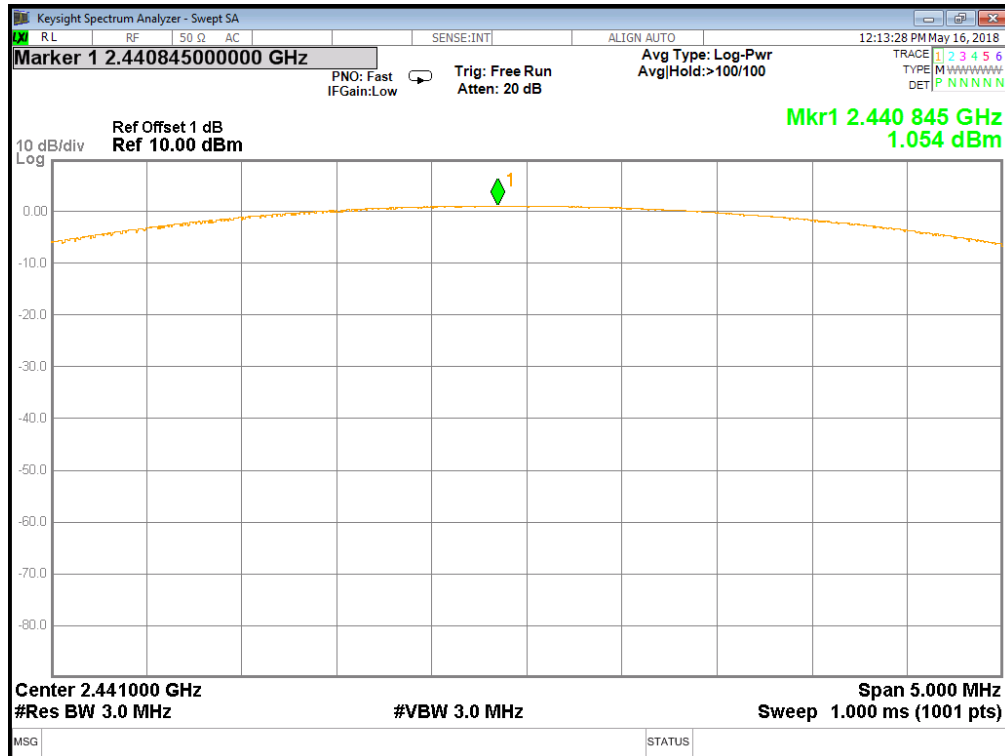


## 8. SPURIOUS EMISSION

### 8.1. Test equipment


Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Due.	Cal. Interval
1	EMI Test Receiver	R&S	ESU8	100316	2018/12/17	1 Year
2	Spectrum analyzer	R&S	FSU	1166.1660.26	2018/12/17	1 Year
3	Loop antenna	TESEQ	HLA6120	20129	2018/12/17	1 Year
4	Trilog Broadband Antenna	Schwarzbeck	VULB9163	9163-462	2018/12/17	1 Year
5	Double Ridged Horn Antenna	Schwarzbeck	BBHA9120D	9120D 1065	2018/12/17	1 Year
6	Horn Antenna	Schwarzbeck	BBHA 9170	9170 1248	2018/12/17	1 Year
7	Pre-amplifier	A.H.	PAM-1840VH	562	2018/12/17	1 Year
8	Pre-amplifier	R&S	AFS33-18002 650-30-8P-44	SEL0080	2018/12/17	1 Year
9	Pre-Amplifier	HP	8449B	3274A06298	2018/12/17	1 Year
10	RF Cable	R&S	R01	10403	2018/12/17	1 Year
11	RF Cable	R&S	R02	10512	2018/12/17	1 Year

### 8.2. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9KHz-30MHz

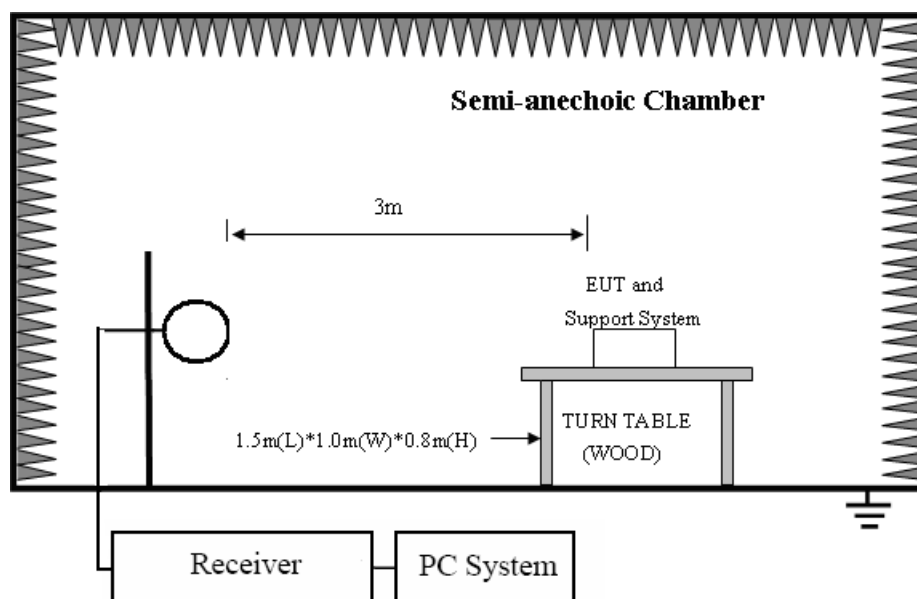

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

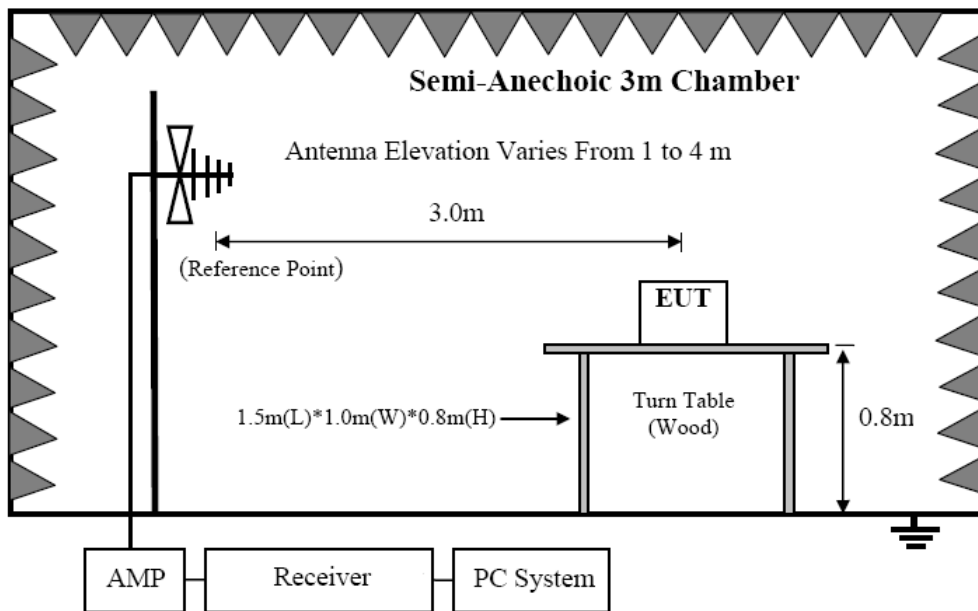

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

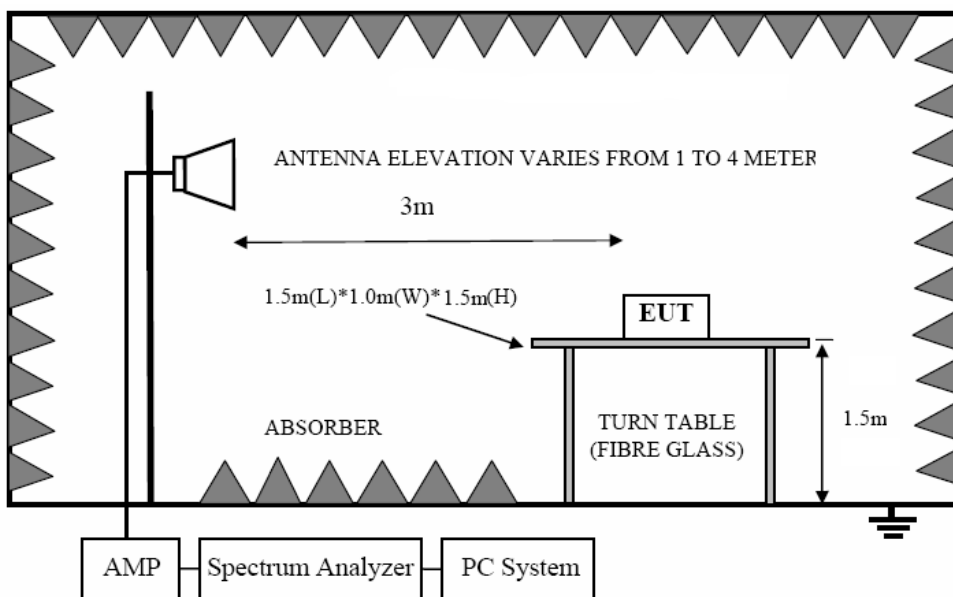

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.



### 8.3. Limit

#### 8.3.1 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

#### 8.3.2. Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(KHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(KHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB( $\mu\text{V}$ )/m (Peak) 54.0 dB( $\mu\text{V}$ )/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dBuV}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dBuV}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

8.3.3. Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 30dB below the fundamental emissions, or comply with 15.209 limits.

**8.4. Test Procedure**

- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and assistant system according clause 2.4 and 7.2
- (3) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used
9KHz-30MHz	Active Loop antenna
30MHz-1GHz	Trilog Broadband Antenna
1GHz-26.5GHz	Double Ridged Horn Antenna(1GHz-26.5GHz)

Remark:Because there is only a botton noise above 18GHz,so the test report only put the data below 18GHz

According ANSI C63.10:2013 clause 6.4.4.2 and 6,5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

- (4) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9KHz to 25GHz:
  - (a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1m to 4m(Except loop antenna, it's fixed 1m above ground.)
  - (b) Change work frequency or channel of device if practicable.
  - (c) Change modulation type of device if practicable.
  - (d) new battery is used during testing
  - (e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

- (5) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.
- (6) The emissions from 9KHz to 1GHz were measured based on CISPR QP detector except for the frequency bands 9-90KHz, 110-490KHz, for emissions from 9KHz-90KHz, 110KHz-490KHz and above 1GHz were measured based on average detector, for emissions above 1GHz, peak emissions also be measured and need comply with Peak limit.
- (7) The emissions from 9KHz to 1GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9KHz-150KHz	200Hz
150KHz-30MHz	9KHz
30MHz-1GHz	120KHz

- (8) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure(according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure). Peak detector is used for Peak and AV measurement both.

Note: For Radiated spurious emission  
 Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain

For Bandedge restriction band Radiated emission  
 Correct Factor = Antenna Factor + Cable Loss

## 8.5. Test Result

### Below 30M

<b>EUT:</b>	BRP AUDIO PORTABLE	<b>Model No.:</b>	278003657
<b>Temperature:</b>	24°C	<b>Relative Humidity:</b>	55%
<b>Distance:</b>	3m	<b>Test Power:</b>	120V/60Hz
<b>Polarization:</b>	--	<b>Test Result:</b>	Pass
<b>Test Mode:</b>	Keeping TX mode	<b>Test By:</b>	Smile

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $20 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor

### Between 30M – 1000 MHz

EUT:	BRP AUDIO PORTABLE	Model No.:	278003657
Temperature:	24	Relative Humidity:	55%
Distance:	3m	Test Power:	120V/60Hz
Polarization:	Vertical	Test Result:	Pass
Standard:	(RE)FCC PART 15	Test By:	Smile
Test Mode:	Keeping TX mode		

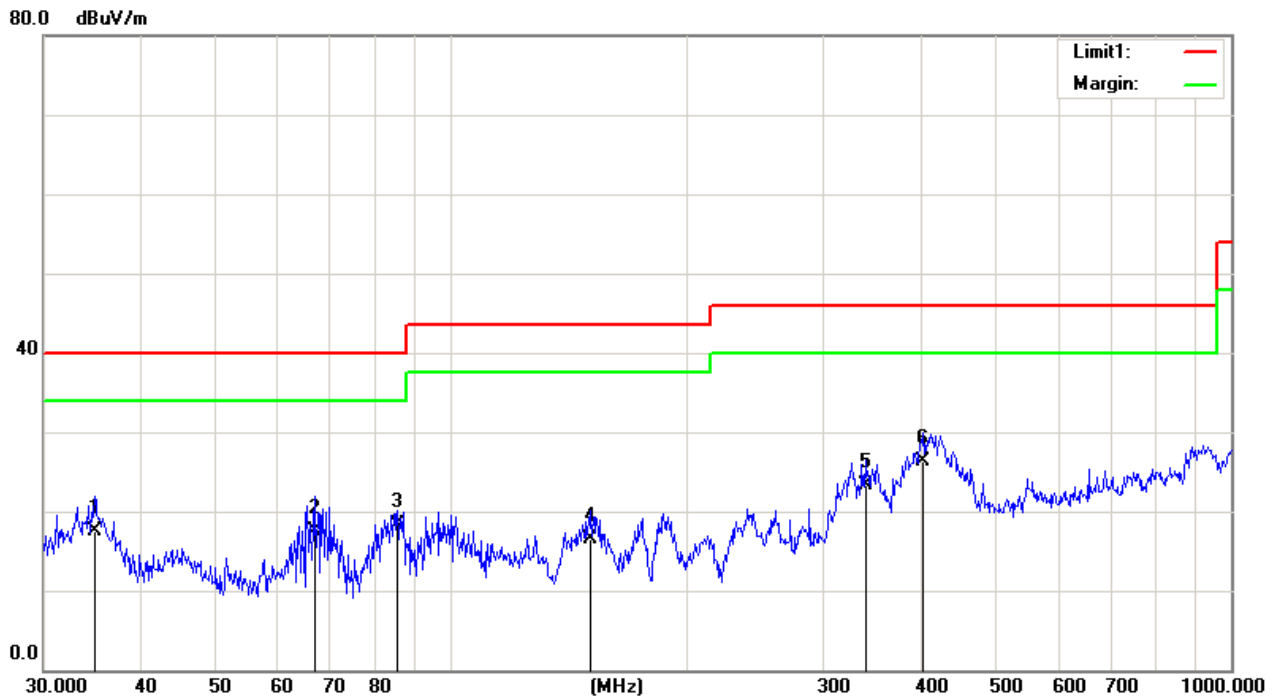


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	34.8823	26.41	-8.96	17.45	40.00	-22.55	QP
2	66.7325	35.49	-17.89	17.60	40.00	-22.40	QP
3	85.2980	29.18	-10.86	18.32	40.00	-21.68	QP
4	151.0666	25.61	-9.02	16.59	43.50	-26.91	QP
5	339.5888	33.78	-10.48	23.30	46.00	-22.70	QP
6	403.2500	35.71	-9.35	26.36	46.00	-19.64	QP

The test result is calculated as the following:

- (1) Result = Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain
- (3) Margin = Result - Limit

<b>EUT:</b>	BRP AUDIO PORTABLE	<b>Model No.:</b>	278003657
<b>Temperature:</b>	24	<b>Relative Humidity:</b>	55%
<b>Distance:</b>	3m	<b>Test Power:</b>	120V/60Hz
<b>Polarization:</b>	Horizontal	<b>Test Result:</b>	Pass
<b>Standard:</b>	(RE)FCC PART 15	<b>Test By:</b>	Smile
<b>Test Mode:</b>	Keeping TX mode		

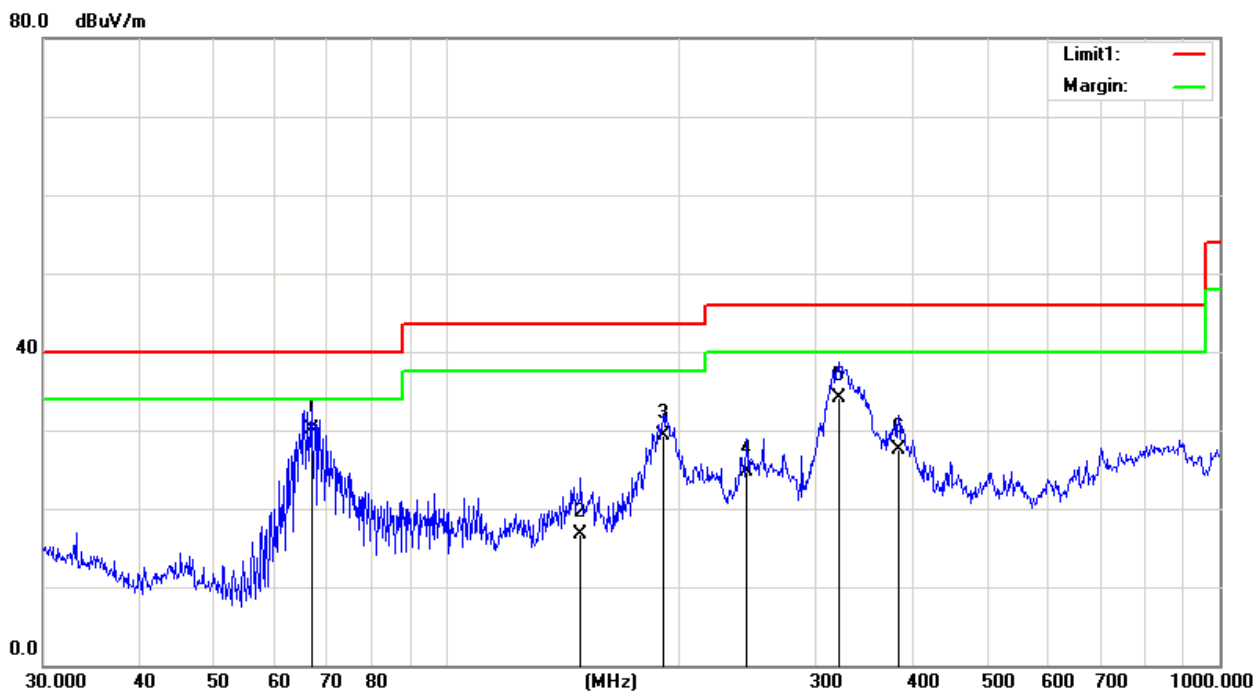

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	66.7325	44.69	-14.57	30.12	40.00	-9.88	QP
2	148.9625	30.61	-13.83	16.78	43.50	-26.72	QP
3	190.4050	39.46	-10.16	29.30	43.50	-14.20	QP
4	244.2321	31.70	-6.95	24.75	46.00	-21.25	QP
5	321.0608	43.48	-9.33	34.15	46.00	-11.85	QP
6	383.9318	36.32	-8.90	27.42	46.00	-18.58	QP

The test result is calculated as the following:


- (1) Result = Reading + Correct Factor
- (2) Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain
- (3) Margin = Result - Limit

### Between 1000M – 25000 MHz

<b>Test Site</b>	: 3m Chamber		
<b>EUT</b>	: BRP AUDIO PORTABLE	<b>Tested By</b>	: Smile
<b>Power Supply</b>	: 19Vdc 3A	<b>Model Number</b>	: 278003657
<b>Condition</b>	: Temp:24.5'C,Humi:55%, Press:100.1kPa	<b>Test Mode</b>	: Tx mode
<b>Memo</b>	: GFSK,8DPSK	<b>Antenna/Distance</b>	: 3m

1M 2402 Horizontal

#### Radiated Emission Measurement

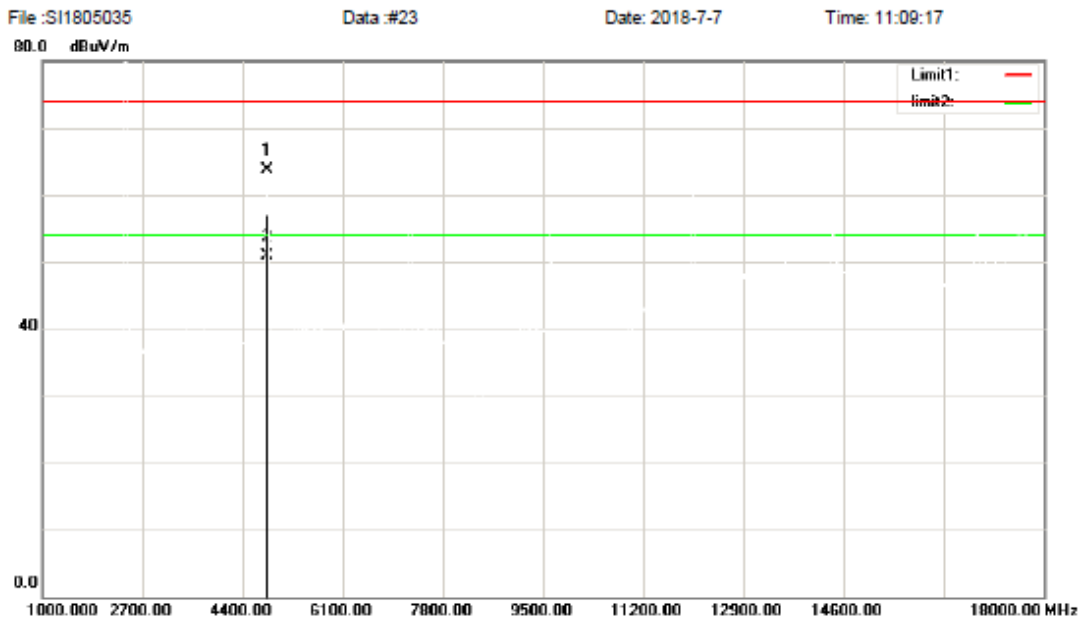

Site :ATT Radiated Emission Chamber 1	Polarization: <i>Horizontal</i>	Temperature: 24
Limit: FCC PART 15 C 1-26.5G PEAK	Power: AC 120V/60Hz	Humidity: 55 %
EUT: BRP AUDIO PORTABLE	Distance: 3m	
M/N: 278003657		
Mode: TX		
Note: 1M 2402		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4825.000	74.48	-10.68	63.80	74.00	-10.20	peak		
2	*	4825.000	61.64	-10.68	50.96	54.00	-3.04	AVG		

### 1M 2402 Vertical

### Radiated Emission Measurement


File :SI1805035

Data :#24

Date: 2018-7-7

Time: 11:11:25

80.0 dBuV/m

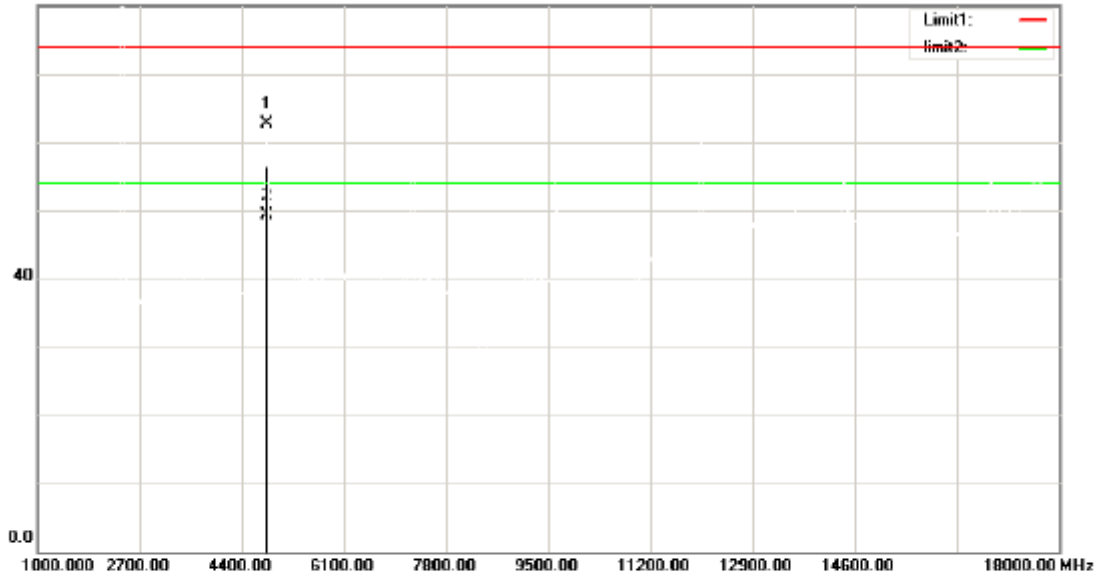

Site :ATT Radiated Emission Chamber 1

Polarization: *Vertical*

Temperature: 24

Limit: FCC PART 15 C 1-26.5G PEAK

Power: AC 120V/60Hz

Humidity: 55 %

EUT: BRP AUDIO PORTABLE

Distance: 3m

M/N: 278003657

Mode: TX

Note: 1M 2402

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		4825.000	73.48	-10.68	62.80	74.00	-11.20	peak			
2	*	4825.000	60.03	-10.68	49.35	54.00	-4.65	AVG			



## 1M 2441 Vertical Radiated Emission Measurement


File :S11805035

Data :#25

Date: 2018-7-7

Time: 11:13:13

00.0 dBuV/m

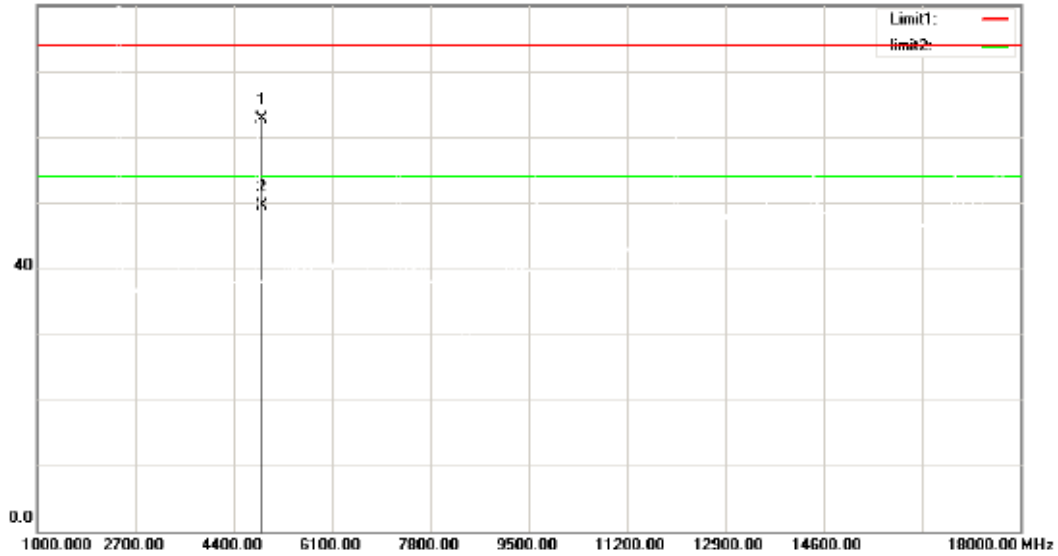

Site :ATT Radiated Emission Chamber 1

Polarization: *Vertical*

Temperature: 24

Limit: FCC PART 15 C 1-26.5G PEAK

Power: AC 120V/60Hz

Humidity: 55 %

EUT: BRP AUDIO PORTABLE

Distance: 3m

M/N: 278003657

Mode: TX

Note: 1M 2441

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4882.000	73.23	-10.43	62.80	74.00	-11.20	peak		
2	*	4882.000	59.97	-10.43	49.54	54.00	-4.46	AVG		

## 1M 2441 Horizontal Radiated Emission Measurement


File :S11805035

Data :#28

Date: 2018-7-7

Time: 11:15:14

00.0 dBuV/m

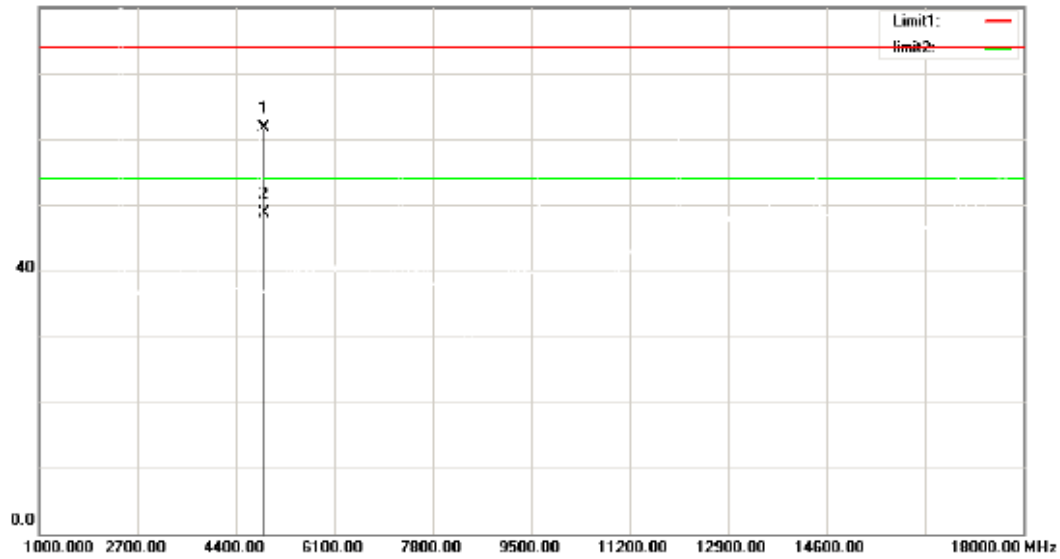

Site :ATT Radiated Emission Chamber 1

Polarization: *Horizontal*

Temperature: 24

Limit: FCC PART 15 C 1-26.5G PEAK

Power: AC 120V/60Hz

Humidity: 55 %

EUT: BRP AUDIO PORTABLE

Distance: 3m

M/N: 278003657

Mode: TX

Note: 1M 2441

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1		4882.000	72.23	-10.43	61.80	74.00	-12.20	peak			
2	*	4882.000	59.08	-10.43	48.65	54.00	-5.35	AVG			

## 1M 2480 Horizontal Radiated Emission Measurement


File :S11805035

Data :#27

Date: 2018-7-7

Time: 11:17:27

00.0 dBuV/m

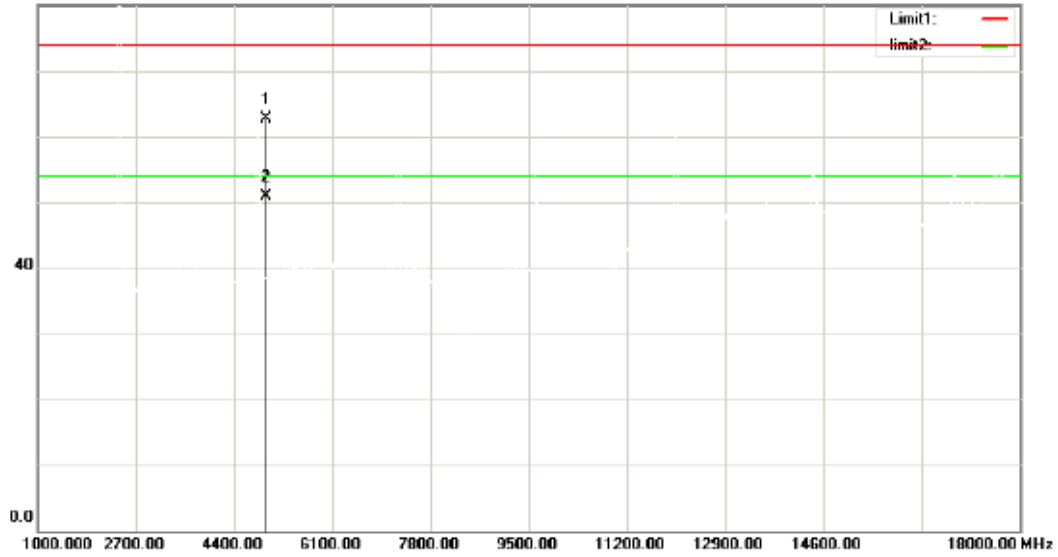

Site :ATT Radiated Emission Chamber 1      Polarization: *Horizontal*      Temperature: 24  
 Limit: FCC PART 15 C 1-26.5G PEAK      Power: AC 120V/60Hz      Humidity: 55 %  
 EUT: BRP AUDIO PORTABLE      Distance: 3m  
 M/N: 278003657  
 Mode: TX  
 Note: 1M 2480

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree	Comment
1		4960.000	72.88	-10.08	62.80	74.00	-11.20	peak		
2	*	4960.000	60.95	-10.08	50.87	54.00	-3.13	AVG		

## 1M 2480 Vertical Radiated Emission Measurement


File :SI1805035

Data :#28

Date: 2018-7-7

Time: 11:19:33

80.0 dBuV/m

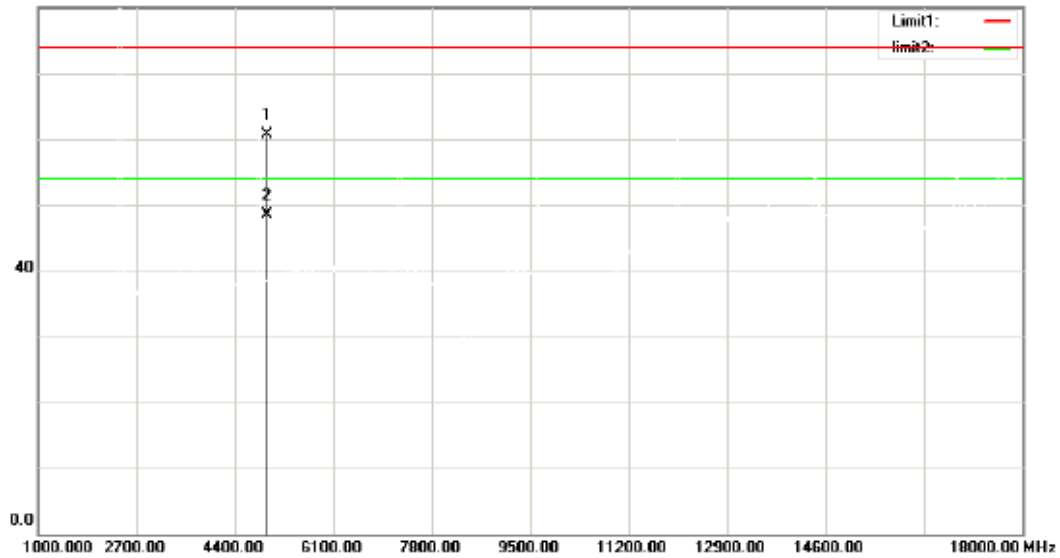

Site :ATT Radiated Emission Chamber 1

Polarization: *Vertical*

Temperature: 24

Limit: FCC PART 15 C 1-26.5G PEAK

Power: AC 120V/60Hz

Humidity: 55 %

EUT: BRP AUDIO PORTABLE

Distance: 3m

M/N: 278003657

Mode: TX

Note: 1M 2480

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4960.000	70.88	-10.08	60.80	74.00	-13.20			peak
2	*	4960.000	58.60	-10.08	48.52	54.00	-5.48			AVG


### 3M 2402 Vertical Radiated Emission Measurement

File :SI1805035  
80.0 dBuV/m

Data :#29

Date: 2018-7-7

Time: 11:21:24

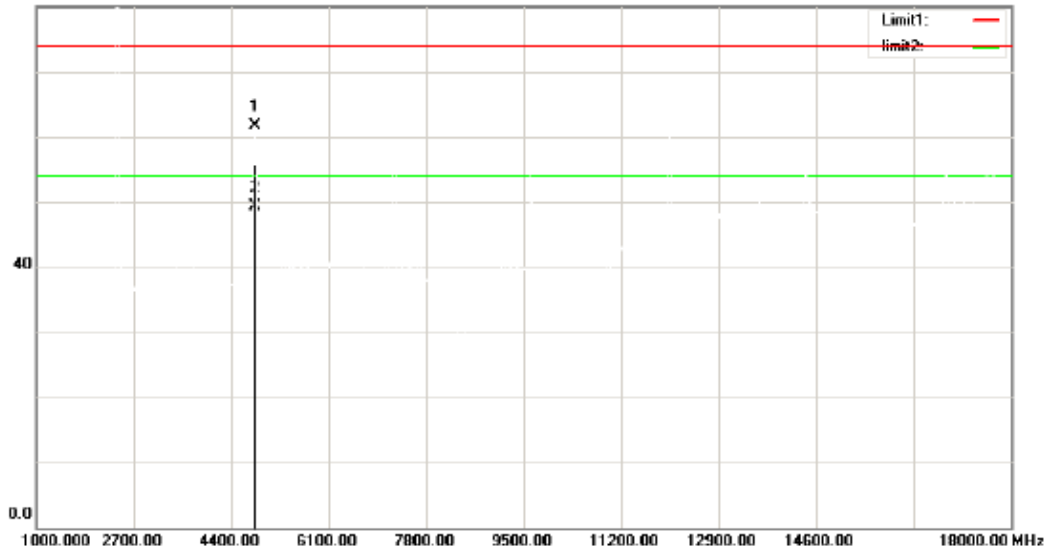

Site :ATT Radiated Emission Chamber 1  
Limit: FCC PART 15 C 1-26.5G PEAK  
EUT: BRP AUDIO PORTABLE  
M/N: 278003657  
Mode: TX  
Note: 3M 2402

Polarization: *Vertical*  
Power: AC 120V/60Hz  
Distance: 3m

Temperature: 24  
Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		4824.000	72.50	-10.70	61.80	74.00	-12.20	peak		
2	*	4824.000	60.07	-10.70	49.37	54.00	-4.63	AVG		


### 3M 2402 Horizontal Radiated Emission Measurement

File :S11805035  
90.0 dBuV/m

Data :#30

Date: 2018-7-7

Time: 11:23:38

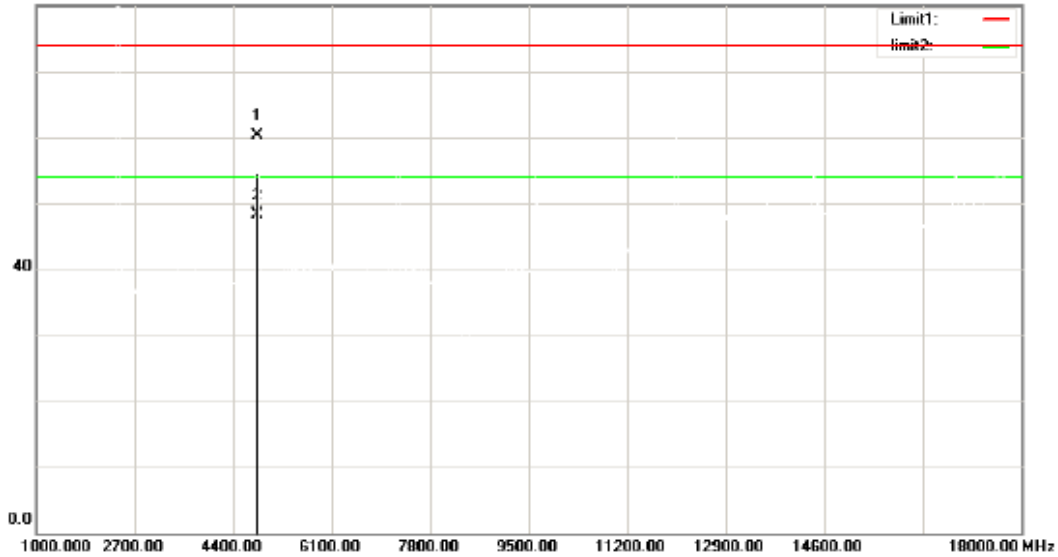

Site :ATT Radiated Emission Chamber 1  
Limit: FCC PART 15 C 1-26.5G PEAK  
EUT: BRP AUDIO PORTABLE  
M/N: 278003657  
Mode: TX  
Note: 3M 2402

Polarization: *Horizontal*  
Power: AC 120V/60Hz  
Distance: 3m

Temperature: 24  
Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		4824.000	71.00	-10.70	60.30	74.00	-13.70	peak		
2	*	4824.000	59.04	-10.70	48.34	54.00	-5.66	AVG		

### 3M 2441 Horizontal Radiated Emission Measurement


File :S11805035

Data :#31

Date: 2018-7-7

Time: 11:25:41

00.0 dBuV/m

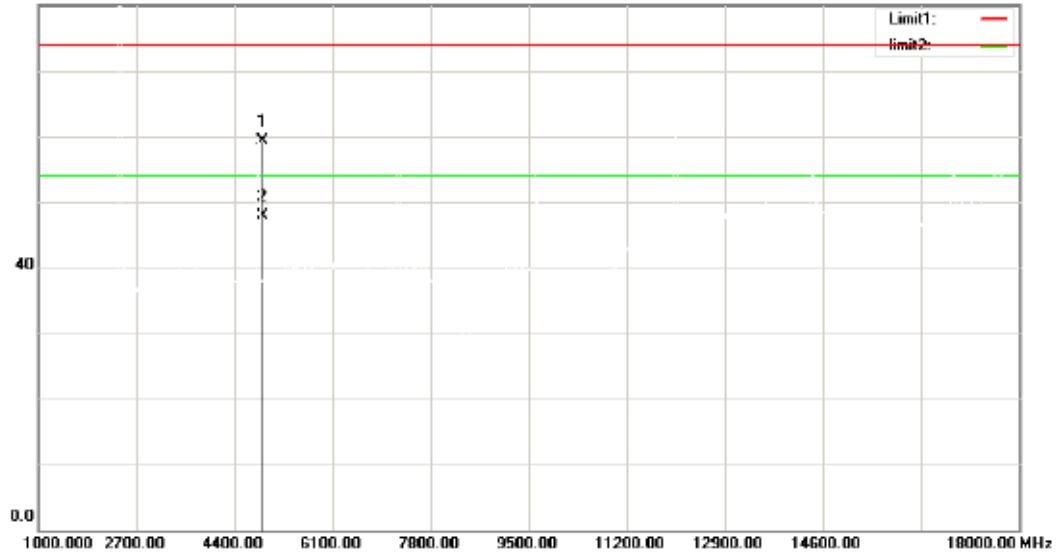

Site :ATT Radiated Emission Chamber 1

Polarization: *Horizontal*

Temperature: 24

Limit: FCC PART 15 C 1-26.5G PEAK

Power: AC 120V/60Hz

Humidity: 55 %

EUT: BRP AUDIO PORTABLE

Distance: 3m

M/N: 278003657

Mode: TX

Note: 3M 2441

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4882.000	69.73	-10.43	59.30	74.00	-14.70			peak
2	*	4882.000	58.38	-10.43	47.95	54.00	-6.05			AVG

### 3M 2441 Vertical Radiated Emission Measurement


File :SI1805035

Data :#32

Date: 2018-7-7

Time: 11:27:36

80.0 dBuV/m

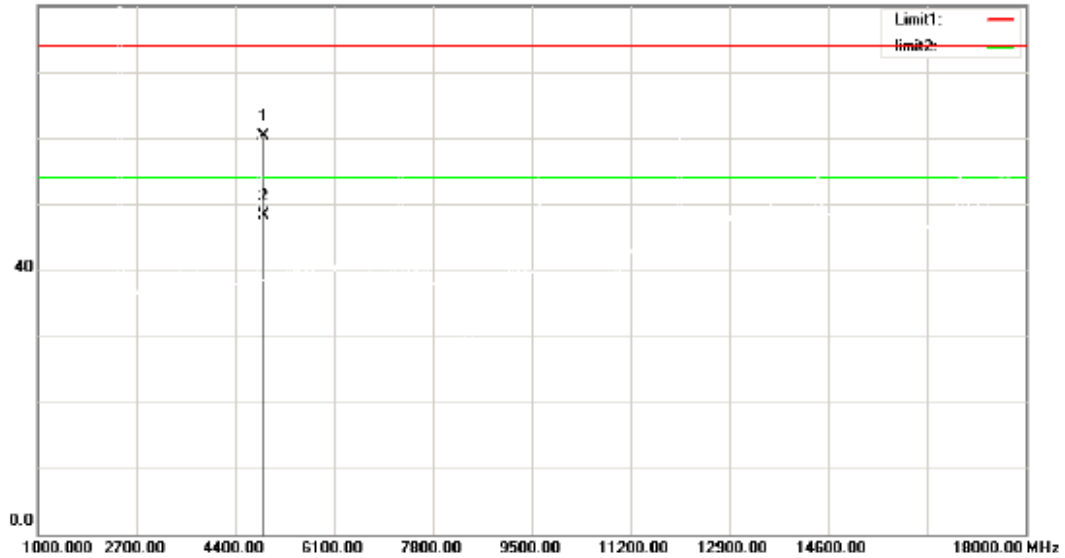

Site :ATT Radiated Emission Chamber 1  
 Limit: FCC PART 15 C 1-26.5G PEAK  
 EUT: BRP AUDIO PORTABLE  
 M/N: 278003657  
 Mode: TX  
 Note: 3M 2441

Polarization: *Vertical*  
 Power: AC 120V/60Hz  
 Distance: 3m  
 Temperature: 24  
 Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		4882.000	70.73	-10.43	60.30	74.00	-13.70			peak
2	*	4882.000	58.77	-10.43	48.34	54.00	-5.66			AVG




### 3M 2480 Vertical Radiated Emission Measurement

File :S11805035

Data :#33

Date: 2018-7-7

Time: 11:29:38

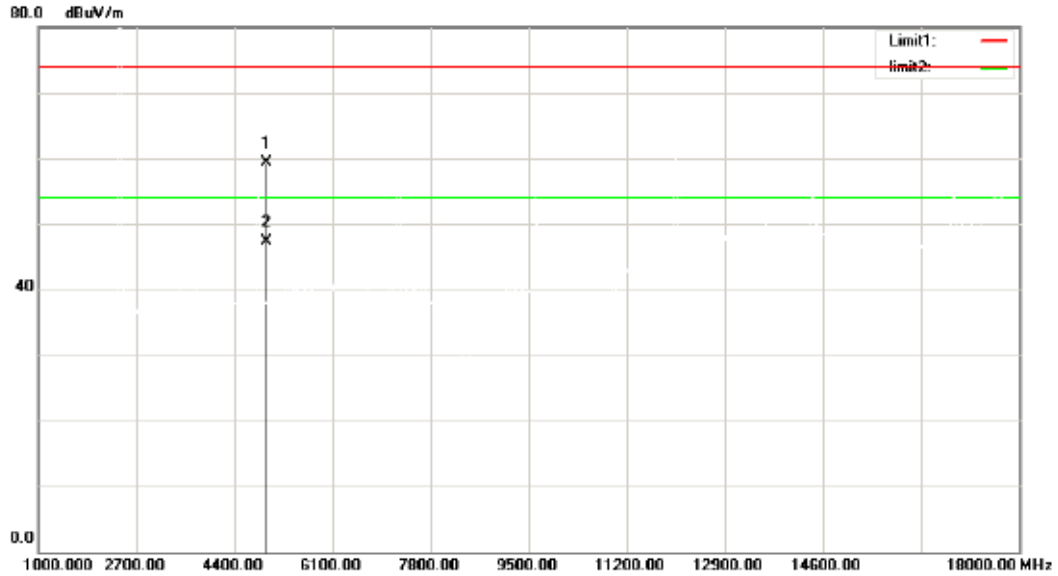

Site :ATT Radiated Emission Chamber 1      Polarization: **Vertical**      Temperature: 24  
 Limit: FCC PART 15 C 1-26.5G PEAK      Power: AC 120V/60Hz      Humidity: 55 %  
 EUT: BRP AUDIO PORTABLE      Distance: 3m  
 M/N: 278003657  
 Mode: TX  
 Note: 3M 2480

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4960.000	69.38	-10.08	59.30	74.00	-14.70			peak
2	*	4960.000	57.36	-10.08	47.28	54.00	-6.72			AVG


### 3M 2480 Horizontal Radiated Emission Measurement

File: SI1805035  
80.0 dBuV/m

Data: #34

Date: 2018-7-7


Time: 11:31:44

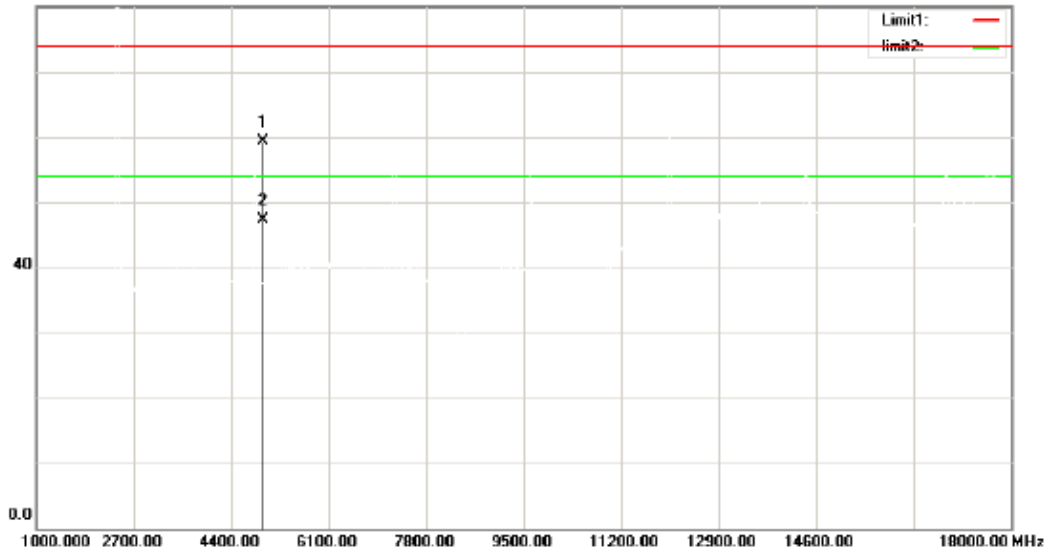

Site :ATT Radiated Emission Chamber 1      Polarization: *Horizontal*      Temperature: 24  
 Limit: FCC PART 15 C 1-26.5G PEAK      Power: AC 120V/60Hz      Humidity: 55 %  
 EUT: BRP AUDIO PORTABLE      Distance: 3m  
 M/N: 278003657  
 Mode: TX  
 Note: 3M 2480

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		4960.000	69.38	-10.08	59.30	74.00	-14.70			peak
2	*	4960.000	57.41	-10.08	47.33	54.00	-6.67			AVG

**Radiated band edge:**

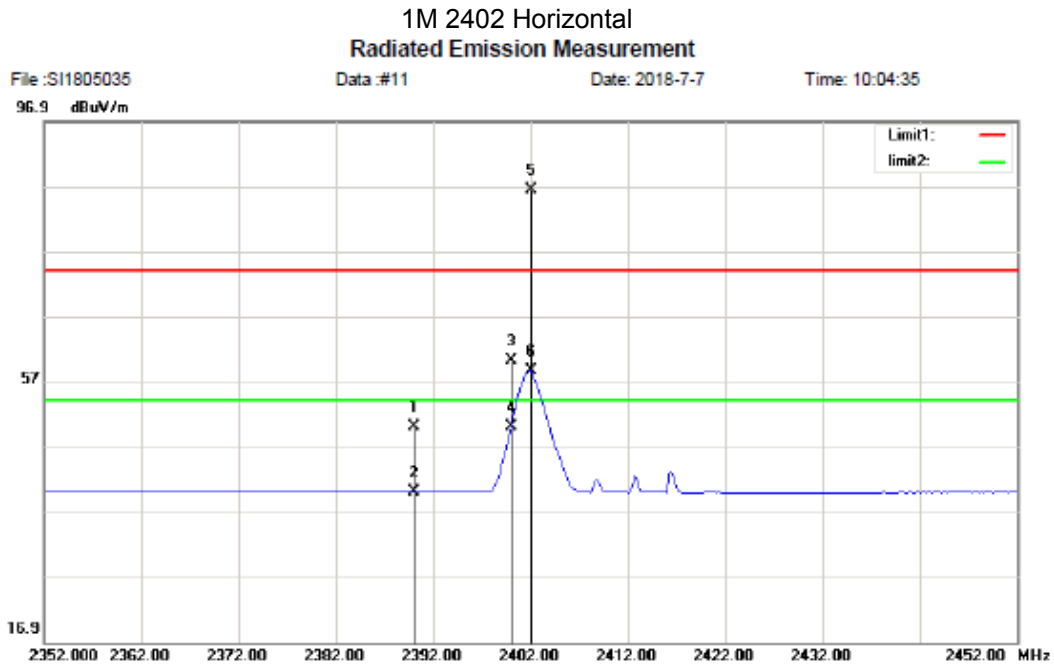

Site :ATT Radiated Emission Chamber 1	Polarization: <i>Horizontal</i>	Temperature: 24
Limit: FCC PART 15 C 1-26.5G PEAK	Power: AC 120V/60Hz	Humidity: 55 %
EUT: BRP AUDIO PORTABLE	Distance: 3m	
M/N: 278003657		
Mode: TX		
Note: 1M 2402		

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2390.000	19.15	30.85	50.00	74.00	-24.00	peak			
2		2390.000	9.13	30.85	39.98	54.00	-14.02	AVG			
3		2400.000	29.38	30.87	60.25	74.00	-13.75	peak			
4		2400.000	19.11	30.87	49.98	54.00	-4.02	AVG			
5	*	2402.000	55.44	30.87	86.31	74.00	12.31	peak			no limit
6	X	2402.000	27.65	30.87	58.52	54.00	4.52	AVG			no limit


## 1M 2402 Vertical Radiated Emission Measurement

File: SI1805035  
96.9 dBuV/m

Data: #12

Date: 2018-7-7

Time: 10:10:55

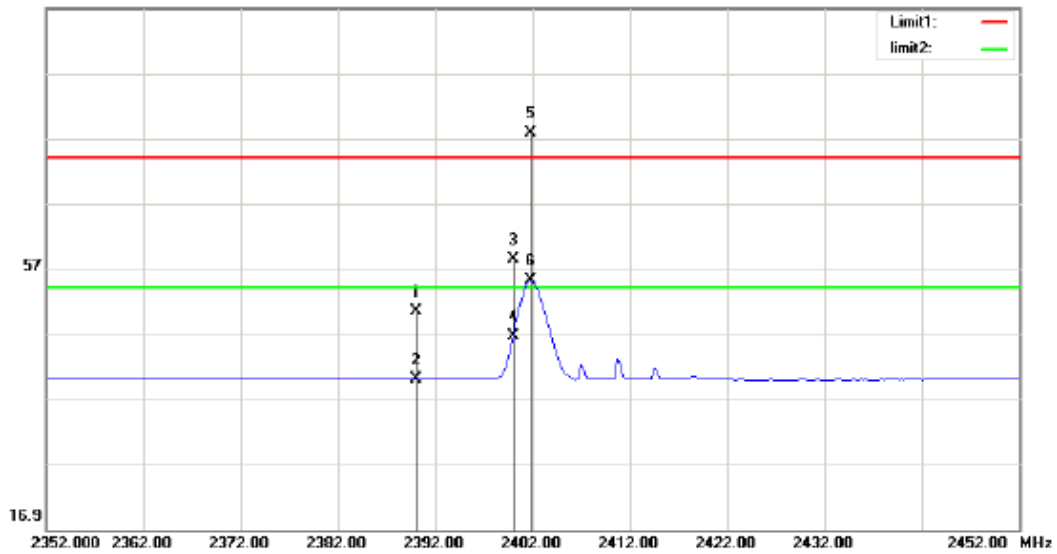

Site :ATT Radiated Emission Chamber 1      Polarization: **Vertical**      Temperature: 24  
 Limit: FCC PART 15 C 1-26.5G PEAK      Power: AC 120V/60Hz      Humidity: 55 %  
 EUT: BRP AUDIO PORTABLE      Distance: 3m  
 M/N: 278003657  
 Mode: TX  
 Note: 1M 2402

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	Comment
1		2390.000	19.54	30.85	50.39	74.00	-23.61			peak
2		2390.000	9.23	30.85	40.08	54.00	-13.92			AVG
3		2400.000	27.50	30.87	58.37	74.00	-15.63			peak
4		2400.000	15.83	30.87	46.70	54.00	-7.30			AVG
5	*	2401.750	46.94	30.87	77.81	74.00	3.81			peak no limit
6	X	2401.750	24.40	30.87	55.27	54.00	1.27			AVG no limit

### 1M 2441 Vertical

#### Radiated Emission Measurement


File :SI1805035

Data :#13

Date: 2018-7-7

Time: 10:19:33

96.9 dBuV/m

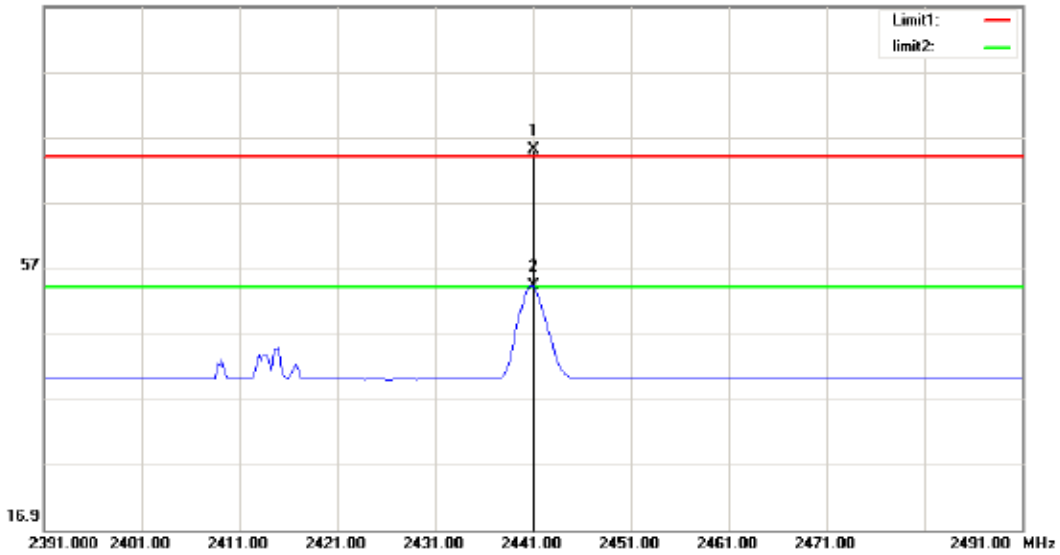

Site :ATT Radiated Emission Chamber 1

Polarization: *Vertical*

Temperature: 24

Limit: FCC PART 15 C 1-26.5G PEAK

Power: AC 120V/60Hz

Humidity: 55 %

EUT: BRP AUDIO PORTABLE

Distance: 3m

M/N: 278003657

Mode: TX

Note: 1M 2441

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1	*	2441.000	44.11	30.97	75.08	74.00	1.08	peak		no limit
2	X	2441.000	23.26	30.97	54.23	54.00	0.23	AVG		no limit


## 1M 2441 Horizontal Radiated Emission Measurement

File :SI1805035  
96.9 dBuV/m

Data :#14

Date: 2018-7-7

Time: 10:21:52

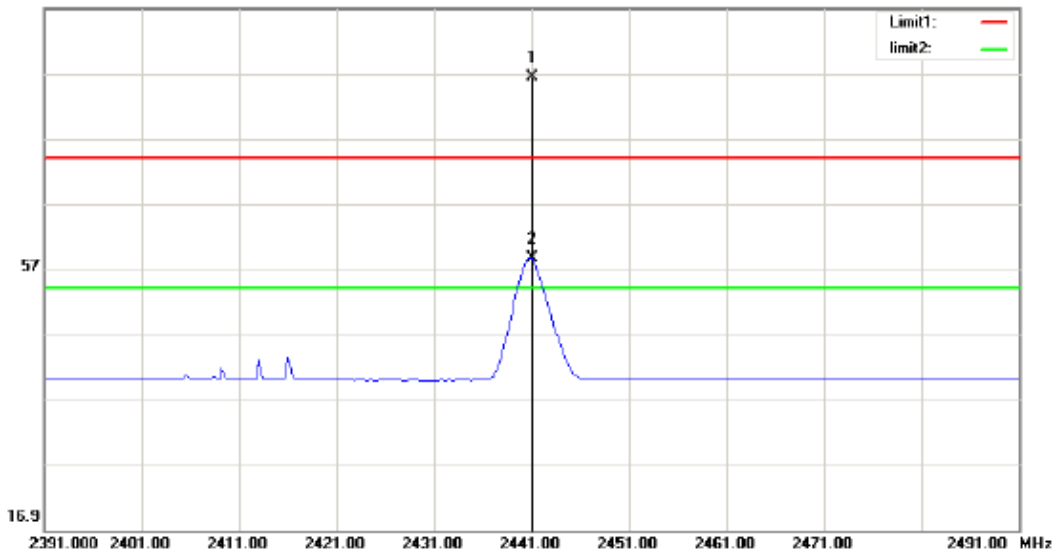

Site :ATT Radiated Emission Chamber 1      Polarization: *Horizontal*      Temperature: 24  
 Limit: FCC PART 15 C 1-26.5G PEAK      Power: AC 120V/60Hz      Humidity: 55 %  
 EUT: BRP AUDIO PORTABLE      Distance: 3m  
 M/N: 278003657  
 Mode: TX  
 Note: 1M 2441

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1	*	2441.000	55.40	30.97	86.37	74.00	12.37	peak		no limit
2	X	2441.000	27.63	30.97	58.60	54.00	4.60	AVG		no limit


## 1M 2480 Horizontal Radiated Emission Measurement

File :S11805035  
96.9 dBuV/m

Data :#15

Date: 2018-7-7

Time: 10:24:35

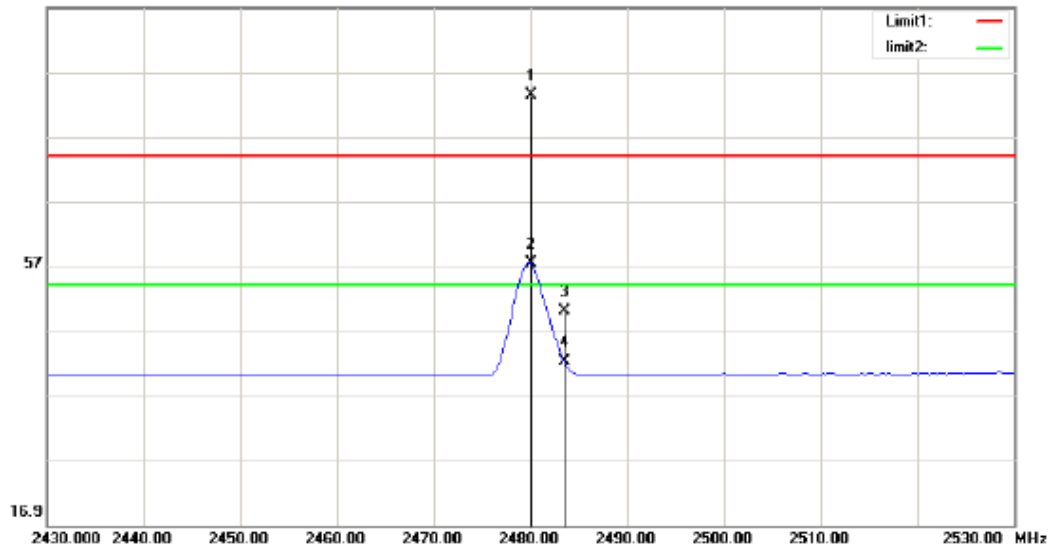

Site :ATT Radiated Emission Chamber 1  
Limit: FCC PART 15 C 1-26.5G PEAK  
EUT: BRP AUDIO PORTABLE  
M/N: 278003657  
Mode: TX  
Note: 1M 2480

Polarization: *Horizontal*  
Power: AC 120V/60Hz  
Distance: 3m

Temperature: 24  
Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Detector	Comment
1	*	2480.000	52.27	31.06	83.33	74.00	9.33			peak	no limit
2	X	2480.000	26.43	31.06	57.49	54.00	3.49			AVG	no limit
3		2483.500	18.90	31.07	49.97	74.00	-24.03			peak	
4		2483.500	11.10	31.07	42.17	54.00	-11.83			AVG	


## 1M 2480 Vertical Radiated Emission Measurement

File :S11805035  
96.9 dBuV/m

Data :#16

Date: 2018-7-7

Time: 10:27:58

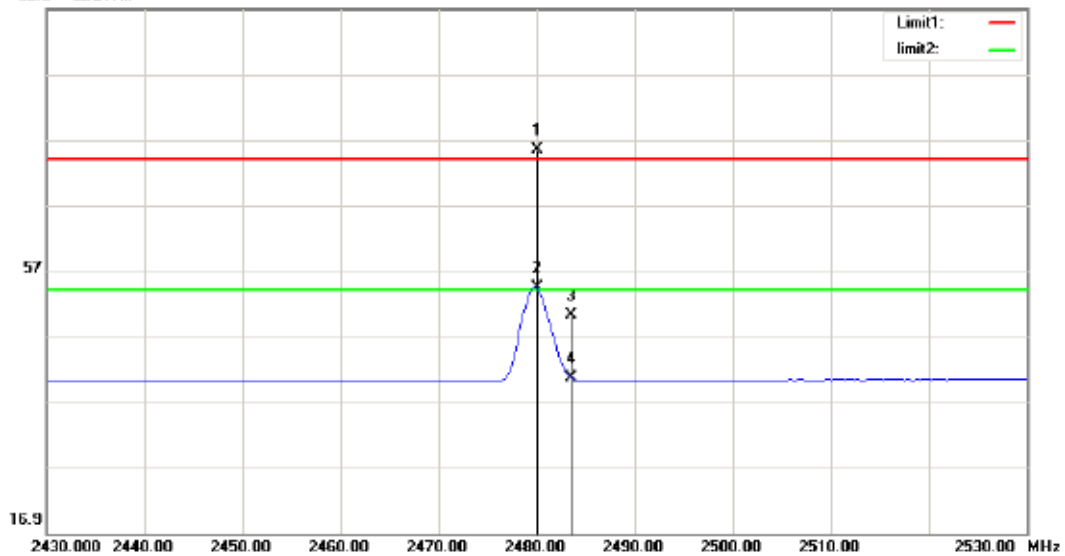

Site :ATT Radiated Emission Chamber 1

Polarization: *Vertical*

Temperature: 24

Limit: FCC PART 15 C 1-26.5G PEAK

Power: AC 120V/60Hz

Humidity: 55 %

EUT: BRP AUDIO PORTABLE

Distance: 3m

M/N: 278003657

Mode: TX

Note: 1M 2480

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	2480.000	44.42	31.06	75.48	74.00	1.48	peak			no limit
2	X	2480.000	23.40	31.06	54.46	54.00	0.46	AVG			no limit
3		2483.500	19.08	31.07	50.15	74.00	-23.85	peak			
4		2483.500	9.45	31.07	40.52	54.00	-13.48	AVG			




### 3M 2480 Vertical Radiated Emission Measurement

File :SI1805035  
96.9 dBuV/m

Data :#17

Date: 2018-7-7

Time: 10:30:42

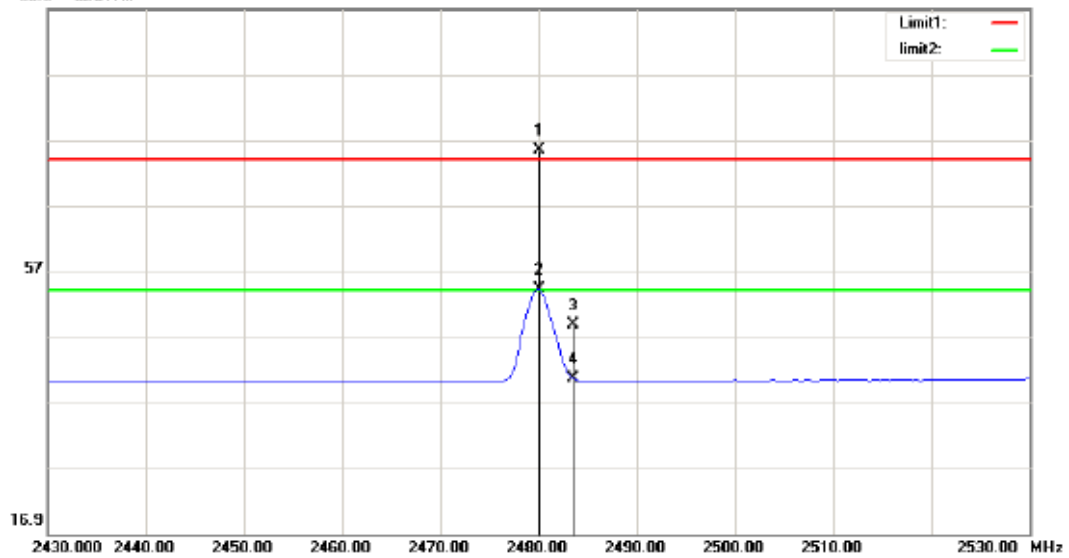

Site :ATT Radiated Emission Chamber 1      Polarization: *Vertical*      Temperature: 24  
 Limit: FCC PART 15 C 1-26.5G PEAK      Power: AC 120V/60Hz      Humidity: 55 %  
 EUT: BRP AUDIO PORTABLE      Distance: 3m  
 M/N: 278003657  
 Mode: TX  
 Note: 3M 2480

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	2480.000	44.30	31.06	75.36	74.00	1.36	peak			no limit
2	X	2480.000	23.21	31.06	54.27	54.00	0.27	AVG			no limit
3		2483.500	17.82	31.07	48.89	74.00	-25.11	peak			
4		2483.500	9.50	31.07	40.57	54.00	-13.43	AVG			


### 3M 2480 Horizontal Radiated Emission Measurement

File :S11805035  
96.9 dBuV/m

Data #18

Date: 2018-7-7

Time: 10:47:58

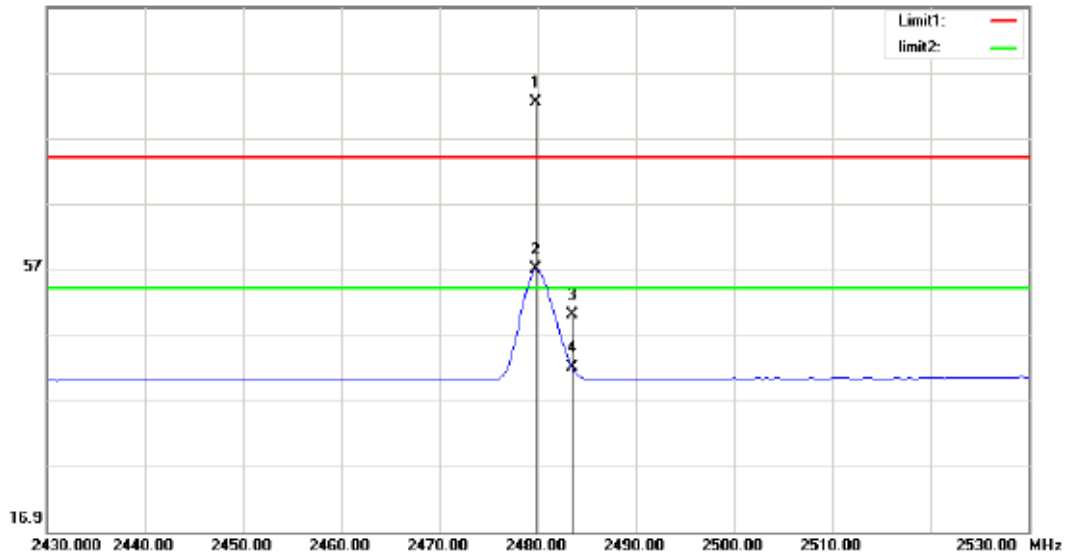

Site :ATT Radiated Emission Chamber 1      Polarization: *Horizontal*      Temperature: 24  
 Limit: FCC PART 15 C 1-26.5G PEAK      Power: AC 120V/60Hz      Humidity: 55 %  
 EUT: BRP AUDIO PORTABLE      Distance: 3m  
 M/N: 278003657  
 Mode: TX  
 Note: 3M 2480

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	2479.750	51.39	31.06	82.45	74.00	8.45	peak			no limit
2	X	2479.750	25.96	31.06	57.02	54.00	3.02	AVG			no limit
3		2483.500	18.88	31.07	49.95	74.00	-24.05	peak			
4		2483.500	10.92	31.07	41.99	54.00	-12.01	AVG			


### 3M 2441 Horizontal Radiated Emission Measurement

File :S11805035  
96.9 dBuV/m

Data :#19

Date: 2018-7-7

Time: 10:50:21

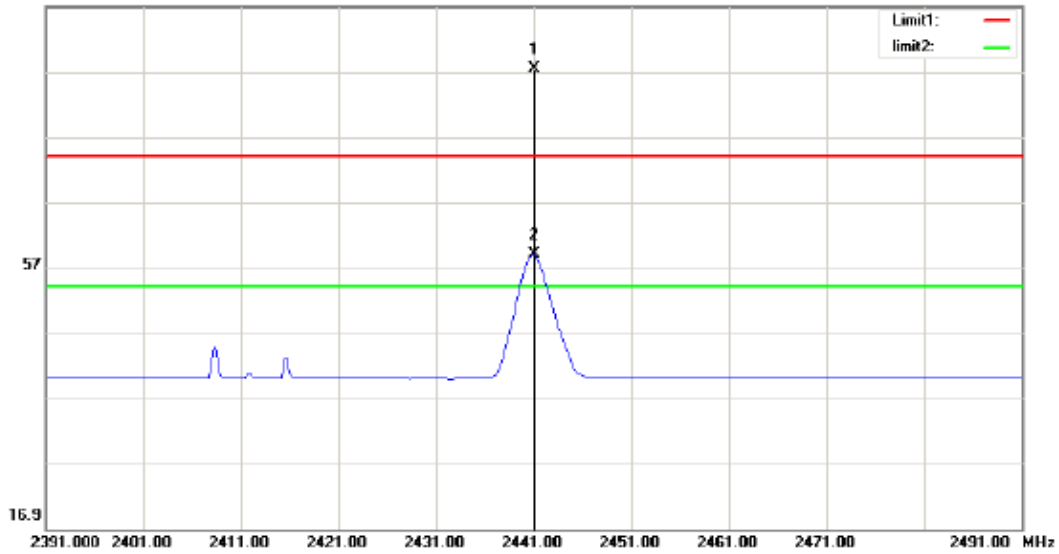

Site :ATT Radiated Emission Chamber 1      Polarization: *Horizontal*      Temperature: 24  
 Limit: FCC PART 15 C 1-26.5G PEAK      Power: AC 120V/60Hz      Humidity: 55 %  
 EUT: BRP AUDIO PORTABLE      Distance: 3m  
 M/N: 278003657  
 Mode: TX  
 Note: 3M 2441

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1	*	2441.000	56.37	30.97	87.34	74.00	13.34	peak		no limit
2	X	2441.000	27.94	30.97	58.91	54.00	4.91	AVG		no limit

### 3M 2441 Vertical

### Radiated Emission Measurement


File :S11805035

Data :#20

Date: 2018-7-7

Time: 10:52:35

96.9 dBuV/m

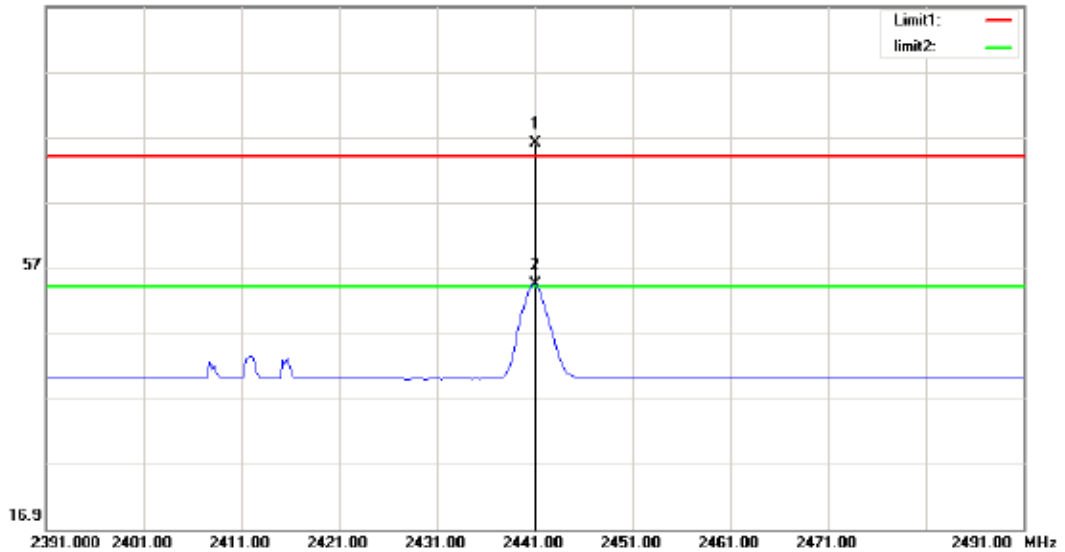

Site :ATT Radiated Emission Chamber 1

Polarization: **Vertical**

Temperature: 24

Limit: FCC PART 15 C 1-26.5G PEAK

Power: AC 120V/60Hz

Humidity: 55 %

EUT: BRP AUDIO PORTABLE

Distance: 3m

M/N: 278003657

Mode: TX

Note: 3M 2441

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB/m	dB	cm	degree	
1	*	2441.000	44.99	30.97	75.96	74.00	1.96	peak		no limit
2	X	2441.000	23.41	30.97	54.38	54.00	0.38	AVG		no limit


### 3M 2402 Vertical Radiated Emission Measurement

File :SI1805035  
96.9 dBuV/m

Data :#21

Date: 2018-7-7

Time: 10:54:44

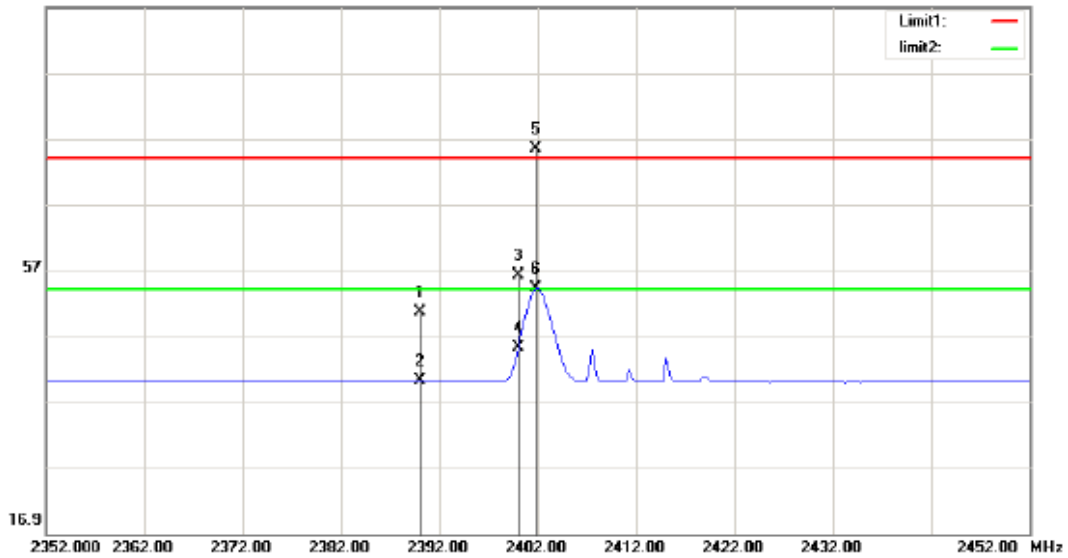

Site :ATT Radiated Emission Chamber 1  
Limit: FCC PART 15 C 1-26.5G PEAK  
EUT: BRP AUDIO PORTABLE  
M/N: 278003657  
Mode: TX  
Note: 3M 2402

Polarization: *Vertical*  
Power: AC 120V/60Hz  
Distance: 3m

Temperature: 24  
Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2390.000	19.67	30.85	50.52	74.00	-23.48	peak			
2		2390.000	9.27	30.85	40.12	54.00	-13.88	AVG			
3		2400.000	25.40	30.87	56.27	74.00	-17.73	peak			
4		2400.000	14.39	30.87	45.26	54.00	-8.74	AVG			
5	*	2401.750	44.55	30.87	75.42	74.00	1.42	peak			no limit
6	X	2401.750	23.33	30.87	54.20	54.00	0.20	AVG			no limit

### 3M 2402 Horizontal

#### Radiated Emission Measurement


File :S11805035

Data :#22

Date: 2018-7-7

Time: 10:57:54

96.9 dBuV/m

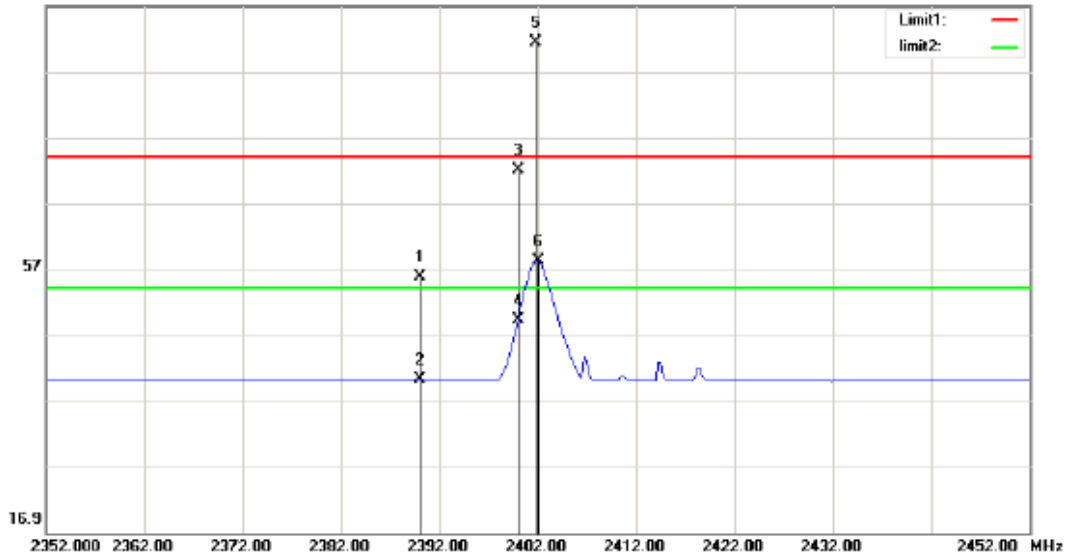

Site :ATT Radiated Emission Chamber 1

Polarization: *Horizontal*

Temperature: 24

Limit: FCC PART 15 C 1-26.5G PEAK

Power: AC 120V/60Hz

Humidity: 55 %

EUT: BRP AUDIO PORTABLE

Distance: 3m

M/N: 278003657

Mode: TX

Note: 3M 2402

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Antenna Height cm	Table Degree degree	Detector	Comment
1		2390.000	25.05	30.85	55.90	74.00	-18.10			peak	
2		2390.000	9.31	30.85	40.16	54.00	-13.84			AVG	
3		2400.000	41.09	30.87	71.96	74.00	-2.04			peak	
4		2400.000	18.43	30.87	49.30	54.00	-4.70			AVG	
5	*	2401.750	60.63	30.87	91.50	74.00	17.50			peak	no limit
6	X	2402.000	27.29	30.87	58.16	54.00	4.16			AVG	no limit

## 9. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### 9.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Due.	Cal. Interval
1	Spectrum analyzer	KEYSIGHT	N9010A	MY55150427	2019/05/25	1 Year
2	Attenuator	Mini-Circuits	BW-S10W2	101109	2018/12/17	1 Year
3	RF Cable	Micable	C10-01-01-1	100309	2018/12/17	1 Year

### 9.2. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 9.3. Test Procedure

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

## 9.4. Test result



### PASS (See below detailed test result.)

Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
1Mbps Non-hopping			
2400	54.18	20	Pass
2483.5	63.99	20	Pass
3Mbps Non-hopping			
2400	55.32	20	Pass
2483.5	63.39	20	Pass



Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
1Mbps hopping			
2400	56.03	20	Pass
2483.5	63.97	20	Pass
3Mbps hopping			
2400	57.22	20	Pass
2483.5	61.27	20	Pass





## GFSK

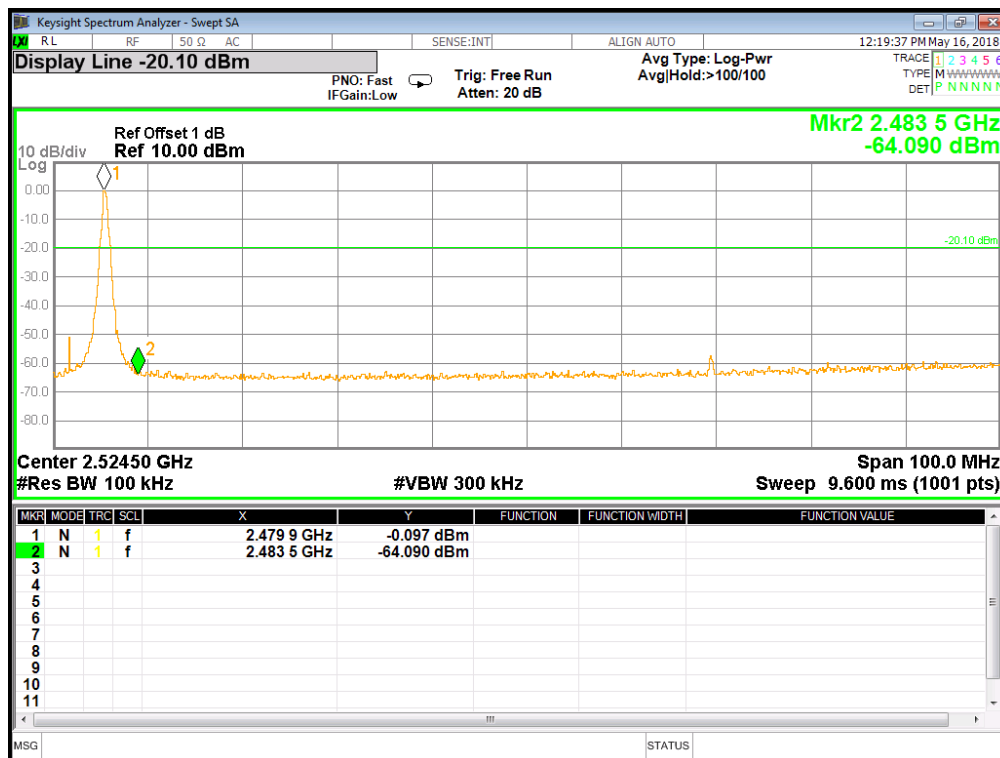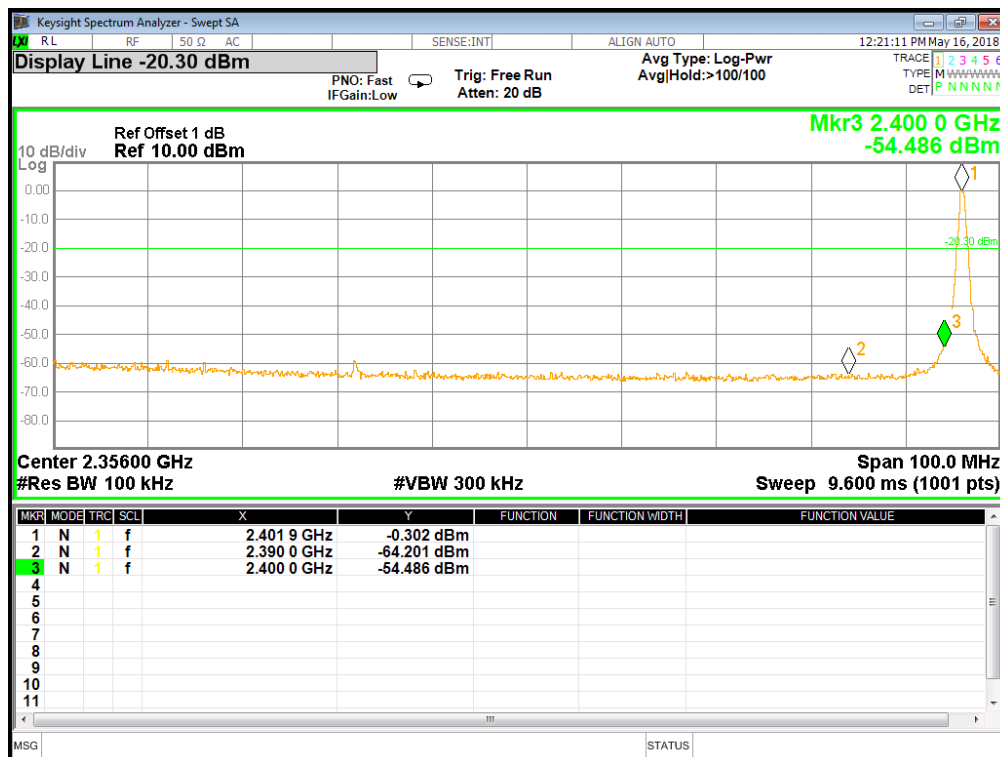



## 8DPSK

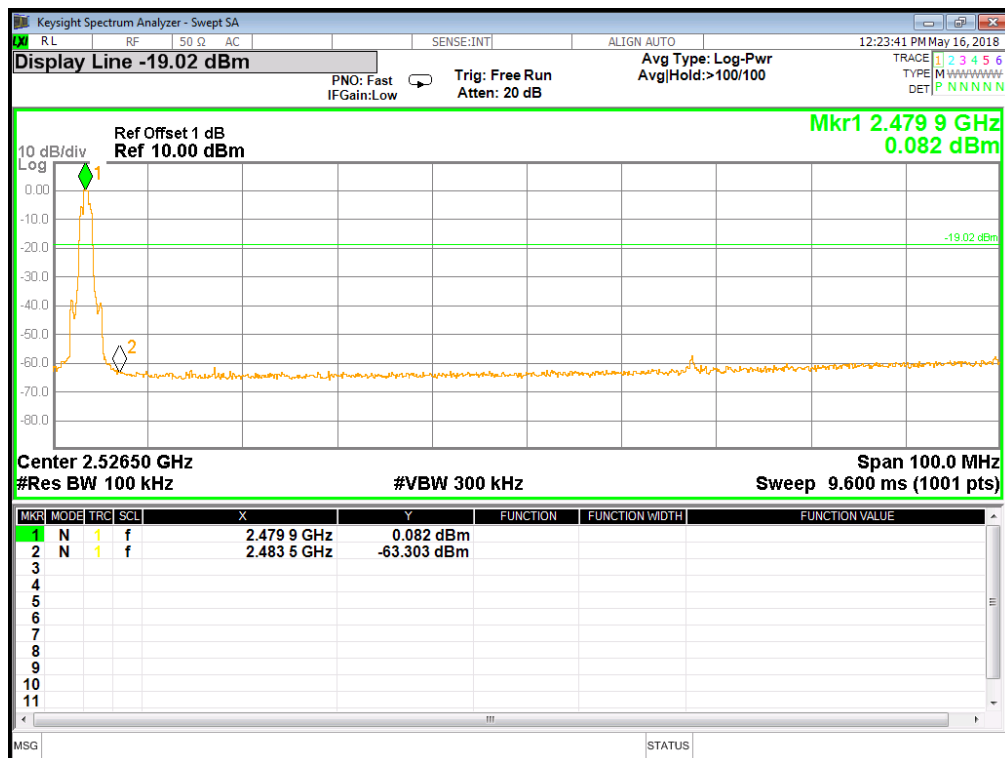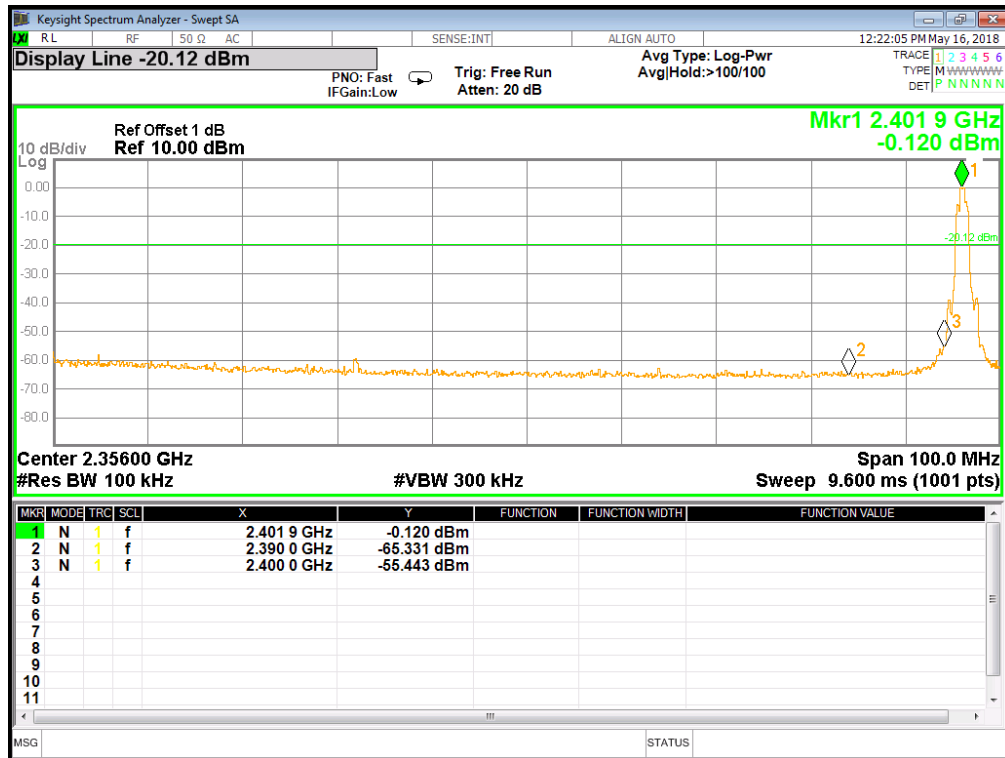

## GFSK HOP

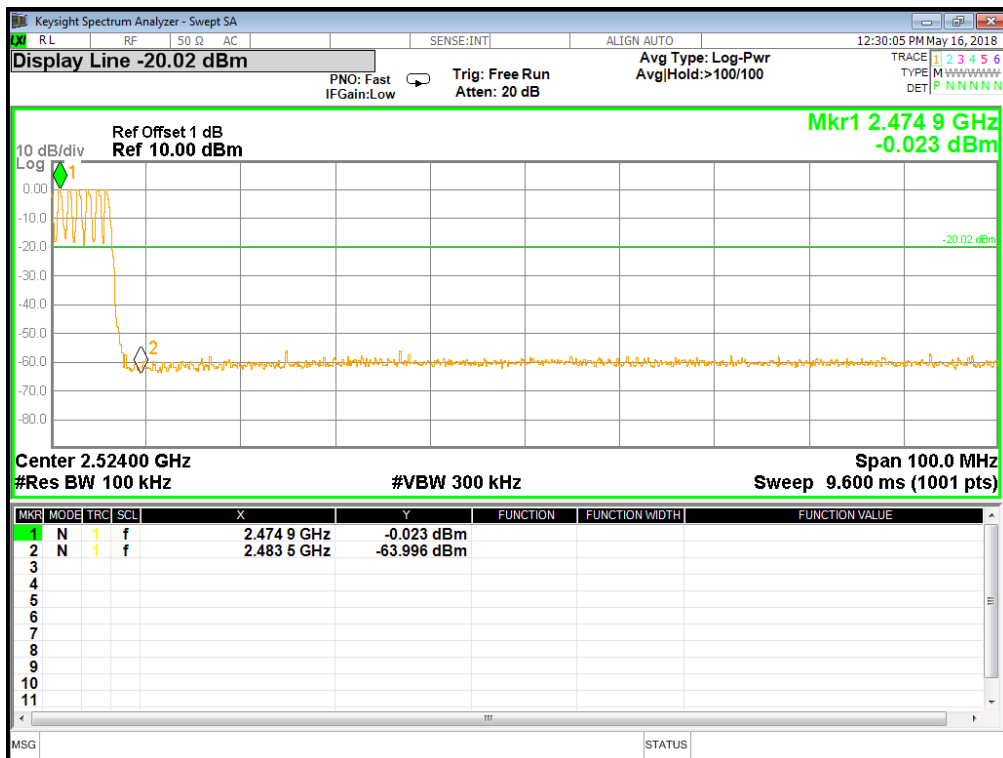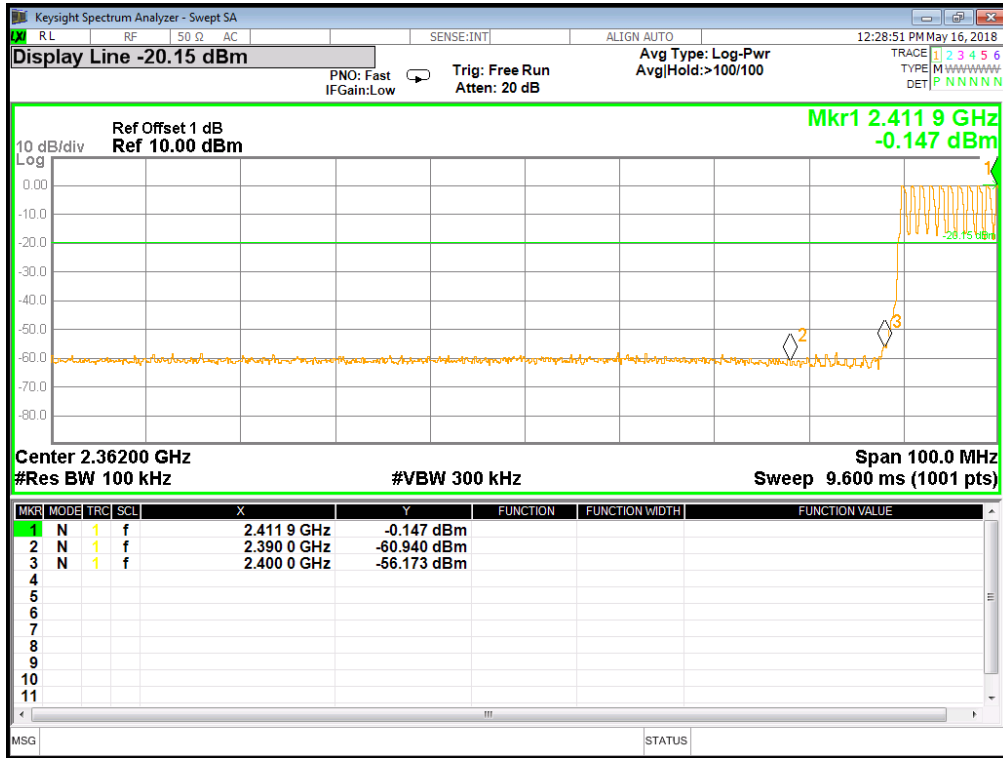

## 8DPSK HOP

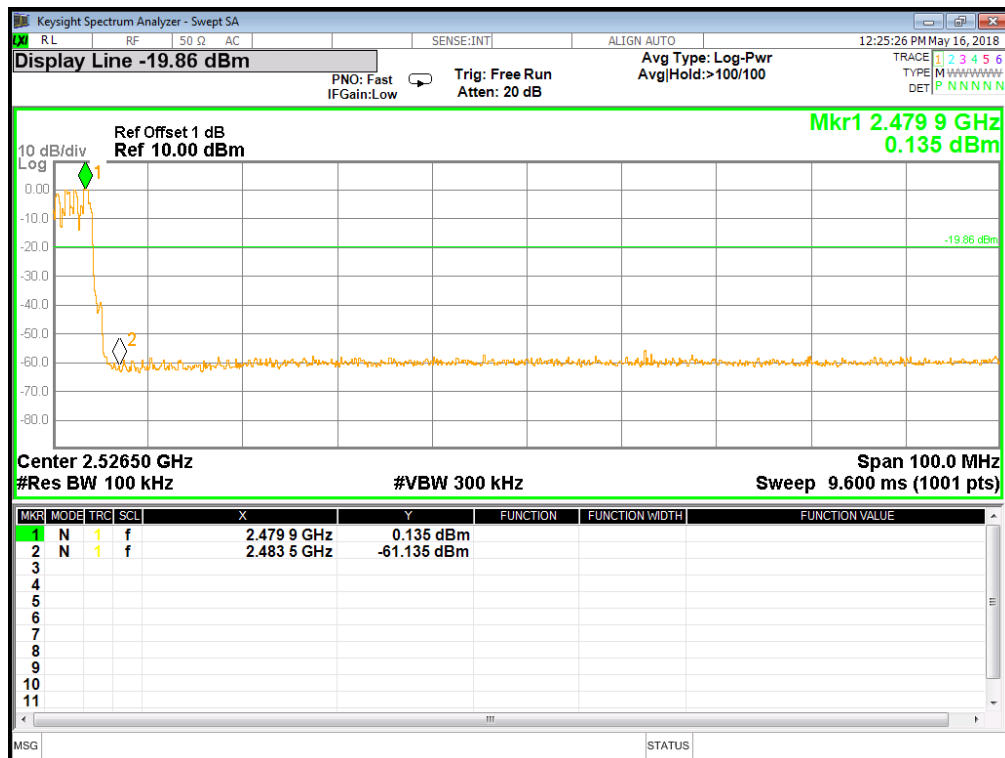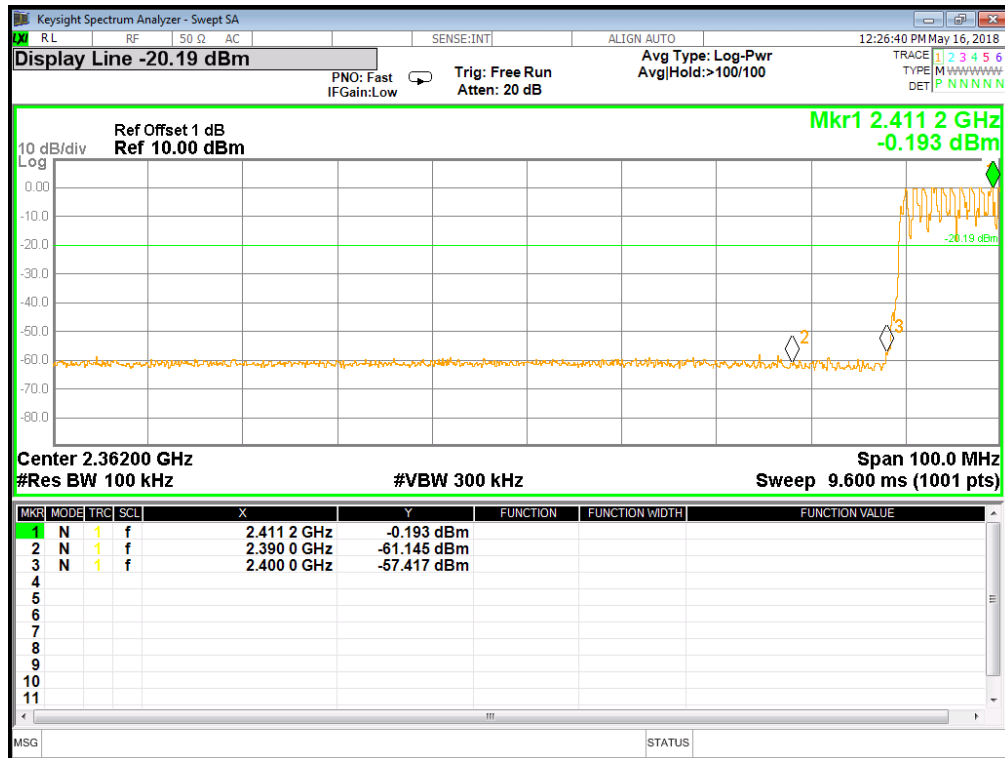


## 10. POWER LINE CONDUCTED EMISSION

### 10.1. Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Pulse Limiter	MTS-systemtechnik	MTS-IMP-136	261115-010-0024	12/17/2018
2	EMI Test Receiver	R&S	ESCI	101308	12/17/2018
3	LISN	AFJ	LS16	16011103219	12/17/2018
4	LISN	Schwarzbeck	NSLK 8127	8127-432	12/17/2018
5	Measurement Software	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A
6	MeasurementSoftware	Farad	EZ-EMC (Ver.ATT-03A)	N/A	N/A

### 10.2. Block diagram of test setup

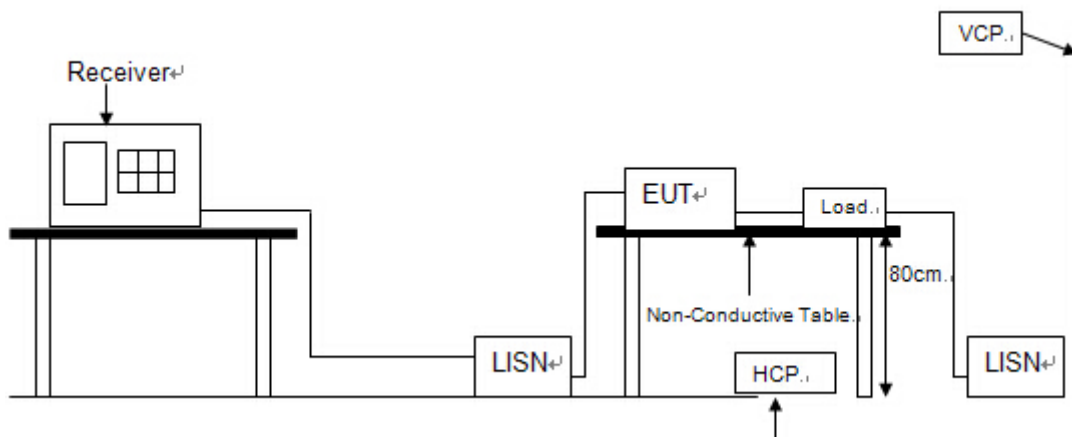

### 10.3. Power Line Conducted Emission Limits(Class B)

Frequency	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

## 10.4. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.4 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 KHz.


## 10.5. Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "-----" means peak detection; "-----" mans average detection

<b>EUT:</b>	<b>BRP AUDIO PORTABLE</b>	<b>Model No.:</b>	<b>278003657</b>
<b>Temperature:</b>	<b>23</b>	<b>Relative Humidity:</b>	<b>52%</b>
		<b>Test Power:</b>	<b>AC 120V/60Hz</b>
<b>Probe:</b>	<b>L1</b>	<b>Test Result:</b>	<b>Pass</b>
<b>Standard:</b>	<b>(CE)FCC PART 15 class B_QP</b>	<b>Test By:</b>	<b>Hale</b>
<b>Test Mode:</b>	<b>BT</b>		
<b>Note:</b>			

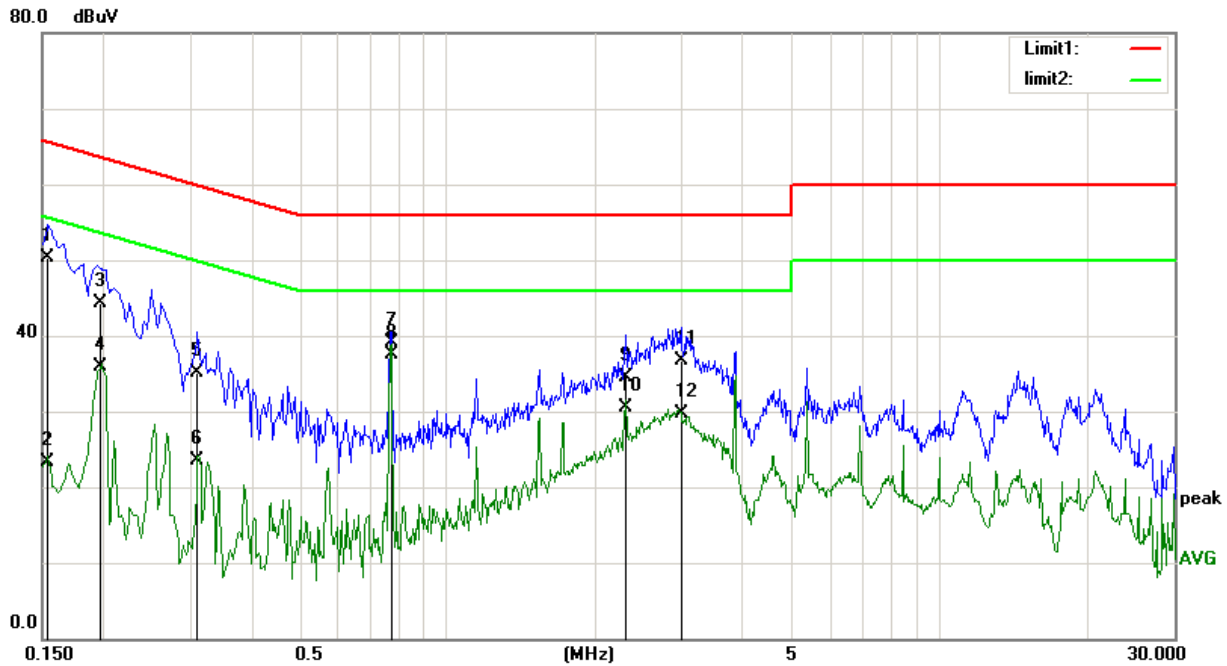


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	38.86	11.44	50.30	65.78	-15.48	QP
2	0.1539	11.94	11.44	23.38	55.78	-32.40	AVG
3	0.1965	33.09	11.15	44.24	63.75	-19.51	QP
4	0.1965	24.80	11.15	35.95	53.75	-17.80	AVG
5	0.3100	24.69	10.43	35.12	59.97	-24.85	QP
6	0.3100	13.10	10.43	23.53	49.97	-26.44	AVG
7	0.7700	29.10	10.10	39.20	56.00	-16.80	QP
8	0.7700	27.38	10.10	37.48	46.00	-8.52	AVG
9	2.3060	24.48	10.12	34.60	56.00	-21.40	QP
10	2.3060	20.42	10.12	30.54	46.00	-15.46	AVG
11	2.9820	26.47	10.14	36.61	56.00	-19.39	QP
12	2.9820	19.55	10.14	29.69	46.00	-16.31	AVG

The test result is calculated as the following:

- (1) Result = Reading + Correct Factor
- (2) Correct Factor = (LISN, ISN, PLC or Current Probe) Factor + Cable Loss +Attenuator
- (3) Margin = Result - Limit

<b>EUT:</b>	<b>BRP AUDIO PORTABLE</b>	<b>Model No.:</b>	<b>278003657</b>
<b>Temperature:</b>	<b>23</b>	<b>Relative Humidity:</b>	<b>52%</b>
		<b>Test Power:</b>	<b>AC 120V/60Hz</b>
<b>Probe:</b>	<b>N</b>	<b>Test Result:</b>	<b>Pass</b>
<b>Standard:</b>	<b>(CE)FCC PART 15 class B_QP</b>	<b>Test By:</b>	<b>Hale</b>
<b>Test Mode:</b>	<b>BT</b>		
<b>Note:</b>			

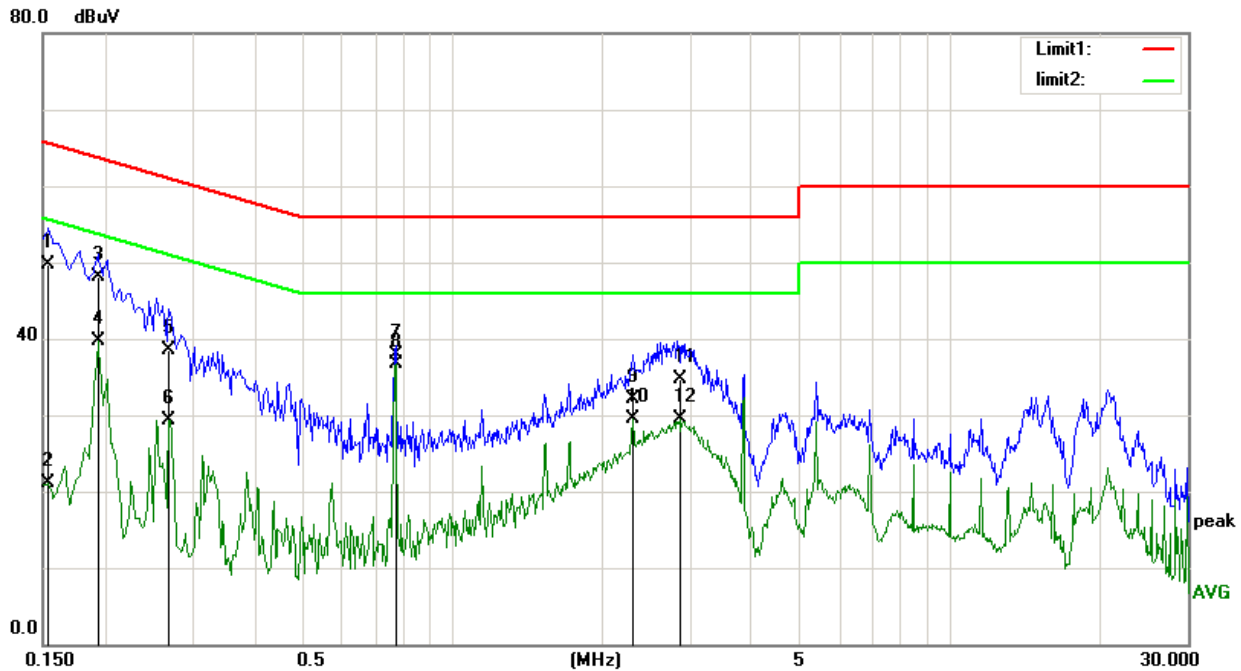

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	38.25	11.44	49.69	65.78	-16.09	QP
2	0.1539	9.60	11.44	21.04	55.78	-34.74	AVG
3	0.1940	36.85	11.17	48.02	63.86	-15.84	QP
4	0.1940	28.62	11.17	39.79	53.86	-14.07	AVG
5	0.2700	27.84	10.64	38.48	61.12	-22.64	QP
6	0.2700	18.73	10.64	29.37	51.12	-21.75	AVG
7	0.7700	27.74	10.10	37.84	56.00	-18.16	QP
8	0.7700	26.61	10.10	36.71	46.00	-9.29	AVG
9	2.3020	22.03	10.12	32.15	56.00	-23.85	QP
10	2.3020	19.36	10.12	29.48	46.00	-16.52	AVG
11	2.8660	24.53	10.14	34.67	56.00	-21.33	QP
12	2.8660	19.34	10.14	29.48	46.00	-16.52	AVG

The test result is calculated as the following:

- (1) Result = Reading + Correct Factor
- (2) Correct Factor = (LISN, ISN, PLC or Current Probe) Factor + Cable Loss + Attenuator
- (3) Margin = Result - Limit



## **11. ANTENNA REQUIREMENTS**

### **11.1. Limit**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **11.2. EUT ANTENNA**

The EUT antenna is permanent attached antenna. It comply with the standard requirement.

**END OF REPORT**