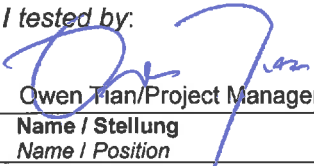



<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	<b>17043527 001</b>	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	<b>164021717</b>	<b>Seite 1 von 165</b> <i>Page 1 of 165</i>	
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	<b>N/A</b>	<b>Auftragsdatum:</b> <i>Order date:</i>	<b>17.09.2014</b>		
<b>Auftraggeber:</b> <i>Client:</i>	<b>Shenzhen Zowee Technology Co., Ltd., Science &amp; Technology Industrial Park of Privately Owned Enterprises, Pingshan, Xili, Nanshan District, Shenzhen, China</b>				
<b>Prüfgegenstand:</b> <i>Test item:</i>	<b>Tablet PC</b>				
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	<b>UB-15MS10, UB-15MS101, UB-15MS10SA, M1045, NS-15MS08, NS-15MS081, M8011</b>				
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	<b>FCC/IC Certification</b>				
<b>Prüfgrundlage:</b> <i>Test specification:</i>	<b>CFR47 FCC Part 15: Subpart C Section 15.247 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 RSS-210 Issue 8 December 2010 RSS-Gen Issue 3 December 2010</b>				
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	<b>08.10.2014</b>				
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	<b>1401911, 1401912, 1401913, 1401914, 1401915</b>				
<b>Prüfzeitraum:</b> <i>Testing period:</i>	<b>10.10.2014 - 18.10.2014</b>				
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	<b>Accurate Technology Co., Ltd.</b>				
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	<b>TÜV Rheinland (Shenzhen) Co., Ltd.</b>				
<b>Prüfergebnis*:</b> <i>Test result*:</i>	<b>Pass</b>				
<b>geprüft von / tested by:</b>			<b>kontrolliert von / reviewed by:</b>		
<b>29.10.2014</b>	<b>Owen Tian/Project Manager</b>		<b>29.10.2014</b>	<b>Sam Lin/Technical Certifier</b>	
<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b>	<b>this test report is for evaluation of Bluetooth function only.</b>				
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>	<b>Prüfmuster vollständig und unbeschädigt</b> <i>Test item complete and undamaged</i>				
<b>* Legende:</b>	<b>1 = sehr gut</b>	<b>2 = gut</b>	<b>3 = befriedigend</b>	<b>4 = ausreichend</b>	<b>5 = mangelhaft</b>
<b>Legend:</b>	<b>1 = very good</b>	<b>2 = good</b>	<b>3 = satisfactory</b>	<b>4 = sufficient</b>	<b>5 = poor</b>
	<b>P(ass) = entspricht o.g. Prüfgrundlage(n)</b>	<b>F(ail) = entspricht nicht o.g. Prüfgrundlage(n)</b>	<b>N/A = nicht anwendbar</b>	<b>N/T = nicht getestet</b>	
	<b>P(ass) = passed a.m. test specification(s)</b>	<b>F(ail) = failed a.m. test specification(s)</b>	<b>N/A = not applicable</b>	<b>N/T = not tested</b>	
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> <i>This test report only relates to the a. m. test sample. Without permission of the test center this report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

VD4

## TEST SUMMARY

**5.1.1 ANTENNA REQUIREMENT***RESULT: Pass***5.1.2 PEAK OUTPUT POWER***RESULT: Pass***5.1.3 20dB BANDWIDTH AND 99% BANDWIDTH***RESULT: Pass***5.1.4 6dB BANDWIDTH AND 99% BANDWIDTH***RESULT: Pass***5.1.5 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100KHZ BANDWIDTH***RESULT: Pass***5.1.6 POWER SPECTRAL DENSITY***RESULT: Pass***5.1.7 SPURIOUS EMISSION***RESULT: Pass***5.1.8 FREQUENCY SEPARATION***RESULT: Pass***5.1.9 NUMBER OF HOPPING FREQUENCY***RESULT: Pass***5.1.10 TIME OF OCCUPANCY***RESULT: Pass***5.1.11 CONDUCTED EMISSIONS***RESULT: Pass*

## Contents

<b>1.</b>	<b>GENERAL REMARKS .....</b>	<b>4</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>4</b>
<b>2.</b>	<b>TEST SITES .....</b>	<b>4</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>4</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>	<b>5</b>
<b>2.3</b>	<b>TRACEABILITY .....</b>	<b>5</b>
<b>2.4</b>	<b>CALIBRATION .....</b>	<b>5</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>6</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA.....</b>	<b>6</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>6</b>
<b>3.</b>	<b>GENERAL PRODUCT INFORMATION .....</b>	<b>7</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>7</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>7</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>10</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b>	<b>10</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS .....</b>	<b>10</b>
<b>4.</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>11</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION.....</b>	<b>11</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE .....</b>	<b>11</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>11</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>11</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM .....</b>	<b>12</b>
<b>5.</b>	<b>TEST RESULTS .....</b>	<b>14</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>14</b>
5.1.1	<i>Antenna Requirement .....</i>	<i>14</i>
5.1.2	<i>Peak Output Power .....</i>	<i>15</i>
5.1.3	<i>20dB Bandwidth and 99% Bandwidth .....</i>	<i>16</i>
5.1.4	<i>6dB Bandwidth and 99% Bandwidth .....</i>	<i>17</i>
5.1.5	<i>Conducted Spurious Emissions measured in 100kHz Bandwidth .....</i>	<i>18</i>
5.1.6	<i>Power spectral density .....</i>	<i>28</i>
5.1.7	<i>Spurious Emission .....</i>	<i>29</i>
5.1.8	<i>Frequency Separation.....</i>	<i>154</i>
5.1.9	<i>Number of hopping frequency.....</i>	<i>155</i>
5.1.10	<i>Time of Occupancy.....</i>	<i>156</i>
5.1.11	<i>Conducted emissions .....</i>	<i>157</i>
<b>6.</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP .....</b>	<b>162</b>
<b>7.</b>	<b>LIST OF TABLES .....</b>	<b>165</b>
<b>8.</b>	<b>LIST OF PHOTOGRAPHS .....</b>	<b>165</b>

## 1. General Remarks

### 1.1 Complementary Materials

None.

## 2. Test Sites

### 2.1 Test Facilities

Accurate Technology Co., Ltd.

**(FCC Registration No.: 752051)**

**(Test site Industry Canada No.: 5077A-2)**

F1, Bldg. A, Changyuan New Material Port  
Keyuan Rd., Science & Industry Park, Nanshan  
Shenzhen, P.R. China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
<b>Transmitter spurious emissions &amp; Receiver spurious emissions</b>				
Spectrum Analyzer	Agilent	E7405A	MY45115511	2015-01-11
Test Receiver	Rohde&Schwarz	ESCS30	100307	2015-01-11
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	2015-01-11
Loop Antenna	Schwarzbeck	FMZB1516	1516131	2015-01-11
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	2015-01-11
50 Coaxial Switch	Anritsu Corp	MP59B	6200506474	2015-01-11
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	2015-01-11
Temp. & Humid. Chamber	Gongwen	HSD-500	0109	2015-01-11
<b>Radio Spectrum Test</b>				
EMI Test Receiver	Rohde&Schwarz	ESPI-3	100396/003	2015-01-11
Spectrum Analyzer	Rohde & Schwarz	FSV40	101495	2015-06-11
Temp. & Humid. Chamber	Gongwen	HSD-500	0109	2015-01-11
<b>Conducted Emission</b>				
Test Receiver	Rohde&Schwarz	ESCS30	100307	2015-01-11
L.I.S.N.	Schwarzbeck	NLSK8126	8126431	2015-01-11
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100815	2015-01-11
50Ω Coaxial Switch	Anritsu Corp	MP59B	6200283933	2015-01-11

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

**Table 2: Measurement Uncertainty**

Parameter	Uncertainty
Radio Spectrum	< ± 0.60 dB
Radiated emission of transmitter, valid up to 26.5 GHz	< ± 4.42 dB
Conducted Emission	< ± 2.23 dB
Radiated Emission	< ± 4.42 dB

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

Accurate Technology Co., Ltd. test facility located at F1, Bldg. A, Changyuan New Material Port Keyuan Rd., Science & Industry Park, Nanshan, Shenzhen, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUTs are tablet with Wi-Fi, Bluetooth & GPS function.

The models UB-15MS10, UB-15MS101, UB-15MS10SA & M1045 are identical except the model name; the models NS-15MS08, NS-15MS081 & M8011 are identical except the model name.

The models UB-15MS10 & NS-15MS08 have the same circuit, PCB layout and RF module, only some functions are different.

The differences between UB-15MS10 and NS-15MS08:

Model	PCBA	Function	Screen	DDR	EMMC	Antenna
UB-15MS10	With GPS board & POPO-Pin for keyboard	With light sensor, GPS & compass	10.1"	2G	Internal 32G	With GPS antenna
NS-15MS08	Without	Without	8"	1G	Internal 16G + external 16G	Without GPS antenna, the position of Wi-Fi antenna is different

For details refer to the User Manual and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 3: Technical Specification of Bluetooth (BDR & EDR mode)**

Technical Specification	Value
Kind of Equipment	Tablet PC
Type Designation	UB-15MS10, UB-15MS101, UB-15MS10SA, M1045, NS-15MS08, NS-15MS081, M8011
FCC ID	2AAP6UB15MS10
Operating Frequency band	2402 – 2480MHz
Channel separation	1MHz
Extreme Temperature Range	-30~+75°C
Operation Voltage	DC 3.7V (via built in battery)
	DC 5V (via AC/DC adapter)
Modulation	FHSS, GFSK, 8DPSK, $\pi/4$ DQPSK
Bluetooth version	4.0, Dual Mode
Antenna Gain	1dBi

**Table 4: RF channel and frequency of Bluetooth (BDR & EDR mode)**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	21	2423.00	42	2444.00	63	2465.00
1	2403.00	22	2424.00	43	2445.00	64	2466.00
2	2404.00	23	2425.00	44	2446.00	65	2467.00

3	2405.00	24	2426.00	45	2447.00	66	2468.00
4	2406.00	25	2427.00	46	2448.00	67	2469.00
5	2407.00	26	2428.00	47	2449.00	68	2470.00
6	2408.00	27	2429.00	48	2450.00	69	2471.00
7	2409.00	28	2430.00	49	2451.00	70	2472.00
8	2410.00	29	2431.00	50	2452.00	71	2473.00
9	2411.00	30	2432.00	51	2453.00	72	2474.00
10	2412.00	31	2433.00	52	2454.00	73	2475.00
11	2413.00	32	2434.00	53	2455.00	74	2476.00
12	2414.00	33	2435.00	54	2456.00	75	2477.00
13	2415.00	34	2436.00	55	2457.00	76	2478.00
14	2416.00	35	2437.00	56	2458.00	77	2479.00
15	2417.00	36	2438.00	57	2459.00	78	2480.00
16	2418.00	37	2439.00	58	2460.00		
17	2419.00	38	2440.00	59	2461.00		
18	2420.00	39	2441.00	60	2462.00		
19	2421.00	40	2442.00	61	2463.00		
20	2422.00	41	2443.00	62	2464.00		

**Table 5: Technical Specification of Bluetooth (LE mode)**

Technical Specification	Value
Kind of Equipment	Tablet PC
Type Designation	UB-15MS10, UB-15MS101, UB-15MS10SA, M1045, NS-15MS08, NS-15MS081, M8011
FCC ID	2AAP6UB15MS10
Operating Frequency band	2402 – 2480MHz
Channel separation	2MHz
Extreme Temperature Range	-30~+75°C
Operation Voltage	DC 3.7V (via built in battery) DC 5V (via AC/DC adapter)
Modulation	GFSK
Bluetooth version	4.0, Dual Mode
Antenna Gain	1dBi

**Table 6: RF channel and frequency of Bluetooth (LE mode)**

RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
0	2402.00	11	2424.00	22	2446.00	33	2468.00
1	2404.00	12	2426.00	23	2448.00	34	2470.00
2	2406.00	13	2428.00	24	2450.00	35	2472.00
3	2408.00	14	2430.00	25	2452.00	36	2474.00
4	2410.00	15	2432.00	26	2454.00	37	2476.00
5	2412.00	16	2434.00	27	2456.00	38	2478.00
6	2414.00	17	2436.00	28	2458.00	39	2480.00
7	2416.00	18	2438.00	29	2460.00		



**Produkte***Products***Prüfbericht - Nr.: 17043527 001***Test Report No.***Seite 9 von 165***Page 9 of 165*

8	2418.00	19	2440.00	30	2462.00	
9	2420.00	20	2442.00	31	2464.00	
10	2422.00	21	2444.00	32	2466.00	

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On
  - 1. Bluetooth mode (BDR & EDR mode)
    - a. Transmitting
      - i. Low Channel
      - ii. Middle Channel
      - iii. High Channel
    - b. Receiving
  - 2. Bluetooth mode (LE mode)
    - a. Transmitting
      - i. Low Channel
      - ii. Middle Channel
      - iii. High Channel
    - b. Receiving
- B. Standby
- C. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

### 3.5 Submitted Documents

- Bill of Material
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.4: 2003.

According to clause 3.1, the tests 'Spurious Emission' & 'Conducted Emission' were applied on model UB-15MS10 & NS-15MS08, other tests were applied on model UB-15MS10.

### 4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

Description	Manufacturer	Part No.	S/N	Rating
Notebook PC	Lenovo	4290-RT8	R9-FW93G	N/A
Switching Power Adaptor	Shenzhen Frecom Electronics Co., Ltd.	F12L6-050200SPAU L.P.S.	N/A	Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5V, 2.4A

The EUT was tested with following cables:

Interface(s)/Port(s):	Max. cable length, shielding	Cable classification
AC Mains of adapter	2 cores, non-shielded port, 3m	AC Power Input
Micro USB port	4 cores, non-shielded port, 3m	DC Power Input

### 4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

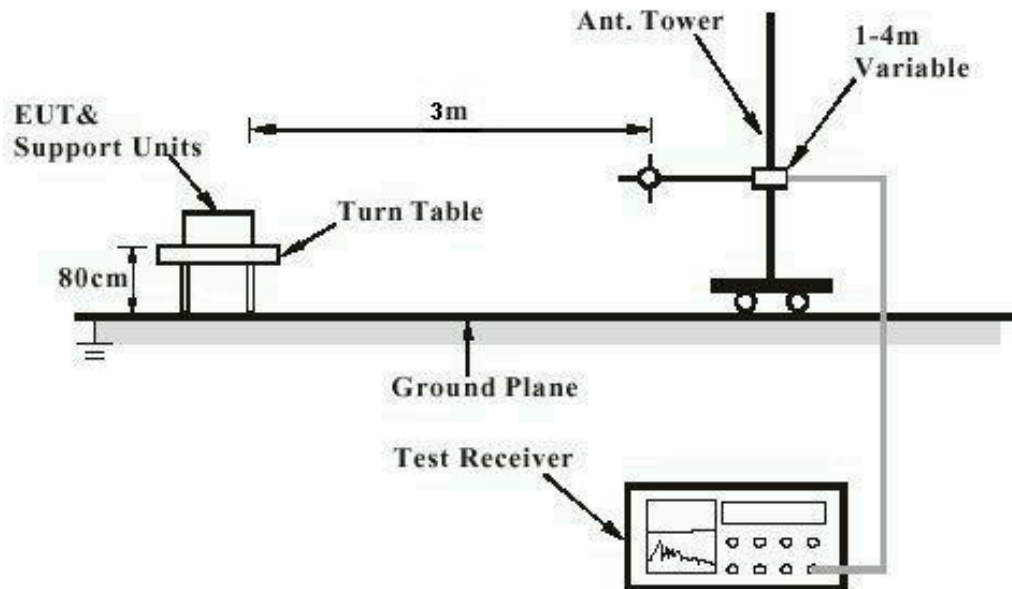
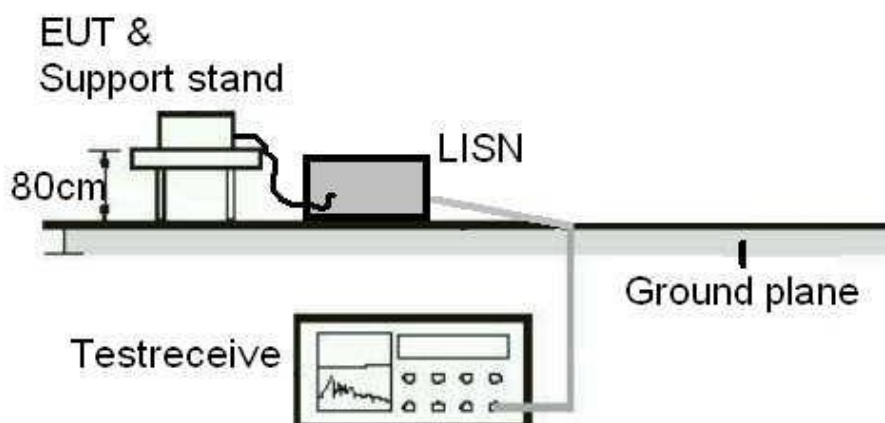
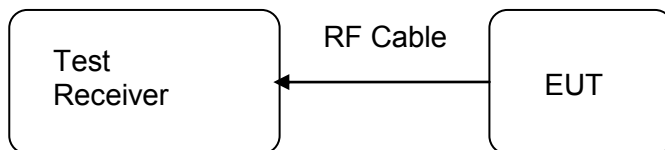


Diagram of Measurement Equipment Configuration for Conduction Measurement



**Diagram of Measurement Equipment Configuration for Transmitter Measurement**

## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:****Pass**

Test standard : FCC Part 15.247(b)(4) and Part 15.203  
RSS-Gen 7.1.4  
Limit The use of antennas with directional gains that do not exceed 6dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 1dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

## 5.1.2 Peak Output Power

**RESULT:**
**Pass**

Test date : 2014-10-10  
 Test standard : FCC Part 15.247(b)(1)  
 FCC Part 15.247(b)(3)  
 RSS-210 A8.4(2)  
 RSS-210 A8.4(4)  
 Basic standard : ANSI C63.4: 2003  
 Clause 9.1 of KDB 558074 v03r01  
 Limit : 125mW, 1W  
 Kind of test site : Shielded room

**Test setup**

Test Channel : Low/ Middle/ High  
 Operation Mode : A.1.a, A.2.a  
 Ambient temperature : 25°C  
 Relative humidity : 52%  
 Atmospheric pressure : 101kPa

**Table 7: Test result of Peak Output Power of Buletooth (BDR mode)**

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2402	2.94	21
Middle Channel	2441	2.83	21
High Channel	2480	2.18	21

**Table 8: Test result of Peak Output Power of Bluetooth (EDR mode)**

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2402	5.62	21
Middle Channel	2441	5.95	21
High Channel	2480	5.78	21

**Table 9: Test result of Peak Output Power of Bluetooth (LE mode)**

Channel	Channel Frequency (MHz)	Peak Output Power	Limit
		(dBm)	(dBm)
Low Channel	2402	3.10	30
Middle Channel	2440	2.83	30
High Channel	2480	2.22	30

### 5.1.3 20dB Bandwidth and 99% Bandwidth

**RESULT:****Pass**

Date of testing : 2014-10-10  
Test standard : FCC Part 15.247(a)(1)  
RSS-210 A8.1(a)  
Basic standard : ANSI C63.4: 2003  
Clause 8 of KDB 558074 v03r01  
Kind of test site : Shielded room

**Test setup**

Test Channel : Low/ Middle/ High  
Operation Mode : A.1.a  
Ambient temperature : 25°C  
Relative humidity : 52%  
Atmospheric pressure : 101kPa

**Table 10: Test result of 20dB & 99% Bandwidth of BDR mode**

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.025	0.968
Mid Channel	2441	1.025	0.968
High Channel	2480	1.025	0.968

**Table 11: Test result of 20dB & 99% Bandwidth of EDR mode**

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	2402	1.303	1.229
Mid Channel	2441	1.298	1.229
High Channel	2480	1.303	1.229



**Prüfbericht - Nr.: 17043527 001**  
Test Report No.Seite 17 von 165  
Page 17 of 165**5.1.4 6dB Bandwidth and 99% Bandwidth****RESULT:****Pass**

Date of testing : 2014-10-10  
Test standard : FCC Part 15.247(a)(2)  
RSS-210 A8.2(a)  
Basic standard : ANSI C63.4: 2003  
Clause 8 of KDB 558074 v03r01  
Kind of test site : Shielded room

**Test setup**

Test Channel : Low/ Middle/ High  
Operation Mode : A.2.a  
Ambient temperature : 25°C  
Relative humidity : 52%  
Atmospheric pressure : 101kPa

**Table 12: Test result of 6dB & 99% Bandwidth of Bluetooth, LE mode**

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	2402	0.742	1.072
Mid Channel	2440	0.742	1.077
High Channel	2480	0.742	1.077

**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.***Seite 18 von 165**  
*Page 18 of 165***5.1.5 Conducted Spurious Emissions measured in 100kHz Bandwidth****RESULT:****Pass**


Date of testing : 2014-10-10  
Test standard : FCC part 15.247(d)  
RSS-210 A8.5  
Basic standard : ANSI C63.4: 2003  
Limit : 20dB (below that in the 100kHz bandwidth within  
the band that contains the highest level of the  
desired power);  
Kind of test site : Shield room

**Test setup**

Test Channel : Low/ Middle/ High  
Operation mode : A.1.a, A.2.a  
Ambient temperature : 25°C  
Relative humidity : 52%  
Atmospheric pressure : 101kPa


For details refer to following test plot.

### Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of BDR mode Low Channel

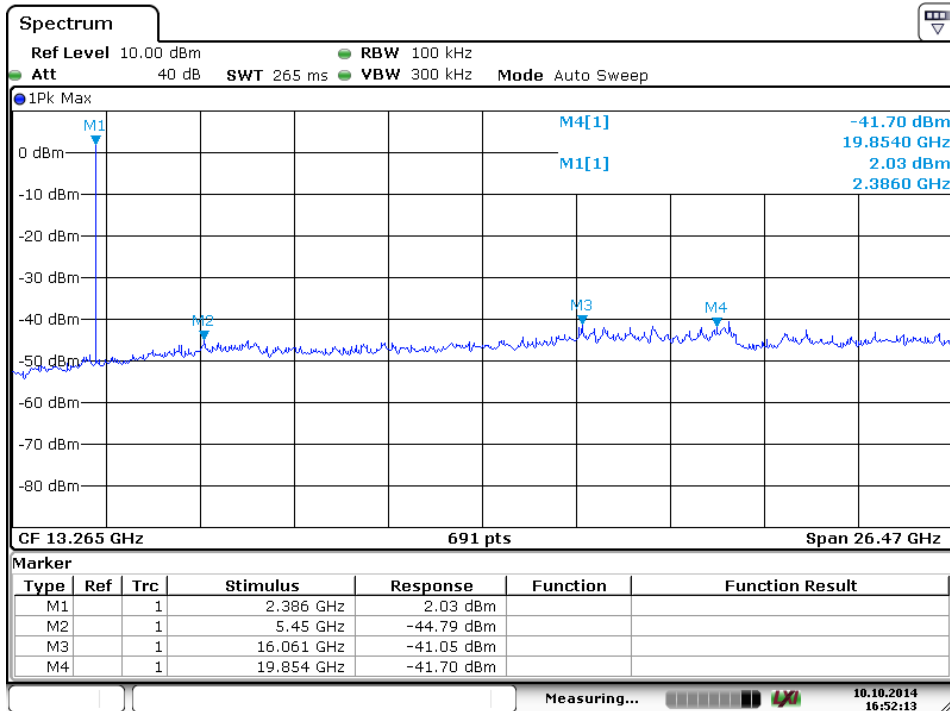


Date: 10.OCT.2014 16:52:12


### Middle Channel

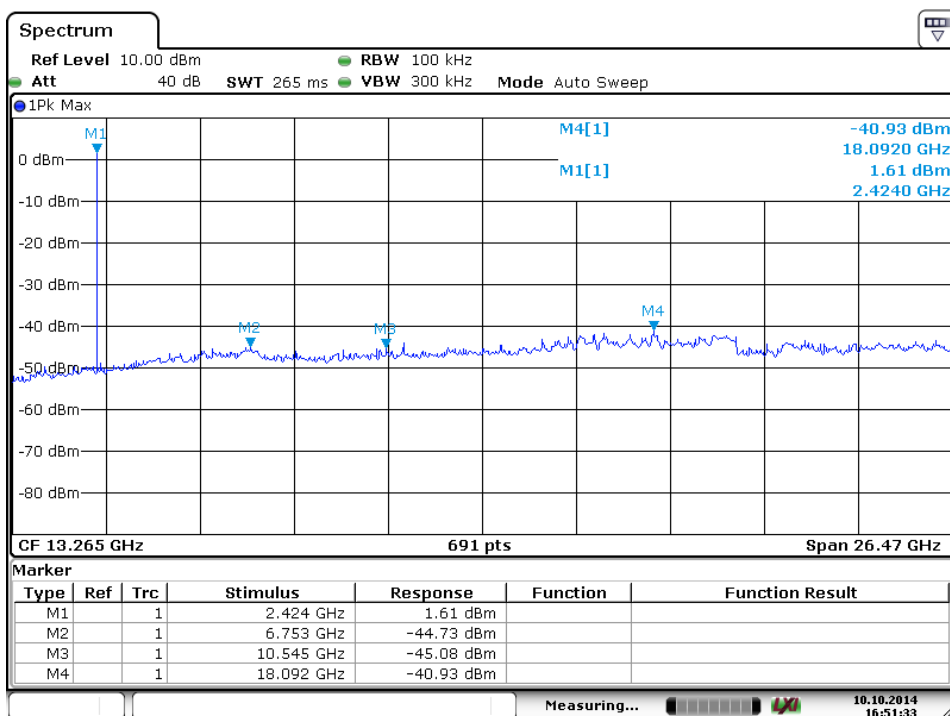


Date: 10.OCT.2014 16:51:33

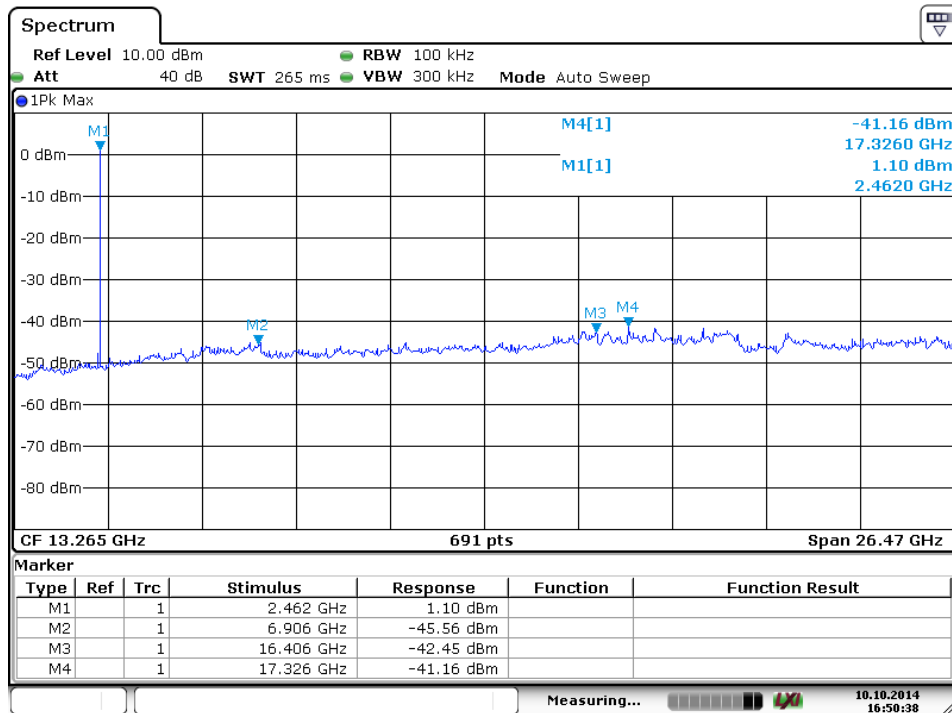**High Channel**


Date: 10.OCT.2014 16:50:38

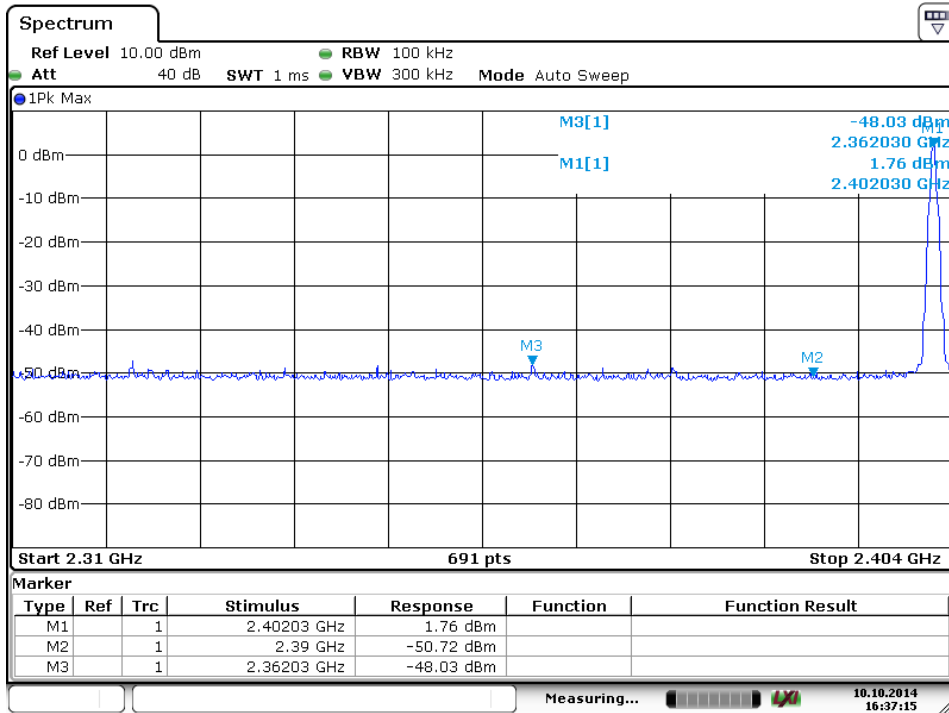**Band Edge**


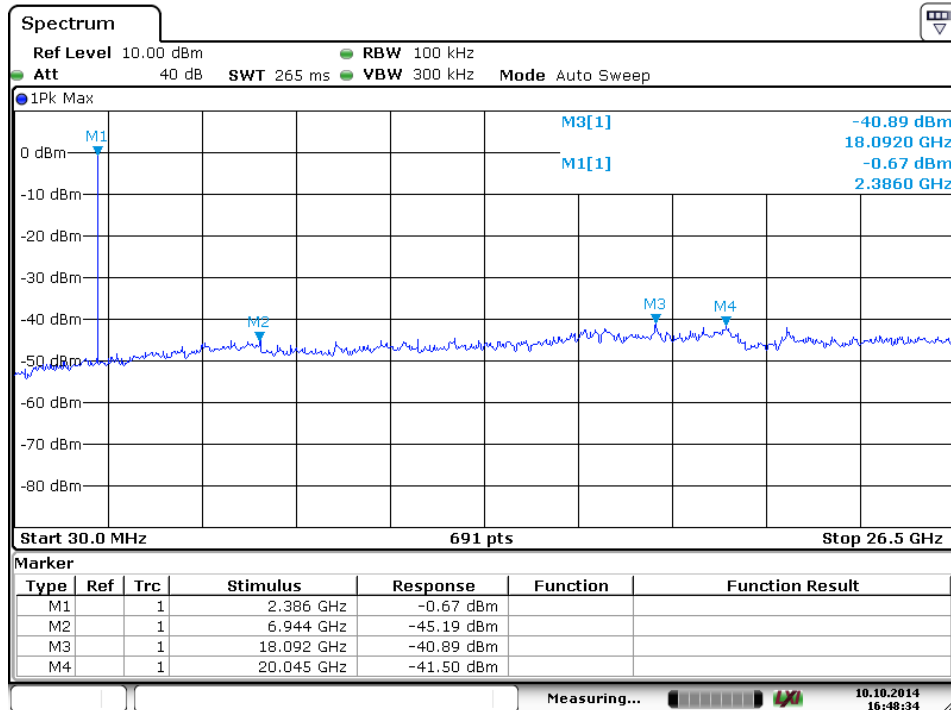
Date: 10.OCT.2014 16:37:14

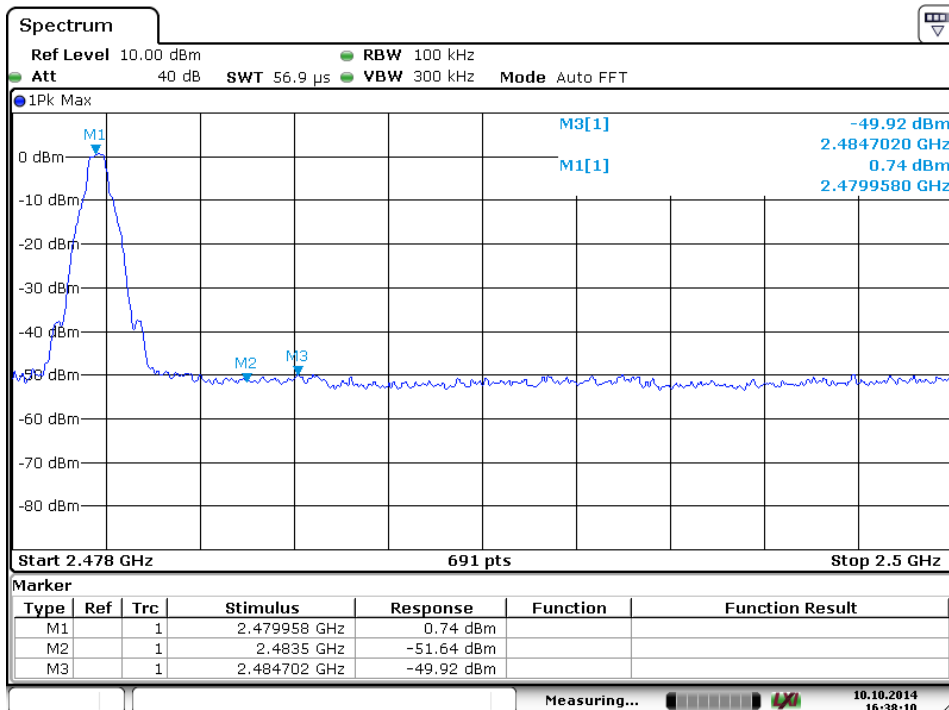

Date: 10.OCT.2014 16:38:10


## Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of EDR mode

### Low Channel




Date: 10.OCT.2014 16:48:33


### Middle Channel

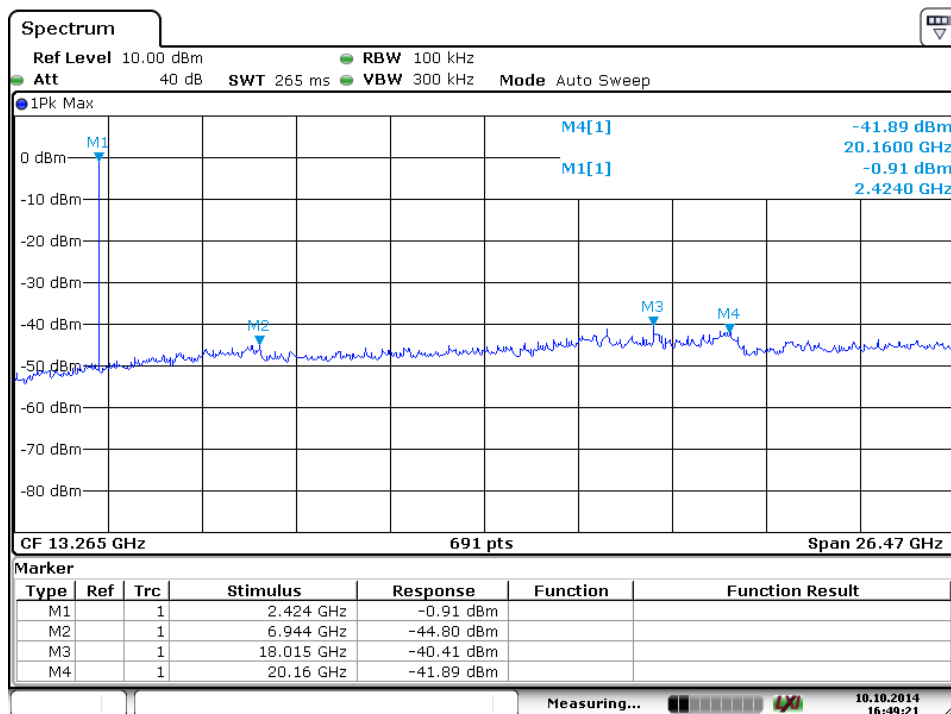


Date: 10.OCT.2014 16:49:21

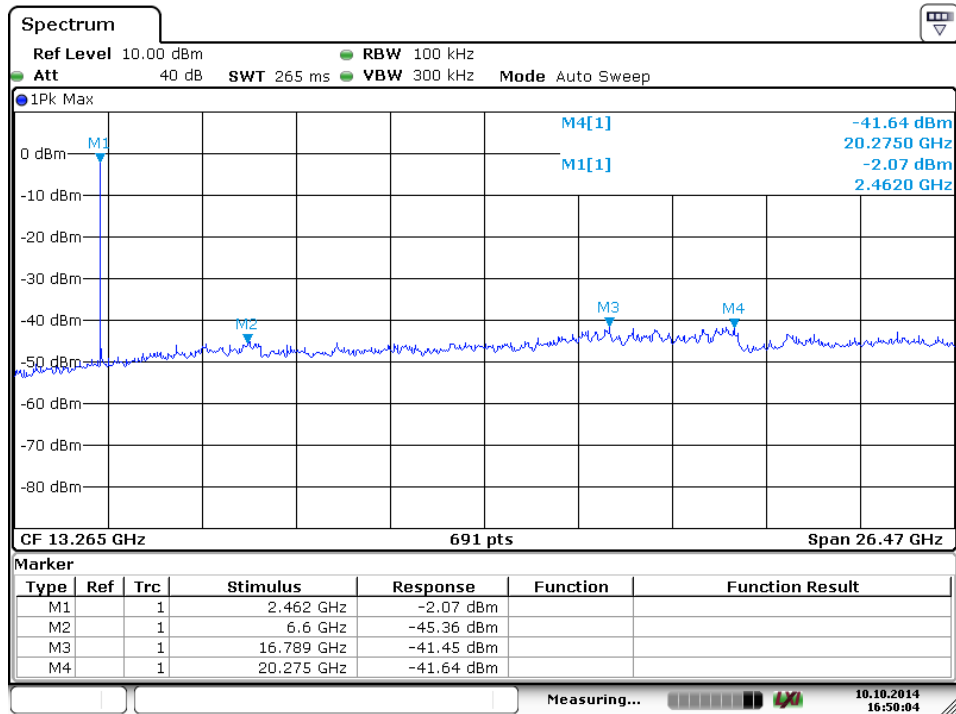**High Channel**


Date: 10.OCT.2014 16:50:04

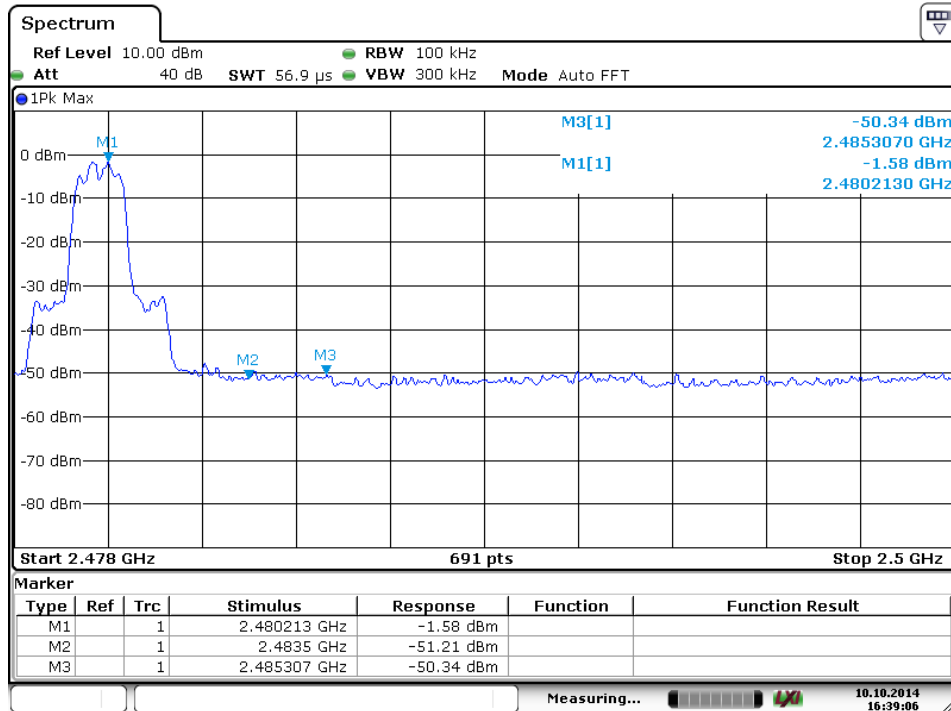**Band Edge**


Date: 10.OCT.2014 16:39:06

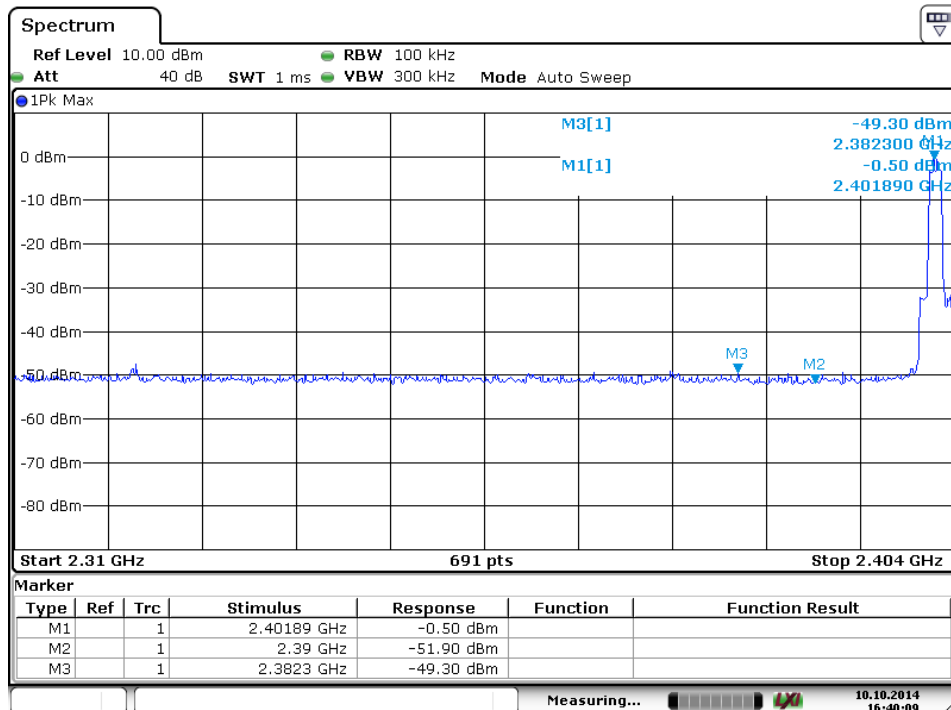


Date: 10.OCT.2014 16:40:09




## Test Plot of Conducted spurious emissions measured in 100kHz Bandwidth of LE mode

### Low Channel

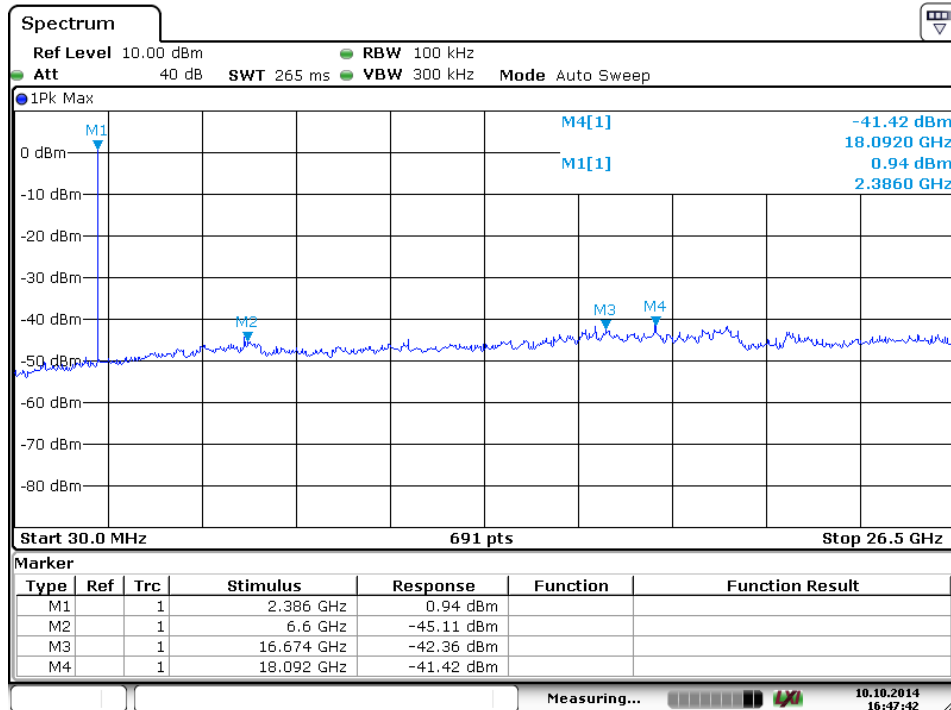


Date: 10.OCT.2014 16:47:41


### Middle Channel

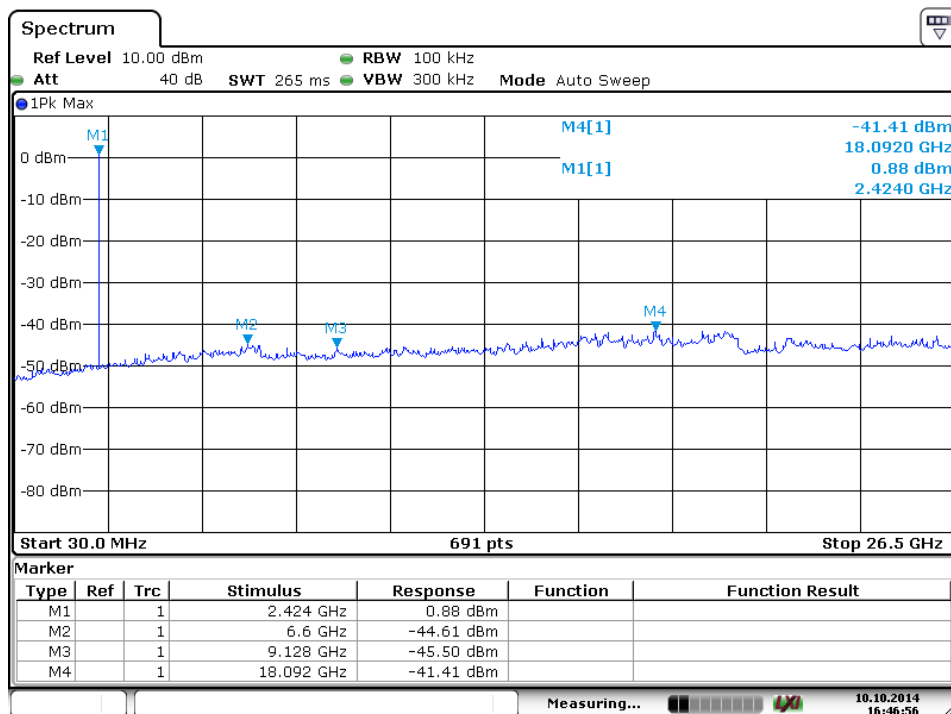


Date: 10.OCT.2014 16:46:56

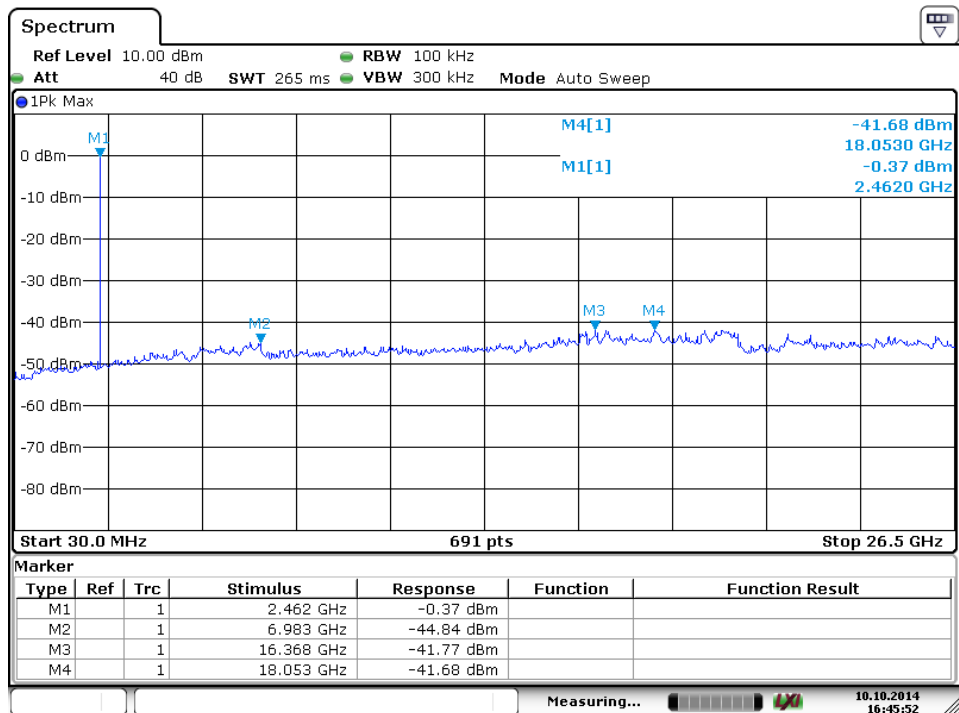**High Channel**


Date: 10.OCT.2014 16:45:52

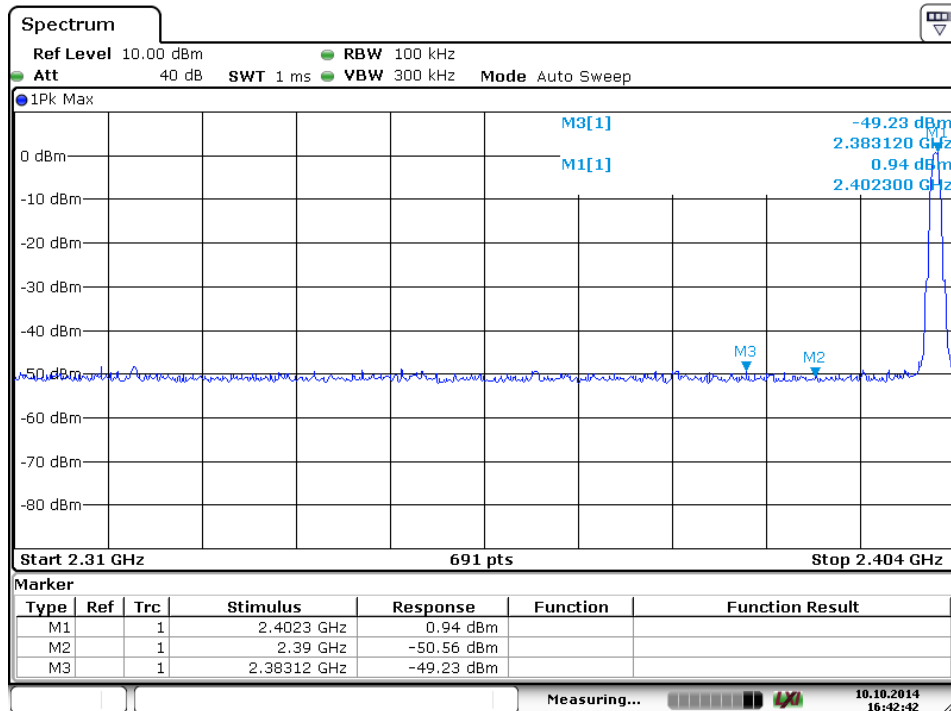**Band Edge**


Date: 10.OCT.2014 16:42:42

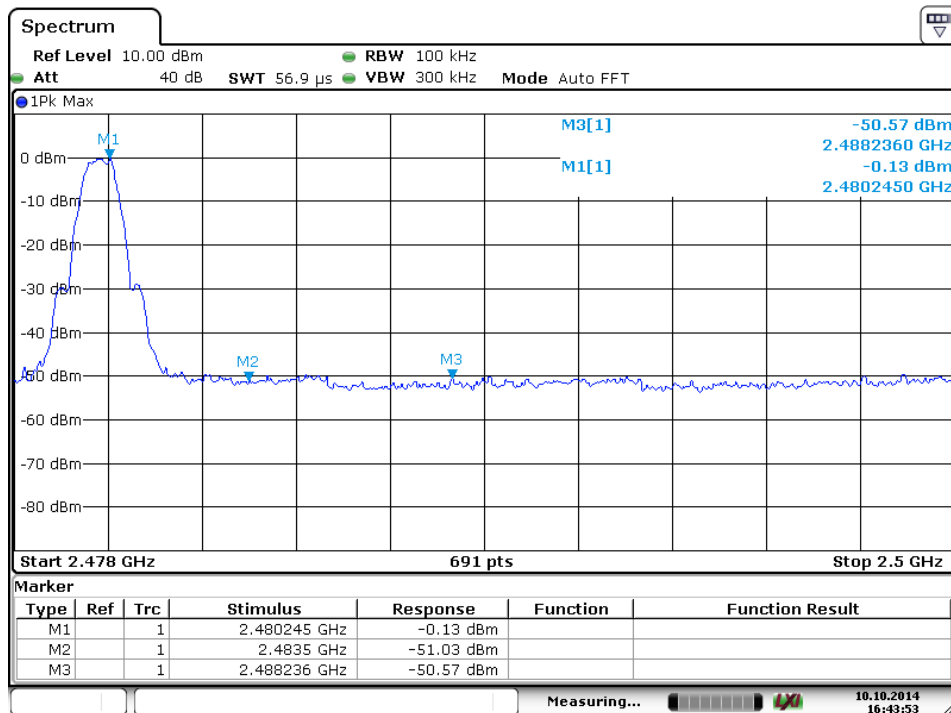

Date: 10.OCT.2014 16:43:53

**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.*
**Seite 28 von 165**  
*Page 28 of 165*

### 5.1.6 Power spectral density

**RESULT:**
**Pass**

Date of testing : 2014-10-10  
 Test standard : FCC part 15.247(e)  
                   : RSS-210 A8.2  
 Basic standard : ANSI C63.4: 2003  
                   : Clause 10 of KDB 558074 v03r01  
 Limit : 8dBm/3kHz  
 Kind of test site : Shield room

**Test setup**

Test Channel : Low/ Middle/ High  
 Operation mode : A.2.a  
 Ambient temperature : 25°C  
 Relative humidity : 52%  
 Atmospheric pressure : 101kPa

**Table 13: Test result of power spectral density:**

Mode	Channel (MHz)	Result (dBm/3kHz)	Limit (dBm/3kHz)	Conclusion
Bluetooth LE mode	2402	-13.61	8	Pass
	2440	-13.75	8	Pass
	2480	-14.41	8	Pass

**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.***Seite 29 von 165**  
*Page 29 of 165*

### 5.1.7 Spurious Emission

**RESULT:****Pass**

Date of testing : 2014-10-18  
Test standard : FCC part 15.247(d)  
RSS-210 Clause 2.2  
Basic standard : ANSI C63.4: 2003  
Clause 11 of KDB 558074 v03r01  
Limits : FCC part 15.209(a)  
Kind of test site : 3m Semi-Anechoic Chamber

**Test setup**

Test Channel : Low/ Middle/ High  
Operation mode : A.1.a, A.2.a  
Ambient temperature : 23°C  
Relative humidity : 48%  
Atmospheric pressure : 101kPa

For details refer to following test plot.

## Test Plot of Spurious Emission of transmitting


**ACCURATE TECHNOLOGY CO.,LTD**

**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

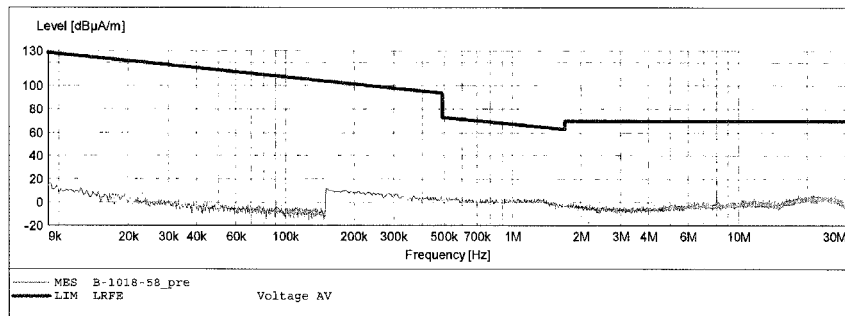


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

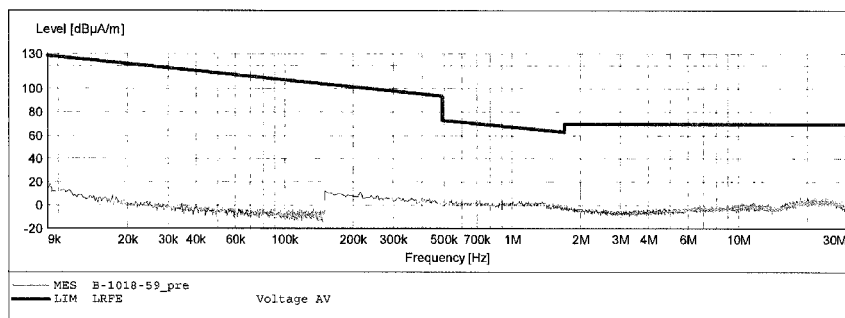


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LRFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

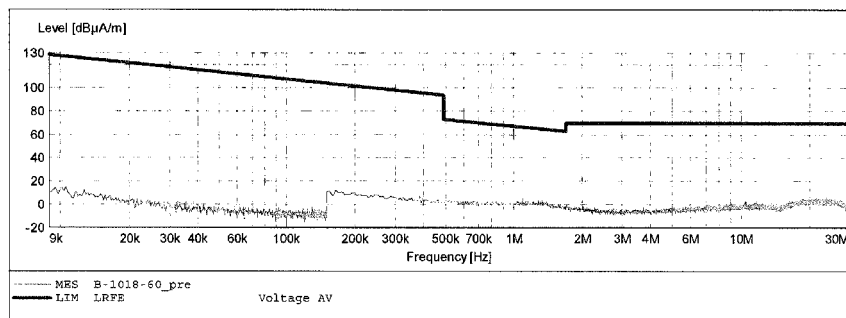




**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2441MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

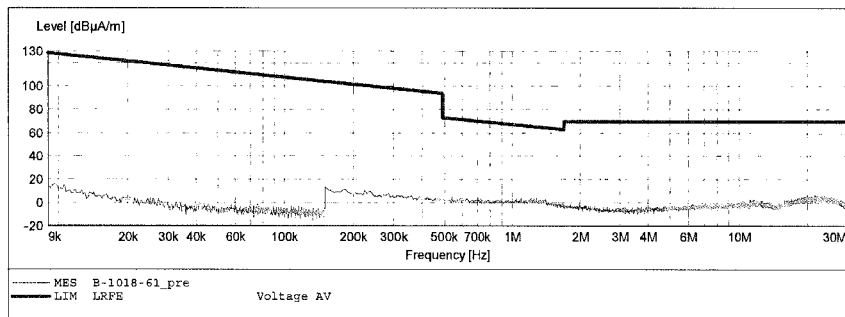


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2441MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

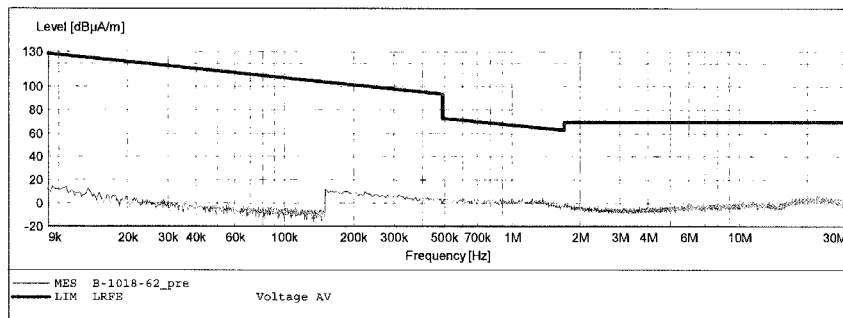


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2441MHz  
 Test Site: 1#Shielding Room  
 Operator: IAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LRPE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

Short Description: \_SUB\_STD\_VTERM2 1.70

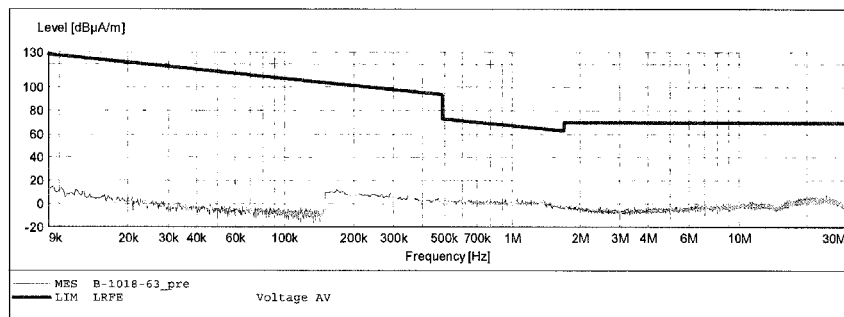


**ACCURATE TECHNOLOGY CO.,LTD**

**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

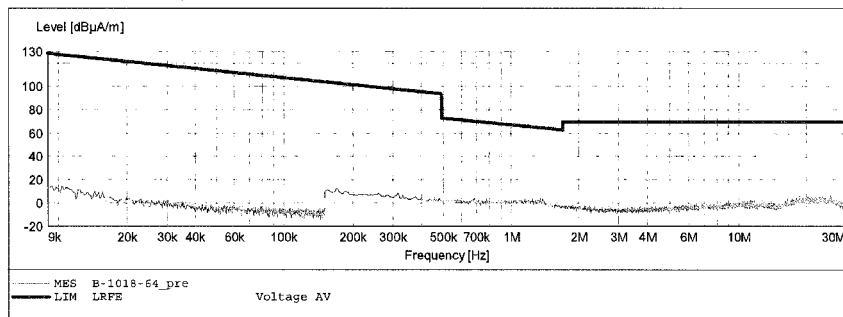


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70					
Start	Stop	Step	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Width		Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

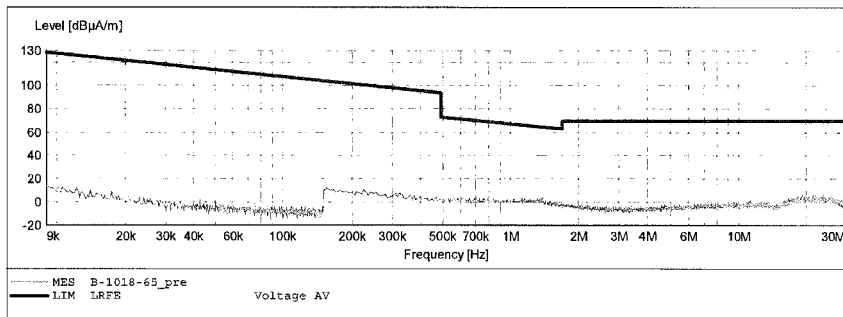


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LRFRE Fin"**

Short Description:		_SUB_STD VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

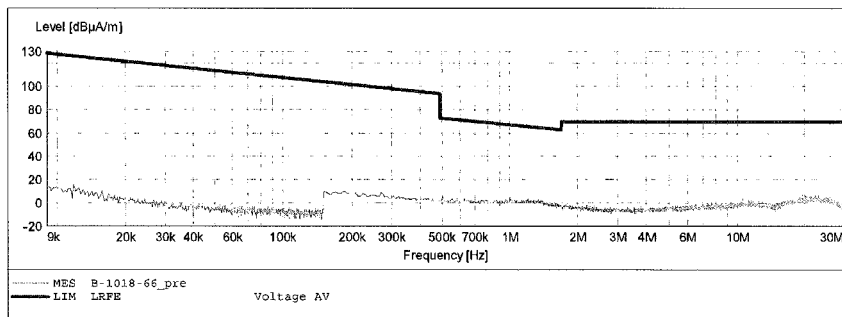



**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #791	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

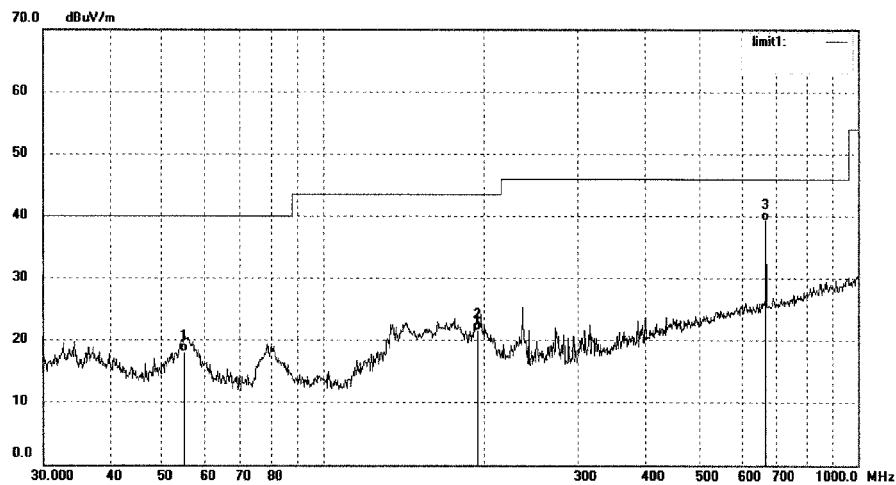


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.0274	31.02	-12.98	18.04	40.00	-21.96	QP			
2	193.7727	34.08	-12.51	21.57	43.50	-21.93	QP			
3	668.1422	41.45	-2.16	39.29	46.00	-6.71	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #792	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth	

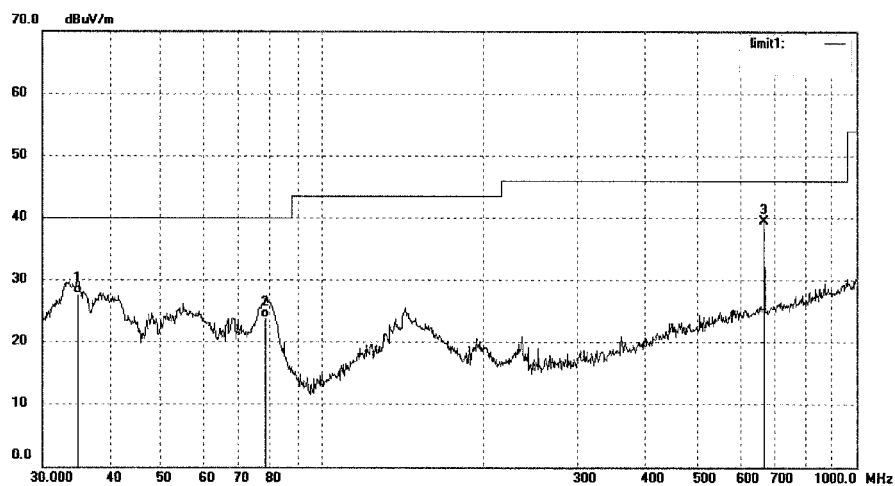

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.8823	38.23	-10.41	27.82	40.00	-12.18	QP			
2	78.4133	40.57	-16.60	23.97	40.00	-16.03	QP			
3	668.1422	41.58	-2.16	39.42	46.00	-6.58	peak			





**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #794	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

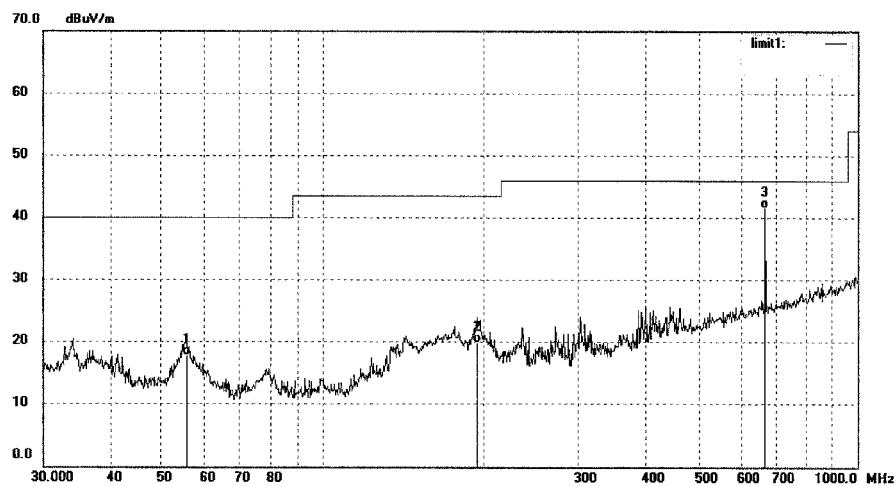


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.6094	30.79	-13.09	17.70	40.00	-22.30	QP			
2	193.7727	32.46	-12.51	19.95	43.50	-23.55	QP			
3	668.1422	43.67	-2.16	41.51	46.00	-4.49	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #793	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

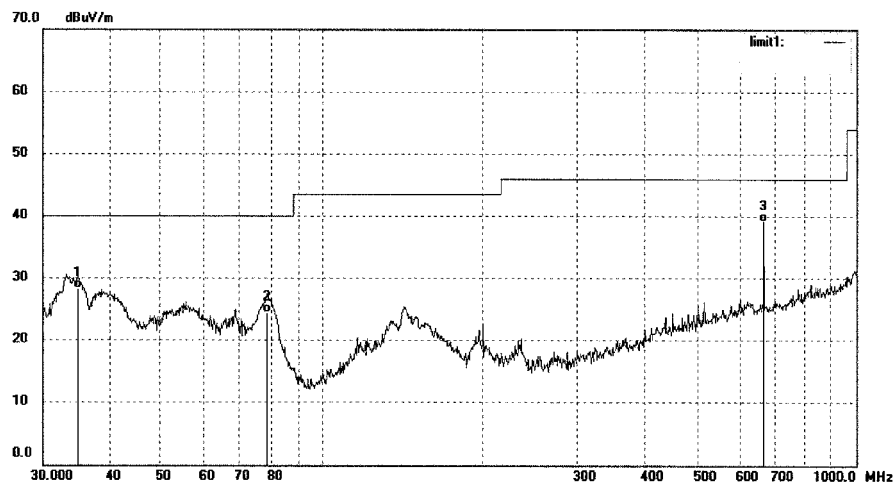


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.8823	38.66	-10.41	28.25	40.00	-11.75	QP			
2	78.6888	40.96	-16.58	24.38	40.00	-15.62	QP			
3	668.1422	41.21	-2.16	39.05	46.00	-6.95	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #795	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

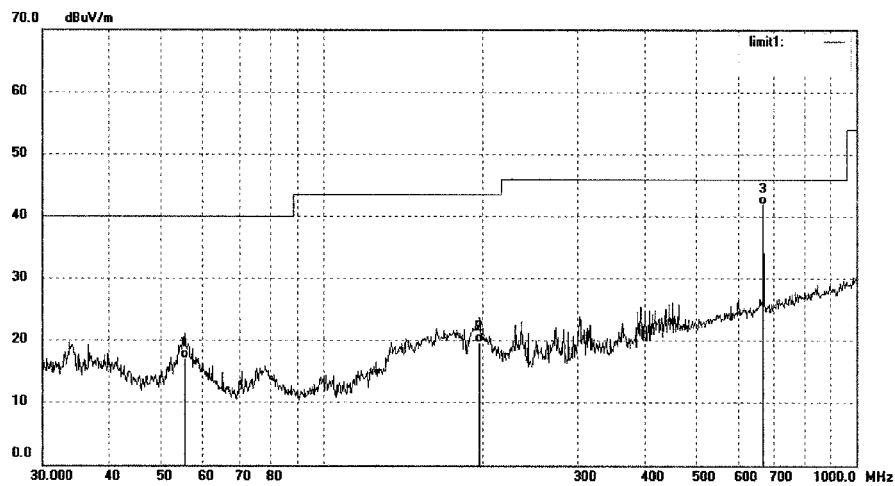


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.4147	30.21	-13.08	17.15	40.00	-22.85	QP			
2	197.2000	32.12	-12.46	19.66	43.50	-23.84	QP			
3	668.1422	44.04	-2.16	41.88	46.00	-4.12	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #796	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

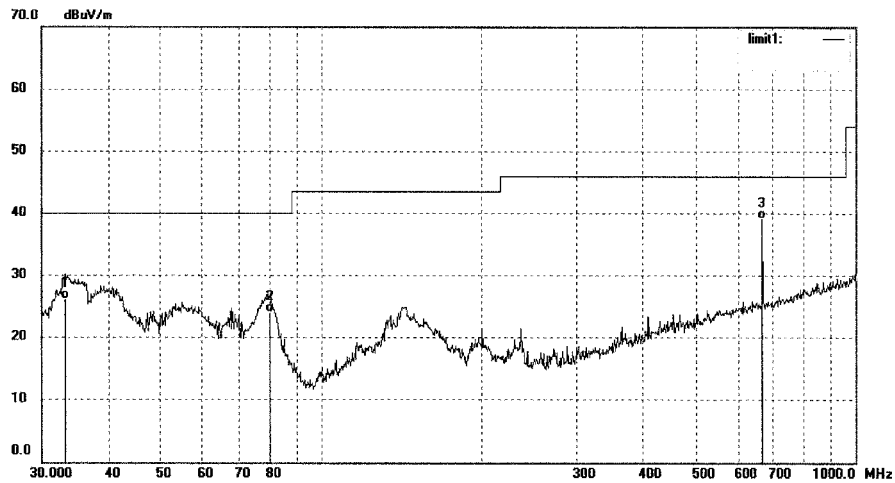


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.2111	36.48	-10.25	26.23	40.00	-13.77	QP			
2	79.8002	40.50	-16.52	23.98	40.00	-16.02	QP			
3	668.1422	41.29	-2.16	39.13	46.00	-6.87	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #940	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

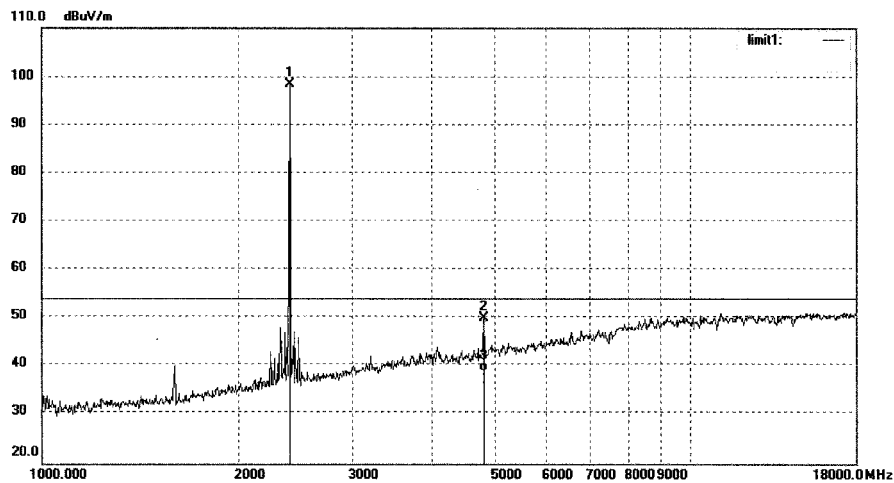


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.87	-7.45	98.42	/	/	peak			
2	4804.033	50.37	-0.30	50.07	74.00	-23.93	peak			
3	4804.033	39.28	-0.30	38.98	54.00	-15.02	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #939	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

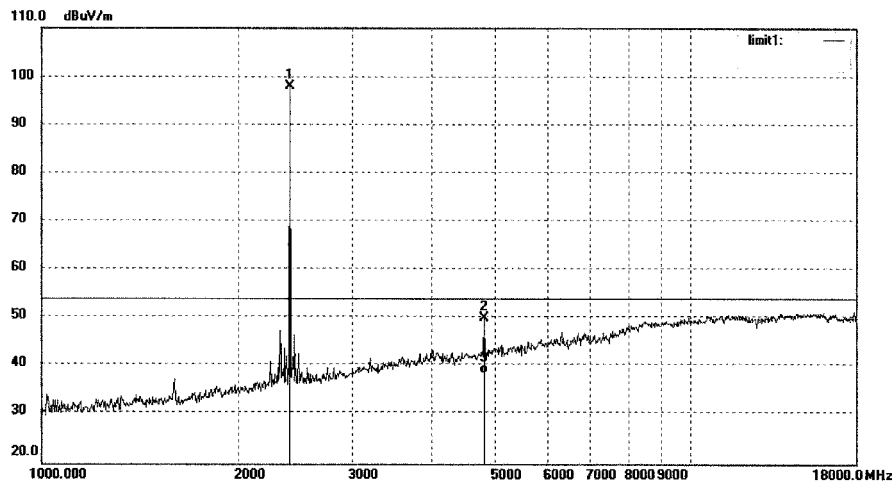

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.36	-7.45	97.91	/	/	peak			
2	4804.045	50.23	-0.30	49.93	74.00	-24.07	peak			
3	4804.045	38.97	-0.30	38.67	54.00	-15.33	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #941	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

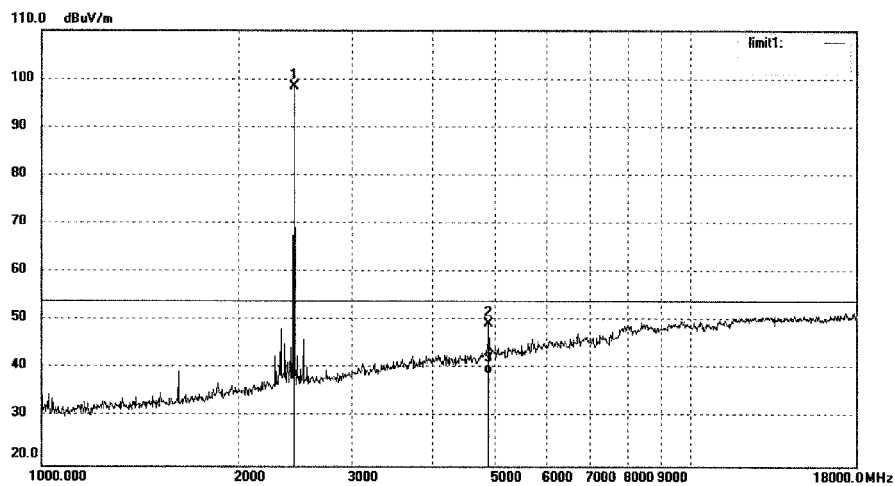


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	105.85	-7.35	98.50	/	/	peak			
2	4882.011	49.24	0.14	49.38	74.00	-24.62	peak			
3	4882.011	38.94	0.14	39.08	54.00	-14.92	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #942	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

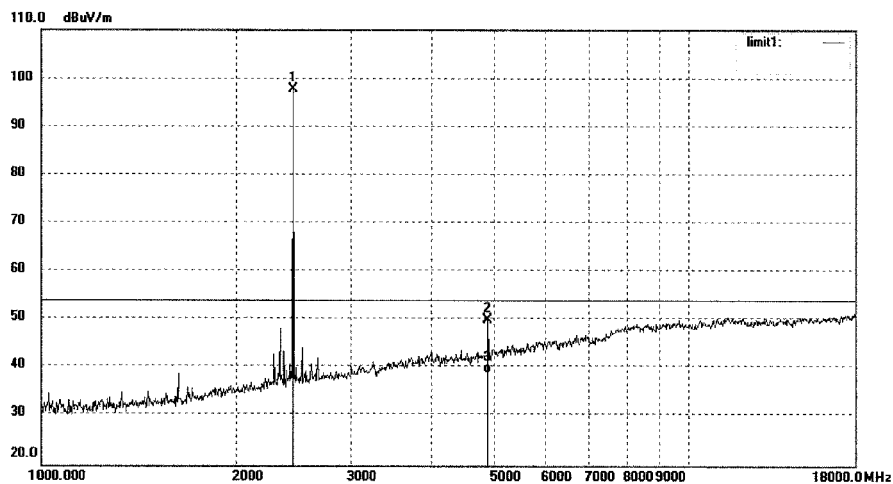

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	105.20	-7.35	97.85	/	/	peak			
2	4882.031	49.84	0.14	49.98	74.00	-24.02	peak			
3	4882.031	38.98	0.14	39.12	54.00	-14.88	AVG			




**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.*
**Seite 49 von 165**  
*Page 49 of 165*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #944	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth	

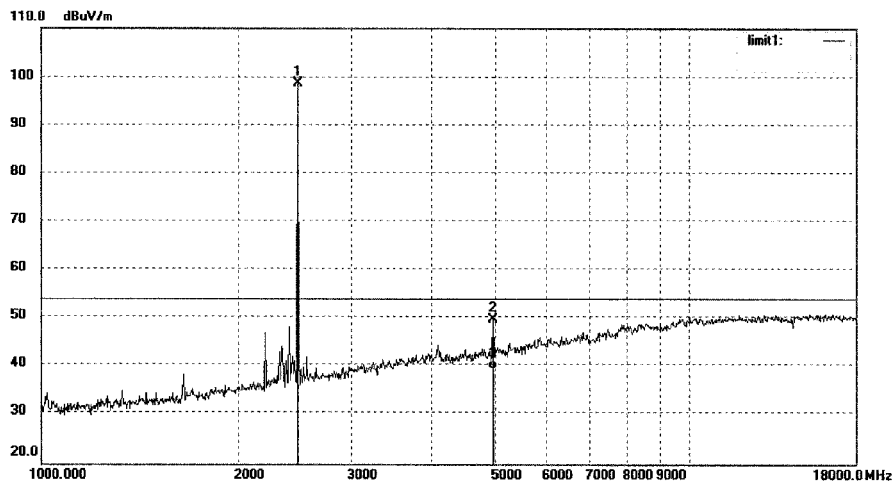


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.91	-7.37	98.54	/	/	peak			
2	4960.024	49.24	0.52	49.76	74.00	-24.24	peak			
3	4960.024	38.97	0.52	39.49	54.00	-14.51	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #943	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth	

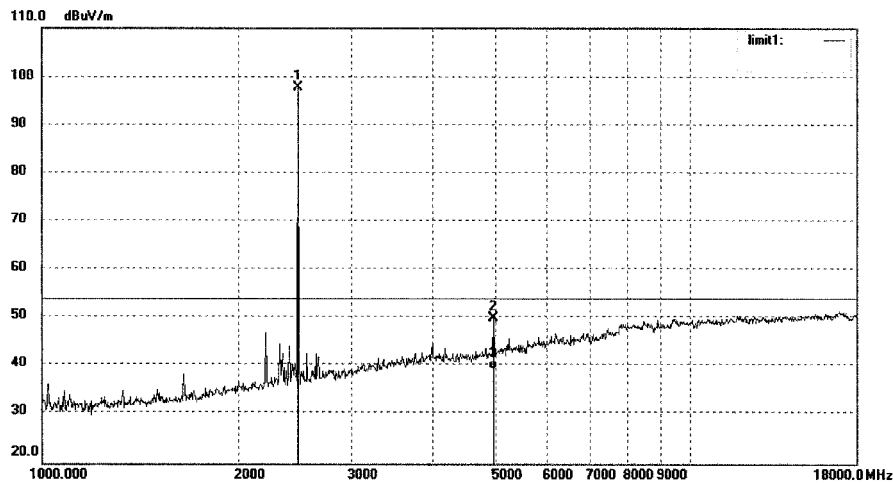

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.18	-7.37	97.81	/	/	peak			
2	4960.007	49.46	0.52	49.98	74.00	-24.02	peak			
3	4960.007	38.94	0.52	39.46	54.00	-14.54	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1051	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

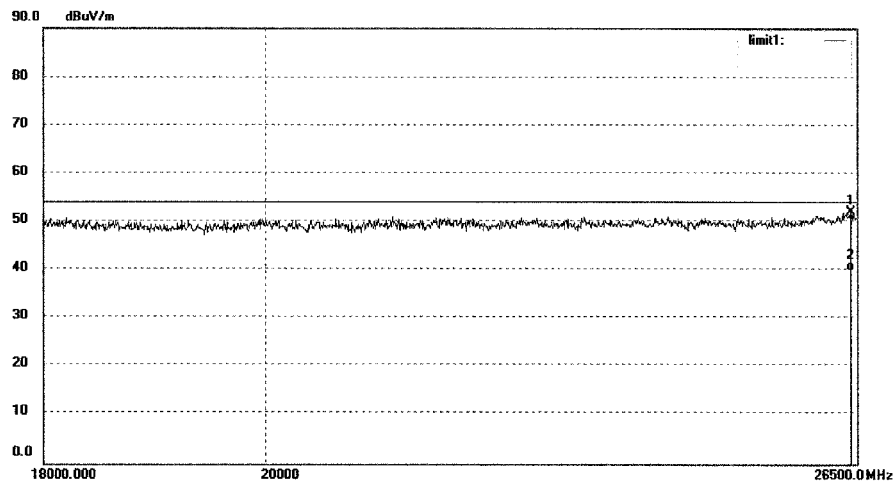


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26428.207	35.67	16.50	52.17	74.00	-21.83	peak			
2	26428.207	23.37	16.50	39.87	54.00	-14.13	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1052	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

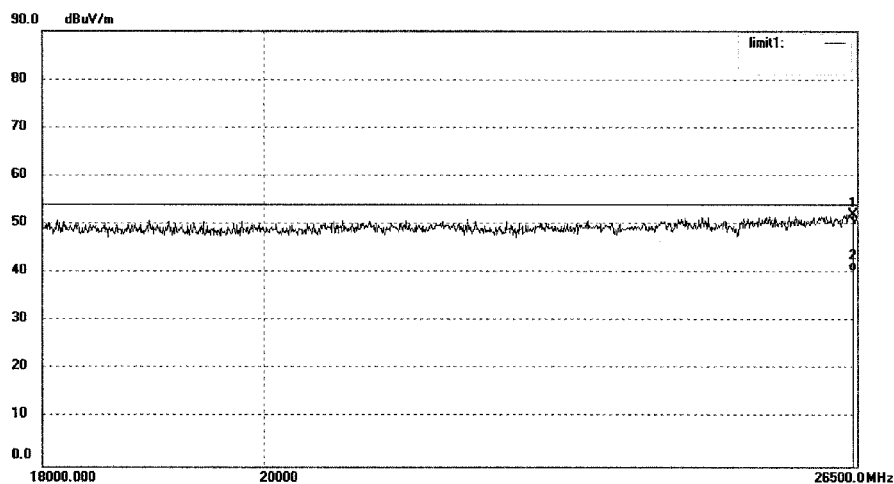


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26458.952	35.13	16.93	52.06	74.00	-21.94	peak			
2	26458.952	23.45	16.93	40.38	54.00	-13.62	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1054	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

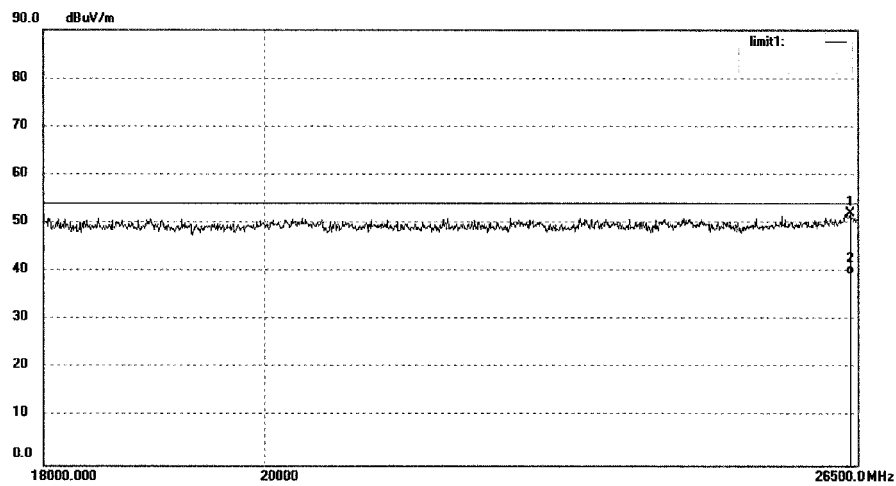

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26407.731	35.48	16.50	51.98	74.00	-22.02	peak			
2	26407.731	23.05	16.50	39.55	54.00	-14.45	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1053	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth	

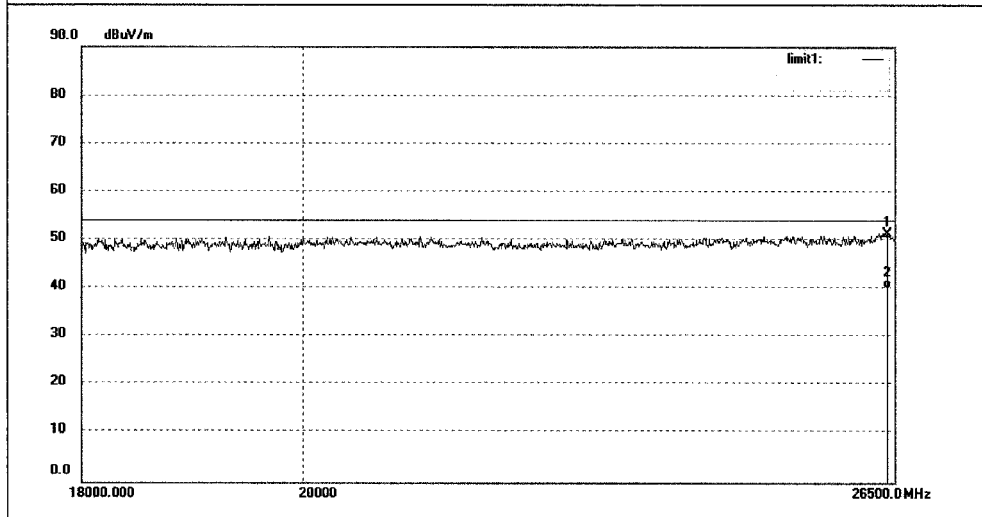

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26417.967	34.54	16.95	51.49	74.00	-22.51	peak			
2	26417.967	23.15	16.95	40.10	54.00	-13.90	AVG			


**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.*
**Seite 55 von 165**  
*Page 55 of 165*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1055	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

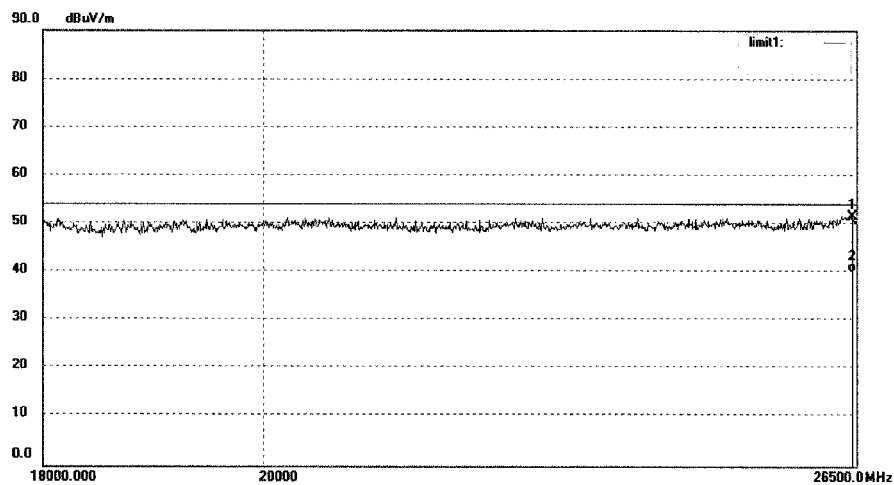


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26448.699	35.11	16.50	51.61	74.00	-22.39	peak			
2	26448.699	23.58	16.50	40.08	54.00	-13.92	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1056	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

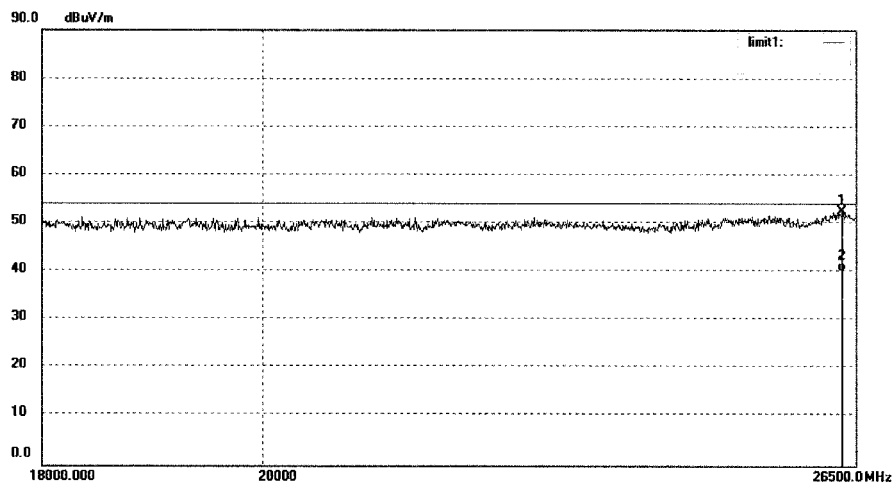

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26336.188	35.42	17.01	52.43	74.00	-21.57	peak			
2	26336.188	23.26	17.01	40.27	54.00	-13.73	AVG			




**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LRFE Fin"**

Short Description: _SUB_STD_VTERM2 1.70			Detector	Meas. Time	IF Bandw.	Transducer
Start Frequency	Stop Frequency	Step Width				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

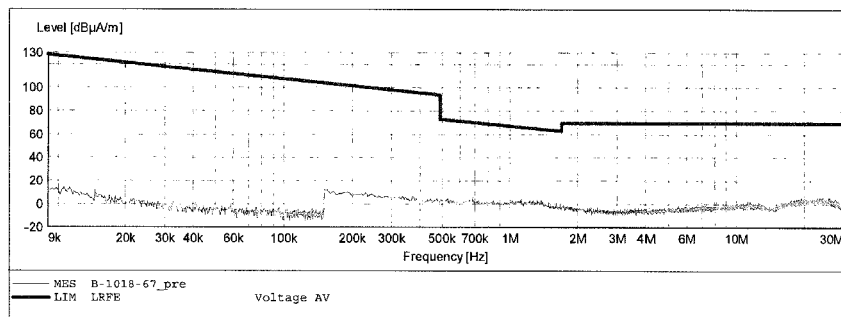


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LRFE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

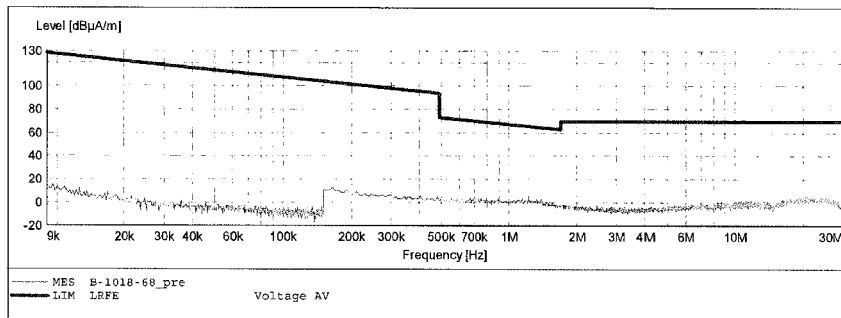


**ACCURATE TECHNOLOGY CO.,LTD**

**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

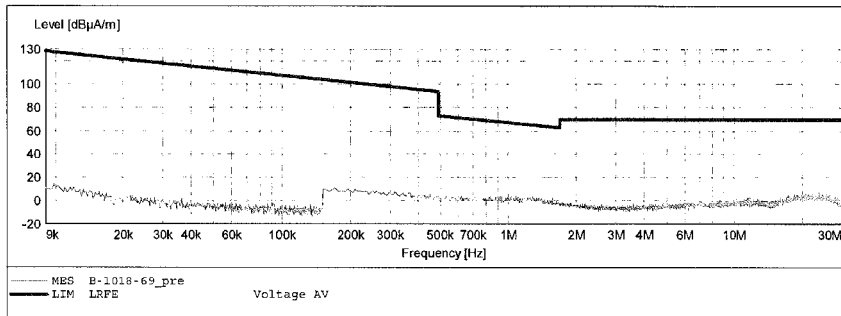


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2440MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

Short Description: \_SUB\_STD\_VTERM2 1.70

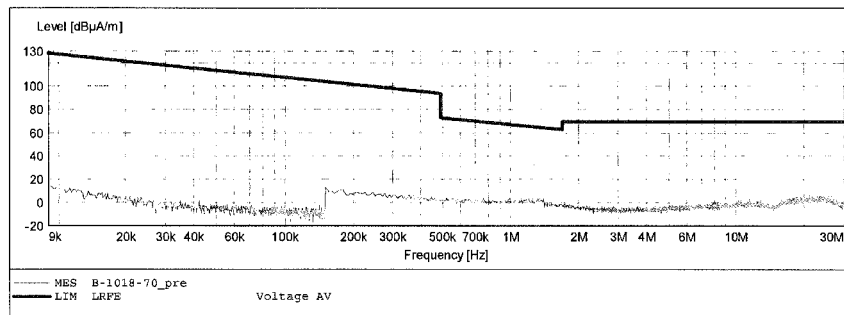


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2440MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

Short Description: \_SUB\_STD\_VTERM2 1.70

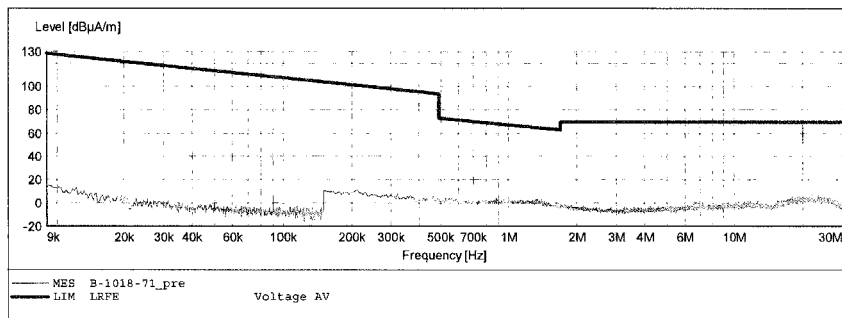


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2440MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

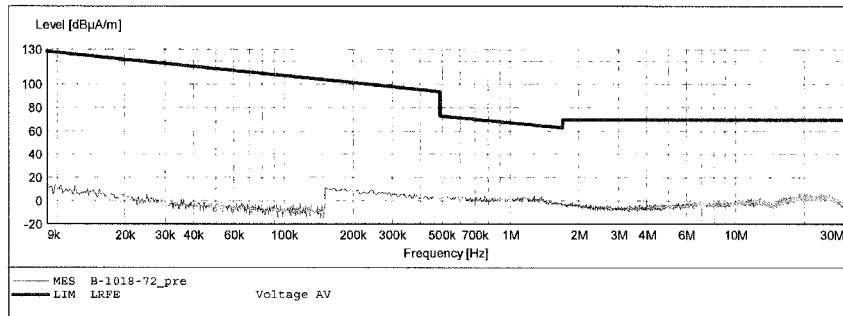


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:			_SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

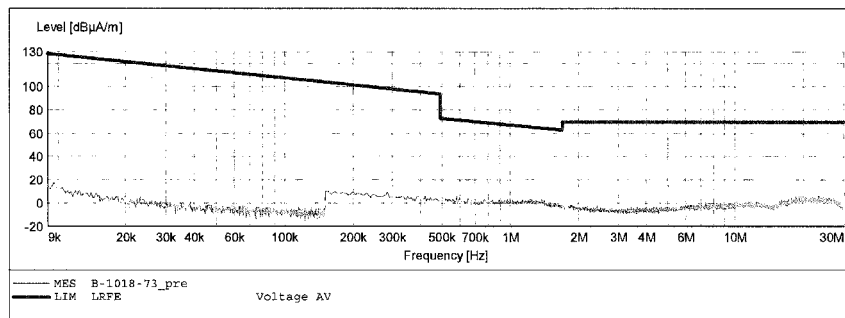


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUI: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

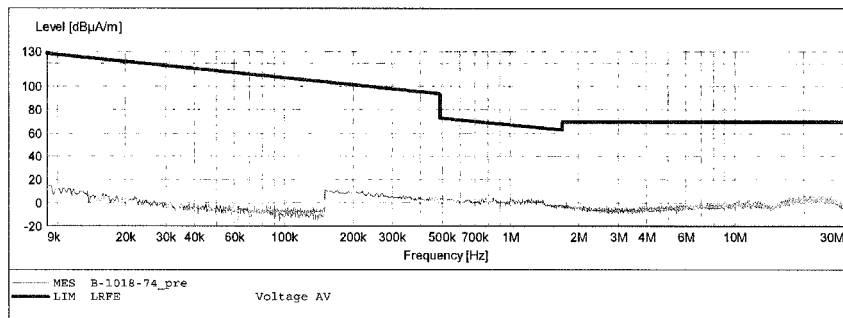




**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LRFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

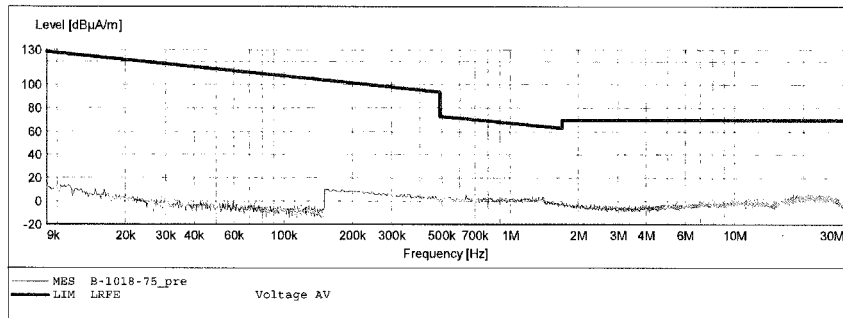


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #797

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

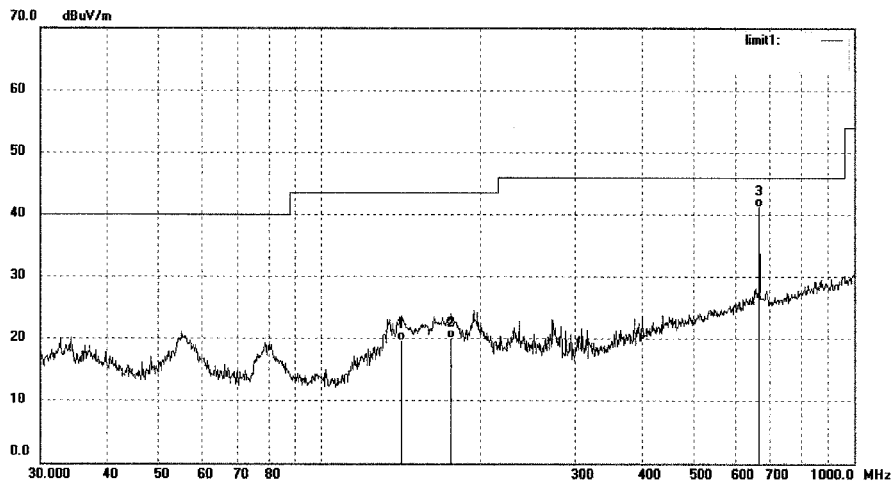


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	141.8262	34.97	-15.23	19.74	43.50	-23.76	QP			
2	175.6516	33.73	-13.62	20.11	43.50	-23.39	QP			
3	668.1422	43.45	-2.16	41.29	46.00	-4.71	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #798	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

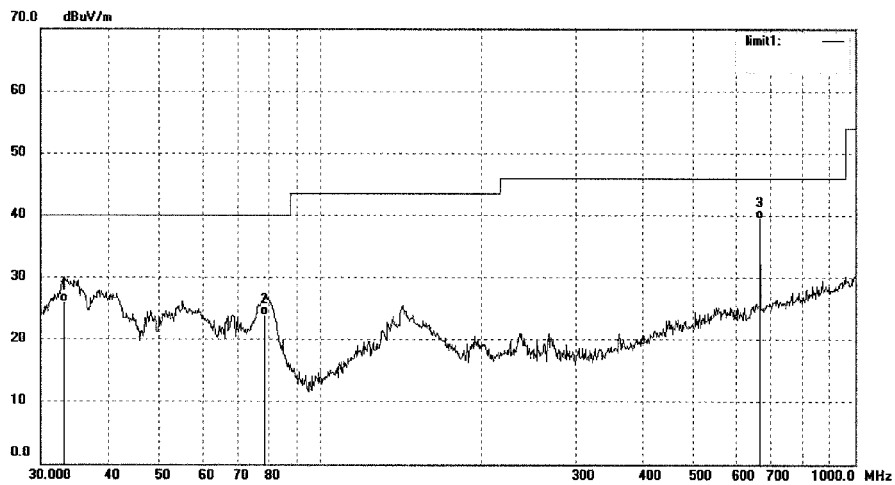

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.2111	36.32	-10.25	26.07	40.00	-13.93	QP			
2	78.4133	40.57	-16.60	23.97	40.00	-16.03	QP			
3	668.1422	41.58	-2.16	39.42	46.00	-6.58	QP			


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #800	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

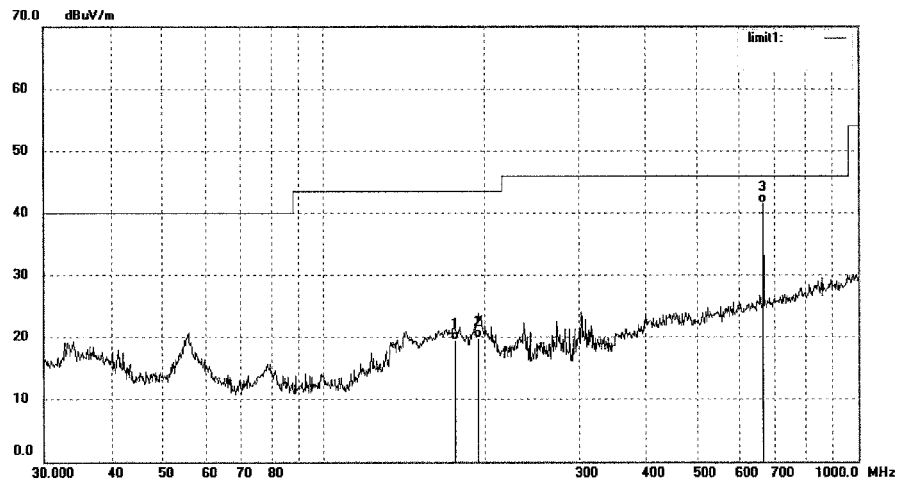


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	175.6516	33.14	-13.62	19.52	43.50	-23.98	QP			
2	193.7726	32.46	-12.51	19.95	43.50	-23.55	QP			
3	668.1422	43.67	-2.16	41.51	46.00	-4.49	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #799	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

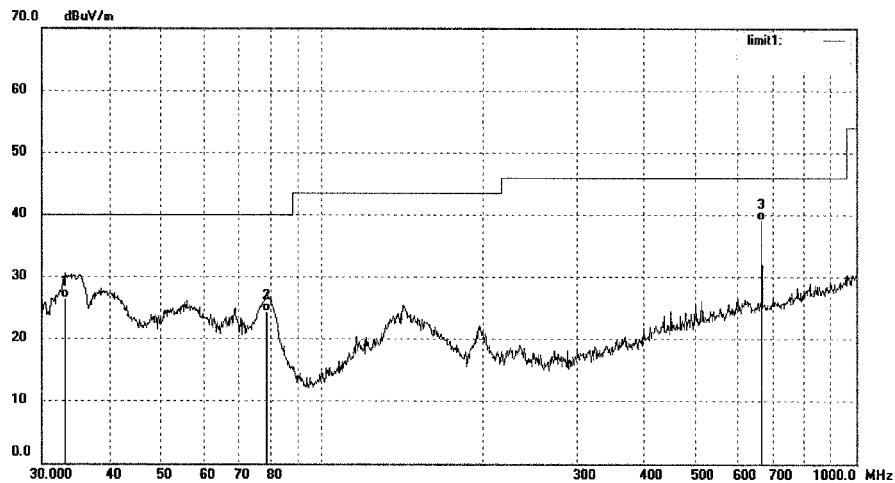

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.0949	36.73	-10.24	26.49	40.00	-13.51	QP			
2	78.6888	40.96	-16.58	24.38	40.00	-15.62	QP			
3	668.1422	41.21	-2.16	39.05	46.00	-6.95	QP			


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #801	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

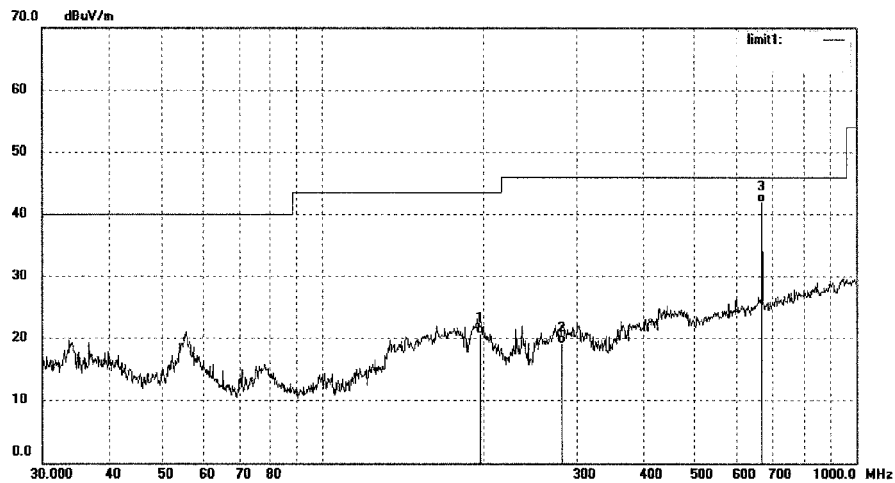

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	197.1999	33.12	-12.46	20.66	43.50	-22.84	QP			
2	281.0074	28.93	-9.81	19.12	46.00	-26.88	QP			
3	668.1422	44.04	-2.16	41.88	46.00	-4.12	QP			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #802

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

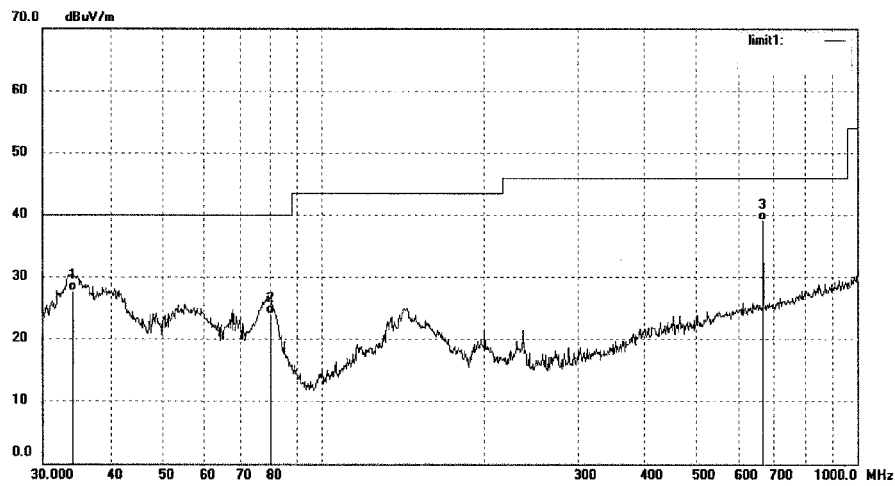

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.1561	38.06	-10.33	27.73	40.00	-12.27	QP			
2	79.8002	40.50	-16.52	23.98	40.00	-16.02	QP			
3	668.1422	41.29	-2.16	39.13	46.00	-6.87	QP			


**ACCURATE TECHNOLOGY CO., LTD.**


 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #949	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

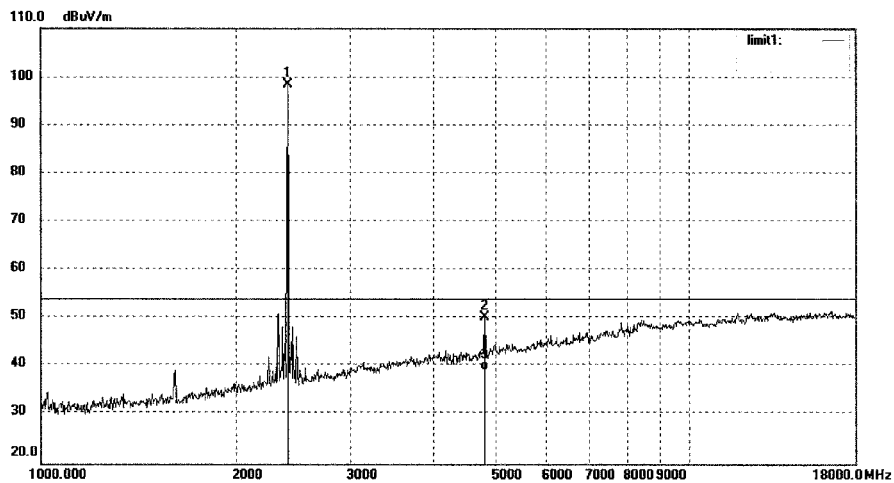

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.87	-7.45	98.42	/	/	peak			
2	4804.042	50.61	-0.30	50.31	74.00	-23.69	peak			
3	4804.042	39.47	-0.30	39.17	54.00	-14.83	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #950

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

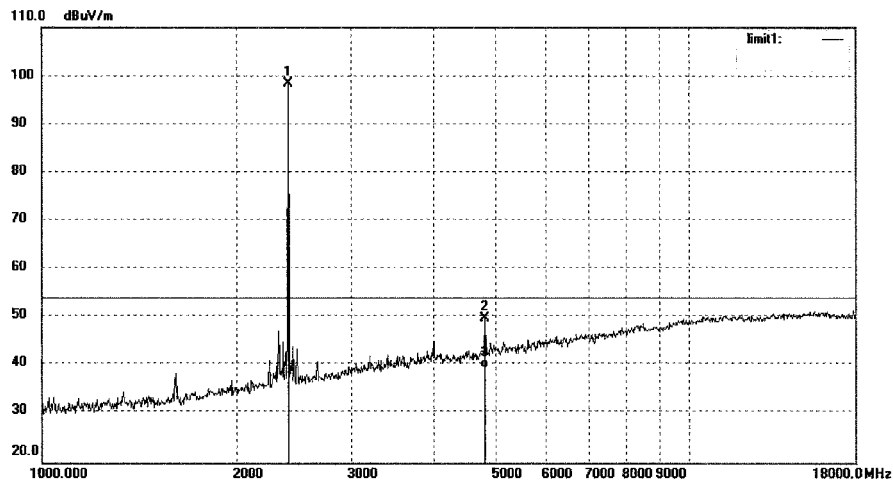

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.87	-7.45	98.42	/	/	peak			
2	4804.127	50.18	-0.30	49.88	74.00	-24.12	peak			
3	4804.127	39.75	-0.30	39.45	54.00	-14.55	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #952

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2440MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

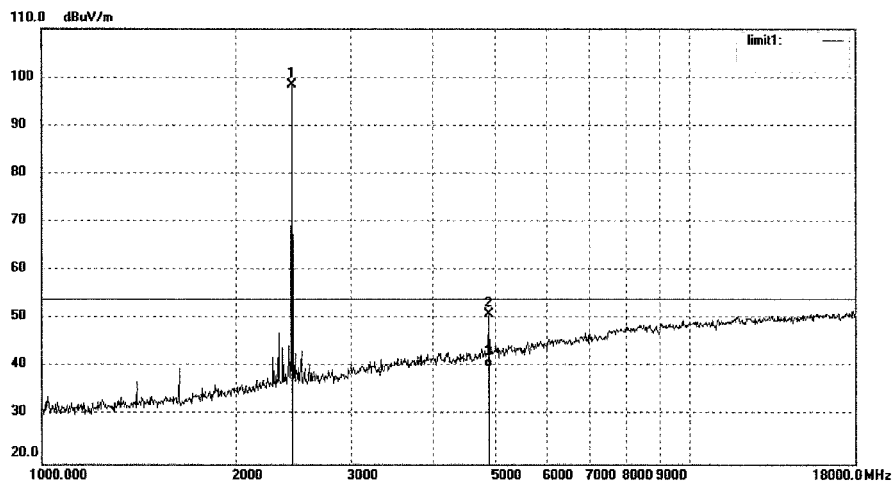


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	105.85	-7.36	98.49	/	/	peak			
2	4874.042	50.85	0.09	50.94	74.00	-23.06	peak			
3	4874.042	39.76	0.09	39.85	54.00	-14.15	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #951	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

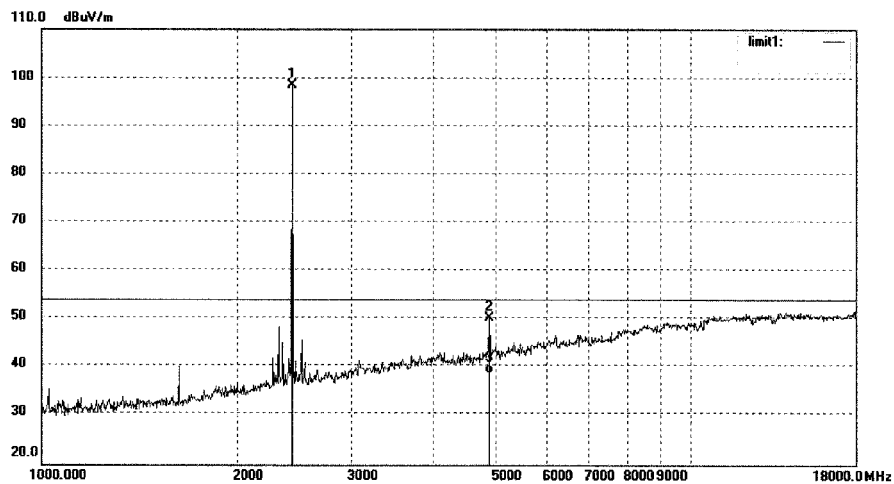


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2437.000	105.76	-7.36	98.40	/	/	peak			
2	4874.041	50.08	0.09	50.17	74.00	-23.83	peak			
3	4874.041	38.79	0.09	38.88	54.00	-15.12	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #953	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

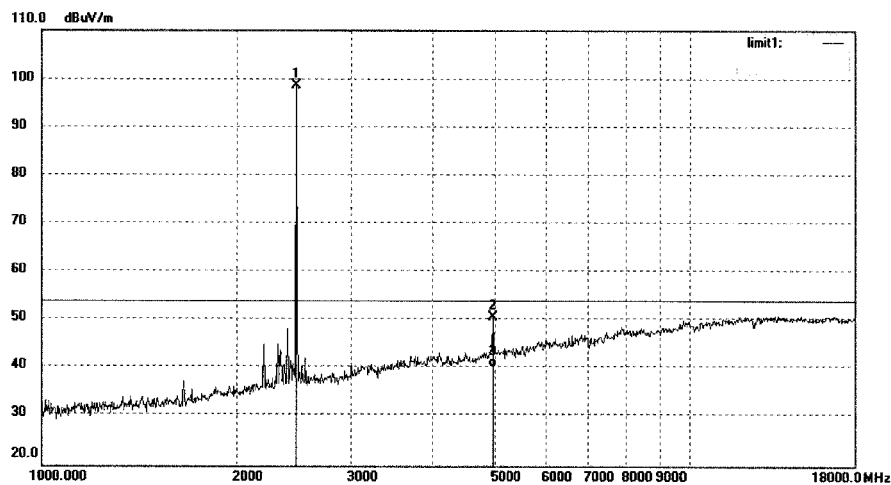


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.91	-7.37	98.54	/	/	peak			
2	4960.017	50.25	0.52	50.77	74.00	-23.23	peak			
3	4960.017	39.79	0.52	40.31	54.00	-13.69	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #954	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth 4.0

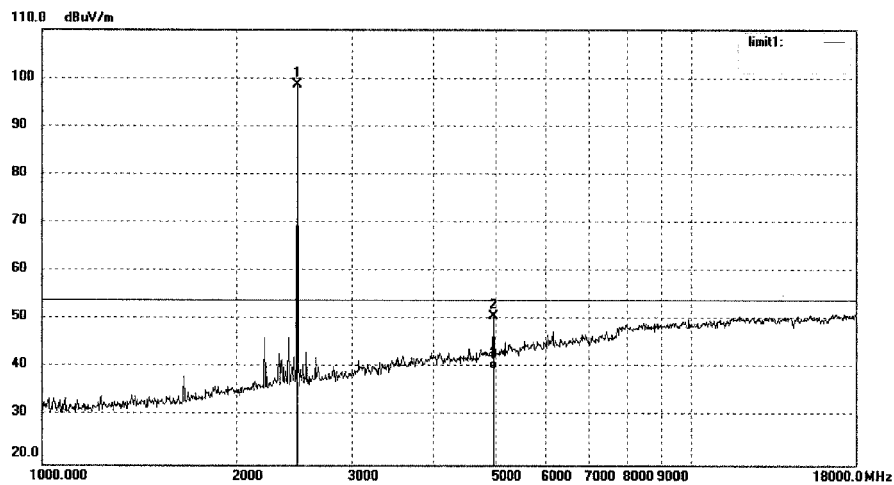


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.91	-7.37	98.54	/	/	peak			
2	4960.023	50.10	0.52	50.62	74.00	-23.38	peak			
3	4960.023	39.07	0.52	39.59	54.00	-14.41	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1058	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth 4.0

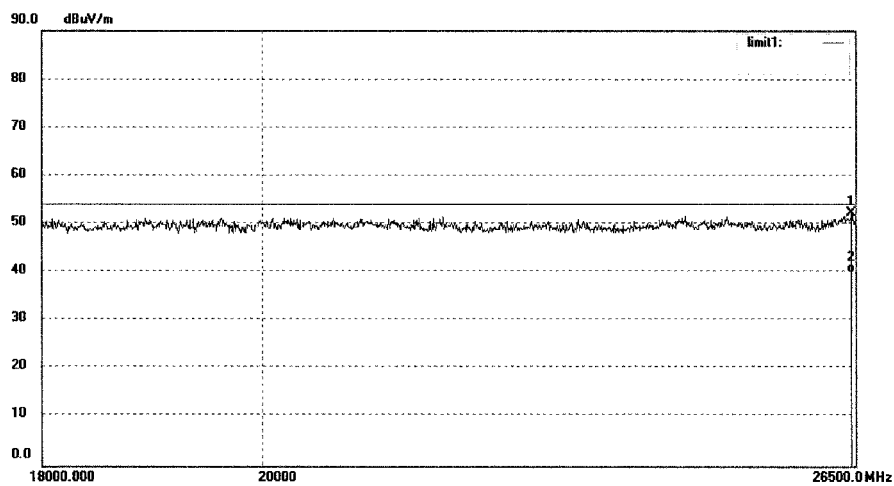


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26458.952	35.31	16.93	52.24	74.00	-21.76	peak			
2	26458.952	23.03	16.93	39.96	54.00	-14.04	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1057	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

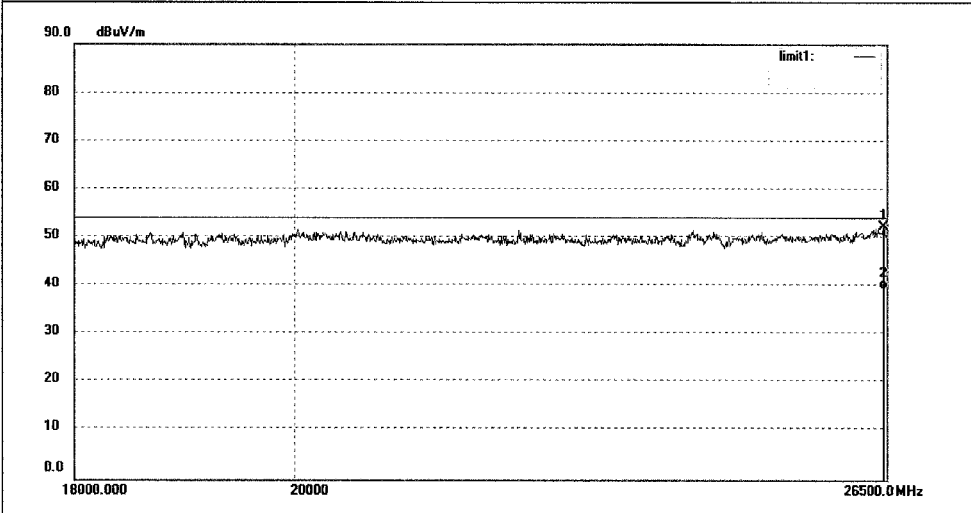


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26469.208	35.80	16.50	52.30	74.00	-21.70	peak			
2	26469.208	22.98	16.50	39.48	54.00	-14.52	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1059	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

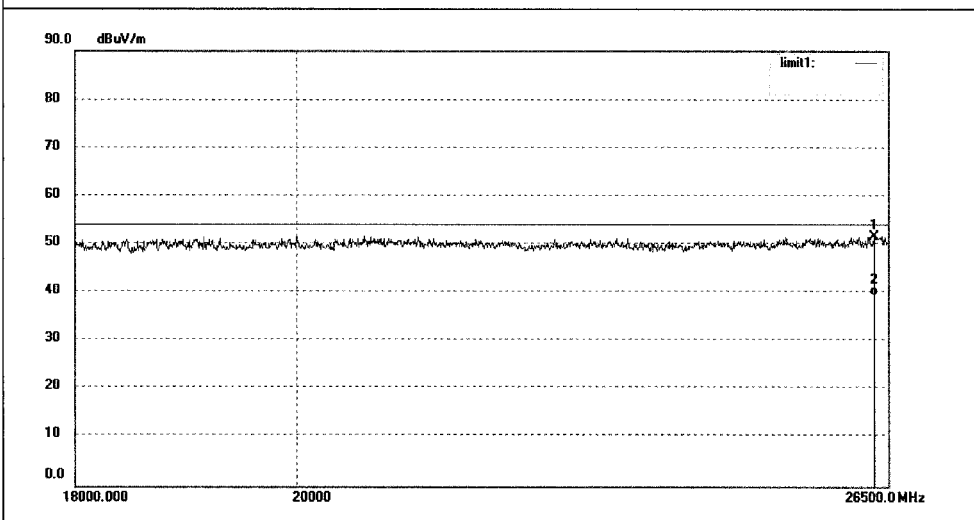

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26336.188	34.68	17.01	51.69	74.00	-22.31	peak			
2	26336.188	22.57	17.01	39.58	54.00	-14.42	AVG			




**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.*
**Seite 81 von 165**  
*Page 81 of 165*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1060	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

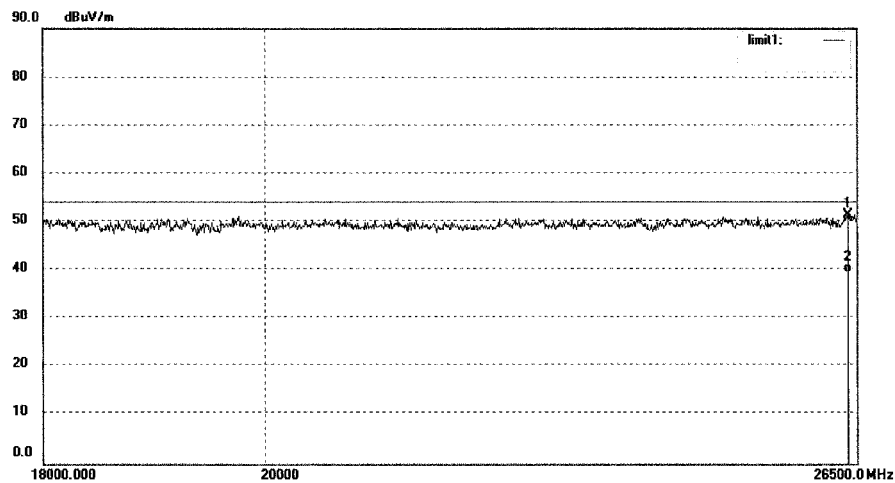


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26397.499	34.93	16.50	51.43	74.00	-22.57	peak			
2	26397.499	22.98	16.50	39.48	54.00	-14.52	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1062	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

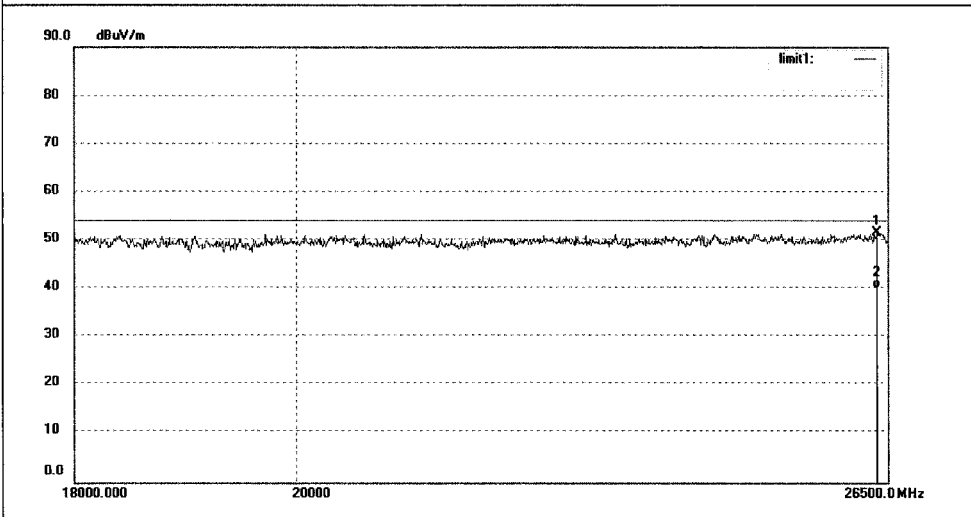


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26377.046	35.22	16.50	51.72	54.00	-22.27	peak			
2	26377.046	23.68	16.50	40.18	54.00	-13.82	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1061	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth 4.0

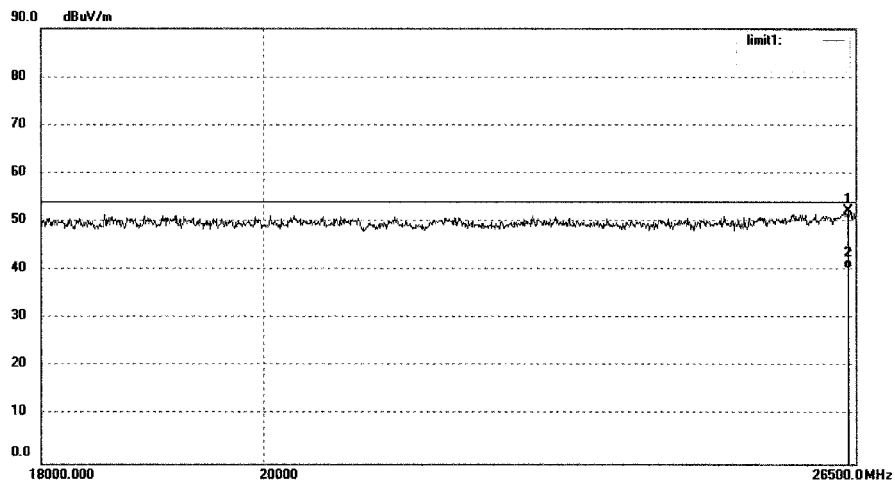


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26407.731	35.26	16.96	52.22	74.00	-21.78	peak			
2	26407.731	23.43	16.96	40.39	54.00	-13.61	AVG			

**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

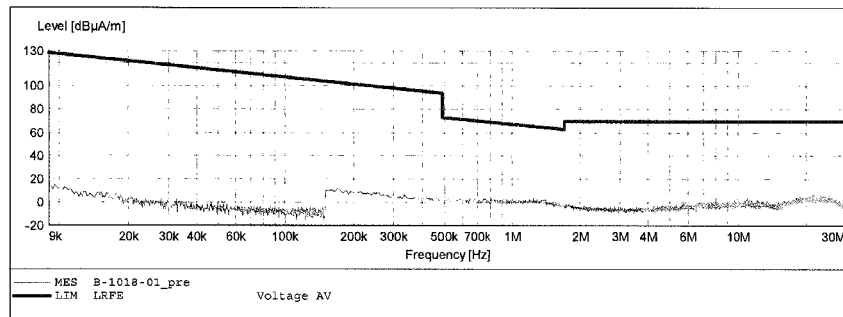


**ACCURATE TECHNOLOGY CO.,LTD**

**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Width	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	5.0 kHz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz		QuasiPeak	1.0 s	9 kHz	1516M

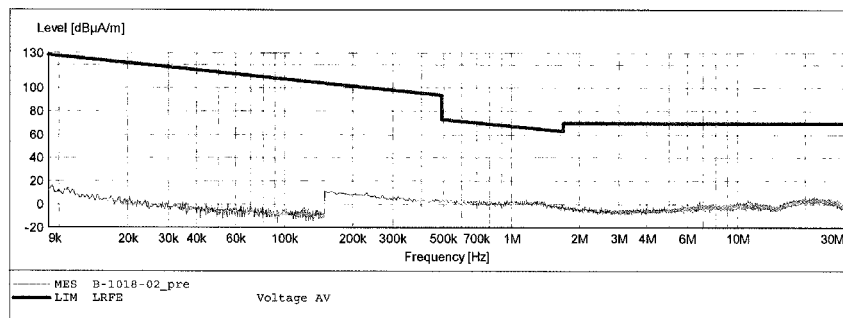


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:			_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

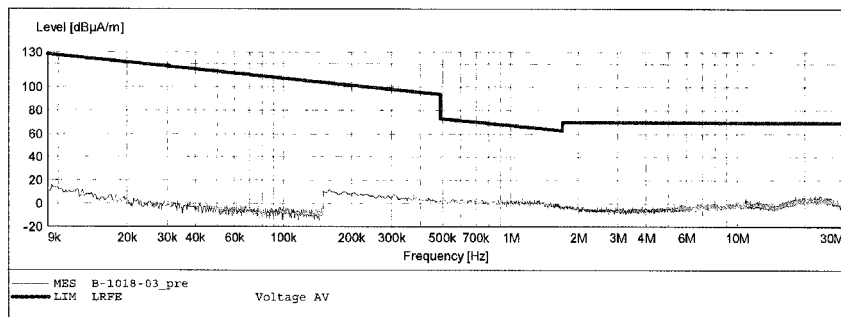


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2441MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

Short Description: SUB\_STD\_VTERM2 1.70

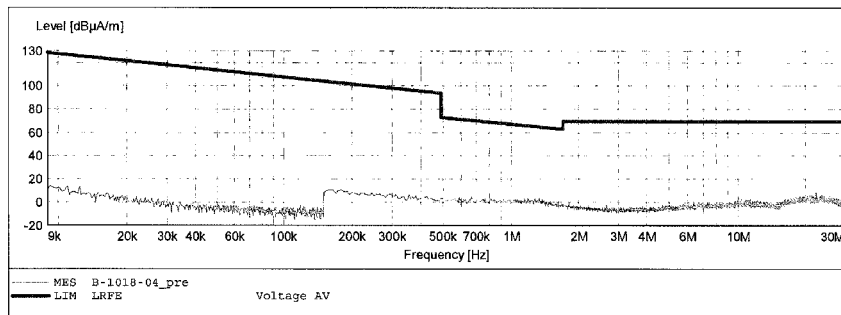


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2441MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:			_SUB STD VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

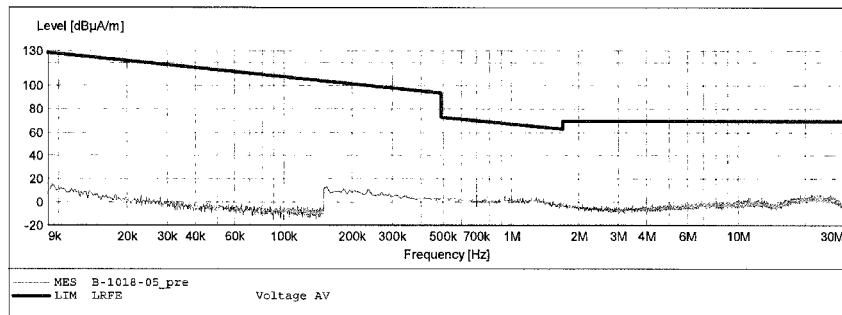




**ACCURATE TECHNOLOGY CO.,LTD**

**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2441MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70					
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

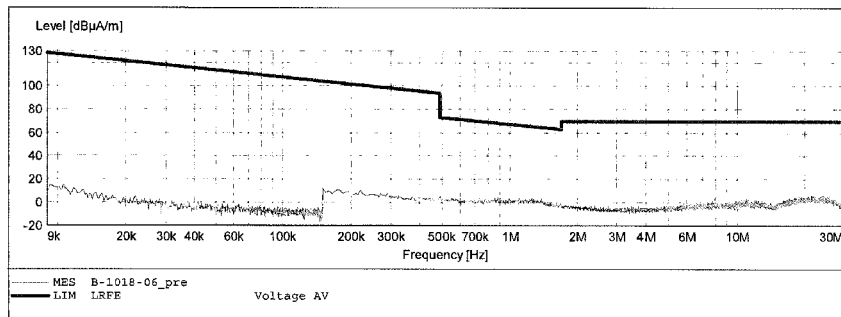


**ACCURATE TECHNOLOGY CO., LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N: NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description: _SUB_STD_VTERM2 1.70			Detector	Meas. Time	IF Bandw.	Transducer
Start	Stop	Step				
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

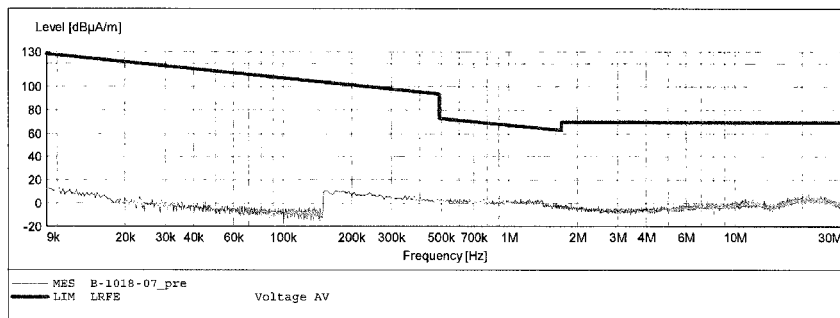


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LRFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

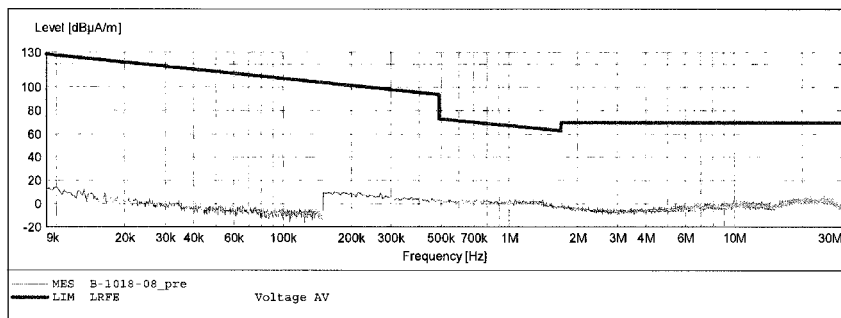


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

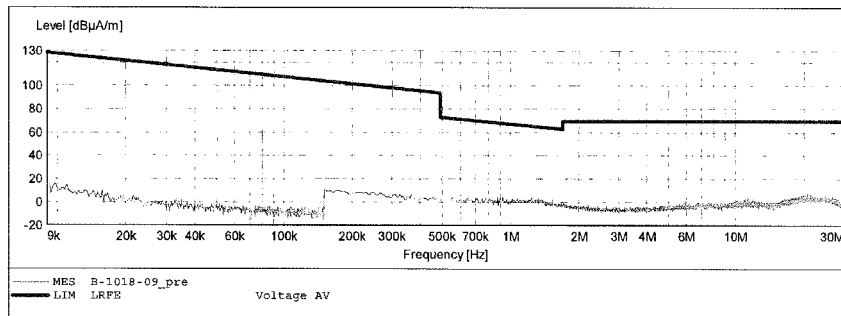



**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #828	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

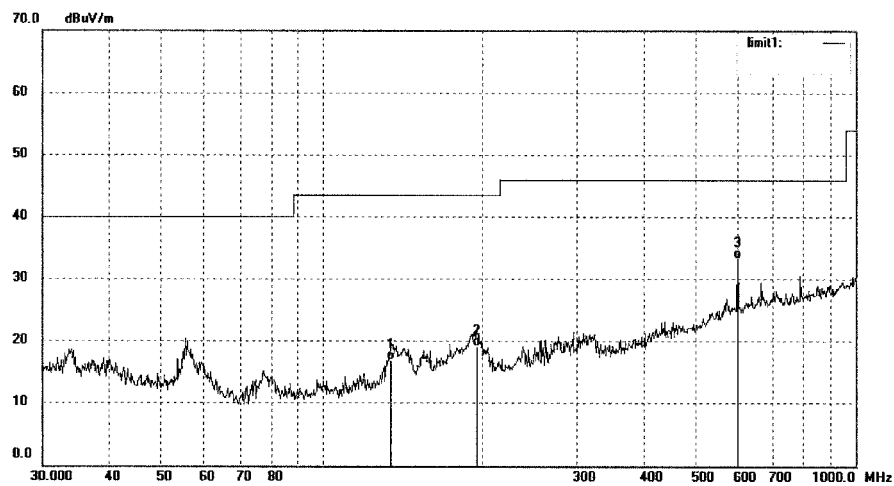


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	135.0319	31.02	-14.08	16.94	43.50	-26.56	QP			
2	195.1365	31.66	-12.47	19.19	43.50	-24.31	QP			
3	601.4265	36.31	-2.96	33.35	46.00	-12.65	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #827	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

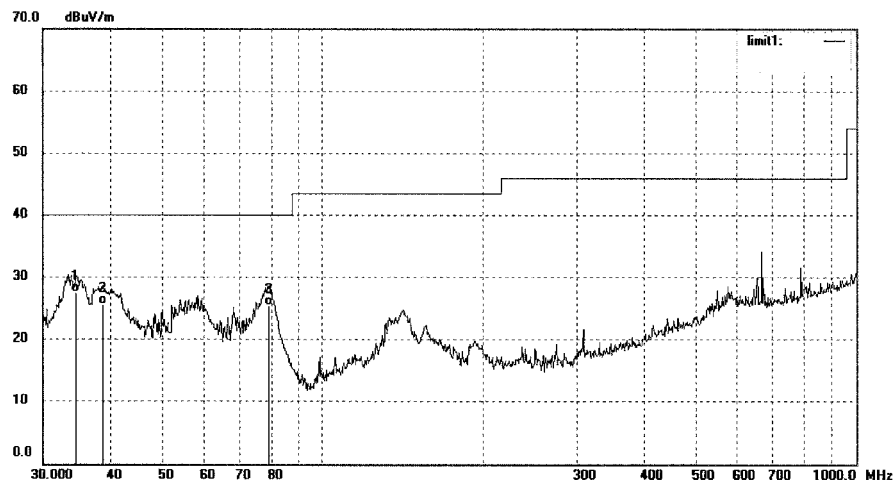


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.6385	37.91	-10.39	27.52	40.00	-12.48	QP			
2	38.8878	36.87	-11.30	25.57	40.00	-14.43	QP			
3	78.9651	42.11	-16.57	25.54	40.00	-14.46	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #829	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

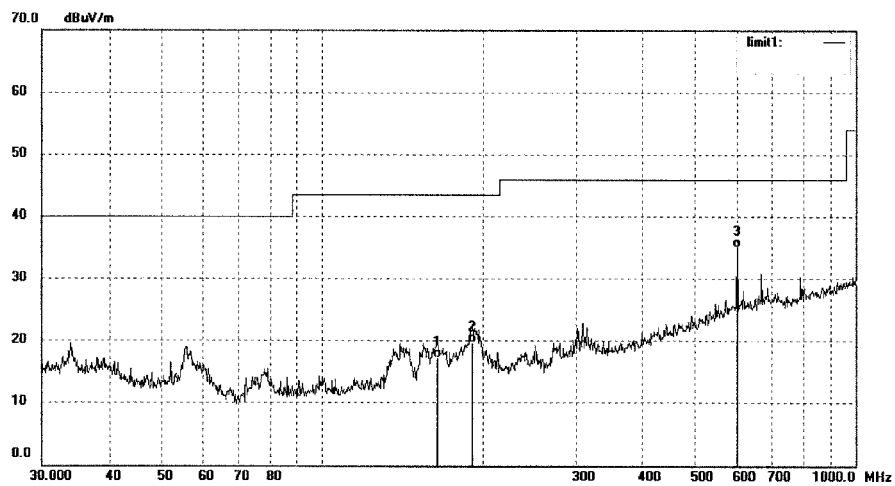


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	164.9074	31.69	-14.46	17.23	43.50	-26.27	QP			
2	191.7450	32.29	-12.59	19.70	43.50	-23.80	QP			
3	601.4265	38.07	-2.96	35.11	46.00	-10.89	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #830	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

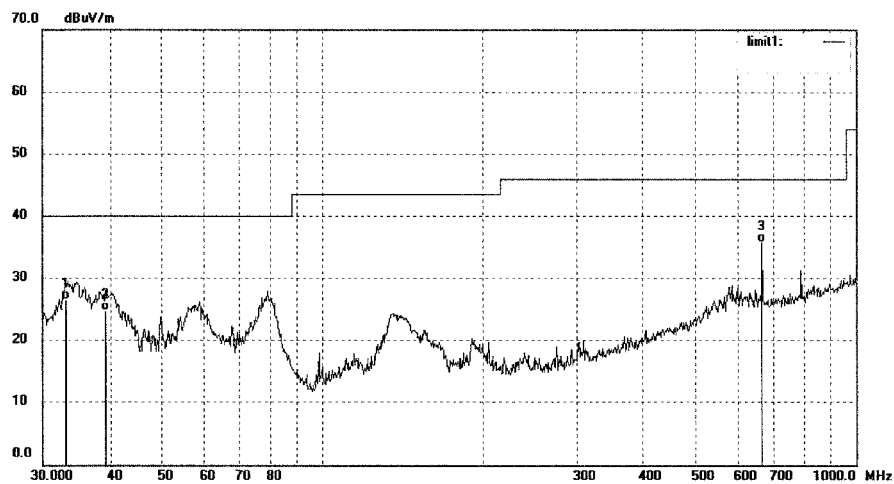

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.2111	36.73	-10.25	26.48	40.00	-13.52	QP			
2	39.2991	36.24	-11.39	24.85	40.00	-15.15	QP			
3	668.1422	37.88	-2.16	35.72	46.00	-10.28	QP			





**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #832	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

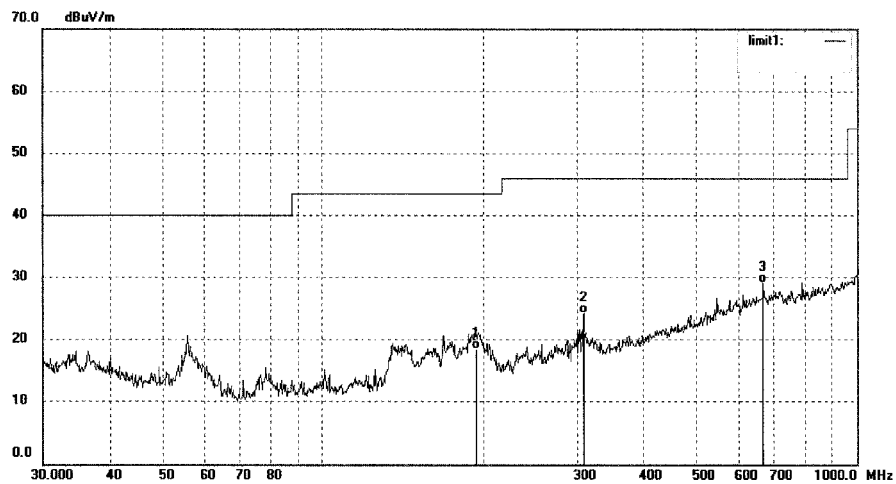


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	193.0945	31.06	-12.54	18.52	43.50	-24.98	QP			
2	307.8312	33.25	-9.09	24.16	46.00	-21.84	QP			
3	668.1422	31.38	-2.16	29.22	46.00	-16.78	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #831	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

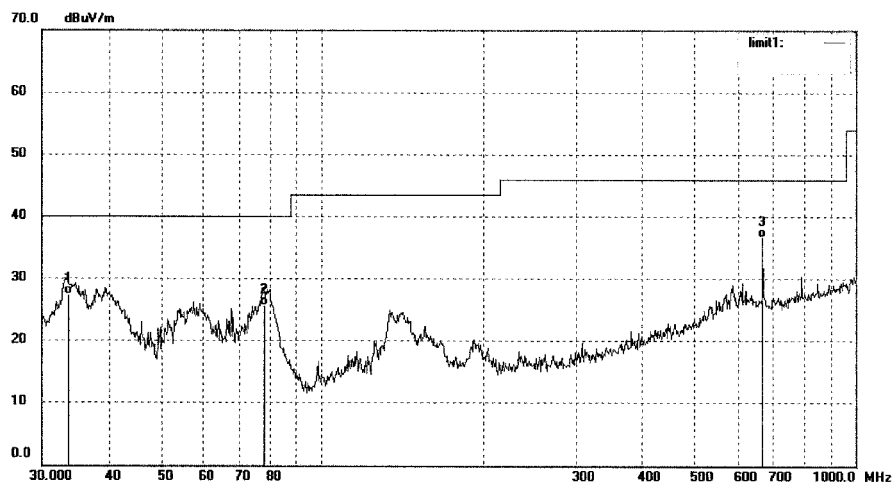


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.5623	37.72	-10.27	27.45	40.00	-12.55	QP			
2	78.1389	42.20	-16.61	25.59	40.00	-14.41	QP			
3	668.1422	38.87	-2.16	36.71	46.00	-9.29	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #863	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

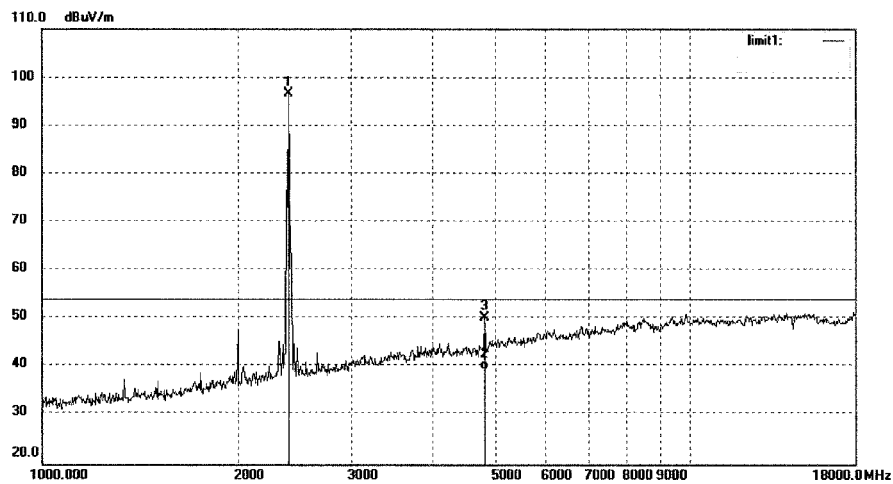


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	103.98	-7.45	96.53	/	/	peak			
2	4804.010	39.84	-0.30	39.54	54.00	-14.46	AVG			
3	4804.110	50.52	-0.30	50.22	74.00	-23.78	peak			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #864	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

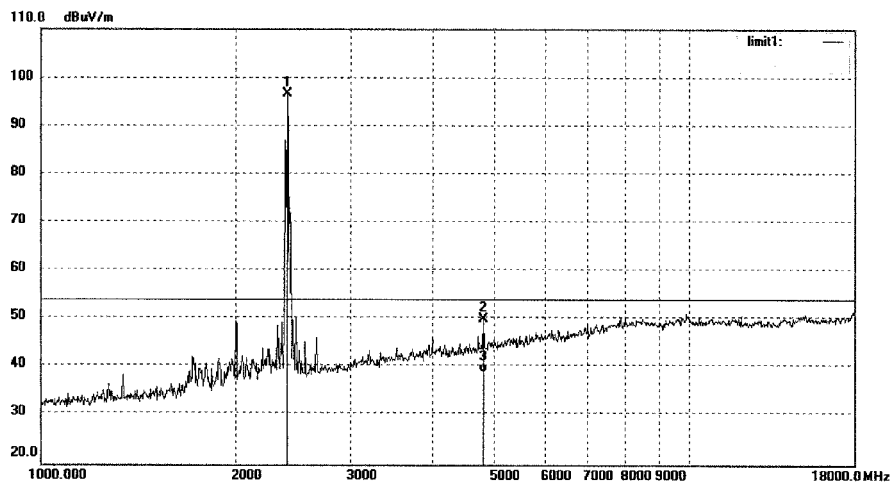


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	103.98	-7.45	96.53	/	/	peak			
2	4804.045	50.27	-0.30	49.97	74.00	-24.03	peak			
3	4804.045	39.39	-0.30	39.09	54.00	-14.91	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #867	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

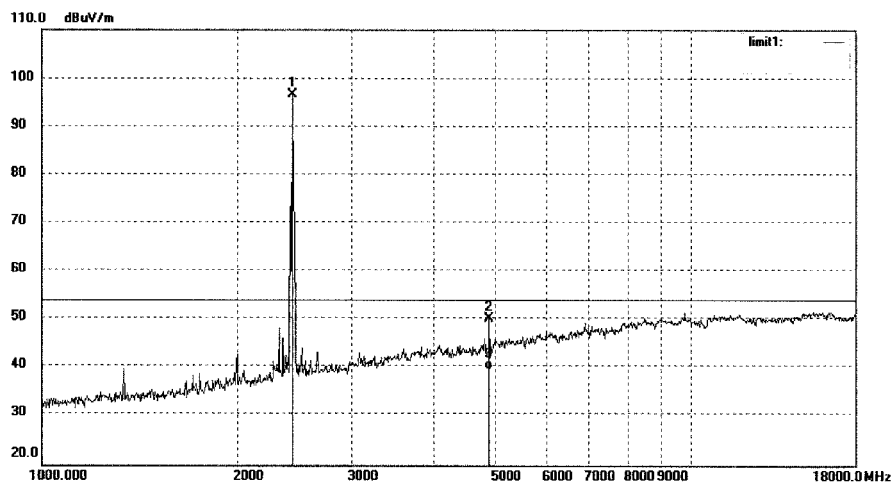


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	103.96	-7.35	96.61	/	/	peak			
2	4882.025	50.19	0.14	50.33	74.00	-23.67	peak			
3	4882.025	39.64	0.14	39.78	54.00	-14.22	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A.Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #866	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

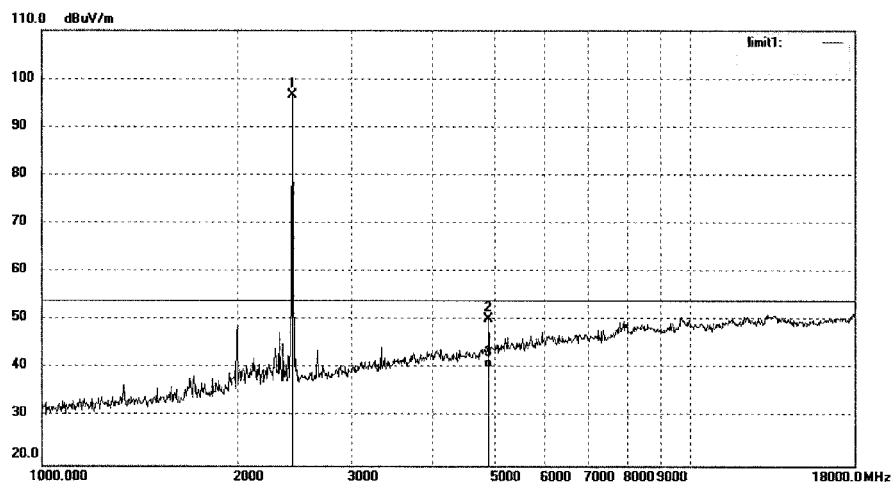


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2441.000	103.96	-7.35	96.61	/	/	peak			
2	4882.031	50.10	0.14	50.24	74.00	-23.76	peak			
3	4882.031	40.04	0.14	40.18	54.00	-13.82	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A.Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #868	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

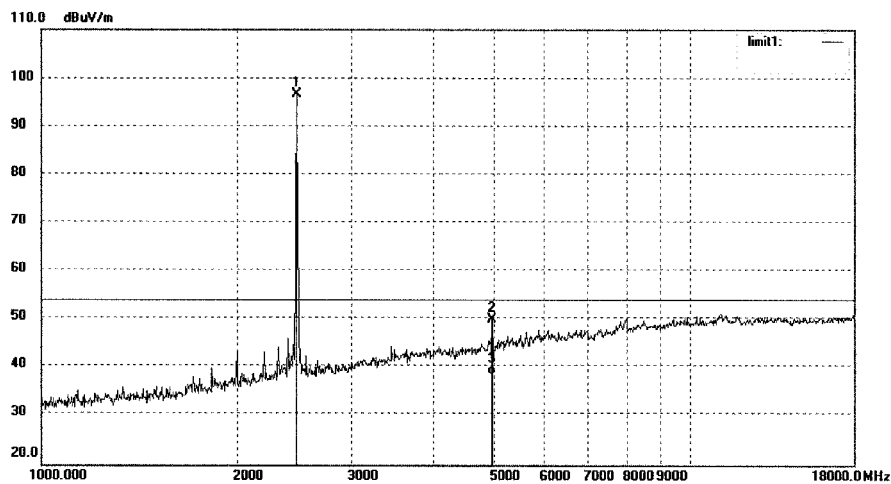


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	104.02	-7.37	96.65	/	/	peak			
2	4960.007	49.53	0.52	50.05	74.00	-23.95	peak			
3	4960.007	37.97	0.52	38.49	54.00	-15.51	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #869	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

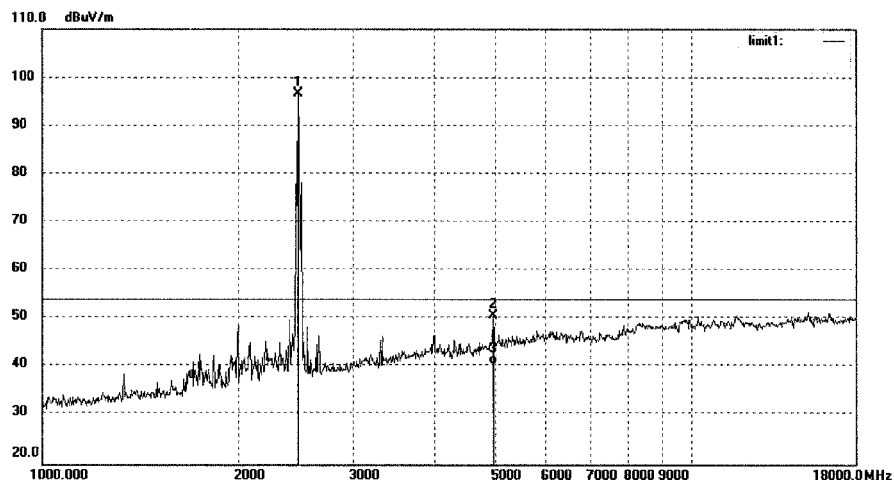

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	104.02	-7.37	96.65	/	/	peak			
2	4960.021	50.11	0.52	50.63	74.00	-23.37	peak			
3	4960.021	39.97	0.52	40.49	54.00	-13.51	AVG			





**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1007	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

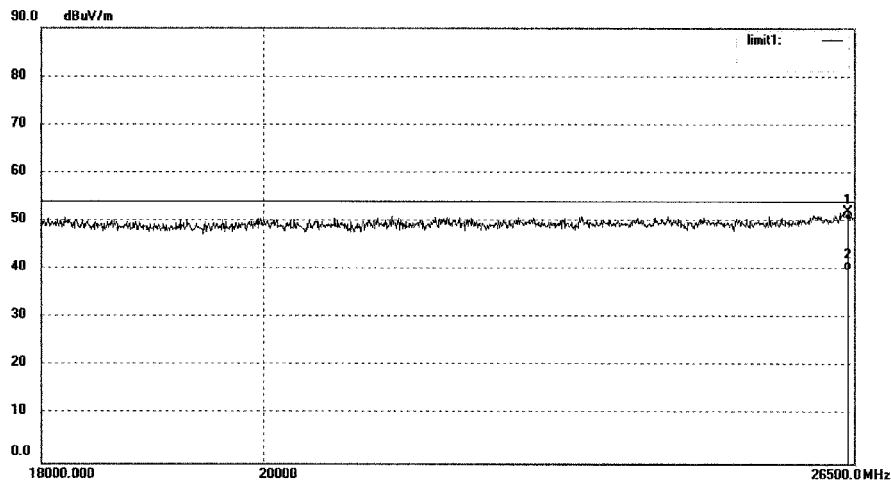


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26428.207	35.67	16.50	52.17	74.00	-21.83	peak			
2	26428.207	23.37	16.50	39.87	54.00	-14.13	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1008	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

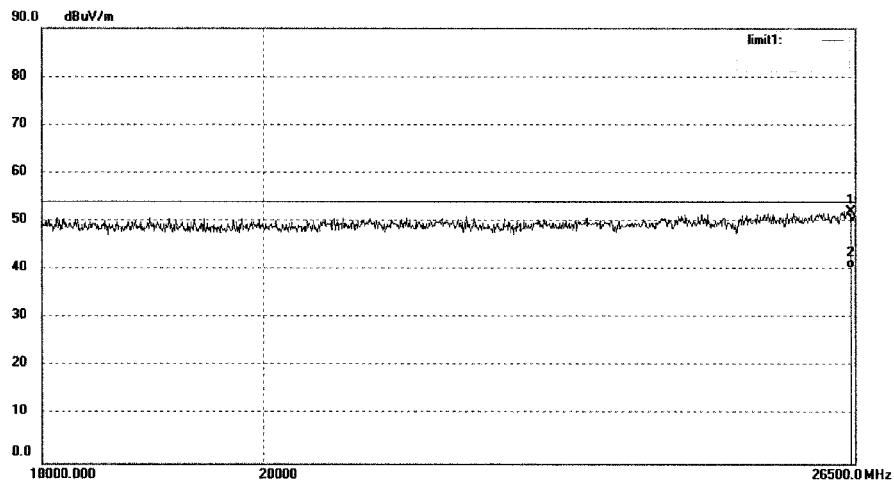


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26458.952	35.13	16.93	52.06	74.00	-21.94	peak			
2	26458.952	23.45	16.93	40.38	54.00	-13.62	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A.Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1010	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

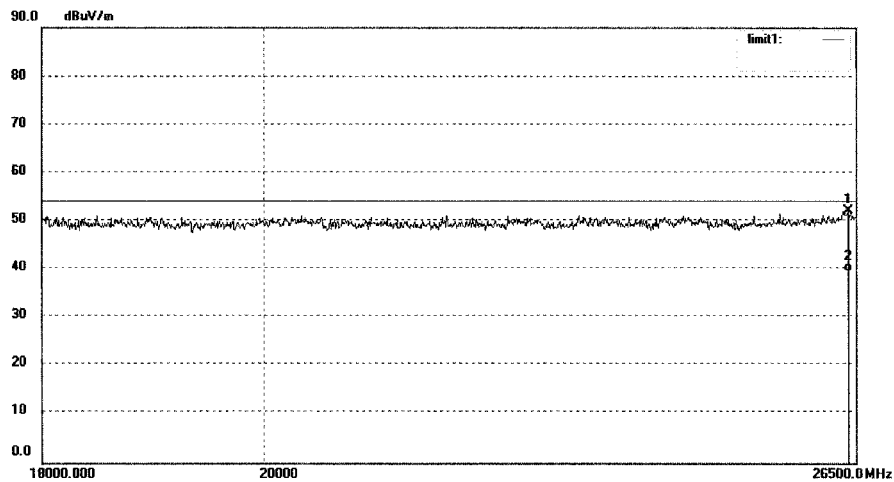


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26407.731	35.48	16.50	51.98	74.00	-22.02	peak			
2	26407.731	23.05	16.50	39.55	54.00	-14.45	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1009	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2441MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

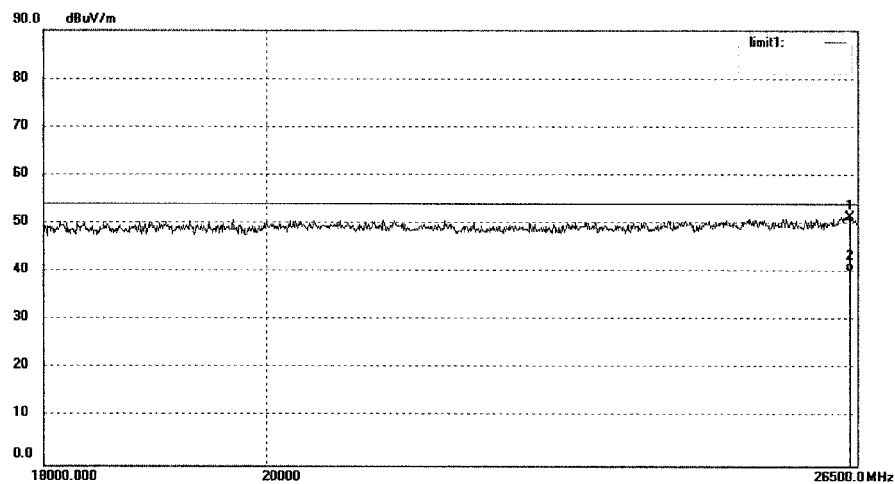

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26417.967	34.54	16.95	51.49	74.00	-22.51	peak			
2	26417.967	23.15	16.95	40.10	54.00	-13.90	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1011	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

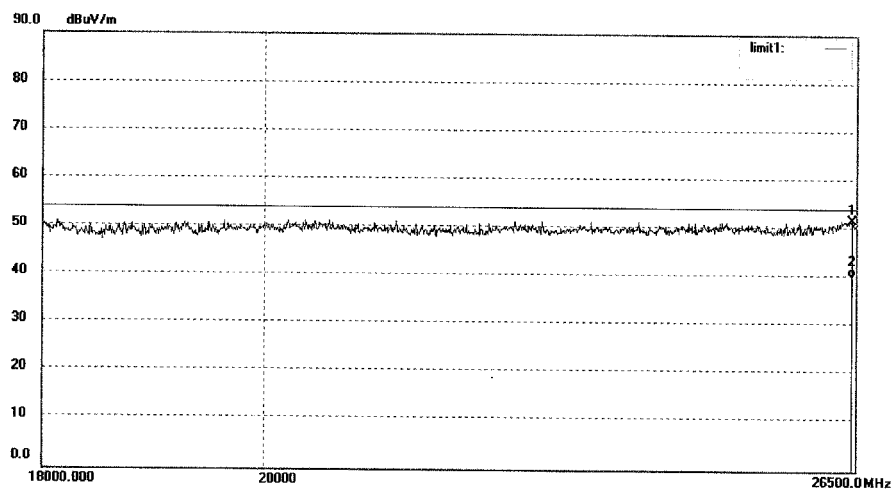


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26448.699	35.11	16.50	51.61	74.00	-22.39	peak			
2	26448.699	23.58	16.50	40.08	54.00	-13.92	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1012	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

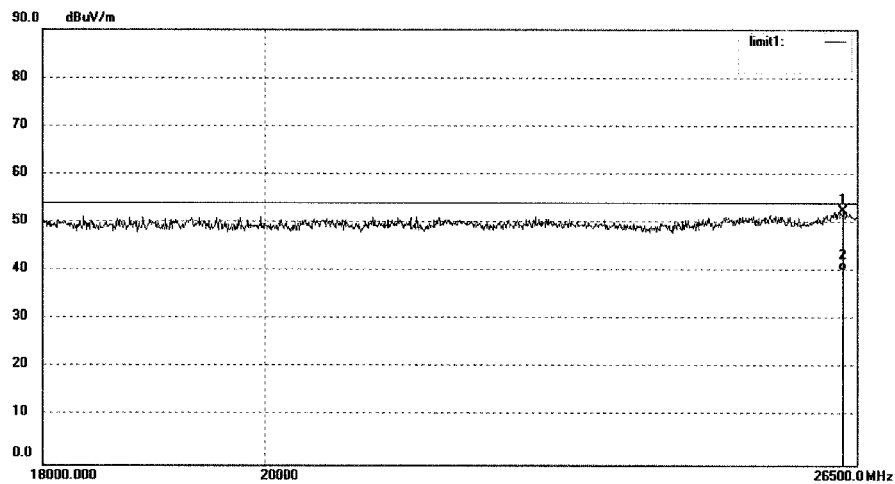


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26336.188	35.42	17.01	52.43	74.00	-21.57	peak			
2	26336.188	23.26	17.01	40.27	54.00	-13.73	AVG			

**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70					
Start	Stop	Step	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Width		Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

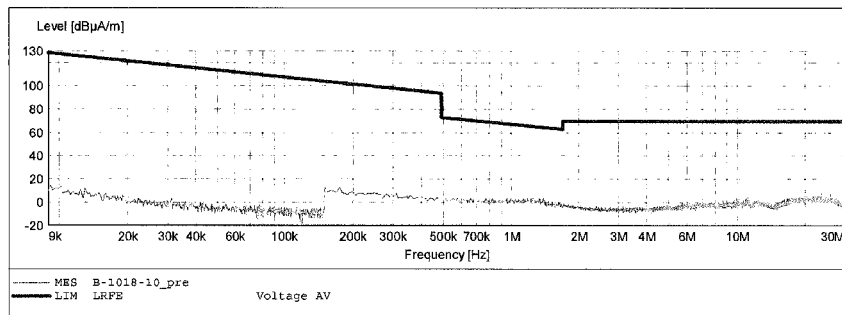


**ACCURATE TECHNOLOGY CO.,LTD**

**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70					
Start	Stop	Step	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Width		Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

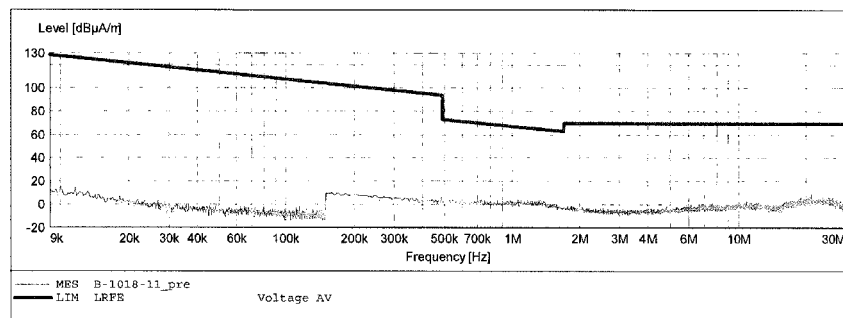




**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2402MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

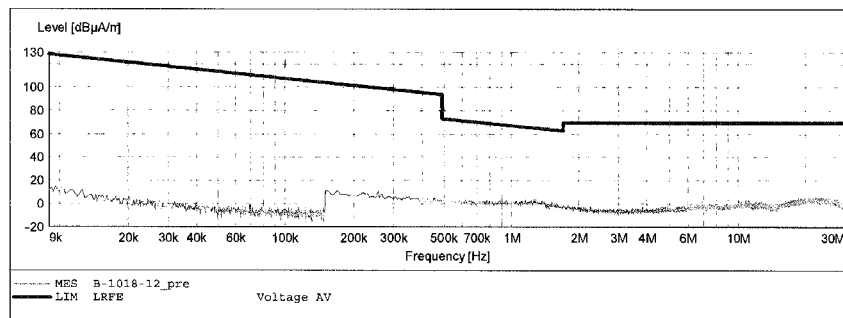


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2440MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Voltage AV

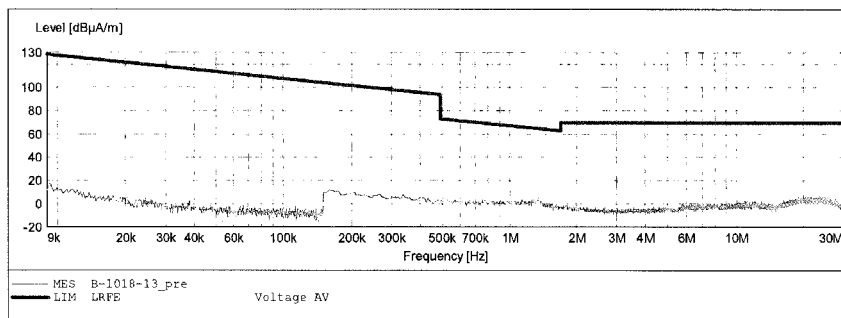


**ACCURATE TECHNOLOGY CO.,LTD**

**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2440MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70				
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

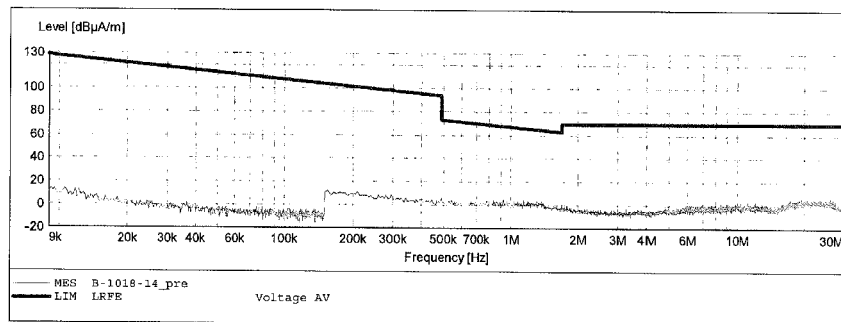


**ACCURATE TECHNOLOGY CO., LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N: NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2440MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

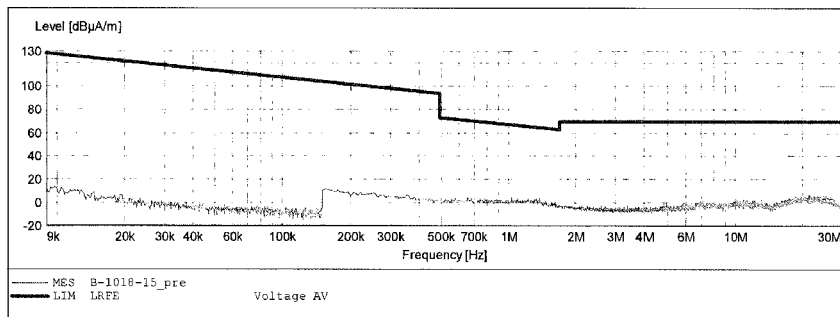


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: X  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:			SUB_STD_VTERM2 1.70			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

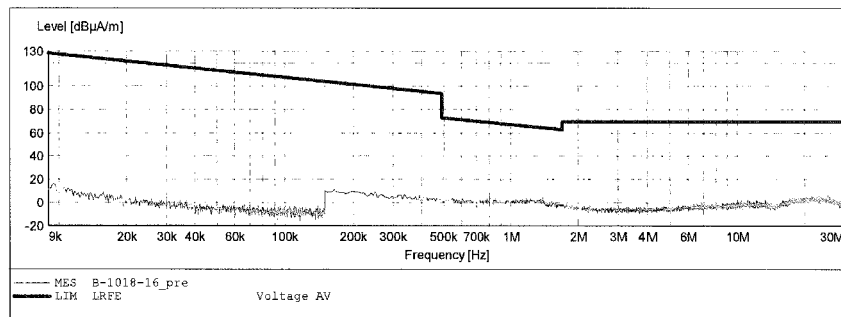


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Y  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Short Description:		_SUB_STD_VTERM2 1.70					
Start	Stop	Step	Detector	Meas.	IF	Transducer	
Frequency	Frequency	Width		Time	Bandw.		
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M	
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M	

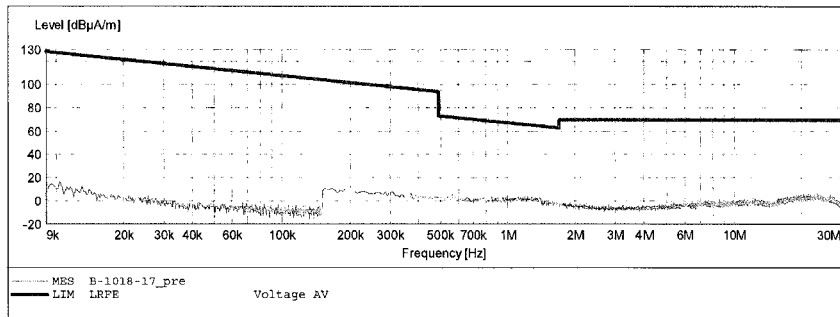


**ACCURATE TECHNOLOGY CO.,LTD**
**FCC Class B 3M Radiated**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: TX 2480MHz  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: AC 120V/60Hz  
 Comment: Z  
 Start of Test: 2014-10-18 /

**SCAN TABLE: "LFRE Fin"**

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
9.0 kHz	150.0 kHz	100.0 Hz	QuasiPeak	1.0 s	200 Hz	1516M
150.0 kHz	30.0 MHz	5.0 kHz	QuasiPeak	1.0 s	9 kHz	1516M

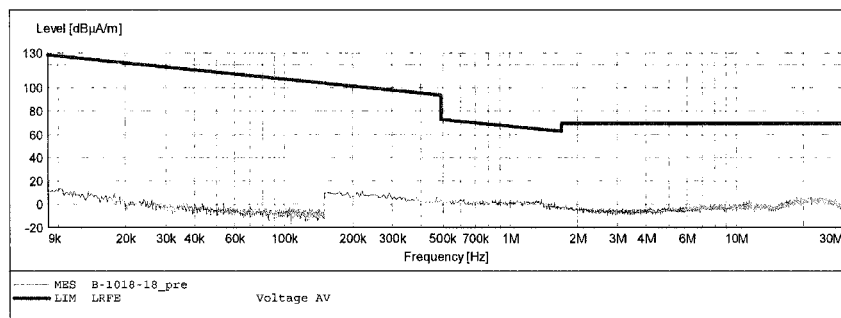



**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A.Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #833	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

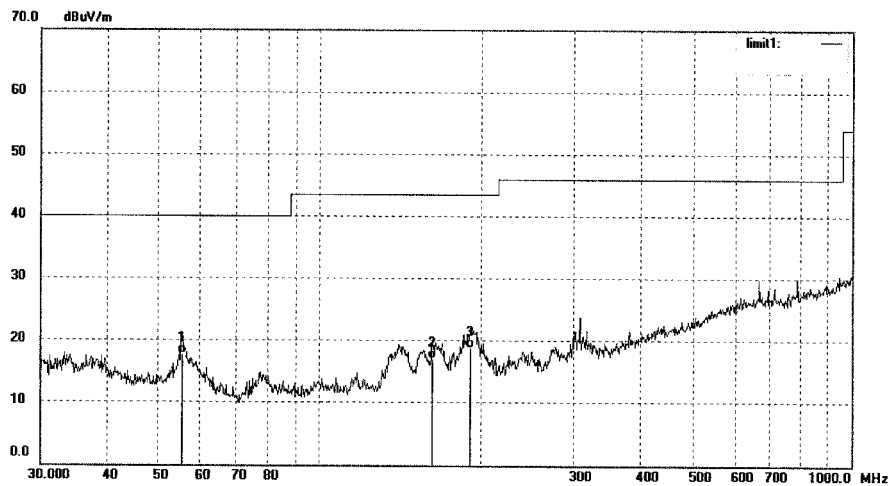

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.4147	30.89	-13.06	17.83	40.00	-22.17	QP			
2	162.6106	31.53	-14.50	17.03	43.50	-26.47	QP			
3	191.7450	31.49	-12.59	18.90	43.50	-24.60	QP			





**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #834	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

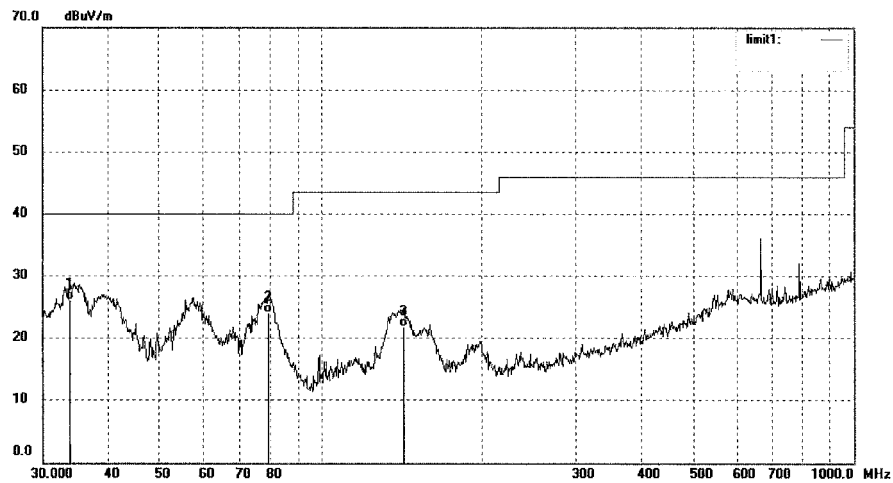

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	33.7986	36.50	-10.30	26.20	40.00	-13.80	QP			
2	78.9651	40.64	-16.57	24.07	40.00	-15.93	QP			
3	142.3243	37.01	-15.24	21.77	43.50	-21.73	QP			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #836

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2440MHz

Model: NS-15MS08

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

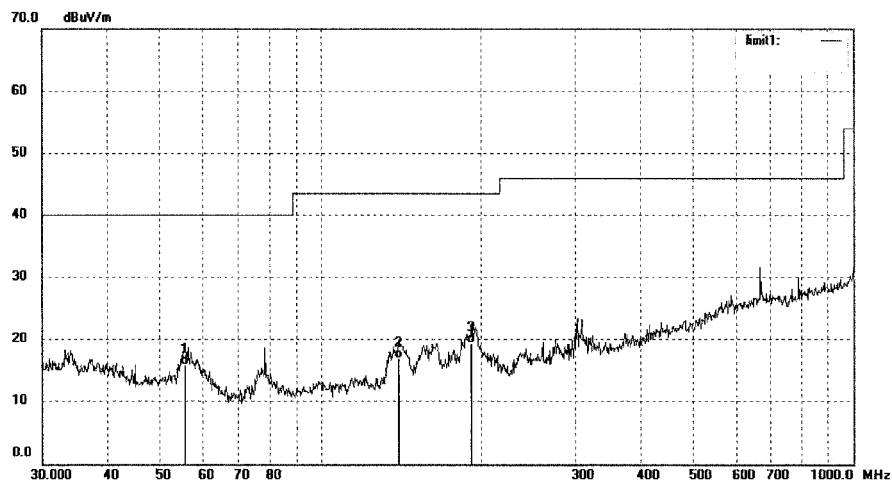


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.8046	28.93	-13.13	15.80	40.00	-24.20	QP			
2	139.8507	32.03	-15.20	16.83	43.50	-26.67	QP			
3	191.7450	32.01	-12.59	19.42	43.50	-24.08	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #835	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

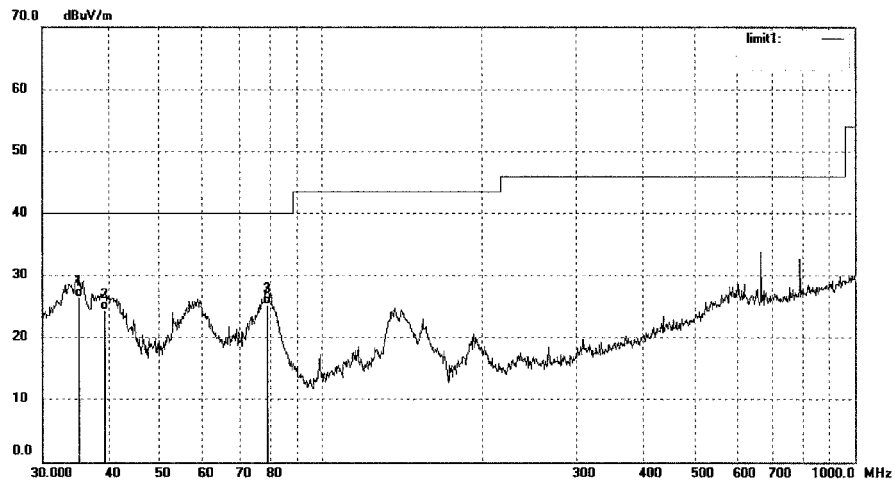


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.2511	36.93	-10.48	26.45	40.00	-13.55	QP			
2	39.4371	35.76	-11.42	24.34	40.00	-15.66	QP			
3	78.6888	41.79	-16.58	25.21	40.00	-14.79	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #837	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

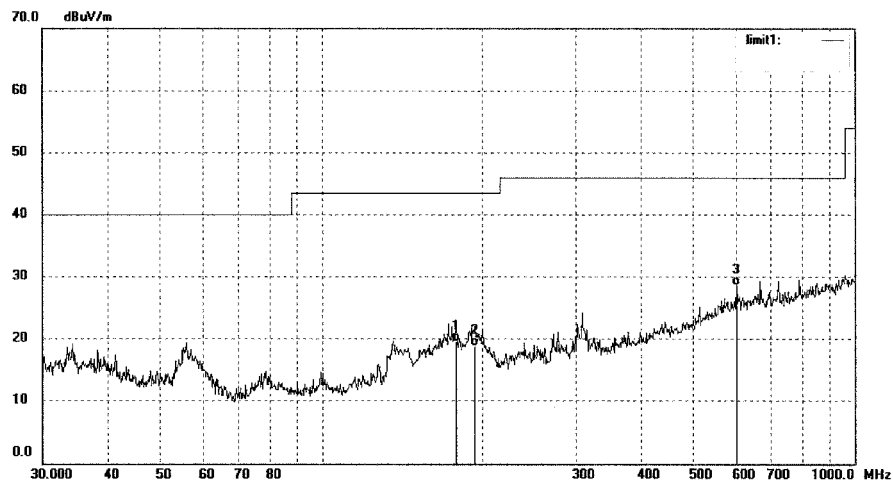

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	179.3863	32.94	-13.49	19.45	43.50	-24.05	QP			
2	194.4533	31.39	-12.49	18.90	43.50	-24.60	QP			
3	601.4265	31.49	-2.96	28.53	46.00	-17.47	QP			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg.A.Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #838	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

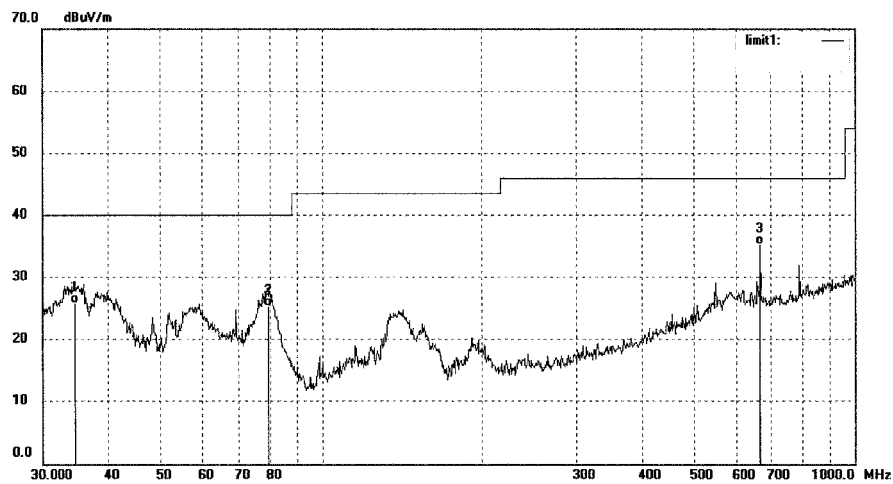


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.6385	36.21	-10.39	25.82	40.00	-14.18	QP			
2	79.2425	41.83	-16.56	25.27	40.00	-14.73	QP			
3	668.1422	37.49	-2.16	35.33	46.00	-10.67	QP			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #877	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

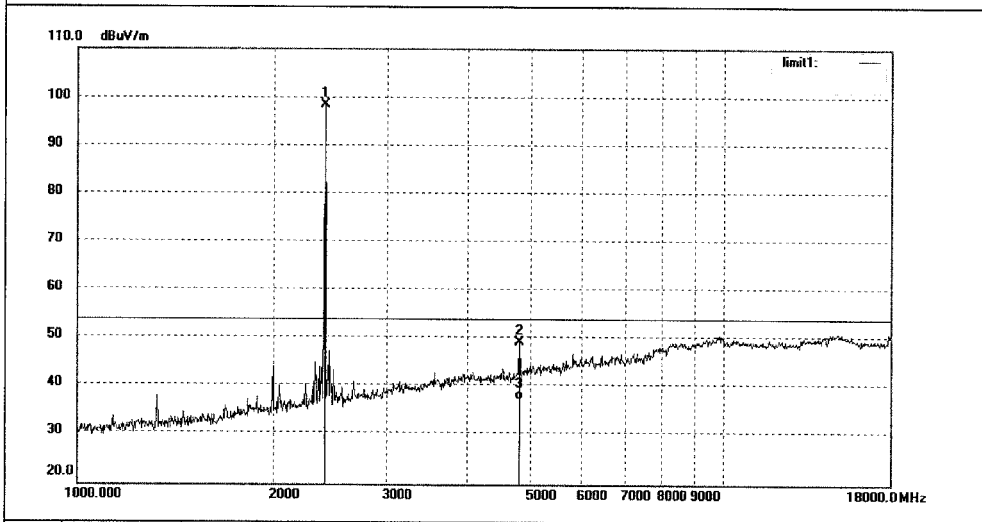


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.87	-7.45	98.42	/	/	peak			
2	4804.028	49.63	-0.30	49.33	74.00	-24.67	peak			
3	4804.028	37.82	-0.30	37.52	54.00	-16.48	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #876	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

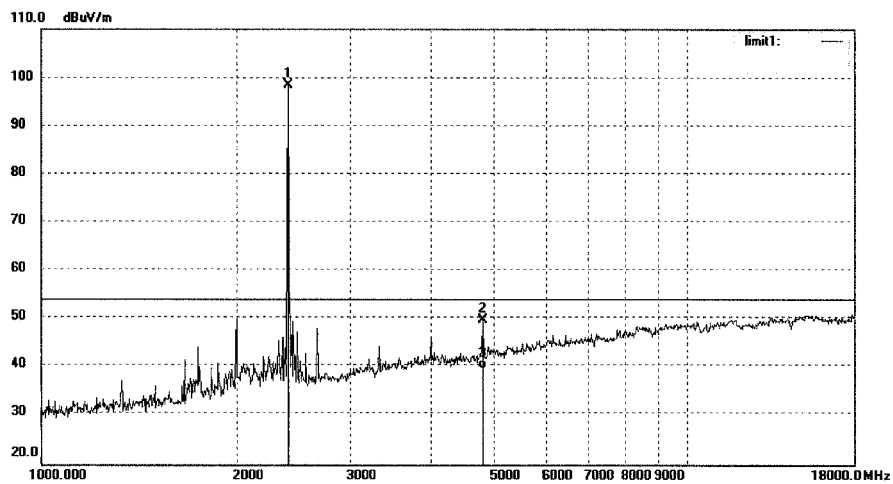


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2402.000	105.87	-7.45	98.42	/	/	peak			
2	4804.019	50.07	-0.30	49.77	74.00	-24.23	peak			
3	4804.019	39.96	-0.30	39.66	54.00	-14.34	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #878	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

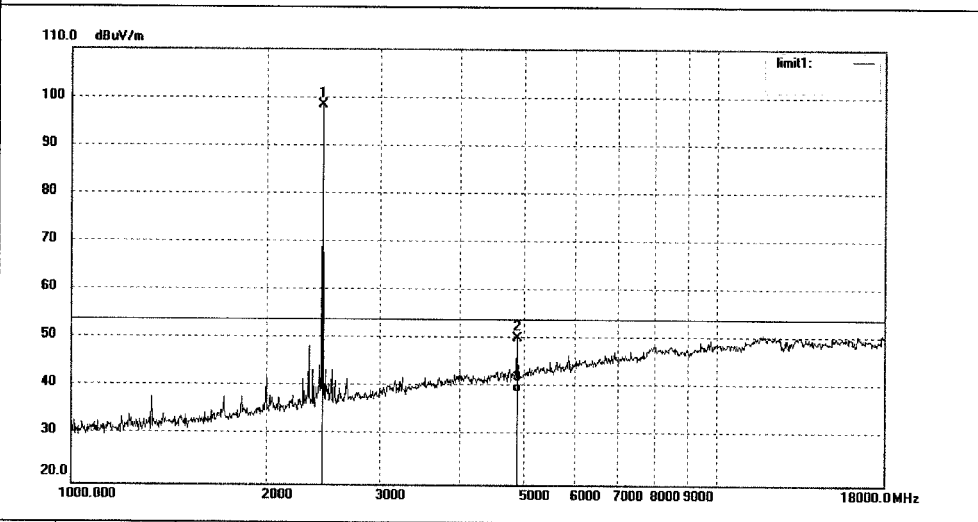

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	105.85	-7.36	98.49	/	/	peak			
2	4880.022	50.03	0.13	50.16	74.00	-23.84	peak			
3	4880.022	38.92	0.13	39.05	54.00	-14.95	AVG			





**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #879	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

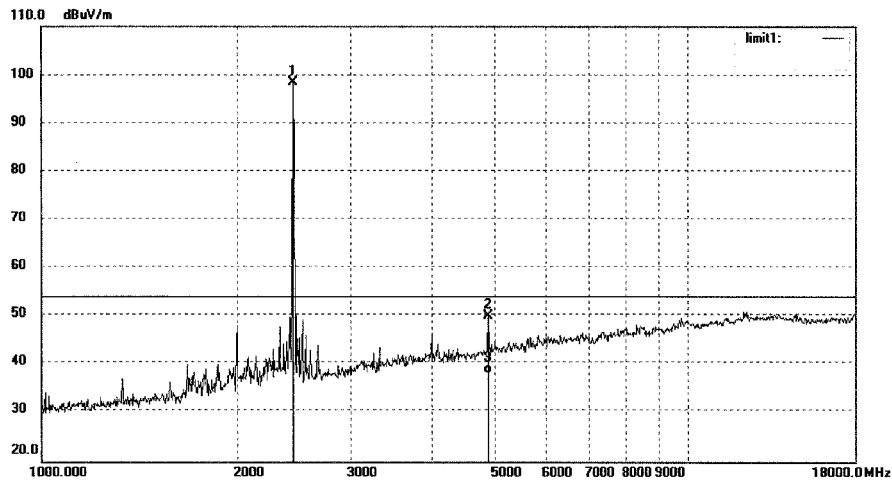


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2440.000	105.85	-7.36	98.49	/	/	peak			
2	4880.030	49.95	0.13	50.08	74.00	-23.92	peak			
3	4880.030	38.03	0.13	38.16	54.00	-15.84	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #881	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

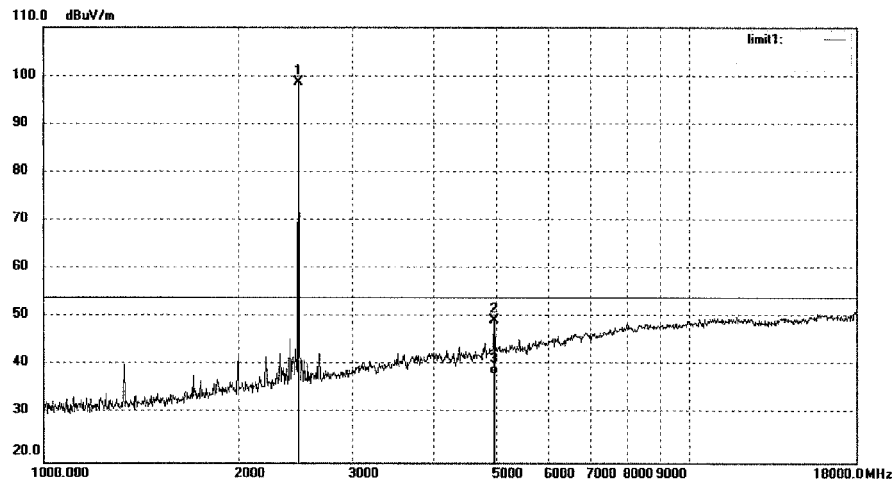


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.91	-7.37	98.54	/	/	peak			
2	4960.013	48.76	0.52	49.28	74.00	-24.72	peak			
3	4960.013	37.57	0.52	38.09	54.00	-15.91	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #880	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

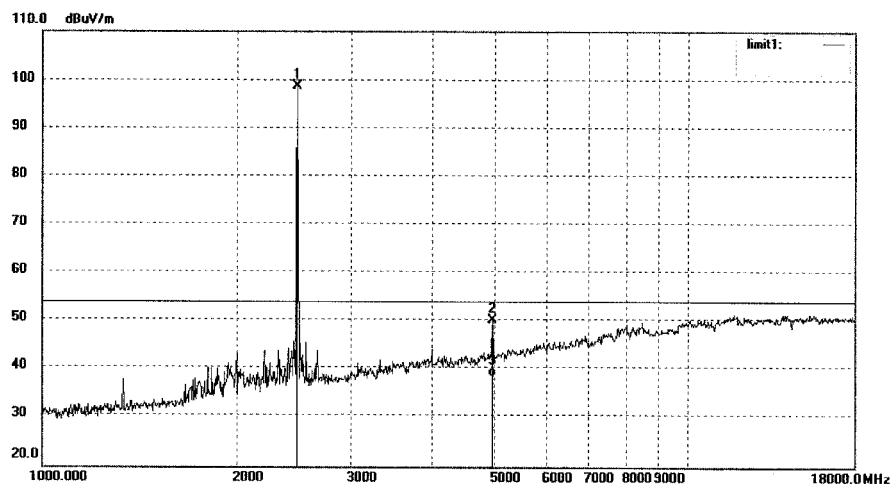

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2480.000	105.91	-7.37	98.54	/	/	peak			
2	4960.007	49.72	0.52	50.24	74.00	-23.76	peak			
3	4960.007	37.93	0.52	38.45	54.00	-15.55	AVG			



**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1014	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

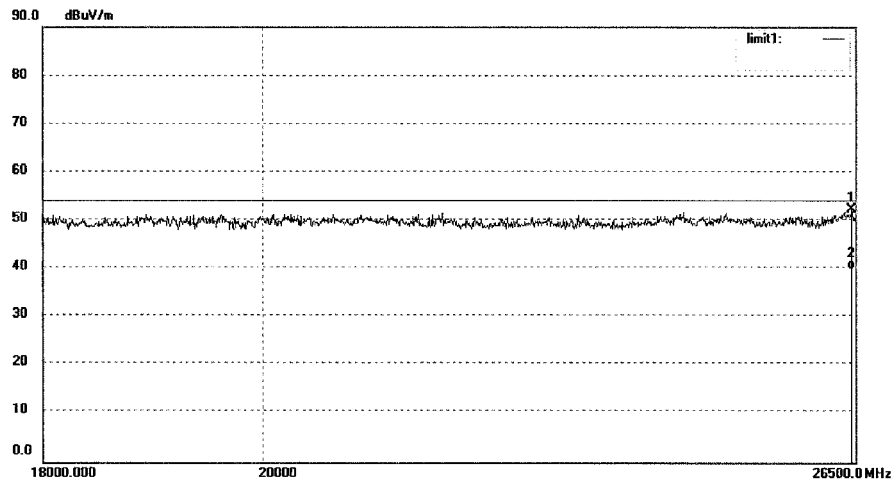


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26458.952	35.31	16.93	52.24	74.00	-21.76	peak			
2	26458.952	23.03	16.93	39.96	54.00	-14.04	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1013	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

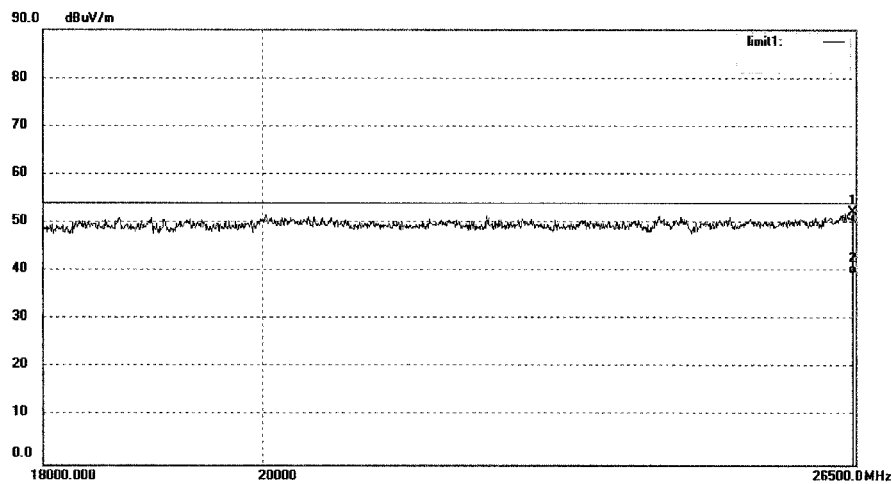


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26469.208	35.80	16.50	52.30	74.00	-21.70	peak			
2	26469.208	22.98	16.50	39.48	54.00	-14.52	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1015	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test Item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

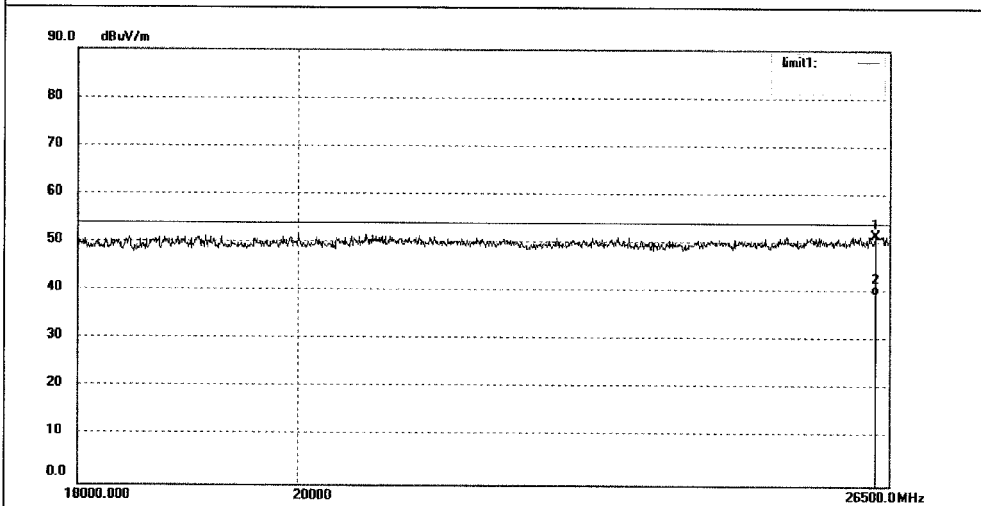


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26336.188	34.68	17.01	51.69	74.00	-22.31	peak			
2	26336.188	22.57	17.01	39.58	54.00	-14.42	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1016	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2440MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

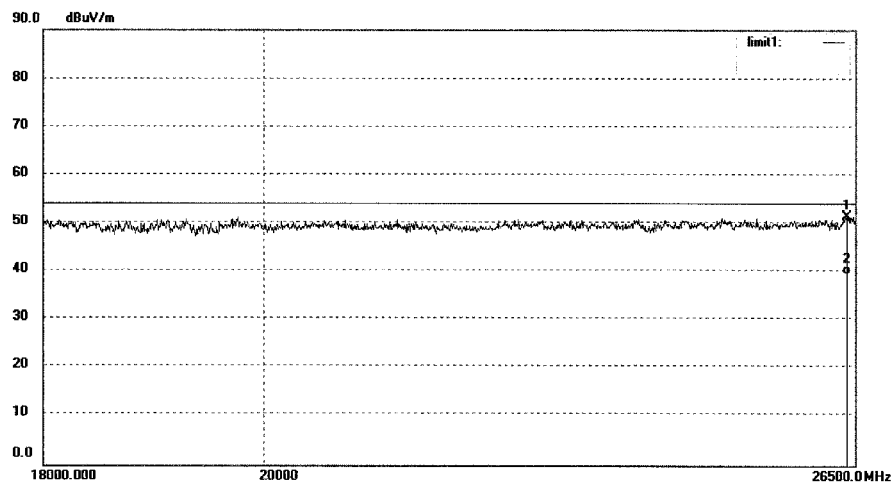


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26397.499	34.93	16.50	51.43	74.00	-22.57	peak			
2	26397.499	22.98	16.50	39.48	54.00	-14.52	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #1018	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

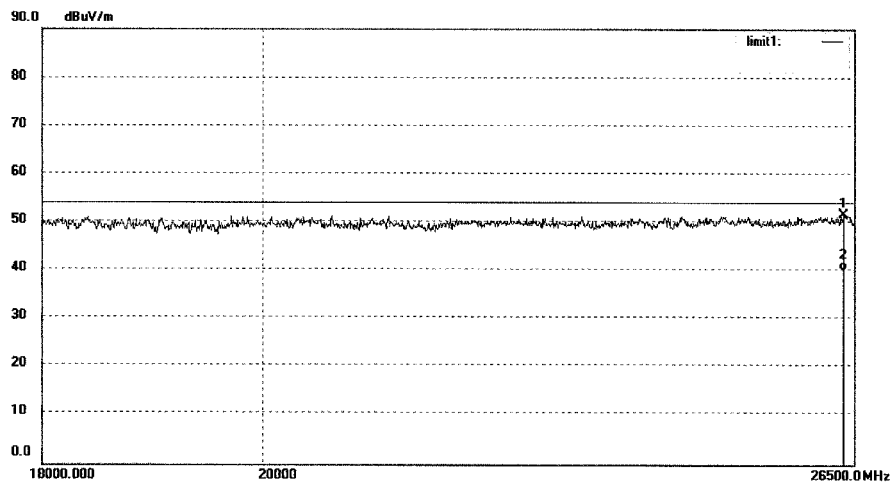

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26377.046	35.22	16.50	51.72	74.00	-22.28	peak			
2	26377.046	23.68	16.50	40.18	54.00	-13.82	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China


Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #1017	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

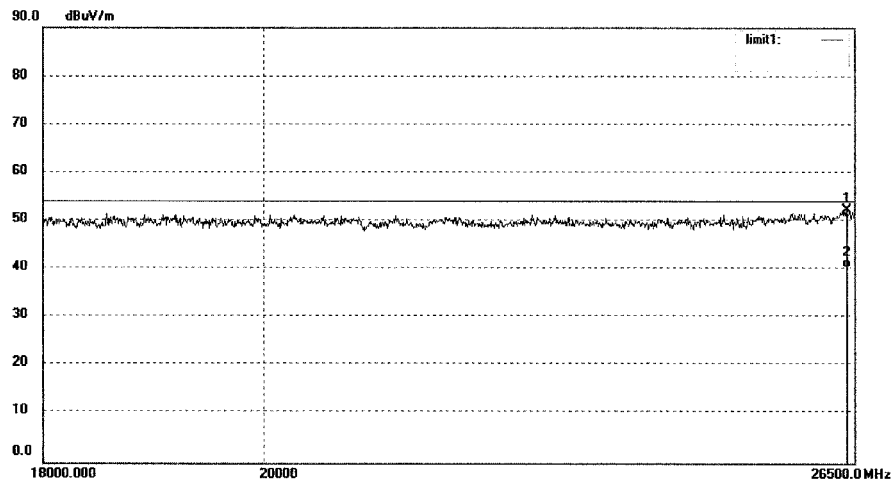

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	26407.731	35.26	16.96	52.22	74.00	-21.78	peak			
2	26407.731	23.43	16.96	40.39	54.00	-13.61	AVG			


### Test Plot of Frequency Band Edge


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #945	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

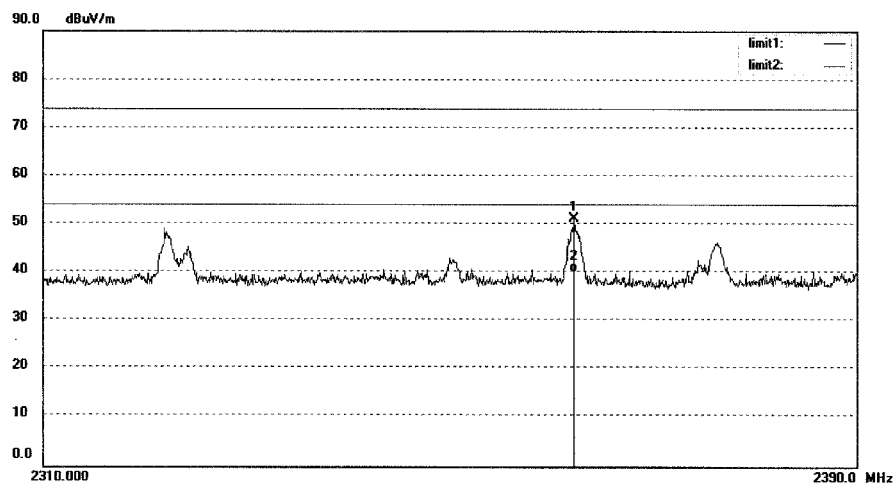


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2362.000	58.98	-7.71	51.27	74.00	-22.73	peak			
2	2362.000	47.82	-7.71	40.11	54.00	-13.89	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #946	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

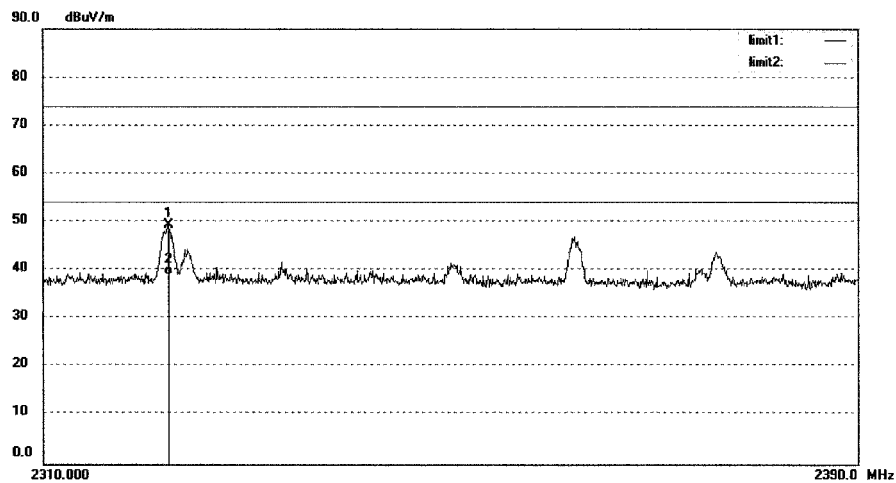

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2322.160	57.23	-7.81	49.42	74.00	-24.58	peak			
2	2322.160	46.87	-7.81	39.06	54.00	-14.94	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #948

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2480MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth

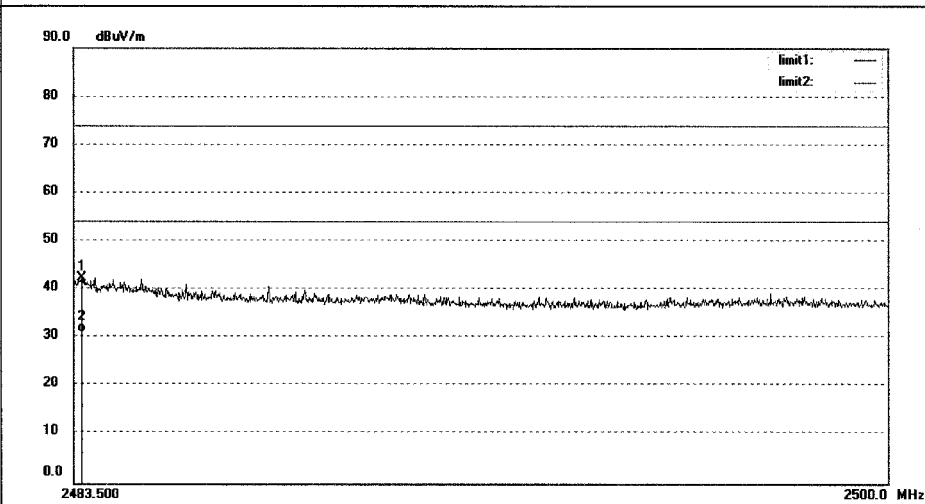

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.665	49.77	-7.37	42.40	74.00	-31.60	peak			
2	2483.665	38.43	-7.37	31.06	54.00	-22.94	AVG			


**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.*
**Seite 141 von 165**  
*Page 141 of 165*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #947	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	

Note: Bluetooth

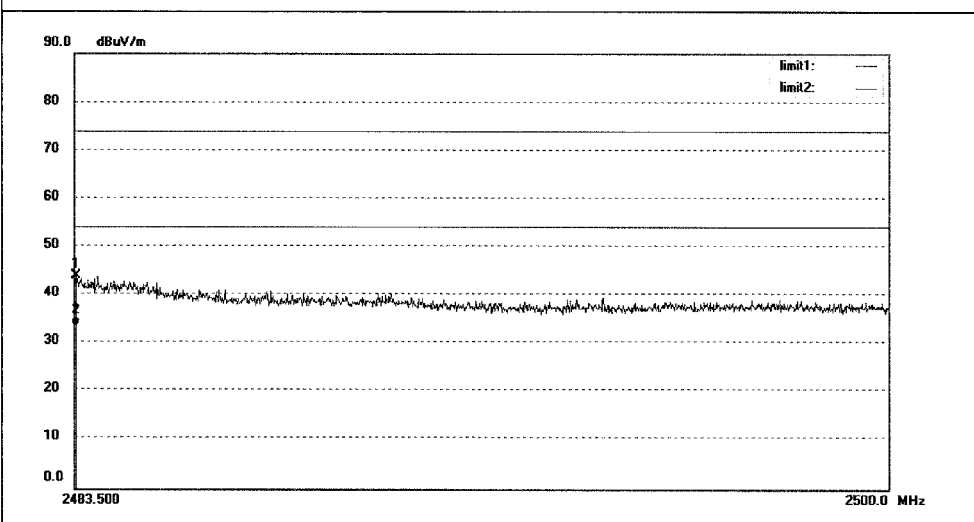


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.533	51.46	-7.37	44.09	74.00	-29.91	peak			
2	2483.533	40.94	-7.37	33.57	54.00	-20.43	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #956	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

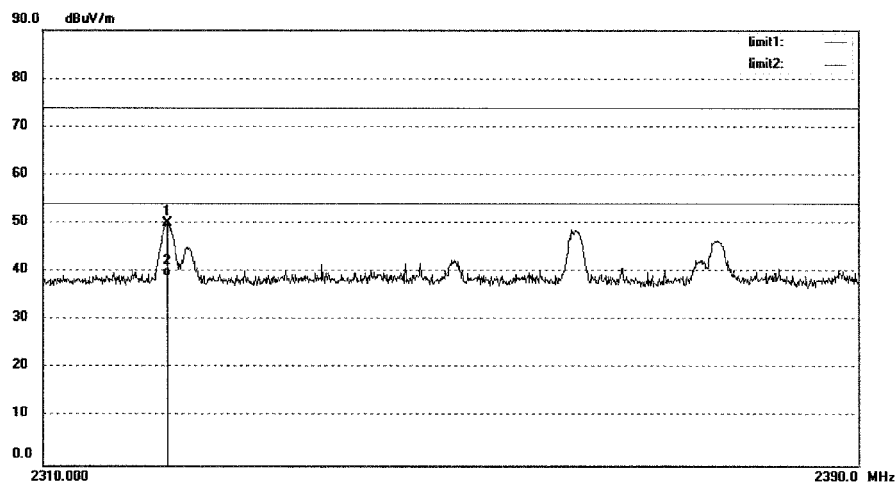

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2321.920	57.91	-7.81	50.10	74.00	-23.90	peak			
2	2321.920	46.85	-7.81	39.04	54.00	-14.96	AVG			

**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.*
**Seite 143 von 165**  
*Page 143 of 165*

**ACCURATE TECHNOLOGY CO., LTD.**

 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber

Tel:+86-0755-26503290

Fax:+86-0755-26503396

Job No.: LAN2014 #955

Standard: FCC (Band Edge)

Test item: Radiation Test

Temp.( C)/Hum.(%) 23 C / 48 %

EUT: Tablet PC

Mode: TX 2402MHz

Model: UB-15MS10

Manufacturer: Zowee

Polarization: Vertical

Power Source: AC 120V/60Hz


Date: 14/10/12/

Time:

Engineer Signature:

Distance: 3m

Note: Bluetooth 4.0

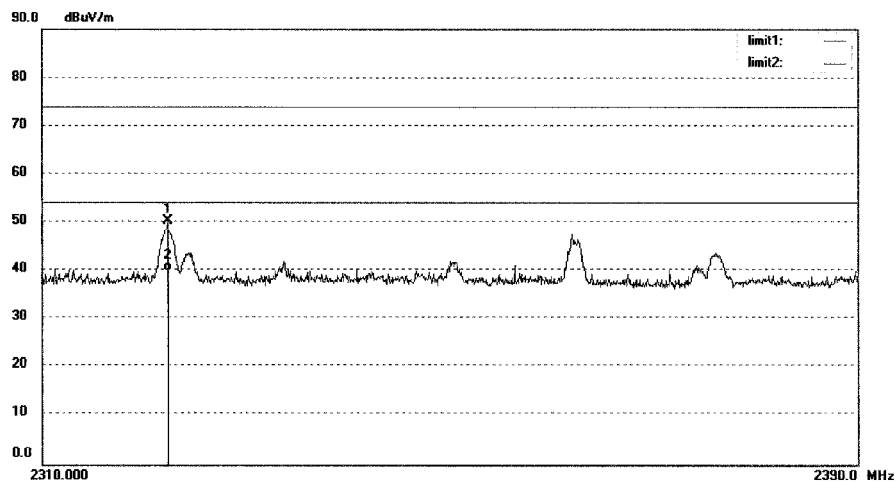


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2322.000	58.14	-7.81	50.33	74.00	-23.67	peak			
2	2322.000	47.79	-7.81	39.98	54.00	-14.02	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #957	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

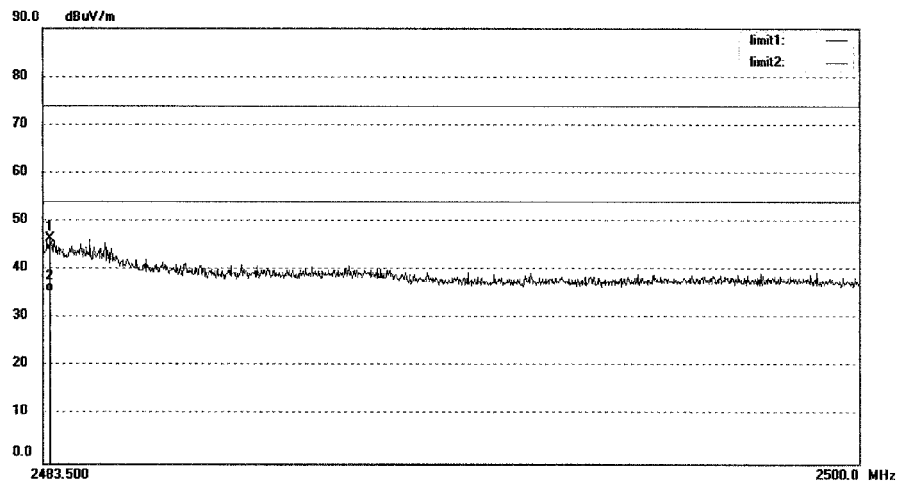

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.648	53.94	-7.37	46.57	74.00	-27.43	peak			
2	2483.648	42.81	-7.37	35.44	54.00	-18.56	AVG			




**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.*
**Seite 145 von 165**  
*Page 145 of 165*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #958	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: UB-15MS10	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

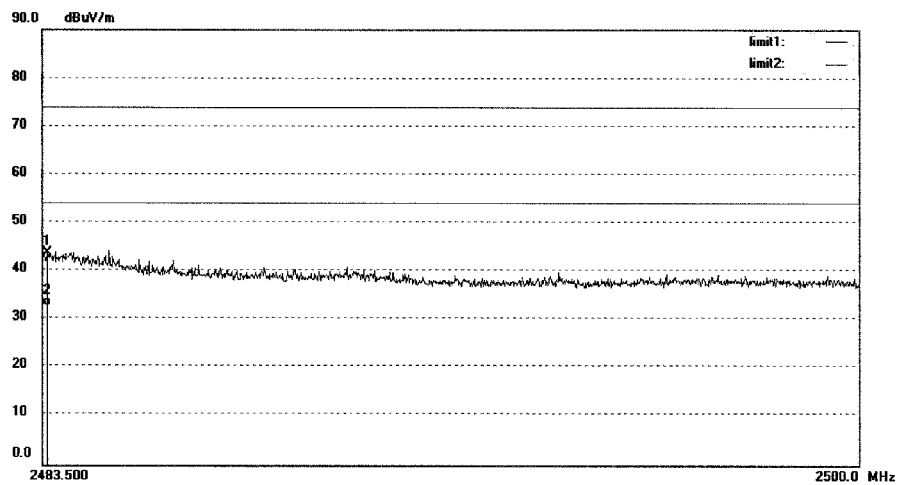


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.599	51.20	-7.37	43.83	74.00	-30.17	peak			
2	2483.599	40.05	-7.37	32.68	54.00	-21.32	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #873	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

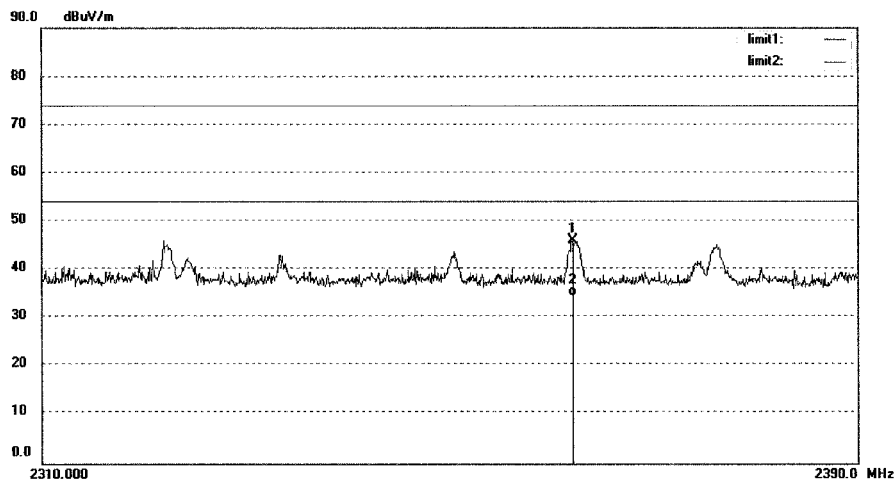


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2361.840	53.62	-7.71	45.91	74.00	-28.09	peak			
2	2361.840	42.18	-7.71	34.47	54.00	-19.53	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #871	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

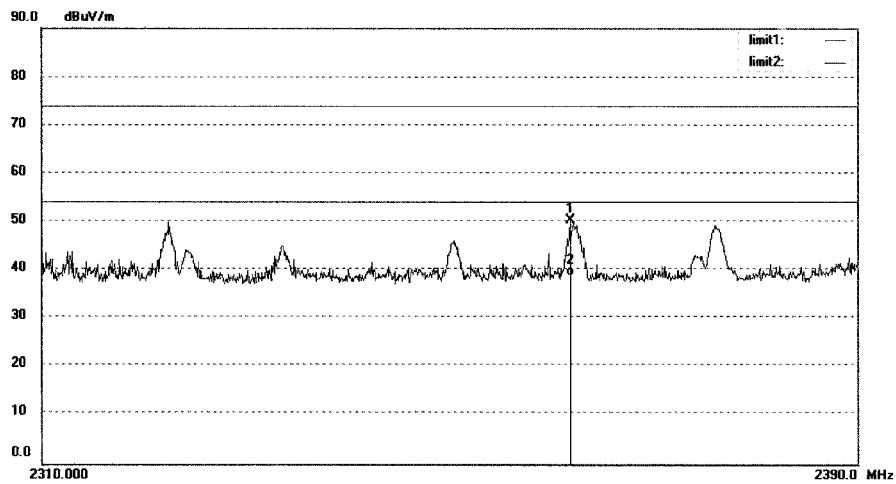


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2361.600	57.95	-7.71	50.24	74.00	-23.76	peak			
2	2361.600	46.58	-7.71	38.87	54.00	-15.13	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #874	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

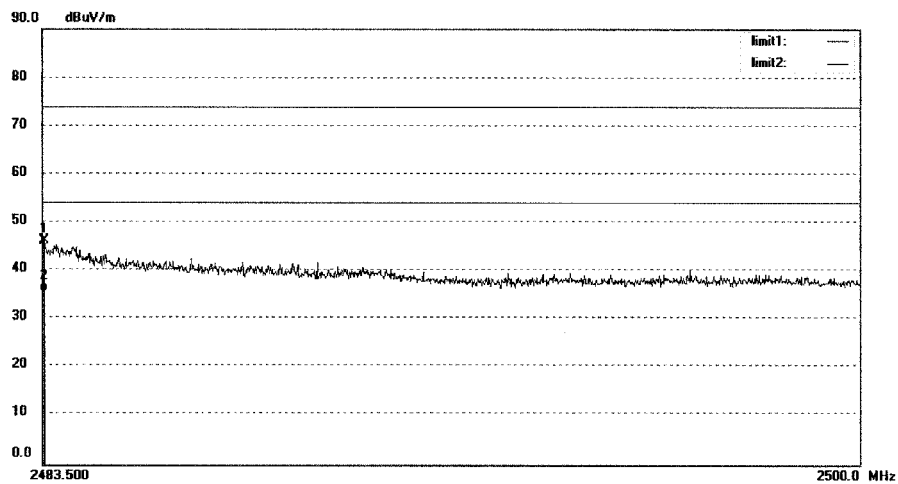

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.533	53.62	-7.37	46.25	74.00	-27.75	peak			
2	2483.533	42.94	-7.37	35.57	54.00	-18.43	AVG			


**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.*
**Seite 149 von 165**  
*Page 149 of 165*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg.A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #875	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth

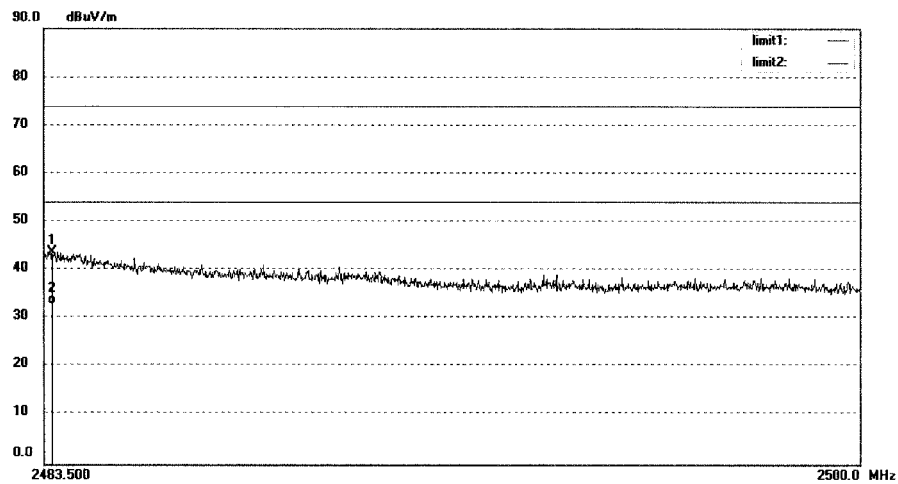


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.665	51.17	-7.37	43.80	74.00	-30.20	peak			
2	2483.665	40.39	-7.37	33.02	54.00	-20.98	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #882	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

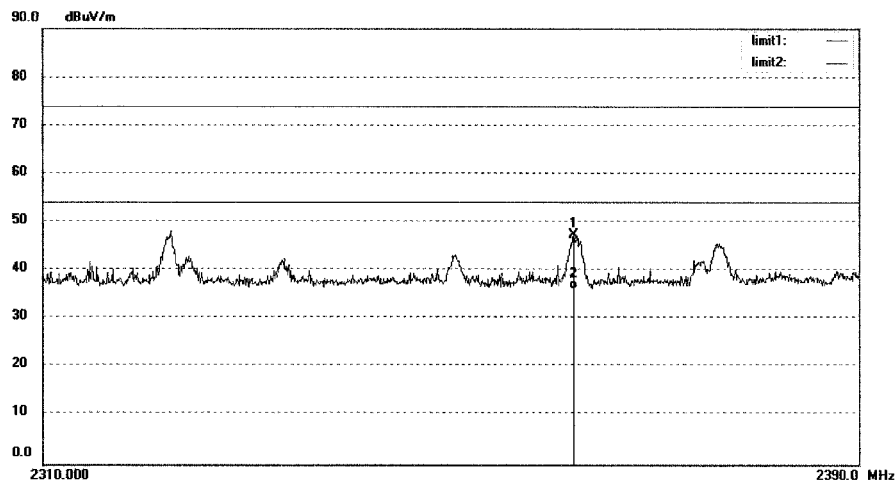


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2361.840	54.98	-7.71	47.27	74.00	-26.73	peak			
2	2361.840	43.86	-7.71	36.15	54.00	-17.85	AVG			


**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #883	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	

Note: Bluetooth 4.0

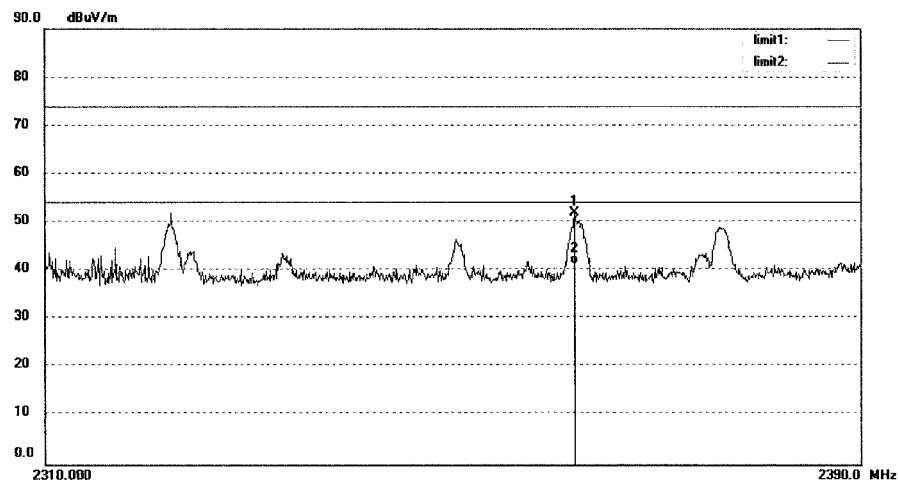


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2361.760	59.53	-7.71	51.82	74.00	-22.18	peak			
2	2361.760	48.92	-7.71	41.21	54.00	-12.79	AVG			

**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.*
**Seite 152 von 165**  
*Page 152 of 165*

**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #886	Polarization: Horizontal
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

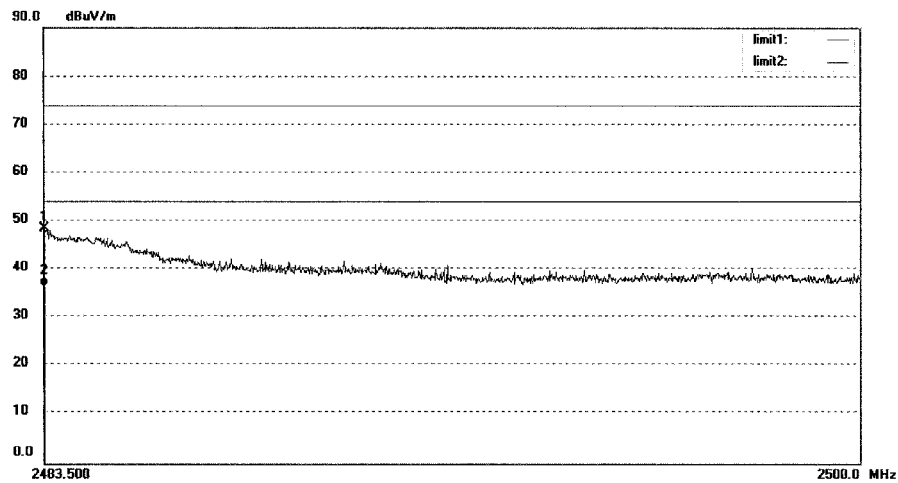


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.517	55.92	-7.37	48.55	74.00	-25.45	peak			
2	2483.517	44.04	-7.37	36.67	54.00	-17.33	AVG			




**ACCURATE TECHNOLOGY CO., LTD.**  
 F1,Bldg,A,Changyuan New Material Port Keyuan Rd,  
 Science & Industry Park,Nanshan Shenzhen,P.R.China

 Site: 1# Chamber  
 Tel:+86-0755-26503290  
 Fax:+86-0755-26503396

Job No.: LAN2014 #885	Polarization: Vertical
Standard: FCC (Band Edge)	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 14/10/12/
Temp.( C)/Hum.(%) 23 C / 48 %	Time:
EUT: Tablet PC	Engineer Signature:
Mode: TX 2480MHz	Distance: 3m
Model: NS-15MS08	
Manufacturer: Zowee	
Note: Bluetooth 4.0	

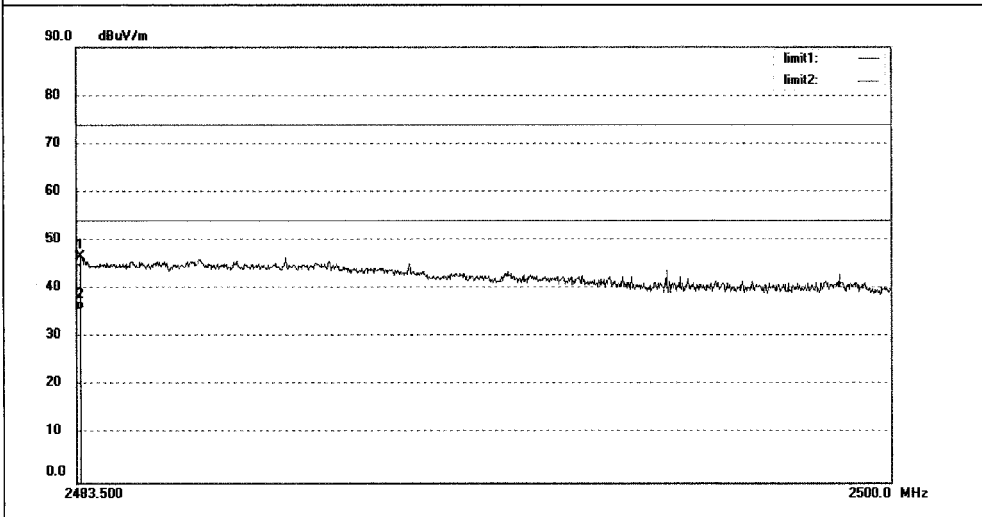

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.582	54.08	-7.37	46.71	74.00	-27.29	peak			
2	2483.582	43.05	-7.37	35.68	54.00	-18.32	AVG			



**Prüfbericht - Nr.: 17043527 001**  
Test Report No.Seite 155 von 165  
Page 155 of 165

### 5.1.9 Number of hopping frequency

**RESULT:****Pass**

Date of testing : 2014-10-10  
Test standard : FCC part 15.247(a)(1)(iii)  
RSS-210 A8.1(d)  
Basic standard : ANSI C63.4: 2003  
Limits :  $\geq 15$  non-overlapping channels  
Kind of test site : Shield room

**Test setup**

Test Channel : Low/ Middle/ High  
Operation Mode : A.1.a  
Ambient temperature : 25°C  
Relative humidity : 52%  
Atmospheric pressure : 101kPa

**Table 15: Test result of Number of hopping frequency**

Frequency Range	Measured Quantity of Hopping Channel	Limit	Result
2402 to 2480MHz	79	$\geq 15$	Pass



**Prüfbericht - Nr.: 17043527 001**  
*Test Report No.***Seite 157 von 165**  
*Page 157 of 165*

### 5.1.11 Conducted emissions

**RESULT:****Pass**

Date of testing : 2014-10-13  
Test standard : FCC Part 15.207  
RSS-210 Clause 2.6  
Basic standard : ANSI C63.4: 2003  
Frequency range : 0.15 – 30MHz  
Limits : FCC Part 15.207  
Table 4 of RSS-Gen  
Kind of test site : Shield room

**Test setup**

Input Voltage : AC 120V, 60Hz  
Operation Mode : A  
Earthing : Not Connected  
Ambient temperature : 25°C  
Relative humidity : 52%  
Atmospheric pressure : 101kPa


For details refer to following test plot.

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: On with Bluetooth  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: L 120V/60Hz  
 Comment: Mains Port  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK6126 2008  
 Average

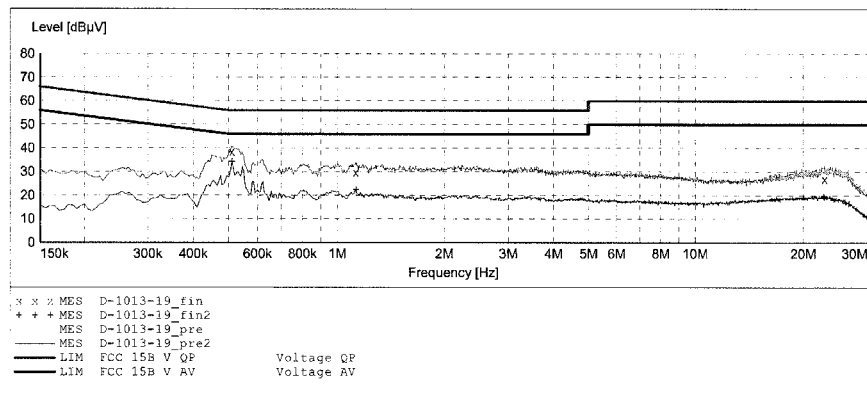
**MEASUREMENT RESULT: "D-1013-19\_fin"**

10/13/2014

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.510000	38.50	10.7	56	17.5	QP	L1	GND
1.130000	29.70	10.9	56	26.3	QP	L1	GND
22.850000	27.00	11.4	60	33.0	QP	L1	GND

**MEASUREMENT RESULT: "D-1013-19\_fin2"**

10/13/2014

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.510000	34.20	10.7	46	11.8	AV	L1	GND
1.130000	22.40	10.9	46	23.6	AV	L1	GND
22.750000	19.40	11.4	50	30.6	AV	L1	GND

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**


EUT: Tablet PC M/N:UB-15MS10  
 Manufacturer: Zowee  
 Operating Condition: On with Bluetooth  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: N 120V/60Hz  
 Comment: Mains Port  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  

Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer
150.0 kHz	30.0 MHz	4.5 kHz	QuasiPeak	1.0 s	9 kHz	NSLK8126 2008

 Average

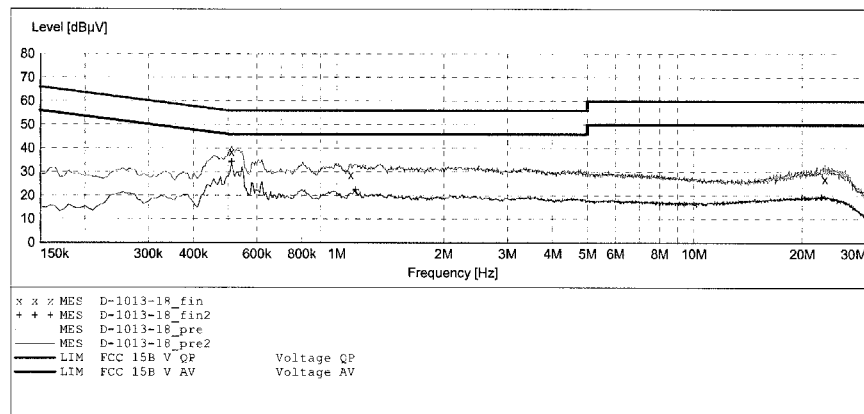
**MEASUREMENT RESULT: "D-1013-18\_fin"**

10/13/2014

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.510000	38.50	10.7	56	17.5	QP	N	GND
1.095000	28.70	10.9	56	27.3	QP	N	GND
23.075000	27.10	11.4	60	32.9	QP	N	GND

**MEASUREMENT RESULT: "D-1013-18\_fin2"**

10/13/2014


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.510000	34.20	10.7	46	11.8	AV	N	GND
1.130000	22.40	10.9	46	23.6	AV	N	GND
22.550000	19.30	11.4	50	30.7	AV	N	GND

**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: On with Bluetooth  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: L 120V/60Hz  
 Comment: Mains Port  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

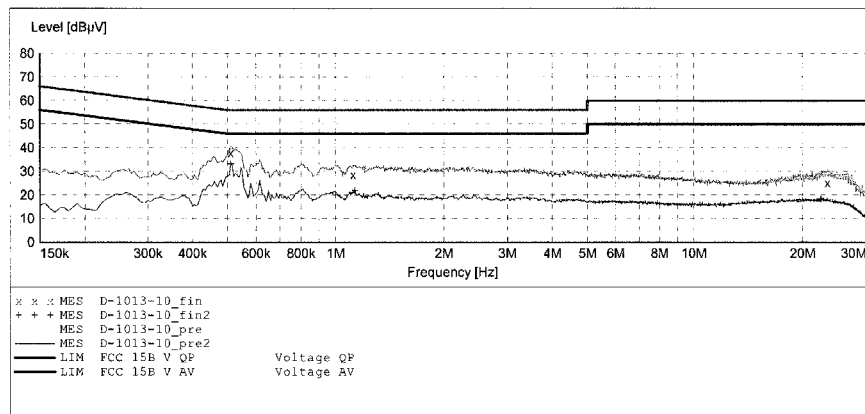
**MEASUREMENT RESULT: "D-1013-10\_fin"**

10/13/2014

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.510000	37.80	10.7	56	18.2	QP	L1	GND
1.120000	28.50	10.9	56	27.5	QP	L1	GND
23.400000	25.10	11.5	60	34.9	QP	L1	GND

**MEASUREMENT RESULT: "D-1013-10\_fin2"**

10/13/2014

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.510000	33.10	10.7	46	12.9	AV	L1	GND
1.130000	21.80	10.9	46	24.2	AV	L1	GND
22.425000	18.20	11.4	50	31.8	AV	L1	GND




**ACCURATE TECHNOLOGY CO., LTD**
**CONDUCTED EMISSION STANDARD FCC PART 15 B**

EUT: Tablet PC M/N:NS-15MS08  
 Manufacturer: Zowee  
 Operating Condition: On with Bluetooth  
 Test Site: 1#Shielding Room  
 Operator: LAN  
 Test Specification: N 120V/60Hz  
 Comment: Mains Port  
 Start of Test: 10/13/2014 /

**SCAN TABLE: "V 150K-30MHz fin"**

Short Description: \_SUB\_STD\_VTERM2 1.70  
 Start Stop Step Detector Meas. IF Transducer  
 Frequency Frequency Width Time Bandw.  
 150.0 kHz 30.0 MHz 4.5 kHz QuasiPeak 1.0 s 9 kHz NSLK8126 2008  
 Average

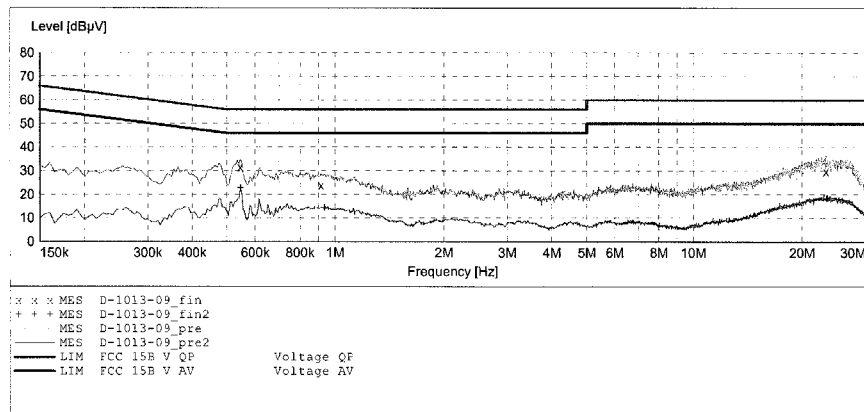
**MEASUREMENT RESULT: "D-1013-09\_fin"**


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.545000	31.60	10.7	56	24.4	QP	N	GND
0.915000	23.80	10.8	56	32.2	QP	N	GND
23.275000	29.80	11.5	60	30.2	QP	N	GND

**MEASUREMENT RESULT: "D-1013-09\_fin2"**


Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.545000	22.70	10.7	46	23.3	AV	N	GND
0.935000	14.30	10.8	46	31.7	AV	N	GND
23.375000	18.30	11.5	50	31.7	AV	N	GND

## 6. Photographs of the Test Set-Up


Photograph 1: Set-up for Conducted Emissions

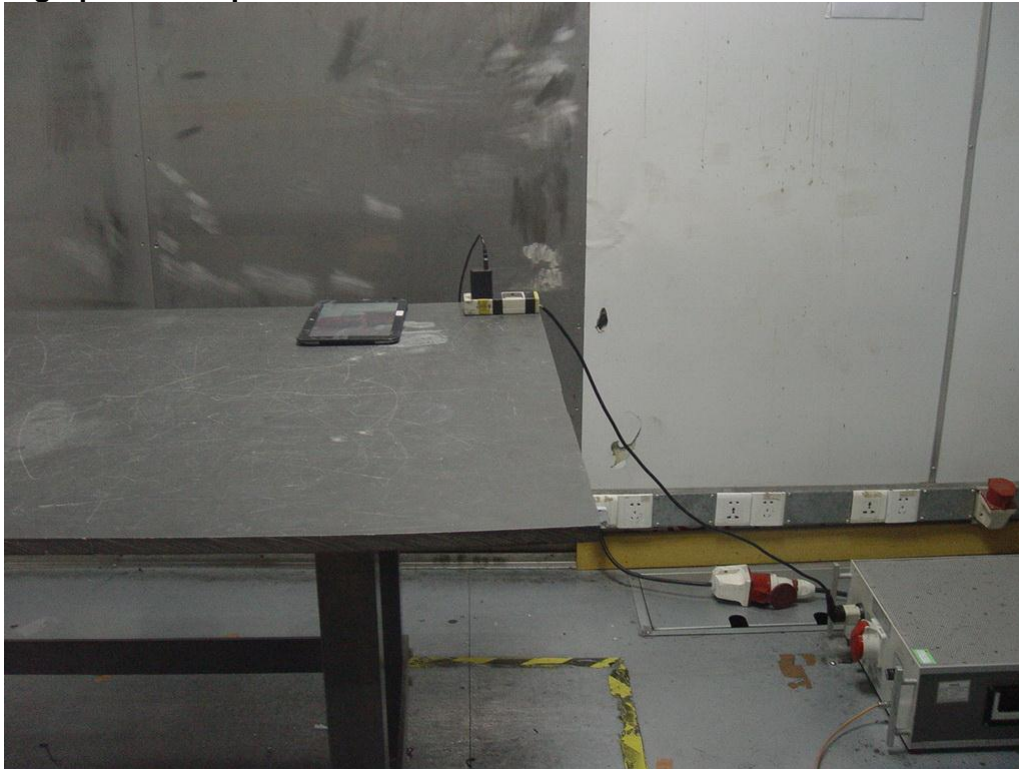


Photograph 2: Set-up for Spurious Emissions for below 30MHz

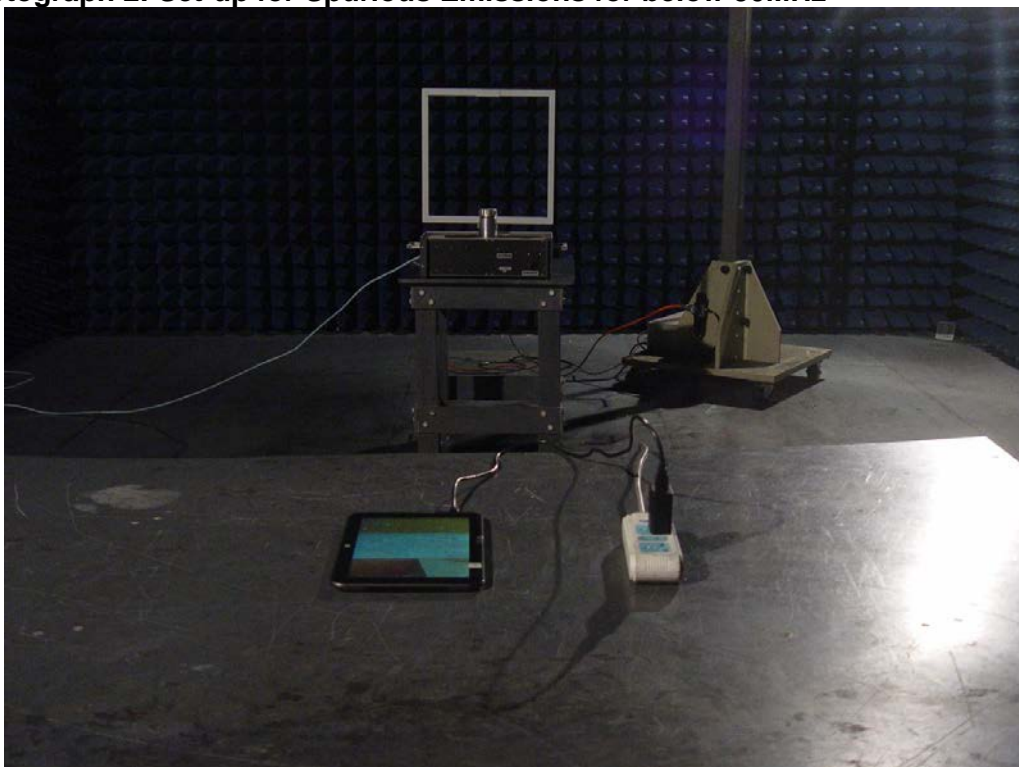


**Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz**

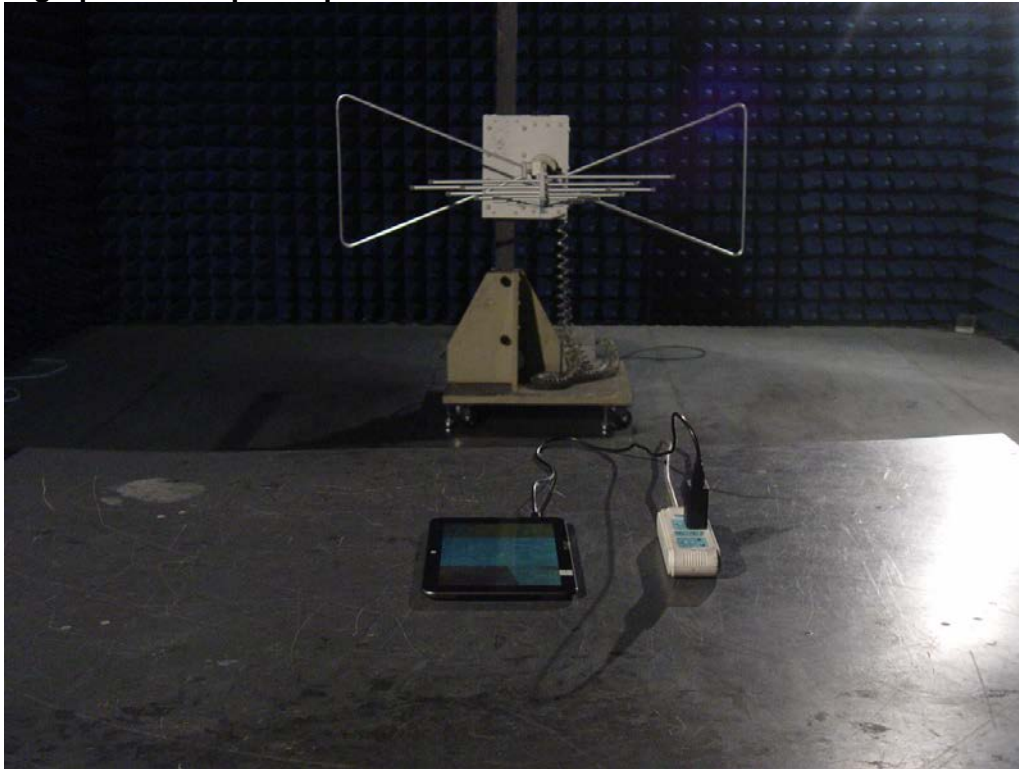

**Photograph 4: Set-up for Spurious Emissions for 1 - 18GHz**

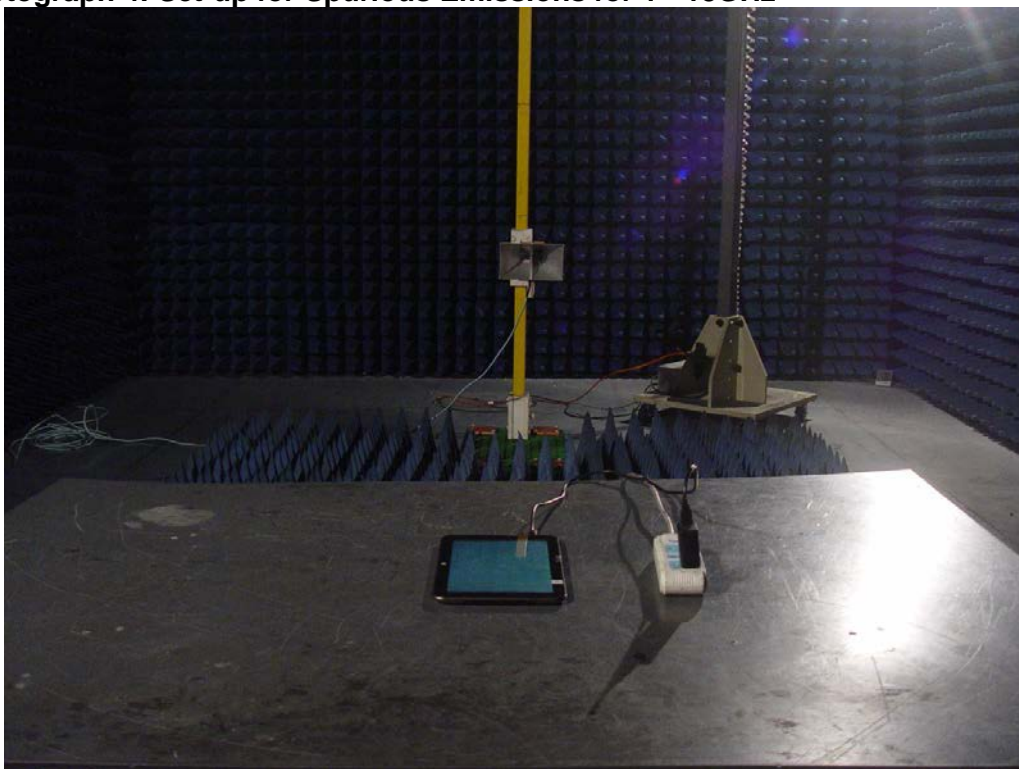

**Photograph 5: Set-up for Spurious Emissions for 18 - 26.5GHz**

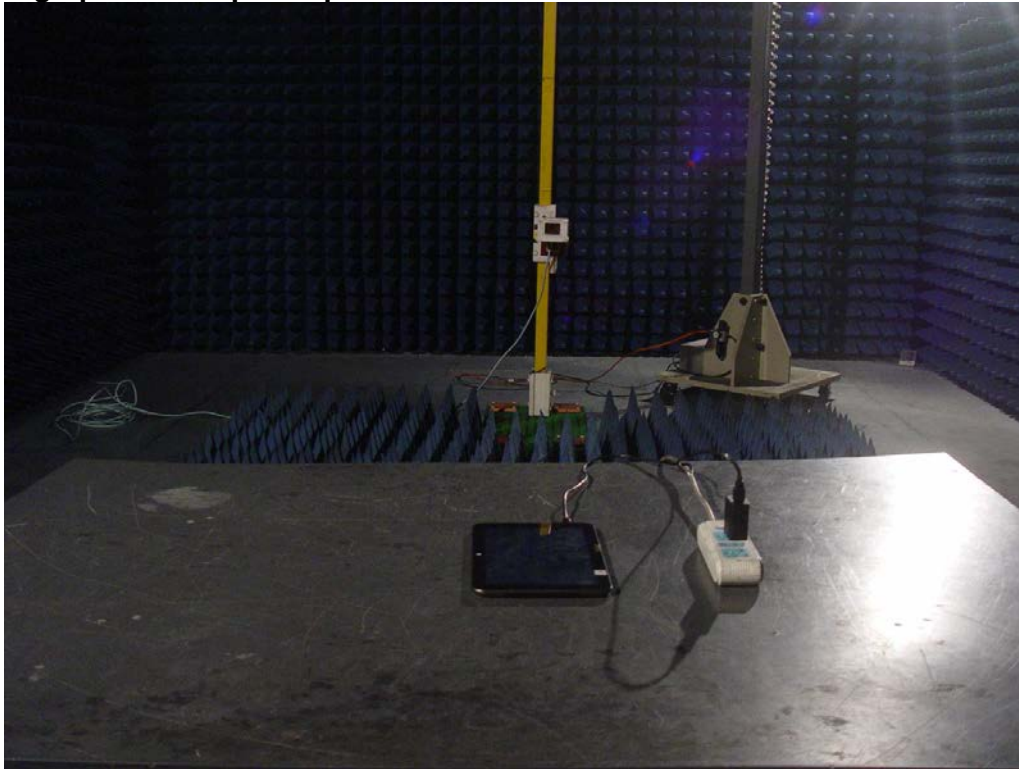

## 7. List of Tables

Table 1: List of Test and Measurement Equipment .....	5
Table 2: Measurement Uncertainty .....	6
Table 3: Technical Specification of Bluetooth (BDR & EDR mode) .....	7
Table 4: RF channel and frequency of Bluetooth (BDR & EDR mode).....	7
Table 5: Technical Specification of Bluetooth (LE mode) .....	8
Table 6: RF channel and frequency of Bluetooth (LE mode).....	8
Table 7: Test result of Peak Output Power of Bluetooth (BDR mode).....	15
Table 8: Test result of Peak Output Power of Bluetooth (EDR mode).....	15
Table 9: Test result of Peak Output Power of Bluetooth (LE mode) .....	15
Table 10: Test result of 20dB & 99% Bandwidth of BDR mode .....	16
Table 11: Test result of 20dB & 99% Bandwidth of EDR mode .....	16
Table 12: Test result of 6dB & 99% Bandwidth of Bluetooth, LE mode .....	17
Table 13: Test result of power spectral density:.....	28
Table 14: Test result of Frequency Separation .....	154
Table 15: Test result of Number of hopping frequency .....	155
Table 16: Test result of Time of Occupancy.....	156

## 8. List of Photographs

Photograph 1: Set-up for Conducted Emissions .....	162
Photograph 2: Set-up for Spurious Emissions for below 30MHz .....	162
Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz .....	163
Photograph 4: Set-up for Spurious Emissions for 1 - 18GHz.....	163
Photograph 5: Set-up for Spurious Emissions for 18 - 26.5GHz.....	164