
FCC Test Report

Report No.: AGC03052141001FE01

FCC ID : 2AAP6UB15MSKB
PRODUCT DESIGNATION : Keyboard
BRAND NAME : N/A
MODEL NAME : UB-15MSKB
CLIENT : Shenzhen Zowee Technology Co., Ltd.
DATE OF ISSUE : Oct.11,2014
STANDARD(S) : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct.11,2014	Valid	Original Report

TABLE OF CONTENTS

- 1. VERIFICATION OF CONFORMITY 4**
- 2. SYSTEM DESCRIPTION 5**
- 3. MEASUREMENT UNCERTAINTY..... 5**
- 4. PRODUCT INFORMATION 6**
- 5. SUPPORT EQUIPMENT..... 7**
- 6. TEST FACILITY 8**
- 7. FCCLINE CONDUCTED EMISSION TEST 9**
 - 7.1. LIMITS OF LINE CONDUCTED EMISSION TEST 9
 - 7.2. BLOCK DIAGRAM OF TEST SETUP 9
 - 7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST 10
 - 7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST 11
- 8. FCC RADIATED EMISSION TEST 13**
 - 8.1. LIMITS OF RADIATED EMISSION TEST 13
 - 8.2. BLOCK DIAGRAM OF TEST SETUP 14
 - 8.3. PROCEDURE OF RADIATED EMISSION TEST 15
 - 8.4. TEST RESULT OF RADIATED EMISSION TEST 16
- APPENDIX A: PHOTOGRAPHS OF TEST SETUP 18**
- APPENDIX B: PHOTOGRAPHS OF EUT 19**

1. VERIFICATION OF CONFORMITY

Applicant	Shenzhen Zowee Technology Co., Ltd.
Address	Block 5, Science&Technology Industrial Park of Privately Owned Enterprises, Pingshan, Xili, Nanshan District, Shenzhen, P.R.C
Manufacturer	Shenzhen Migoal Technology Co., Ltd.
Address	2th Floor, 7 Building, Xiang Industry Park, Jiuwei, Xixiang, Baoan, Shenzhen, Guandgdong, China
Product Designation	Keyboard
Brand Name	N/A
Test Model	UB-15MSKB
Measurement Procedure	ANSI C63.4: 2003
Date of test	Oct.8~Oct.10, 2014
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-IT/AC(2013-03-01)

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2003. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Prepared By

Max Zhang

Max Zhang Oct.11,2014

Checked By

Kidd Yang

Kidd Yang Oct.11,2014

Authorized By

Solger Zhang

Solger Zhang Oct.11,2014

2. SYSTEM DESCRIPTION

TEST MODE DESCRIPTION		
NO.	TEST MODE DESCRIPTION	WORST
1	Normal	V

Note: 1. V means EMI worst mode

3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 2.75dB

Radiated measurement: +/- 3.2dB

4. PRODUCT INFORMATION

Housing Type	Plastic and metal
EUT Input Rating	DC 5V
Highest used or generated frequency of the EUT	Less than 108MHz

I/O Port Information (Applicable Not Applicable)

I/O Port of EUT			
I/O Port Type	Number	Cable Description	Tested With
USB	1	N/A	1

5. SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
Tablet PC	Migoal	Stress04	N/A	0.8m Unshielded	0.8m Unshielded

6. TEST FACILITY

Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	2/F., Building 2, No.1-No.4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District, Shenzhen, Guangdong, China

TEST EQUIPMENT OF LINE CONDUCTED EMISSION TEST

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	100694	04/01/2014	03/31/2015
LISN	R&S	ESH3-Z5	8389791009	07/16/2014	07/15/2015
CONDUCTION CABLE	SAT	CE1	C001	06/04/2014	06/03/2015

TEST EQUIPMENT OF RADIATED EMISSION

Description	Manufacturer	Model	S/N	Cal. Date	Cal. Due
RF ATTENUATOR	N/A	RFA20DB	68	N/A	N/A
SPECTRUM ANALYZER	AGILENT	E4440A	US41421290	07/16/2014	07/15/2015
AMPLIFIER	EM	EM30180	0607030	02/27/2014	02/26/2015
HORN ANTENNA	EM	EM-AH-10180	67	04/19/2014	04/18/2015
BILOGICAL ANTENNA	A.H. SYSTEMS INC.	SAS-521-4	26	06/06/2014	06/05/2015
LOOP ANTENNA	DAZE	ZN30900N	SEL0097	07/16/2014	07/15/2015
ISOLATION TRANSFORMER	LETEAC	LTBK	--	07/16/2014	07/15/2015
RF CABLE	SUIRONG	30MHZ-18GHZ	N/A	07/18/2014	07/18/2015
RF CABLE	SAT	9KHZ-30MHZ	C002	06/04/2014	06/03/2015

Note: "--" means it's not applicable.

7. FCC LINE CONDUCTED EMISSION TEST


7.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

7.2. BLOCK DIAGRAM OF TEST SETUP

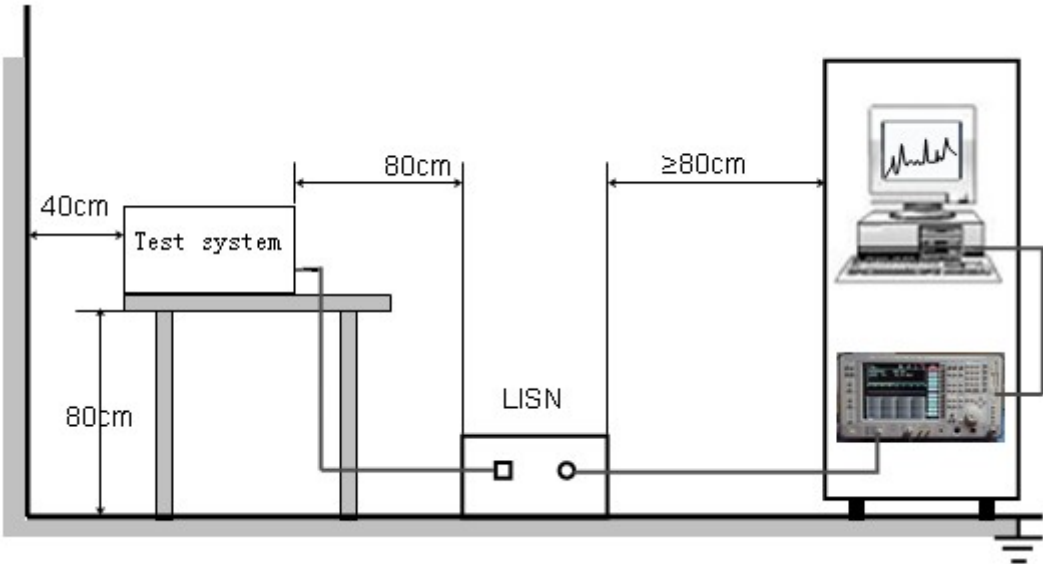


7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC5V power from PC with receive 120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition (mode 1) was reported on the Summary Data page.

7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST
LINE CONDUCTED EMISSION TEST-L

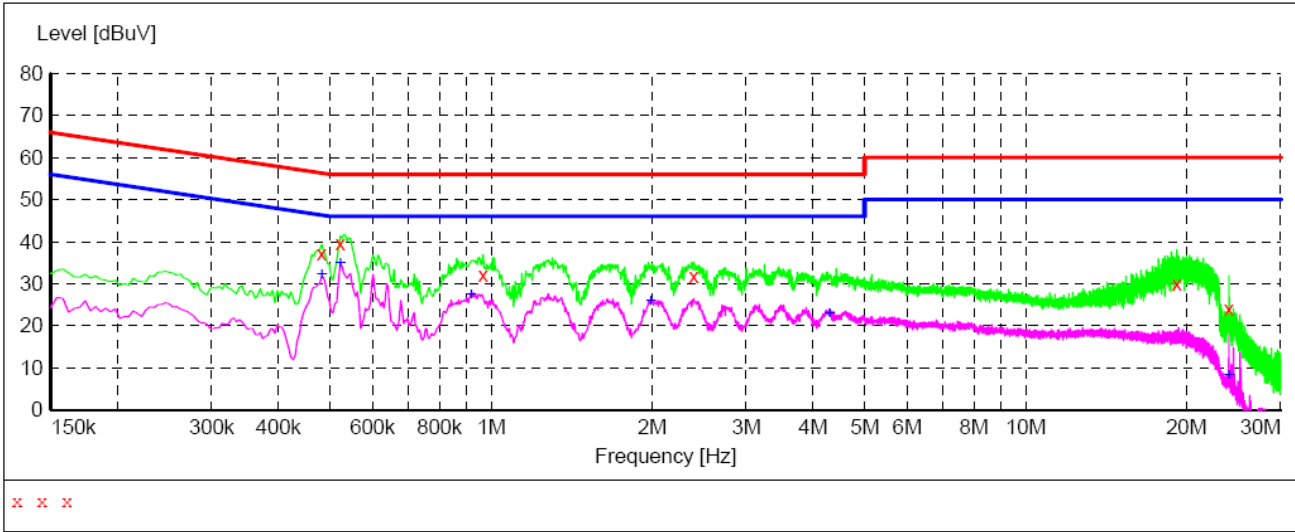

MEASUREMENT RESULT :


Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.482000	37.10	0.2	56	19.2	QP	L1	FLO	ON
0.522000	39.70	0.2	56	16.3	QP	L1	FLO	ON
0.966000	32.20	0.2	56	23.8	QP	L1	FLO	ON
2.394000	31.70	0.3	56	24.3	QP	L1	FLO	ON
19.174000	30.00	0.8	60	30.0	QP	L1	FLO	ON
24.014000	23.90	0.8	60	36.1	QP	L1	FLO	ON

MEASUREMENT RESULT :

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.482000	32.00	0.2	46	14.3	AV	L1	FLO	ON
0.522000	34.90	0.2	46	11.1	AV	L1	FLO	ON
0.918000	27.20	0.2	46	18.8	AV	L1	FLO	ON
1.990000	25.70	0.3	46	20.3	AV	L1	FLO	ON
4.298000	22.80	0.3	46	23.2	AV	L1	FLO	ON
24.014000	8.20	0.8	50	41.8	AV	L1	FLO	ON

RESULT: PASS

LINE CONDUCTED EMISSION TEST-N

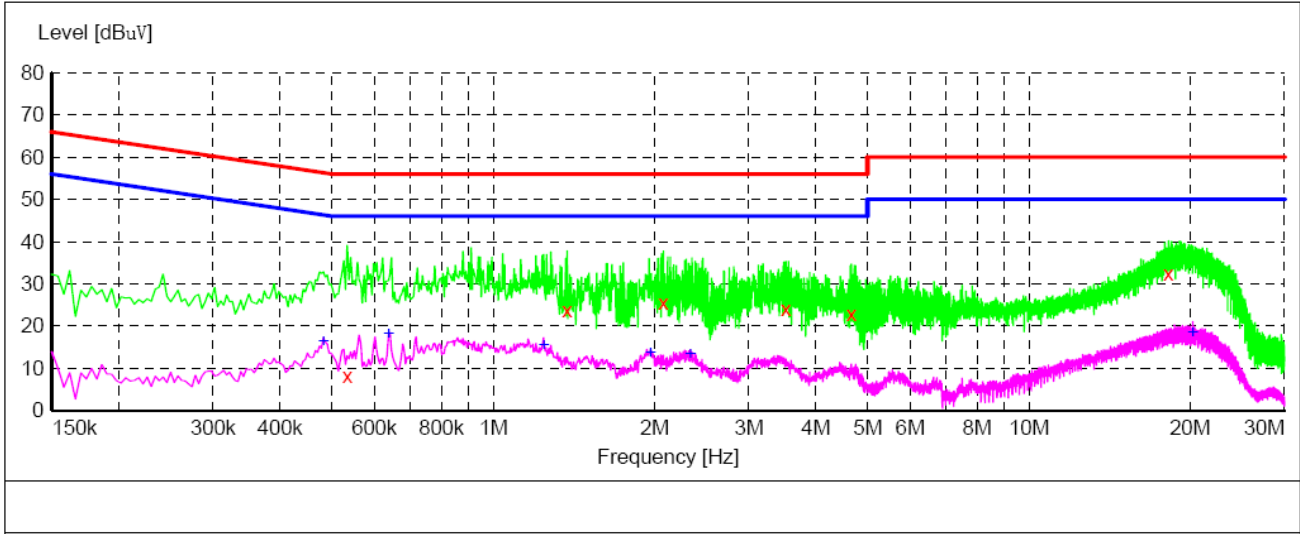

MEASUREMENT RESULT:

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.534000	8.20	0.2	56	47.8	QP	N	FLO	ON
1.374000	23.80	0.2	56	32.2	QP	N	FLO	ON
2.078000	25.60	0.3	56	30.4	QP	N	FLO	ON
3.518000	23.90	0.3	56	32.1	QP	N	FLO	ON
4.662000	22.90	0.3	56	33.1	QP	N	FLO	ON
18.226000	32.30	0.7	60	27.7	QP	N	FLO	ON

MEASUREMENT RESULT:

Frequency	Level	Transd	Limit	Margin	Detector	Line	PE	AUX STATE
MHz	dBuV	dB	dBuV	dB				
0.482000	16.40	0.2	46	29.9	AV	N	FLO	ON
0.638000	17.90	0.2	46	28.1	AV	N	FLO	ON
1.242000	15.40	0.2	46	30.6	AV	N	FLO	ON
1.966000	13.50	0.3	46	32.5	AV	N	FLO	ON
2.334000	13.20	0.3	46	32.8	AV	N	FLO	ON
20.230000	18.20	0.8	50	31.8	AV	N	FLO	ON

RESULT: PASS

8. FCC RADIATED EMISSION TEST

8.1. LIMITS OF RADIATED EMISSION TEST


Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
Above 960	3	54.0

Note: The lower limit shall apply at the transition frequency.


8.2. BLOCK DIAGRAM OF TEST SETUP

System Diagram of Connections between EUT and Simulators


RADIATED EMISSION TEST SETUP BELOW 30MHz

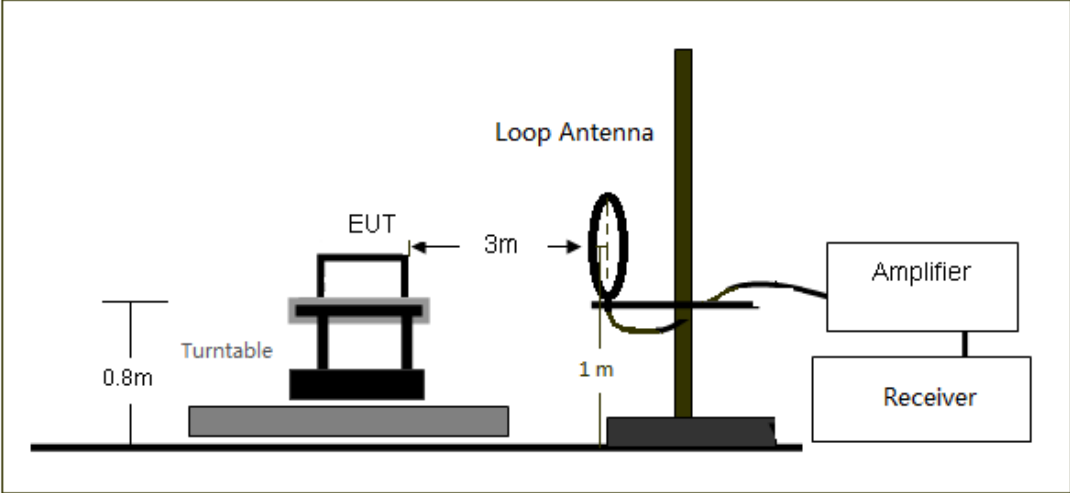

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

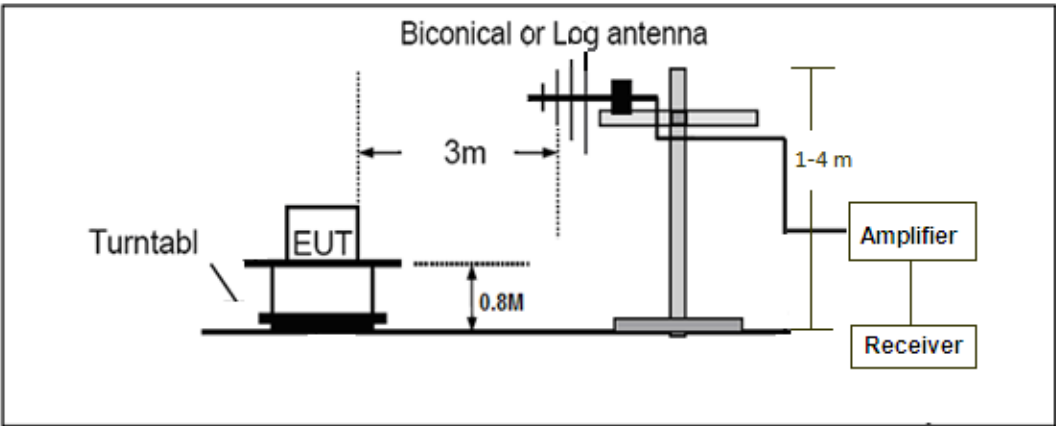

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

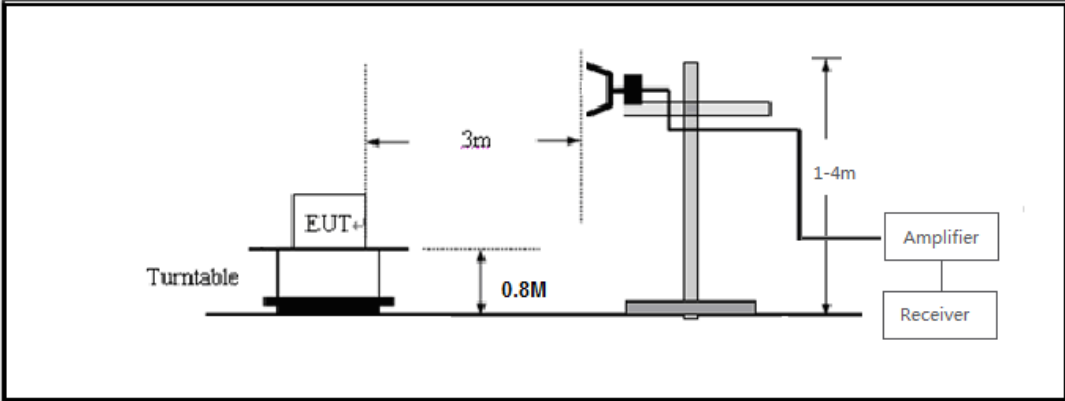

8.3. PROCEDURE OF RADIATED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC 5V power from PC with receive 120V/60Hz power from socket under the turntable through a LISN.
- (5) The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- (6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- (7) The test mode(s) were scanned during the test:
- (8) Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented.


The test data of the worst case condition (mode 1) was reported on the Summary Data page.

8.4. TEST RESULT OF RADIATED EMISSION TEST

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.


RADIATED EMISSION BELOW 1GHZ-Horizontal

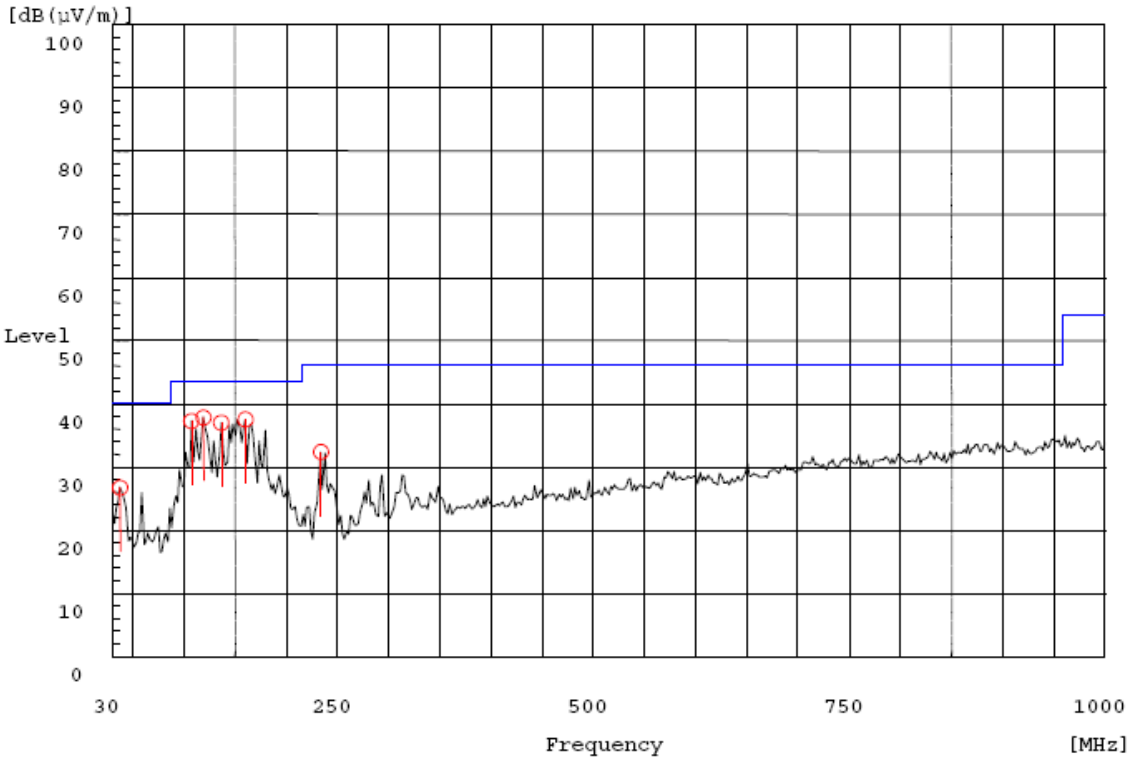

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
37.760	H	5.5	21.2	26.7	40.0	13.3	Pass	100.0	283.7
107.600	H	26.0	11.3	37.3	43.5	6.2	Pass	200.0	276.7
119.240	H	25.3	12.5	37.8	43.5	5.7	Pass	200.0	60.3
136.700	H	22.3	14.7	37.0	43.5	6.5	Pass	200.0	75.7
159.980	H	22.5	15.0	37.5	43.5	6.0	Pass	200.0	64.7
233.700	H	19.2	13.2	32.4	46.0	13.6	Pass	150.0	64.1

RESULT: PASS

Radiated Emission Test at 3m Distance-Vertical

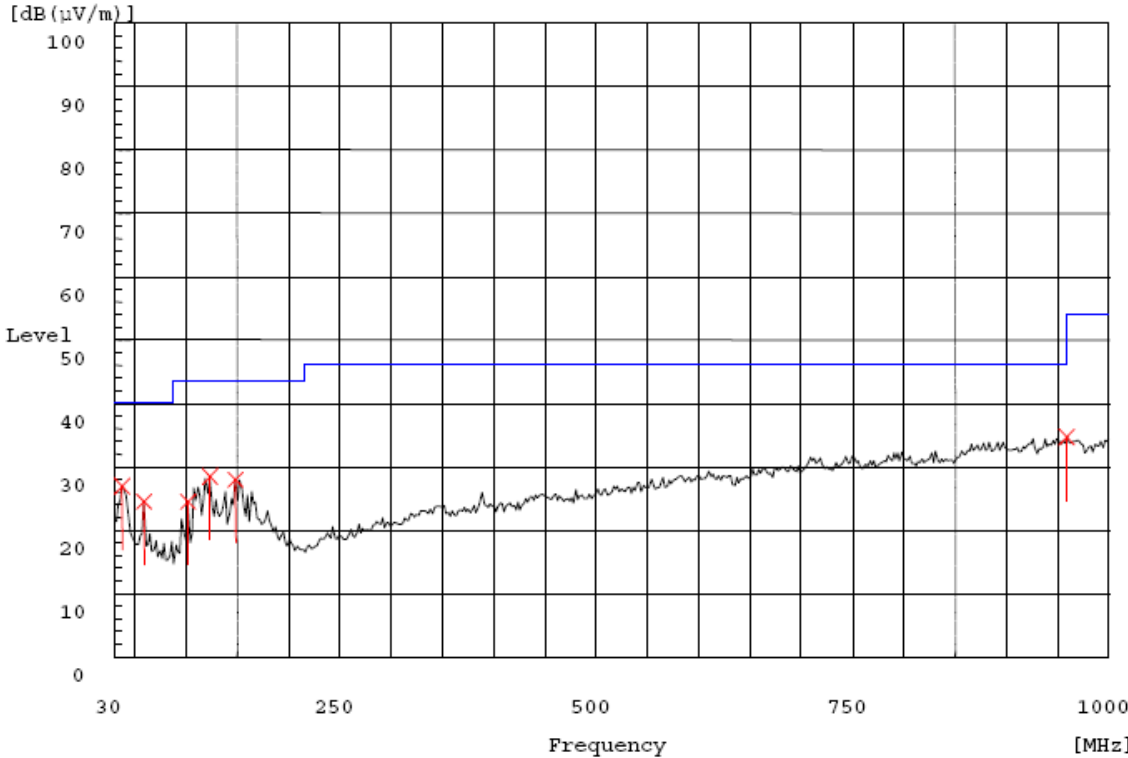

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
37.760	V	5.7	21.2	26.9	40.0	13.1	Pass	100.0	229.9
59.100	V	12.1	12.4	24.5	40.0	15.5	Pass	100.0	21.3
101.780	V	13.6	10.9	24.5	43.5	19.0	Pass	200.0	155.8
123.120	V	15.3	13.2	28.5	43.5	15.0	Pass	200.0	188.9
148.340	V	13.1	14.9	28.0	43.5	15.5	Pass	200.0	217.7
959.260	V	6.0	28.7	34.7	46.0	11.3	Pass	150.0	35.3


RESULT: PASS

Note: All Other modes above 1GHz have more than 20dB margin, no recording in the report
Measurement = Reading + Factor, Over = Measurement – Limit.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP
FCC LINE CONDUCTED EMISSION TEST SETUP



FCC RADIATED EMISSION TEST SETUP

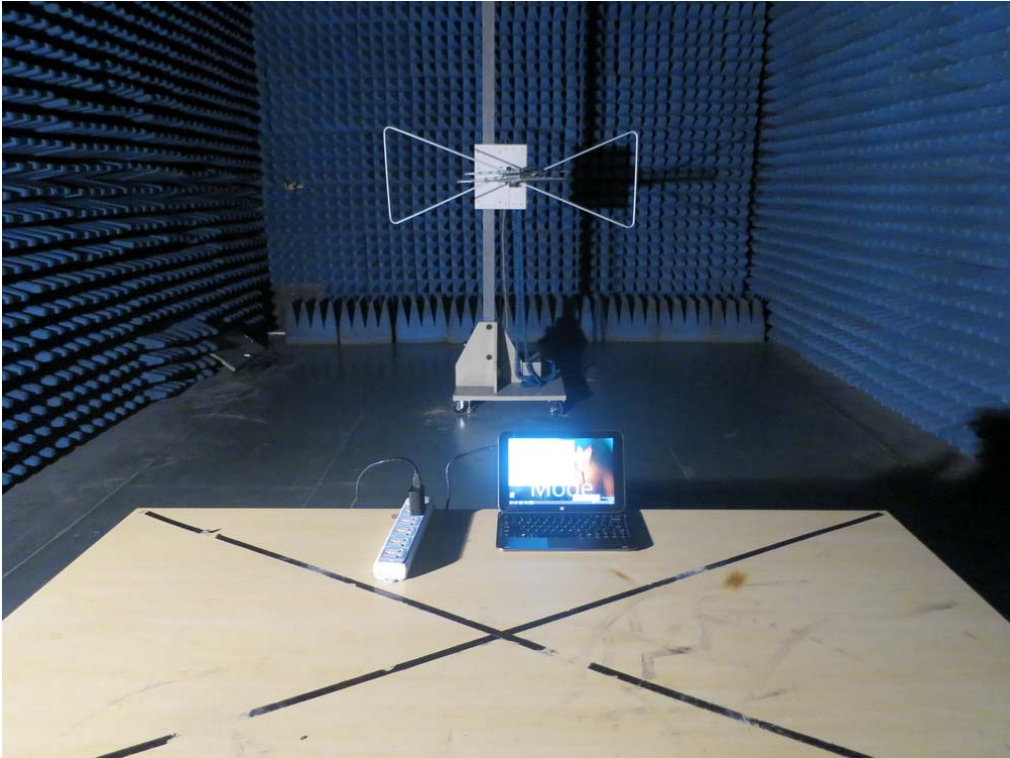

APPENDIX B: PHOTOGRAPHS OF EUT
TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT




LEFT VIEW OF EUT




RIGHT VIEW OF EUT




OPEN VIEW OF EUT

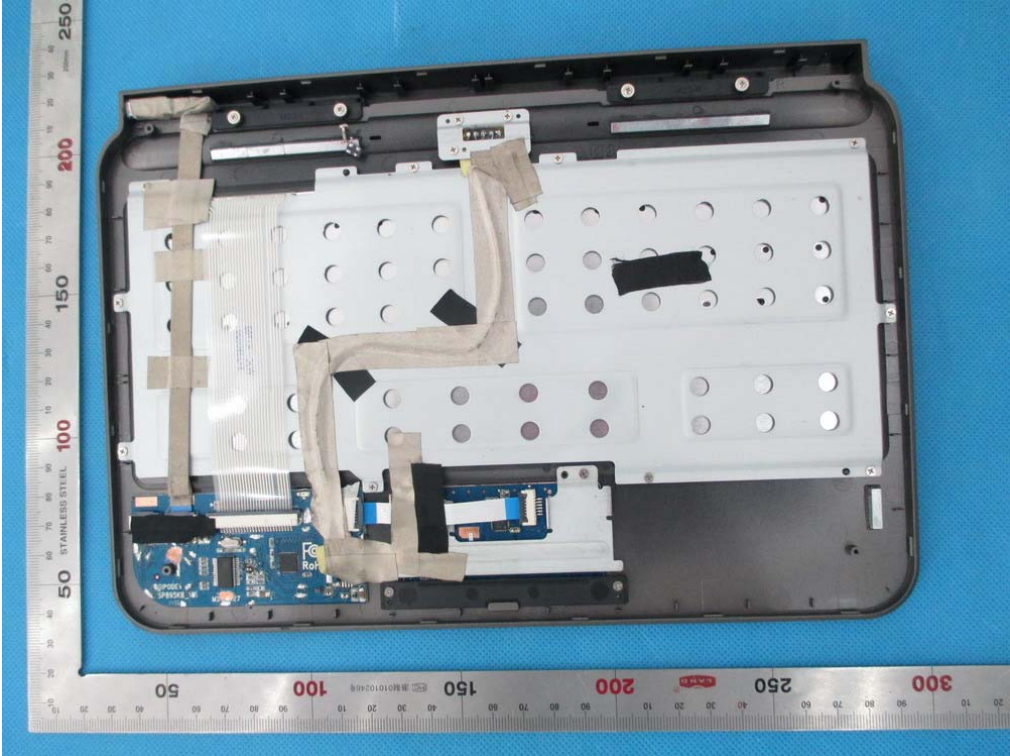


INTERNAL VIEW OF EUT-1

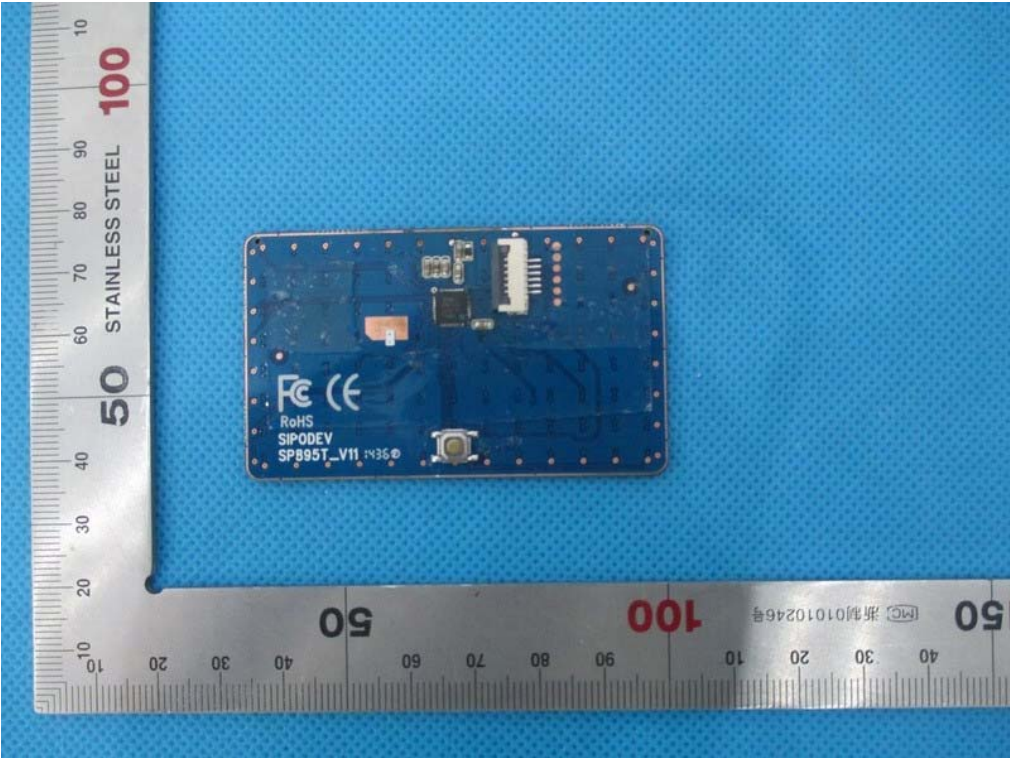


INTERNAL VIEW OF EUT-2

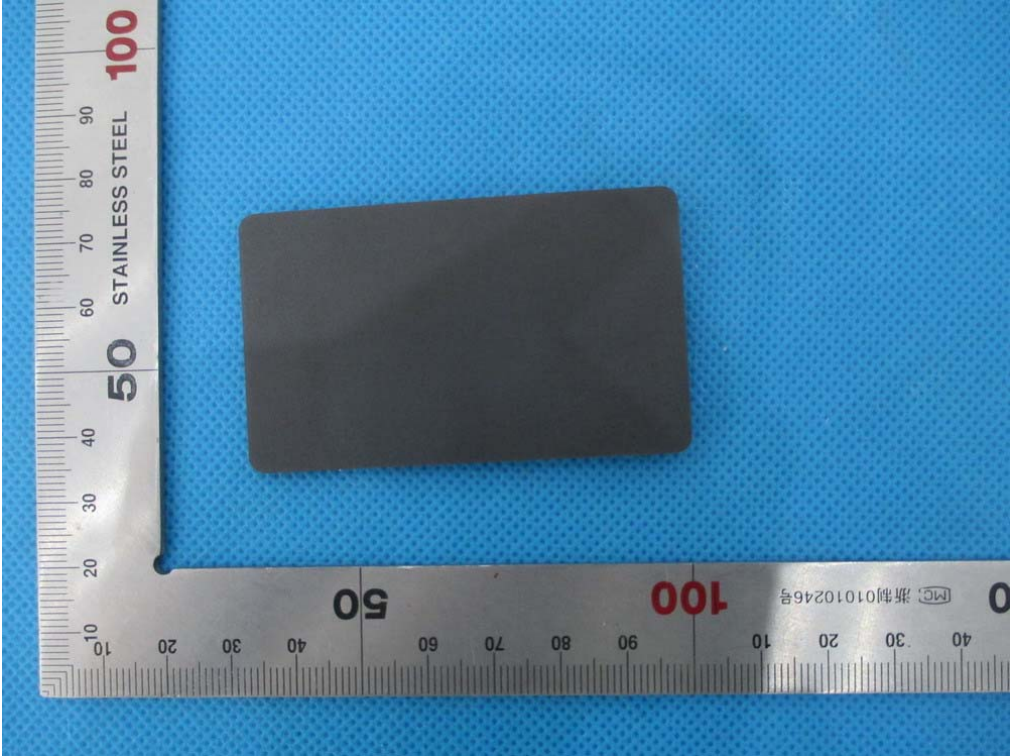

INTERNAL VIEW OF EUT-3

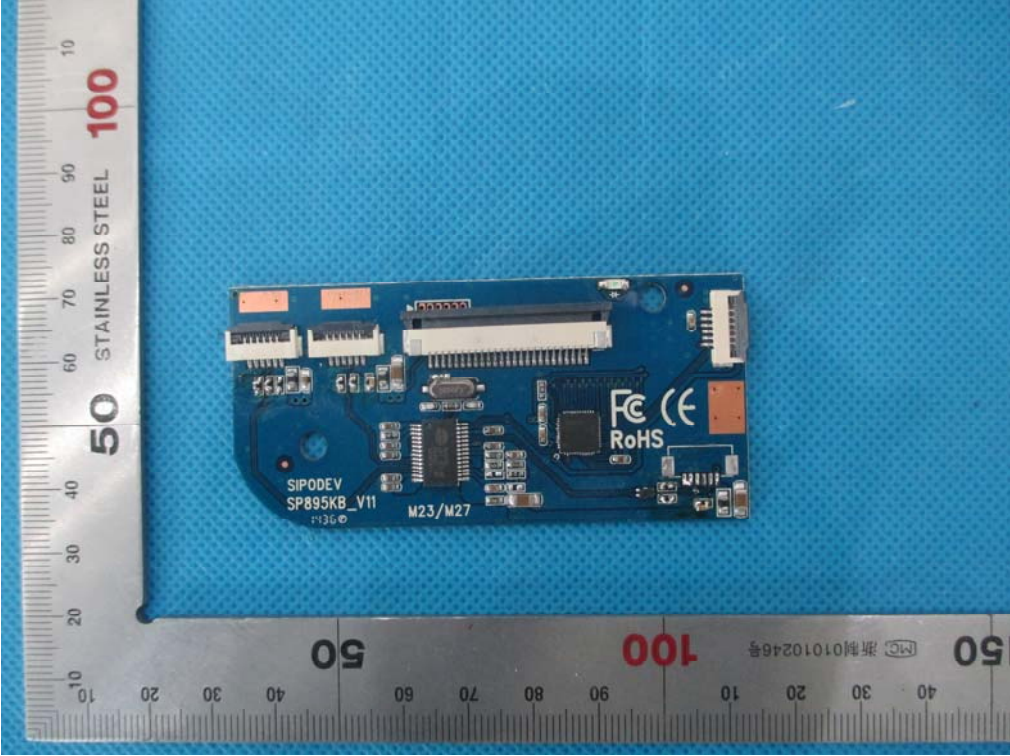

INTERNAL VIEW OF EUT-4

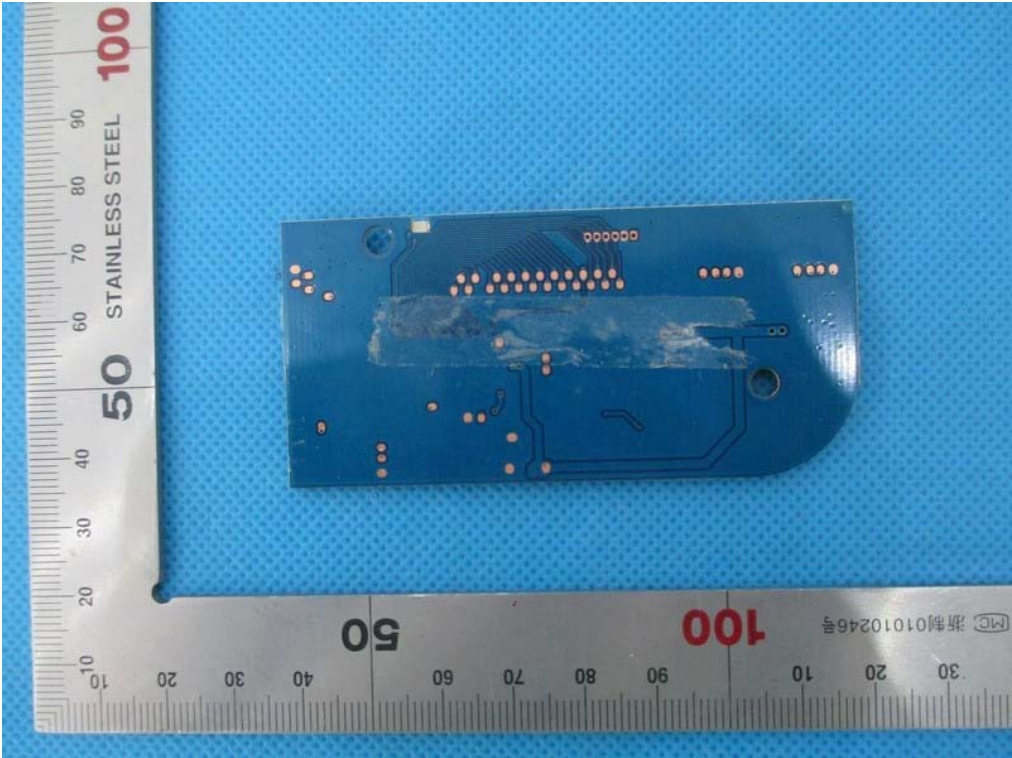

-----END OF REPORT-----