

<b>Prüfbericht-Nr.:</b> <i>Test Report No.:</i>	17052521 003	<b>Auftrags-Nr.:</b> <i>Order No.:</i>	164044450	Seite 1 von 226 <i>Page 1 of 226</i>
<b>Kunden-Referenz-Nr.:</b> <i>Client Reference No.:</i>	N/A	<b>Auftragsdatum:</b> <i>Order date:</i>	07.09.2015	
<b>Auftraggeber:</b> <i>Client:</i>	Shenzhen Zowee Technology Co., Ltd. Science & Technology Industrial Park of Privately Owned Enterprises, Pingshan, Xili, Nanshan District, Shenzhen, China			
<b>Prüfgegenstand:</b> <i>Test item:</i>	Tablet PC			
<b>Bezeichnung / Typ-Nr.:</b> <i>Identification / Type No.:</i>	NS-P11W6100			
<b>Auftrags-Inhalt:</b> <i>Order content:</i>	FCC/IC Certification			
<b>Prüfgrundlage:</b> <i>Test specification:</i>	CFR47 FCC Part 15: Subpart E Section 15.407 CFR47 FCC Part 15: Subpart C Section 15.207 CFR47 FCC Part 15: Subpart C Section 15.209 KDB 789033 D02 v01 RSS-247 Issue 1 May 2015 RSS-Gen Issue 4 November 2014			
<b>Wareneingangsdatum:</b> <i>Date of receipt:</i>	05.09.2015			
<b>Prüfmuster-Nr.:</b> <i>Test sample No.:</i>	A000248673-001, A000248673-002, A000248673-003			
<b>Prüfzeitraum:</b> <i>Testing period:</i>	09.09.2015 - 18.09.2015			
<b>Ort der Prüfung:</b> <i>Place of testing:</i>	Shenzhen EMTEK Co., Ltd.			
<b>Prüflaboratorium:</b> <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
<b>Prüfergebnis*:</b> <i>Test result*:</i>	Pass			
<b>geprüft von / tested by:</b>		<b>kontrolliert von / reviewed by:</b>		
29.09.2015	Owen Tian/Senior Project Manager	29.09.2015	Sam Lin/Technical Certifier	
<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Datum</b> <i>Date</i>	<b>Name / Stellung</b> <i>Name / Position</i>
				<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other:</b>		FCC ID: 2AAP6ZM1100B1 IC: 8257A-NSP11W6100		
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(all) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend N/A = nicht anwendbar	4 = ausreichend N/T = nicht getestet
Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(all) = failed a.m. test specification(s)	3 = satisfactory N/A = not applicable	4 = sufficient N/T = not tested
<p><b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b>  <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				

**Prüfbericht - Nr.: 17052521 003***Test Report No.***Seite 2 von 226***Page 2 of 226*

## TEST SUMMARY

**5.1.1 ANTENNA REQUIREMENT***RESULT: Pass***5.1.2 PEAK OUTPUT POWER***RESULT: Pass***5.1.3 26dB BANDWIDTH AND 99% BANDWIDTH***RESULT: Pass***5.1.4 6dB BANDWIDTH***RESULT: Pass***5.1.5 POWER SPECTRAL DENSITY***RESULT: Pass***5.1.6 SPURIOUS EMISSION***RESULT: Pass***5.1.7 CONDUCTED EMISSIONS***RESULT: Pass*

## CONTENTS

<b>1.</b>	<b>GENERAL REMARKS .....</b>	<b>4</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>4</b>
<b>2.</b>	<b>TEST SITES .....</b>	<b>4</b>
<b>2.1</b>	<b>TEST FACILITIES .....</b>	<b>4</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS.....</b>	<b>5</b>
<b>2.3</b>	<b>TRACEABILITY .....</b>	<b>6</b>
<b>2.4</b>	<b>CALIBRATION .....</b>	<b>6</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY.....</b>	<b>6</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA.....</b>	<b>6</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>7</b>
<b>3.</b>	<b>GENERAL PRODUCT INFORMATION .....</b>	<b>8</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>8</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>8</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>9</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS .....</b>	<b>9</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS .....</b>	<b>9</b>
<b>4.</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>10</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION.....</b>	<b>10</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE .....</b>	<b>10</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT .....</b>	<b>10</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE .....</b>	<b>10</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM .....</b>	<b>11</b>
<b>5.</b>	<b>TEST RESULTS .....</b>	<b>13</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES .....</b>	<b>13</b>
5.1.1	<i>Antenna Requirement.....</i>	<i>13</i>
5.1.2	<i>Peak Output Power.....</i>	<i>14</i>
5.1.3	<i>26dB Bandwidth and 99% Bandwidth.....</i>	<i>16</i>
5.1.4	<i>6dB Bandwidth.....</i>	<i>17</i>
5.1.5	<i>Power spectral density.....</i>	<i>18</i>
5.1.6	<i>Spurious Emission .....</i>	<i>19</i>
5.1.7	<i>Conducted emissions.....</i>	<i>220</i>
<b>6.</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP .....</b>	<b>223</b>
<b>7.</b>	<b>LIST OF TABLES .....</b>	<b>226</b>
<b>8.</b>	<b>LIST OF PHOTOGRAPHS .....</b>	<b>226</b>

## 1. General Remarks

### 1.1 Complementary Materials

None.

## 2. Test Sites

### 2.1 Test Facilities

Shenzhen EMTEK Co., Ltd.

**(FCC Registration No.: 709623)**

**(Test site Industry Canada No.: 4480A-4)**

Bldg 69, Majialong Industry Zone, Nanshan District,  
Shenzhen, Guangdong, P.R. China

The tests at the test site have been conducted under the supervision of a TÜV engineer.

## 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

Kind of Equipment	Manufacturer	Type	S/N	Calibrated until
<b>Transmitter spurious emissions</b>				
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	2016-05-16
Loop Antenna	Schwarzbeck	FMZB 1519	1519-012	2016-05-16
Cable	H+B	3M SF104-26.5	295838/4	2016-05-28
Cable	H+B	6M SF104-26.5	295840/4	2016-05-28
Pre-Amplifier	HP	8447F	2944A07999	2016-05-16
Bilog Antenna	Schwarzbeck	VULB9163	142	2016-05-28
Cable	Schwarzbeck	AK9513	ACRX1	2016-05-16
Cable	Rosenberger	N/A	FP2RX2	2016-05-16
Cable	Schwarzbeck	AK9513	CRPX1	2016-05-28
Cable	Schwarzbeck	AK9513	CRRX2	2016-05-28
Pre-Amplifier	A.H.	PAM-0126	1415261	2016-05-16
Horn Antenna	Schwarzbeck	BBHA 9120	707	2016-05-28
Pre-Amplifier	A.H.	PAM-0126	1415261	2016-05-16
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA91703 99	2016-05-16
EMI Test Receiver	Rohde & Schwarz	FSV40	132.1- 3008K39- 100967-AP	2016-05-16
Pre-Amplifier	Lunar EM	LNA26G40-40	J101313102 8001	2016-05-16
Horn Antenna	AHS/USA	SAS-573	184	2016-05-16
Cable	H+B	0.5M SF104-26.5	289147/4	2016-05-16
Cable	H+B	3M SF104-26.5	295838/4	2016-05-16
Cable	H+B	6M SF104-26.5	295840/4	2016-05-16
<b>Radio Spectrum Test</b>				
EMI Test Receiver	Rohde & Schwarz	ESCI	101045	2016-05-16
Vector Signal Generater	Agilent	N5182B	My53050553	2016-05-28
Analog Signal Generator	Agilent	N5171B	My53050878	2016-05-28
Signal Analyzer	Agilent	N9010A	My53470879	2016-05-28
Power Meter	Agilent	PS-X10-100	N/A	2016-05-28
Temp. / Humidity Chamber	Kingson	THS-M1	242	2016-05-28
<b>Conducted Emission</b>				
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	2016-05-16
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	2016-05-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	2016-05-16
Voltage Probe	Rohde & Schwarz	TK9416	N/A	2016-05-16
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	2016-05-16
50Ω Coaxial Switch	Anritsu	MP59B	M20531	2016-05-16

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

**Table 2: Measurement Uncertainty**

<b>Parameter</b>	<b>Uncertainty</b>
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

**Prüfbericht - Nr.: 17052521 003***Test Report No.***Seite 7 von 226***Page 7 of 226*

## 2.7 Status of Facility Used for Testing

Shenzhen EMTEK Co., Ltd. test facility located at Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, P.R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

### 3. General Product Information

#### 3.1 Product Function and Intended Use

The EUT is 11.6" windows tablet with Wi-Fi, Bluetooth function.  
 For details refer to the User Manual and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 3: Technical Specification of EUT**

Technical Specification	Value
Kind of Equipment	Tablet
Type Designation	NS-P11W6100
FCC ID	2AAP6ZM1100B1
IC	8257A-NSP11W6100
Operating Frequency band	5180 – 5240MHz, 5745 – 5825MHz
Extreme Temperature Range	-30~+75°C
Operation Voltage	DC 3.7V (via built in battery)
	DC 5.2V (via AC/DC adapter)
Antenna Gain	2.7dBi

**Table 4: Technical Specification of Wi-Fi**

Item	Description		
	IEEE 802.11a	IEEE 802.11n (HT20)	IEEE 802.11n (HT40)
Operating Frequency band (MHz)	5180 – 5240MHz, 5745 – 5825MHz	5180 – 5240MHz, 5745 – 5825MHz	5190 – 5230MHz, 5755 – 5795MHz
Channel Number	9	9	4
Modulation	OFDM (BPSK, QPSK, 16-QAM, 64-QAM)	OFDM (BPSK, QPSK, 16-QAM, 64- QAM)	OFDM (BPSK, QPSK, 16- QAM, 64-QAM)
Data Rate (Mbps)	6, 9, 12, 18, 24, 36, 48, 54	MCS0 ~ MCS7	MCS0 ~ MCS7
Transmitter Output Power (Typical) (dBm)	9.5	9	8.5
Media Access Protocol	CSMA/CA with ACK	CSMA/CA with ACK	CSMA/CA with ACK



**Table 5: Carrier Frequency of 802.11a & 802.11n (HT20)**

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5180 – 5240MHz, 5745 – 5825MHz	36	5180 MHz	153	5765 MHz
	40	5200 MHz	157	5785 MHz
	44	5220 MHz	161	5805 MHz
	48	5240 MHz	165	5825 MHz
	149	5745 MHz		

**Table 6: Carrier Frequency of 802.11n (HT40)**

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5190 – 5230MHz, 5755 – 5795MHz	38	5190 MHz	151	5755 MHz
	46	5230 MHz	159	5795 MHz

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Wi-Fi mode (5180 – 5240MHz)
  - 1. Transmitting
    - a. Low Channel
    - b. Middle Channel
    - c. High Channel
  - 2. Receiving
- B. On, Wi-Fi mode (5745 – 5825MHz)
  - 1. Transmitting
    - a. Low Channel
    - b. Middle Channel
    - c. High Channel
  - 2. Receiving
- C. Standby
- D. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

### 3.5 Submitted Documents

- Bill of Material
- Constructional Drawing
- PCB Layout
- Photo Document
- Circuit Diagram
- Instruction Manual
- Rating Label

## 4. Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

### 4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:

Description	Manufacturer	Part No.	Rating
AC/DC Adapter	GLOBAL YEOU DIANN ELECTRIC INDUSTRIAL CO., LTD.	AMS135-0522000FU	Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5.2V, 2A

The EUT was tested with following cables:

Interface(s)/Port(s):	Max. cable length, shielding	Cable classification
AC Mains of adapter	2 cores, non-shielded port, 3m	AC Power Input
Micro USB port	4 cores, non-shielded port, 3m	DC Power Input

### 4.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF). No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test of below 1GHz

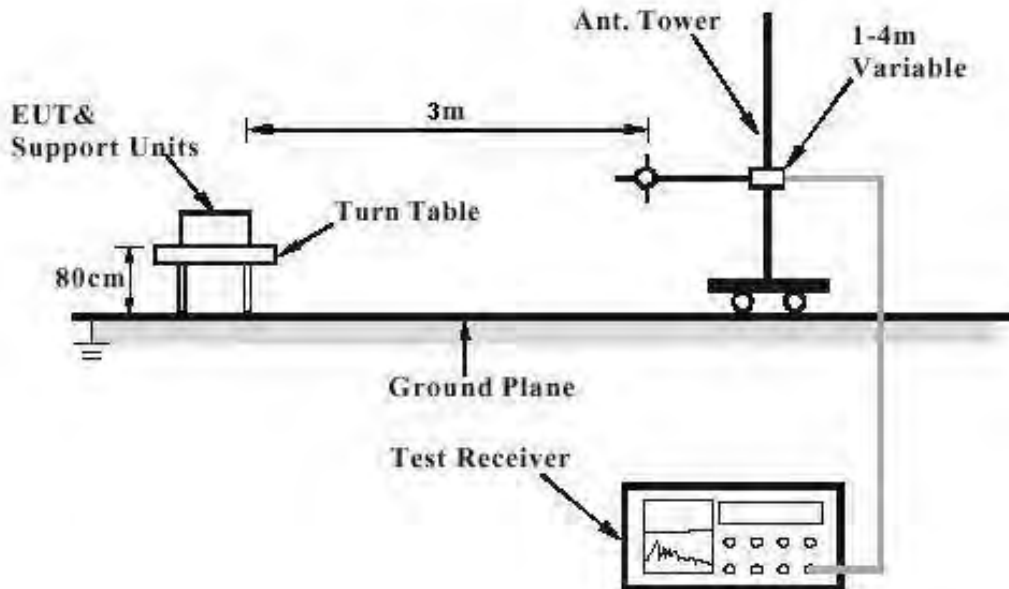


Diagram of Measurement Configuration for Radiation Test of above 1GHz

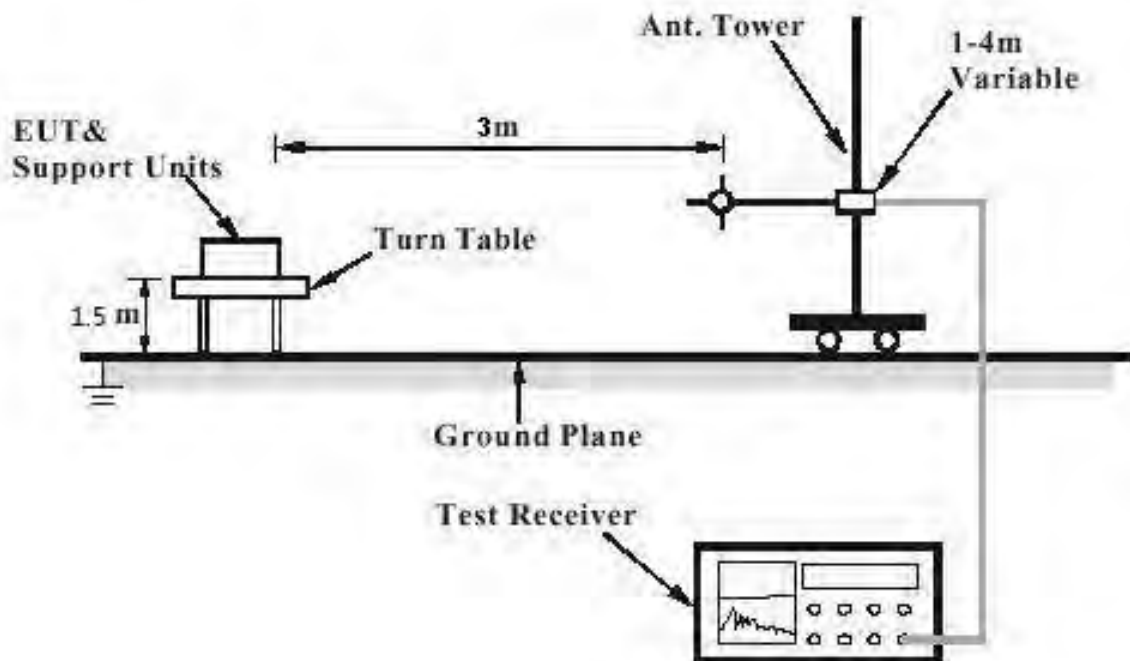


Diagram of Measurement Equipment Configuration for Conduction Measurement

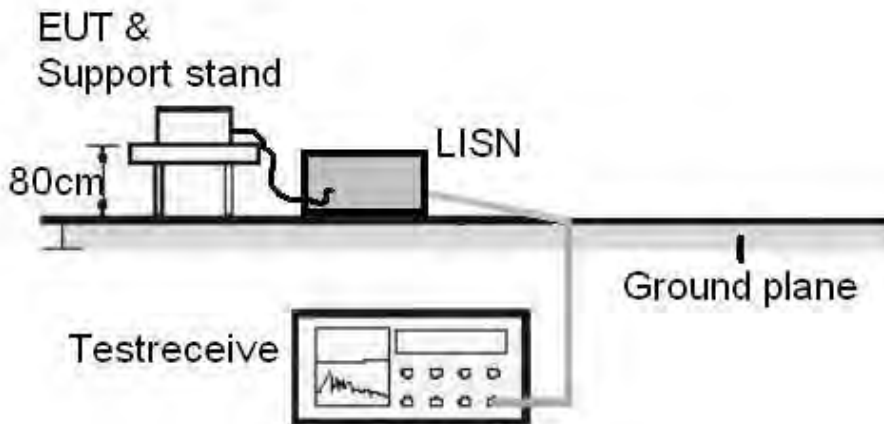
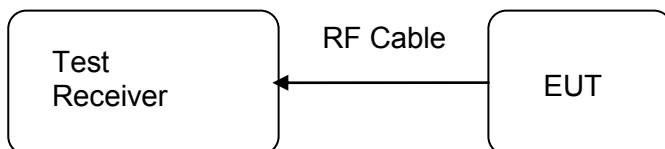


Diagram of Measurement Equipment Configuration for Transmitter Measurement



## 5. Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:** **Pass**

Test standard : FCC Part 15.203  
RSS-Gen Clause 8.3  
Limit The use of antennas with directional gains that do not exceed 6dBi

According to the manufacturer declared, the EUT has an internal antenna, the directional gain of antenna is 2.7dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

## 5.1.2 Peak Output Power

**RESULT:**
**Pass**

Test date : 2015-09-11  
 Test standard : FCC Part 15.407(a)(1)  
                   : FCC Part 15.407(a)(3)  
                   : RSS-247 clause 6.2.1(1)  
                   : RSS-247 clause 6.2.4(1)  
 Basic standard : ANSI C63.10: 2013  
 Limit : 250mW / 1W for FCC  
           : 200mW or  $(10+10\log_{10}B)$ dBm / 1W for IC (B=16.526)  
 Kind of test site : Shielded room

**Test setup**

Test Channel : All channel  
 Operation Mode : A.1, B.1  
 Ambient temperature : 25°C  
 Relative humidity : 50%  
 Atmospheric pressure : 101kPa

**Table 7: Test result of Peak Output Power of 802.11a**

Channel	Channel Frequency (MHz)	Peak Output Power	Limit	EIRP	Limit
		(dBm)	(dBm)	(dBm)	(dBm)
36	5180	8.59	24	11.57	22.18
40	5200	8.47	24	11.46	22.18
48	5240	9.42	24	12.41	22.18
149	5745	9.16	30	12.15	/
157	5785	8.53	30	11.52	/
165	5825	7.53	30	10.92	/

**Table 8: Test result of Peak Output Power of 802.11n HT20**

Channel	Channel Frequency (MHz)	Peak Output Power	Limit	EIRP	Limit
		(dBm)	(dBm)	(dBm)	(dBm)
36	5180	7.92	24	10.92	22.18
40	5200	7.83	24	10.84	22.18
48	5240	8.80	24	11.82	22.18
149	5745	8.50	30	11.51	/
157	5785	7.88	30	10.89	/
165	5825	7.64	30	10.65	/

**Prüfbericht - Nr.: 17052521 003**

Test Report No.

Seite 15 von 226

Page 15 of 226

**Table 9: Test result of Peak Output Power of 802.11n HT40**

Channel	Channel Frequency (MHz)	Peak Output Power	Limit	EIRP	Limit
		(dBm)	(dBm)	(dBm)	(dBm)
38	5190	7.72	24	11.03	23
46	5230	7.67	24	10.98	23
151	5755	7.68	30	10.99	/
159	5795	8.18	30	11.49	/

### 5.1.3 26dB Bandwidth and 99% Bandwidth

**RESULT:**
**Pass**

Date of testing : 2015-09-11  
 Test standard : FCC Part 15.407(a)(5)  
                   : RSS-Gen clause 6.6  
 Basic standard : ANSI C63.10: 2013  
 Kind of test site : Shielded room

**Test setup**

Test Channel : All channel  
 Operation Mode : A.1, B.1  
 Ambient temperature : 25°C  
 Relative humidity : 50%  
 Atmospheric pressure : 101kPa

**Table 10: Test result of 26dB Bandwidth and 99% Bandwidth of 802.11a**

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	19.01	16.537
40	5200	18.98	16.556
48	5240	18.97	16.526
149	5745	20.09	16.622
157	5785	19.51	16.600
165	5825	22.38	16.601

**Table 11: Test result of 26dB Bandwidth and 99% Bandwidth of 802.11n HT20**

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
36	5180	19.31	17.527
40	5200	19.30	17.538
48	5240	19.34	17.525
149	5745	19.31	17.549
157	5785	19.35	17.539
165	5825	19.47	17.554

**Table 12: Test result of 26dB Bandwidth and 99% Bandwidth of 802.11n HT40**

Channel	Channel Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
38	5190	40.16	36.244
46	5230	40.55	36.283
151	5755	59.94	36.773
159	5795	51.85	36.478



### 5.1.4 6dB Bandwidth

**RESULT:**
**Pass**

Date of testing : 2015-09-11  
 Test standard : FCC Part 15.407(e)  
                   : RSS-247 clause 6.2.4(1)  
 Basic standard : ANSI C63.10: 2013  
 Limit : 500kHz for 6dB bandwidth  
 Kind of test site : Shielded room

**Test setup**

Test Channel : All channel  
 Operation Mode : B.1  
 Ambient temperature : 25°C  
 Relative humidity : 50%  
 Atmospheric pressure : 101kPa

**Table 13: Test result of 6dB Bandwidth of 802.11a**

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
149	5745	15.15	≥0.5
157	5785	15.15	≥0.5
165	5825	15.15	≥0.5

**Table 14: Test result of 6dB Bandwidth of 802.11n HT20**

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
149	5745	15.14	≥0.5
157	5785	15.14	≥0.5
165	5825	15.15	≥0.5

**Table 15: Test result of 6dB Bandwidth of 802.11n HT40**

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
151	5755	35.19	≥0.5
159	5795	35.17	≥0.5

### 5.1.5 Power spectral density

**RESULT:**
**Pass**

Date of testing : 2015-09-11  
 Test standard : FCC Part 15.407(a)(1)  
                   : FCC Part 15.407(a)(3)  
                   : RSS-247 clause 6.2.1(1)  
                   : RSS-247 clause 6.2.4(1)  
 Basic standard : ANSI C63.10: 2013  
 Limit : 11dBm/MHz, 30dBm/500kHz (33dBm/MHz) for FCC  
           : 10dBm/MHz, 30dBm/500kHz (33dBm/MHz) for IC  
 Kind of test site : Shield room

**Test setup**

Test Channel : All channel  
 Operation mode : A.1, B.1  
 Ambient temperature : 25°C  
 Relative humidity : 50%  
 Atmospheric pressure : 101kPa

**Table 16: Test result of power spectral density of 802.11a**

Channel	Channel (MHz)	Result (dBm/MHz)	Limit (dBm/MHz)	Conclusion
36	5180	-2.238	10	Pass
40	5200	-1.839	10	Pass
48	5240	-1.117	10	Pass
149	5745	-1.952	33	Pass
157	5785	-1.920	33	Pass
165	5825	-2.392	33	Pass

**Table 17: Test result of power spectral density of 802.11n HT20**

Channel	Channel (MHz)	Result (dBm/MHz)	Limit (dBm/MHz)	Conclusion
36	5180	-3.203	10	Pass
40	5200	-2.935	10	Pass
48	5240	-1.619	10	Pass
149	5745	-2.590	33	Pass
157	5785	-2.896	33	Pass
165	5825	-3.460	33	Pass

**Table 18: Test result of power spectral density of 802.11n HT40**

Channel	Channel (MHz)	Result (dBm/MHz)	Limit (dBm/MHz)	Conclusion
38	5190	-4.907	10	Pass
46	5230	-4.022	10	Pass
151	5755	-5.543	33	Pass
159	5795	-5.244	33	Pass

**Prüfbericht - Nr.: 17052521 003**

Test Report No.

Seite 19 von 226

Page 19 of 226

### 5.1.6 Spurious Emission

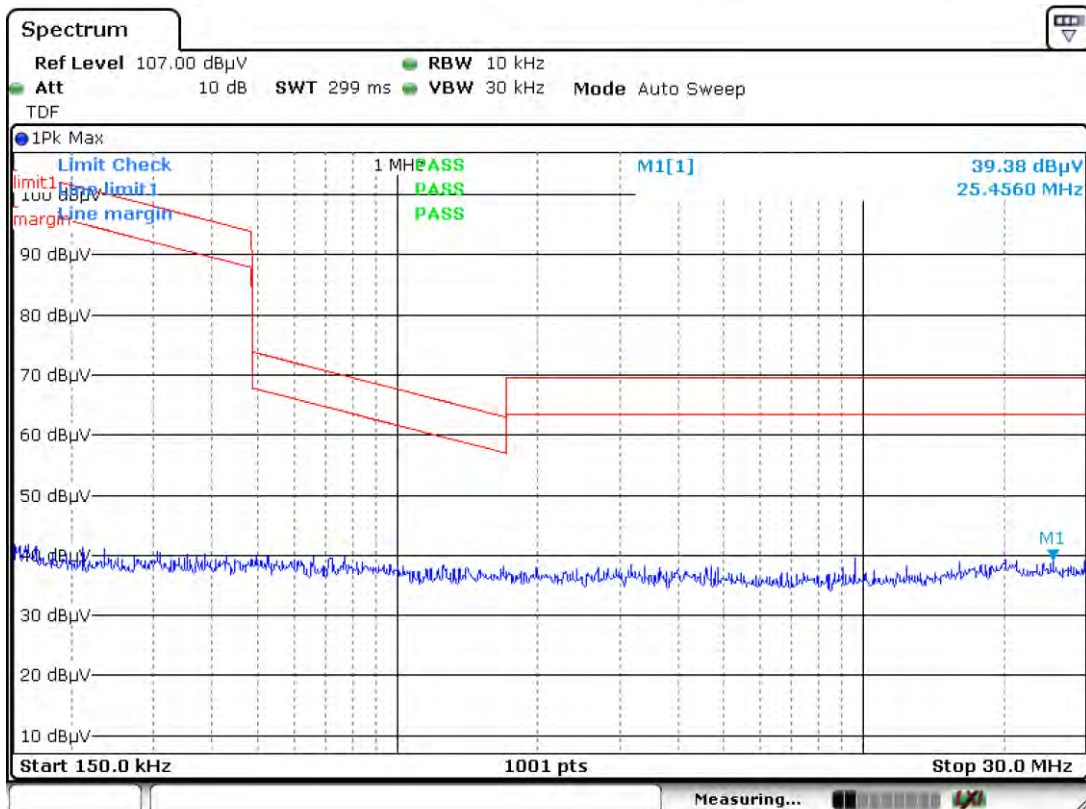
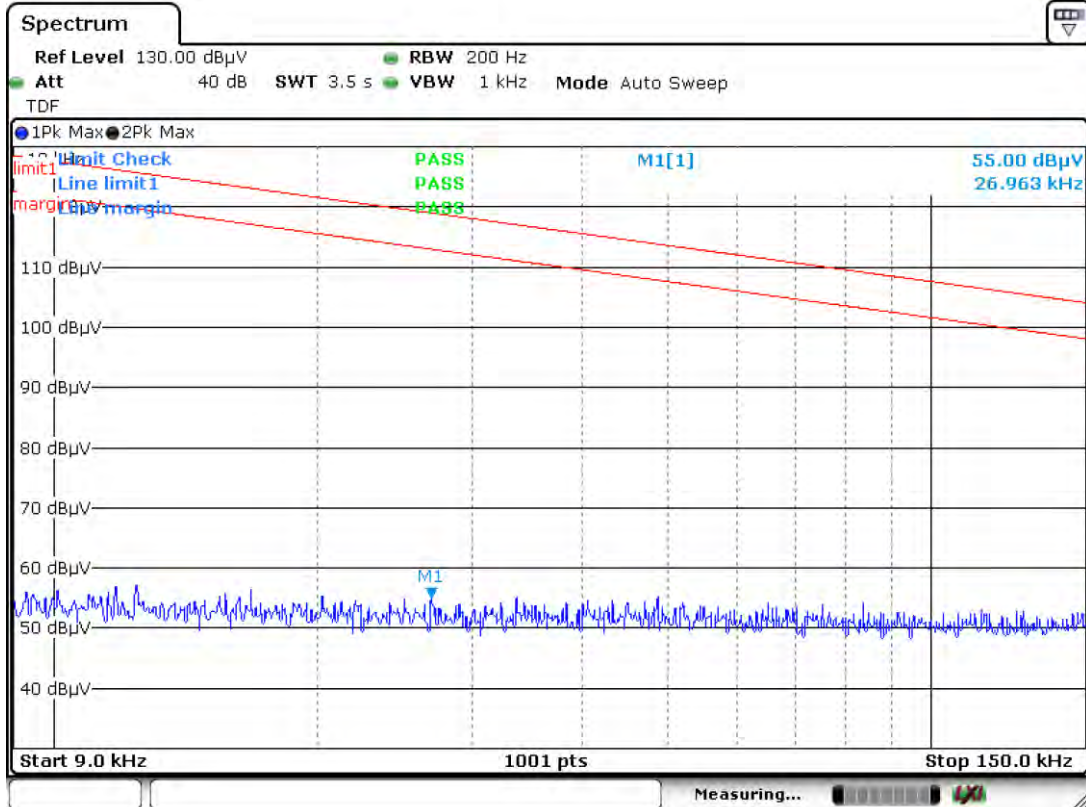
**RESULT:****Pass**

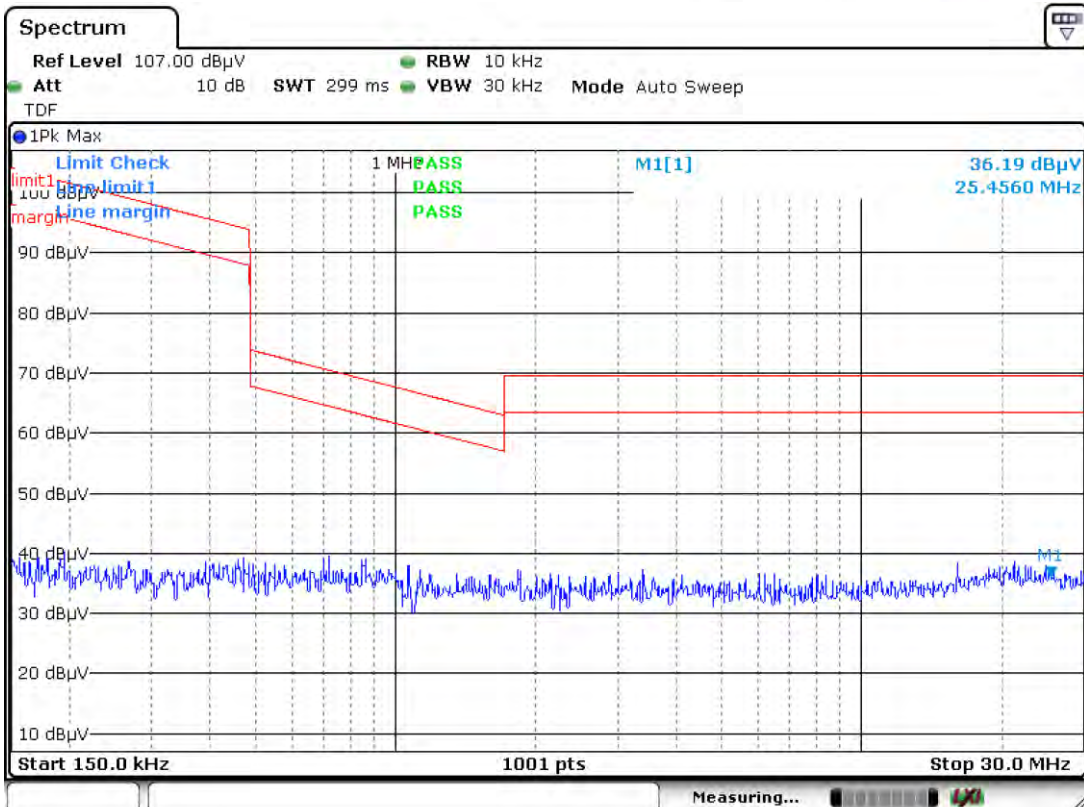
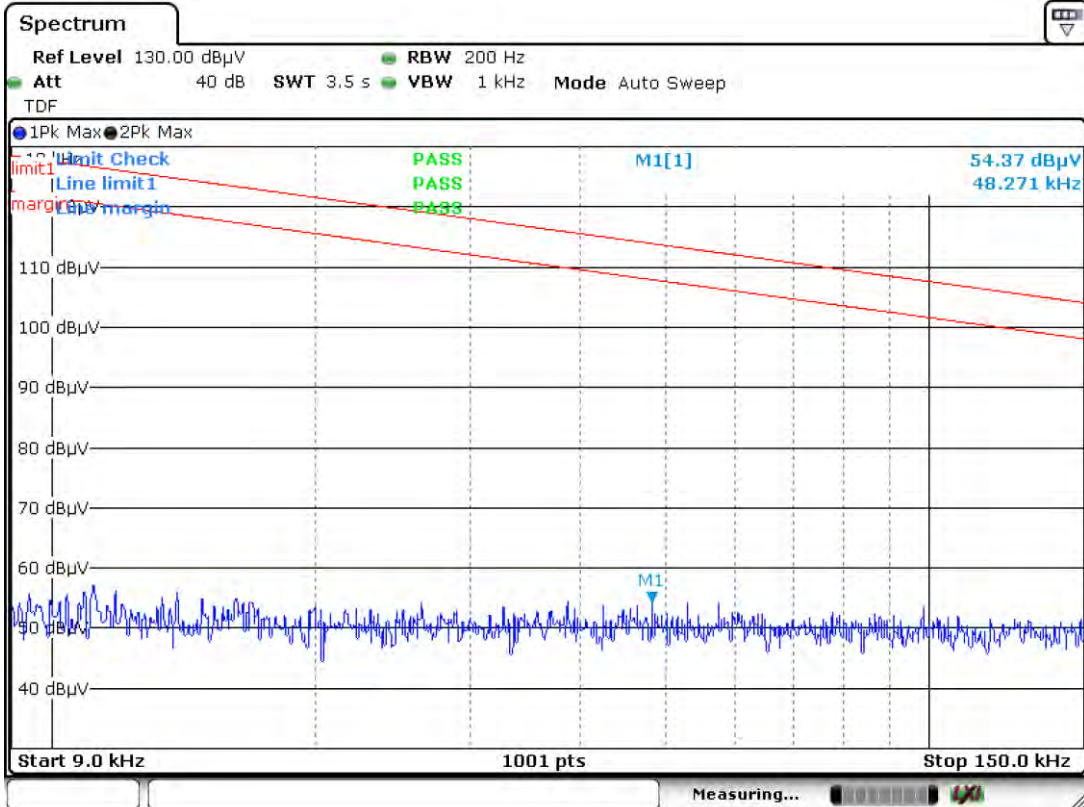
Date of testing : 2015-09-14  
Test standard : FCC part 15.407(b)  
RSS-247 clause 6.2.1(2)  
RSS-247 clause 6.2.4(2)  
KDB789033 D02 v01  
Basic standard : ANSI C63.10: 2013  
Limits : FCC part 15.209(a)  
Kind of test site : 3m Semi-Anechoic Chamber & Anechoic Chamber

**Test setup**

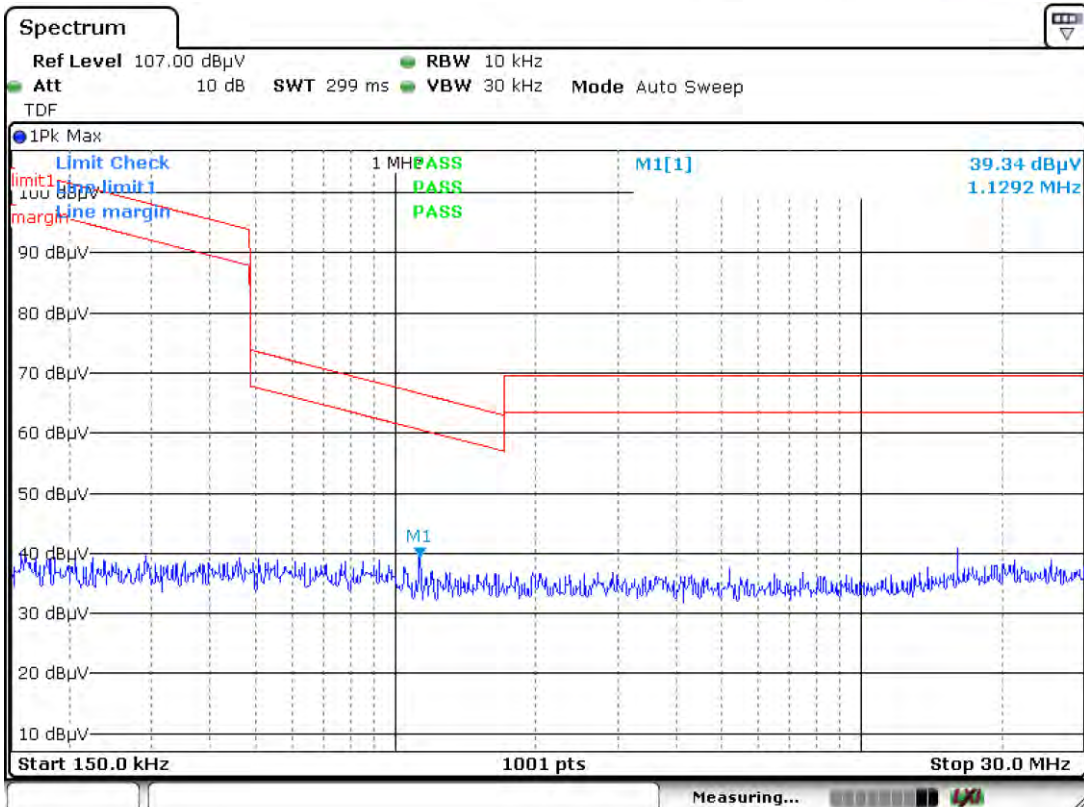
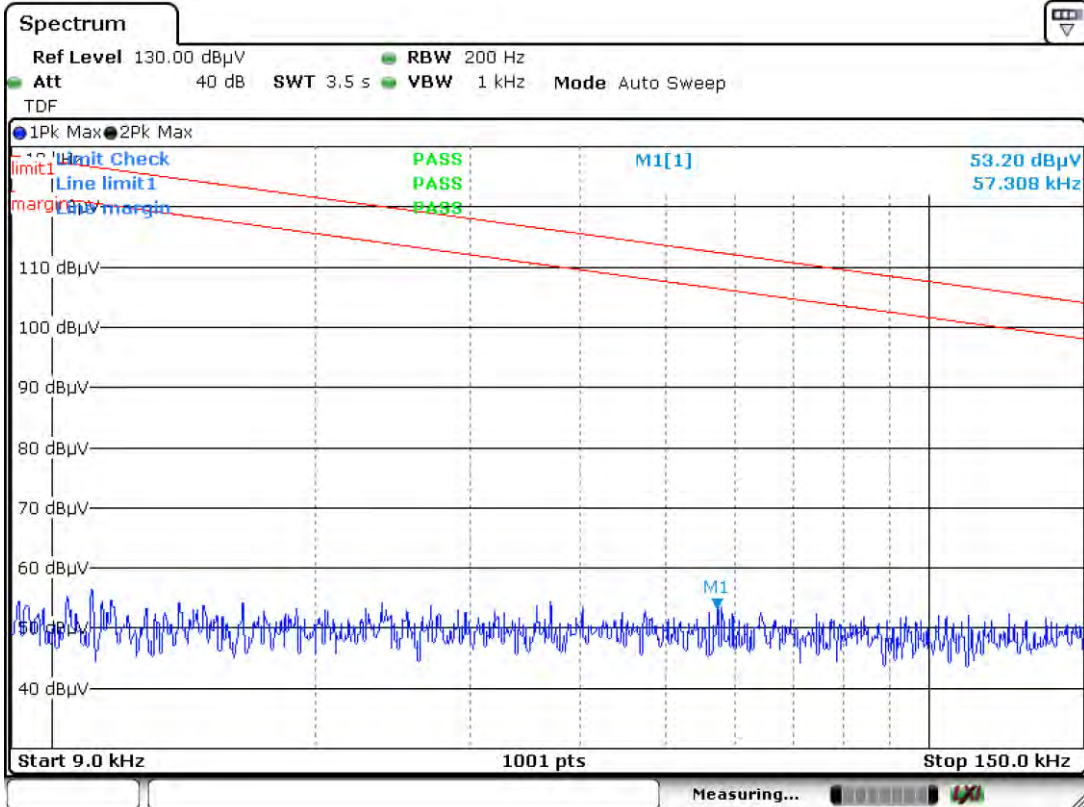
Test Channel : All channel  
Operation mode : A.1, B.1  
Ambient temperature : 24°C  
Relative humidity : 53%  
Atmospheric pressure : 101kPa

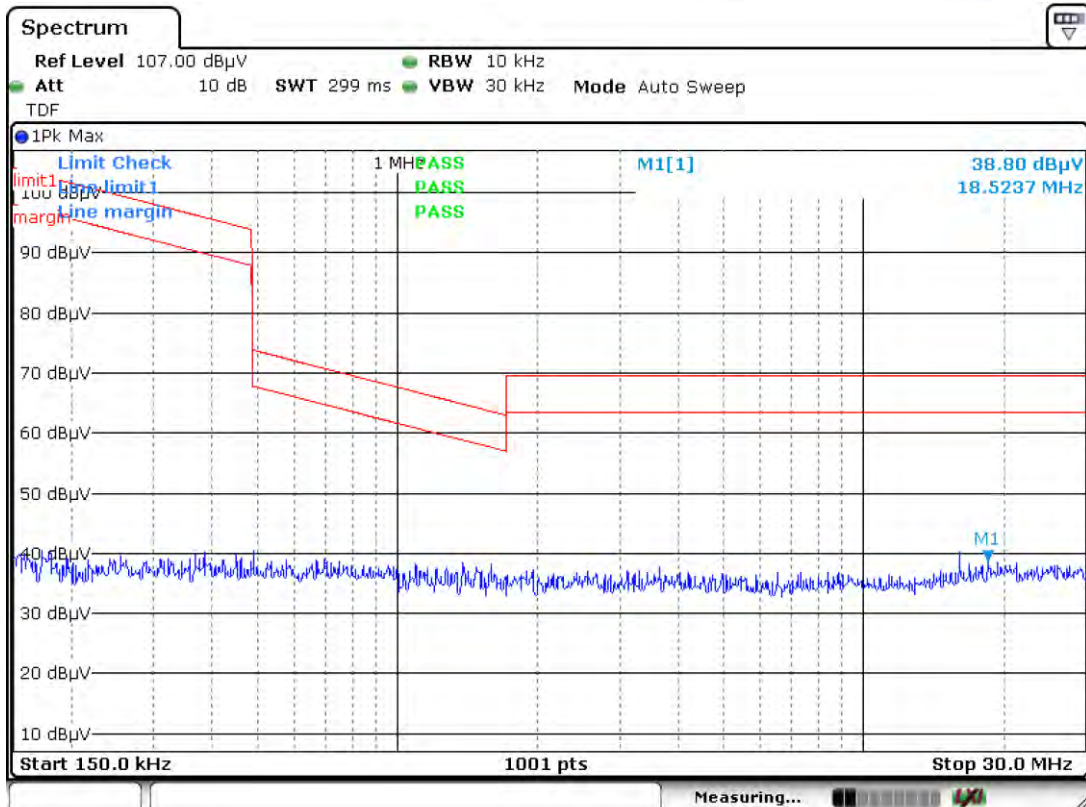
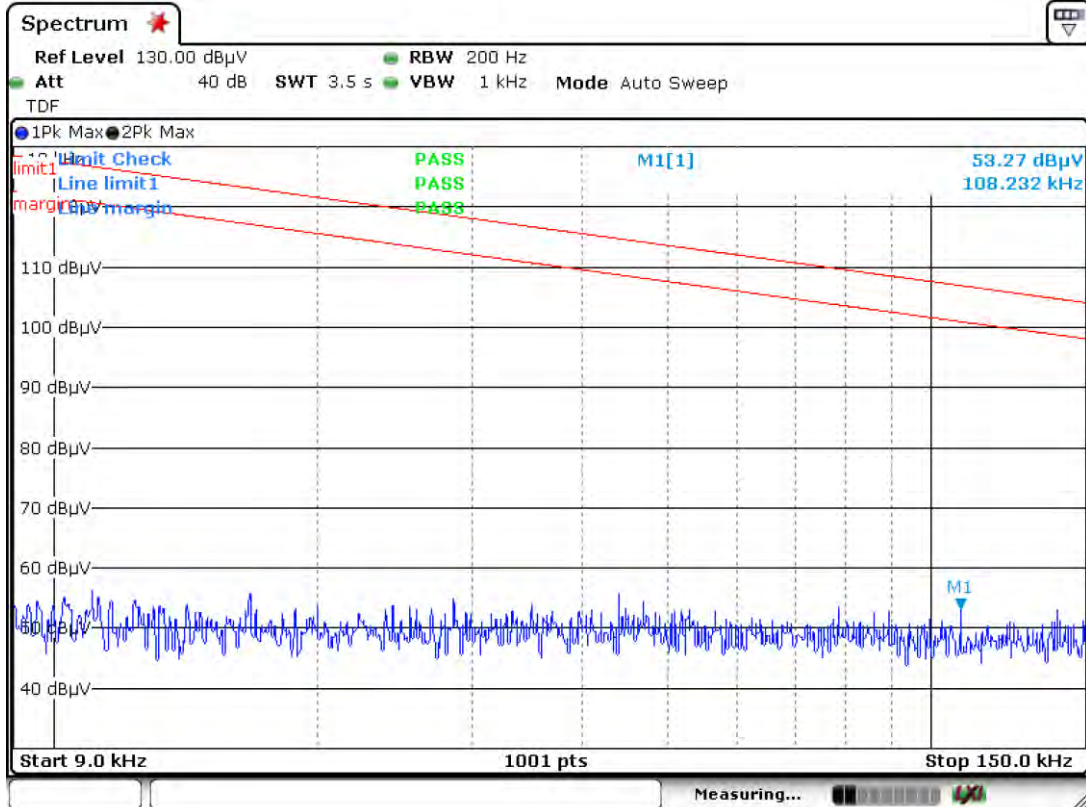
For details refer to following test plot.

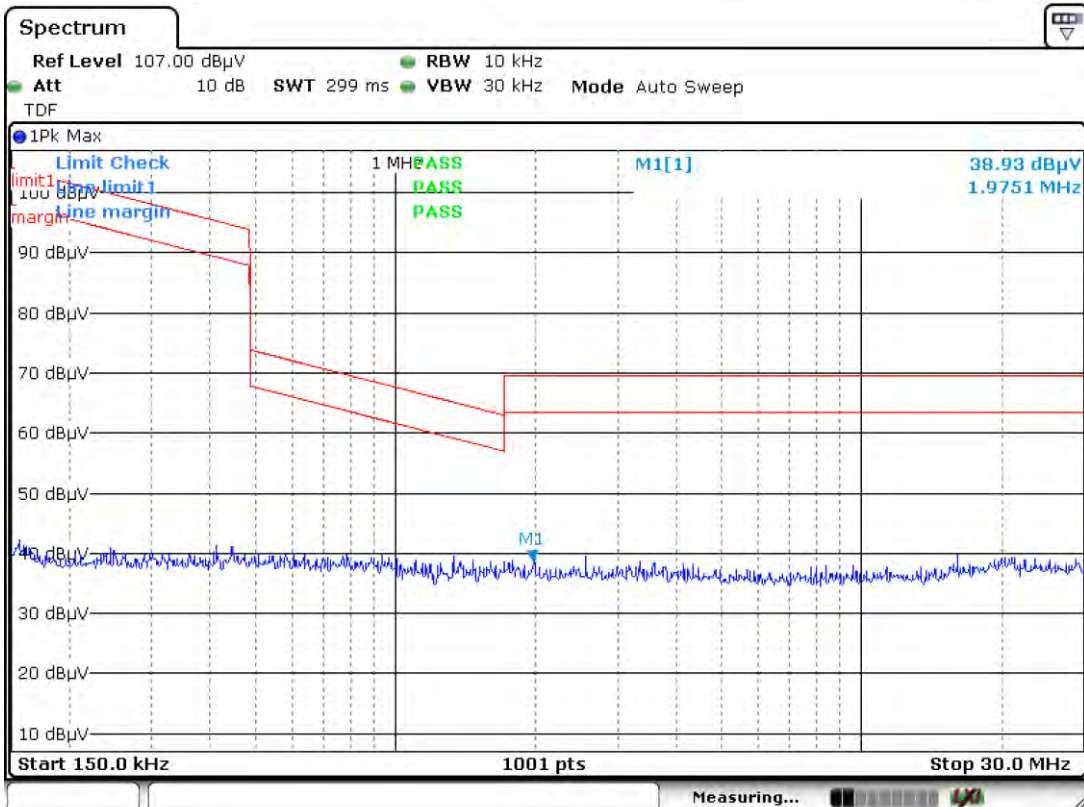
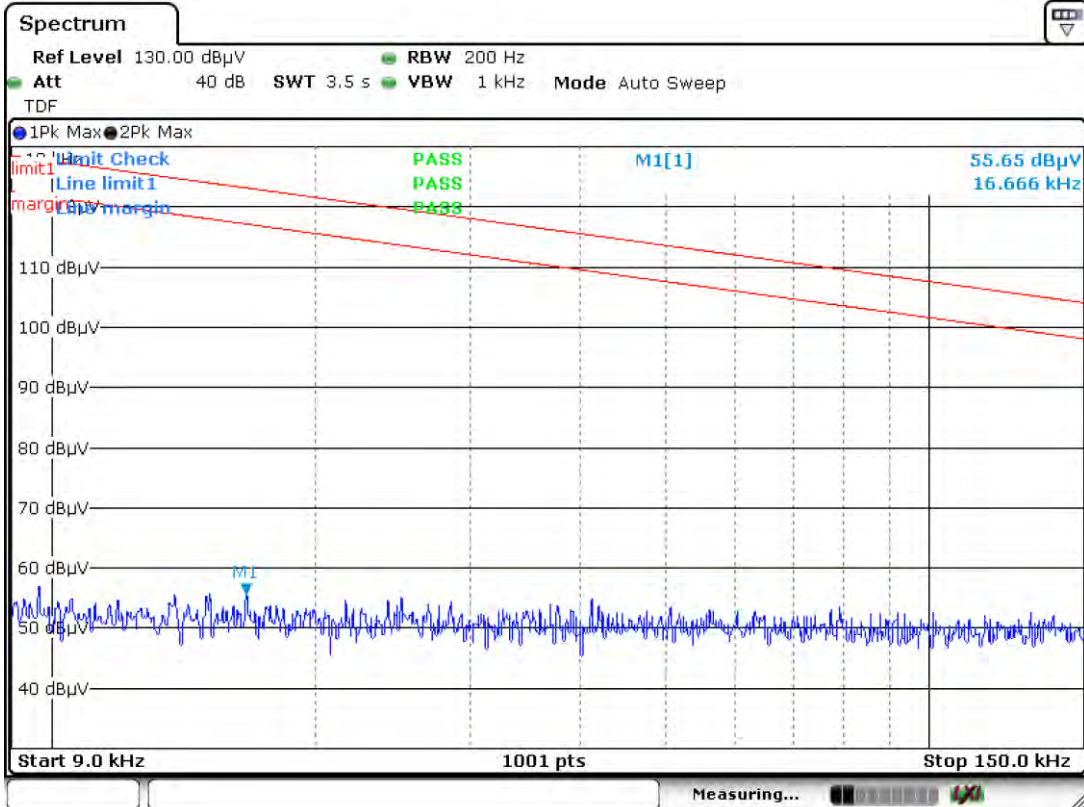
**Test Plot of 802.11a 5180MHz - X**


**Test Plot of 802.11a 5180MHz - Y**


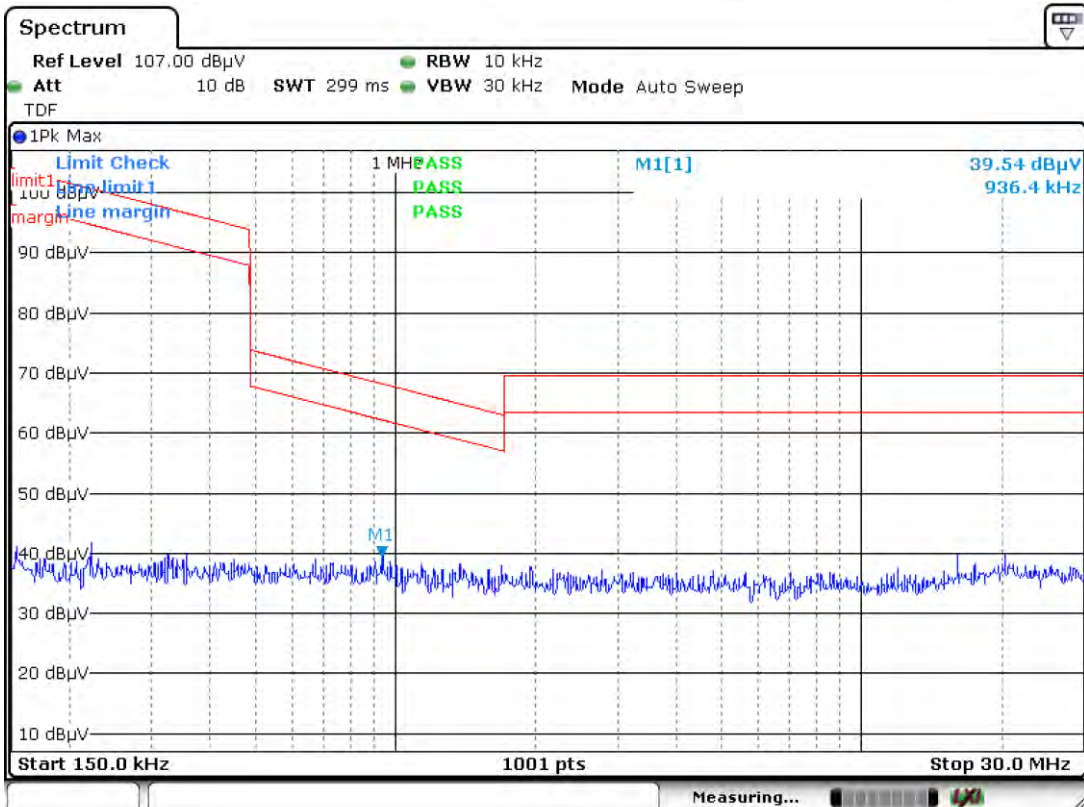
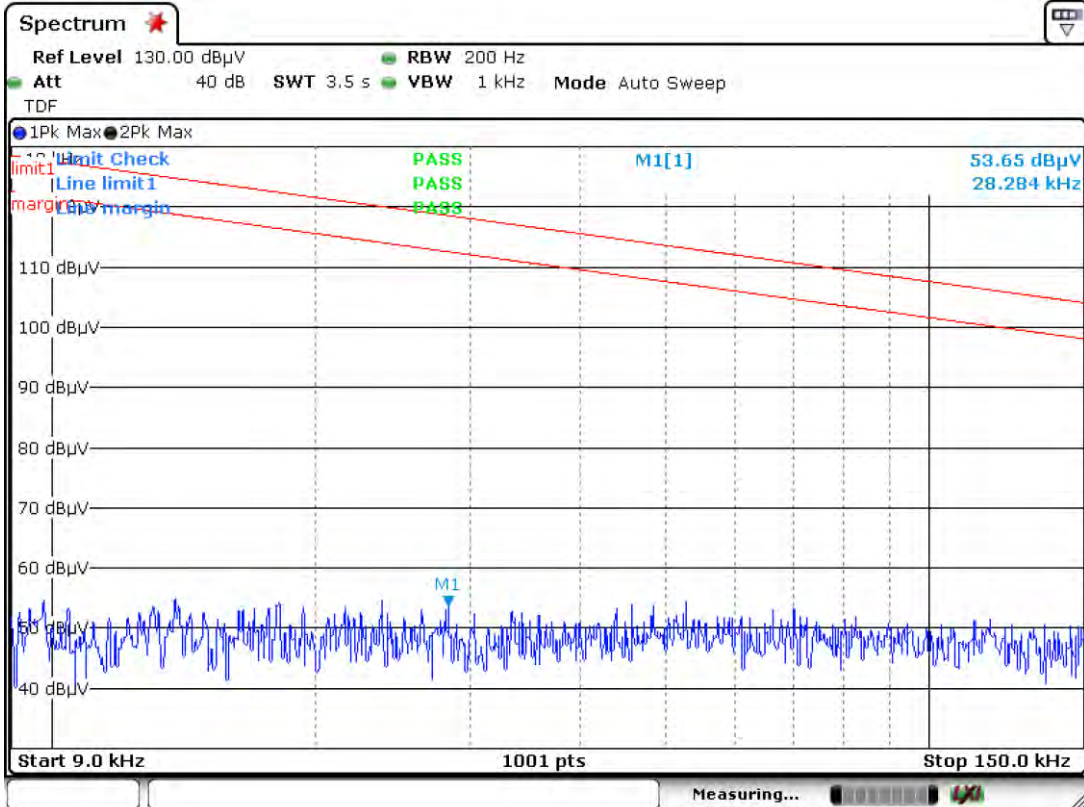


**Test Plot of 802.11a 5180MHz - Z**


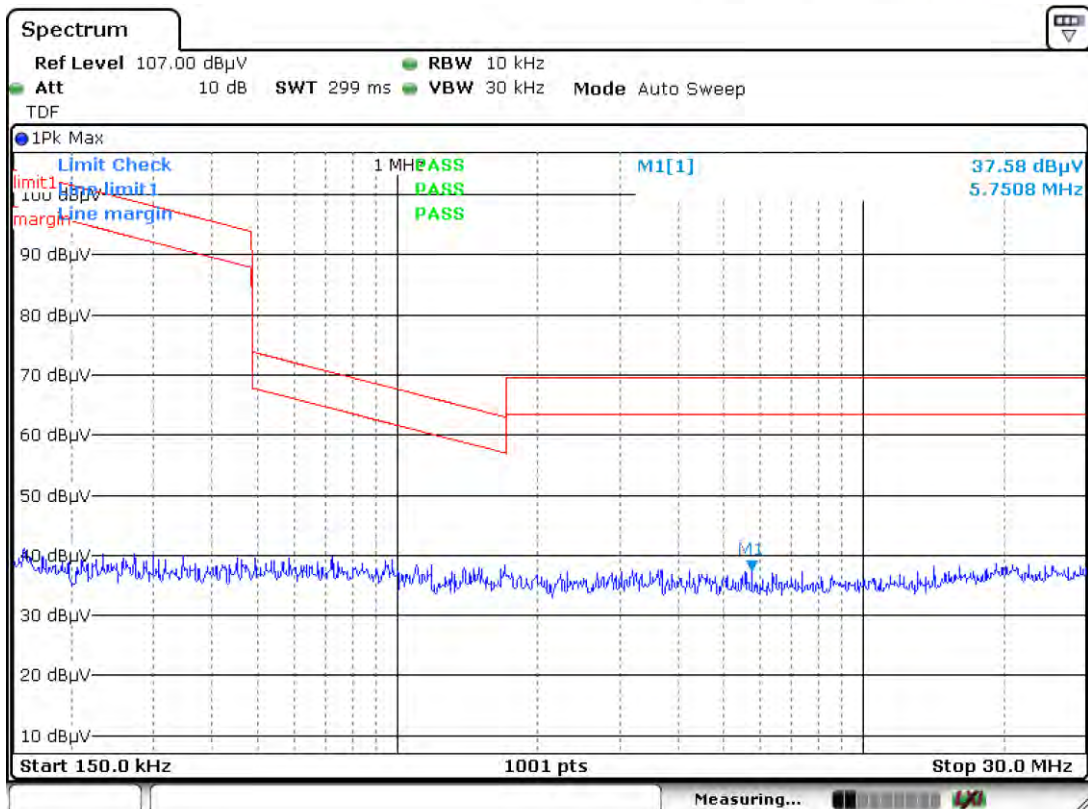
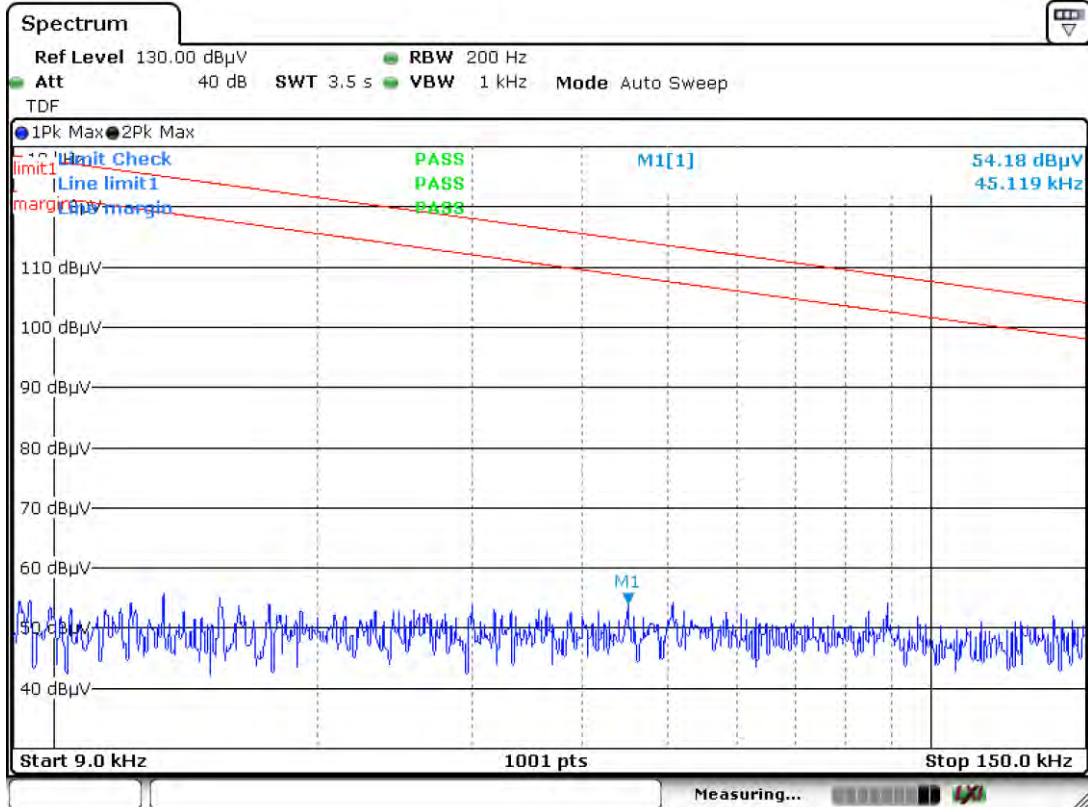
**Test Plot of 802.11a 5240MHz - X**


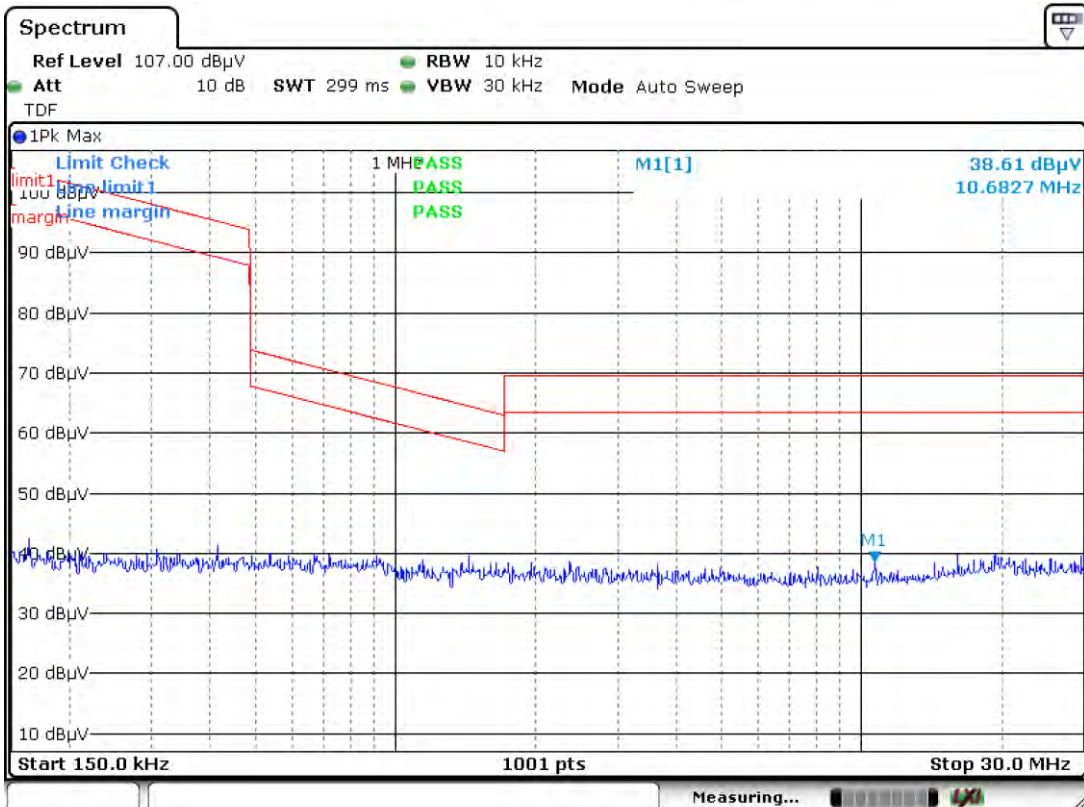
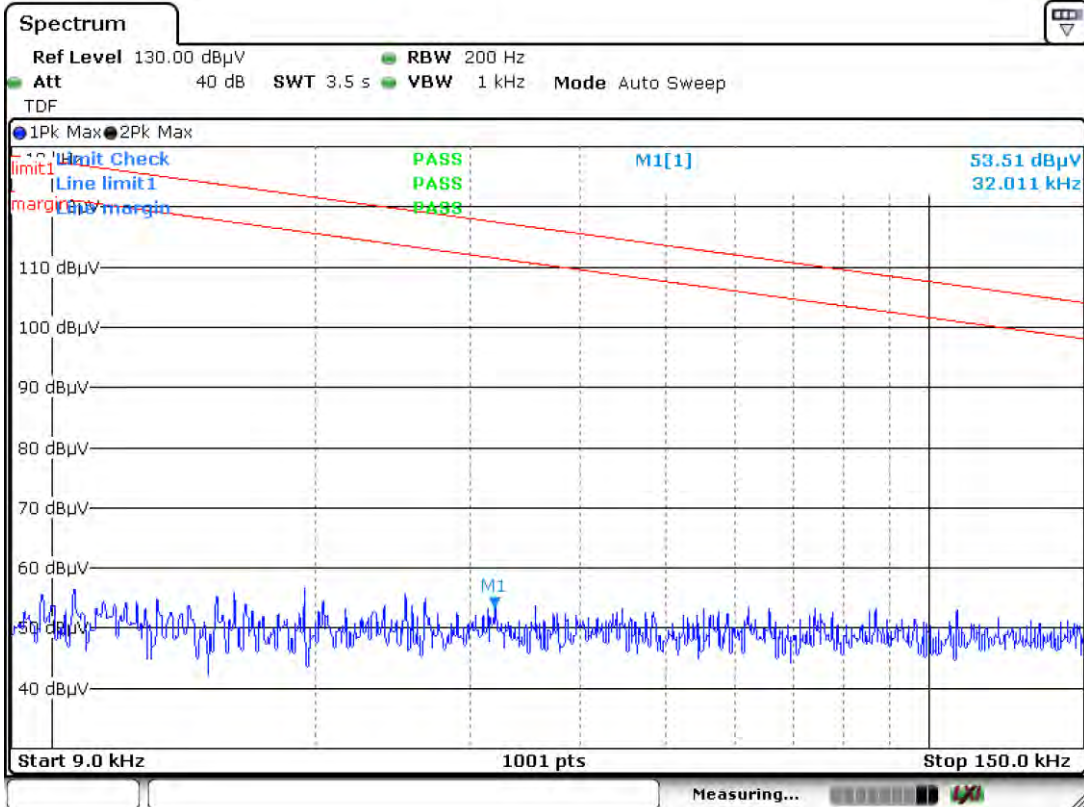
**Test Plot of 802.11a 5240MHz - Y**




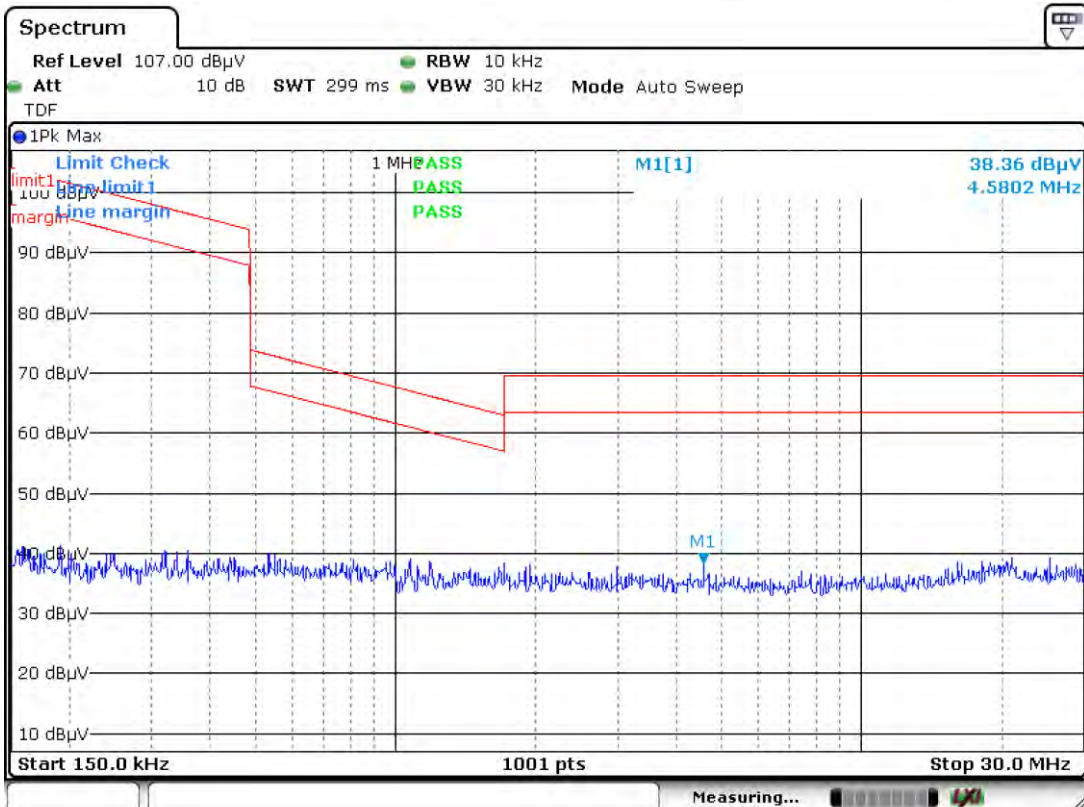
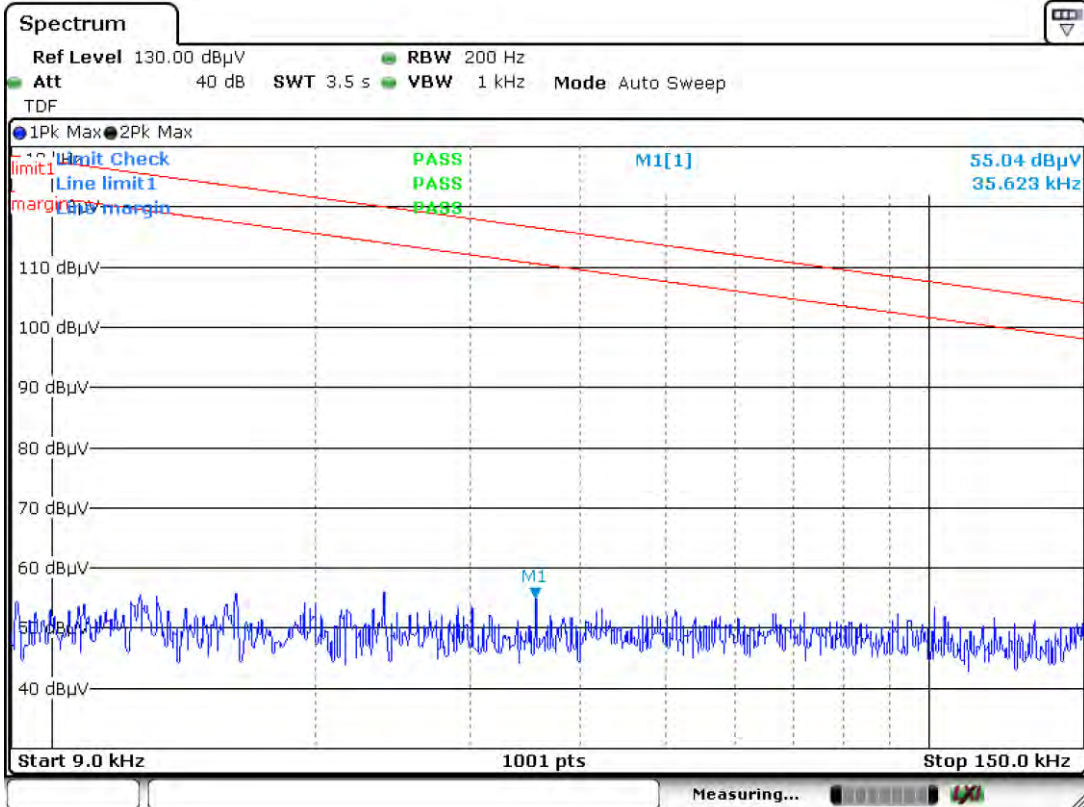
**Test Plot of 802.11a 5240MHz - Z**


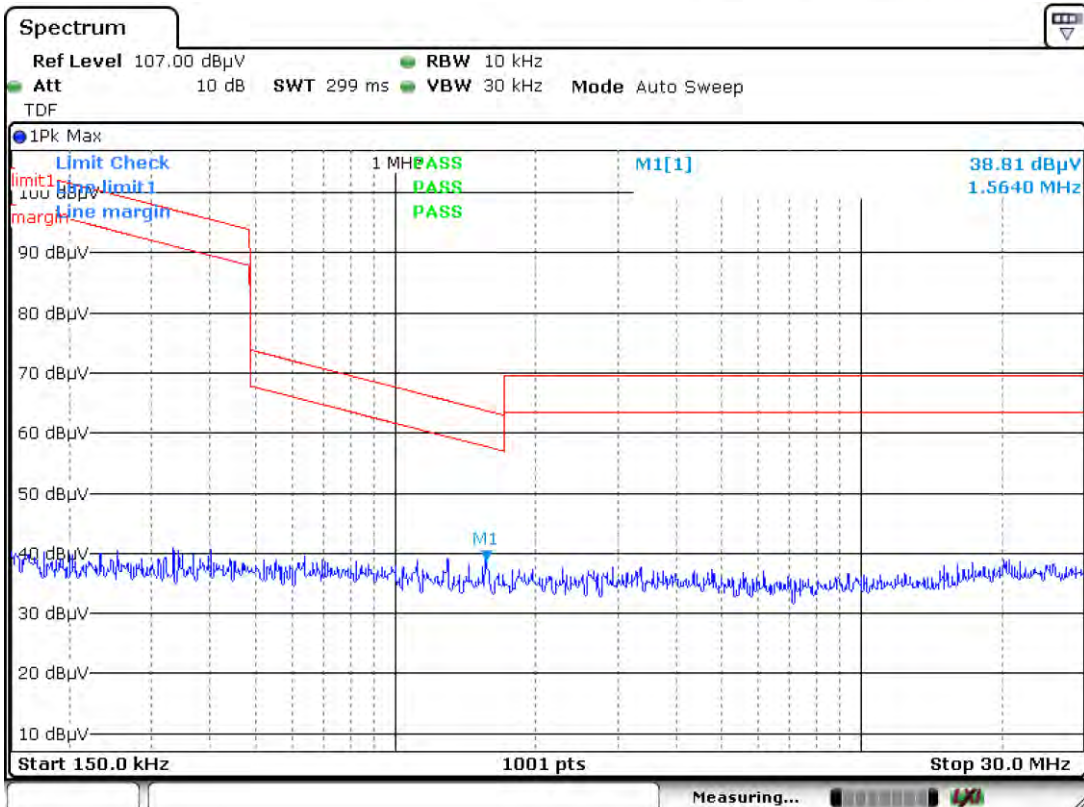
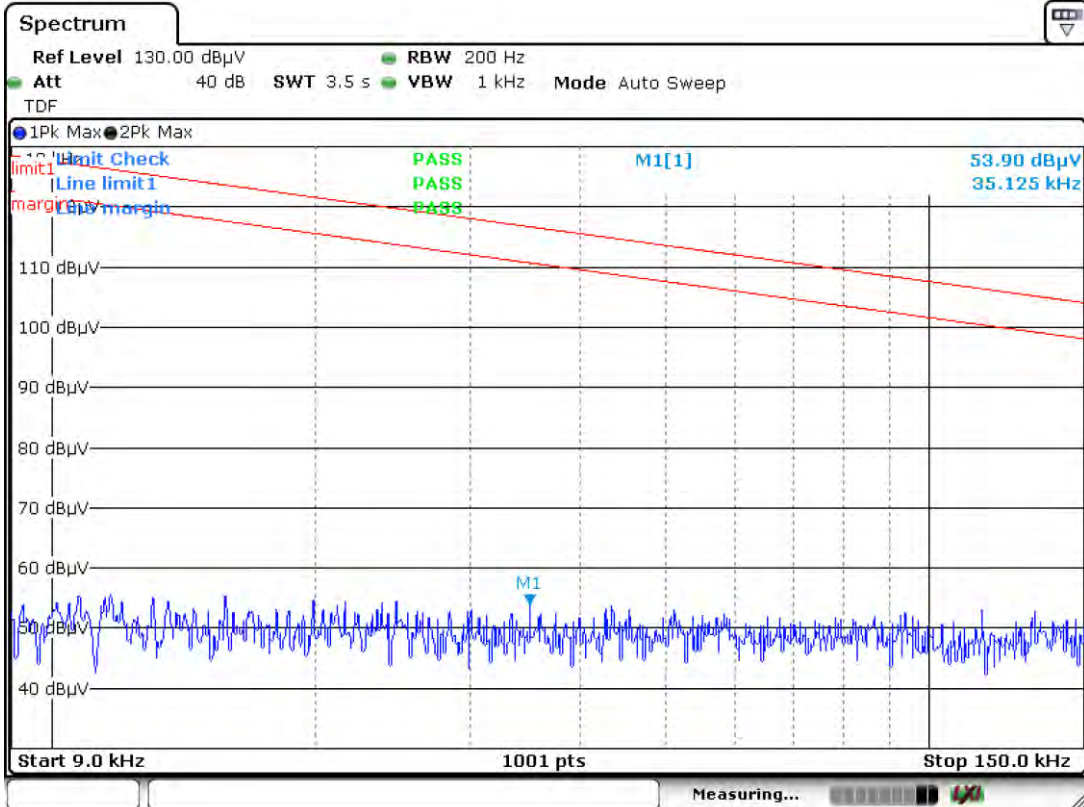
### Test Plot of 802.11a 5745MHz - X

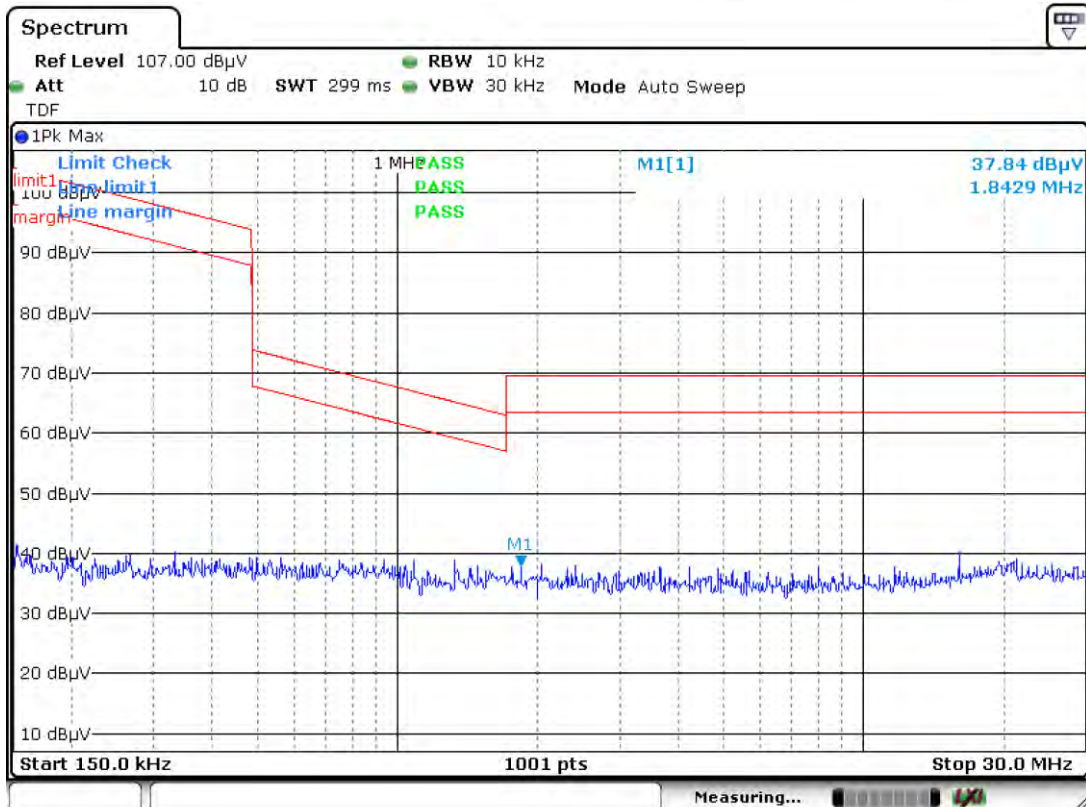
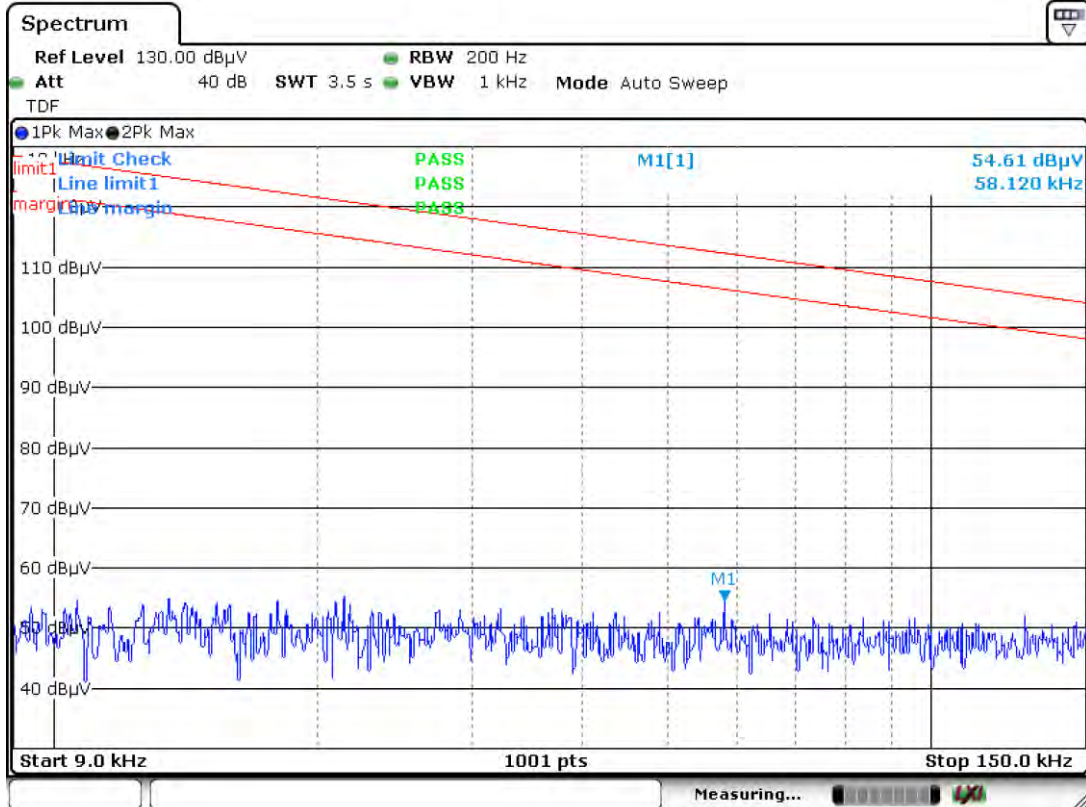


**Test Plot of 802.11a 5745MHz - Y**


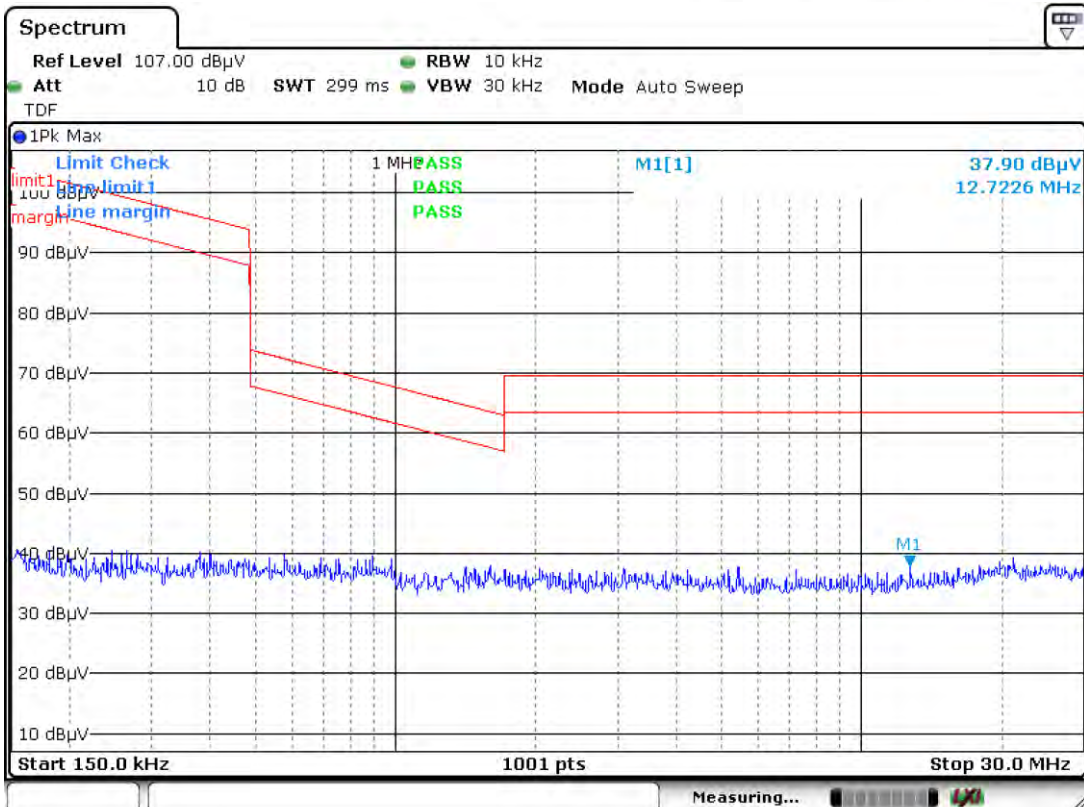
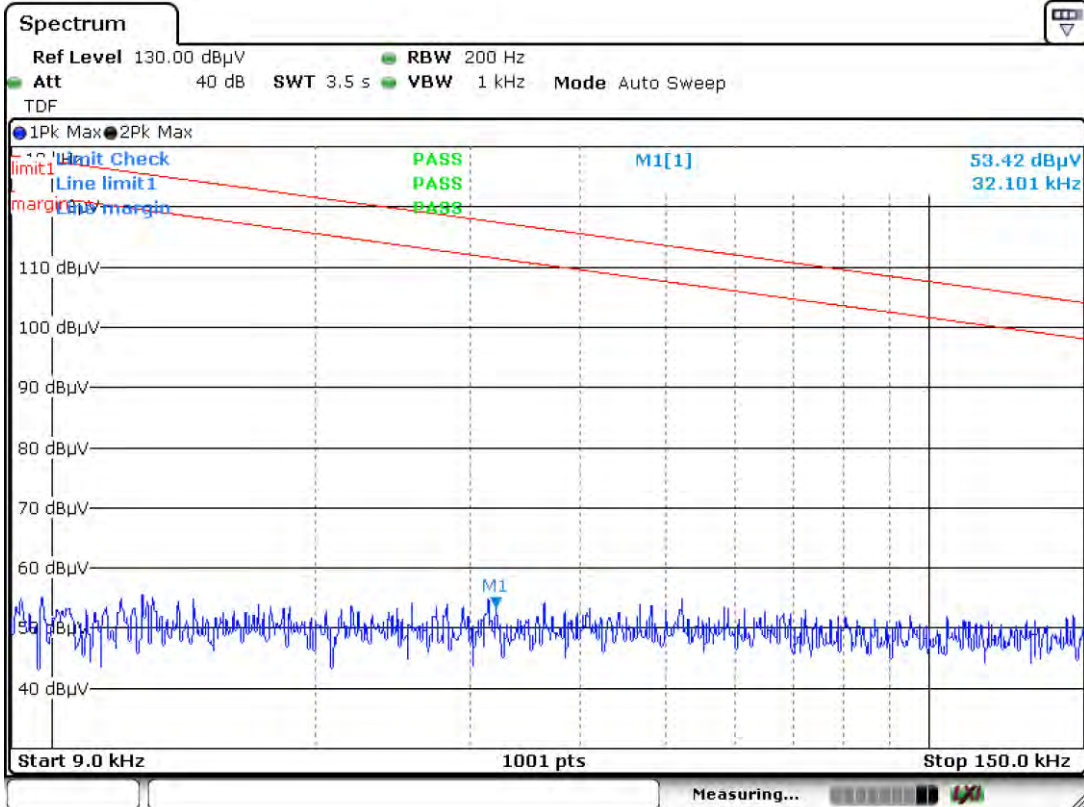


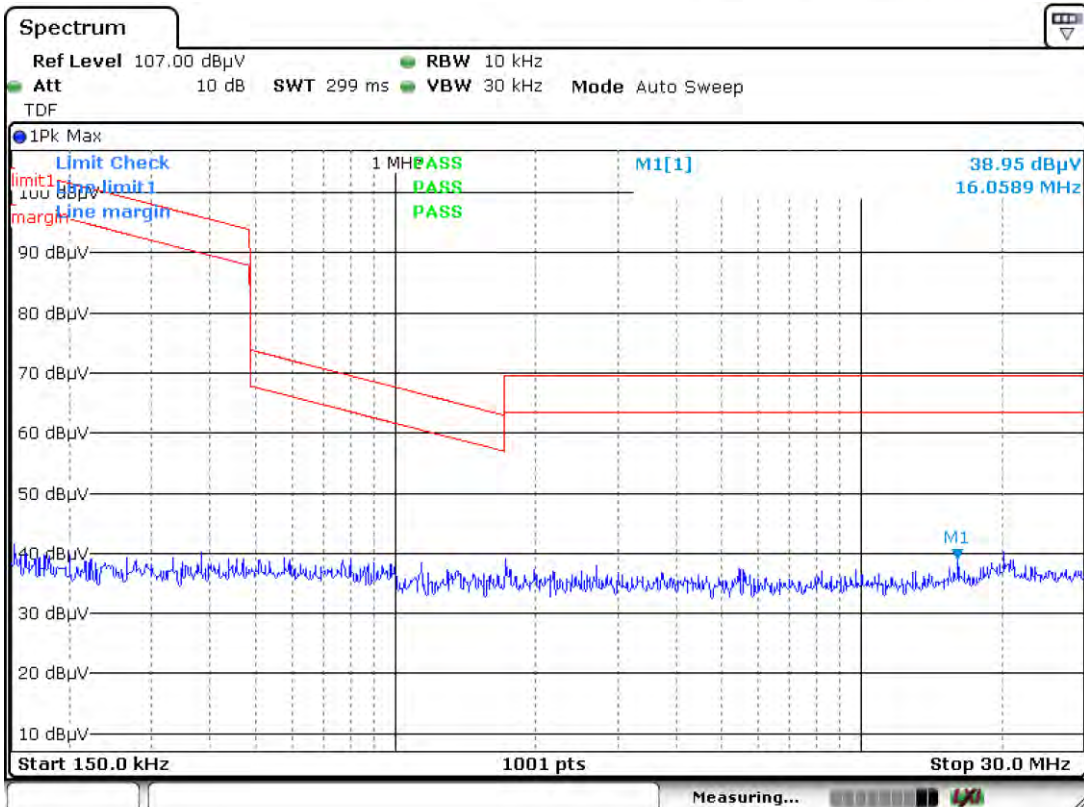
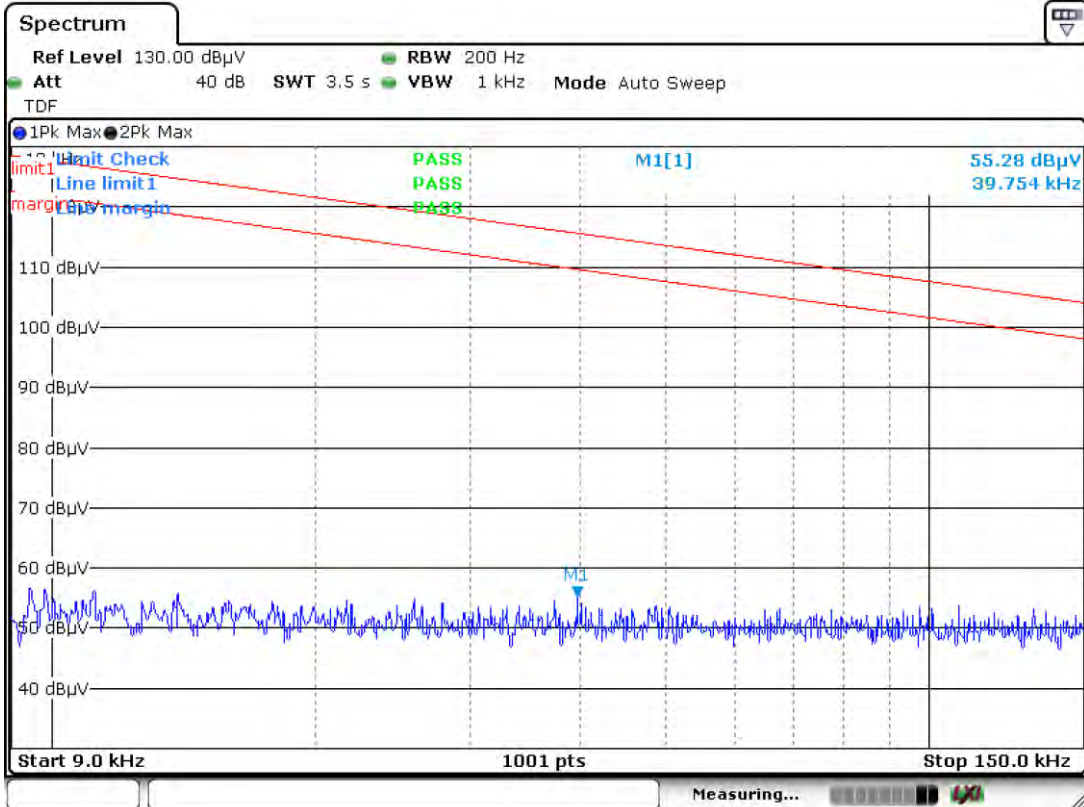
**Test Plot of 802.11a 5745MHz - Z**


**Test Plot of 802.11a 5825MHz - X**


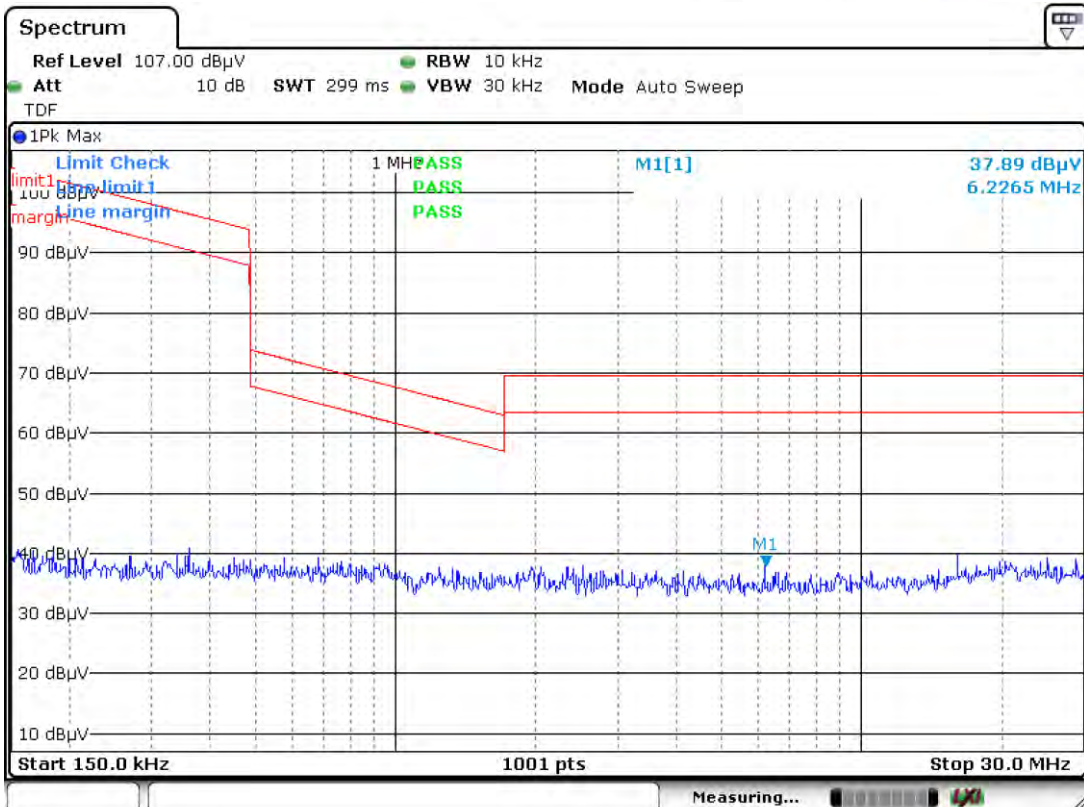
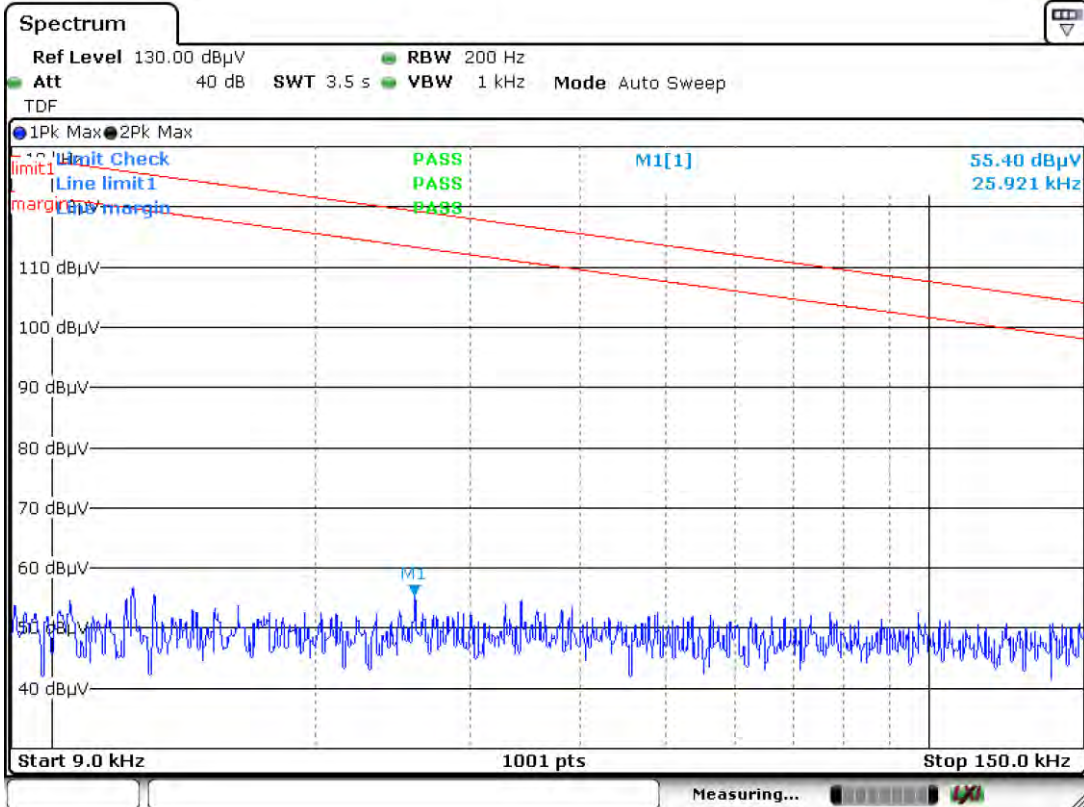
**Test Plot of 802.11a 5825MHz - Y**


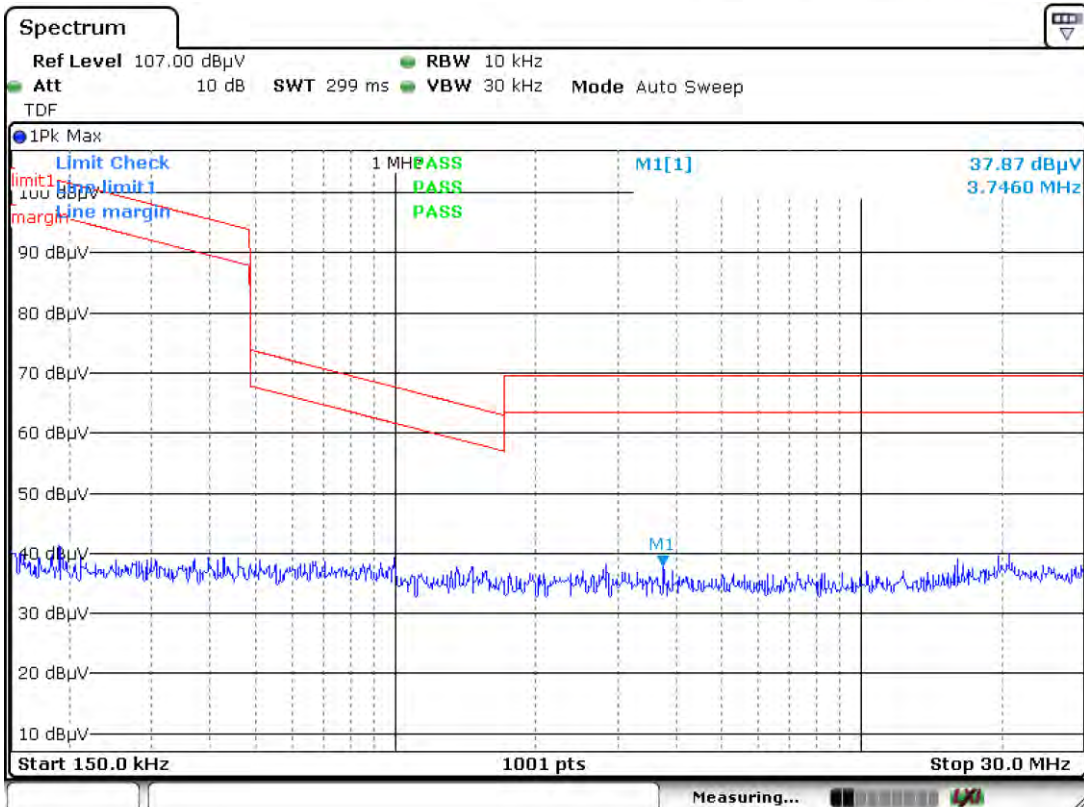
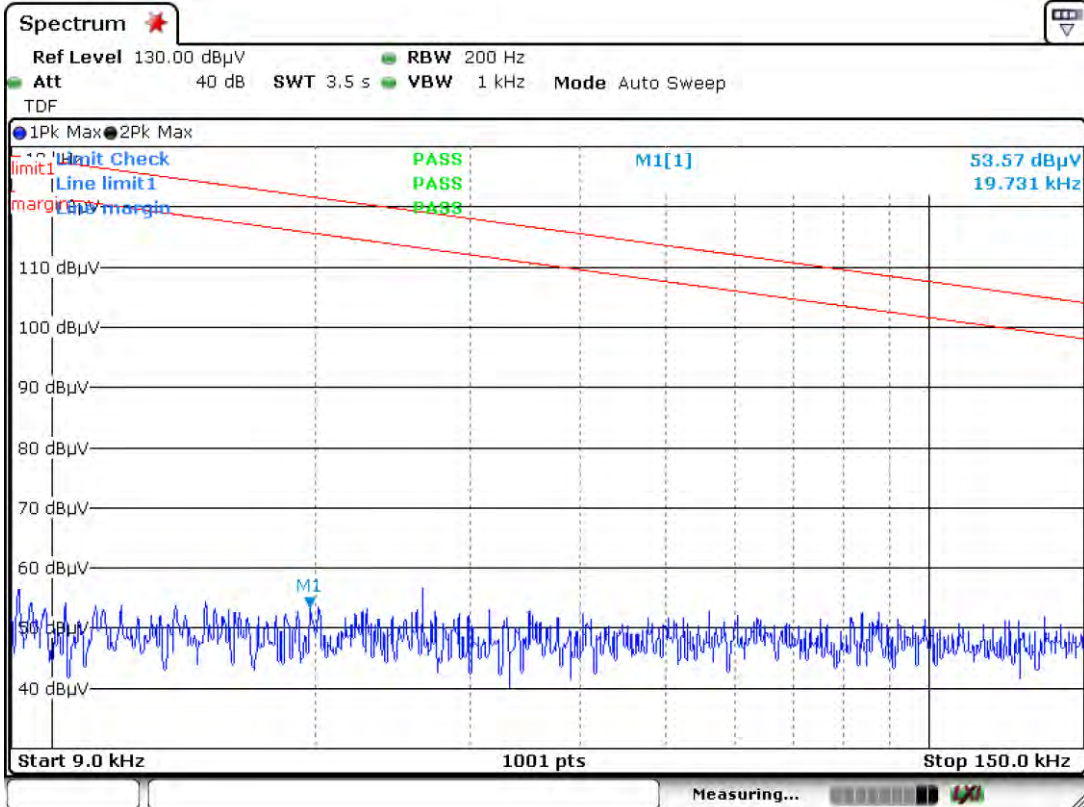


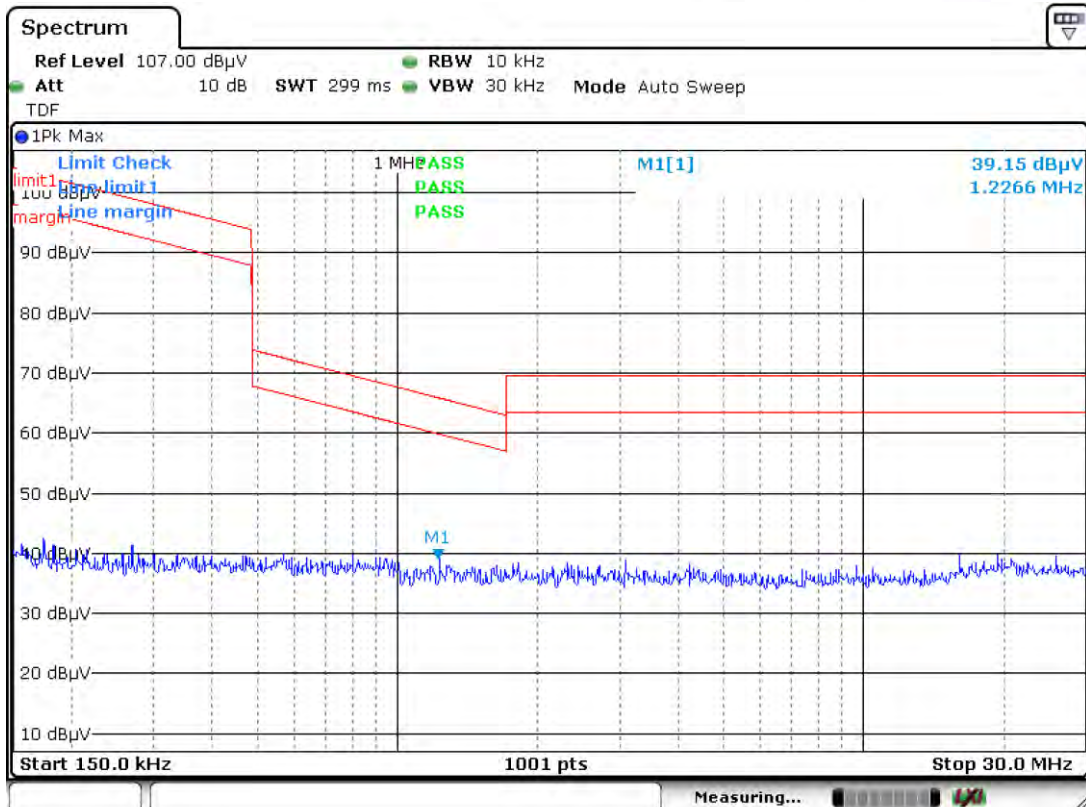
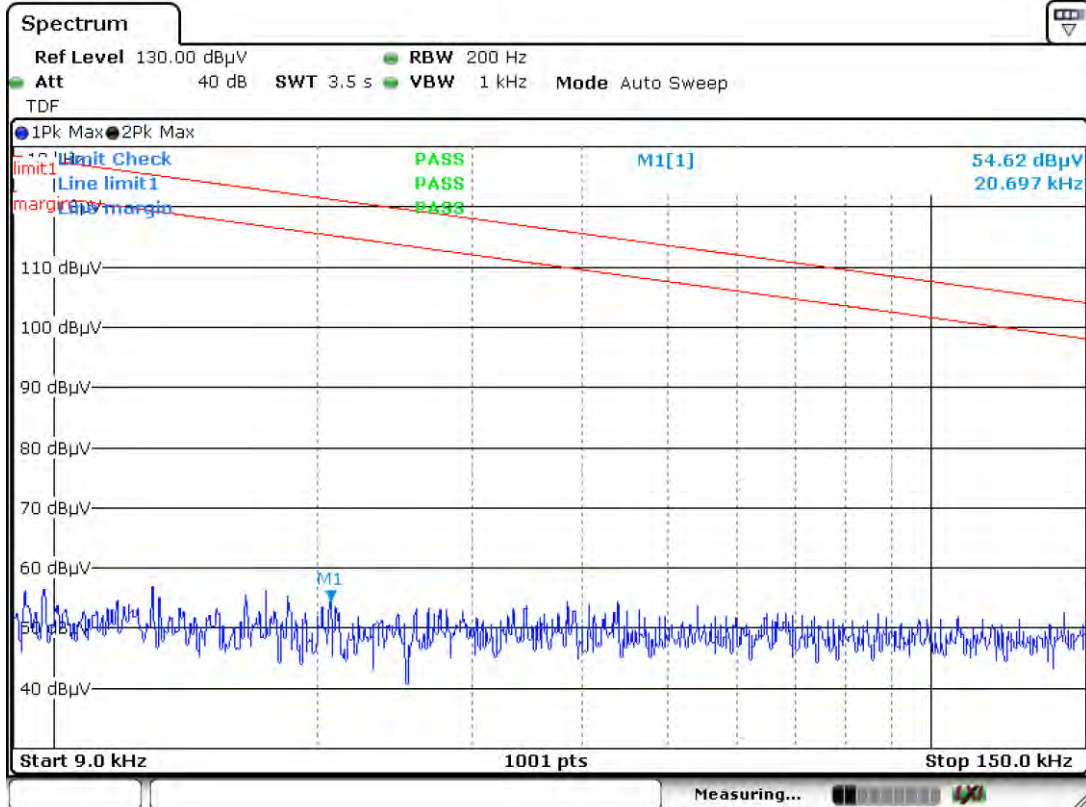
**Test Plot of 802.11a 5825MHz - Z**


**Test Plot of 802.11n HT40 5190MHz - X**


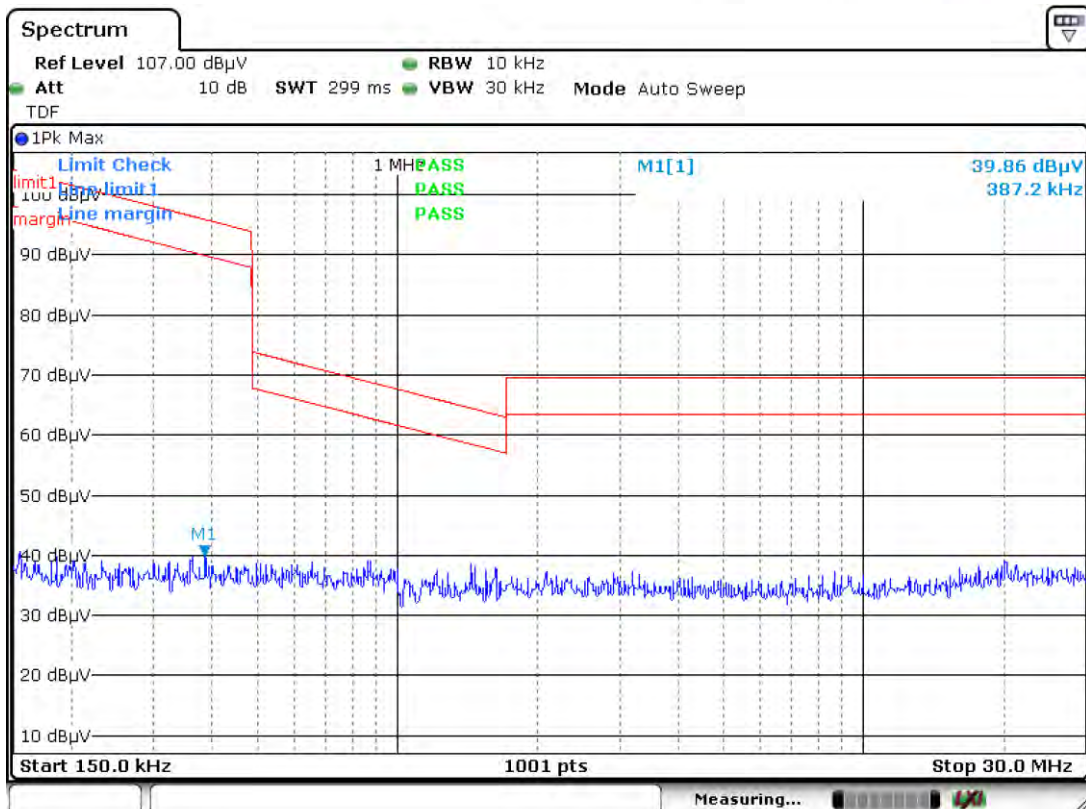
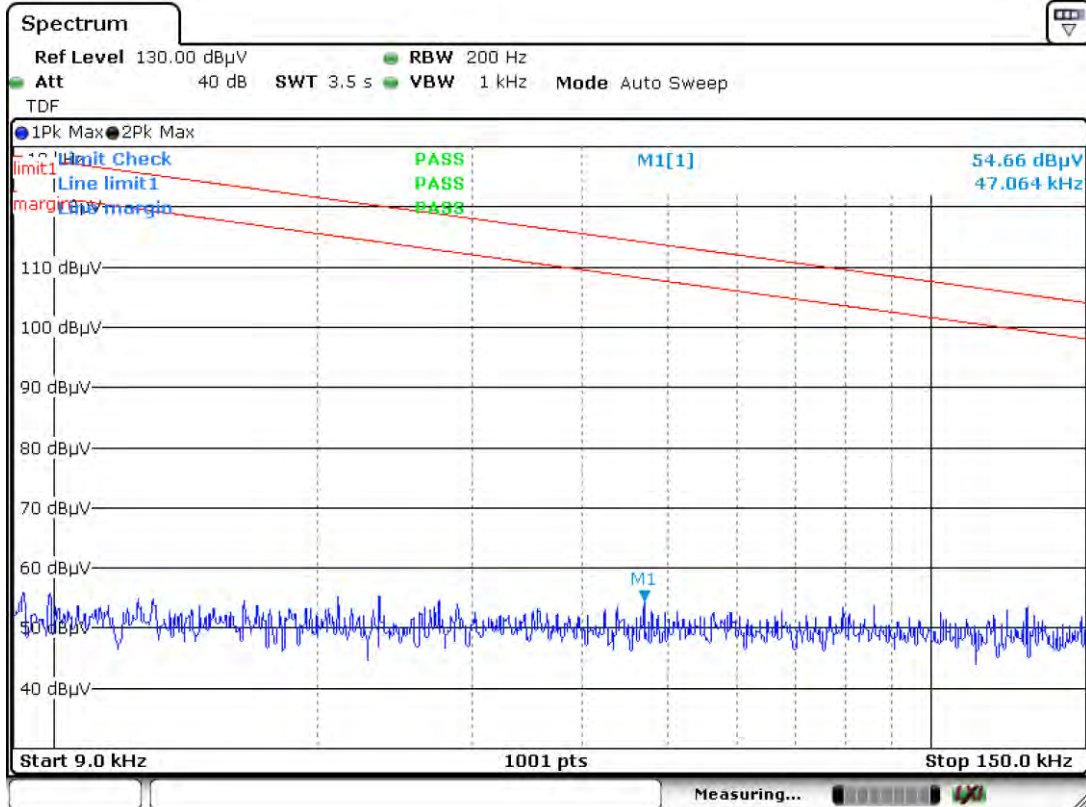


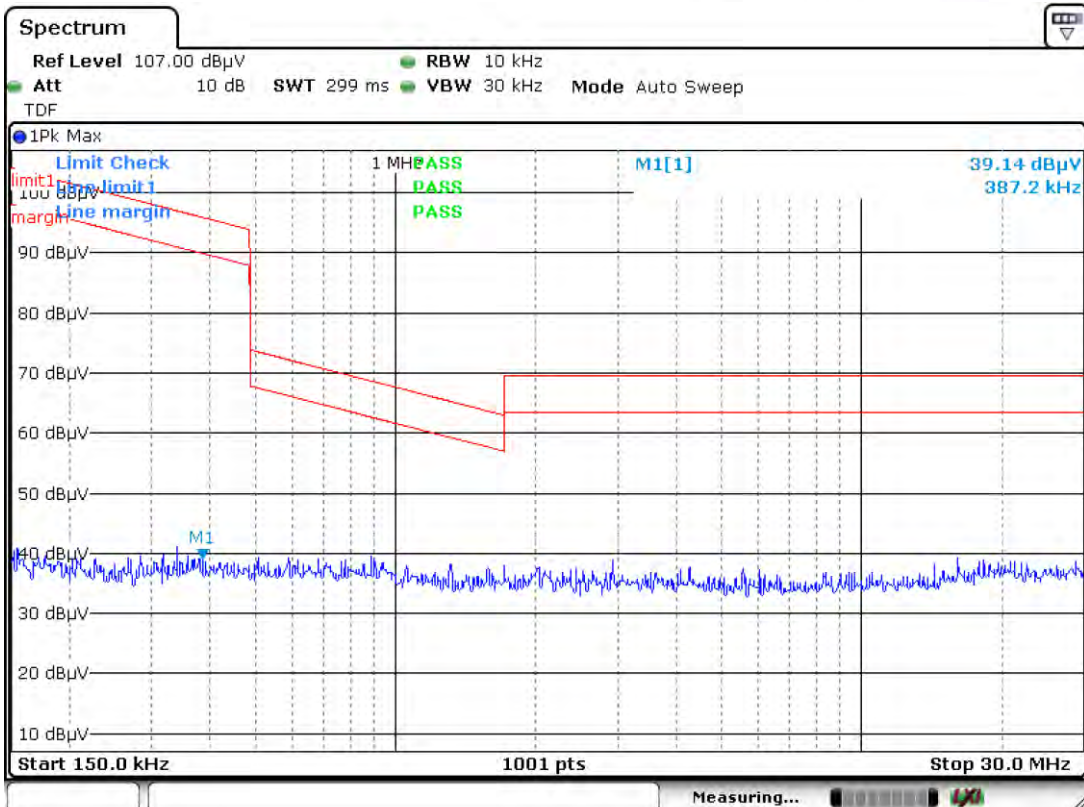
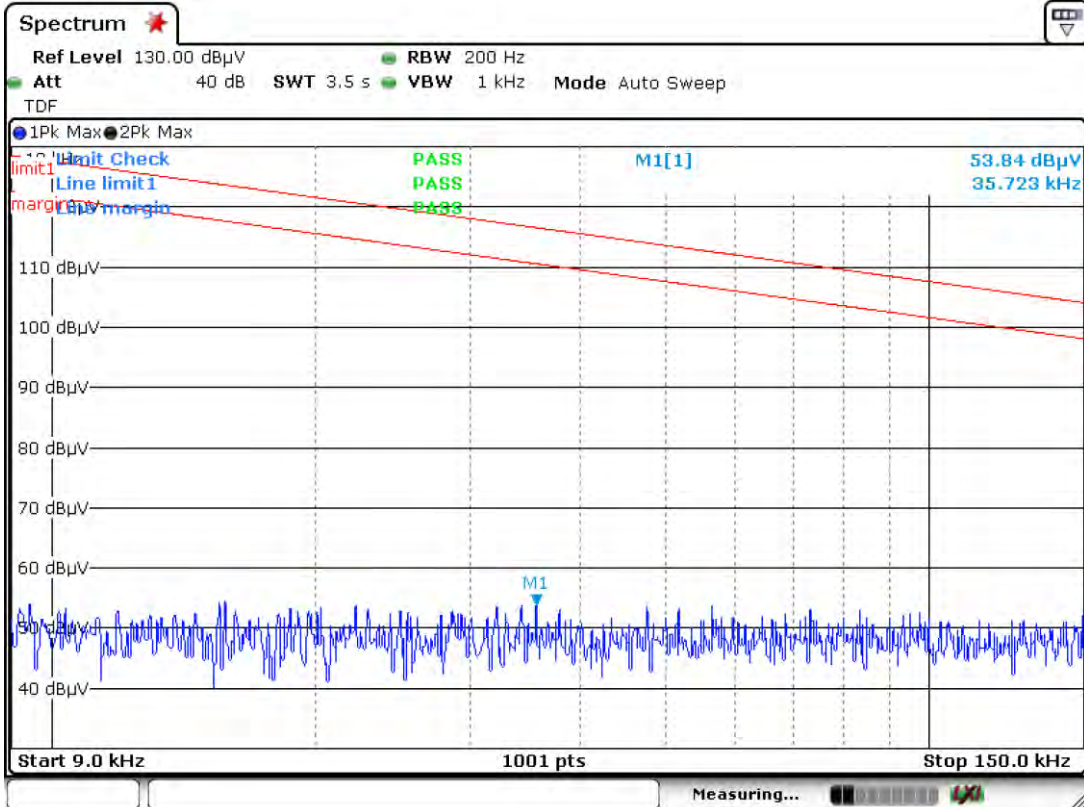
**Test Plot of 802.11n HT40 5190MHz - Y**


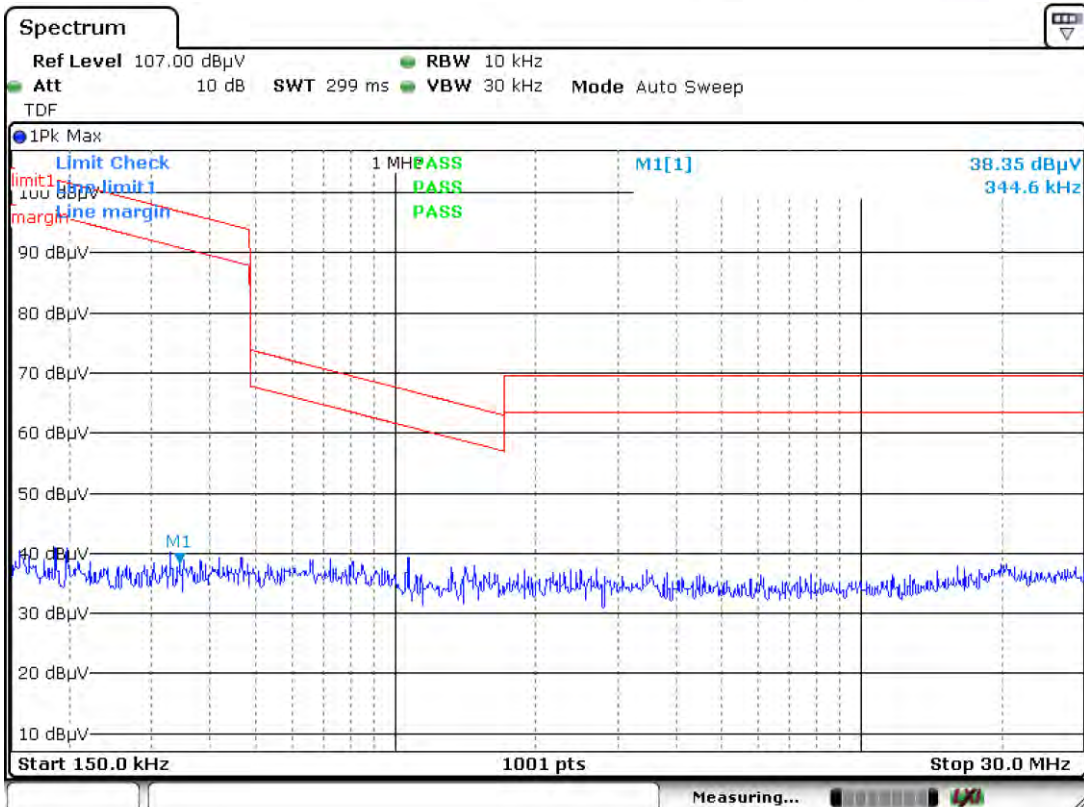
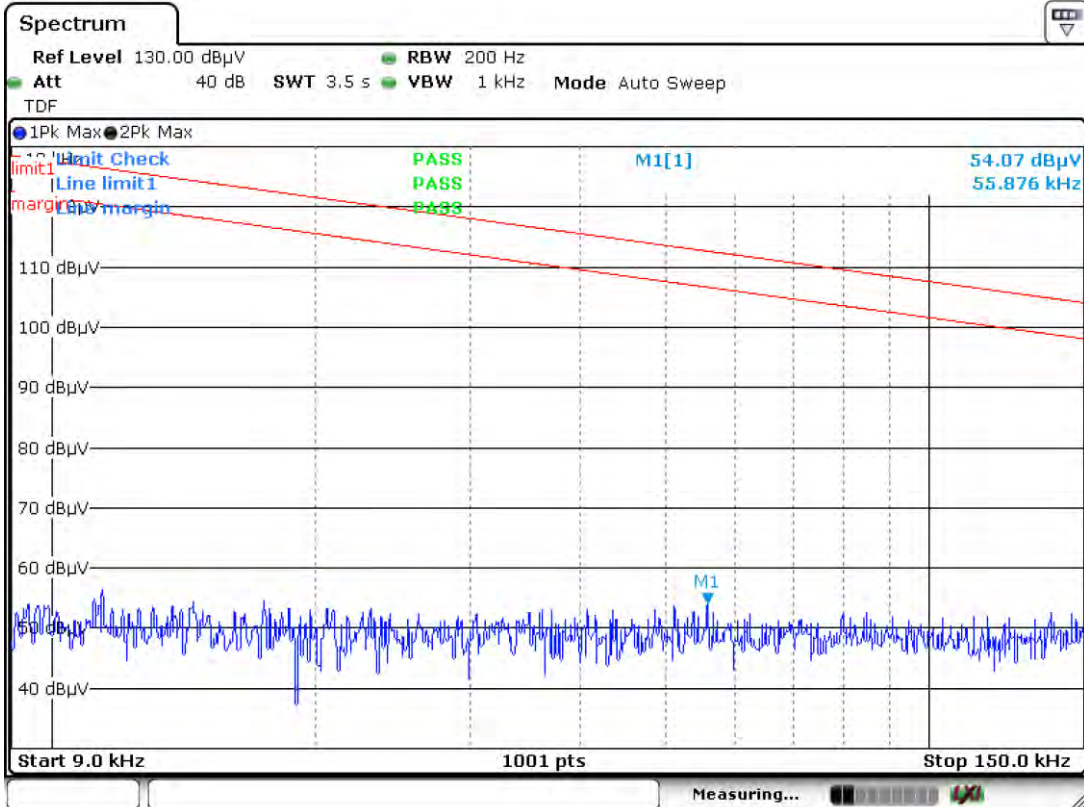
**Test Plot of 802.11n HT40 5190MHz - Z**


**Test Plot of 802.11n HT40 5230MHz - X**


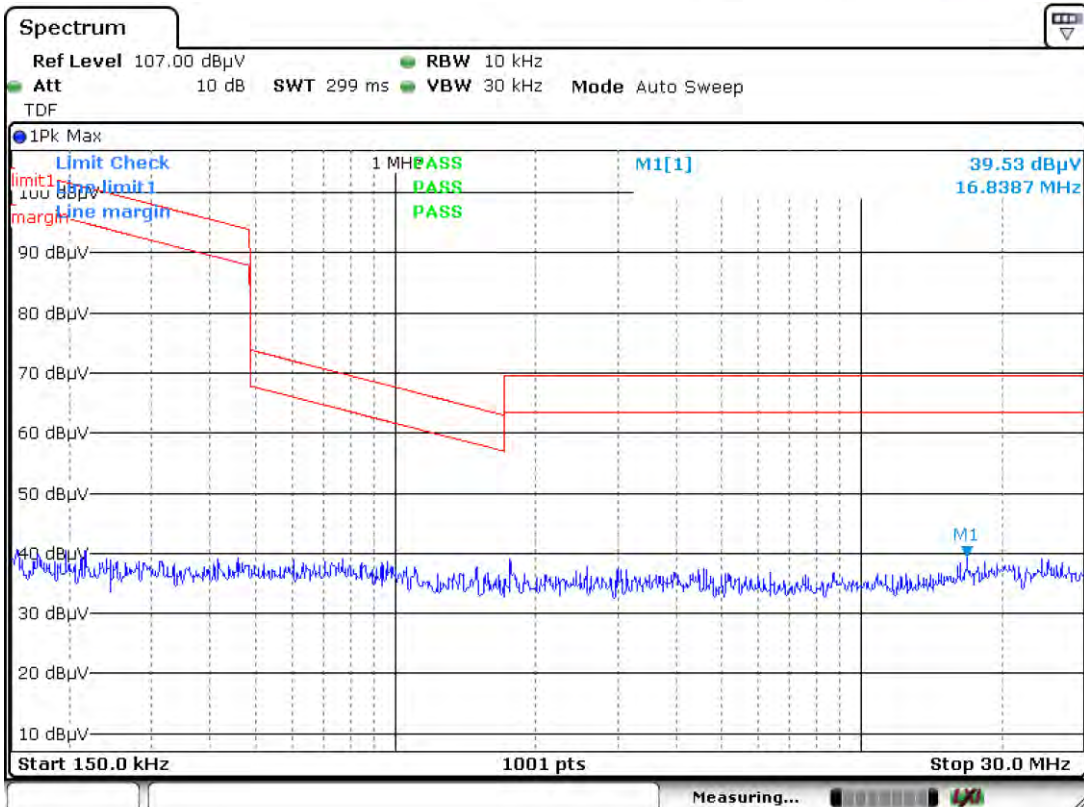
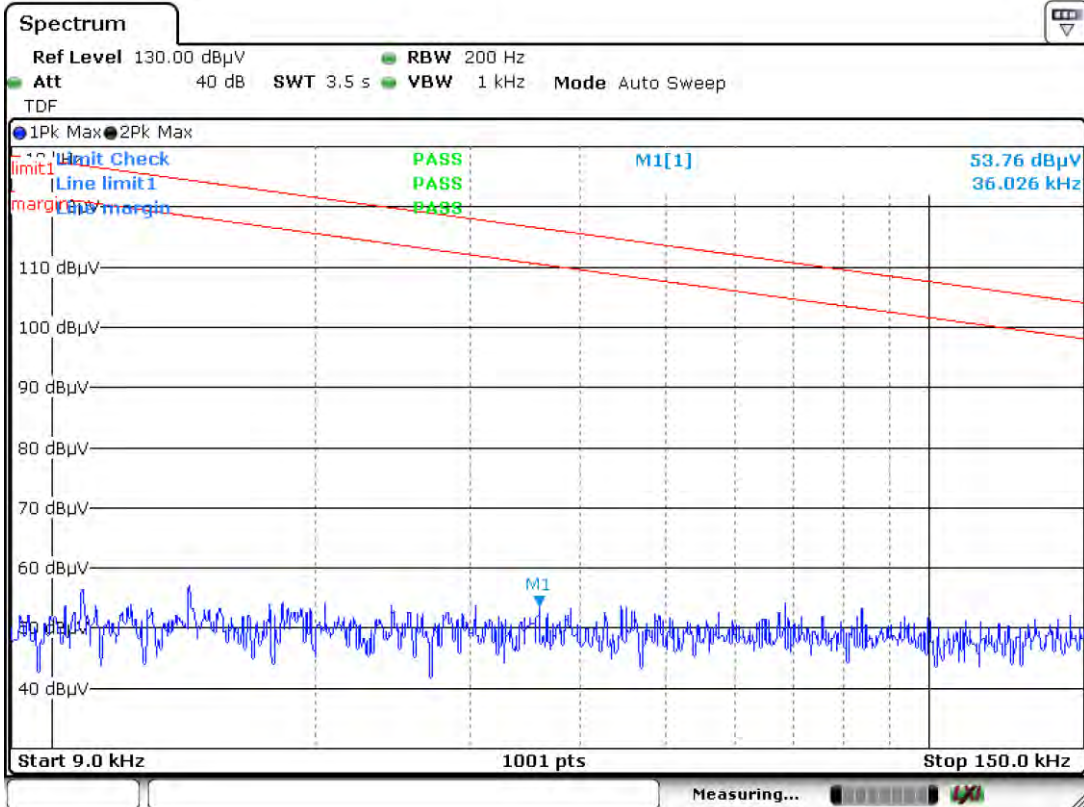


**Test Plot of 802.11n HT40 5230MHz - Y**


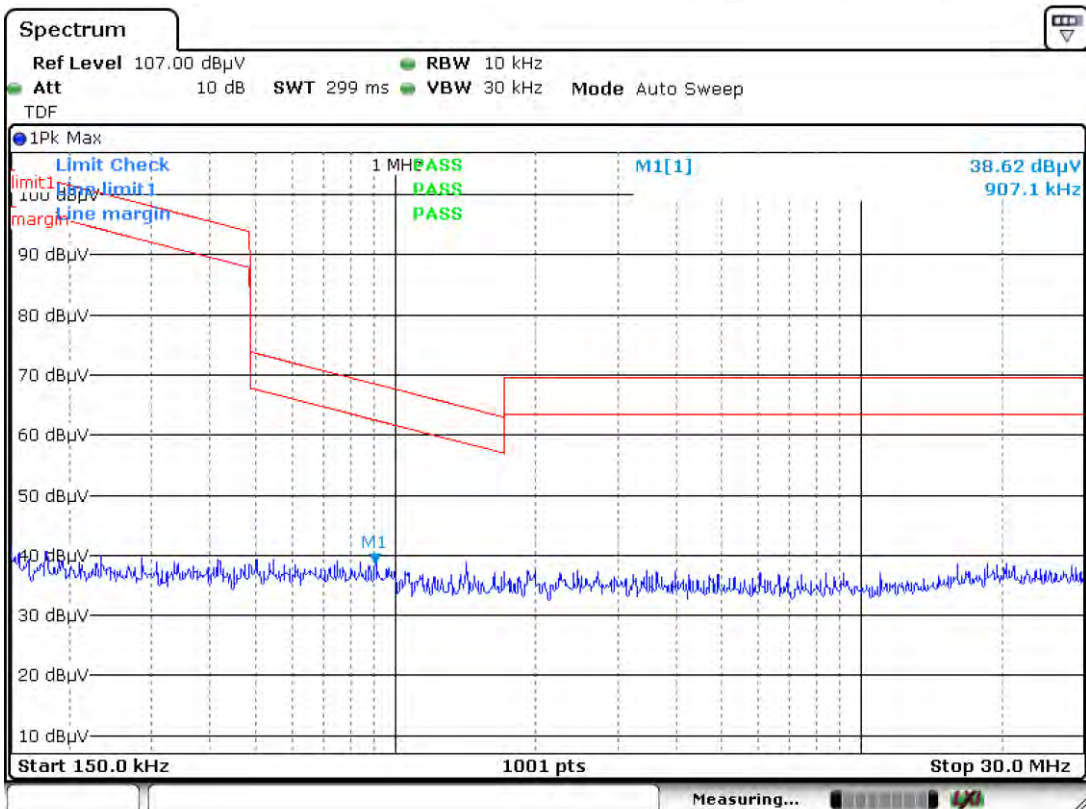
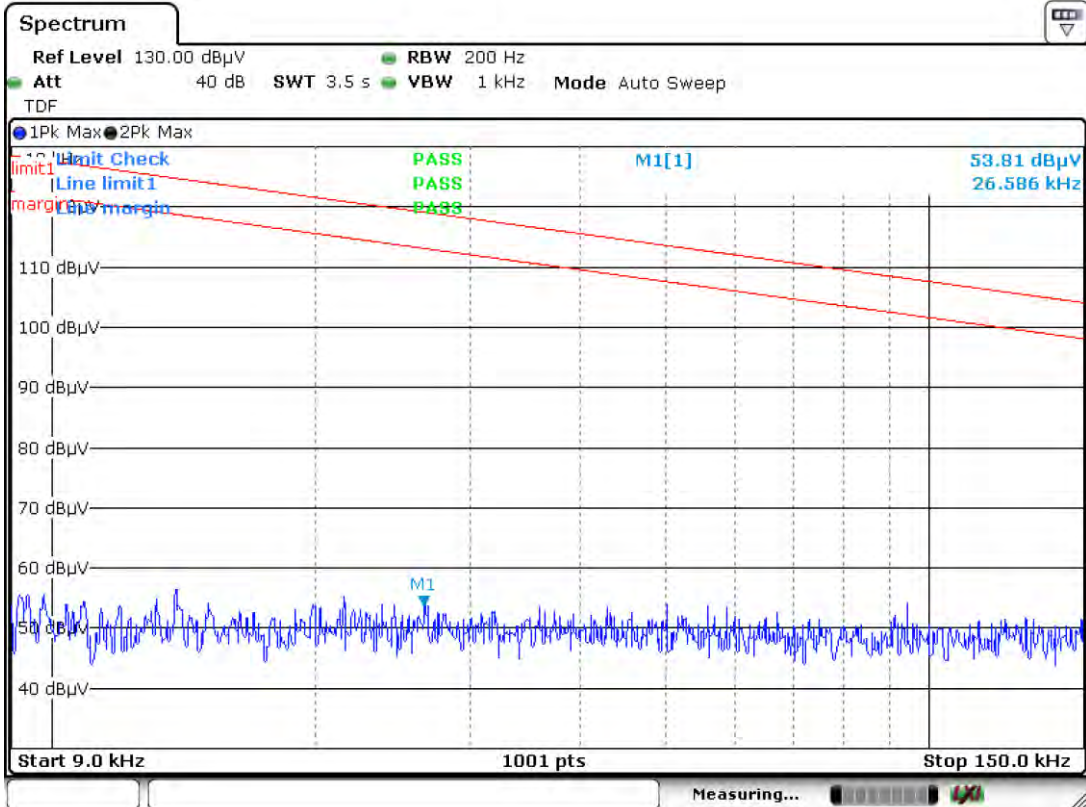
**Test Plot of 802.11n HT40 5230MHz - Z**


**Test Plot of 802.11n HT40 5755MHz - X**


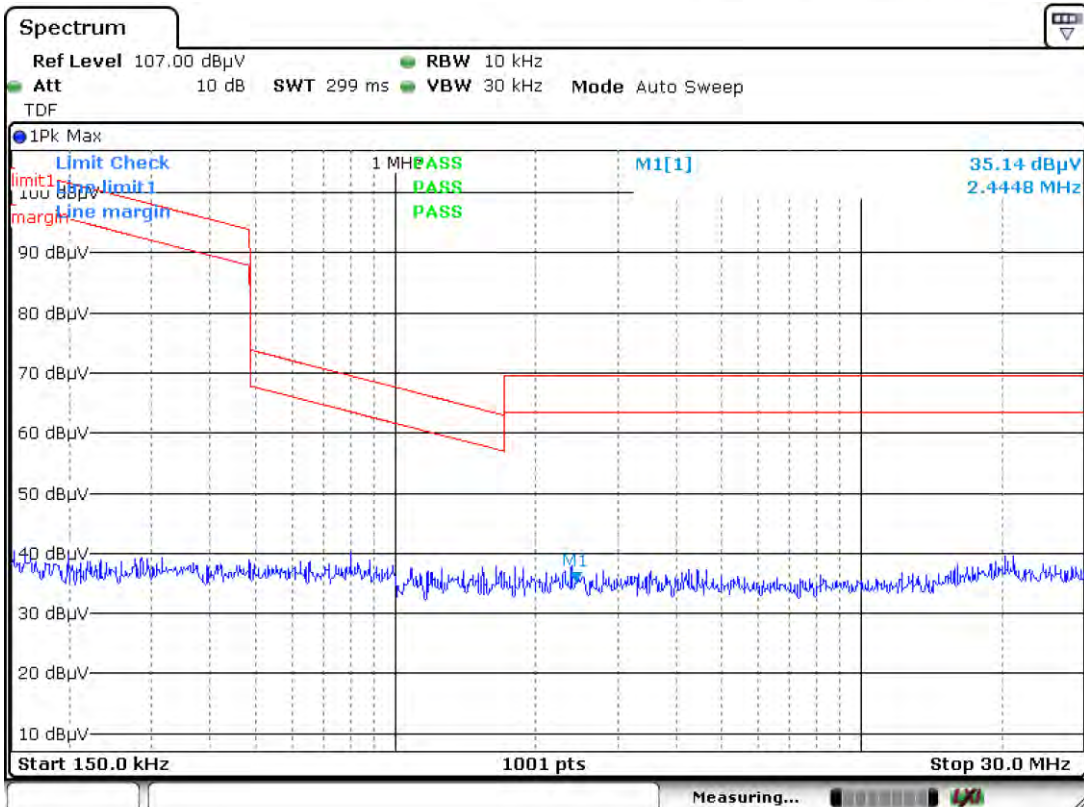
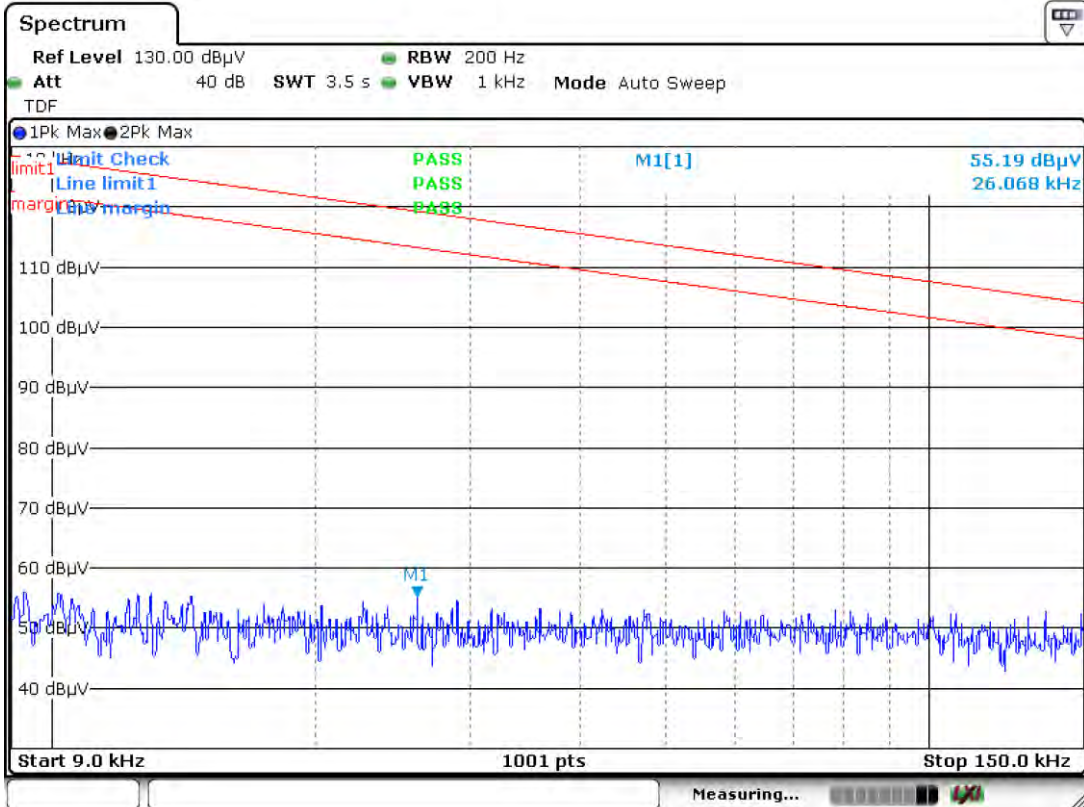


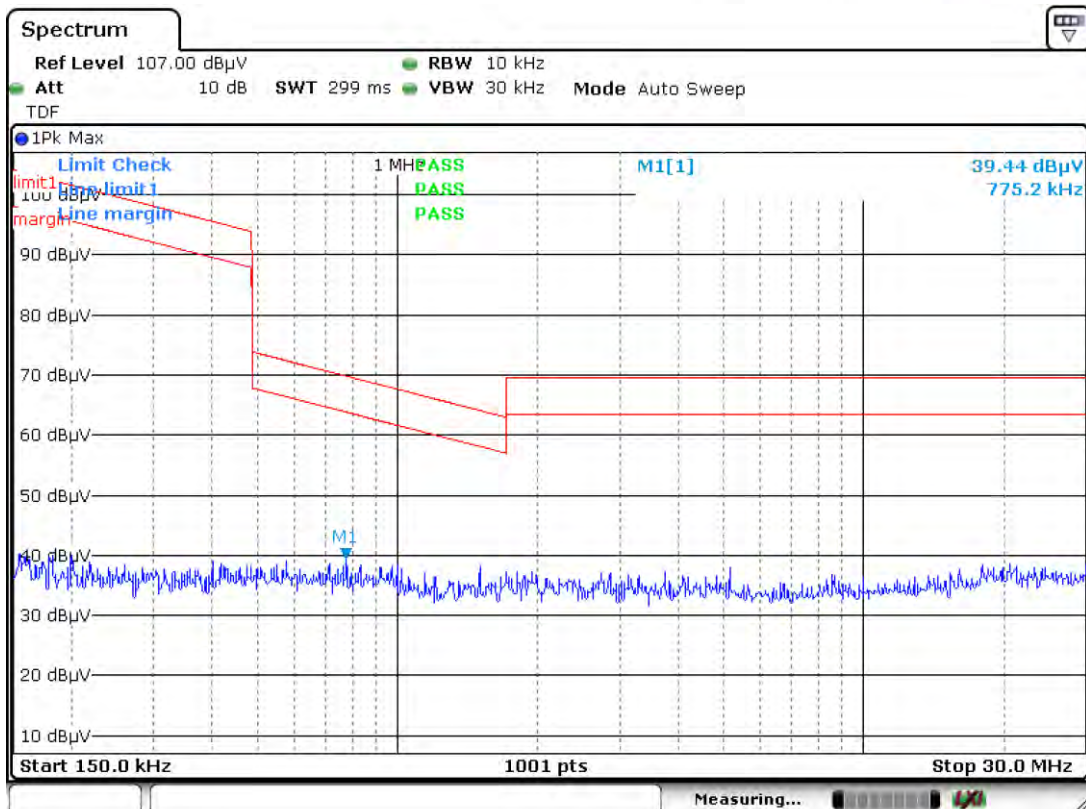
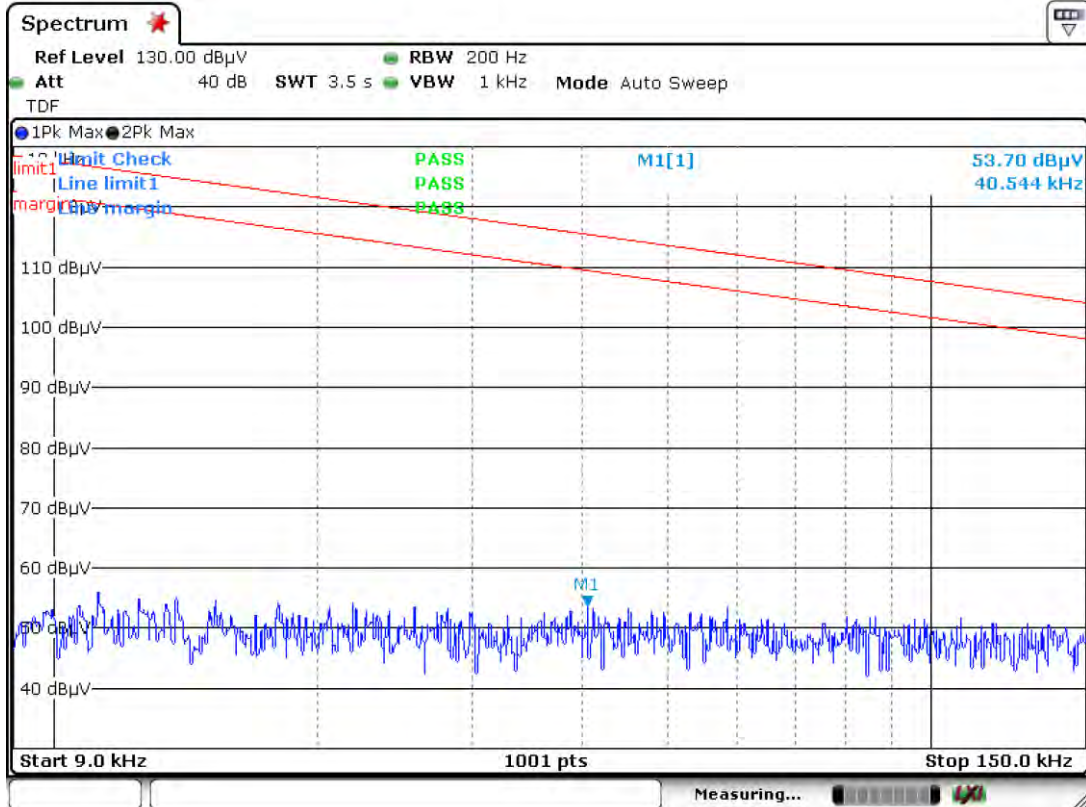
**Test Plot of 802.11n HT40 5755MHz - Y**


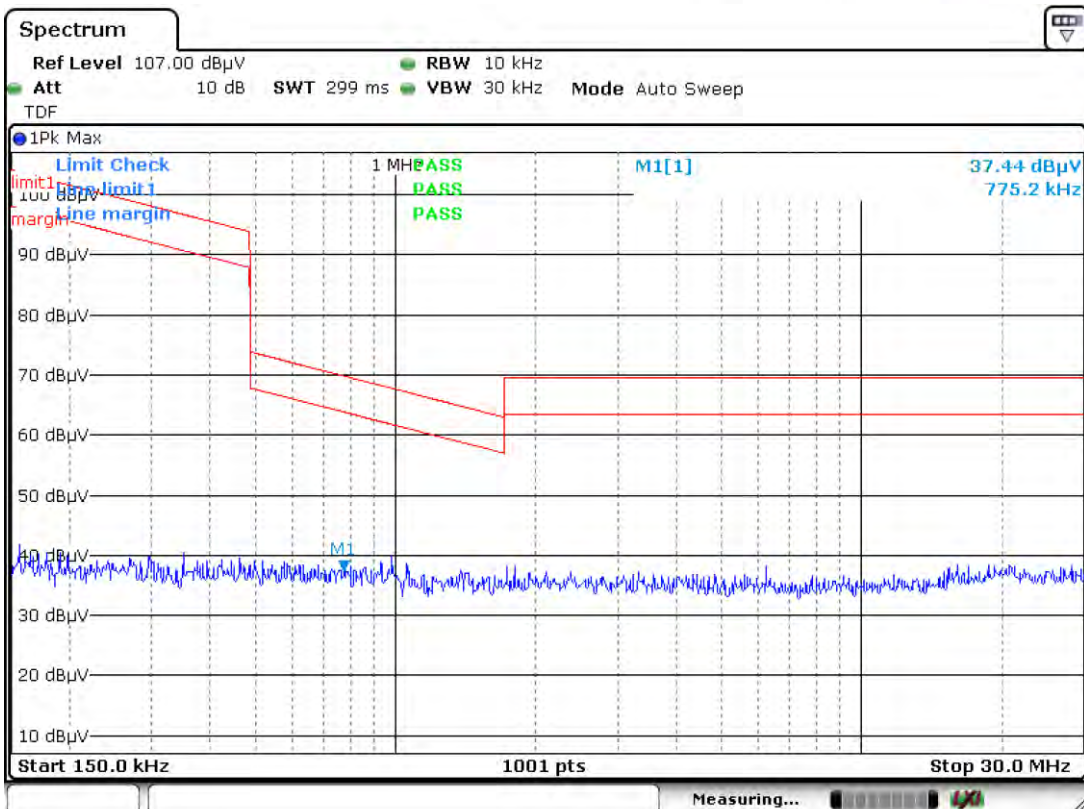
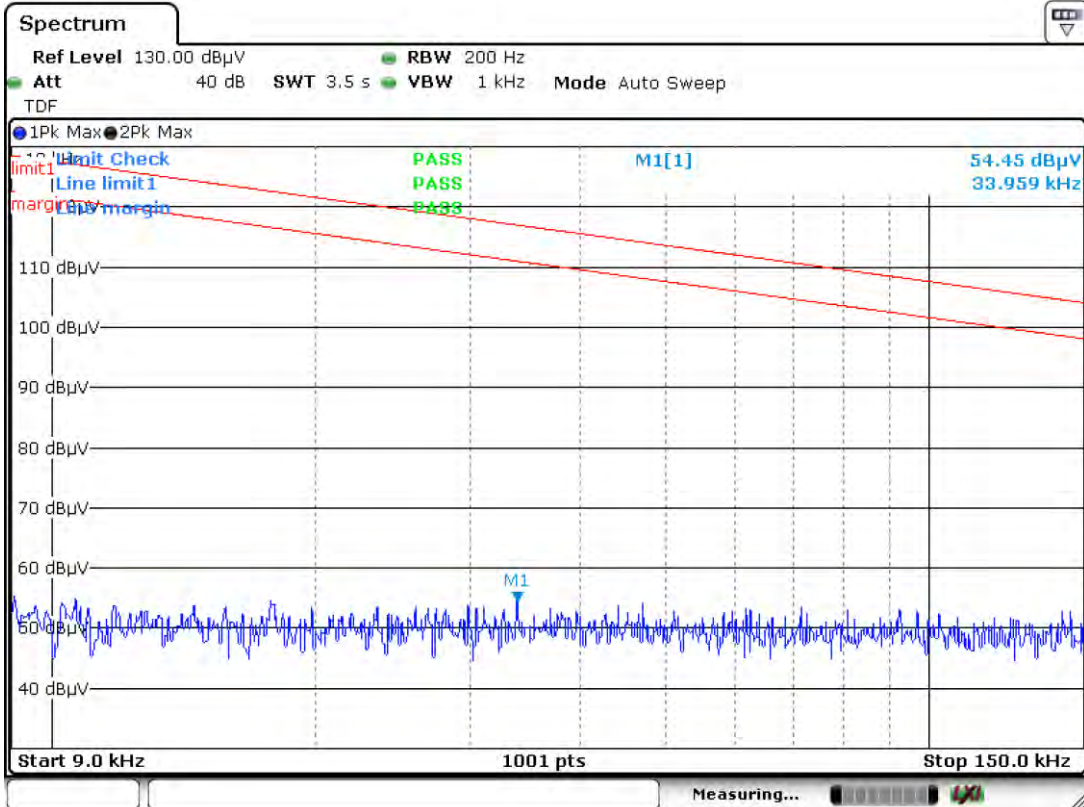
Test Plot of 802.11n HT40 5755MHz - Z





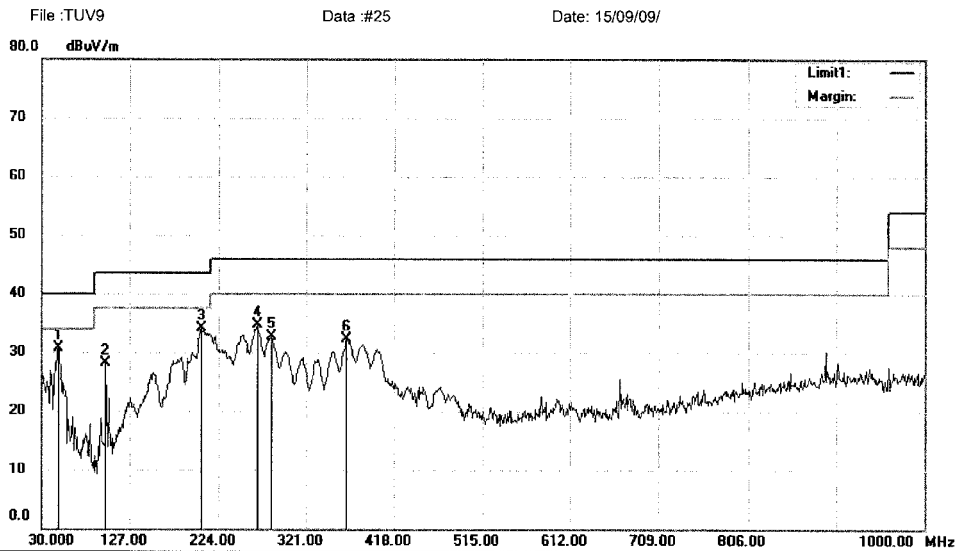
**Test Plot of 802.11n HT40 5795MHz - X**


**Test Plot of 802.11n HT40 5795MHz - Y**


**Test Plot of 802.11n HT40 5795MHz - Z**




Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3      Polarization: **Horizontal**      Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5180  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	48.4300	45.13	-14.40	30.73	40.00	-9.27	QP		
2		100.8100	42.05	-14.02	28.03	43.50	-15.47	QP		
3		204.6000	50.46	-16.40	34.06	43.50	-9.44	QP		
4		266.6800	47.46	-12.72	34.74	46.00	-11.26	QP		
5		283.1700	45.49	-12.78	32.71	46.00	-13.29	QP		
6		365.6200	42.76	-10.52	32.24	46.00	-13.76	QP		

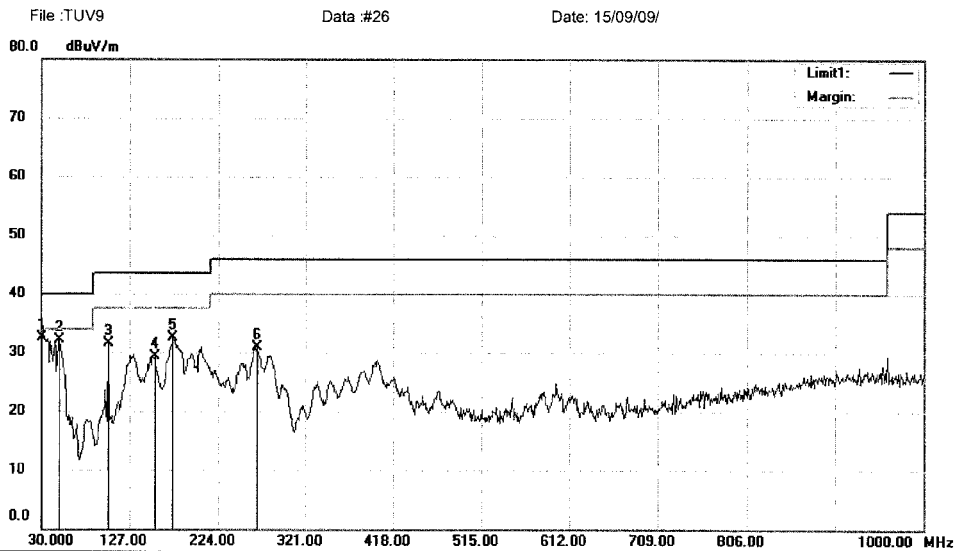
\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV9\Data : #25

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.9700	48.71	-16.13	32.58	40.00	-7.42	QP		
2		50.3700	47.83	-15.81	32.02	40.00	-7.98	QP		
3		103.7200	45.66	-14.07	31.59	43.50	-11.91	QP		
4		154.1600	47.69	-18.36	29.33	43.50	-14.17	QP		
5		174.5300	51.79	-19.22	32.57	43.50	-10.93	QP		
6		266.6800	43.58	-12.72	30.86	46.00	-15.14	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#26

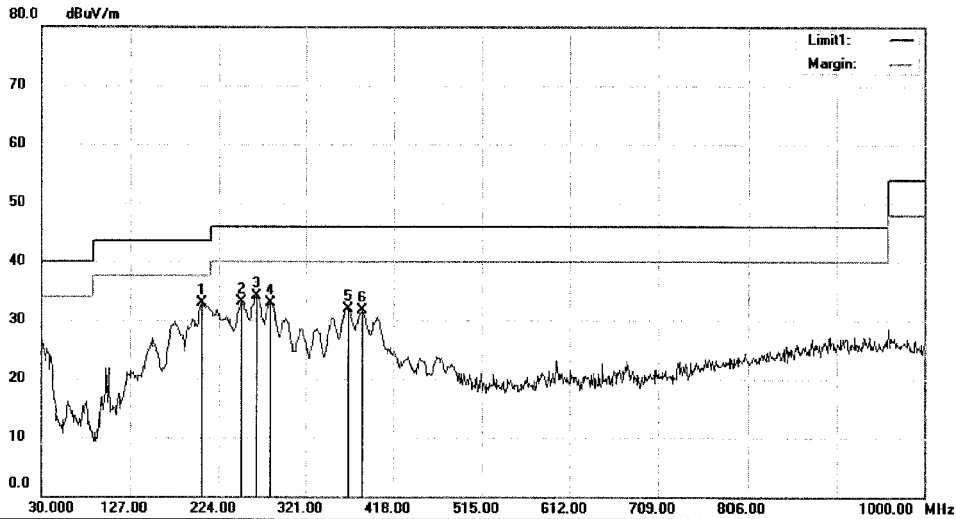
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

**Radiated Emission Measurement**

File : TUV9 Data : #28 Date : 15/09/09/


 Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	204.6000	49.24	-16.40	32.84	43.50	-10.66	QP		
2		249.2200	46.45	-13.36	33.09	46.00	-12.91	QP		
3		265.7100	46.91	-12.73	34.18	46.00	-11.82	QP		
4		281.2300	45.52	-12.65	32.87	46.00	-13.13	QP		
5		367.5600	42.35	-10.46	31.89	46.00	-14.11	QP		
6		384.0500	41.38	-9.77	31.61	46.00	-14.39	QP		

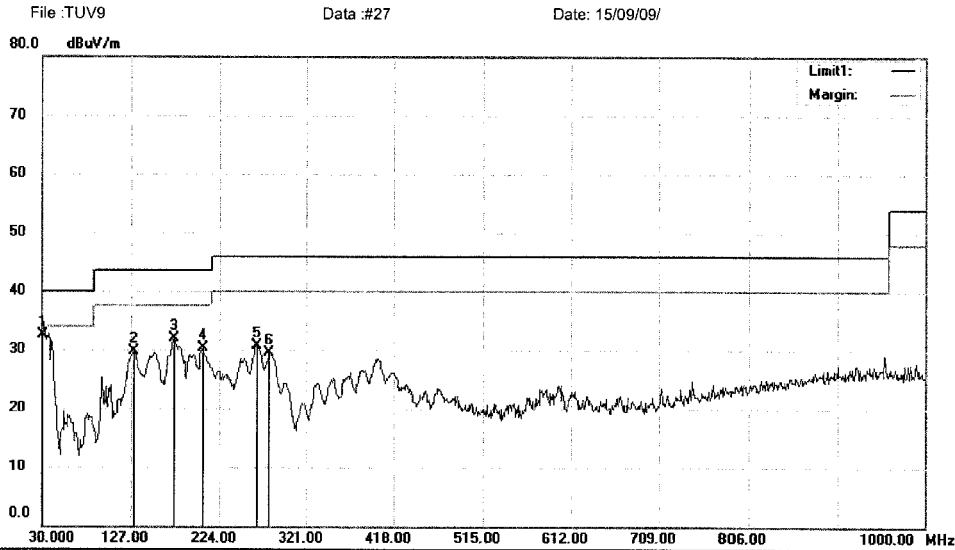
\*:Maximum data x:Over limit l:over margin

Operator: KK

File : TUV9\Data : #28

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5220  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	30.9700	48.72	-16.13	32.59	40.00	-7.41	QP		
2		129.9100	46.87	-17.25	29.62	43.50	-13.88	QP		
3		174.5300	51.06	-19.22	31.84	43.50	-11.66	QP		
4		204.6000	46.66	-16.40	30.26	43.50	-13.24	QP		
5		265.7100	43.38	-12.73	30.65	46.00	-15.35	QP		
6		279.2900	42.06	-12.58	29.48	46.00	-16.52	QP		

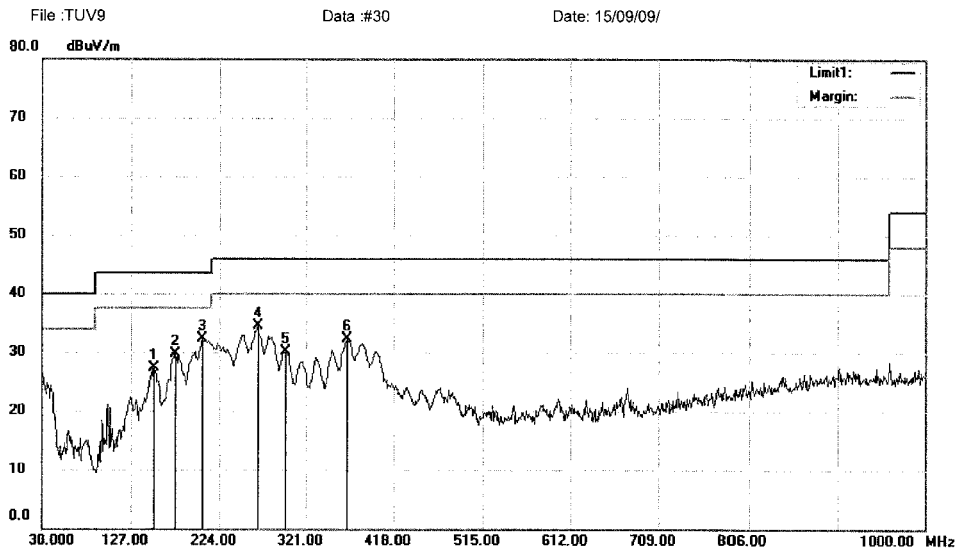
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#27

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5240  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		152.2200	45.63	-18.24	27.39	43.50	-16.11	QP		
2		175.5000	48.87	-19.17	29.70	43.50	-13.80	QP		
3	*	204.6000	48.61	-16.40	32.21	43.50	-11.29	QP		
4		266.6800	47.14	-12.72	34.42	46.00	-11.58	QP		
5		298.6900	43.90	-13.74	30.16	46.00	-15.84	QP		
6		366.5900	42.79	-10.49	32.30	46.00	-13.70	QP		

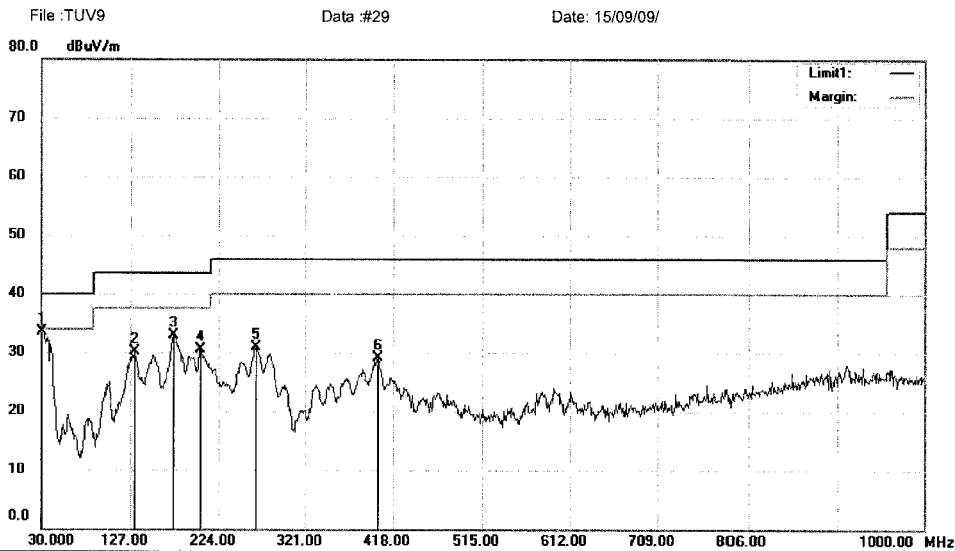
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#30

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5240  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	30.0000	50.02	-16.46	33.56	40.00	-6.44	QP			
2		131.8500	47.46	-17.36	30.10	43.50	-13.40	QP			
3		173.5600	52.15	-19.26	32.89	43.50	-10.61	QP			
4		203.6300	47.00	-16.40	30.60	43.50	-12.90	QP			
5		265.7100	43.73	-12.73	31.00	46.00	-15.00	QP			
6		401.5100	38.11	-8.92	29.19	46.00	-16.81	QP			

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#29

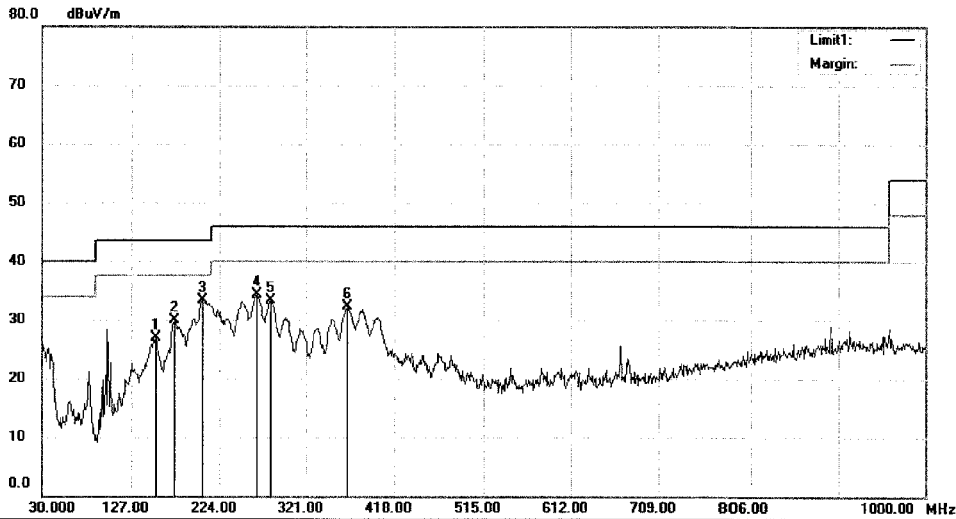
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9 Data : #32 Date : 15/09/09/



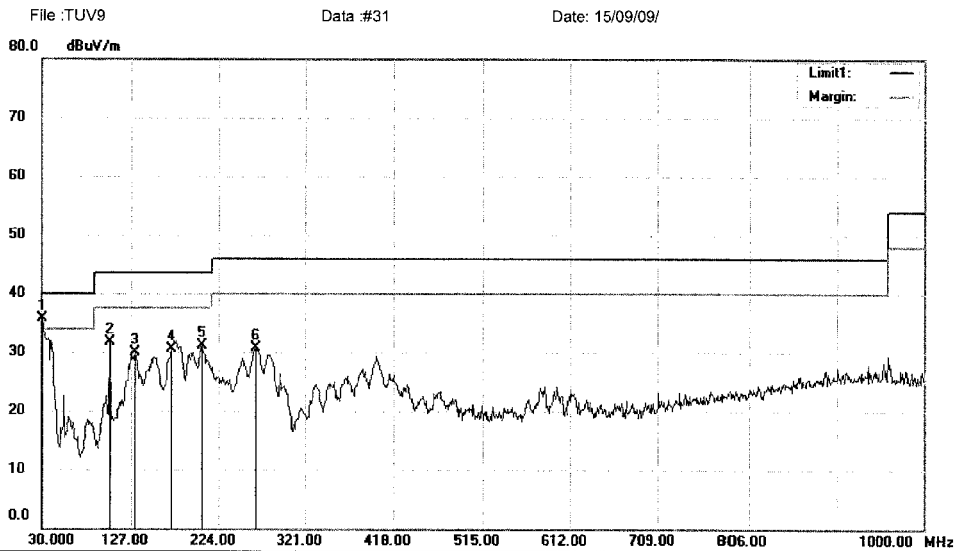
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		153.1900	45.24	-18.29	26.95	43.50	-16.55	QP		
2		173.5600	49.23	-19.26	29.97	43.50	-13.53	QP		
3	*	205.5700	49.60	-16.39	33.21	43.50	-10.29	QP		
4		265.7100	46.96	-12.73	34.23	46.00	-11.77	QP		
5		281.2300	45.99	-12.65	33.34	46.00	-12.66	QP		
6		366.5900	42.81	-10.49	32.32	46.00	-13.68	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5745  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	30.9700	51.77	-16.13	35.64	40.00	-4.36	QP		
2		103.7200	45.68	-14.07	31.61	43.50	-11.89	QP		
3		130.8800	47.13	-17.30	29.83	43.50	-13.67	QP		
4		171.6200	49.90	-19.37	30.53	43.50	-12.97	QP		
5		204.6000	47.60	-16.40	31.20	43.50	-12.30	QP		
6		265.7100	43.35	-12.73	30.62	46.00	-15.38	QP		

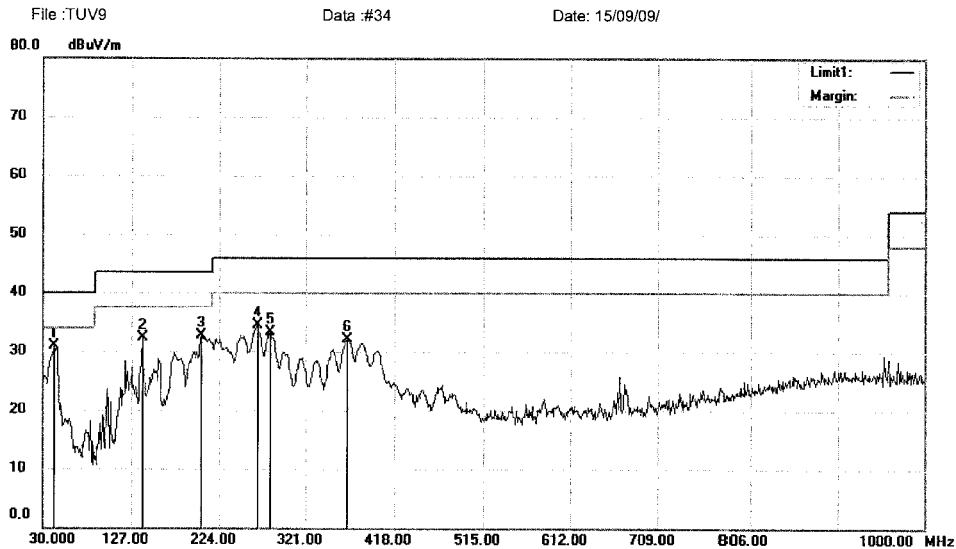
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#31

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	42.6100	43.89	-13.02	30.87	40.00	-9.13	QP		
2		138.6400	49.93	-17.70	32.23	43.50	-11.27	QP		
3		203.6300	49.14	-16.40	32.74	43.50	-10.76	QP		
4		266.6800	47.28	-12.72	34.56	46.00	-11.44	QP		
5		281.2300	45.87	-12.65	33.22	46.00	-12.78	QP		
6		366.5900	42.60	-10.49	32.11	46.00	-13.89	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

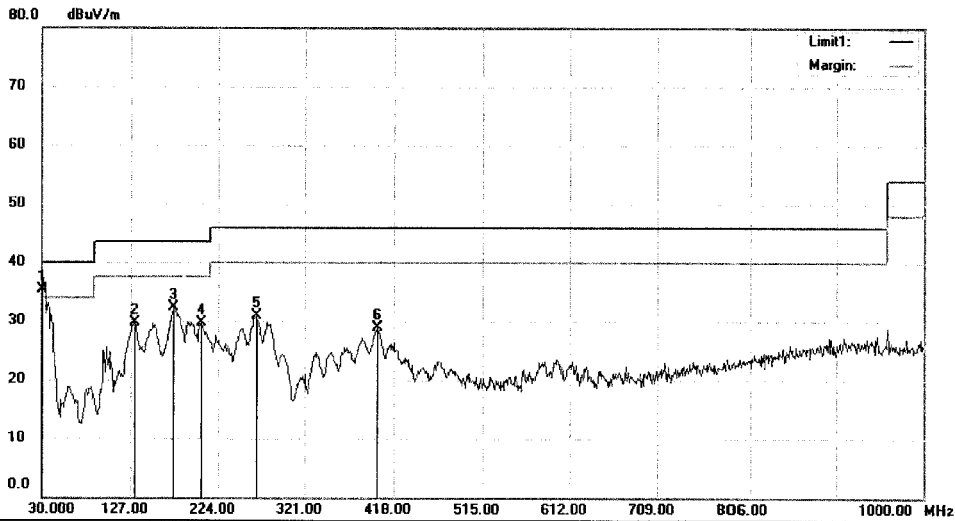
File :TUV9\Data :#34

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#33 Date: 15/09/09/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5785  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	30.0000	51.72	-16.46	35.26	40.00	-4.74	QP			
2		130.8800	47.10	-17.30	29.80	43.50	-13.70	QP			
3		174.5300	51.49	-19.22	32.27	43.50	-11.23	QP			
4		204.6000	46.08	-16.40	29.68	43.50	-13.82	QP			
5		266.6800	43.65	-12.72	30.93	46.00	-15.07	QP			
6		400.5400	37.87	-8.89	28.98	46.00	-17.02	QP			

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#33

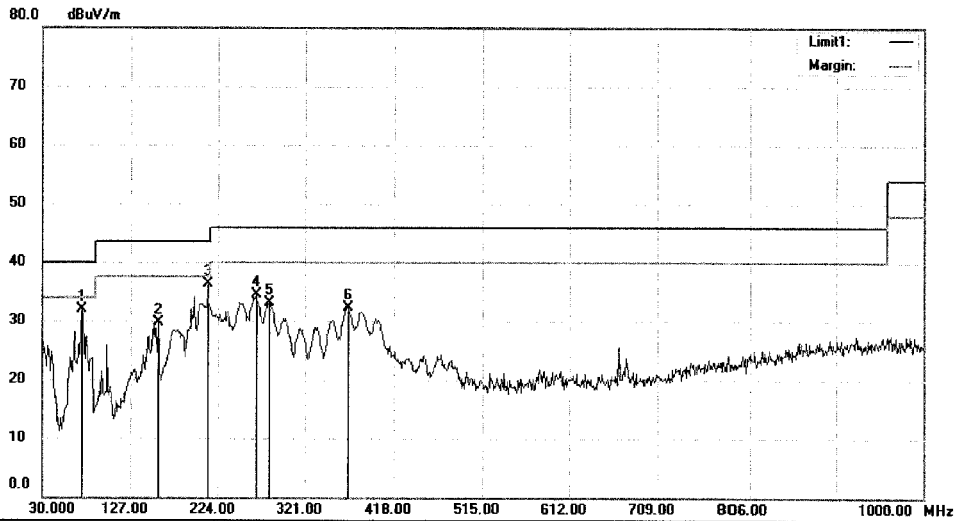
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#36 Date: 15/09/09/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5825  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		72.6800	50.94	-19.05	31.89	40.00	-8.11	QP			
2		157.0700	48.22	-18.54	29.68	43.50	-13.82	QP			
3	*	212.3600	52.66	-16.38	36.28	43.50	-7.22	QP			
4		266.6800	47.20	-12.72	34.48	46.00	-11.52	QP			
5		281.2300	45.81	-12.65	33.16	46.00	-12.84	QP			
6		367.5600	42.81	-10.46	32.35	46.00	-13.65	QP			

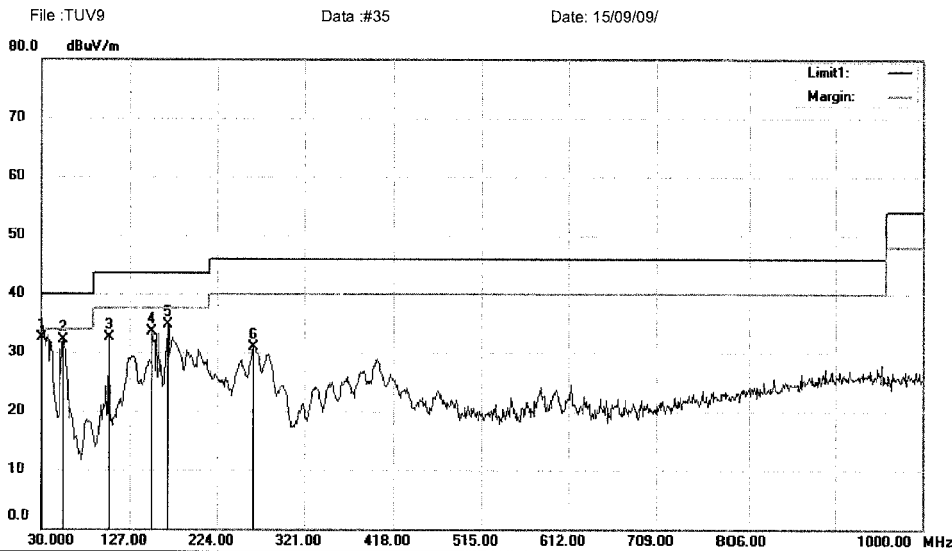
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#36

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5825  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	30.9700	48.58	-16.13	32.45	40.00	-7.55	QP			
2		54.2500	47.74	-15.69	32.05	40.00	-7.95	QP			
3		103.7200	46.51	-14.07	32.44	43.50	-11.06	QP			
4		151.2500	51.73	-18.18	33.55	43.50	-9.95	QP			
5		168.7100	54.11	-19.34	34.77	43.50	-8.73	QP			
6		264.7400	43.70	-12.74	30.96	46.00	-15.04	QP			

\*:Maximum data x:Over limit !:over margin

Operator: KK

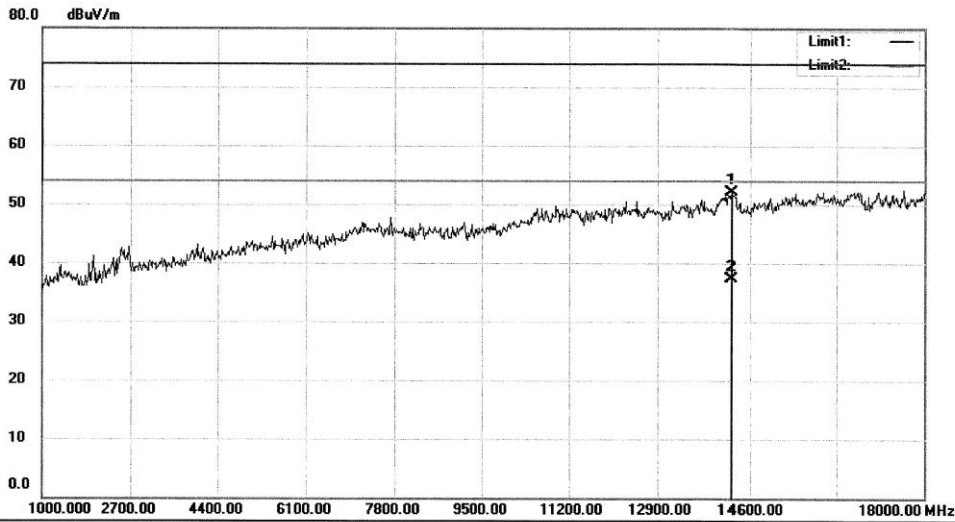
File :TUV9\Data :#35

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #:120 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		14260.00	49.72	2.29	52.01	74.00	-21.99	peak			
2	*	14260.00	34.97	2.29	37.26	54.00	-16.74	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

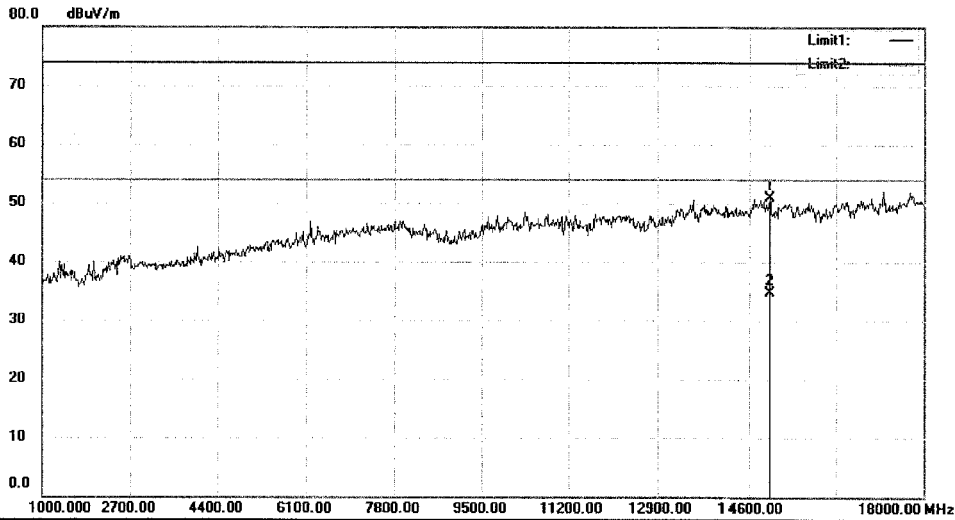
File :TUV9\Data :#120

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#119 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14991.00	49.15	1.77	50.92	74.00	-23.08	peak		
2	*	14991.00	32.88	1.77	34.65	54.00	-19.35	AVG		

\*:Maximum data x:Over limit !:over margin

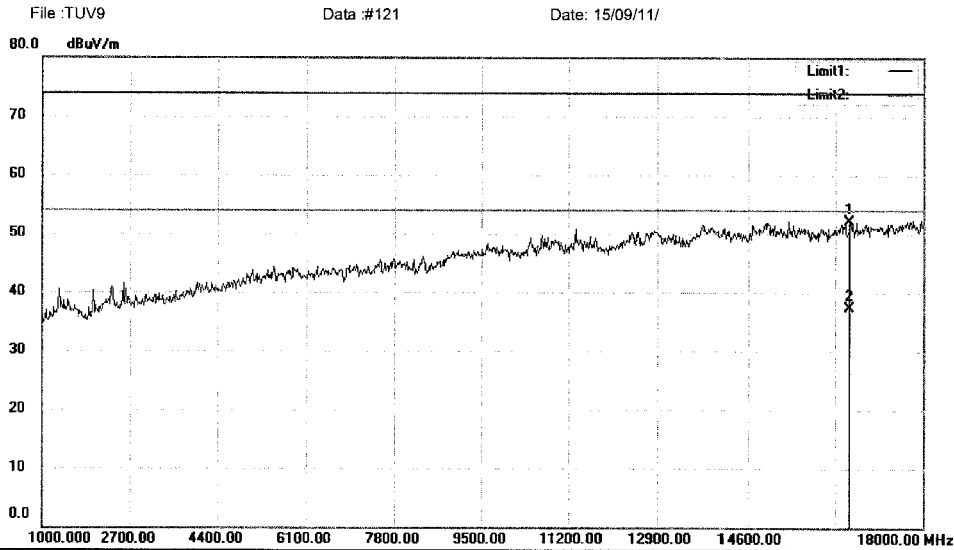
Operator: KK

File :TUV9\Data :#119

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3                      Polarization: **Horizontal**                      Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247                      Power: AC 120V/60Hz                      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		16589.00	51.81	0.36	52.17	74.00	-21.83	peak			
2	*	16589.00	36.90	0.36	37.26	54.00	-16.74	AVG			

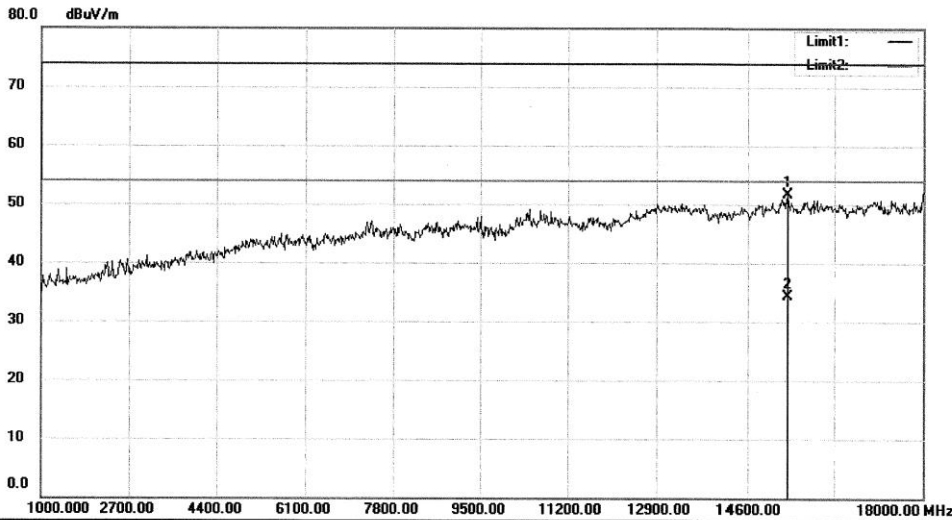
\*:Maximum data    x:Over limit    !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #122 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		15382.00	51.39	0.30	51.69	74.00	-22.31	peak			
2	*	15382.00	33.96	0.30	34.26	54.00	-19.74	AVG			

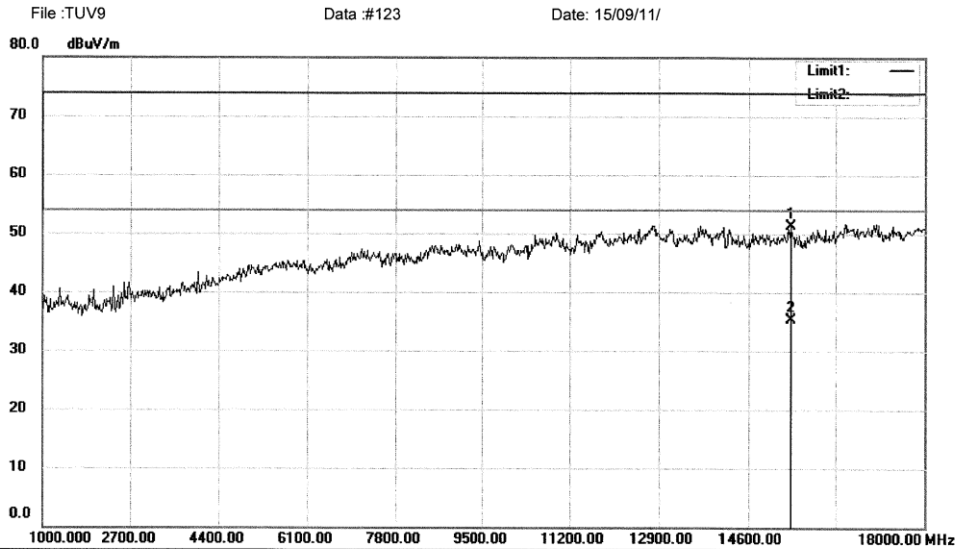
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#122

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15416.00	51.07	0.16	51.23	74.00	-22.77	peak		
2	*	15416.00	35.05	0.16	35.21	54.00	-18.79	AVG		

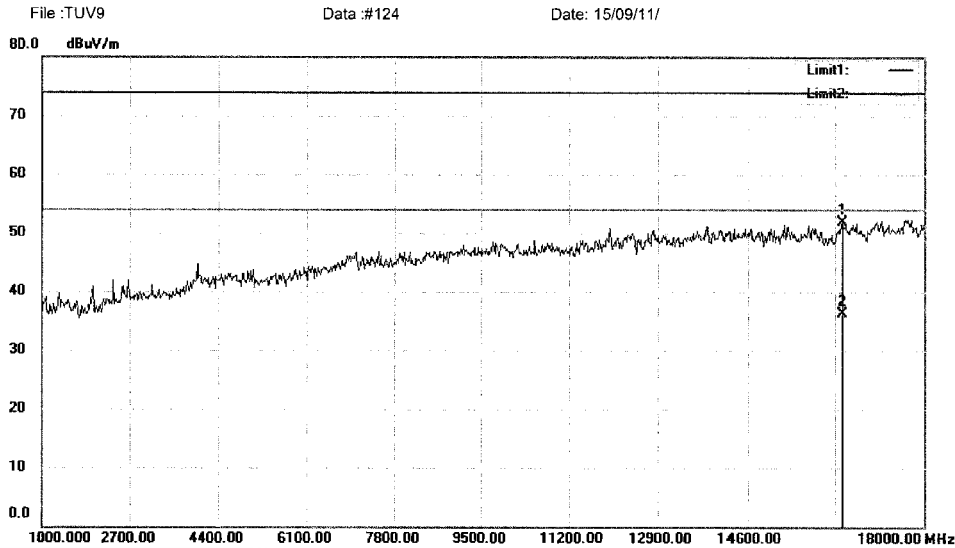
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#123

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3      Polarization: **Vertical**      Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5240  
 Note:

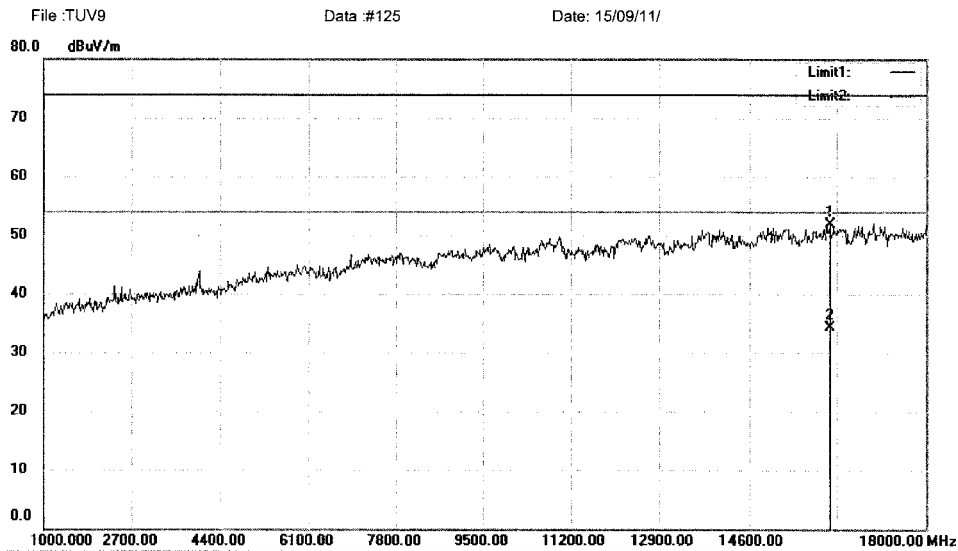
No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		16436.00	52.28	-0.28	52.00	74.00	-22.00	peak			
2	*	16436.00	36.66	-0.28	36.38	54.00	-17.62	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		16164.00	53.25	-1.42	51.83	74.00	-22.17	peak		
2	*	16164.00	35.68	-1.42	34.26	54.00	-19.74	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

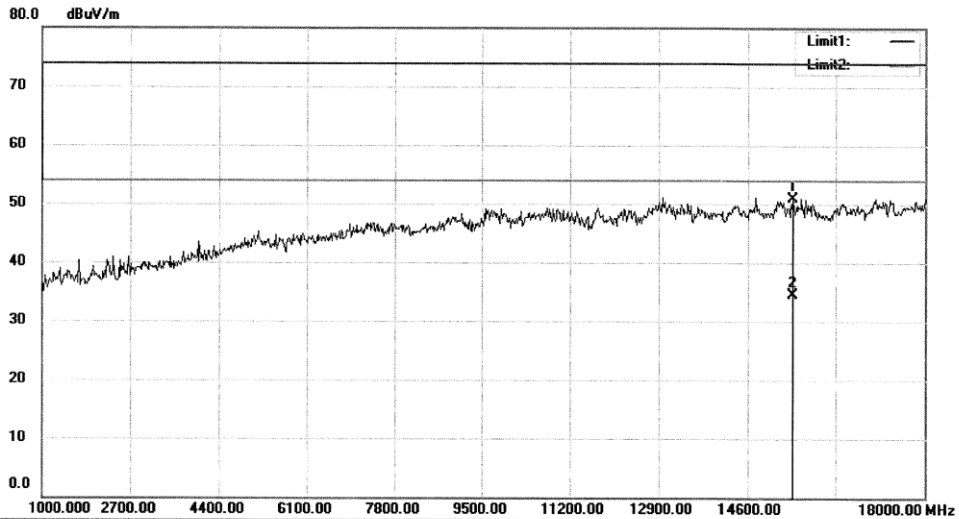
File:TUV9\Data:#125

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#126 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		15467.00	50.94	-0.04	50.90	74.00	-23.10	peak		
2	*	15467.00	34.60	-0.04	34.56	54.00	-19.44	AVG		

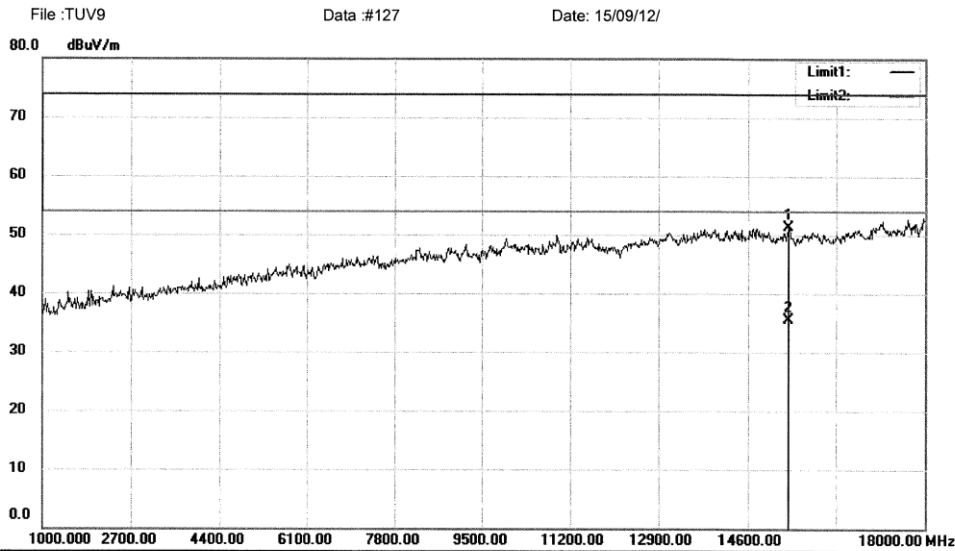
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#126

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5785  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		15382.00	51.10	0.30	51.40	74.00	-22.60	peak		
2	*	15382.00	35.16	0.30	35.46	54.00	-18.54	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

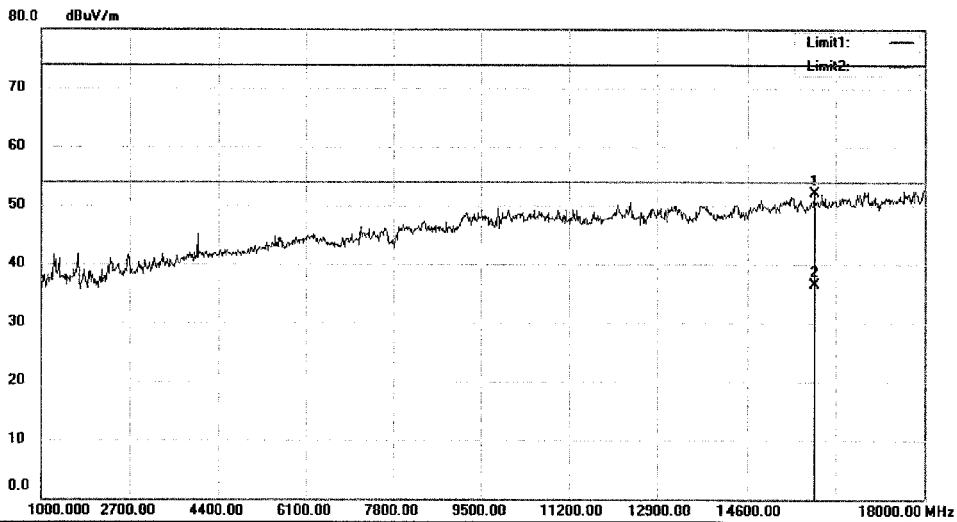
File :TUV9\Data :#127

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9 Data : #128 Date : 15/09/12/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5785  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		15892.00	52.94	-0.90	52.04	74.00	-21.96	peak		
2	*	15892.00	37.35	-0.90	36.45	54.00	-17.55	AVG		

\*:Maximum data x:Over limit !:over margin

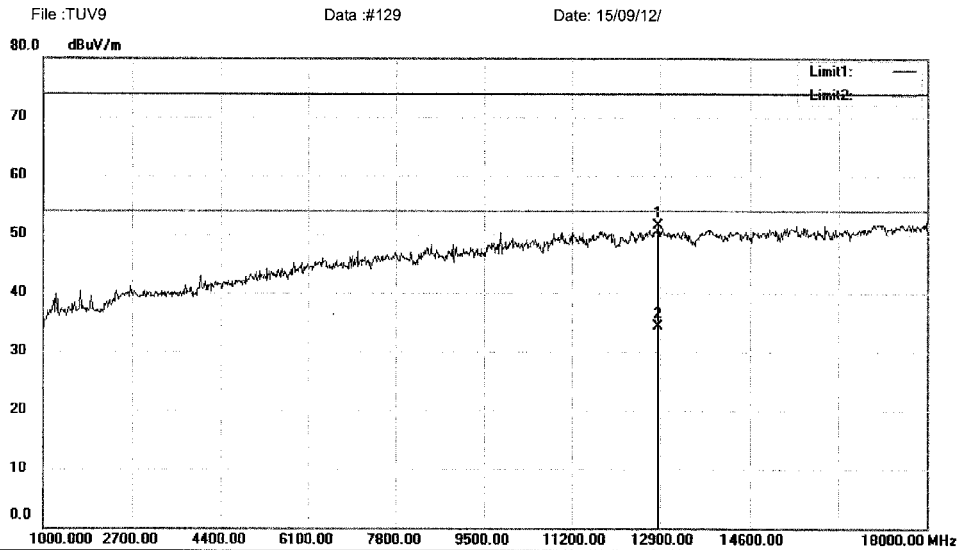
Operator:

File : TUV9\Data : #128

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		12866.00	52.45	-0.98	51.47	74.00	-22.53	peak			
2	*	12866.00	35.33	-0.98	34.35	54.00	-19.65	AVG			

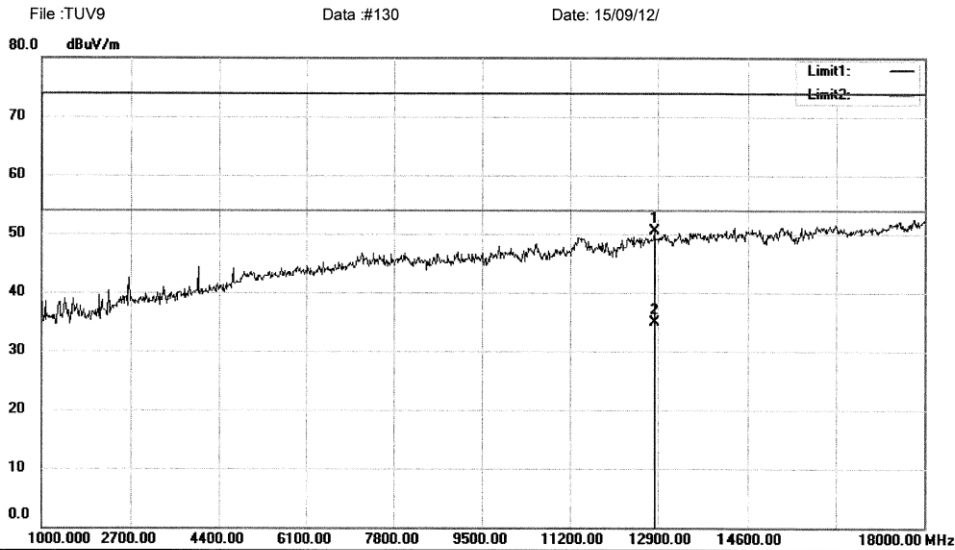
\*:Maximum data x:Over limit !:over margin

Operator:

File :TUV9\Data :#129

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


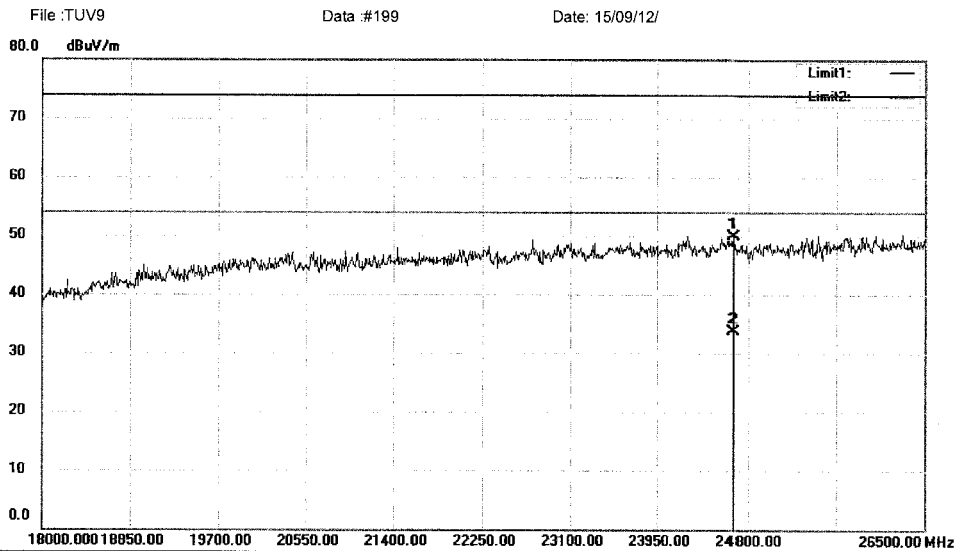
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		12832.00	51.49	-1.06	50.43	74.00	-23.57	peak		
2	*	12832.00	35.91	-1.06	34.85	54.00	-19.15	AVG		

\*:Maximum data x:Over limit !:over margin

Operator:

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24664.00	86.89	-37.05	49.84	74.00	-24.16	peak		
2	*	24664.00	70.70	-37.05	33.65	54.00	-20.35	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

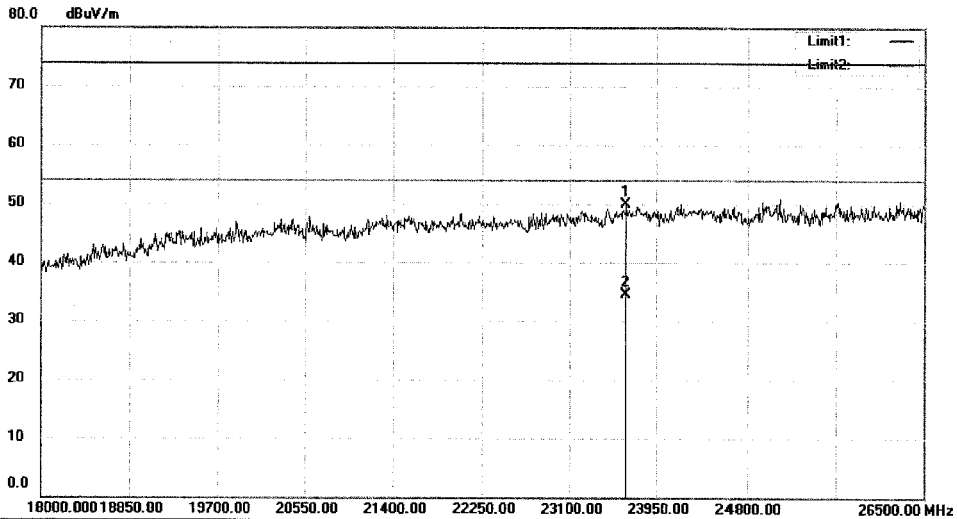
File: TUV9\Data: #199

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#200 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5180  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		23652.50	87.40	-37.49	49.91	74.00	-24.09	peak			
2	*	23652.50	72.08	-37.49	34.59	54.00	-19.41	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

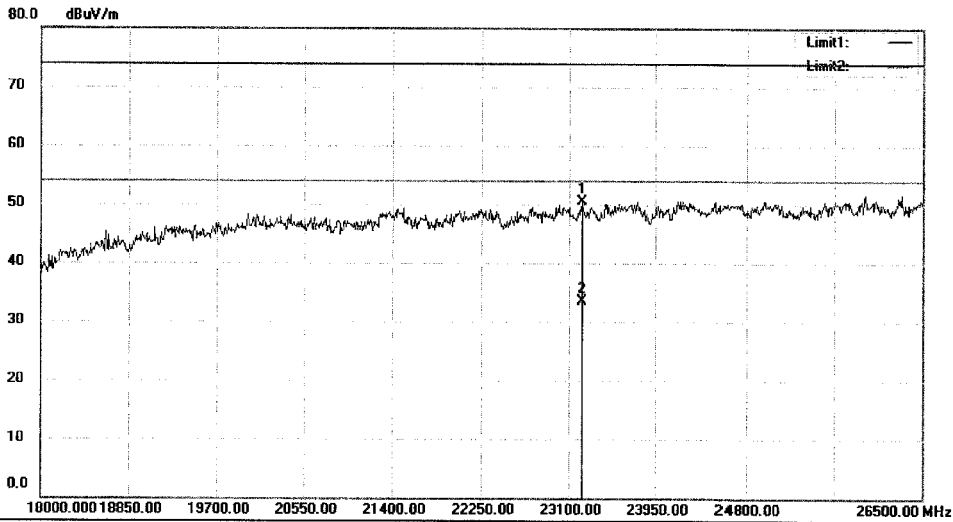
File :TUV9\Data :#200

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #201 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5220  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		23227.50	88.44	-37.94	50.50	74.00	-23.50	peak		
2	*	23227.50	71.43	-37.94	33.49	54.00	-20.51	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#201

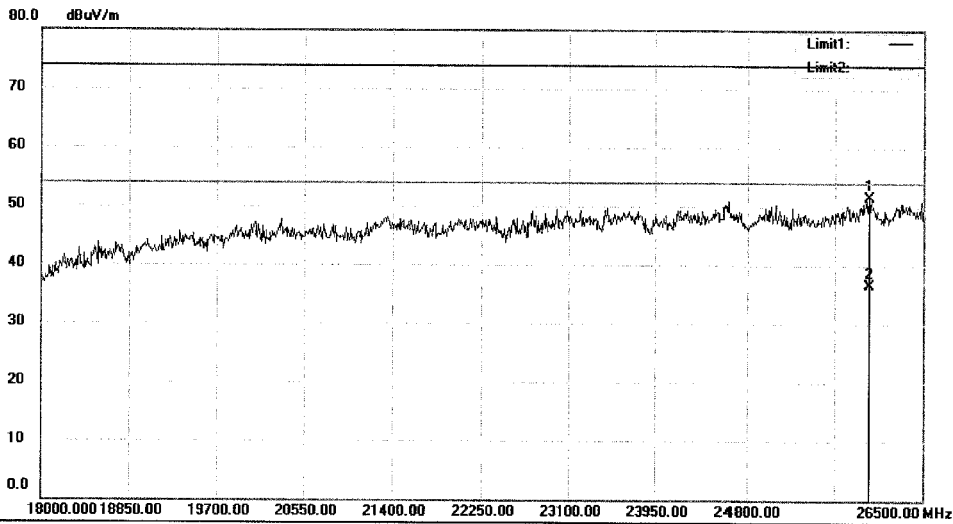
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#202 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25981.50	87.26	-35.81	51.45	74.00	-22.55	peak			
2	*	25981.50	72.40	-35.81	36.59	54.00	-17.41	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

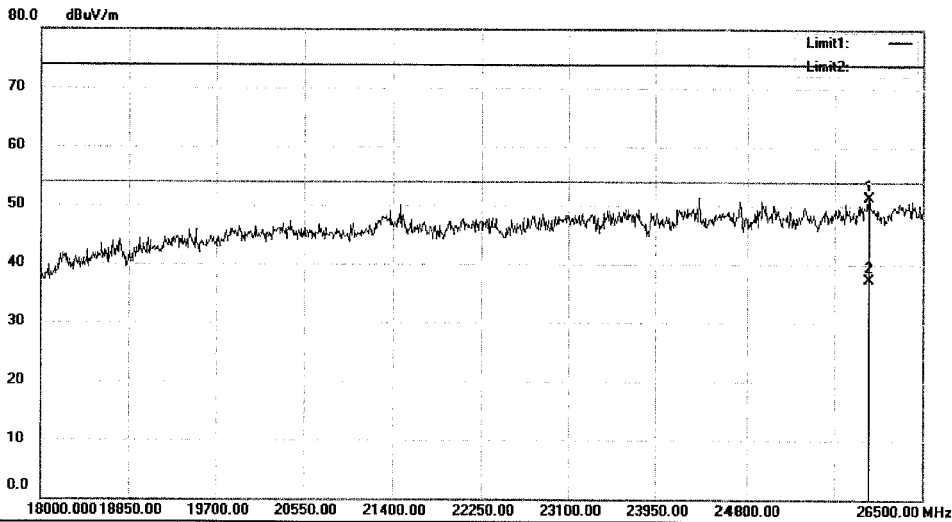
File :TUV9\Data :#202

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #203 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		25981.50	87.18	-35.81	51.37	74.00	-22.63	peak			
2	*	25981.50	73.06	-35.81	37.25	54.00	-16.75	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

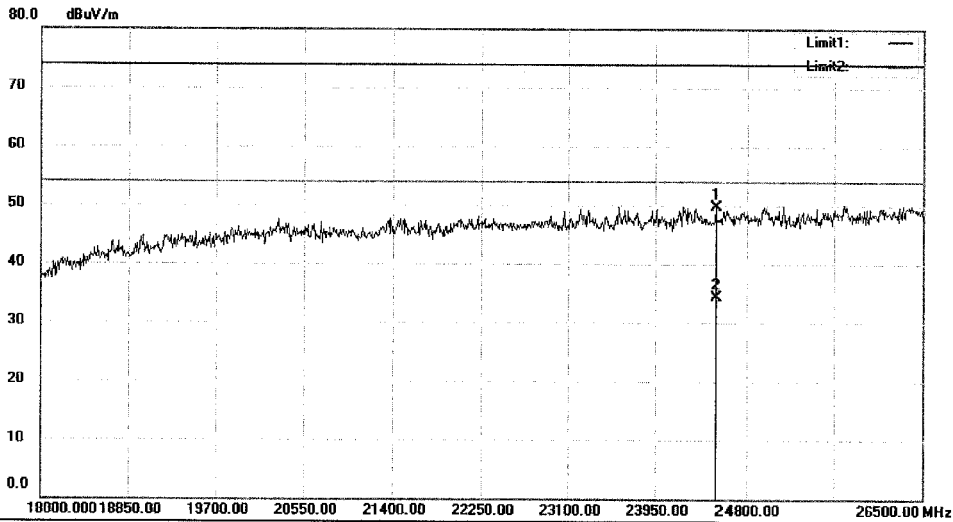
File :TUV9\Data :#203

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #204 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		24528.00	86.80	-37.07	49.73	74.00	-24.27	peak		
2	*	24528.00	71.33	-37.07	34.26	54.00	-19.74	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

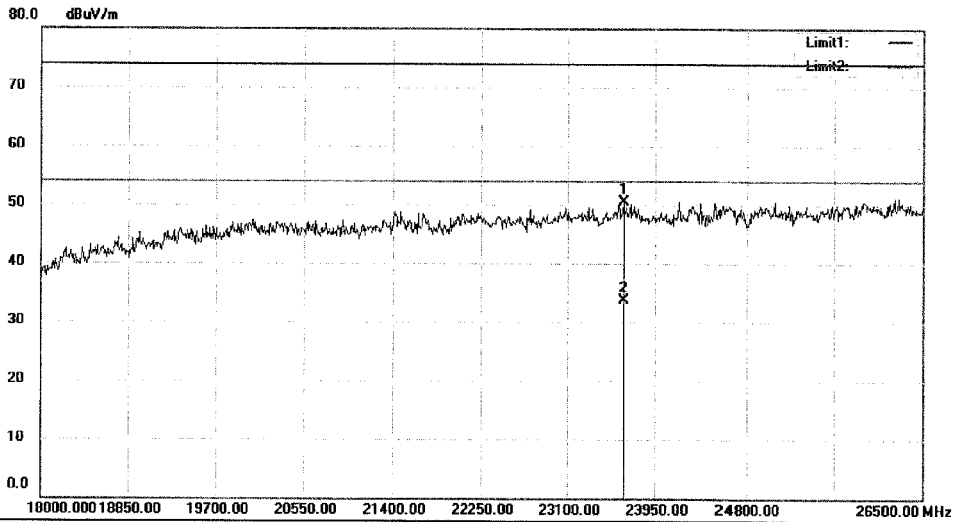
File :TUV9\Data :#204

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#205 Date: 15/09/12/



Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23644.00	88.02	-37.50	50.52	74.00	-23.48	peak		
2	*	23644.00	71.18	-37.50	33.68	54.00	-20.32	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

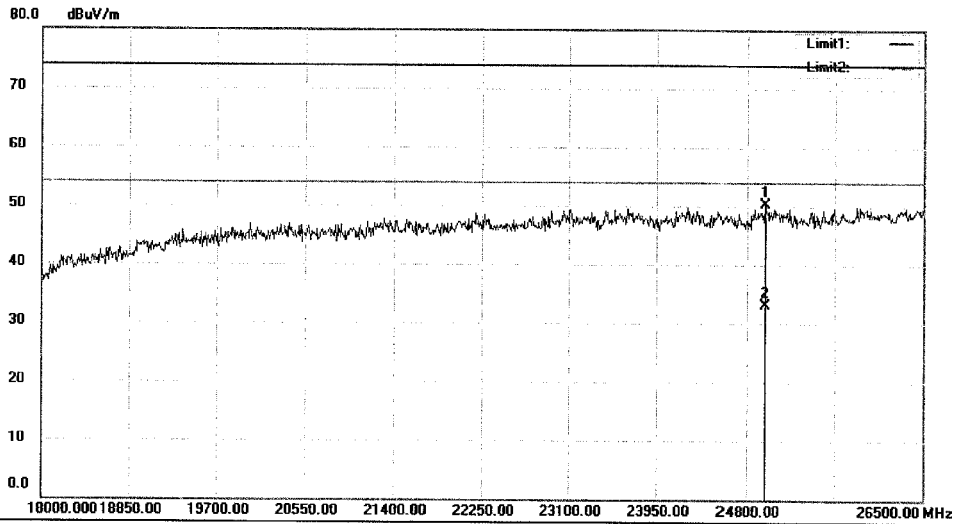
File :TUV9Data :#205

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#206 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24970.00	87.25	-37.01	50.24	74.00	-23.76	peak		
2	*	24970.00	70.18	-37.01	33.17	54.00	-20.83	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#206

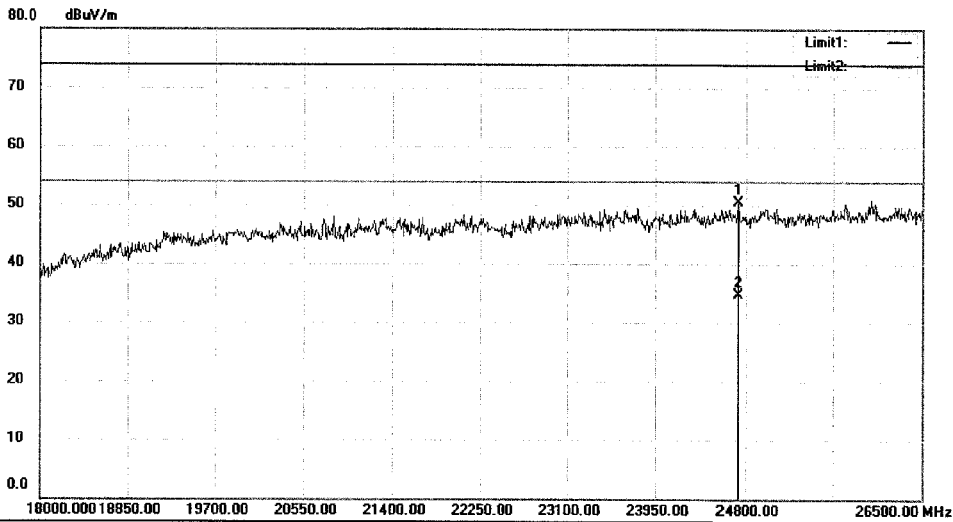
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9 Data : #207 Date : 15/09/12/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24723.50	87.46	-37.04	50.42	74.00	-23.58	peak			
2	*	24723.50	71.72	-37.04	34.68	54.00	-19.32	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

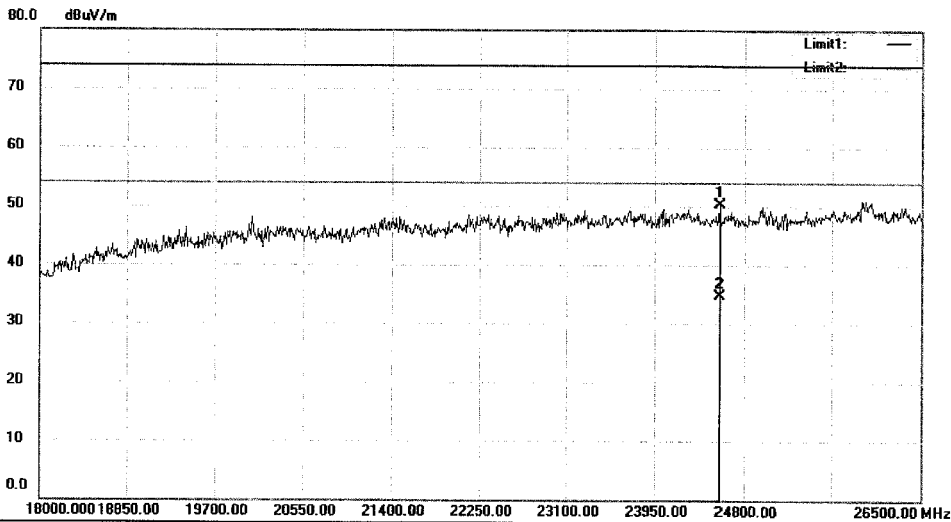
File : TUV9\Data : #207

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #208 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24562.00	87.31	-37.06	50.25	74.00	-23.75	peak			
2	*	24562.00	71.68	-37.06	34.62	54.00	-19.38	AVG			

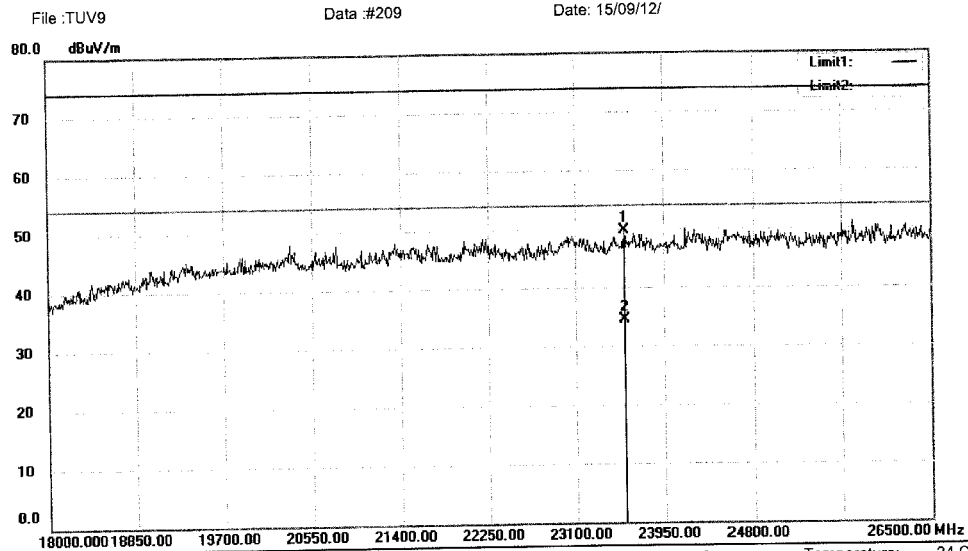
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#208

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		23567.50	87.32	-37.58	49.74	74.00	-24.26			peak
2	*	23567.50	72.17	-37.58	34.59	54.00	-19.41			AVG

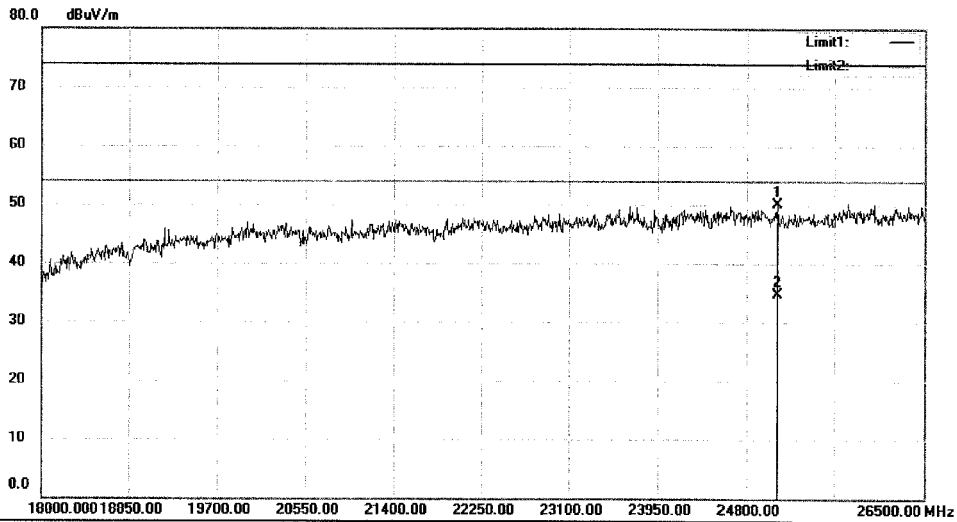
\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9      Data : #210      Date: 15/09/12/



Site 3m Chamber #3      Polarization: **Vertical**      Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25097.50	87.07	-36.89	50.18	74.00	-23.82	peak	.	
2	*	25097.50	71.58	-36.89	34.69	54.00	-19.31	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

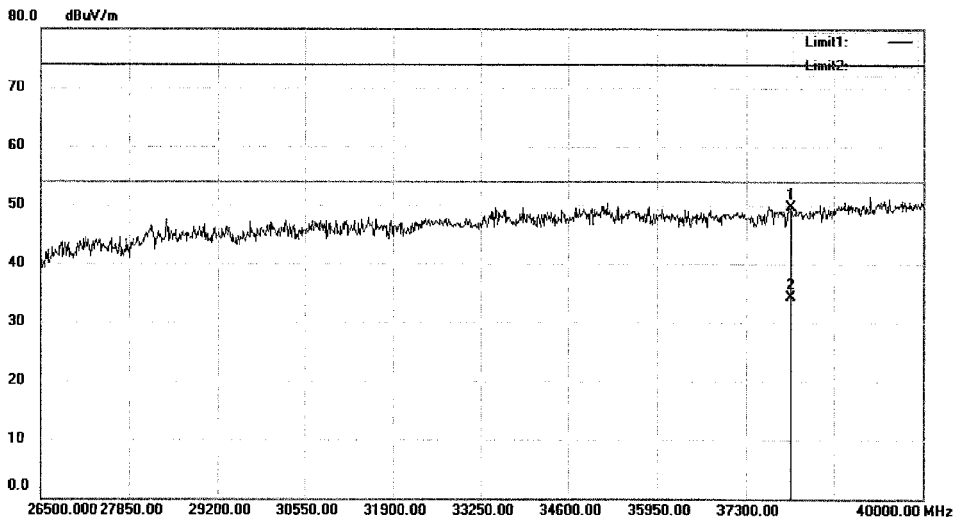
File : TUV9\Data : #210

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9      Data : #231      Date : 15/09/13/



Site 3m Chamber #3      Polarization: **Horizontal**      Temperature: 24 C  
 Limit: (RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		37988.50	85.99	-36.27	49.72	74.00	-24.28	peak		
2	*	37988.50	70.50	-36.27	34.23	54.00	-19.77	AVG		

\*:Maximum data    x:Over limit    !:over margin

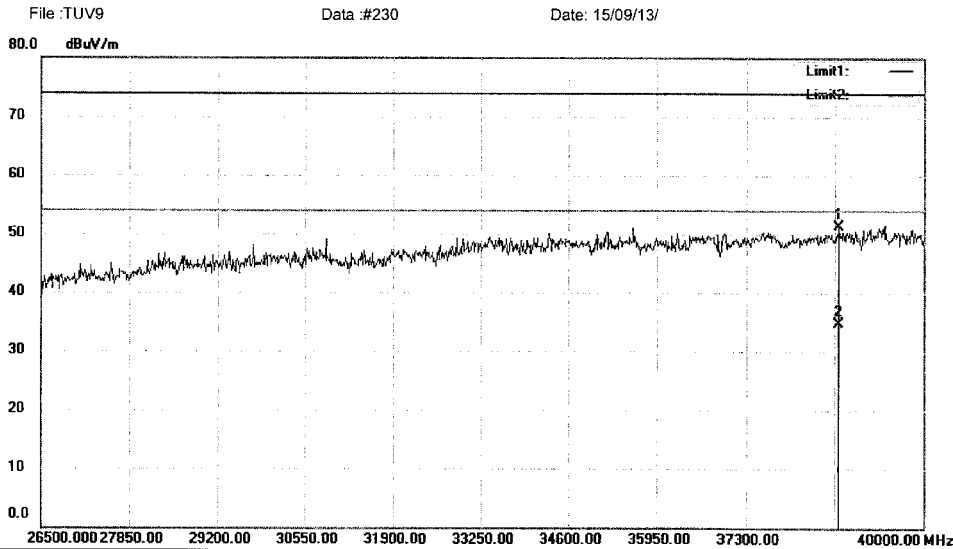
Operator: KK

File : TUV9\Data : #231

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		38717.50	85.88	-34.61	51.27	74.00	-22.73	peak		
2	*	38717.50	69.23	-34.61	34.62	54.00	-19.38	AVG		

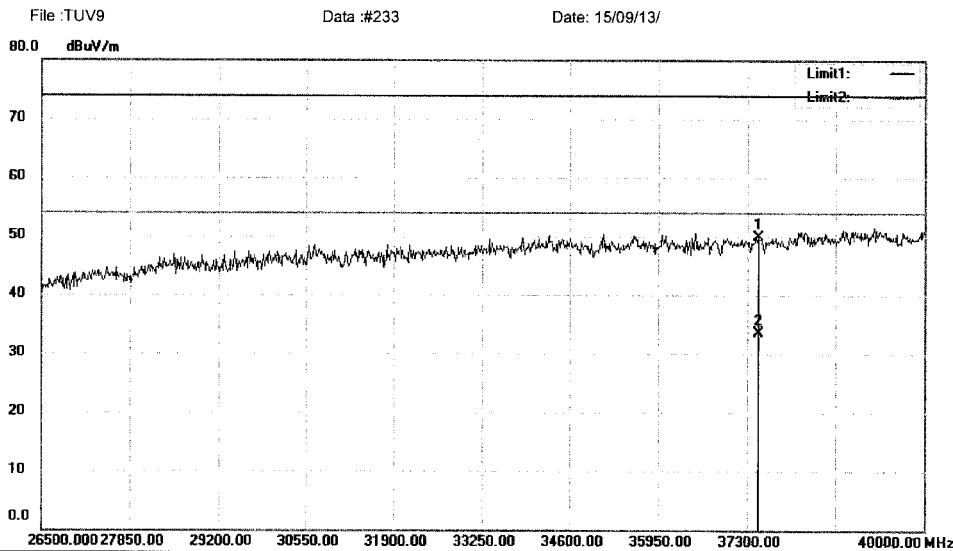
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#230

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		37462.00	86.63	-36.80	49.83	74.00	-24.17	peak		
2	*	37462.00	70.22	-36.80	33.42	54.00	-20.58	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

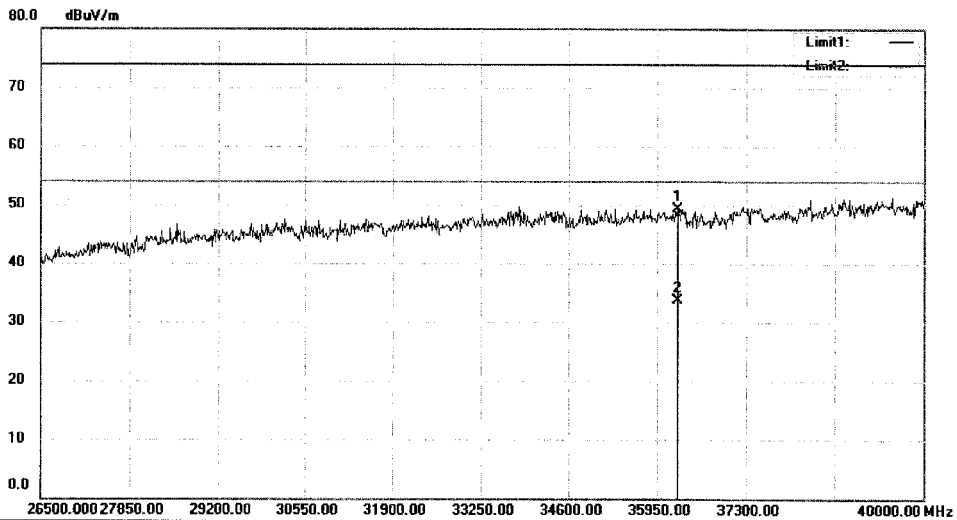
File :TUV9\Data :#233

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9 Data : #232 Date : 15/09/13/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		36260.50	87.35	-37.99	49.36	74.00	-24.64	peak		
2	*	36260.50	71.61	-37.99	33.62	54.00	-20.38	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

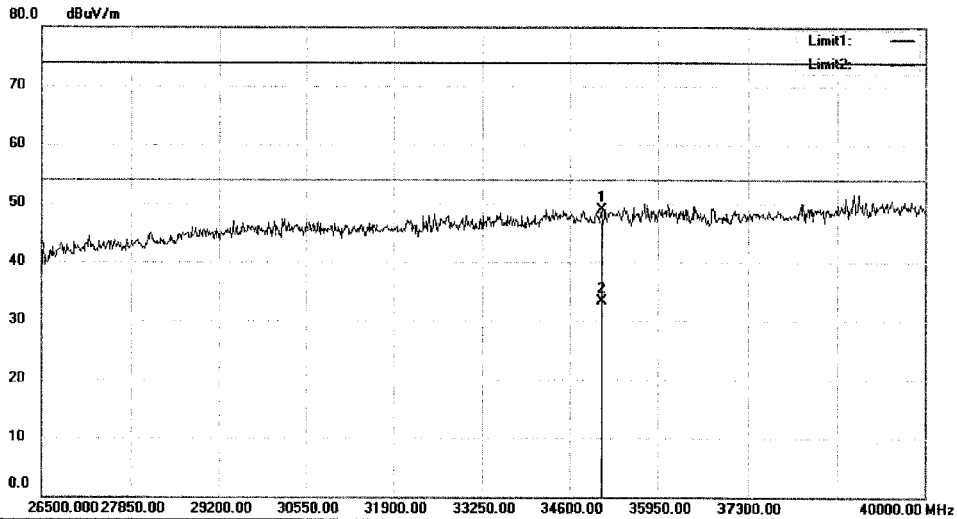
File : TUV9\Data : #232

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9 Data : #235 Date : 15/09/13/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		35086.00	86.91	-37.91	49.00	74.00	-25.00	peak		
2	*	35086.00	71.17	-37.91	33.26	54.00	-20.74	AVG		

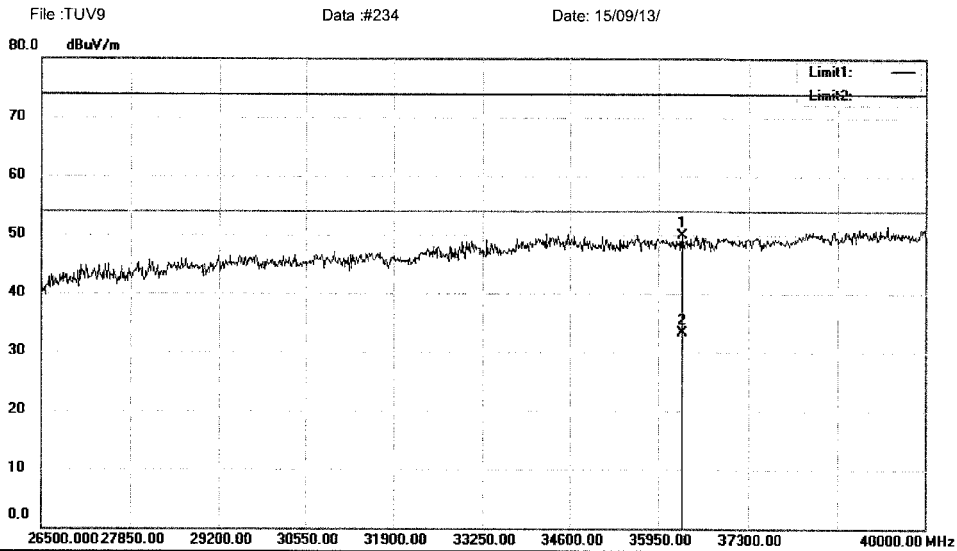
\*:Maximum data x:Over limit !:over margin

Operator: KK

File : TUV9\Data : #235

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		36314.50	87.84	-37.94	49.90	74.00	-24.10	peak		
2	*	36314.50	71.20	-37.94	33.26	54.00	-20.74	AVG		

\*:Maximum data x:Over limit !:over margin

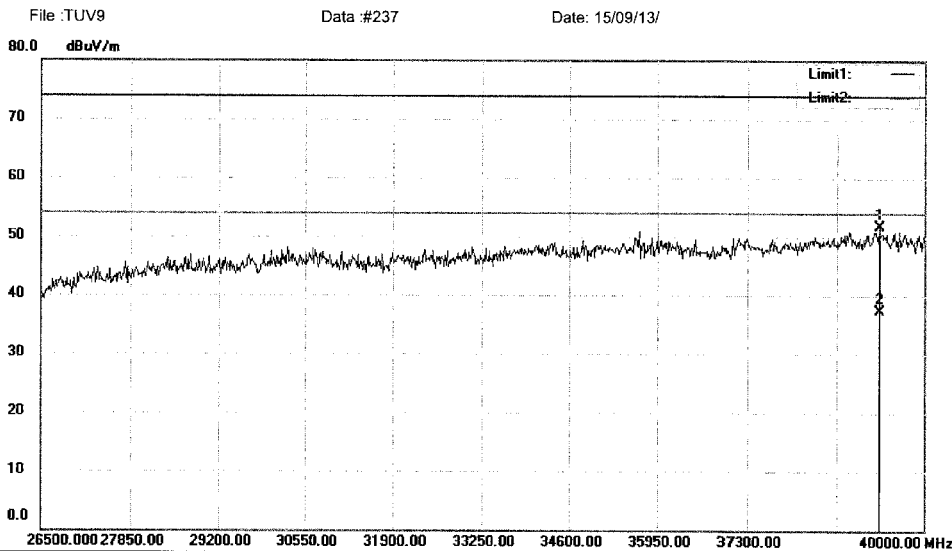
Operator: KK

File :TUV9\Data :#234

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		39298.00	85.02	-33.28	51.74	74.00	-22.26	peak		
2	*	39298.00	70.54	-33.28	37.26	54.00	-16.74	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

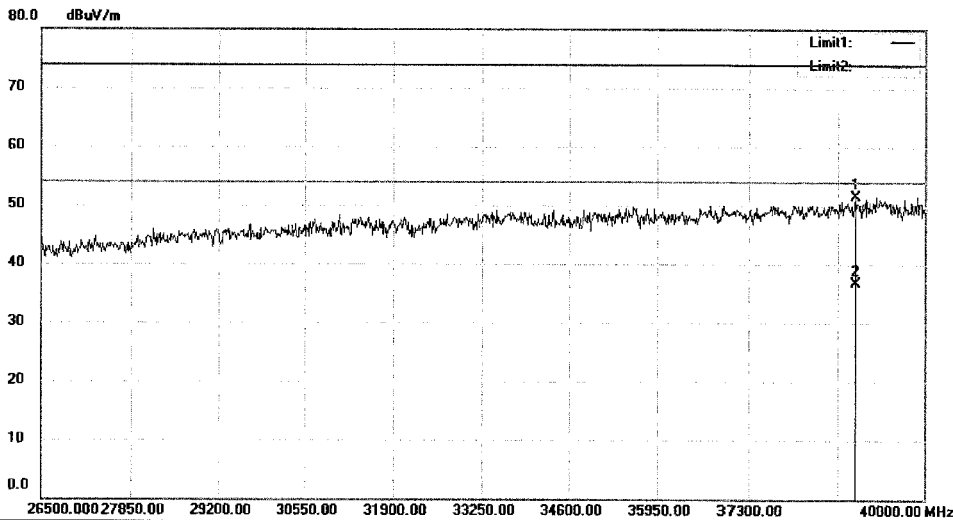
File :TUV9\Data :#237

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#236 Date: 15/09/13/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		38920.00	85.64	-34.15	51.49	74.00	-22.51	peak		
2	*	38920.00	70.93	-34.15	36.78	54.00	-17.22	AVG		

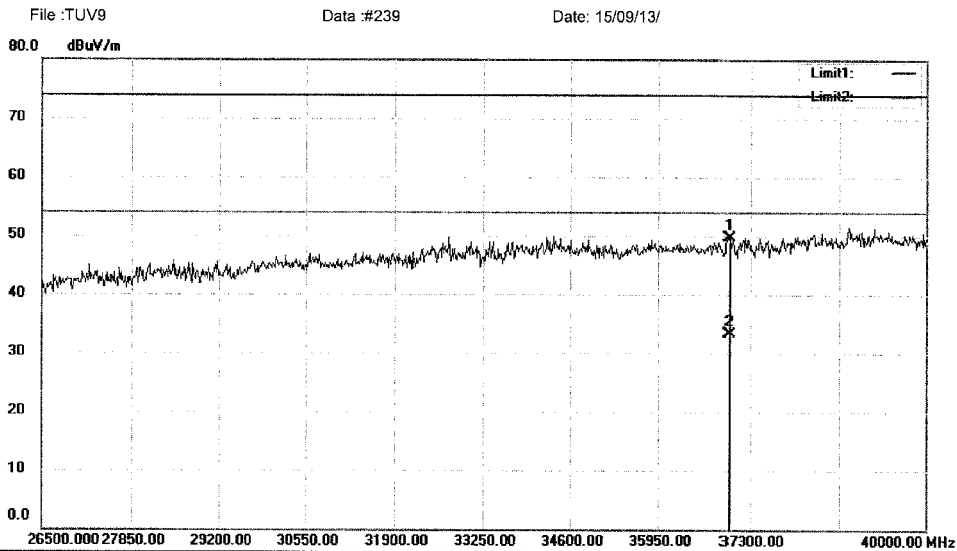
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#236

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		36989.50	87.04	-37.27	49.77	74.00	-24.23	peak		
2	*	36989.50	70.55	-37.27	33.28	54.00	-20.72	AVG		

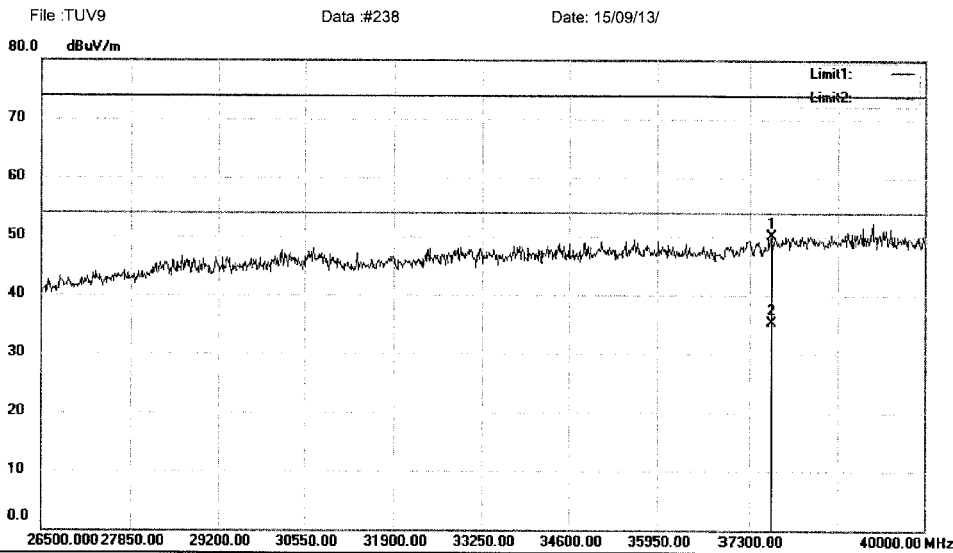
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#239

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3      Polarization: **Vertical**      Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		37624.00	86.78	-36.63	50.15	74.00	-23.85	peak		
2	*	37624.00	71.84	-36.63	35.21	54.00	-18.79	AVG		

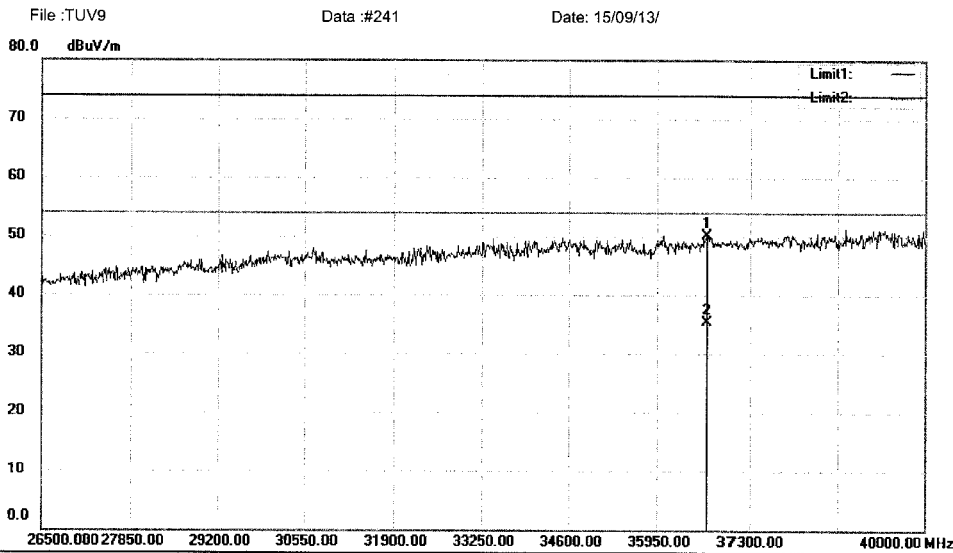
\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV9\Data : #238

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		36719.50	87.62	-37.53	50.09	74.00	-23.91	peak		
2	*	36719.50	72.76	-37.53	35.23	54.00	-18.77	AVG		

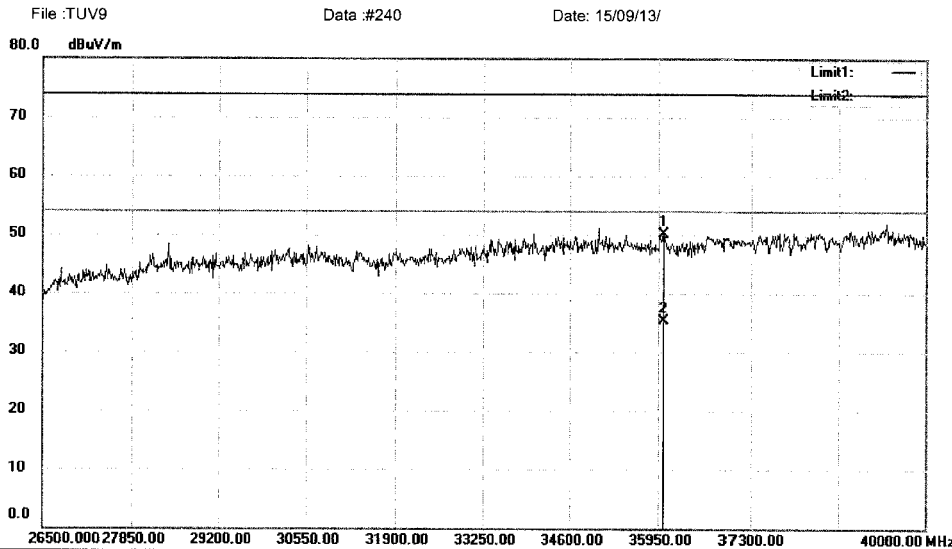
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#241

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		36031.00	88.34	-38.22	50.12	74.00	-23.88	peak		
2	*	36031.00	73.45	-38.22	35.23	54.00	-18.77	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#240

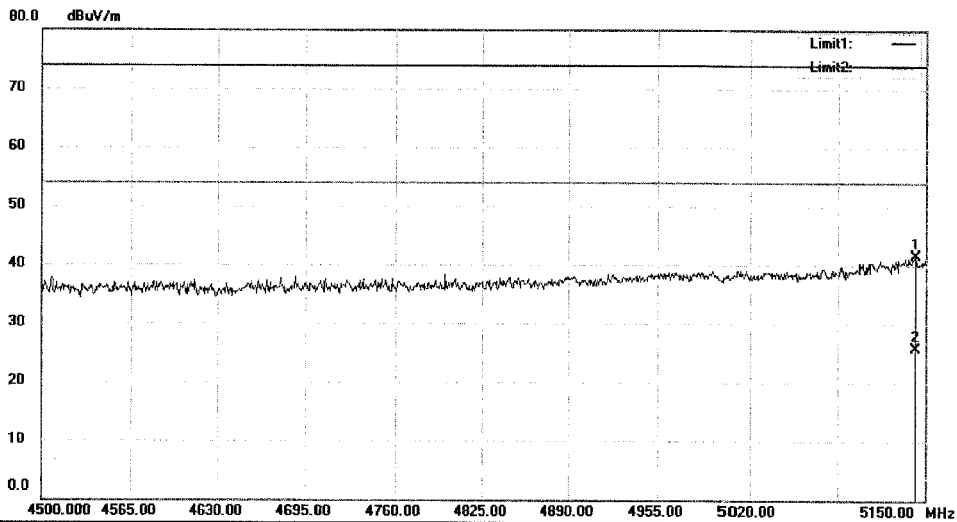
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#317 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5142.200	61.49	-19.92	41.57	74.00	-32.43	peak		
2	*	5142.200	45.54	-19.92	25.62	54.00	-28.38	AVG		

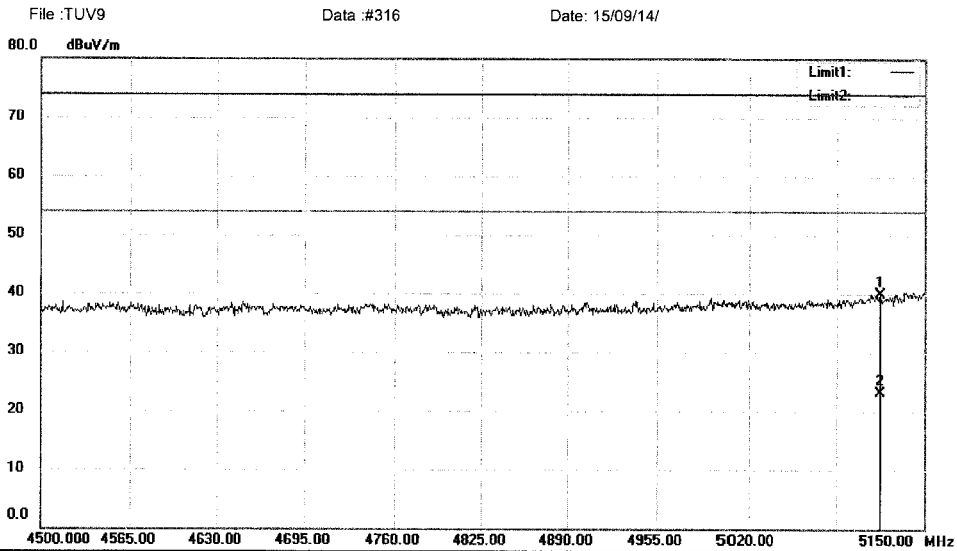
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#317

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5117.500	59.89	-19.93	39.96	74.00	-34.04	peak		
2	*	5117.500	43.08	-19.93	23.15	54.00	-30.85	AVG		

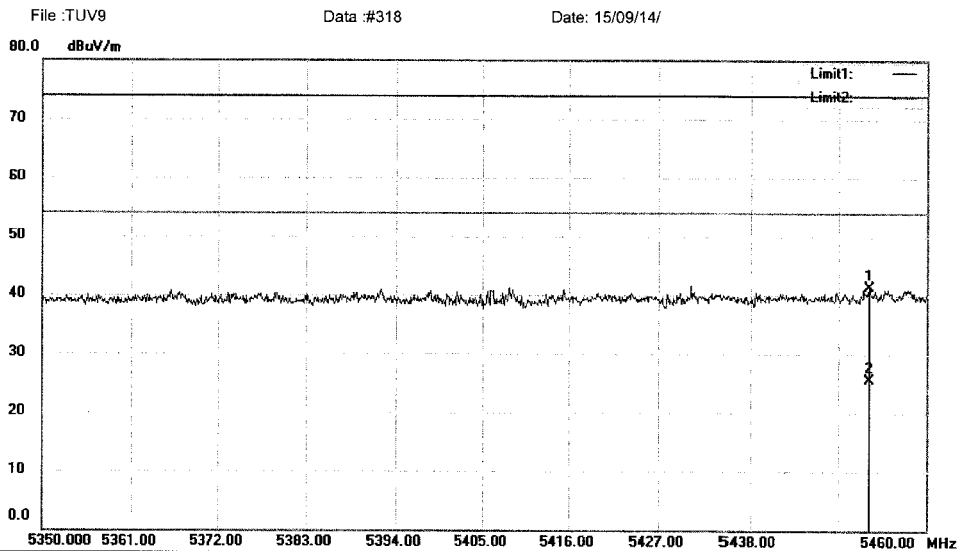
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#316

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5452.850	61.08	-19.75	41.33	74.00	-32.67	peak		
2	*	5452.850	45.21	-19.75	25.46	54.00	-28.54	AVG		

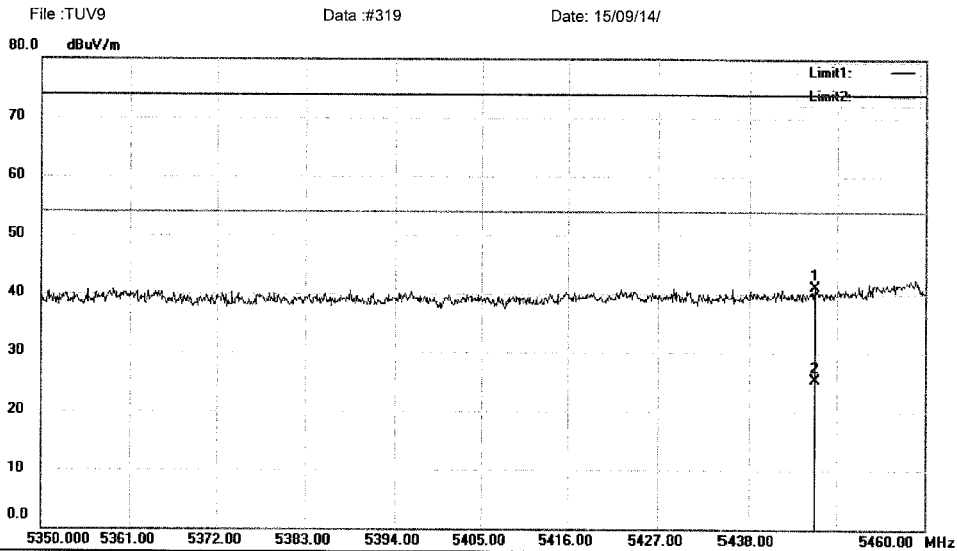
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#318

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5446.250	60.76	-19.75	41.01	74.00	-32.99	peak			
2	*	5446.250	45.07	-19.75	25.32	54.00	-28.68	AVG			

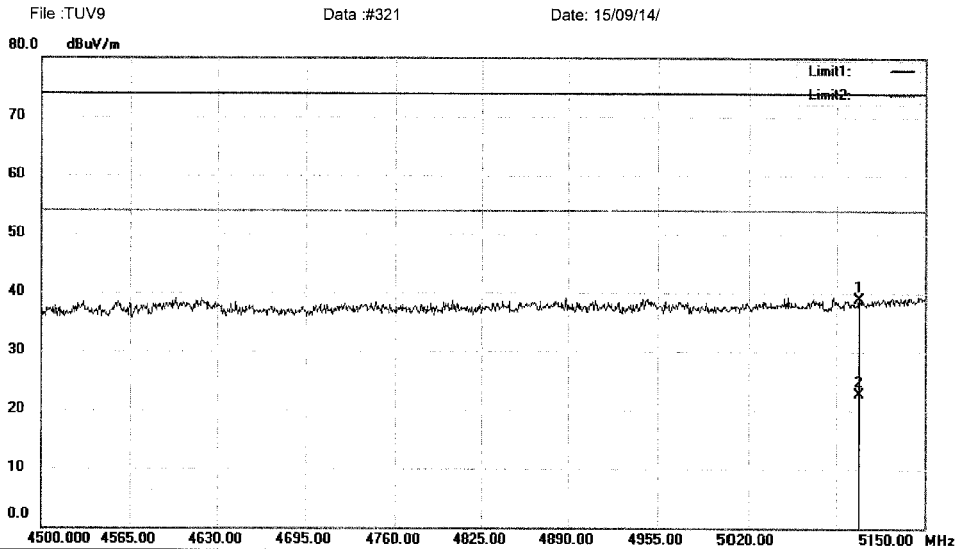
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#319

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5101.900	58.89	-19.94	38.95	74.00	-35.05	peak		
2	*	5101.900	42.62	-19.94	22.68	54.00	-31.32	AVG		

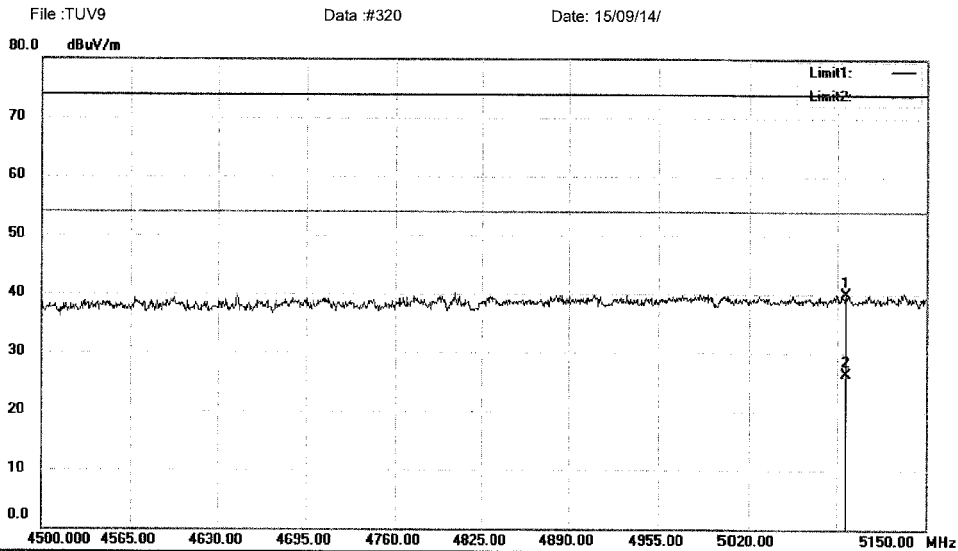
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#321

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5091.500	59.94	-19.94	40.00	74.00	-34.00	peak			
2	*	5091.500	46.26	-19.94	26.32	54.00	-27.68	AVG			

\*:Maximum data x:Over limit !:over margin

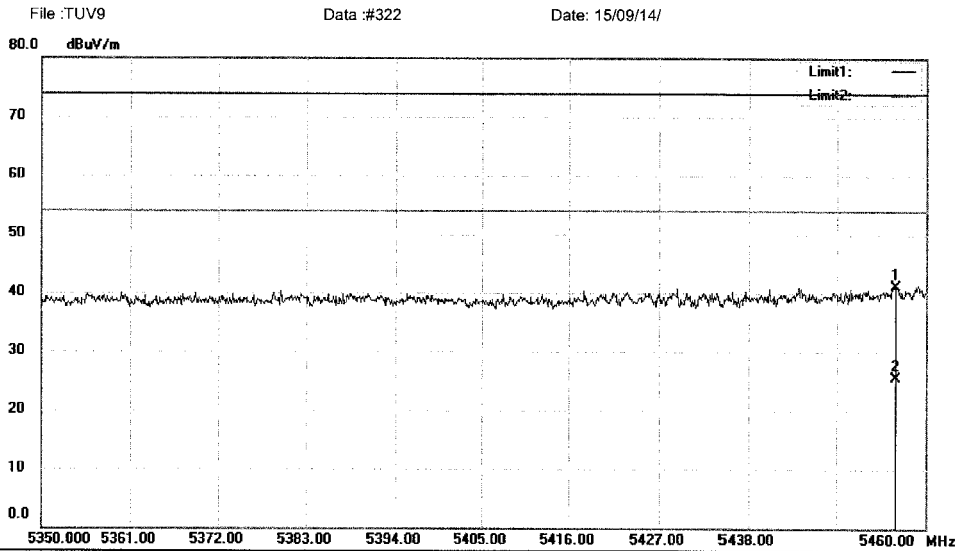
Operator: KK

File :TUV9\Data :#320

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5456.260	60.85	-19.74	41.11	74.00	-32.89	peak		
2	*	5456.260	45.22	-19.74	25.48	54.00	-28.52	AVG		

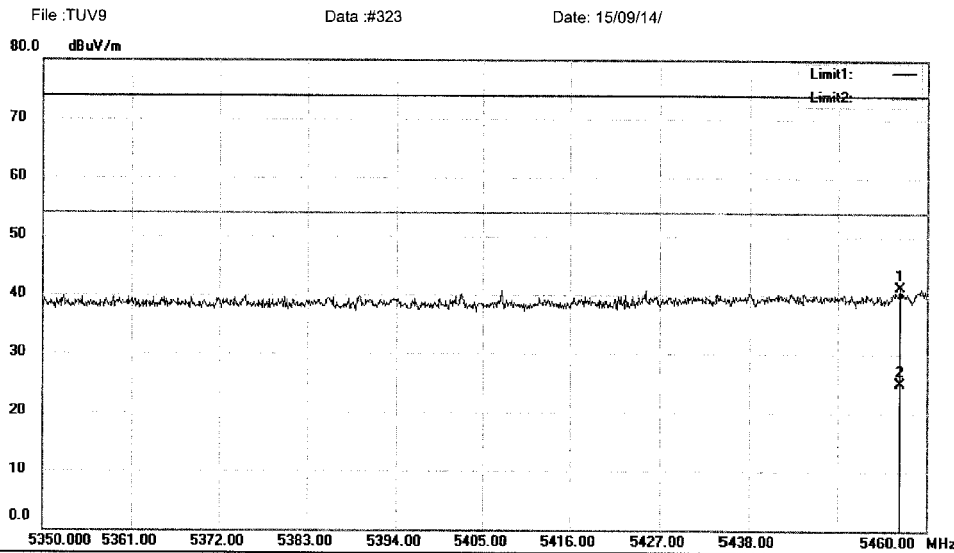
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#322

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5456.700	61.13	-19.74	41.39	74.00	-32.61	peak		
2	*	5456.700	44.69	-19.74	24.95	54.00	-29.05	AVG		

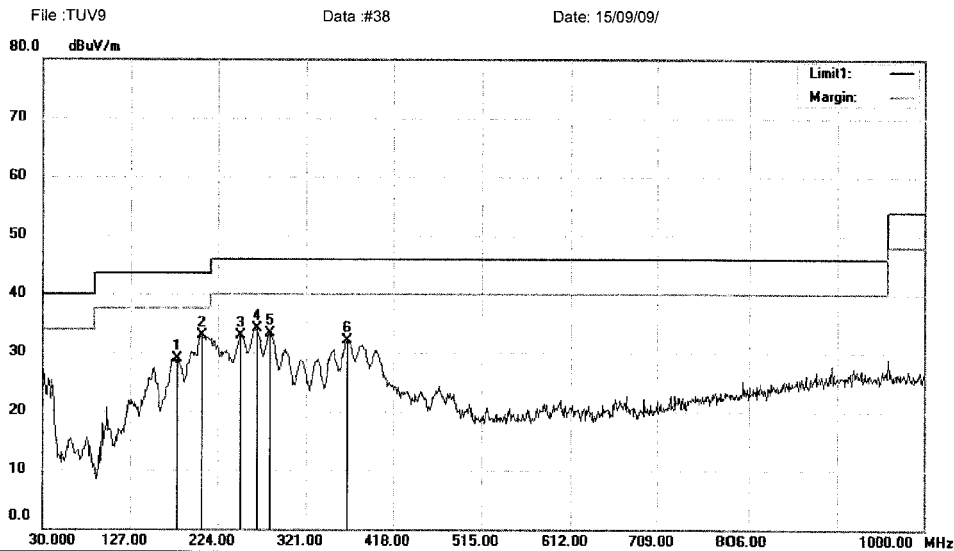
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#323

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5180  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		179.3800	47.97	-18.99	28.98	43.50	-14.52	QP		
2	*	206.5400	49.23	-16.38	32.85	43.50	-10.65	QP		
3		249.2200	46.22	-13.36	32.86	46.00	-13.14	QP		
4		266.6800	46.89	-12.72	34.17	46.00	-11.83	QP		
5		281.2300	45.90	-12.65	33.25	46.00	-12.75	QP		
6		366.5900	42.57	-10.49	32.08	46.00	-13.92	QP		

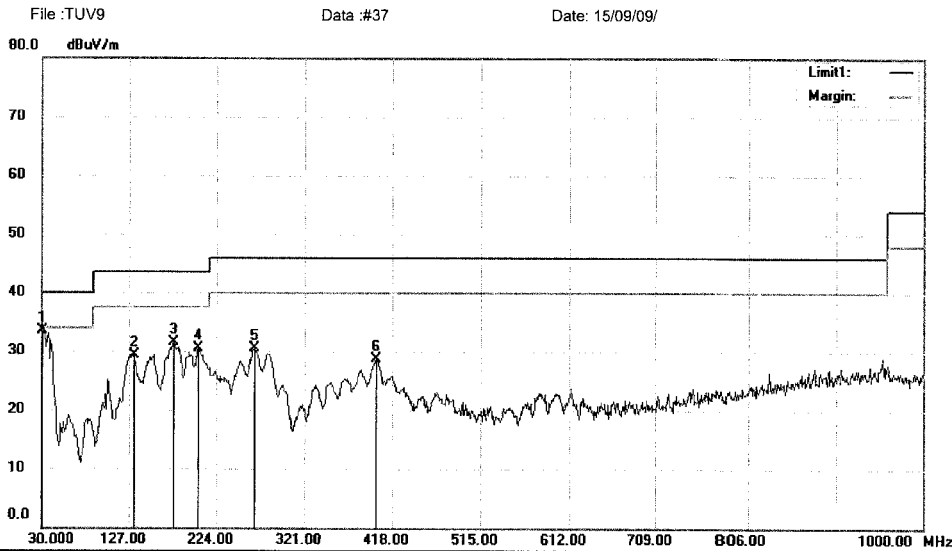
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#38

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5180  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	30.0000	50.02	-16.46	33.56	40.00	-6.44	QP		
2		132.8200	46.80	-17.40	29.40	43.50	-14.10	QP		
3		176.4700	50.61	-19.14	31.47	43.50	-12.03	QP		
4		203.6300	46.86	-16.40	30.46	43.50	-13.04	QP		
5		265.7100	43.27	-12.73	30.54	46.00	-15.46	QP		
6		400.5400	37.63	-8.89	28.74	46.00	-17.26	QP		

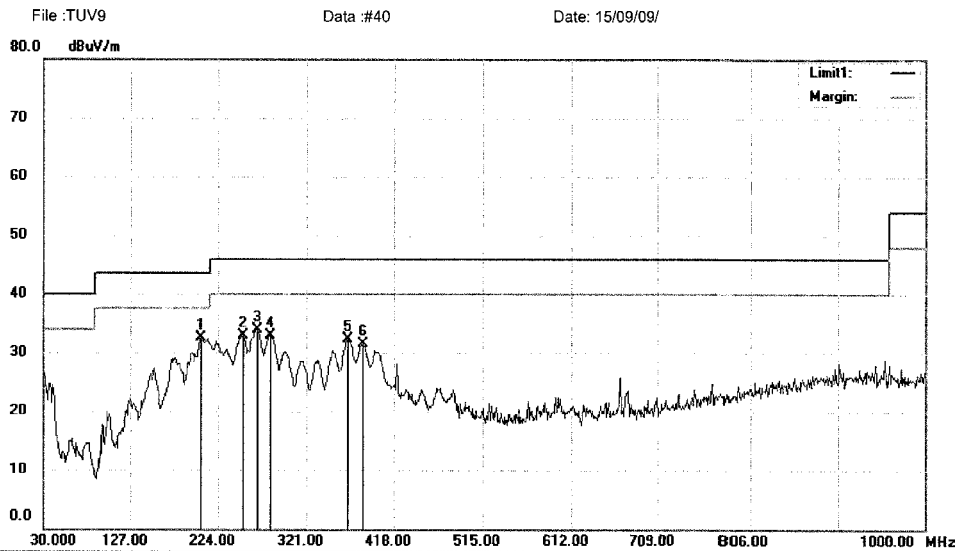
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#37

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282

**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	204.6000	48.98	-16.40	32.58	43.50	-10.92	QP		
2		251.1600	46.20	-13.25	32.95	46.00	-13.05	QP		
3		266.6800	46.64	-12.72	33.92	46.00	-12.08	QP		
4		281.2300	45.65	-12.65	33.00	46.00	-13.00	QP		
5		366.5900	42.74	-10.49	32.25	46.00	-13.75	QP		
6		383.0800	41.27	-9.83	31.44	46.00	-14.56	QP		

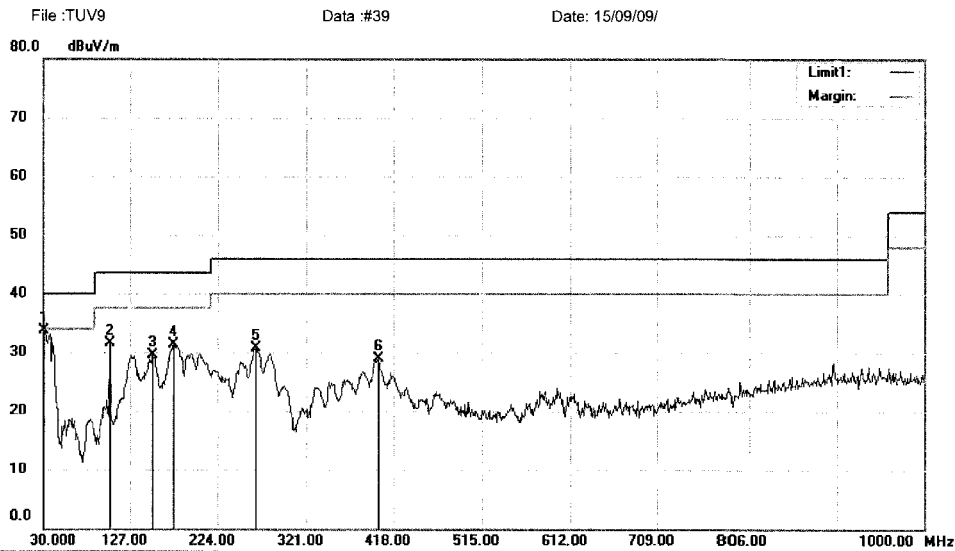
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#40

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5220  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	30.0000	50.14	-16.46	33.68	40.00	-6.32	QP			
2		103.7200	45.53	-14.07	31.46	43.50	-12.04	QP			
3		152.2200	47.79	-18.24	29.55	43.50	-13.95	QP			
4		175.5000	50.55	-19.17	31.38	43.50	-12.12	QP			
5		265.7100	43.35	-12.73	30.62	46.00	-15.38	QP			
6		401.5100	37.73	-8.92	28.81	46.00	-17.19	QP			

\*:Maximum data x:Over limit l:over margin

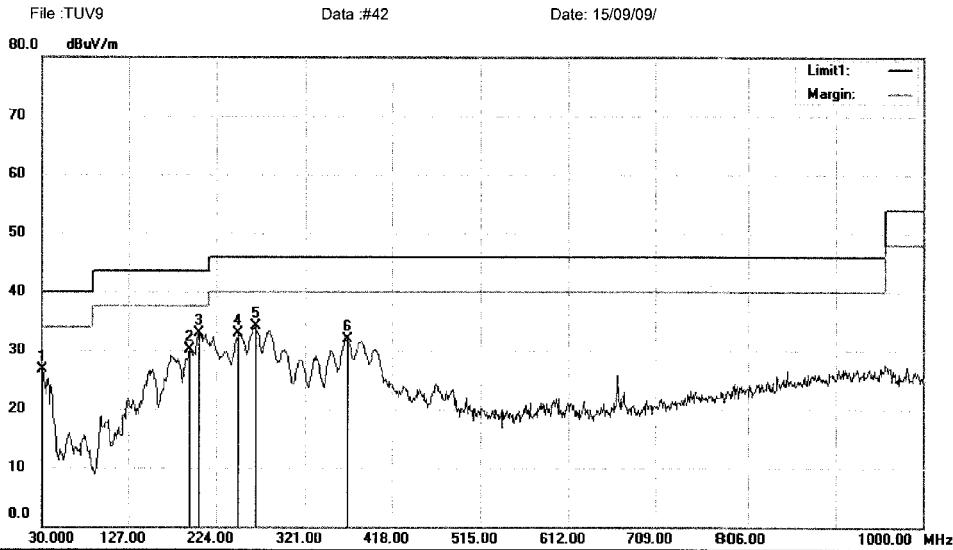
Operator: KK

File :TUV9\Data :#39

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


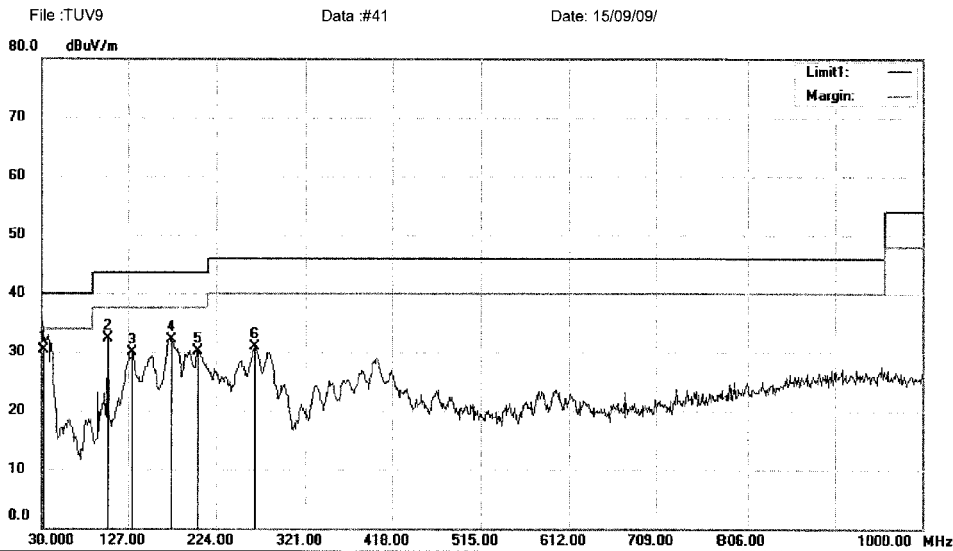
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		30.9700	42.87	-16.13	26.74	40.00	-13.26	QP		
2		194.9000	46.96	-16.85	30.11	43.50	-13.39	QP		
3	*	204.6000	49.21	-16.40	32.81	43.50	-10.69	QP		
4		248.2500	46.29	-13.41	32.88	46.00	-13.12	QP		
5		266.6800	46.81	-12.72	34.09	46.00	-11.91	QP		
6		367.5600	42.37	-10.46	31.91	46.00	-14.09	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bidg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5240  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	31.9400	46.08	-15.81	30.27	40.00	-9.73	QP		
2		103.7200	46.33	-14.07	32.26	43.50	-11.24	QP		
3		131.8500	47.22	-17.36	29.86	43.50	-13.64	QP		
4		175.5000	51.25	-19.17	32.08	43.50	-11.42	QP		
5		203.6300	46.51	-16.40	30.11	43.50	-13.39	QP		
6		265.7100	43.65	-12.73	30.92	46.00	-15.08	QP		

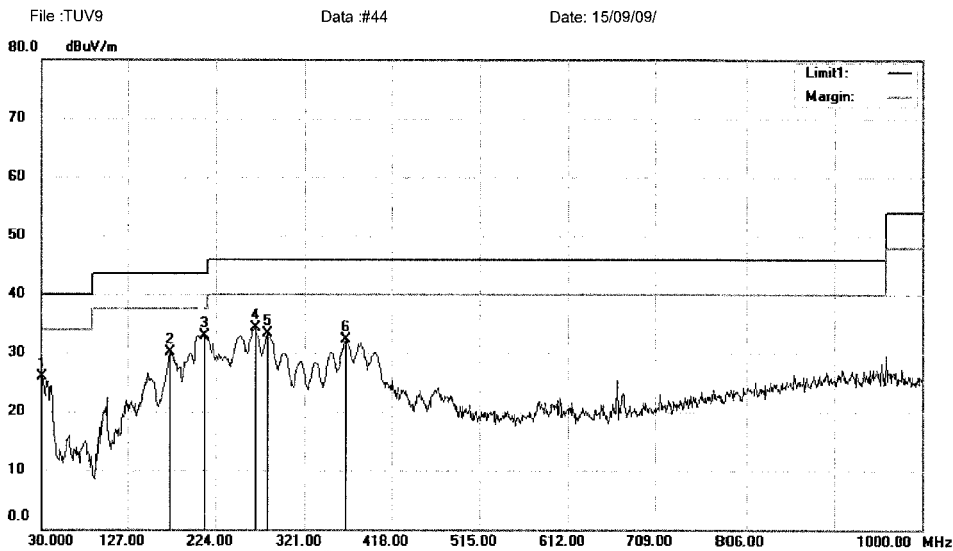
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#41

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.9700	42.02	-16.13	25.89	40.00	-14.11	QP		
2		174.5300	49.35	-19.22	30.13	43.50	-13.37	QP		
3	*	211.3900	49.37	-16.38	32.99	43.50	-10.51	QP		
4		266.6800	47.02	-12.72	34.30	46.00	-11.70	QP		
5		280.2600	45.81	-12.59	33.22	46.00	-12.78	QP		
6		366.5900	42.87	-10.49	32.38	46.00	-13.62	QP		

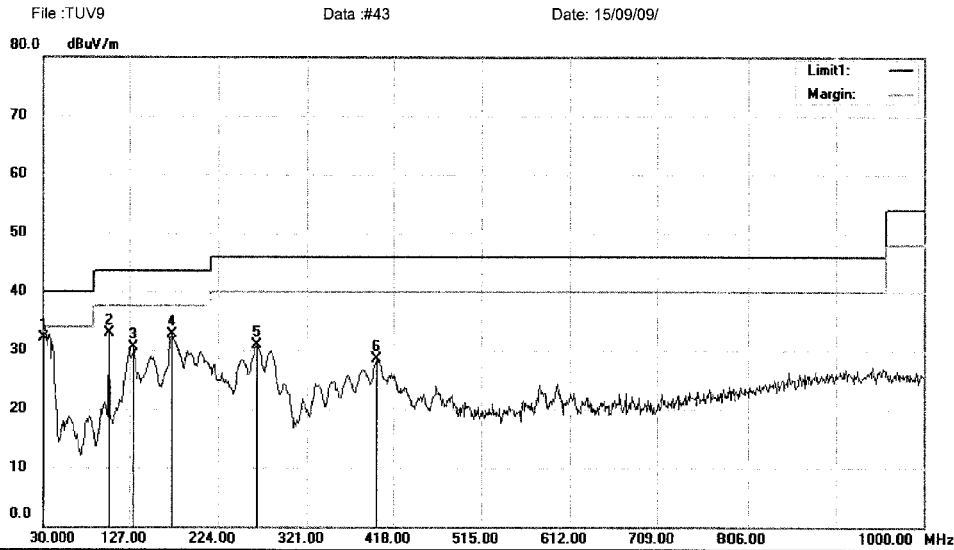
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#44

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3      Polarization: **Vertical**      Temperature: 24 C  
 Limit: (RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5745  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	30.0000	48.61	-16.46	32.15	40.00	-7.85	QP			
2		103.7200	47.07	-14.07	33.00	43.50	-10.50	QP			
3		131.8500	47.93	-17.36	30.57	43.50	-12.93	QP			
4		174.5300	51.88	-19.22	32.66	43.50	-10.84	QP			
5		265.7100	43.73	-12.73	31.00	46.00	-15.00	QP			
6		399.5700	37.41	-8.89	28.52	46.00	-17.48	QP			

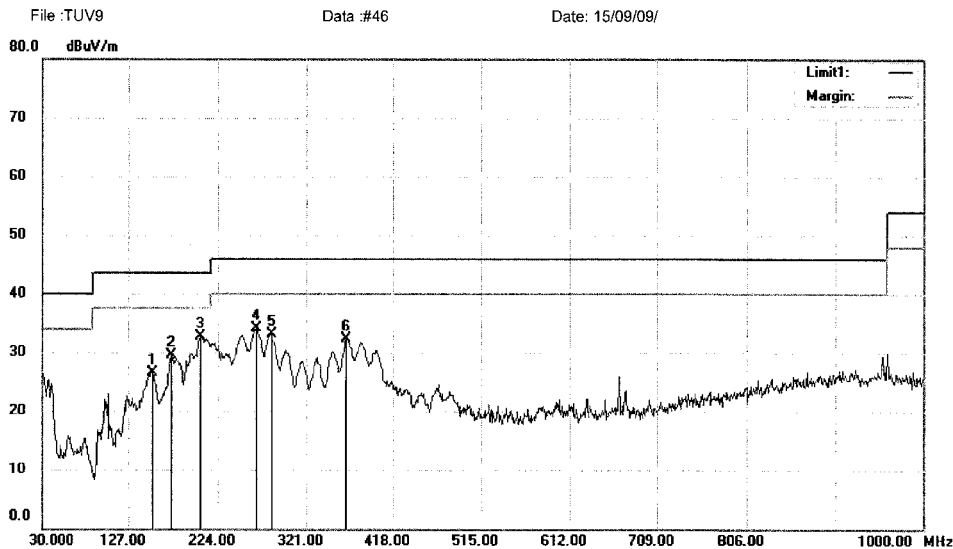
\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV9\Data : #43

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		153.1900	44.86	-18.29	26.57	43.50	-16.93	QP		
2		174.5300	48.63	-19.22	29.41	43.50	-14.09	QP		
3	*	205.5700	49.15	-16.39	32.76	43.50	-10.74	QP		
4		265.7100	46.75	-12.73	34.02	46.00	-11.98	QP		
5		282.2000	45.88	-12.71	33.17	46.00	-12.83	QP		
6		365.6200	42.87	-10.52	32.35	46.00	-13.65	QP		

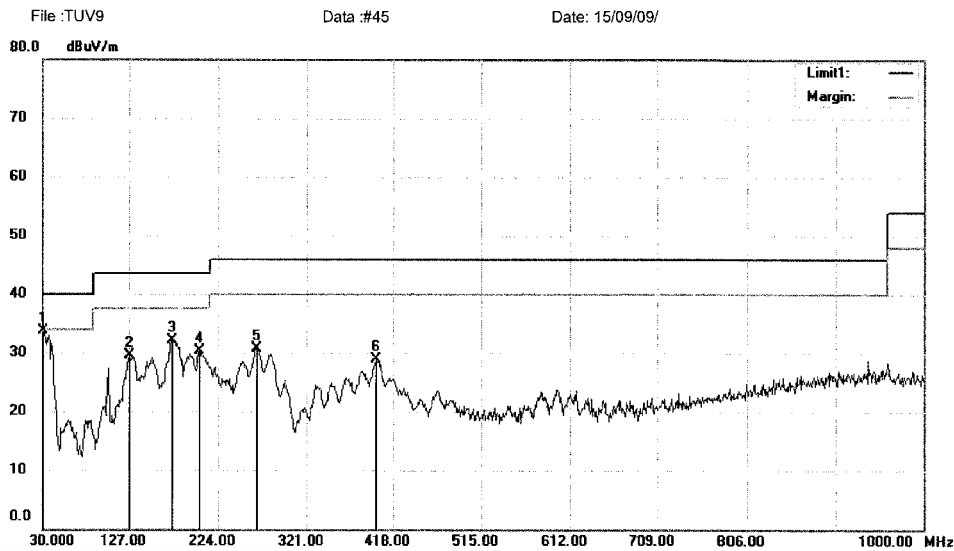
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#46

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5785  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	30.0000	50.11	-16.46	33.65	40.00	-6.35	QP		
2		127.9700	46.64	-17.07	29.57	43.50	-13.93	QP		
3		174.5300	51.30	-19.22	32.08	43.50	-11.42	QP		
4		203.6300	46.75	-16.40	30.35	43.50	-13.15	QP		
5		265.7100	43.50	-12.73	30.77	46.00	-15.23	QP		
6		399.5700	37.85	-8.89	28.96	46.00	-17.04	QP		

\*:Maximum data x:Over limit !:over margin

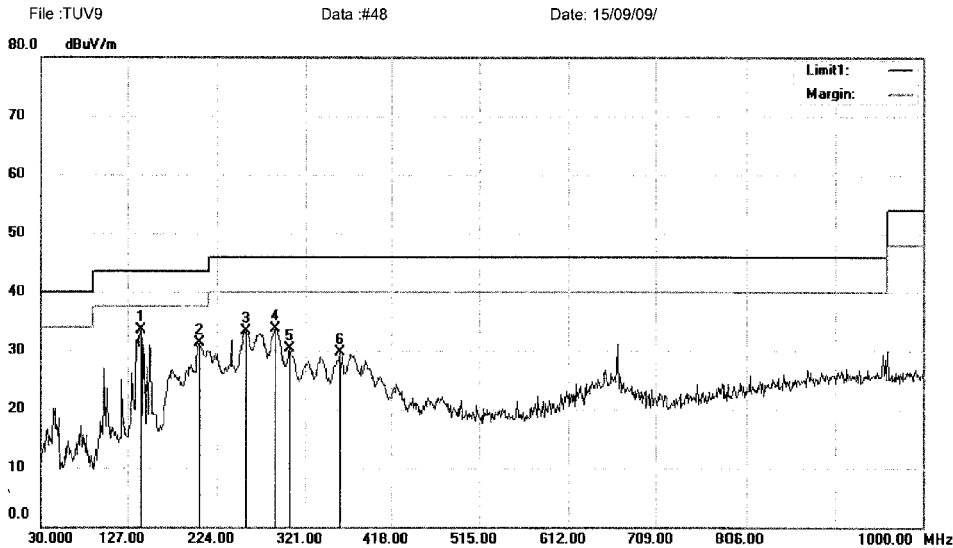
Operator: KK

File :TUV9\Data :#45

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


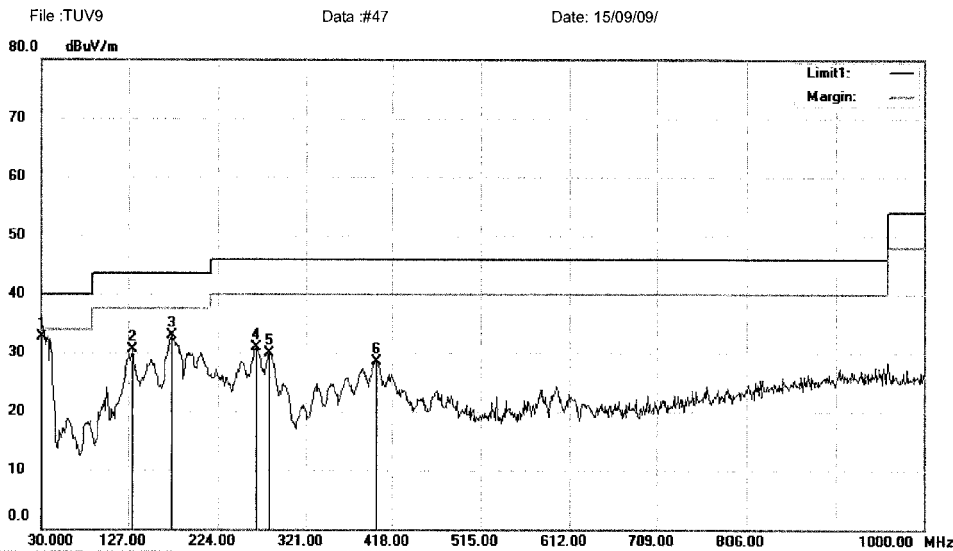
Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	141.5500	51.44	-17.84	33.60	43.50	-9.90	QP		
2		204.6000	47.72	-16.40	31.32	43.50	-12.18	QP		
3		255.0400	46.30	-13.06	33.24	46.00	-12.76	QP		
4		288.0200	46.69	-13.07	33.62	46.00	-12.38	QP		
5		303.5400	44.08	-13.78	30.30	46.00	-15.70	QP		
6		359.8000	40.55	-10.76	29.79	46.00	-16.21	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5825  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	30.0000	49.14	-16.46	32.68	40.00	-7.32	QP		
2		131.8500	47.81	-17.36	30.45	43.50	-13.05	QP		
3		173.5600	52.12	-19.26	32.86	43.50	-10.64	QP		
4		265.7100	43.68	-12.73	30.95	46.00	-15.05	QP		
5		280.2600	42.59	-12.59	30.00	46.00	-16.00	QP		
6		400.5400	37.45	-8.89	28.56	46.00	-17.44	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

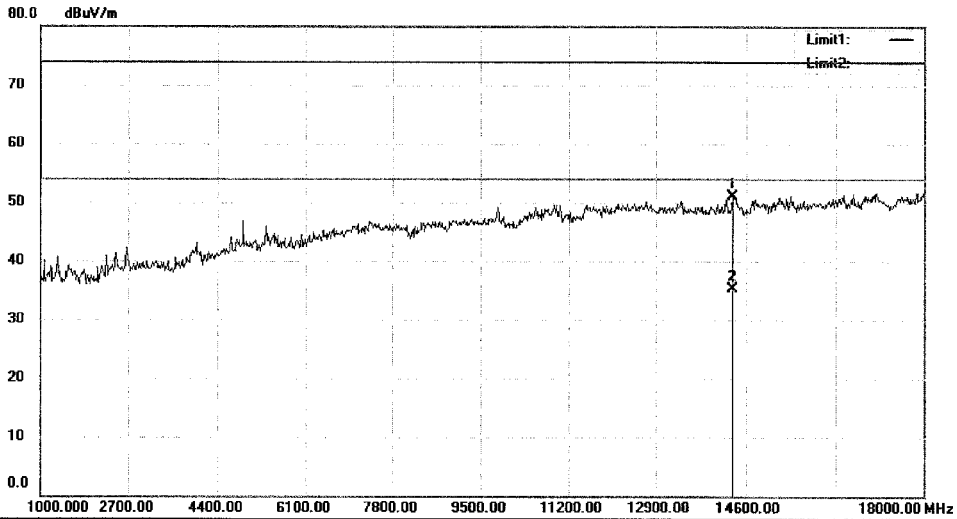
File :TUV9\Data :#47

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#132 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		14328.00	47.65	3.40	51.05	74.00	-22.95	peak		
2	*	14328.00	31.83	3.40	35.23	54.00	-18.77	AVG		

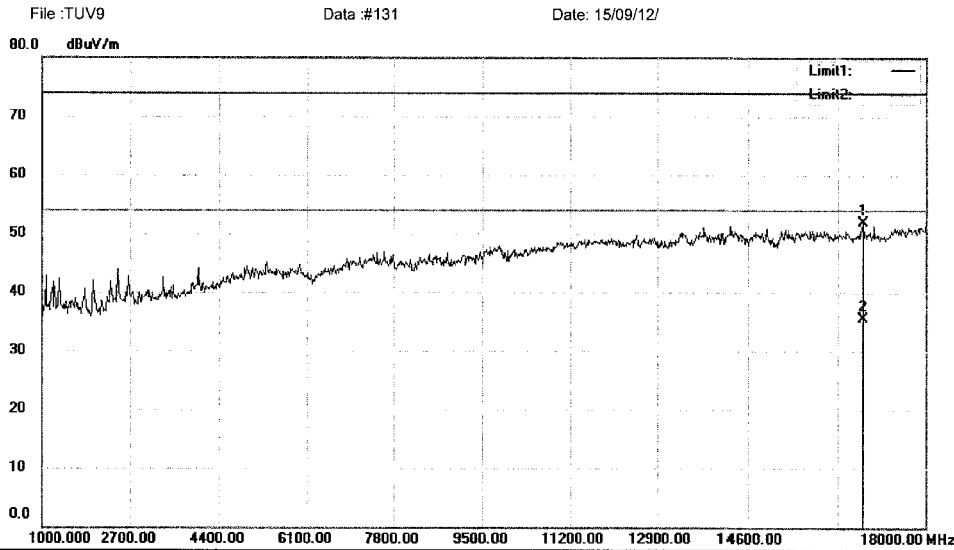
\*:Maximum data x:Over limit !:over margin

Operator:

File :TUV9\Data :#132

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		16793.00	49.90	1.99	51.89	74.00	-22.11	peak		
2	*	16793.00	33.53	1.99	35.52	54.00	-18.48	AVG		

\*:Maximum data x:Over limit !:over margin

Operator:

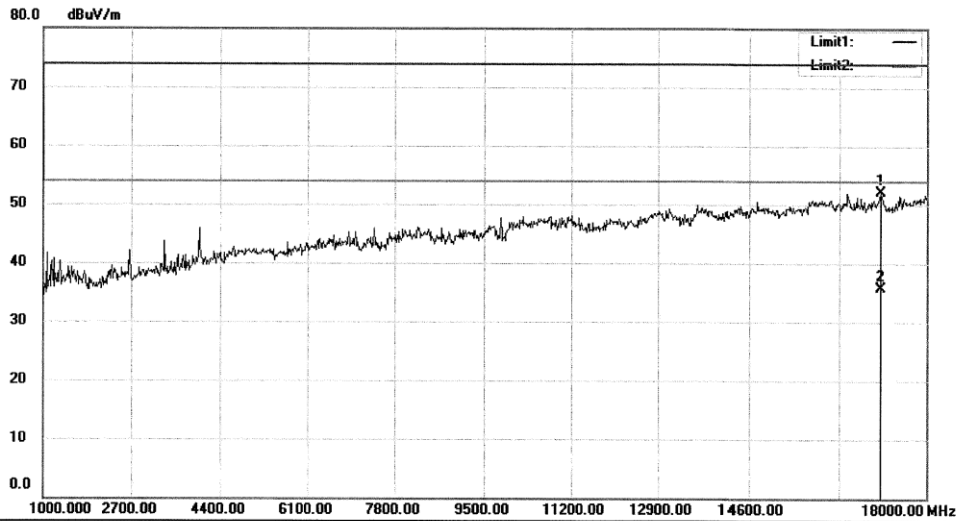
File :TUV9\Data :#131

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#133 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17099.00	48.13	4.05	52.18	74.00	-21.82	peak		
2	*	17099.00	31.57	4.05	35.62	54.00	-18.38	AVG		

\*:Maximum data x:Over limit !:over margin

Operator:

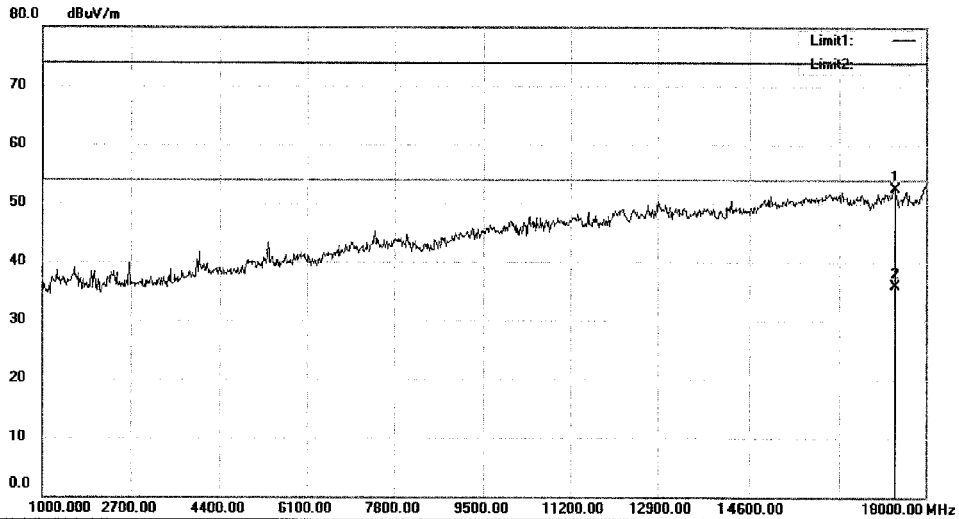
File :TUV9\Data :#133

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9 Data : #134 Date : 15/09/12/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		17388.00	44.95	7.61	52.56	74.00	-21.44	peak		
2	*	17388.00	28.24	7.61	35.85	54.00	-18.15	AVG		

\*:Maximum data x:Over limit !:over margin

Operator:

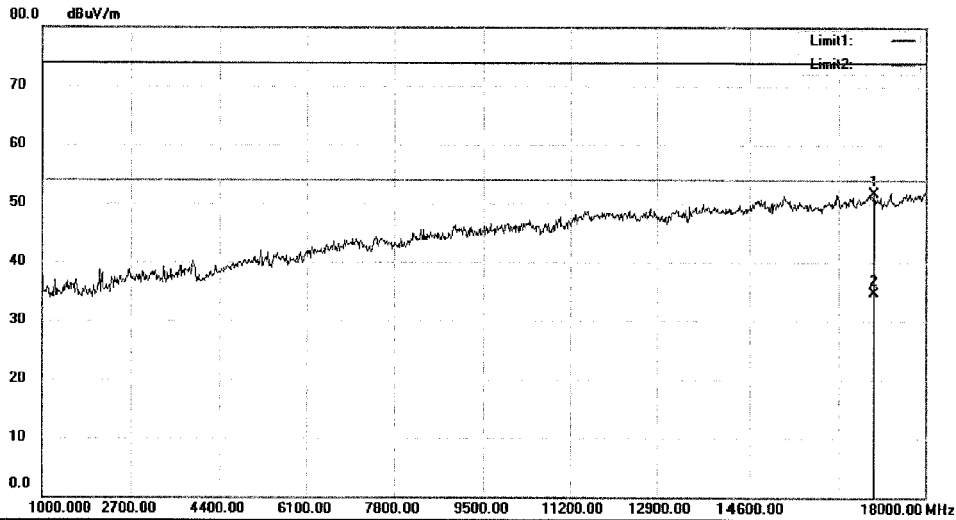
File : TUV9\Data : #134

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File:TUV9 Data:#135 Date:15/09/11/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		16997.00	48.84	2.83	51.67	74.00	-22.33	peak		
2	*	16997.00	31.79	2.83	34.62	54.00	-19.38	AVG		

\*:Maximum data x:Over limit !:over margin

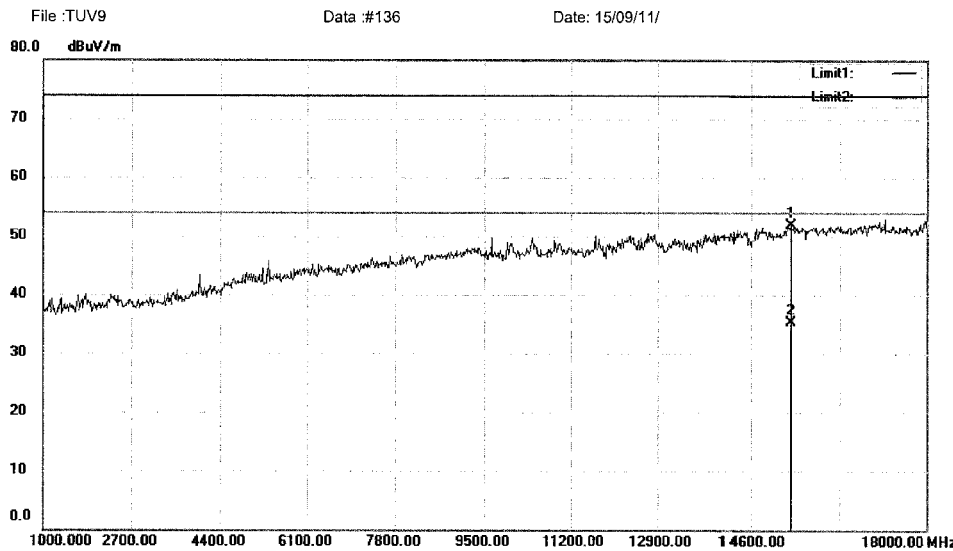
Operator:

File:TUV9\Data:#135

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3                      Polarization: **Vertical**                      Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247                      Power: AC 120V/60Hz                      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		15348.00	50.76	1.14	51.90	74.00	-22.10	peak		
2	*	15348.00	34.12	1.14	35.26	54.00	-18.74	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

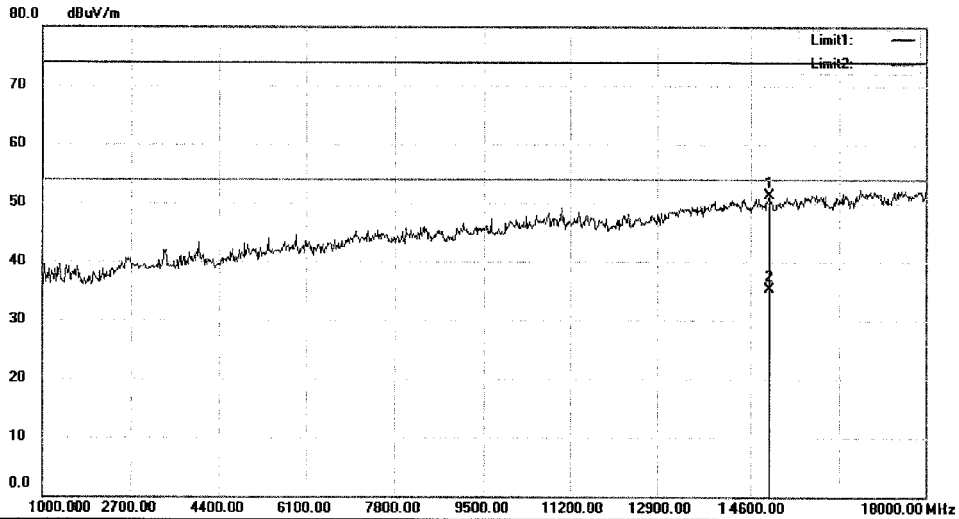
File : TUV9\Data : #136

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#137 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		14940.00	48.85	2.54	51.39	74.00	-22.61	peak			
2	*	14940.00	32.69	2.54	35.23	54.00	-18.77	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

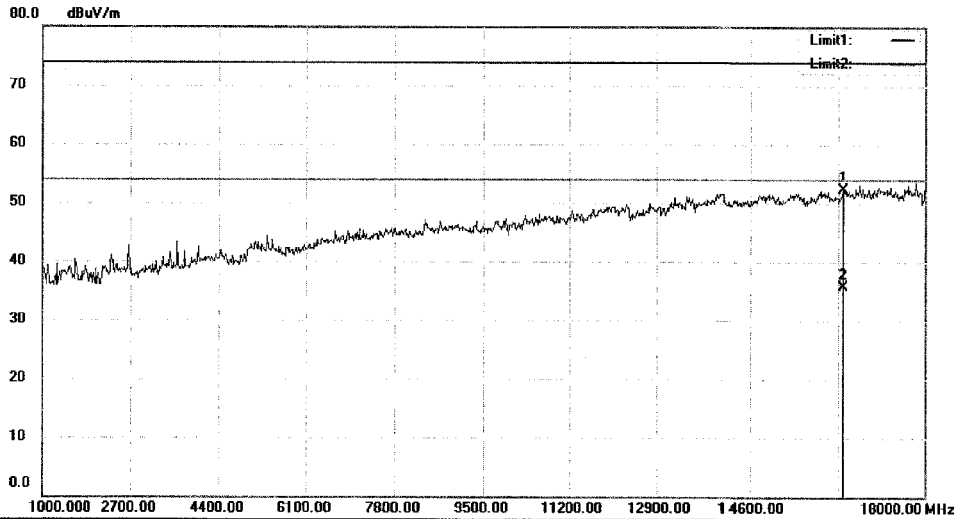
File :TUV9\Data :#137

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#138 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5745  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		16402.00	51.96	0.37	52.33	74.00	-21.67	peak			
2	*	16402.00	35.27	0.37	35.64	54.00	-18.36	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

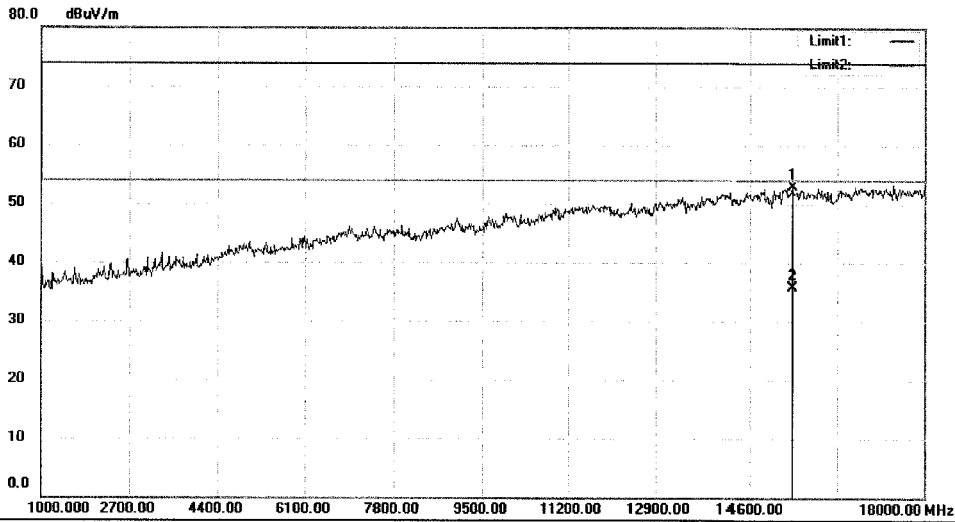
File :TUV9\Data :#138

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9                      Data : #139                      Date: 15/09/11/



Site 3m Chamber #3                      Polarization: **Horizontal**                      Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247                      Power: AC 120V/60Hz                      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		15416.00	52.08	0.89	52.97	74.00	-21.03	peak			
2	*	15416.00	34.73	0.89	35.62	54.00	-18.38	AVG			

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV9 \ Data : #139

Page: 1