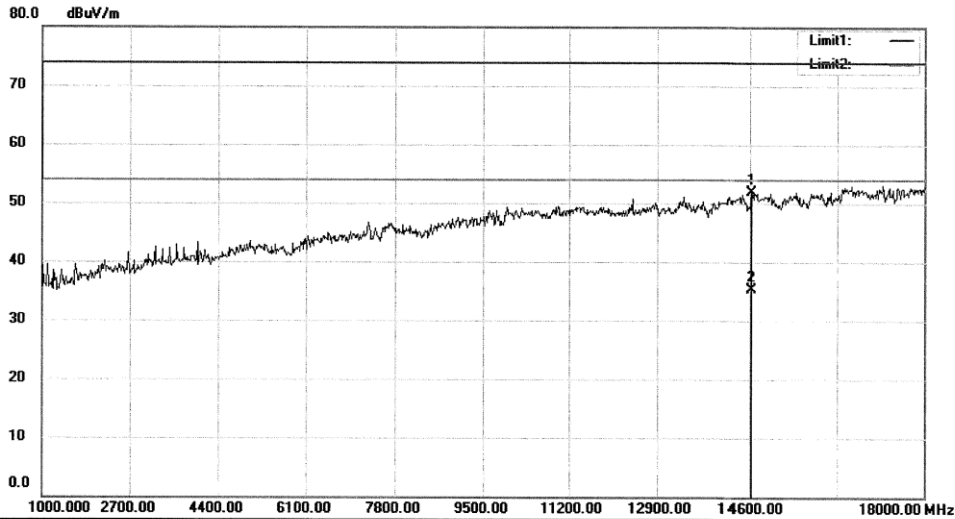


Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#140 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		14634.00	48.93	2.97	51.90	74.00	-22.10	peak			
2	*	14634.00	32.29	2.97	35.26	54.00	-18.74	AVG			

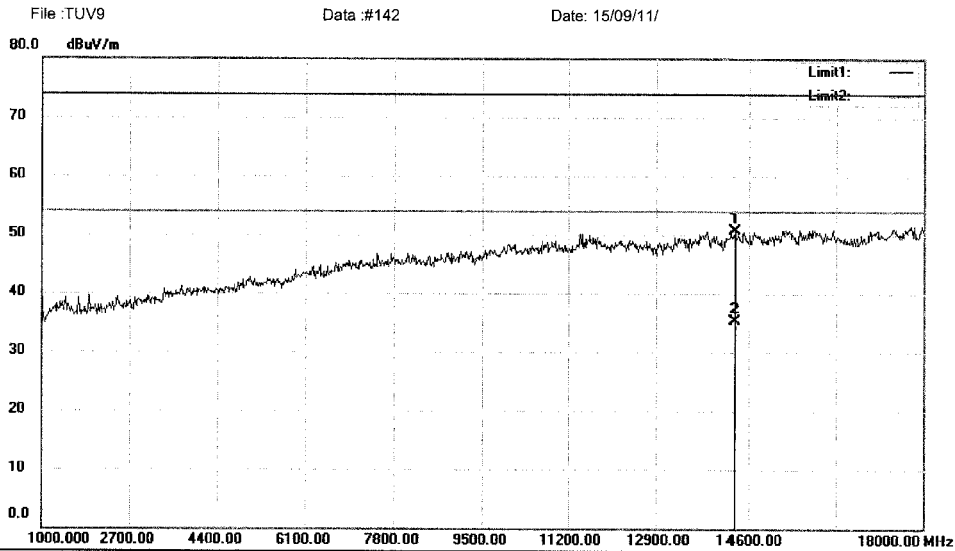
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#140

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	56.47	-5.81	50.66	74.00	-23.34	peak		
2	*	14328.00	41.07	-5.81	35.26	54.00	-18.74	AVG		

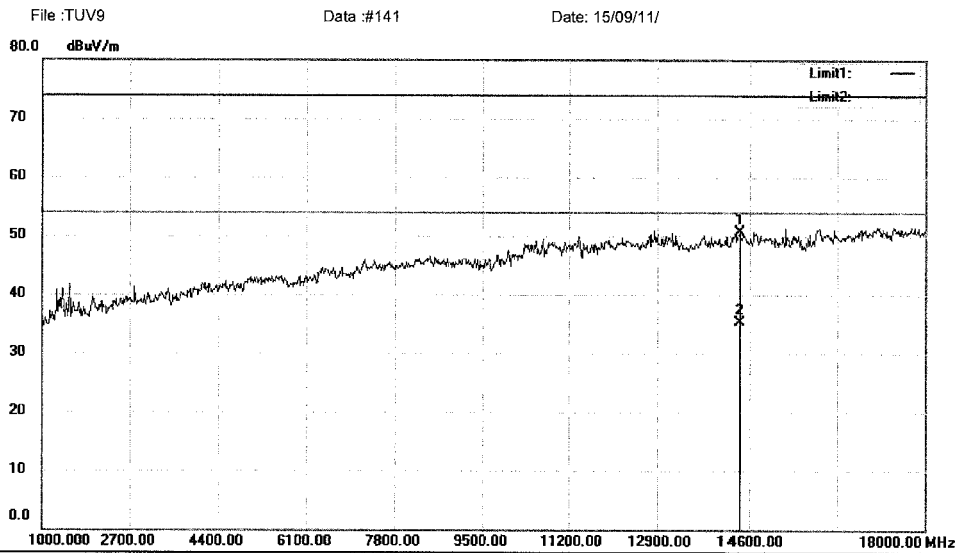
\*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV9\Data: #142

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		14396.00	47.48	3.31	50.79	74.00	-23.21	peak		
2	*	14396.00	31.95	3.31	35.26	54.00	-18.74	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: H

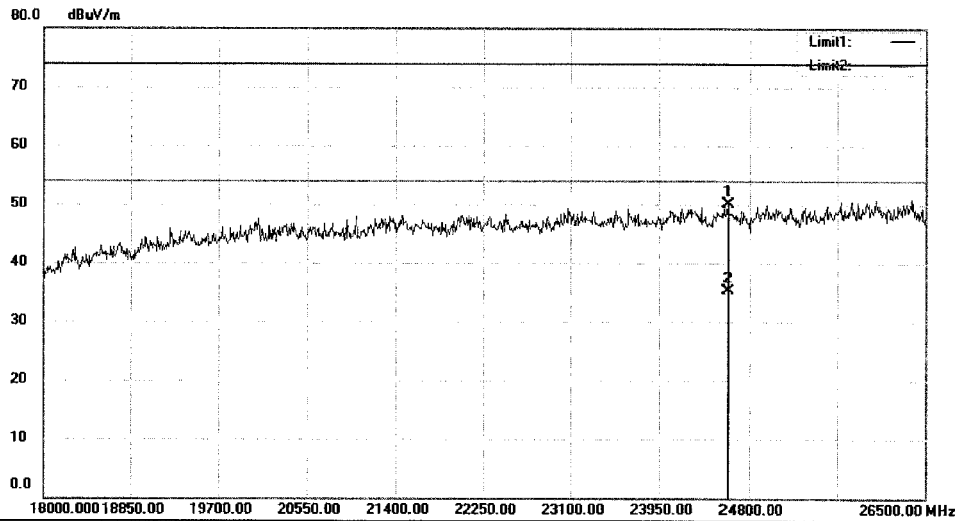
File :TUV9\Data :#141

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9      Data : #211      Date : 15/09/12/



Site 3m Chamber #3      Polarization: **Horizontal**      Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24596.00	87.26	-37.06	50.20	74.00	-23.80	peak		
2	*	24596.00	72.32	-37.06	35.26	54.00	-18.74	AVG		

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

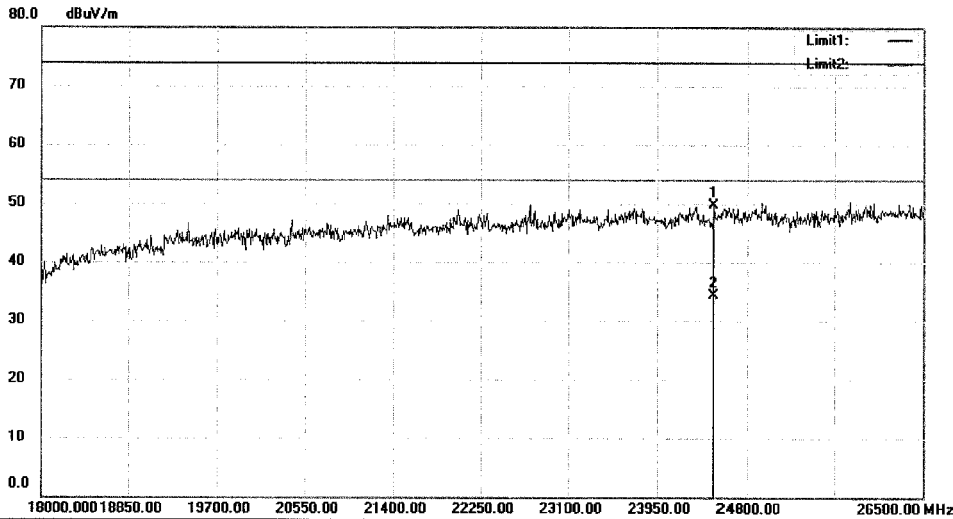
File : TUV9\Data : #211

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9      Data : #212      Date: 15/09/12/



Site 3m Chamber #3      Polarization: **Vertical**      Temperature: 24 C  
 Limit: (RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5180  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		24502.50	86.73	-37.07	49.66	74.00	-24.34	peak			
2	*	24502.50	71.30	-37.07	34.23	54.00	-19.77	AVG			

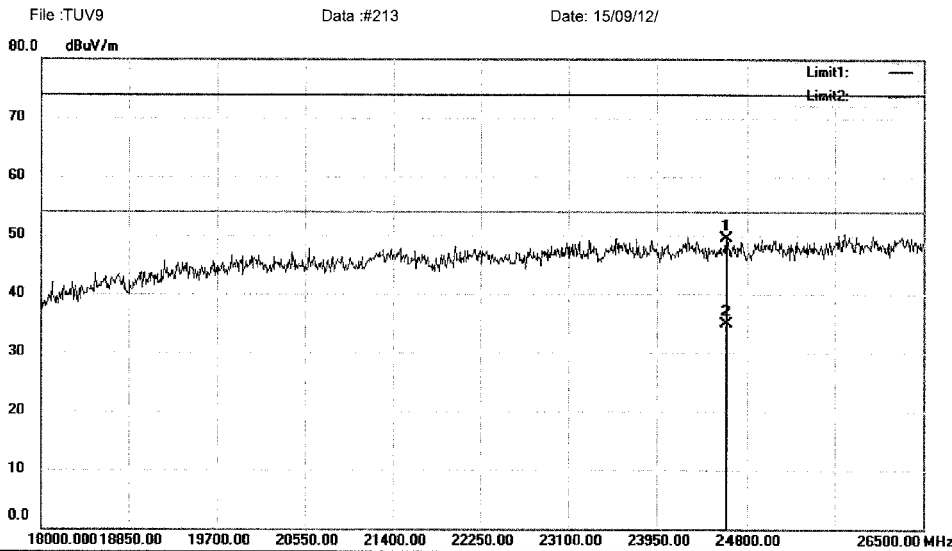
\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV9\Data : #212

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24613.00	86.65	-37.06	49.59	74.00	-24.41	peak		
2	*	24613.00	72.04	-37.06	34.98	54.00	-19.02	AVG		

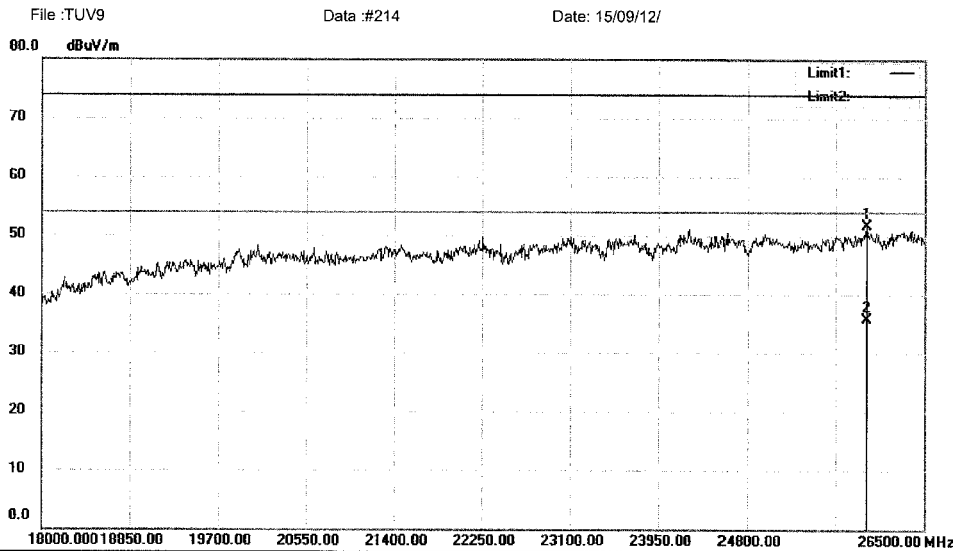
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#213

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25947.50	87.49	-35.85	51.64	74.00	-22.36	peak		
2	*	25947.50	71.50	-35.85	35.65	54.00	-18.35	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

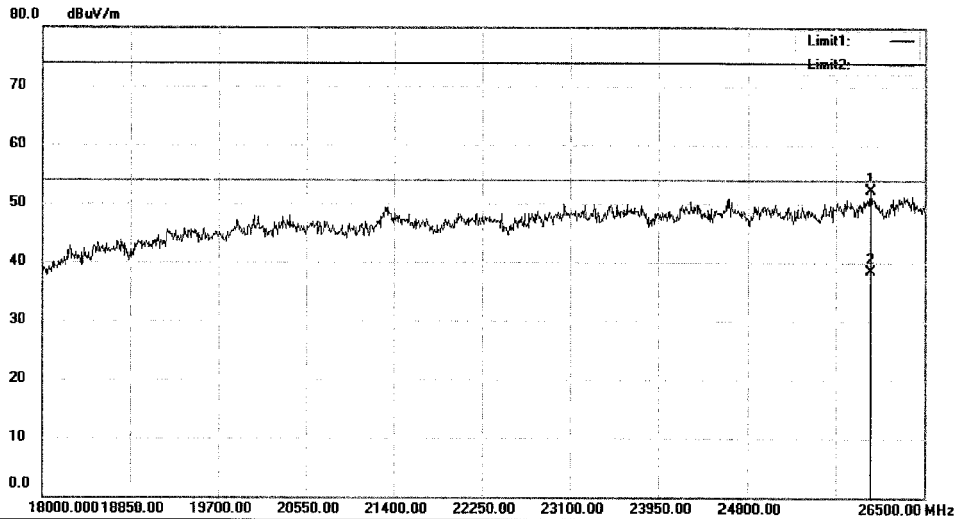
File :TUV9\Data :#214

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #215 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25981.50	88.11	-35.81	52.30	74.00	-21.70	peak		
2	*	25981.50	74.22	-35.81	38.41	54.00	-15.59	AVG		

\*:Maximum data x:Over limit !:over margin

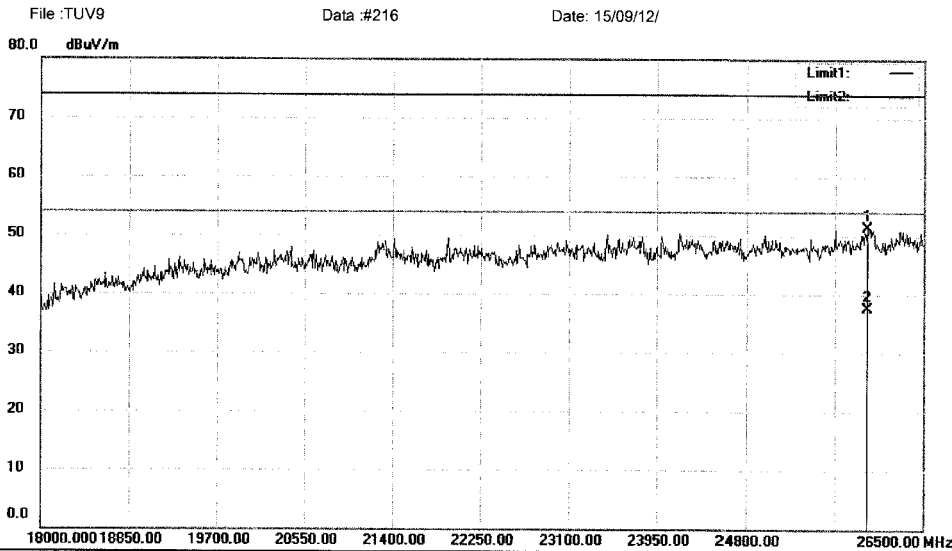
Operator: KK

File :TUV9\Data :#215

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25956.00	87.05	-35.84	51.21	74.00	-22.79	peak		
2	*	25956.00	73.25	-35.84	37.41	54.00	-16.59	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

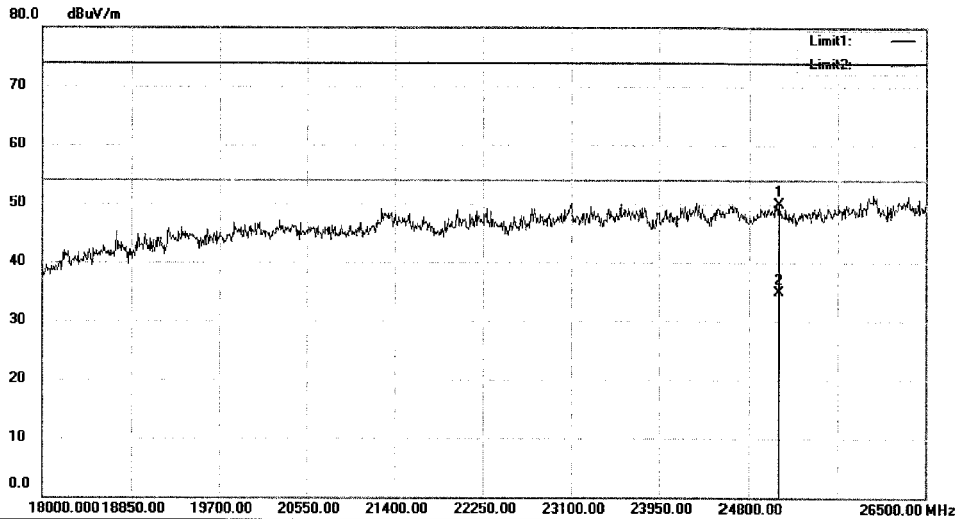
File :TUV9\Data :#216

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#217 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25089.00	86.81	-36.90	49.91	74.00	-24.09	peak		
2	*	25089.00	71.85	-36.90	34.95	54.00	-19.05	AVG		

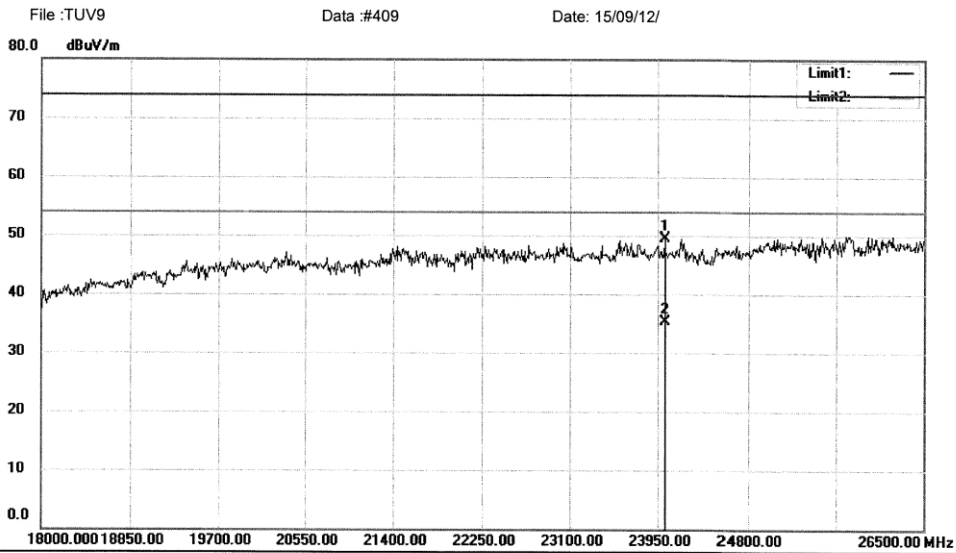
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#217

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3      Polarization: **Vertical**      Temperature: 24 C  
 Limit: (RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N40M 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24018.00	86.65	-37.13	49.52	74.00	-24.48	peak			
2	*	24018.00	72.36	-37.13	35.23	54.00	-18.77	AVG			

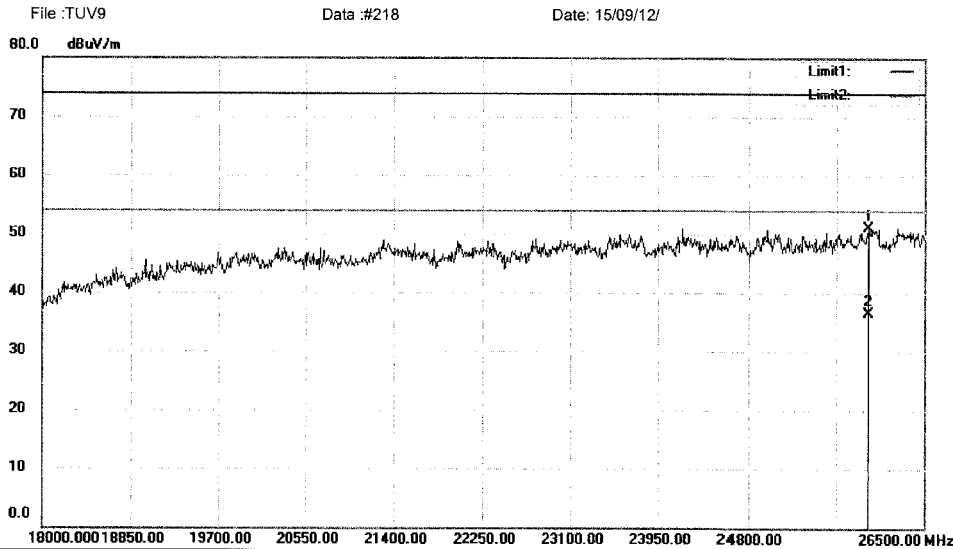
\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV9\Data : #409

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25964.50	86.97	-35.83	51.14	74.00	-22.86	peak		
2	*	25964.50	72.24	-35.83	36.41	54.00	-17.59	AVG		

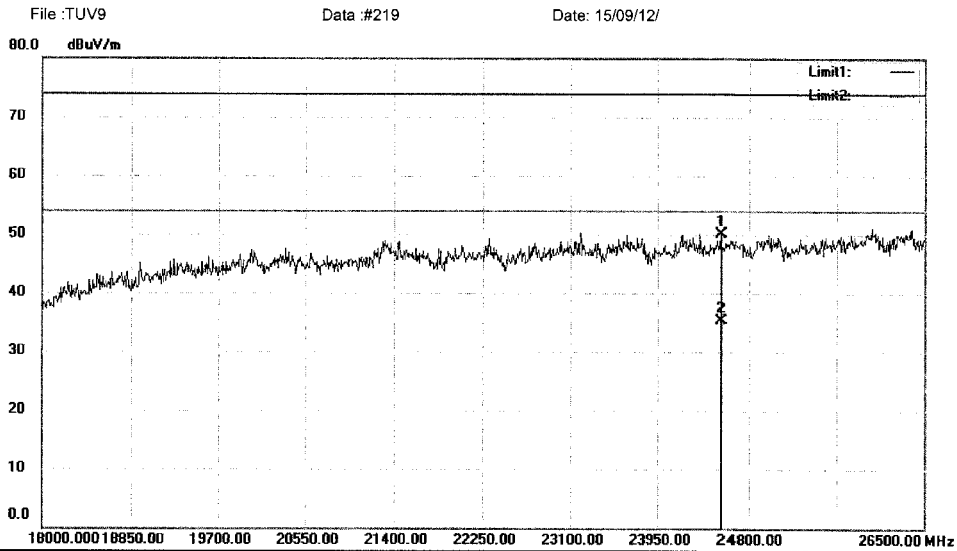
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#218

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3      Polarization: **Horizontal**      Temperature: 24 C  
 Limit: (RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24562.00	87.11	-37.06	50.05	74.00	-23.95	peak		
2	*	24562.00	72.35	-37.06	35.29	54.00	-18.71	AVG		

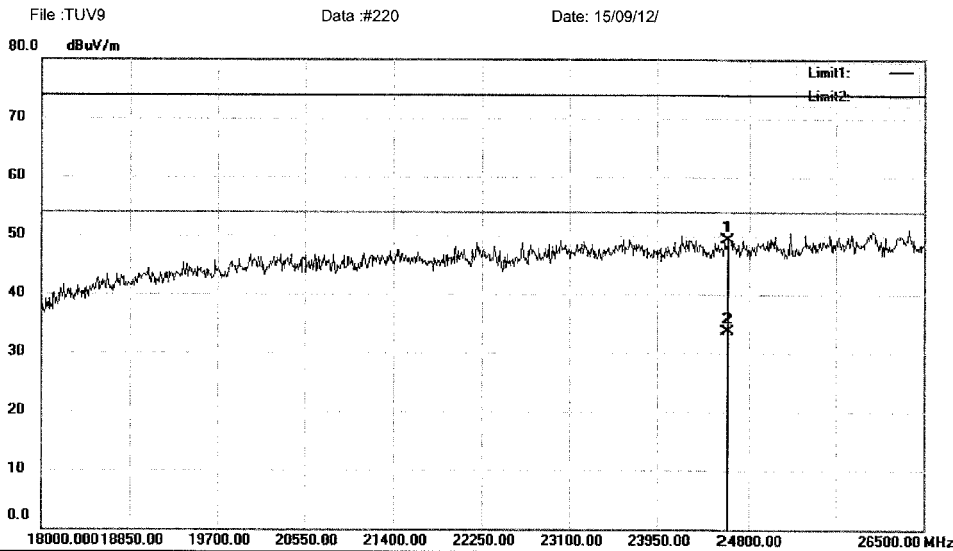
\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV9\Data :#219

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24604.50	86.46	-37.06	49.40	74.00	-24.60	peak			
2	*	24604.50	70.74	-37.06	33.68	54.00	-20.32	AVG			

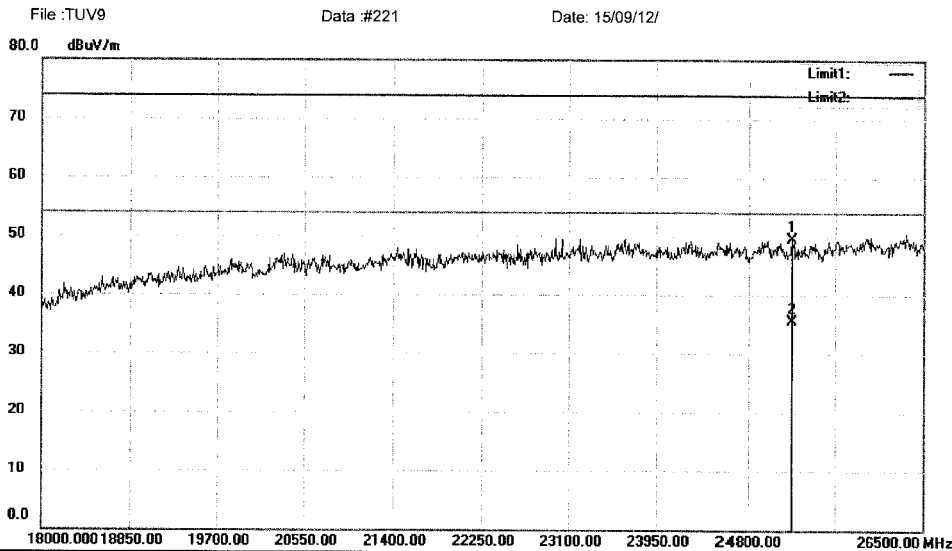
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#220

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site: 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25225.00	86.15	-36.74	49.41	74.00	-24.59	peak		
2	*	25225.00	72.20	-36.74	35.46	54.00	-18.54	AVG		

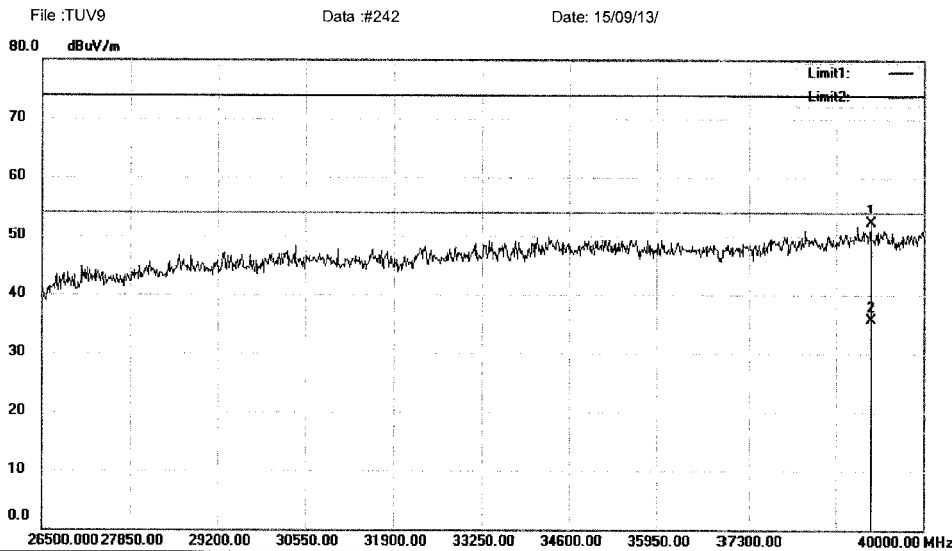
\*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV9\Data: #221

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		39190.00	85.92	-33.53	52.39	74.00	-21.61	peak		
2	*	39190.00	69.21	-33.53	35.68	54.00	-18.32	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#242

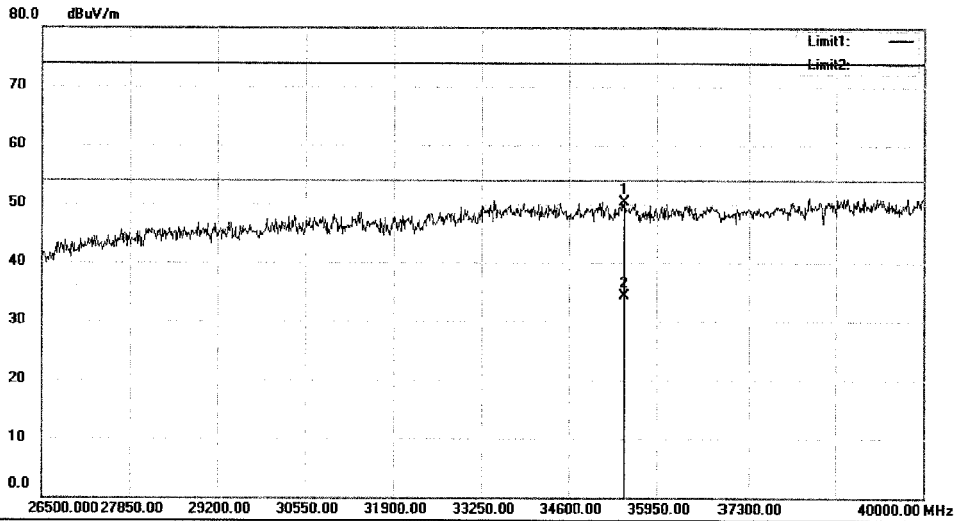
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #243 Date: 15/09/13/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		35450.50	88.40	-38.04	50.36	74.00	-23.64	peak		
2	*	35450.50	72.27	-38.04	34.23	54.00	-19.77	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

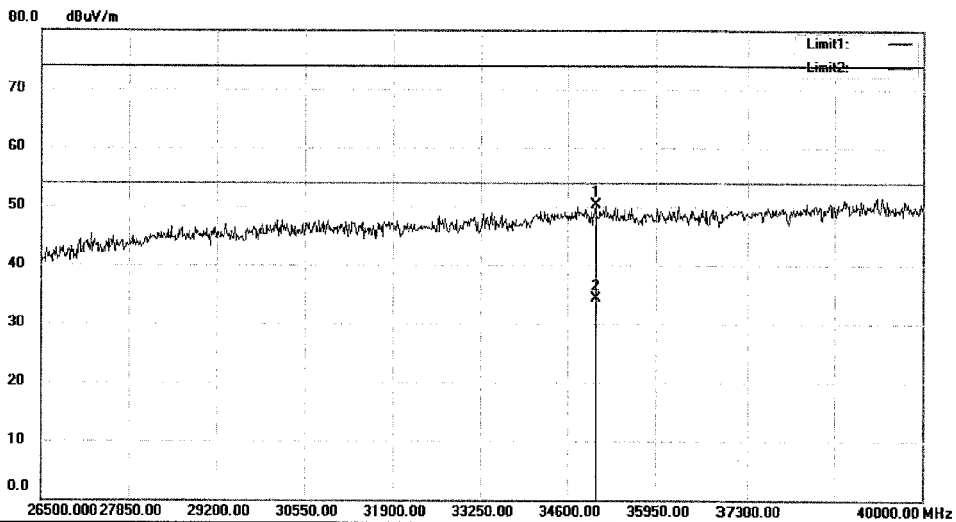
File :TUV9\Data :#243

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#244 Date: 15/09/13/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		35032.00	88.21	-37.89	50.32	74.00	-23.68	peak		
2	*	35032.00	72.12	-37.89	34.23	54.00	-19.77	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

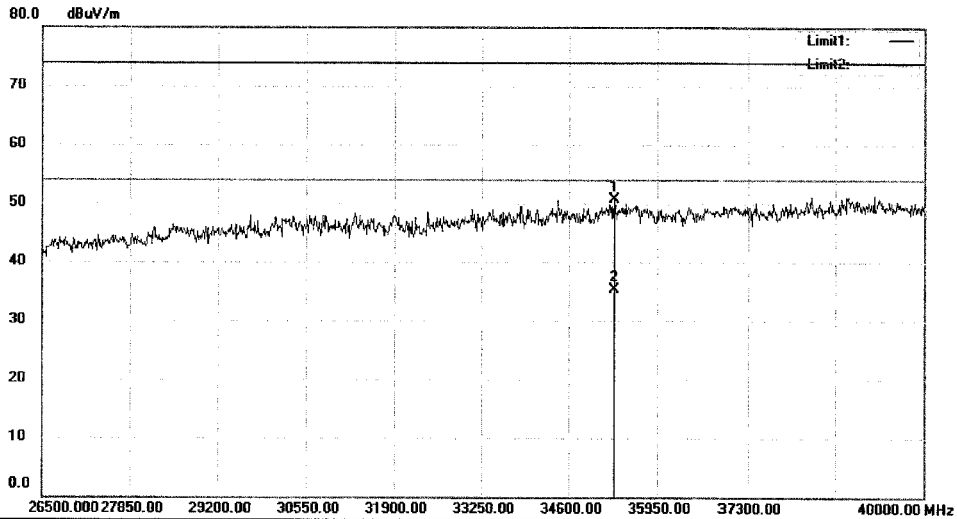
File :TUV9\Data :#244

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#245 Date: 15/09/13/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5220  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		35288.50	88.65	-37.98	50.67	74.00	-23.33	peak		
2	*	35288.50	73.19	-37.98	35.21	54.00	-18.79	AVG		

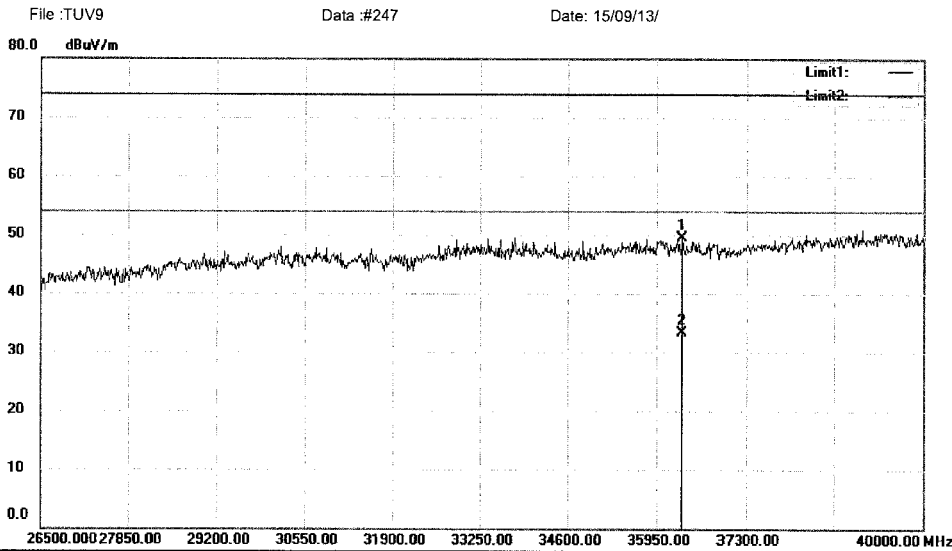
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#245

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 09, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		36341.50	87.35	-37.91	49.44	74.00	-24.56	peak		
2	*	36341.50	71.17	-37.91	33.26	54.00	-20.74	AVG		

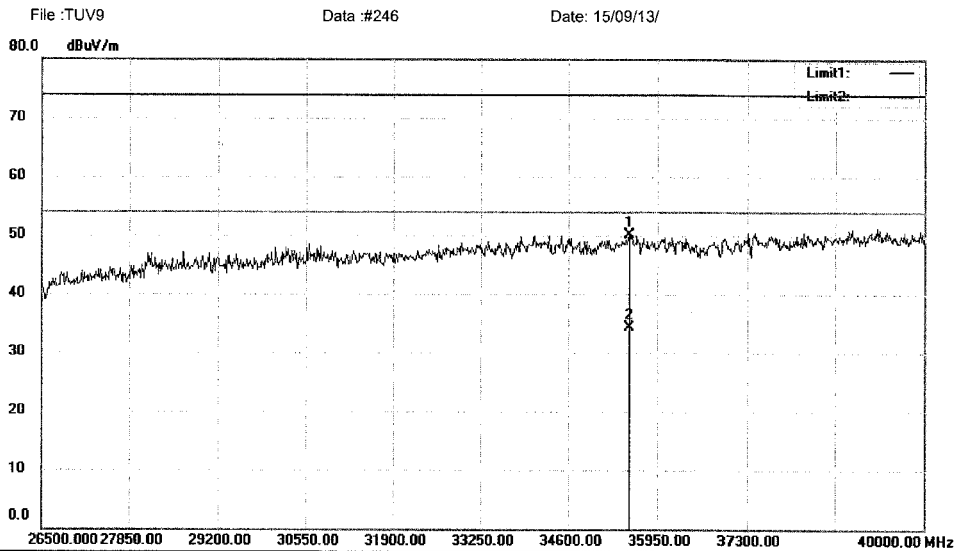
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#247

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		35518.00	88.23	-38.07	50.16	74.00	-23.84	peak		
2	*	35518.00	72.33	-38.07	34.26	54.00	-19.74	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

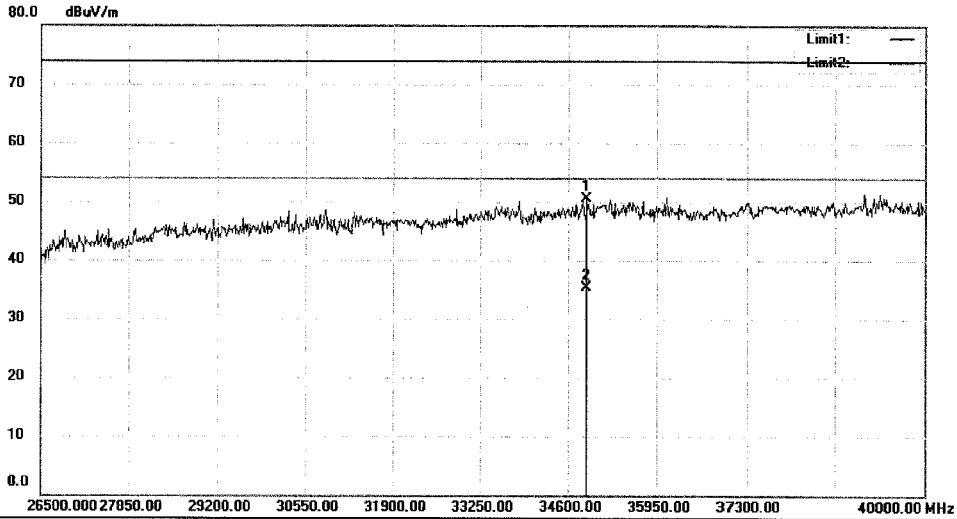
File :TUV9\Data :#246

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#249 Date: 15/09/13/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5745  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		34883.50	88.30	-37.83	50.47	74.00	-23.53	peak			
2	*	34883.50	73.06	-37.83	35.23	54.00	-18.77	AVG			

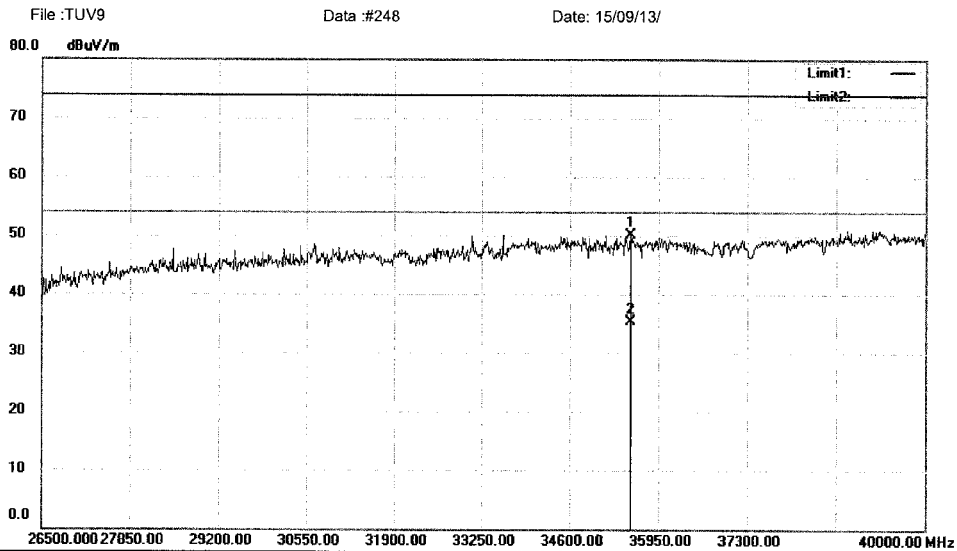
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#249

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		35518.00	88.15	-38.07	50.08	74.00	-23.92	peak		
2	*	35518.00	73.30	-38.07	35.23	54.00	-18.77	AVG		

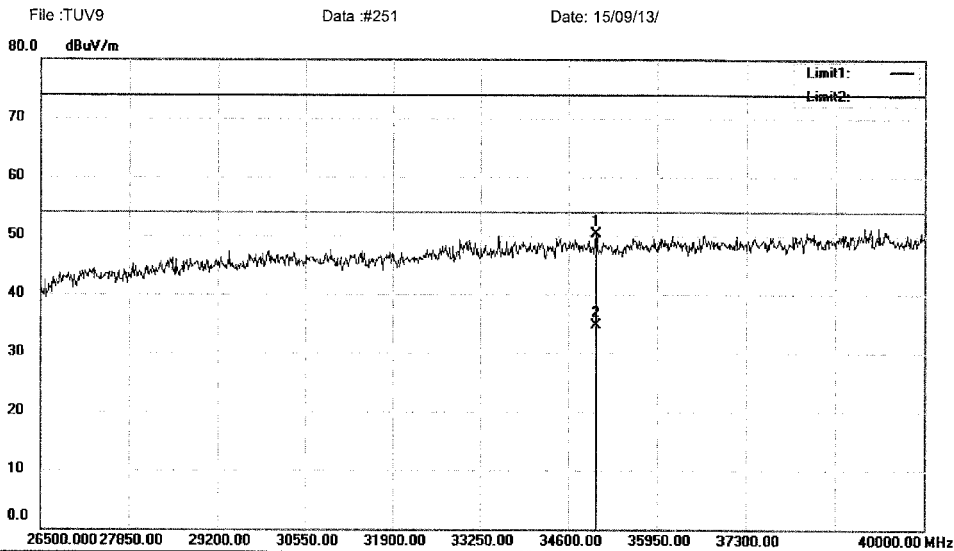
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#248

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		35018.50	88.15	-37.88	50.27	74.00	-23.73	peak		
2	*	35018.50	72.50	-37.88	34.62	54.00	-19.38	AVG		

\*:Maximum data x:Over limit !:over margin

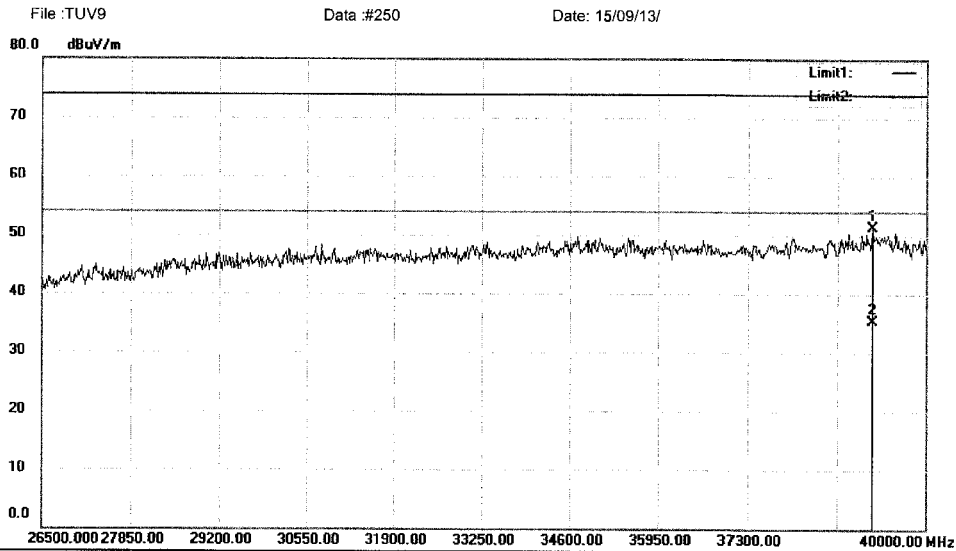
Operator: KK

File :TUV9\Data :#251

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5785  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		39176.50	84.81	-33.56	51.25	74.00	-22.75	peak		
2	*	39176.50	68.82	-33.56	35.26	54.00	-18.74	AVG		

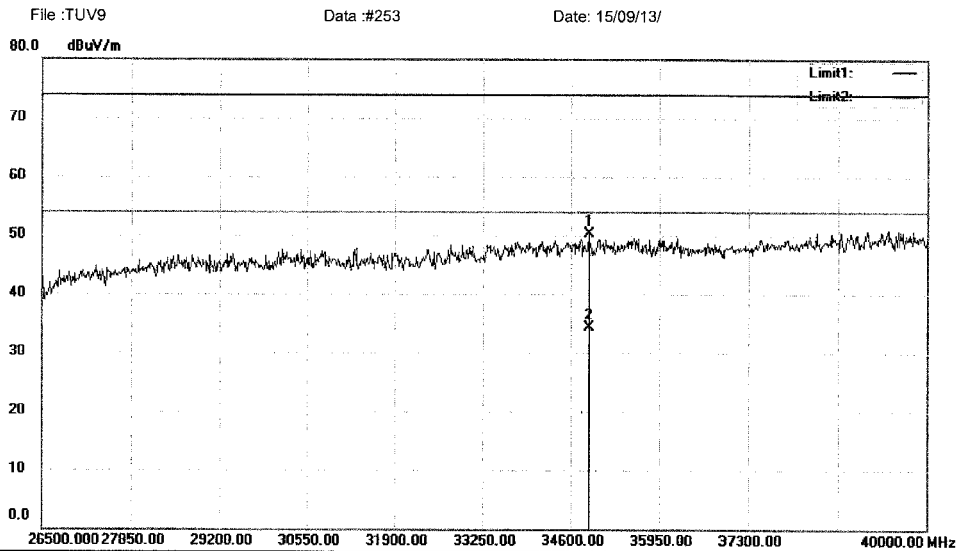
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#250

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		34870.00	88.09	-37.83	50.26	74.00	-23.74	peak		
2	*	34870.00	72.04	-37.83	34.21	54.00	-19.79	AVG		

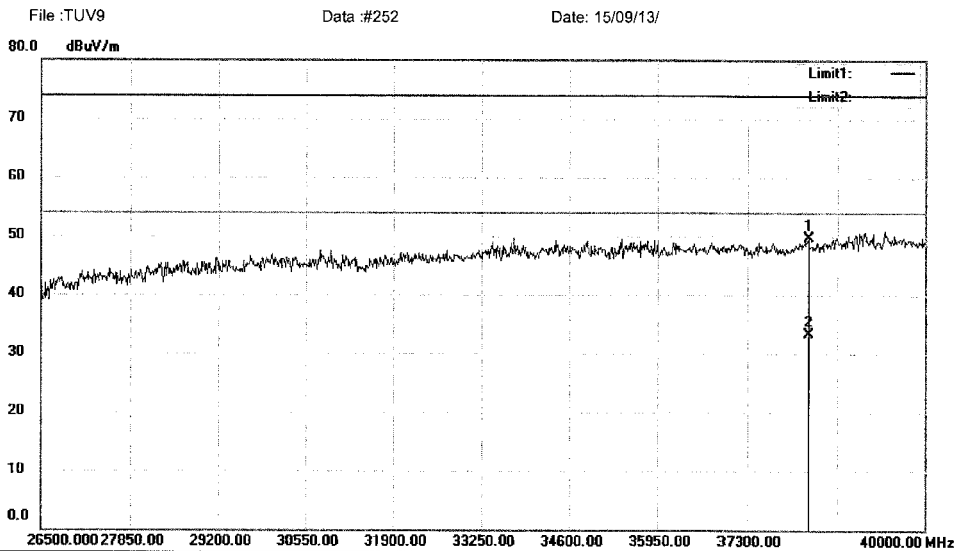
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#253

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		38218.00	85.50	-35.76	49.74	74.00	-24.26	peak		
2	*	38218.00	69.02	-35.76	33.26	54.00	-20.74	AVG		

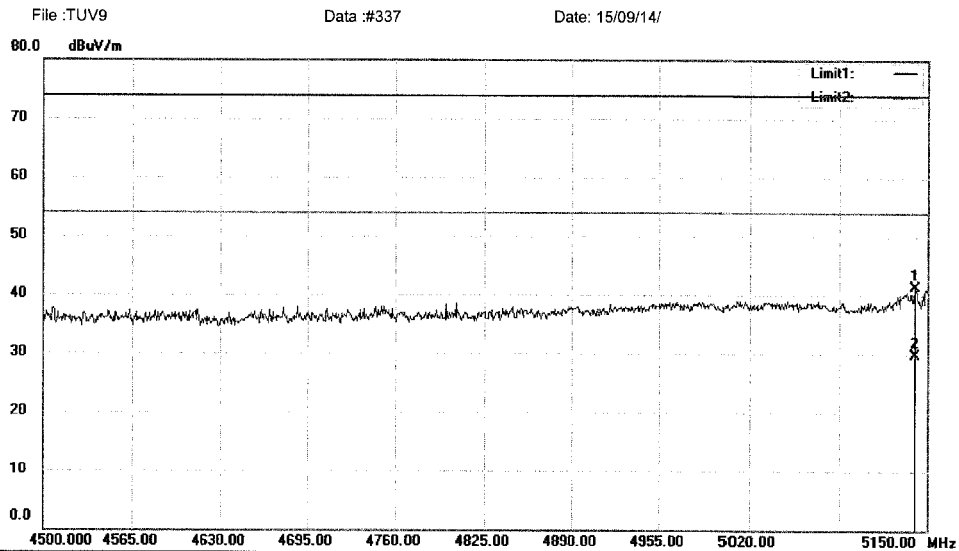
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#252

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5140.900	61.31	-19.92	41.39	74.00	-32.61	peak		
2	*	5140.900	49.56	-19.92	29.64	54.00	-24.36	AVG		

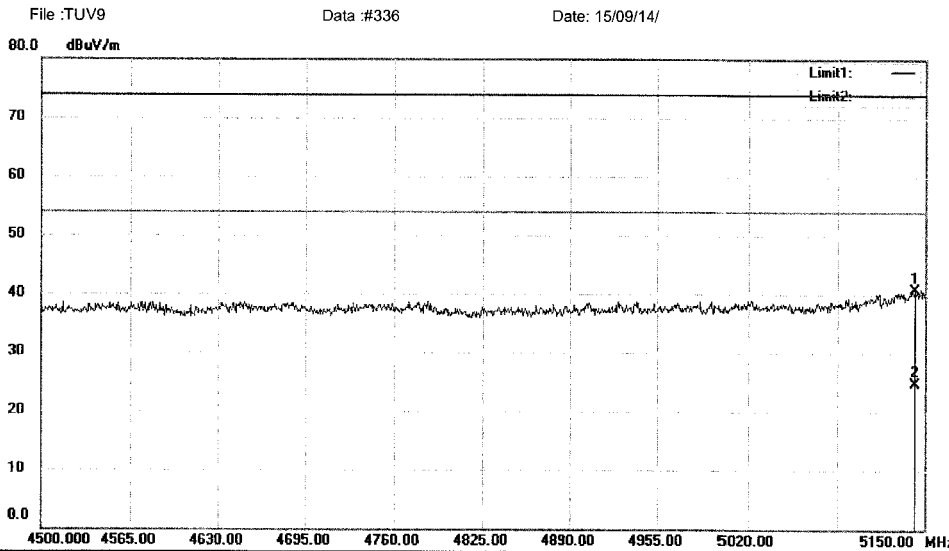
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#337

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5142.850	60.58	-19.92	40.66	74.00	-33.34	peak		
2	*	5142.850	44.66	-19.92	24.74	54.00	-29.26	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

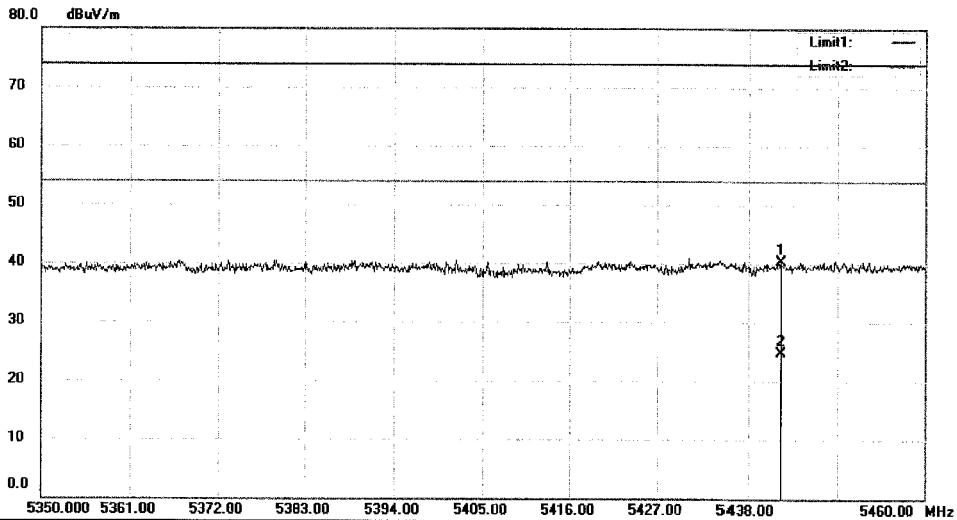
File :TUV9\Data :#336

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

**Radiated Emission Measurement**

File : TUV9 Data : #338 Date : 15/09/14/


 Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5441.960	60.15	-19.75	40.40	74.00	-33.60	peak			
2	*	5441.960	44.40	-19.75	24.65	54.00	-29.35	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

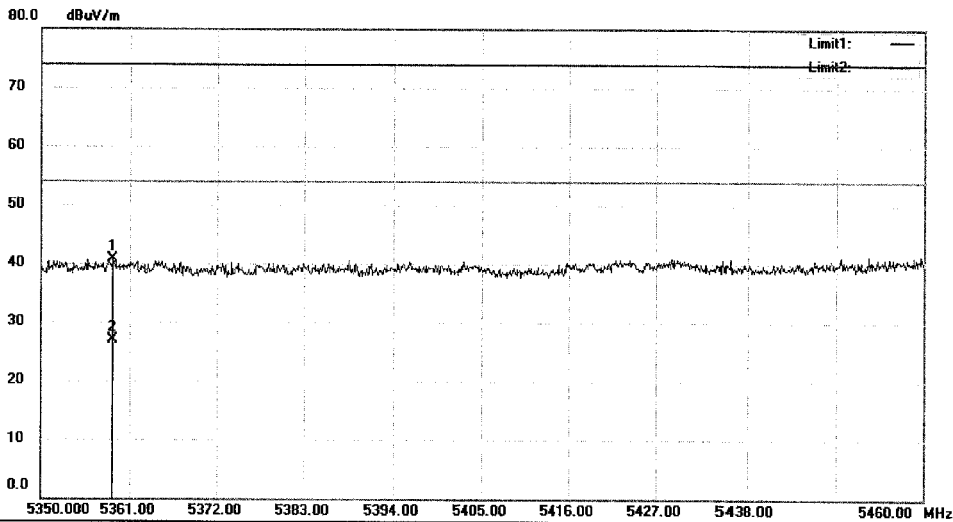
File : TUV9\Data : #338

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File: TUV9 Data: #339 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		5358.910	60.51	-19.79	40.72	74.00	-33.28	peak		
2	*	5358.910	46.75	-19.79	26.96	54.00	-27.04	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

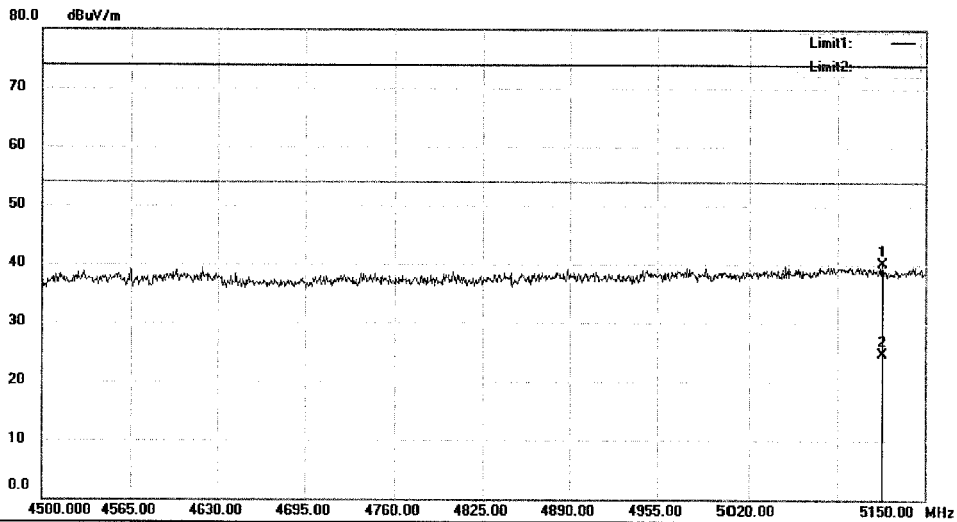
File: TUV9\Data: #339

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#341 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5118.150	60.01	-19.93	40.08	74.00	-33.92	peak			
2	*	5118.150	44.62	-19.93	24.69	54.00	-29.31	AVG			

\*:Maximum data x:Over limit !:over margin

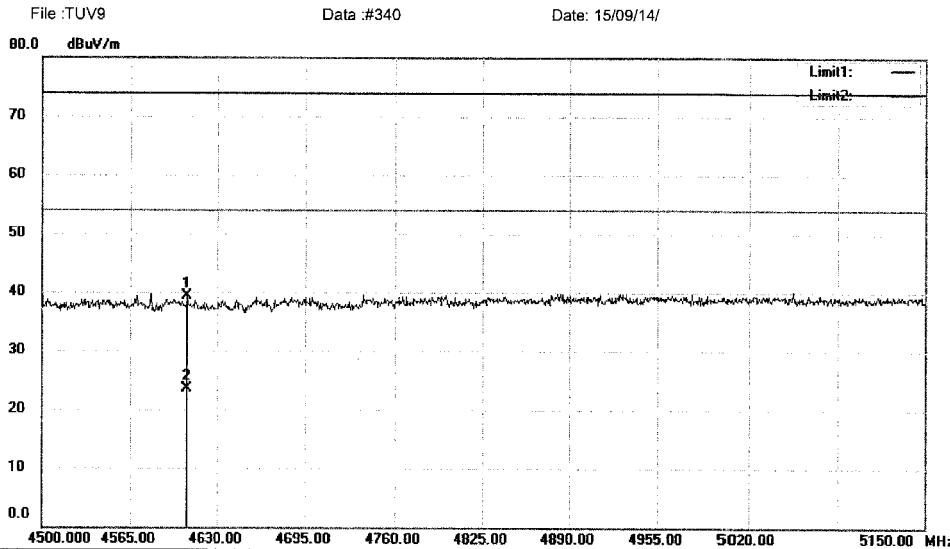
Operator: KK

File :TUV9\Data :#341

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4607.250	60.69	-21.46	39.23	74.00	-34.77	peak		Comment
2	*	4607.250	44.89	-21.46	23.43	54.00	-30.57	AVG		

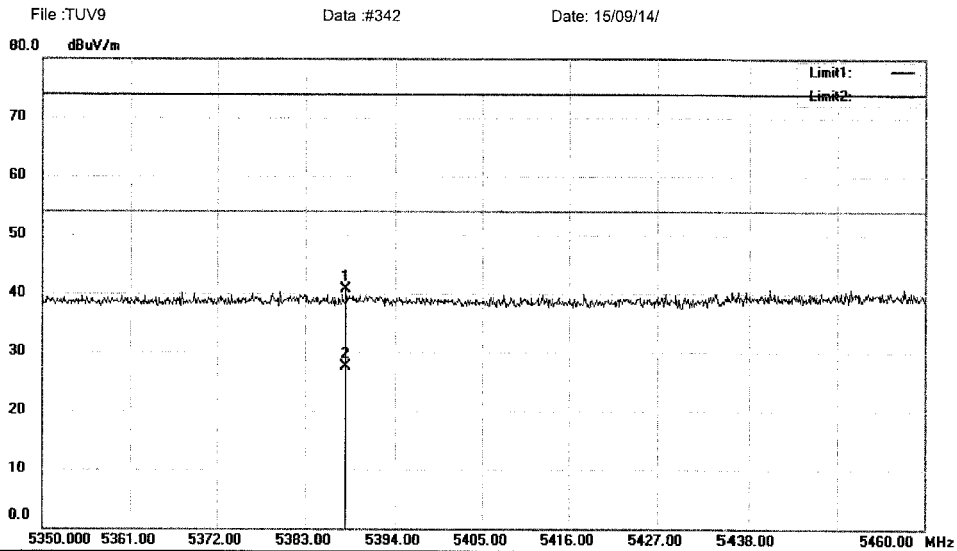
\*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV9\Data: #340

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5387.950	60.55	-19.78	40.77	74.00	-33.23	peak			
2	*	5387.950	47.20	-19.78	27.42	54.00	-26.58	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

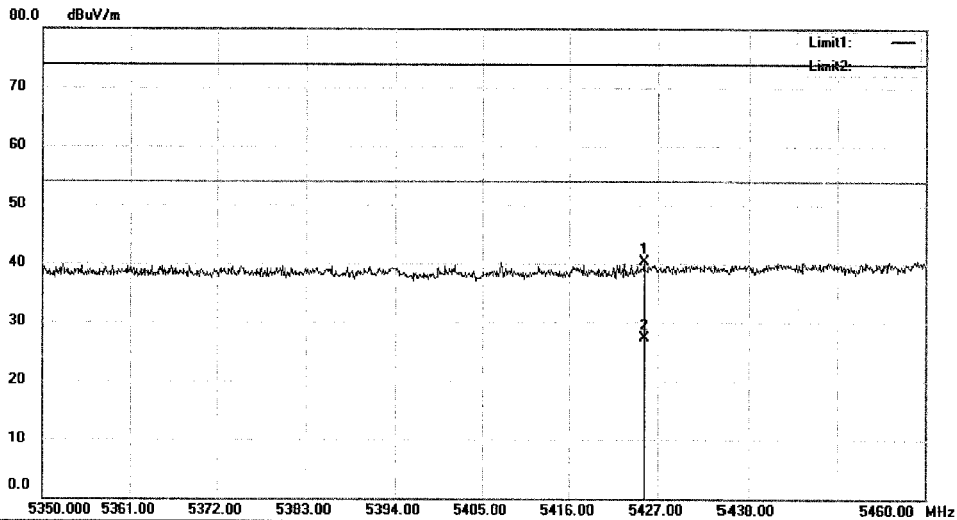
File :TUV9\Data :#342

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#343 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5425.240	60.03	-19.76	40.27	74.00	-33.73	peak			
2	*	5425.240	47.05	-19.76	27.29	54.00	-26.71	AVG			

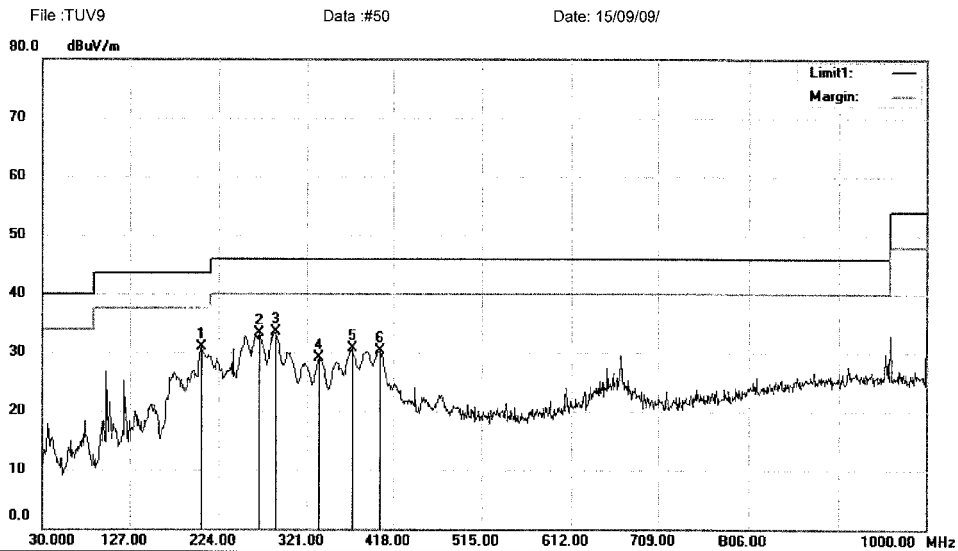
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#343

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		204.6000	47.35	-16.40	30.95	43.50	-12.55	QP		
2		268.6200	46.04	-12.70	33.34	46.00	-12.66	QP		
3	*	286.0800	46.40	-12.95	33.45	46.00	-12.55	QP		
4		334.5800	41.90	-12.75	29.15	46.00	-16.85	QP		
5		371.4400	41.11	-10.32	30.79	46.00	-15.21	QP		
6		402.4800	39.26	-8.93	30.33	46.00	-15.67	QP		

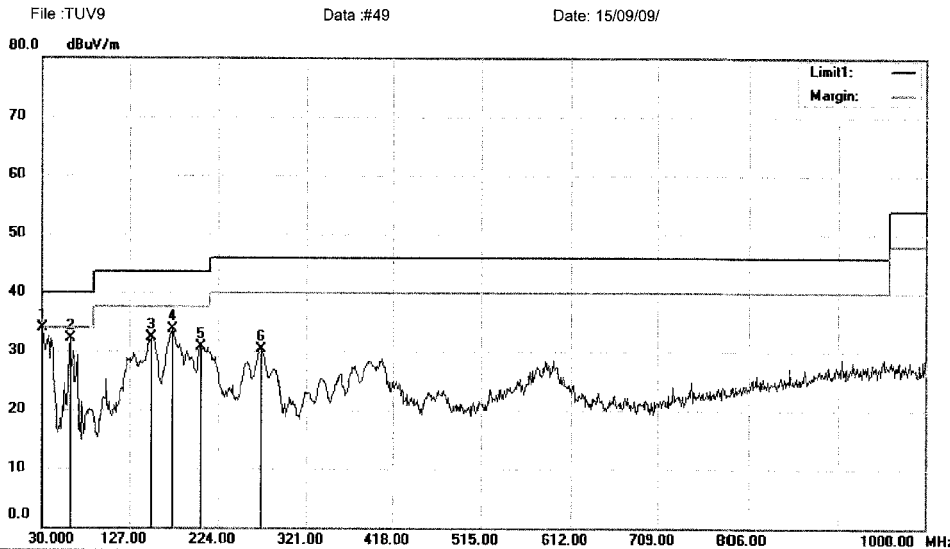
\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement



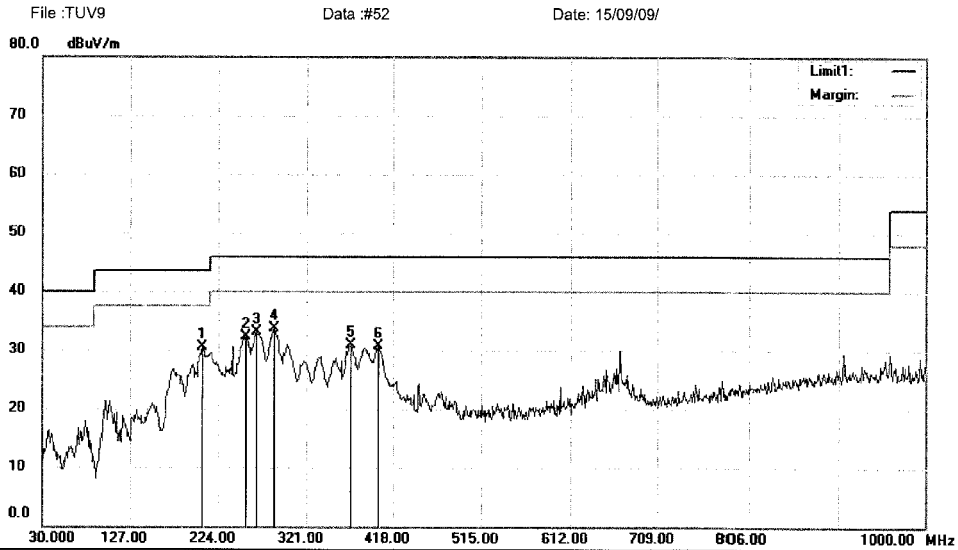
Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
EUT: Tablet PC  
M/N: NS-P11W6100  
Mode:11N40M 5190  
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	30.9700	50.00	-16.13	33.87	40.00	-6.13	QP		
2		61.0400	47.90	-15.82	32.08	40.00	-7.92	QP		
3		150.2800	50.36	-18.12	32.24	43.50	-11.26	QP		
4		174.5300	52.91	-19.22	33.69	43.50	-9.81	QP		
5		204.6000	47.07	-16.40	30.67	43.50	-12.83	QP		
6		271.5300	43.01	-12.67	30.34	46.00	-15.66	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5230  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		206.5400	46.93	-16.38	30.55	43.50	-12.95	QP		
2		254.0700	45.42	-13.11	32.31	46.00	-13.69	QP		
3		265.7100	45.91	-12.73	33.18	46.00	-12.82	QP		
4	*	285.1100	46.52	-12.88	33.64	46.00	-12.36	QP		
5		370.4700	41.24	-10.35	30.89	46.00	-15.11	QP		
6		401.5100	39.60	-8.92	30.68	46.00	-15.32	QP		

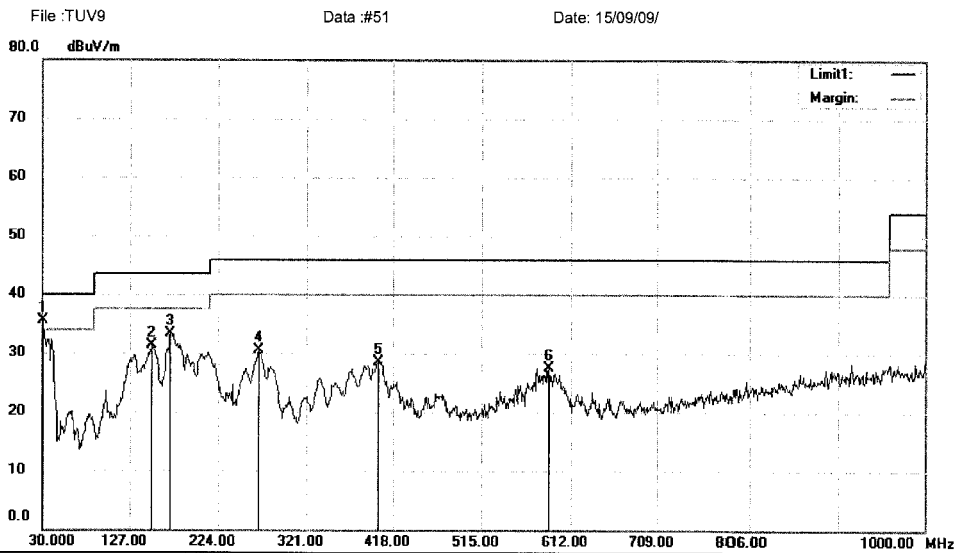
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#52

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5230  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	30.0000	51.95	-16.46	35.49	40.00	-4.51	QP			
2		151.2500	49.45	-18.18	31.27	43.50	-12.23	QP			
3		171.6200	52.73	-19.37	33.36	43.50	-10.14	QP			
4		268.6200	43.12	-12.70	30.42	46.00	-15.58	QP			
5		401.5100	37.47	-8.92	28.55	46.00	-17.45	QP			
6		587.7500	34.69	-7.09	27.60	46.00	-18.40	QP			

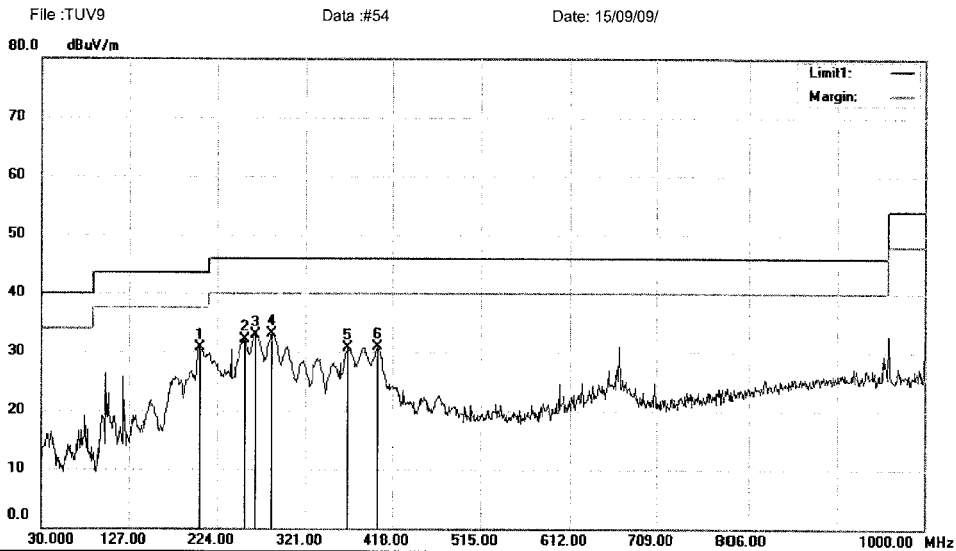
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#51

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5755  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	204.6000	47.09	-16.40	30.69	43.50	-12.81	QP		
2		254.0700	45.31	-13.11	32.20	46.00	-13.80	QP		
3		265.7100	45.69	-12.73	32.96	46.00	-13.04	QP		
4		284.1400	45.92	-12.83	33.09	46.00	-12.91	QP		
5		368.5300	41.14	-10.42	30.72	46.00	-15.28	QP		
6		401.5100	39.80	-8.92	30.88	46.00	-15.12	QP		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#54

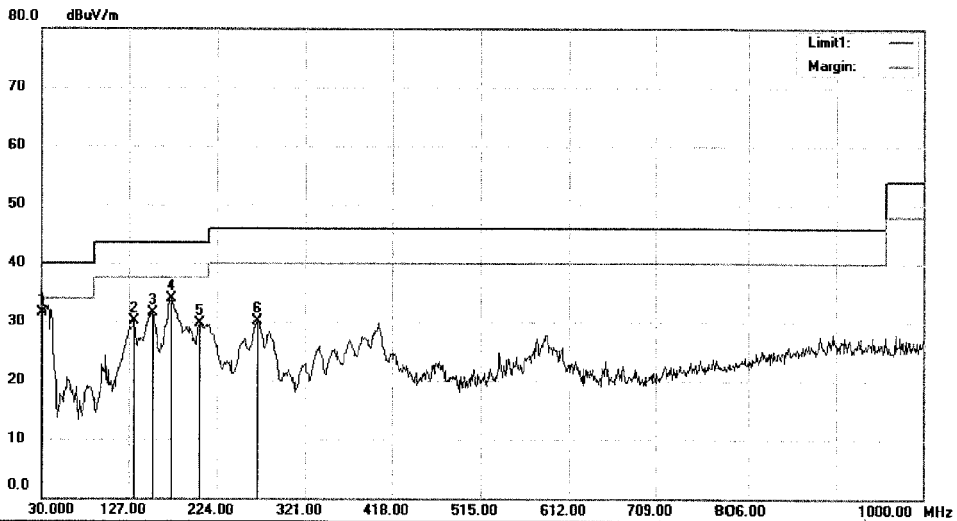
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#53 Date: 15/09/09/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5755  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	30.0000	48.05	-16.46	31.59	40.00	-8.41	QP		
2		132.8200	47.59	-17.40	30.19	43.50	-13.31	QP		
3		153.1900	49.88	-18.29	31.59	43.50	-11.91	QP		
4		174.5300	53.15	-19.22	33.93	43.50	-9.57	QP		
5		205.5700	46.12	-16.39	29.73	43.50	-13.77	QP		
6		268.6200	42.71	-12.70	30.01	46.00	-15.99	QP		

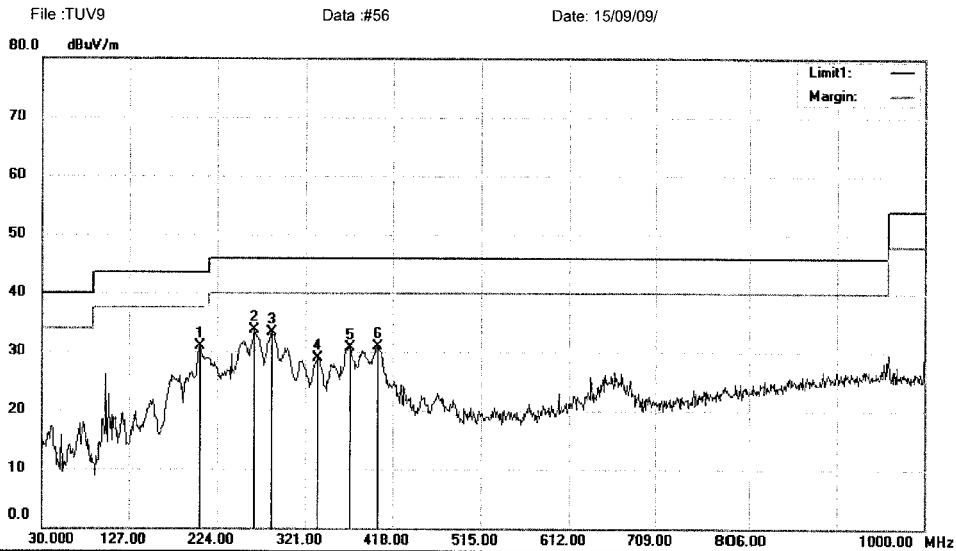
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#53

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5795  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		204.6000	47.32	-16.40	30.92	43.50	-12.58	QP		
2	*	264.7400	46.45	-12.74	33.71	46.00	-12.29	QP		
3		284.1400	46.06	-12.83	33.23	46.00	-12.77	QP		
4		334.5800	41.60	-12.75	28.85	46.00	-17.15	QP		
5		370.4700	41.14	-10.35	30.79	46.00	-15.21	QP		
6		401.5100	39.87	-8.92	30.95	46.00	-15.05	QP		

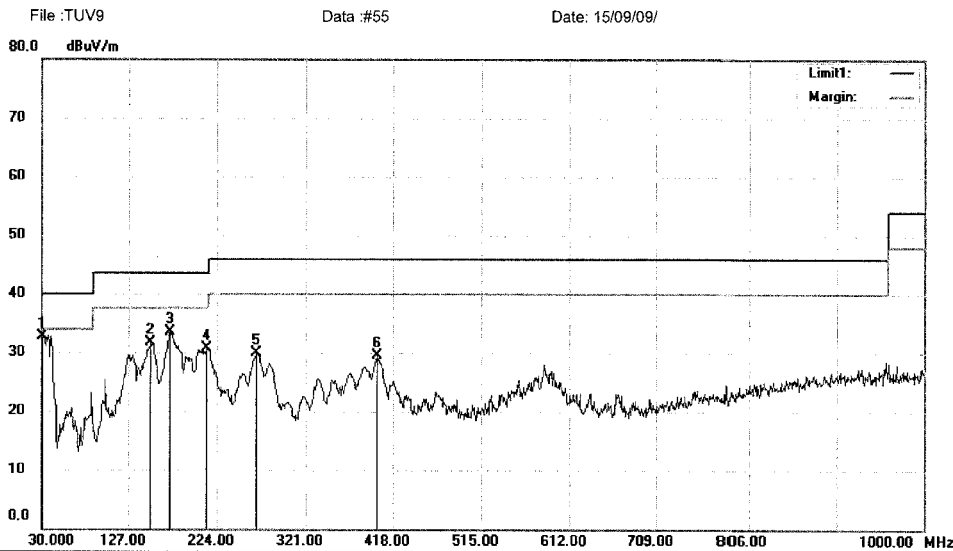
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#56

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5795  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	30.9700	48.81	-16.13	32.68	40.00	-7.32	QP			
2		151.2500	49.79	-18.18	31.61	43.50	-11.89	QP			
3		172.5900	52.90	-19.31	33.59	43.50	-9.91	QP			
4		212.3600	47.05	-16.38	30.67	43.50	-12.83	QP			
5		267.6500	42.70	-12.71	29.99	46.00	-16.01	QP			
6		400.5400	38.39	-8.89	29.50	46.00	-16.50	QP			

\*:Maximum data x:Over limit !:over margin

Operator: KK

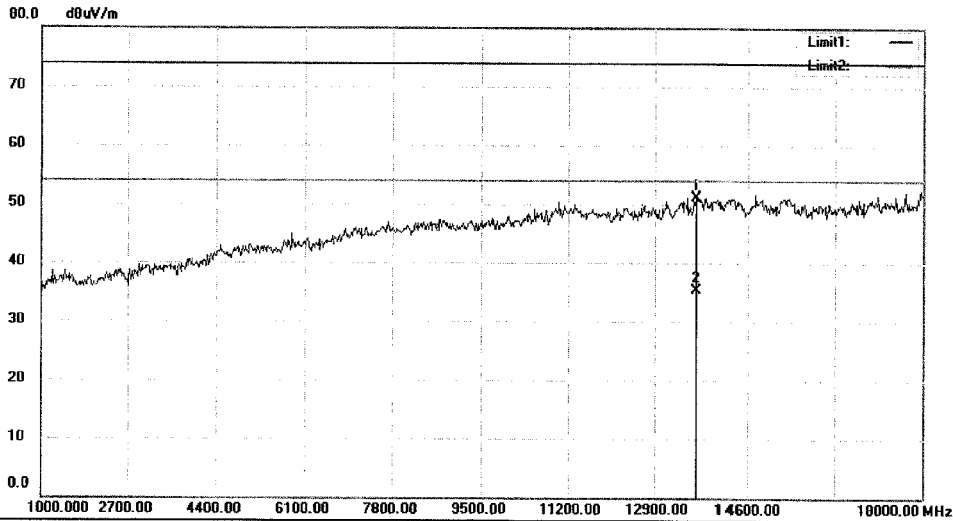
File :TUV9\Data :#55

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#143 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		13699.00	57.88	-6.74	51.14	74.00	-22.86	peak		
2	*	13699.00	42.00	-6.74	35.26	54.00	-18.74	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

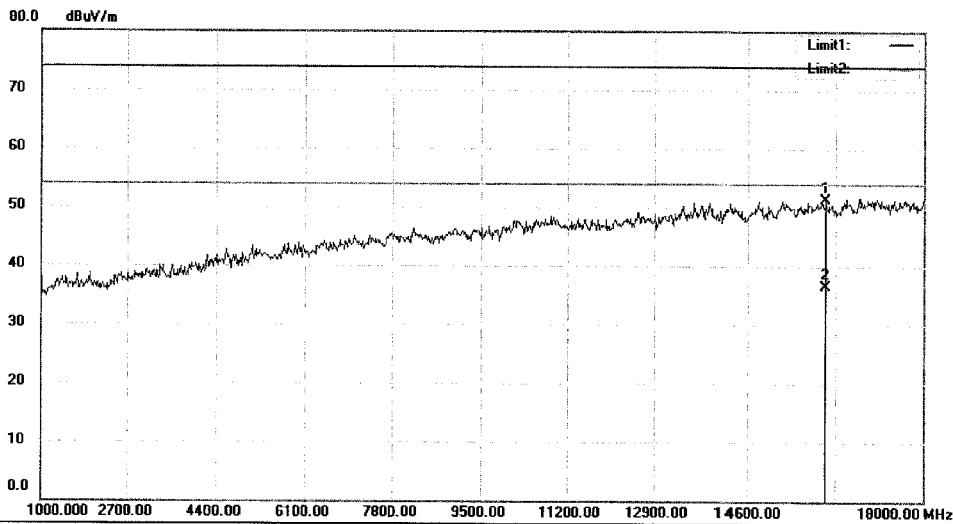
File :TUV9\Data :#143

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #144 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		16113.00	58.80	-7.43	51.37	74.00	-22.63	peak		
2	*	16113.00	43.95	-7.43	36.52	54.00	-17.48	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

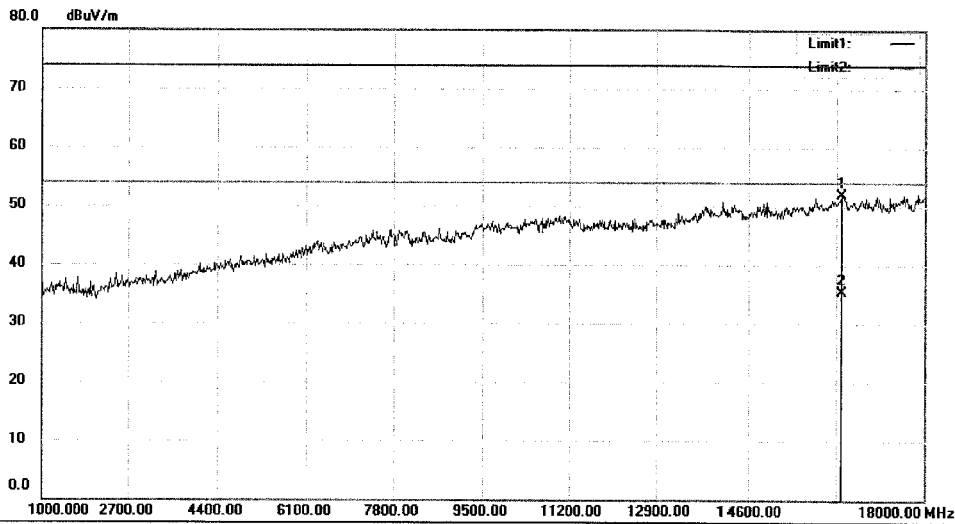
File :TUV9\Data :#144

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #145 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5230  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		16402.00	58.48	-6.62	51.86	74.00	-22.14	peak			
2	*	16402.00	41.98	-6.62	35.36	54.00	-18.64	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

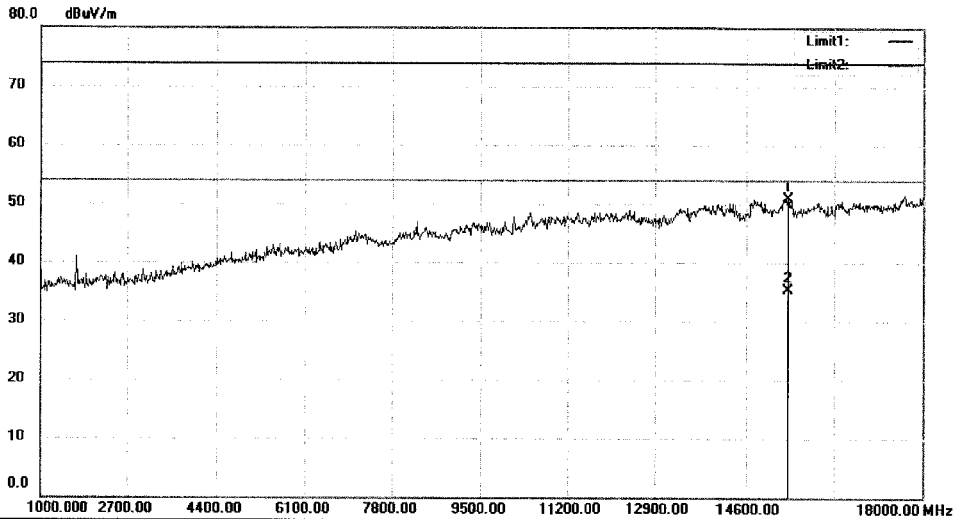
File :TUV9Data :#145

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#146 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5230  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		15399.00	58.08	-7.21	50.87	74.00	-23.13	peak		
2	*	15399.00	42.47	-7.21	35.26	54.00	-18.74	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

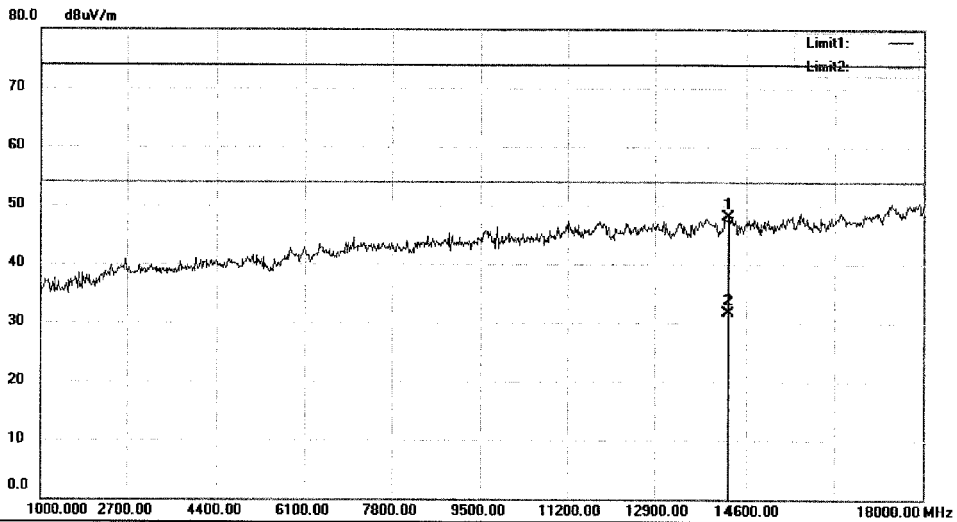
File :TUV9\Data :#146

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#148 Date: 15/09/11/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5755  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		14277.00	44.59	3.48	48.07	74.00	-25.93	peak		
2	*	14277.00	28.14	3.48	31.62	54.00	-22.38	AVG		

\*:Maximum data x:Over limit !:over margin

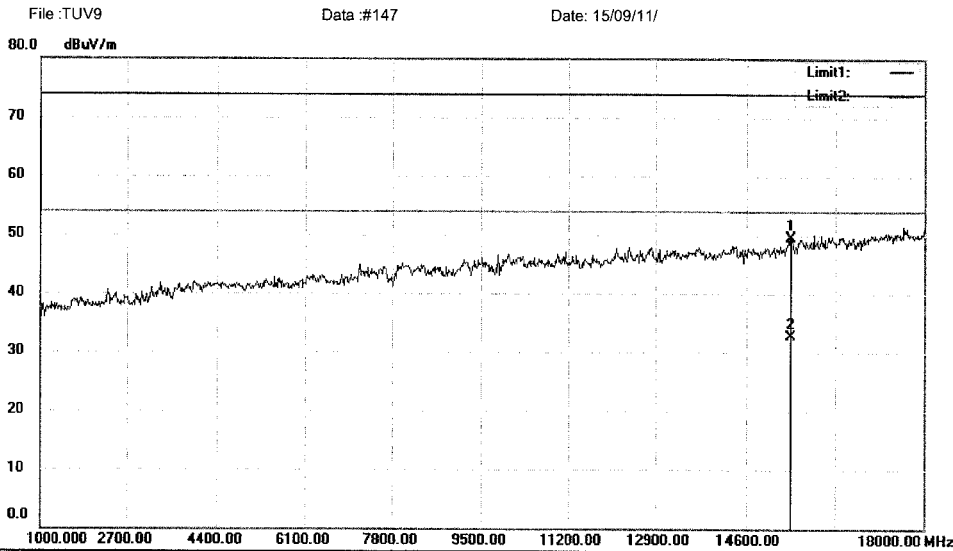
Operator:

File :TUV9\Data :#148

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N40M 5755  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		15450.00	48.81	0.75	49.56	74.00	-24.44	peak		
2	*	15450.00	31.89	0.75	32.64	54.00	-21.36	AVG		

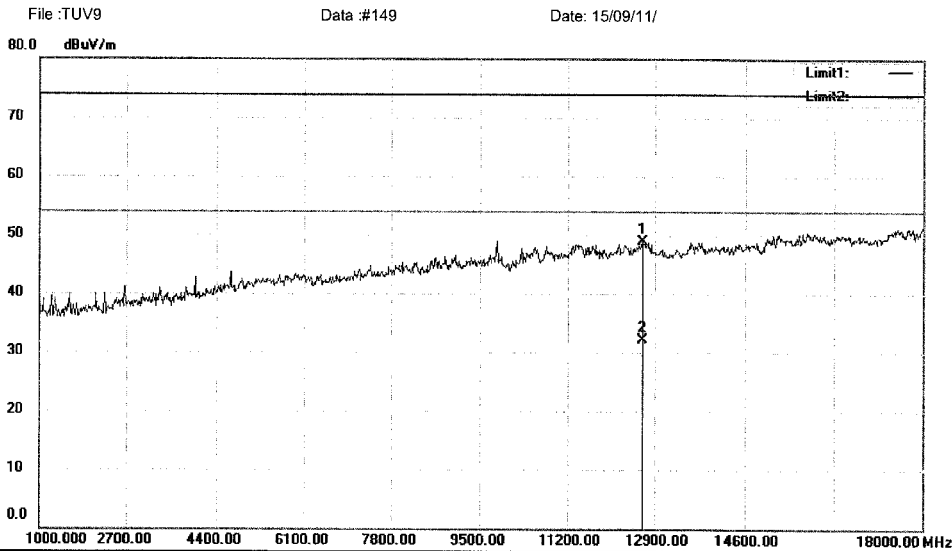
\*:Maximum data x:Over limit !:over margin

Operator:

File :TUV9\Data :#147

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N40M 5795  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		12662.00	50.34	-1.45	48.89	74.00	-25.11	peak		
2	*	12662.00	33.61	-1.45	32.16	54.00	-21.84	AVG		

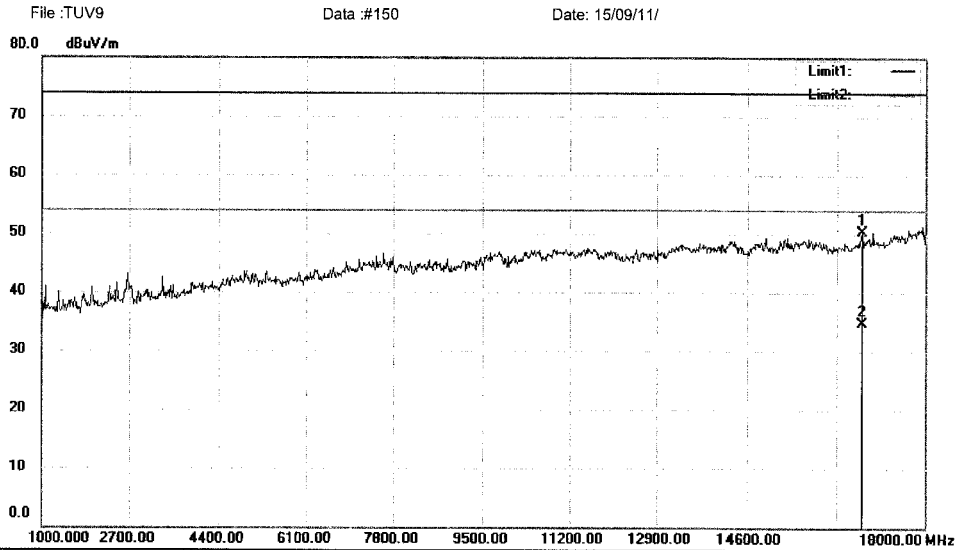
\*:Maximum data x:Over limit !:over margin

Operator:

File :TUV9\Data :#149

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N40M 5795  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		16793.00	48.40	1.99	50.39	74.00	-23.61	peak			
2	*	16793.00	32.63	1.99	34.62	54.00	-19.38	AVG			

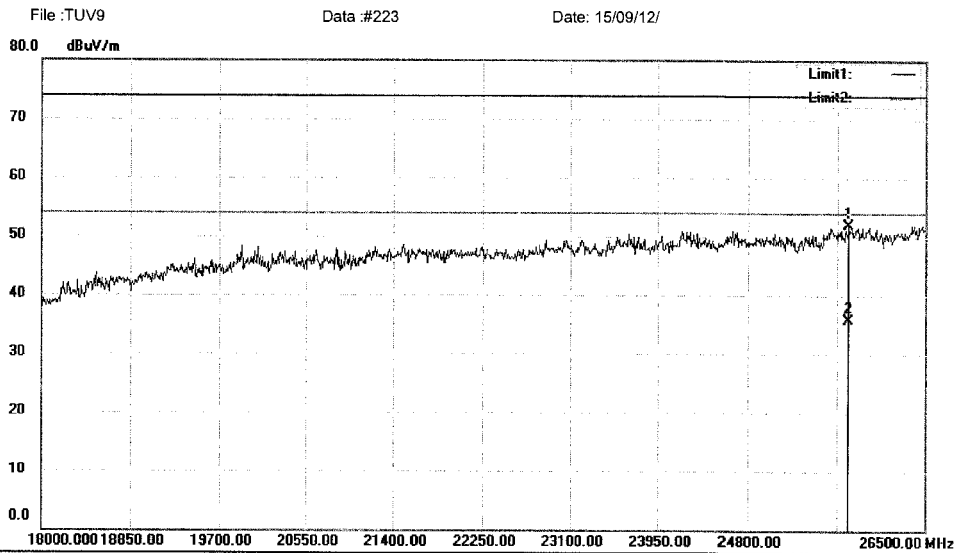
\*:Maximum data x:Over limit !:over margin

Operator:

File :TUV9\Data :#150

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25760.50	88.01	-36.08	51.93	74.00	-22.07	peak		
2	*	25760.50	71.73	-36.08	35.65	54.00	-18.35	AVG		

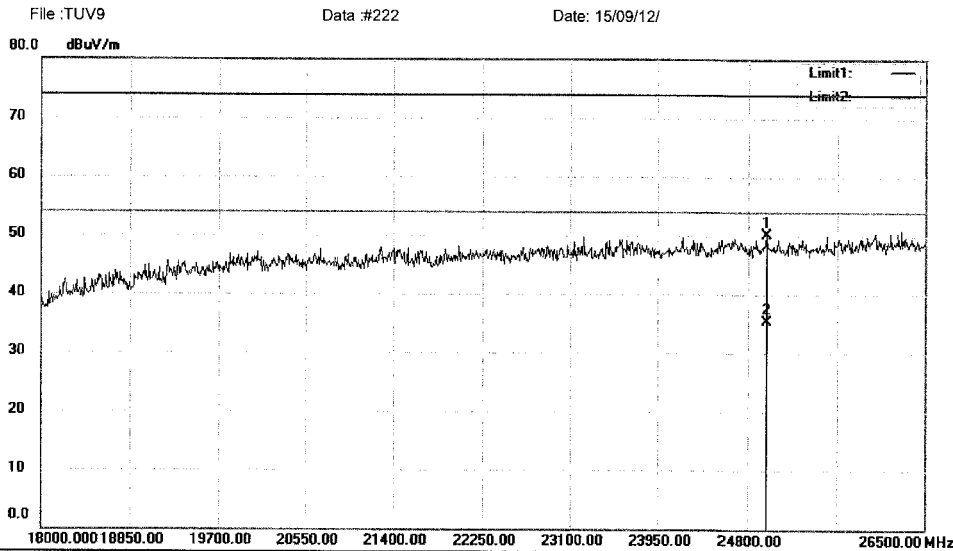
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#223

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		24970.00	87.21	-37.01	50.20	74.00	-23.80	peak		
2	*	24970.00	72.37	-37.01	35.36	54.00	-18.64	AVG		

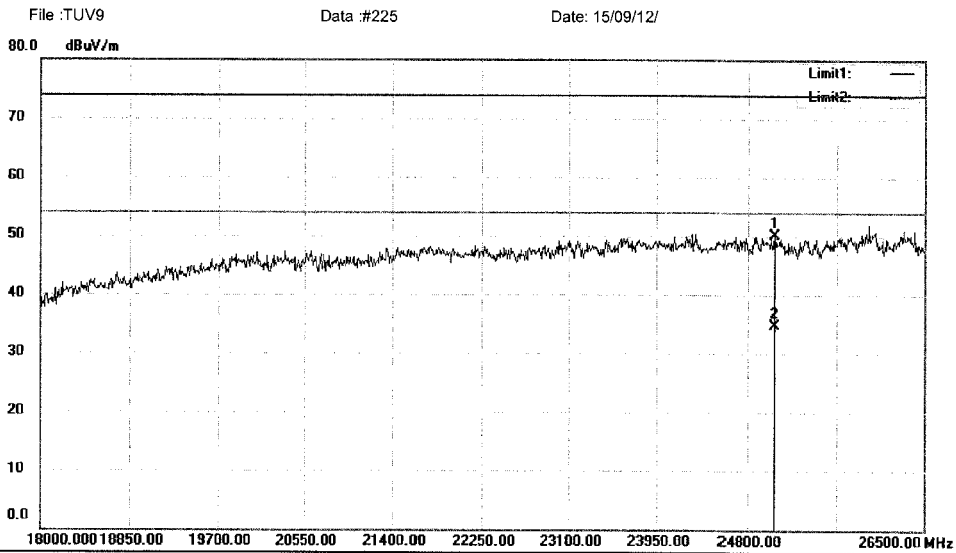
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#222

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5230  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25055.00	87.13	-36.94	50.19	74.00	-23.81	peak		
2	*	25055.00	71.57	-36.94	34.63	54.00	-19.37	AVG		

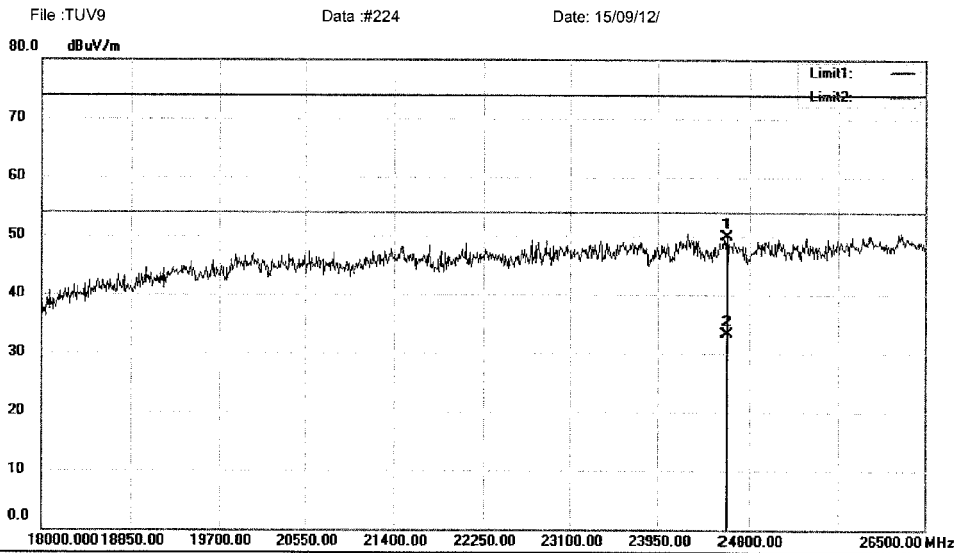
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#225

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5230  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		24587.50	87.03	-37.06	49.97	74.00	-24.03	peak		
2	*	24587.50	70.32	-37.06	33.26	54.00	-20.74	AVG		

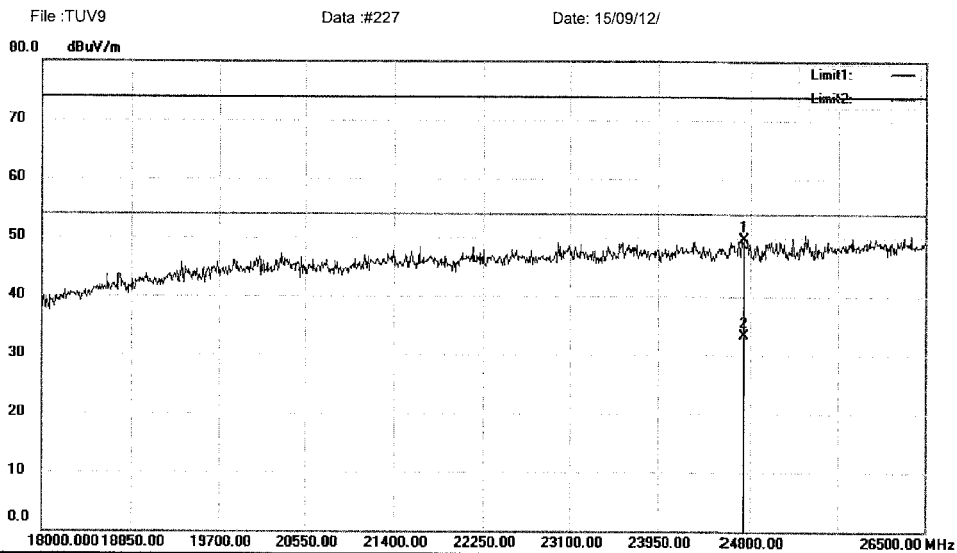
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#224

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3      Polarization: **Horizontal**      Temperature: 24 C  
 Limit: (RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N40M 5755  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		24732.00	86.71	-37.04	49.67	74.00	-24.33	peak			
2	*	24732.00	70.30	-37.04	33.26	54.00	-20.74	AVG			

\*:Maximum data    x:Over limit    !:over margin

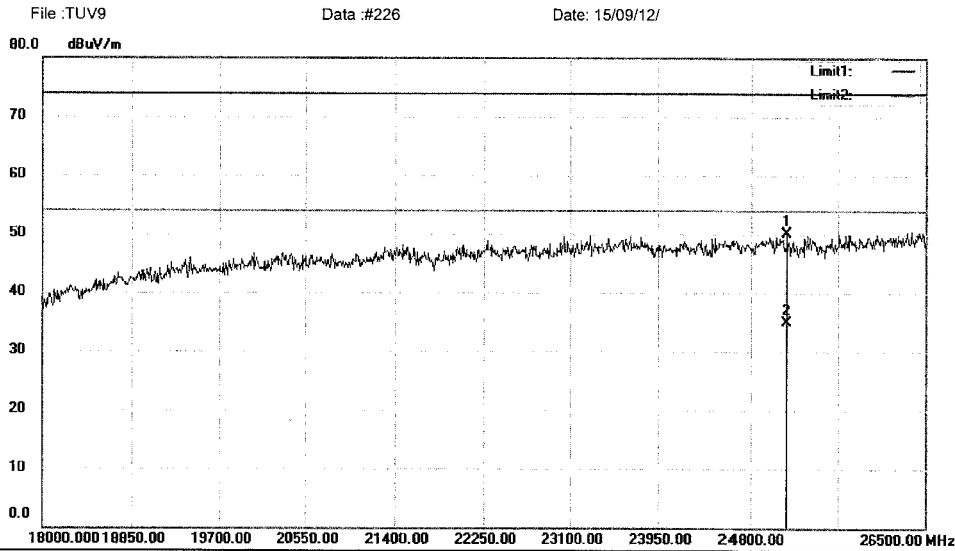
Operator: KK

File :TUV9\Data :#227

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5755  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		25148.50	86.87	-36.83	50.04	74.00	-23.96	peak		
2	*	25148.50	71.69	-36.83	34.86	54.00	-19.14	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

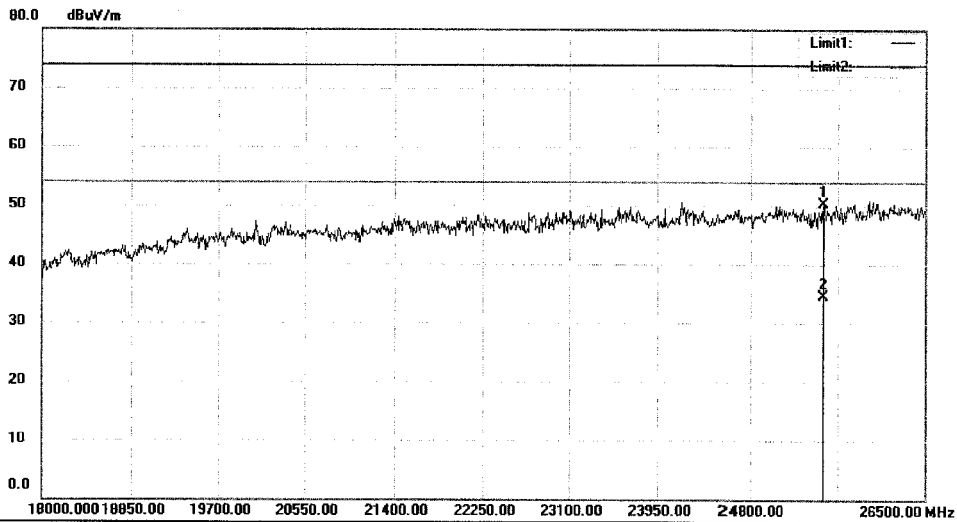
File :TUV9\Data :#226

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#229 Date: 15/09/12/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5795  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		25505.50	86.67	-36.39	50.28	74.00	-23.72	peak		
2	*	25505.50	70.92	-36.39	34.53	54.00	-19.47	AVG		

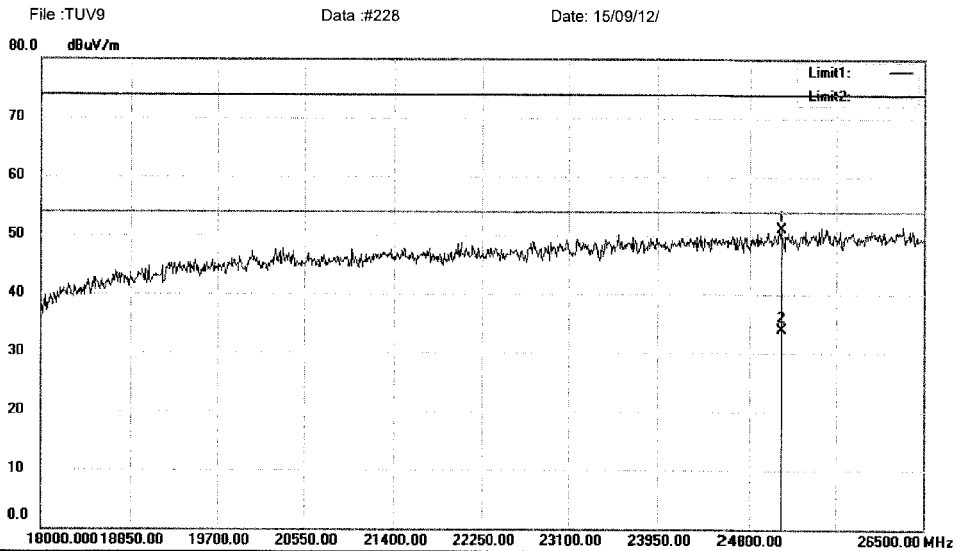
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#229

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5795  
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	25106.00	87.96	-36.88	51.08	74.00	-22.92			peak
2 *	25106.00	70.74	-36.88	33.86	54.00	-20.14			AVG

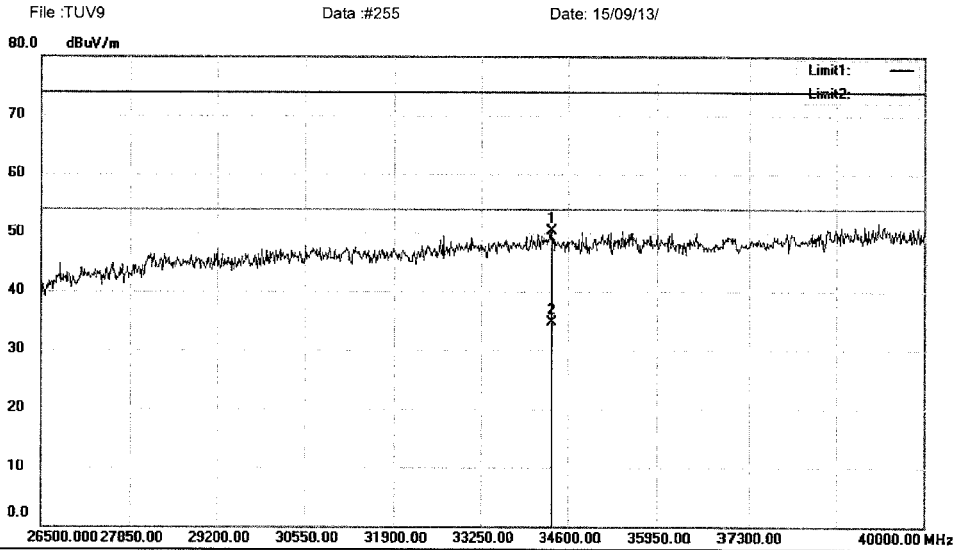
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#228

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		34357.00	87.86	-37.63	50.23	74.00	-23.77	peak		
2	*	34357.00	72.32	-37.63	34.69	54.00	-19.31	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

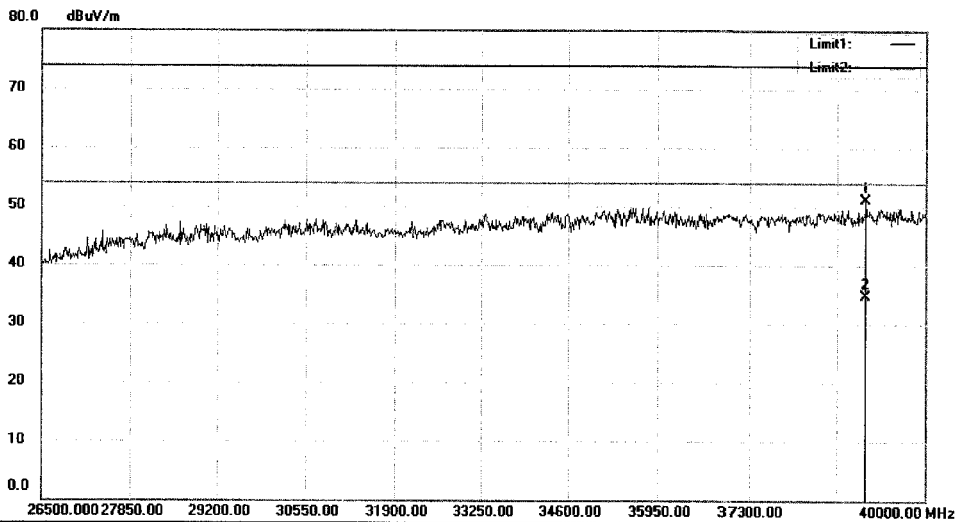
File :TUV9\Data :#255

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#254 Date: 15/09/13/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		39095.50	84.92	-33.75	51.17	74.00	-22.83	peak		
2	*	39095.50	68.44	-33.75	34.69	54.00	-19.31	AVG		

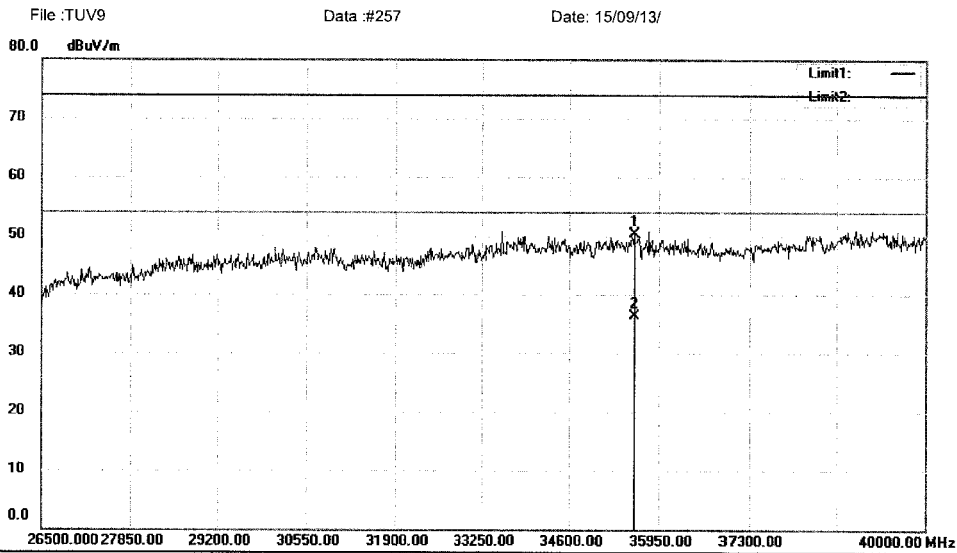
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#254

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5230  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		35572.00	88.49	-38.09	50.40	74.00	-23.60	peak		
2	*	35572.00	74.30	-38.09	36.21	54.00	-17.79	AVG		

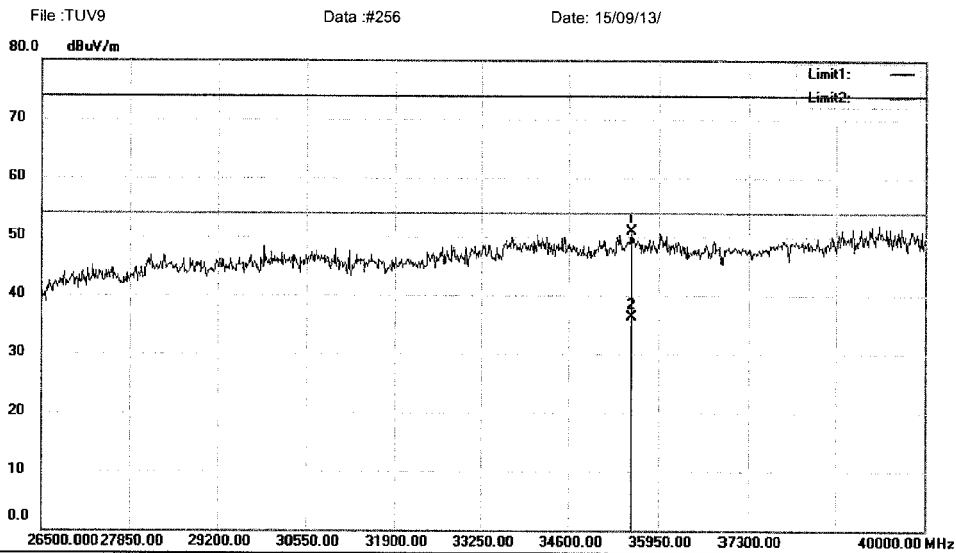
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#257

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5230  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		35545.00	89.07	-38.08	50.99	74.00	-23.01	peak		
2	*	35545.00	74.29	-38.08	36.21	54.00	-17.79	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

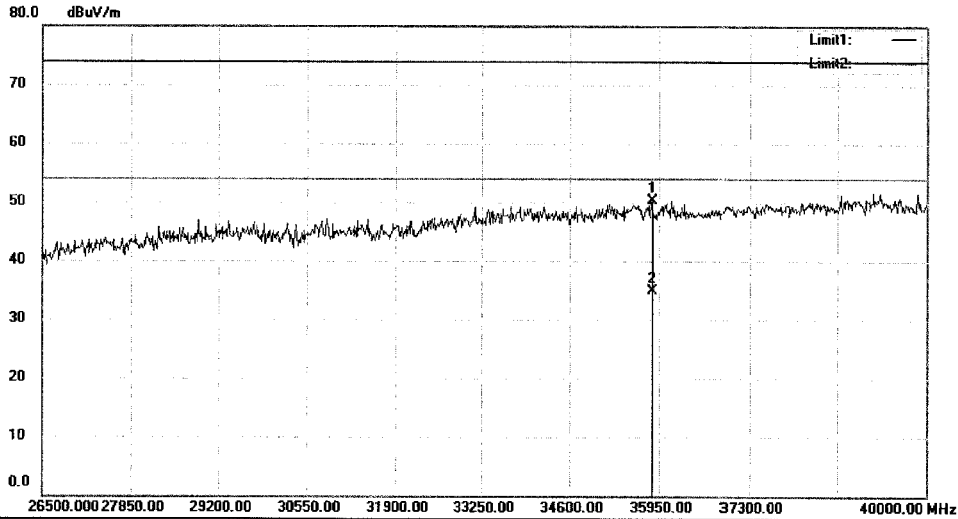
File :TUV9\Data :#256

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #259 Date: 15/09/13/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N40M 5755  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		35842.00	88.57	-38.19	50.38	74.00	-23.62	peak		
2	*	35842.00	73.05	-38.19	34.86	54.00	-19.14	AVG		

\*:Maximum data x:Over limit !:over margin

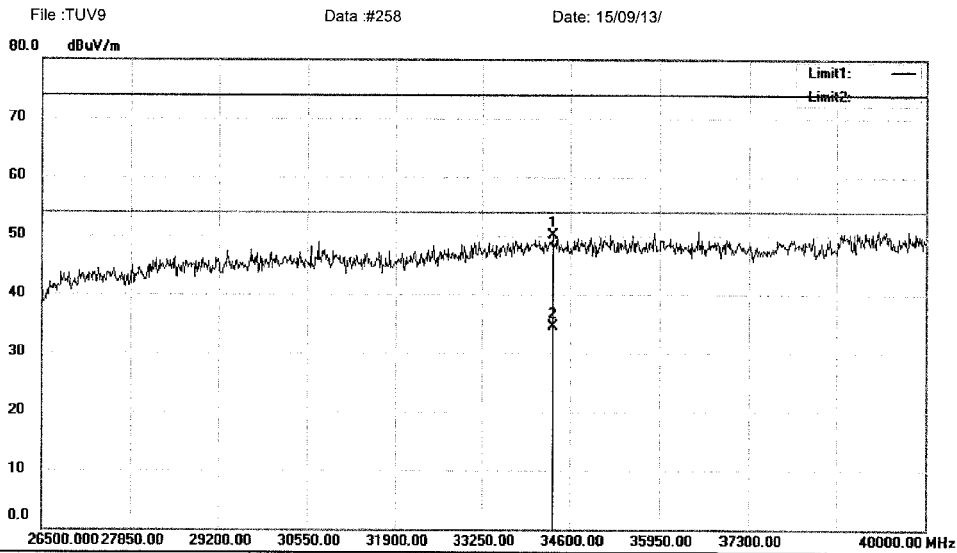
Operator: KK

File :TUV9\Data :#259

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5755  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		34330.00	87.64	-37.62	50.02	74.00	-23.98	peak		
2	*	34330.00	72.05	-37.62	34.43	54.00	-19.57	AVG		

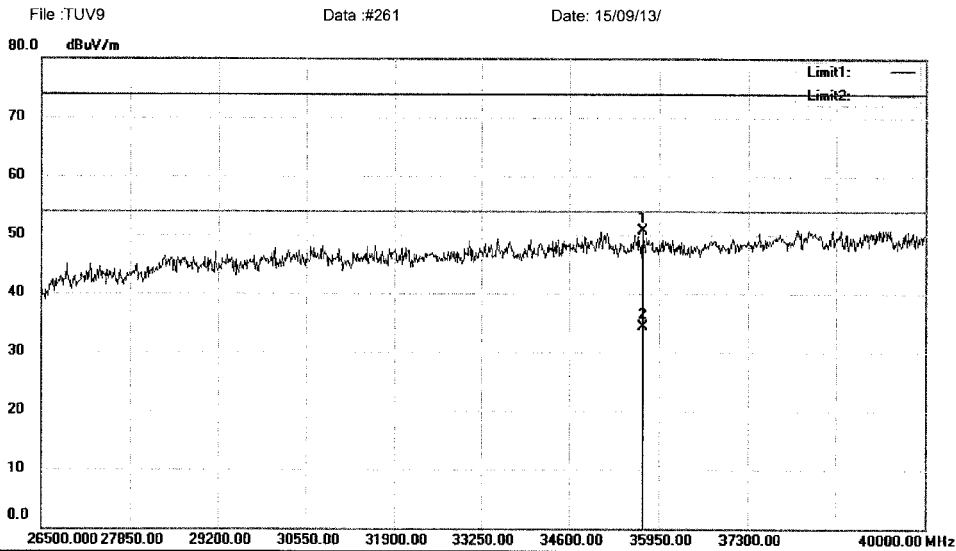
\*:Maximum data x:Over limit l:over margin

Operator: KK

File :TUV9\Data :#258

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5795  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		35707.00	88.76	-38.14	50.62	74.00	-23.38	peak		
2	*	35707.00	72.37	-38.14	34.23	54.00	-19.77	AVG		

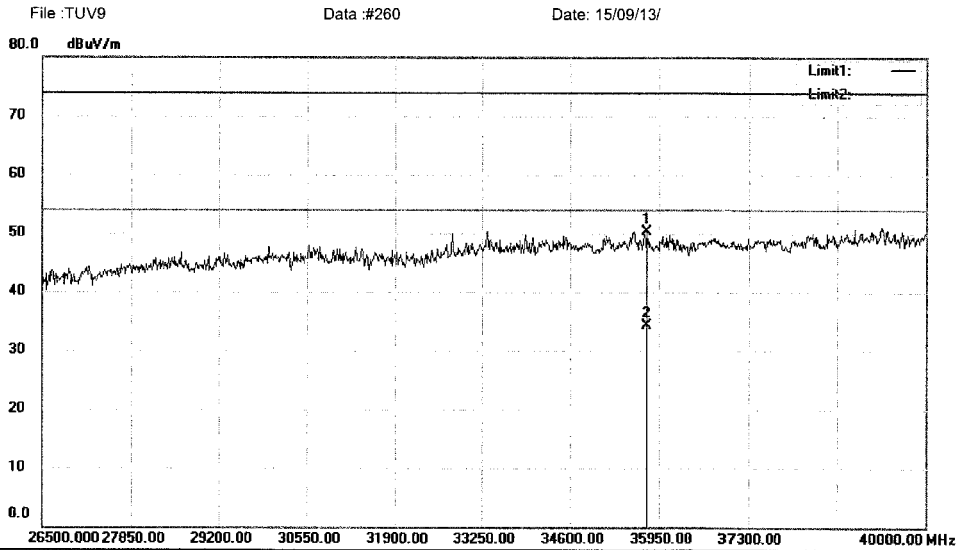
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#261

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N40M 5795  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		35761.00	88.38	-38.16	50.22	74.00	-23.78	peak		
2	*	35761.00	72.48	-38.16	34.32	54.00	-19.68	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

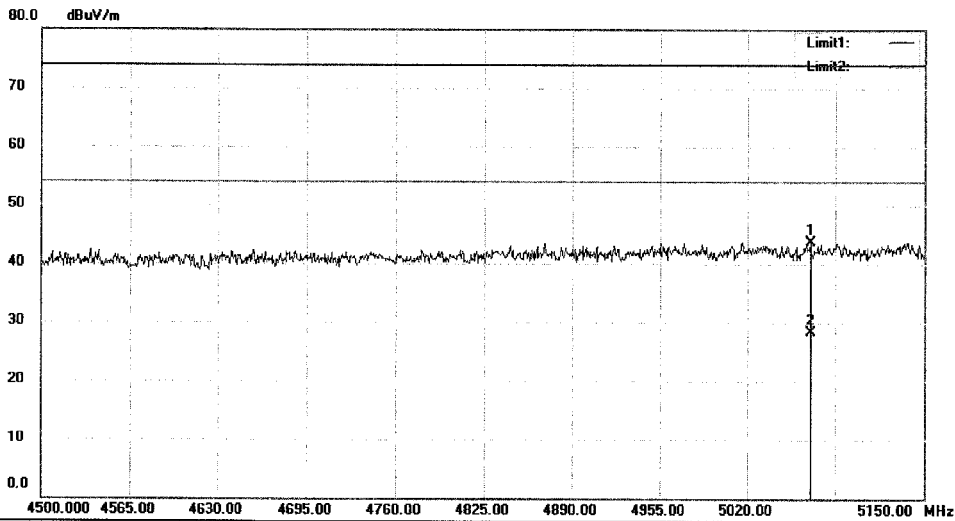
File :TUV9\Data :#260

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#410 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N 40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5066.800	58.10	-14.35	43.75	74.00	-30.25	peak		
2	*	5066.800	42.58	-14.35	28.23	54.00	-25.77	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

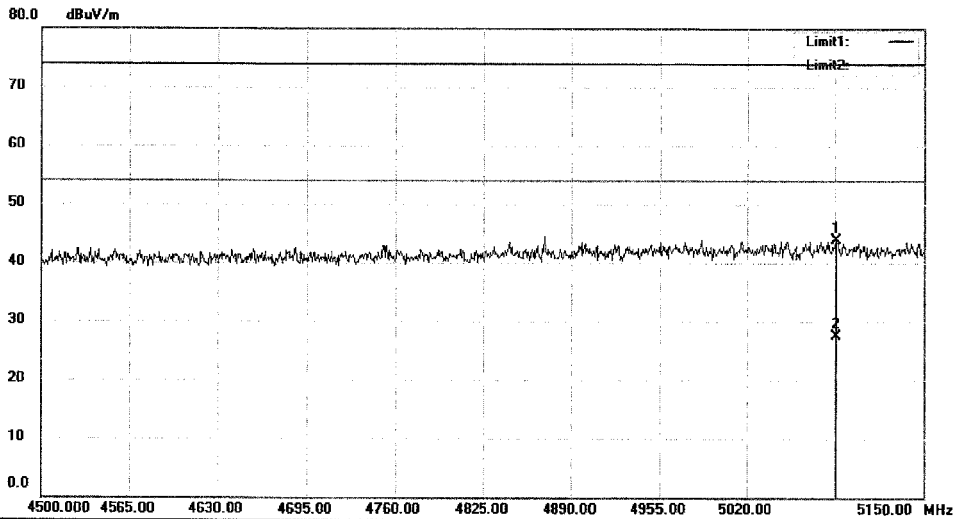
File :TUV9\Data :#410

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#356 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N 40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5086.300	58.26	-14.31	43.95	74.00	-30.05	peak		
2	*	5086.300	41.73	-14.31	27.42	54.00	-26.58	AVG		

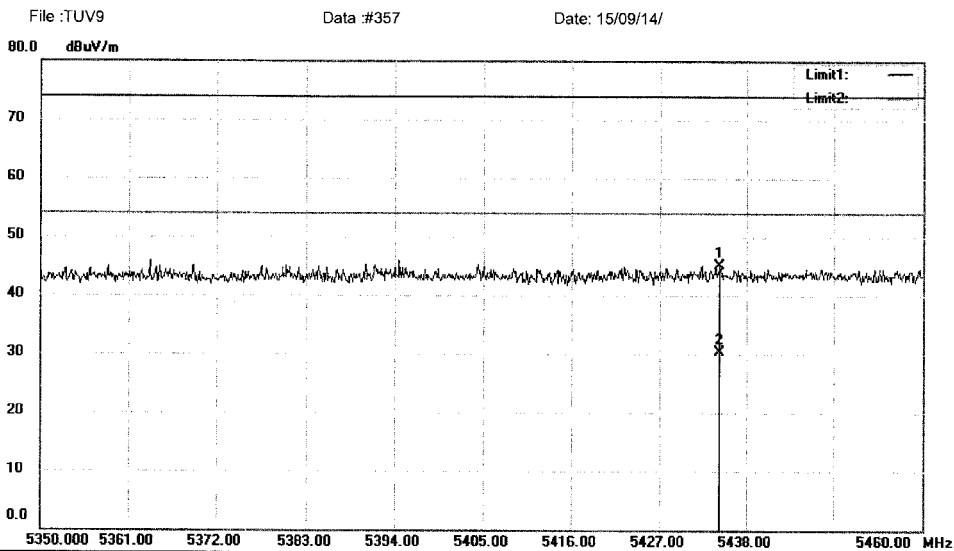
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#356

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N 40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5434.590	59.08	-13.90	45.18	74.00	-28.82	peak			
2	*	5434.590	44.14	-13.90	30.24	54.00	-23.76	AVG			

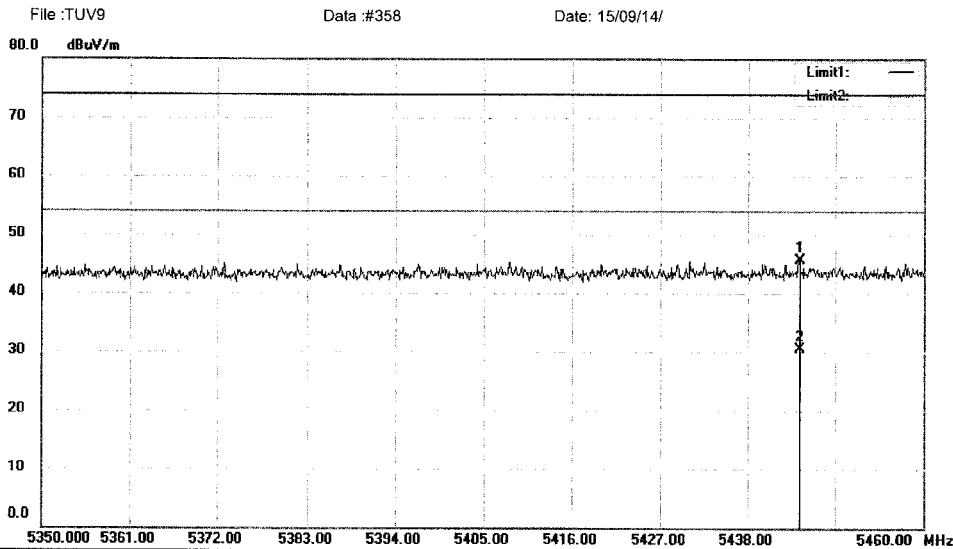
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#357

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N 40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5444.600	59.61	-13.89	45.72	74.00	-28.28	peak		
2	*	5444.600	44.40	-13.89	30.51	54.00	-23.49	AVG		

\*:Maximum data x:Over limit l:over margin

Operator: KK

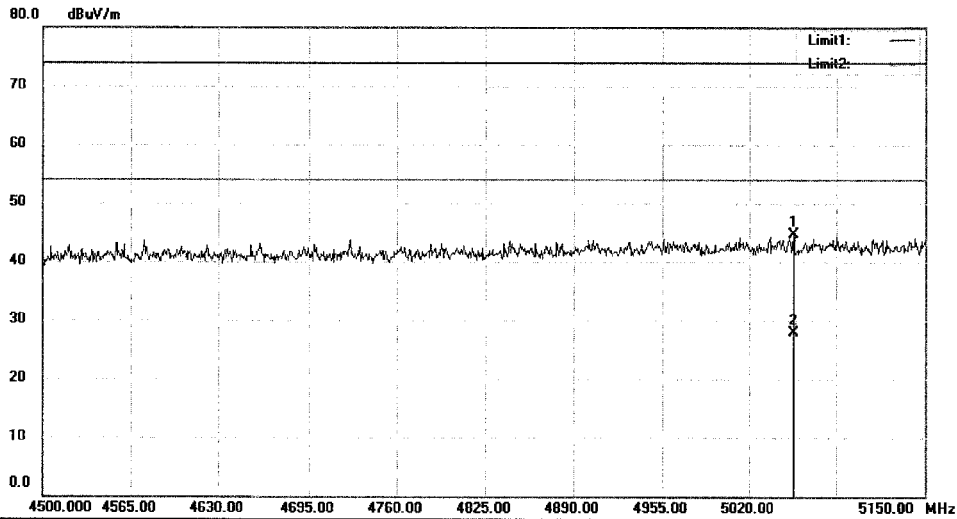
File :TUV9\Data :#358

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#359 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N 40M 5230  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5053.150	58.99	-14.36	44.63	74.00	-29.37	peak		
2	*	5053.150	42.23	-14.36	27.87	54.00	-26.13	AVG		

\*:Maximum data x:Over limit !:over margin

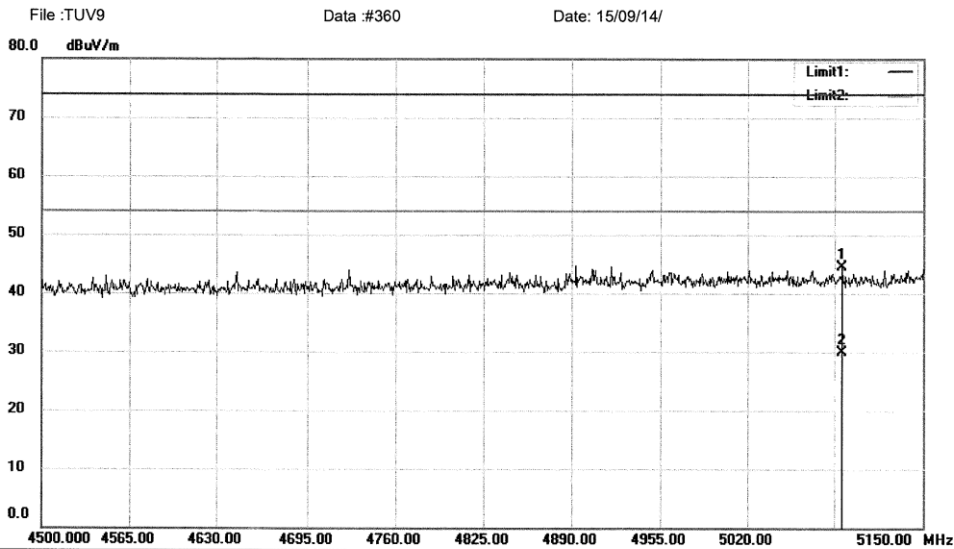
Operator: KK

File :TUV9\Data :#359

Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N 40M 5230  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5090.850	58.89	-14.31	44.58	74.00	-29.42	peak		
2	*	5090.850	44.15	-14.31	29.84	54.00	-24.16	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

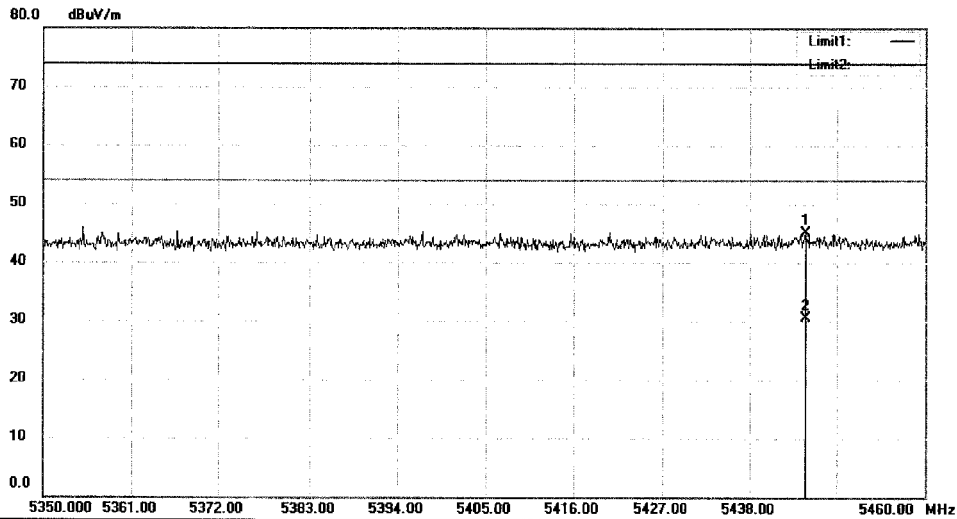
File :TUV9\Data :#360

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9      Data : #361      Date : 15/09/14/



Site 3m Chamber #3      Polarization: **Horizontal**      Temperature: 24 C  
 Limit: ( RE)FCC PART 15.247      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N 40M 5230  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		5445.040	58.93	-13.89	45.04	74.00	-28.96	peak			
2	*	5445.040	44.41	-13.89	30.52	54.00	-23.48	AVG			

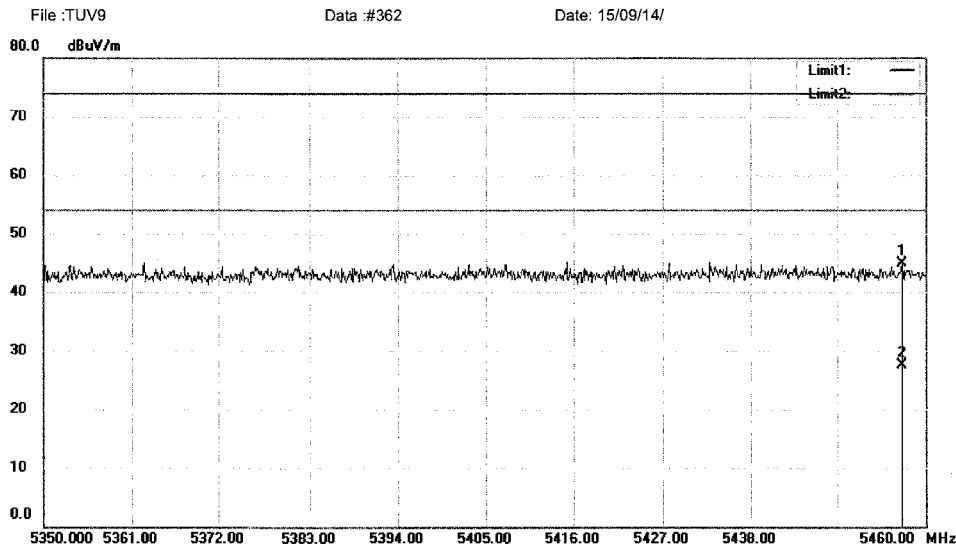
\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File :TUV9\Data :#361

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site: 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15.247 Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N 40M 5230  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5457.140	58.81	-13.87	44.94	74.00	-29.06	peak			
2	*	5457.140	41.29	-13.87	27.42	54.00	-26.58	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

File: TUV9\Data: #362

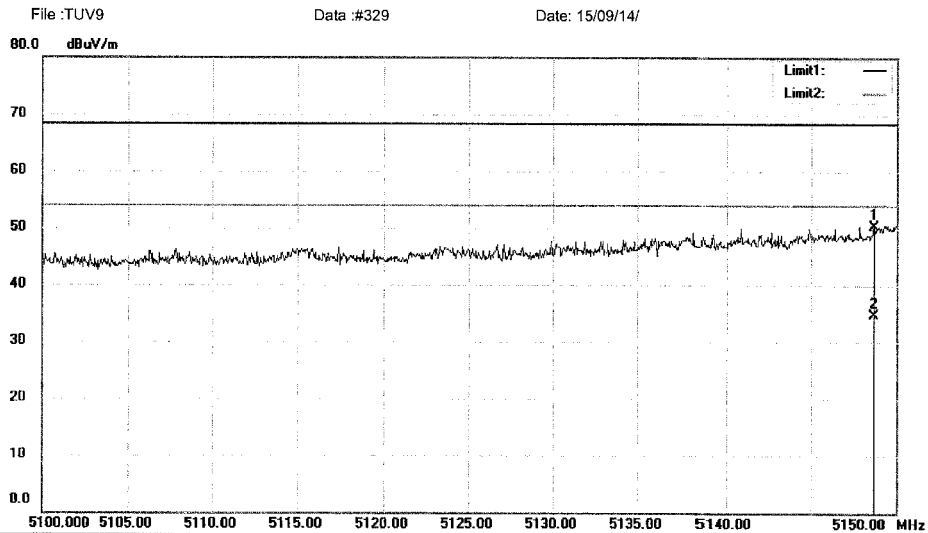
Page: 1

### Test Plot of Band Edge

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



#### Radiated Emission Measurement



Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5148.700	64.47	-14.24	50.23	68.20	-17.97	peak		
2		5148.700	48.87	-14.24	34.63	54.00	-19.37	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

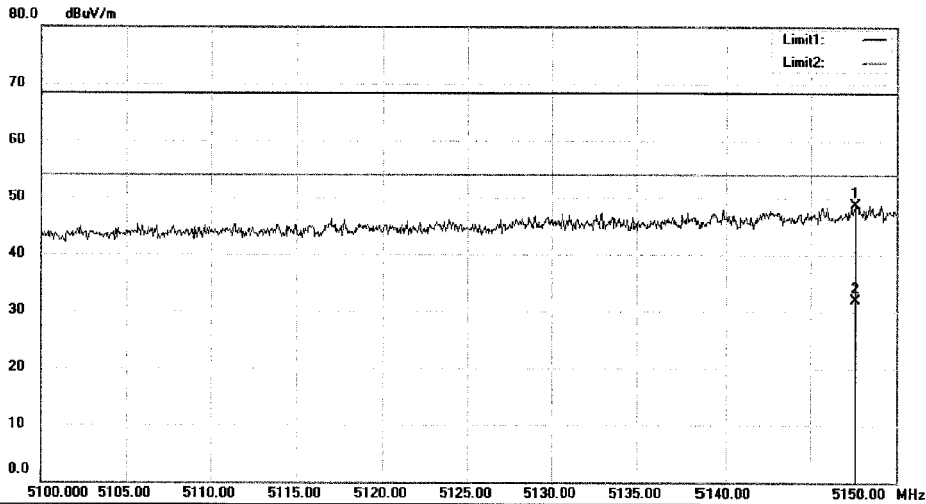
File :TUV9\Data :#329

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#328 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5180  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	5147.650	62.93	-14.24	48.69	68.20	-19.51			peak	
2		5147.650	46.08	-14.24	31.84	54.00	-22.16			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

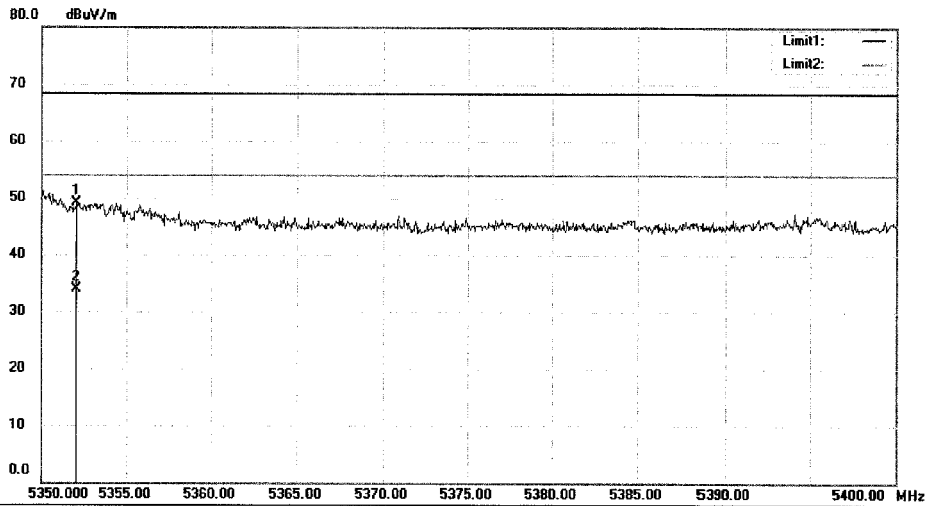
File :TUV9\Data :#328

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#331 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5352.050	63.17	-14.00	49.17	68.20	-19.03			peak	
2		5352.050	47.82	-14.00	33.82	54.00	-20.18			AVG	

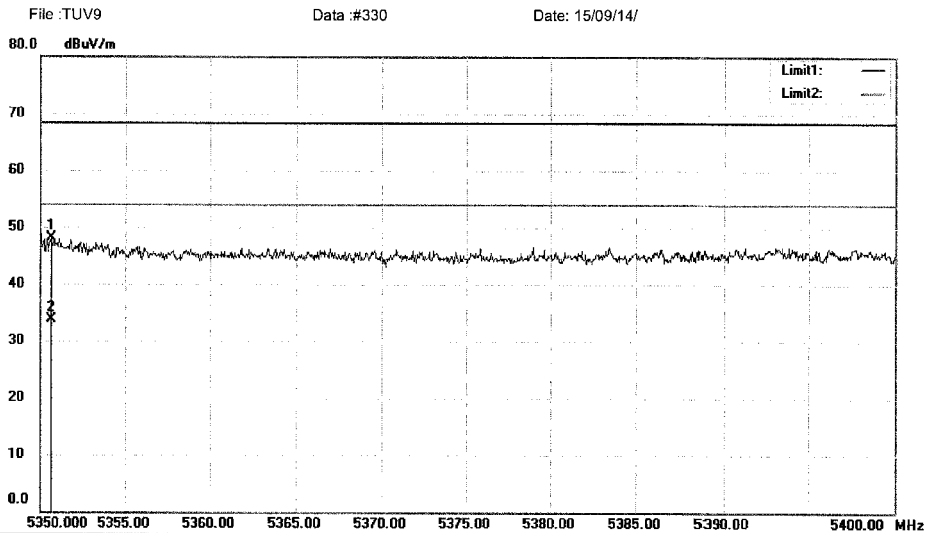
\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#331

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5350.600	62.04	-14.00	48.04	68.20	-20.16			peak	
2		5350.600	47.67	-14.00	33.67	54.00	-20.33			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

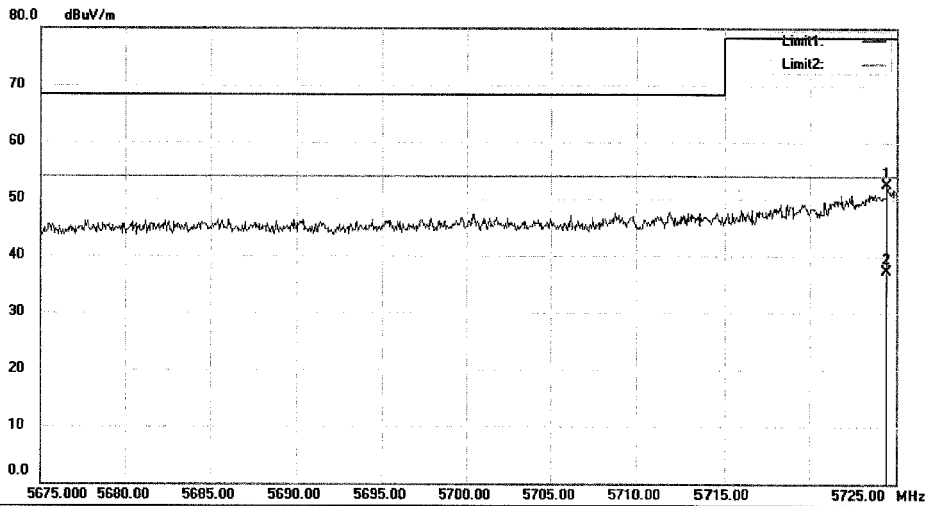
File : TUV9\Data : #330

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#333 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5724.450	65.98	-13.56	52.42	78.20	-25.78			peak	
2	*	5724.450	50.77	-13.56	37.21	54.00	-16.79			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#333

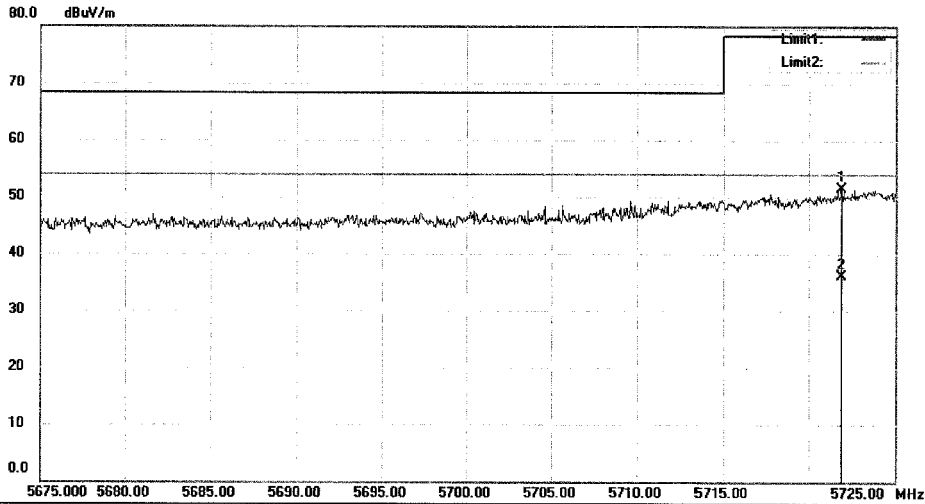
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#332 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11A 5745  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		5721.900	65.12	-13.56	51.56	78.20	-26.64			peak	
2	*	5721.900	49.73	-13.56	36.17	54.00	-17.83			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

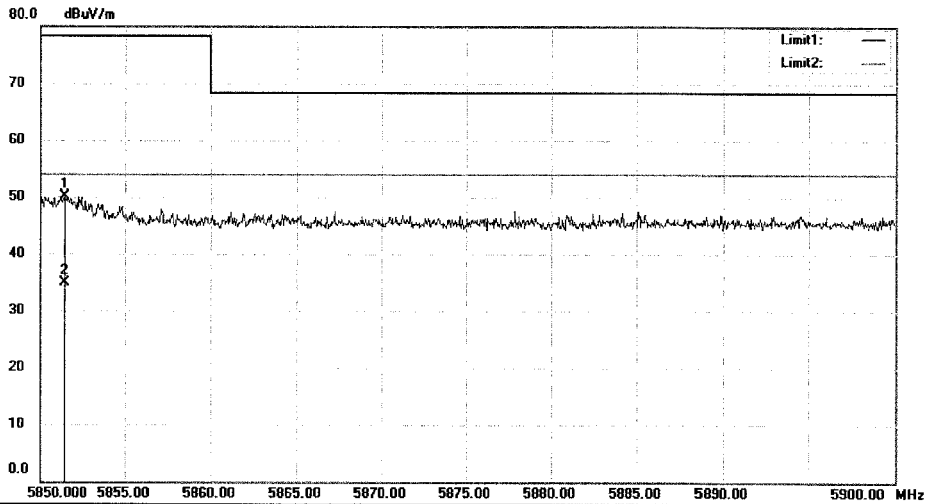
File :TUV9\Data :#332

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9      Data : #335      Date : 15/09/14/



Site 3m Chamber #3      Polarization: **Horizontal**      Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak      Power: AC 120V/60Hz      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5851.400	63.42	-13.41	50.01	78.20	-28.19	peak		
2	*	5851.400	48.27	-13.41	34.86	54.00	-19.14	AVG		

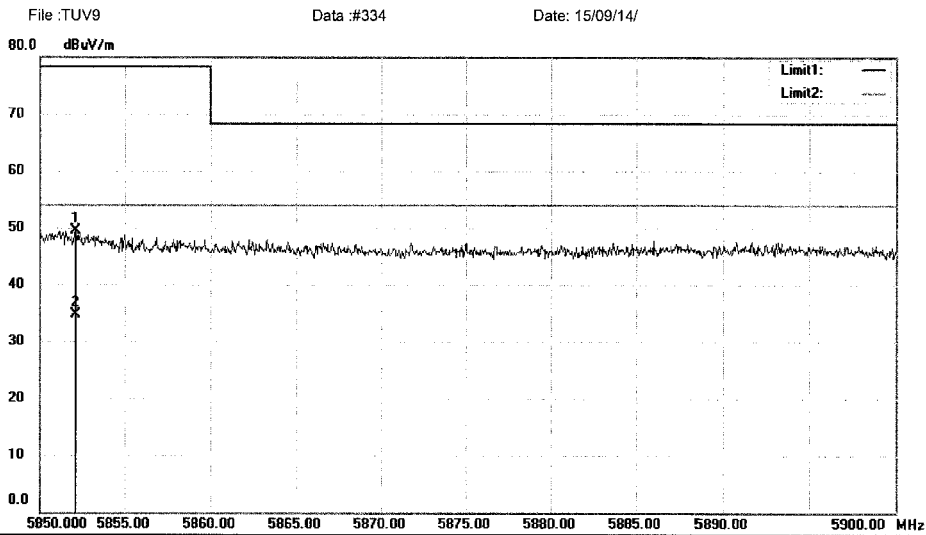
\*:Maximum data    x:Over limit    !:over margin

Operator: KK

File : TUV9\Data : #335

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11A 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5852.100	62.88	-13.41	49.47	78.20	-28.73			peak	
2	*	5852.100	48.03	-13.41	34.62	54.00	-19.38			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

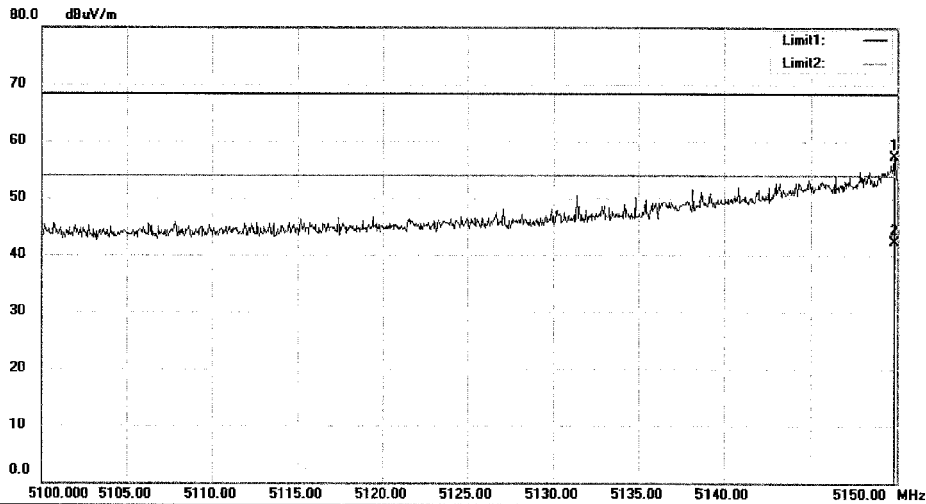
File : TUV9\Data : #334

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#349 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5180  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	5149.800	71.58	-14.24	57.34	68.20	-10.86			peak	
2		5149.800	56.63	-14.24	42.39	54.00	-11.61			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

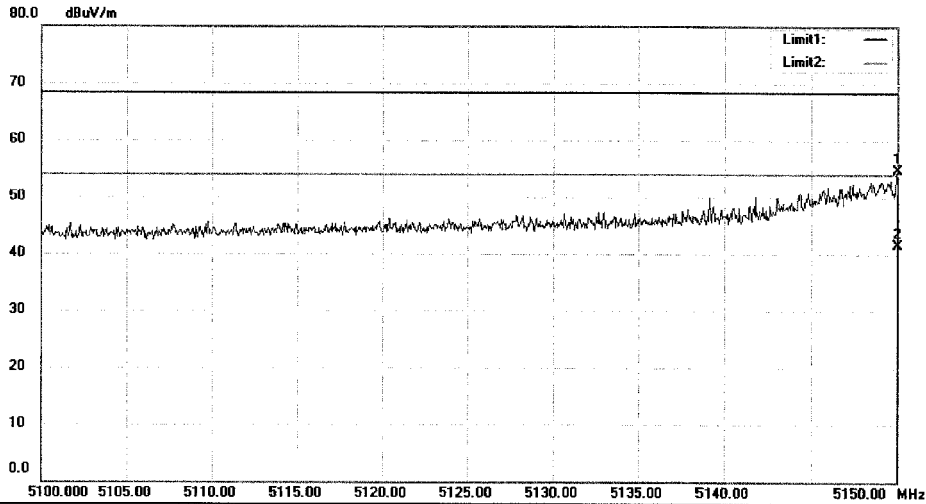
File :TUV9\Data :#349

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9                      Data : #348                      Date: 15/09/14/



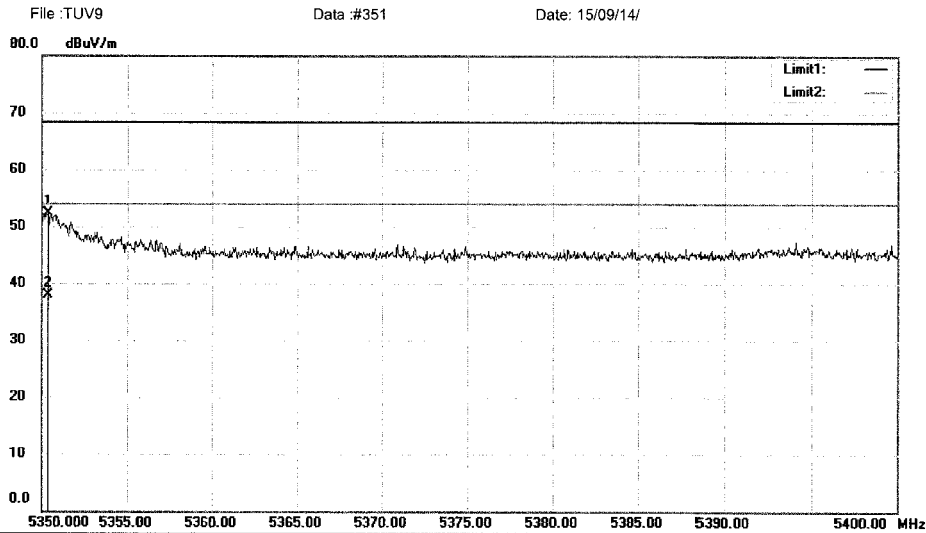
Site 3m Chamber #3                      Polarization: **Vertical**                      Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak                      Power: AC 120V/60Hz                      Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5180  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5150.000	69.03	-14.24	54.79	68.20	-13.41			peak	
2	*	5150.000	55.80	-14.24	41.56	54.00	-12.44			AVG	

\*:Maximum data    x:Over limit    !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5350.350	66.22	-14.00	52.22	68.20	-15.98			peak	
2		5350.350	51.85	-14.00	37.85	54.00	-16.15			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

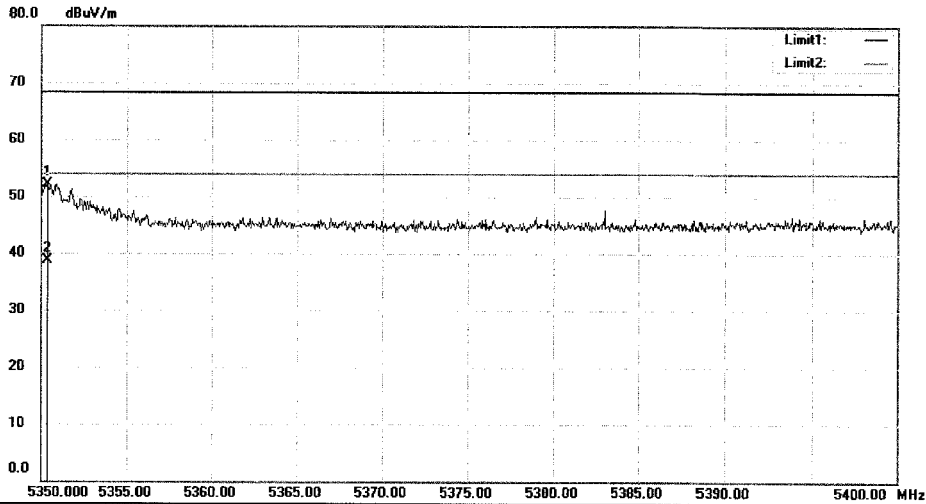
File : TUV9\Data : #351

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 09, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#350 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5240  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5350.350	66.18	-14.00	52.18	68.20	-16.02			peak	
2	*	5350.350	52.69	-14.00	38.69	54.00	-15.31			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

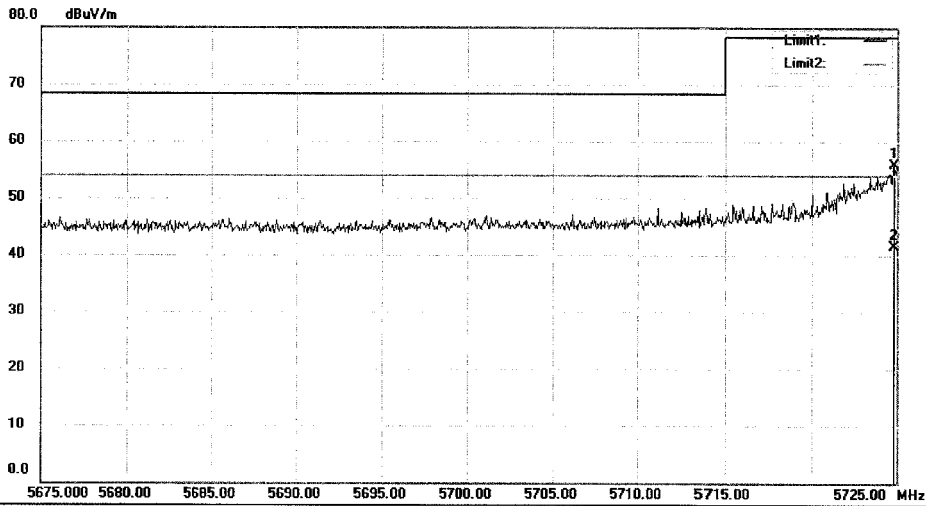
File :TUV9\Data :#350

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majielong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#353 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5724.800	69.53	-13.56	55.97	78.20	-22.23			peak	
2	*	5724.800	55.15	-13.56	41.59	54.00	-12.41			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#353

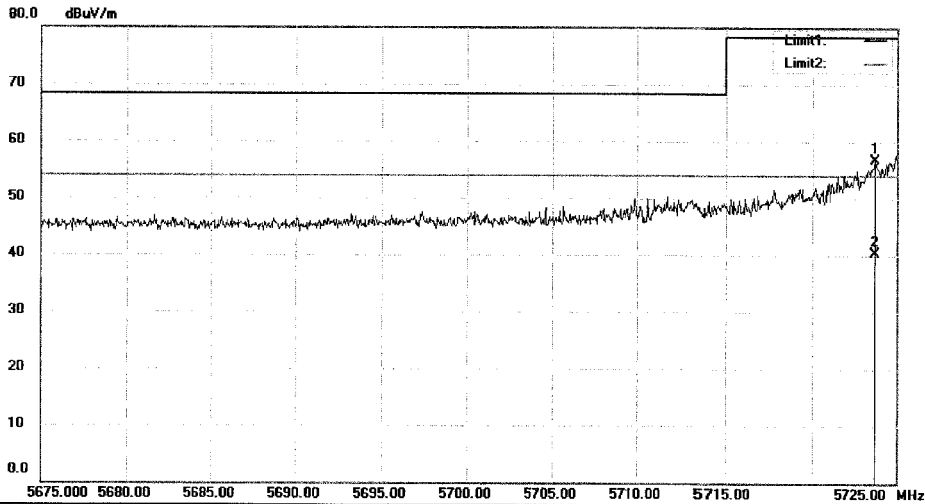
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File : TUV9 Data : #352 Date : 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N20M 5745  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5723.700	70.17	-13.56	56.61	78.20	-21.59			peak	
2	*	5723.700	53.77	-13.56	40.21	54.00	-13.79			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

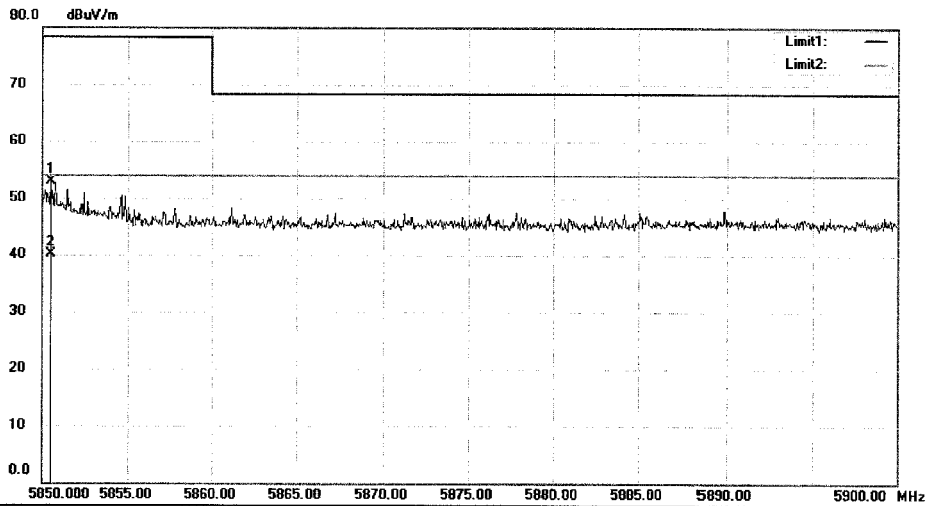
File : TUV9\Data : #352

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#355 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N20M 5825  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5850.500	66.25	-13.41	52.84	78.20	-25.36			peak	
2	*	5850.500	53.58	-13.41	40.17	54.00	-13.83			AVG	

\*:Maximum data x:Over limit !:over margin

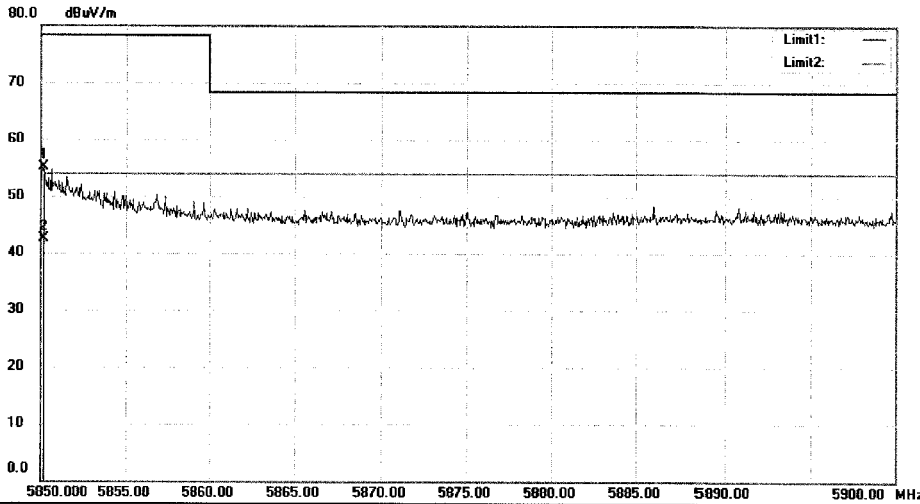
Operator: KK

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282



Radiated Emission Measurement

File :TUV9 Data :#354 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
EUT: Tablet PC  
M/N: NS-P11W6100  
Mode:11N20M 5825  
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5850.150	68.58	-13.41	55.17	78.20	-23.03			peak	
2	*	5850.150	55.94	-13.41	42.53	54.00	-11.47			AVG	

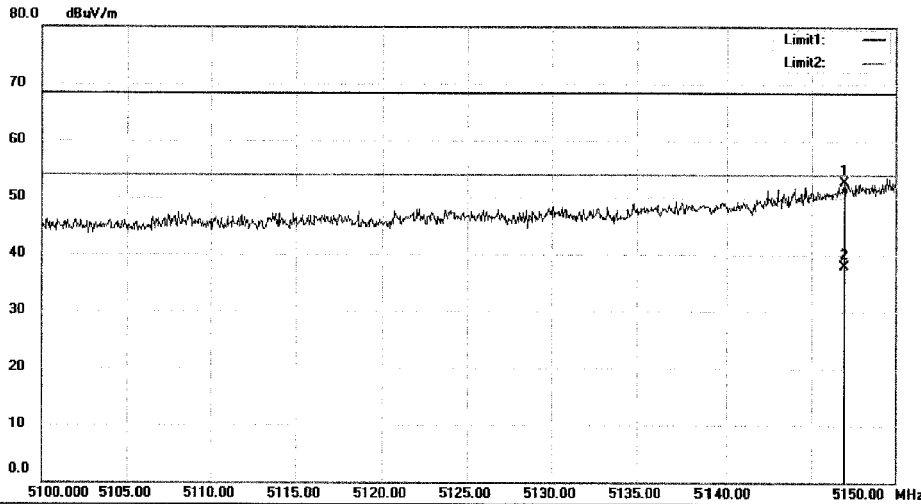
\*:Maximum data x:Over limit !:over margin

Operator: KK

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#368 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N 40M 5190  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	5146.950	66.93	-14.24	52.69	68.20	-15.51			peak	
2		5146.950	52.09	-14.24	37.85	54.00	-16.15			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

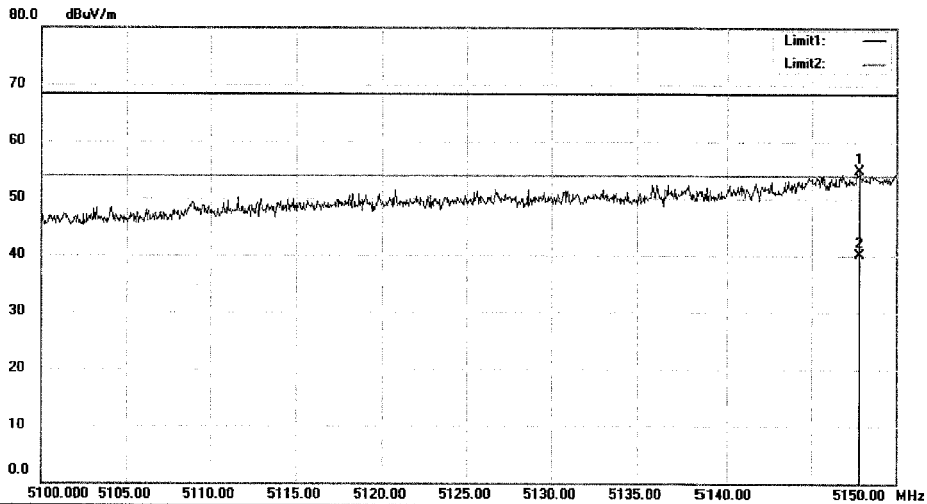
File :TUV9\Data :#368

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#367 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N 40M 5190  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1	*	5147.850	69.12	-14.24	54.88	68.20	-13.32			peak	
2		5147.850	54.37	-14.24	40.13	54.00	-13.87			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

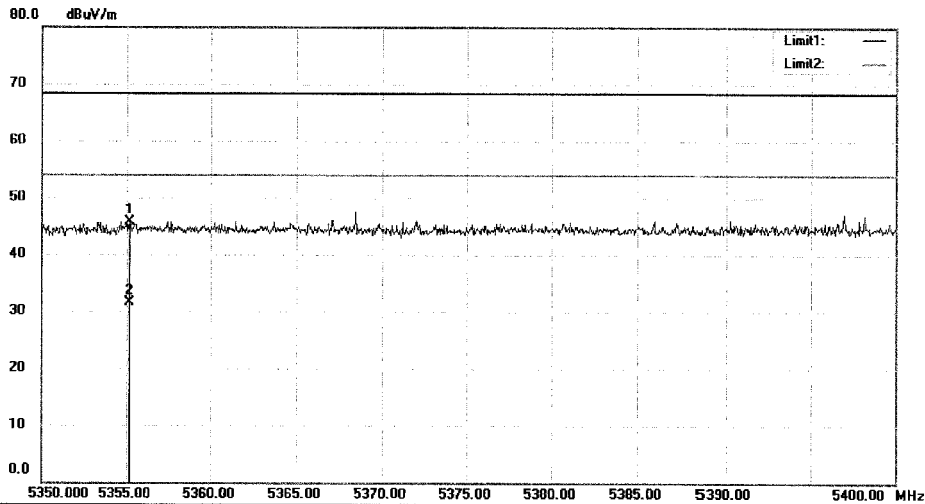
File :TUV9\Data :#367

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#370 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N 40M 5230  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		5355.150	59.70	-14.00	45.70	68.20	-22.50			peak	
2	*	5355.150	45.53	-14.00	31.53	54.00	-22.47			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

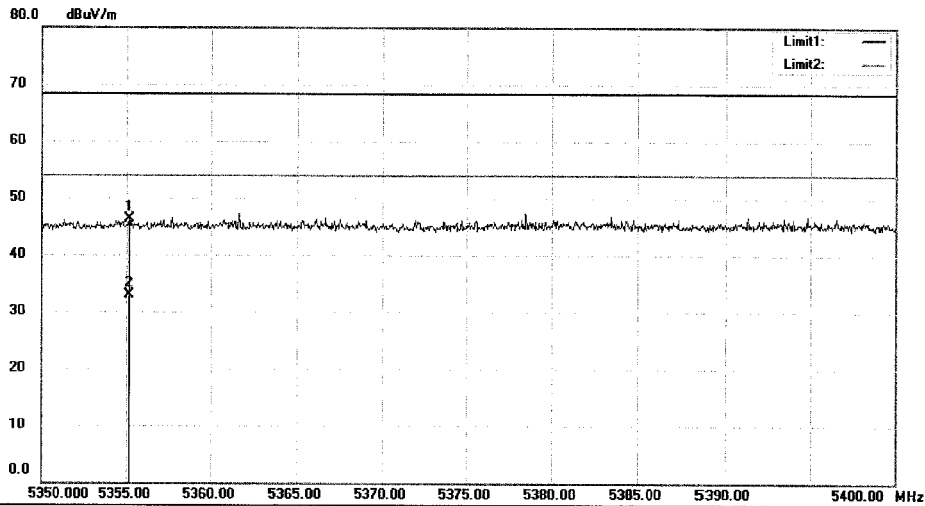
File :TUV9\Data :#370

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel:+86-755-2695 4280 Fax:+86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data :#369 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: ( RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N 40M 5230  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		5355.150	60.28	-14.00	46.28	68.20	-21.92			peak	
2	*	5355.150	46.84	-14.00	32.84	54.00	-21.16			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

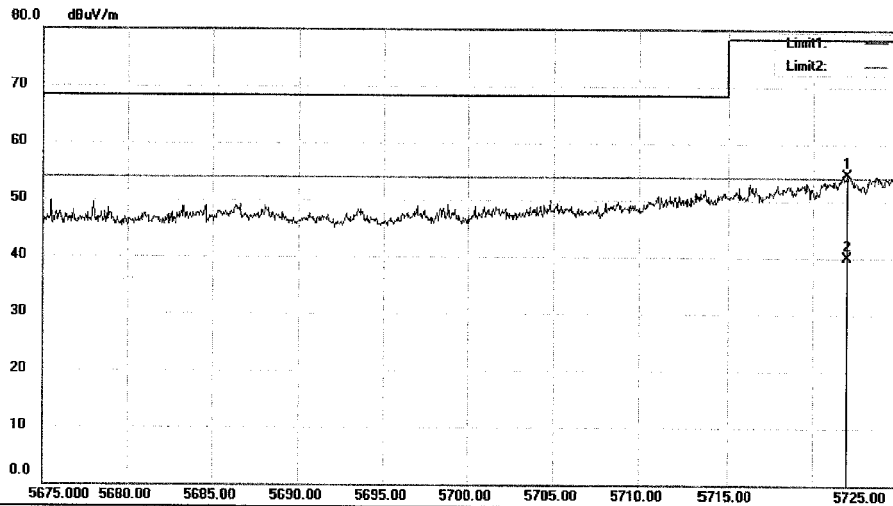
File :TUV9\Data :#369

Page: 1

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File: TUV9 Data: #372 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
 Limit: (RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: 11N 40M 5755  
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		5722.050	68.16	-13.56	54.60	78.20	-23.60			peak	
2	*	5722.050	53.56	-13.56	40.00	54.00	-14.00			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#372

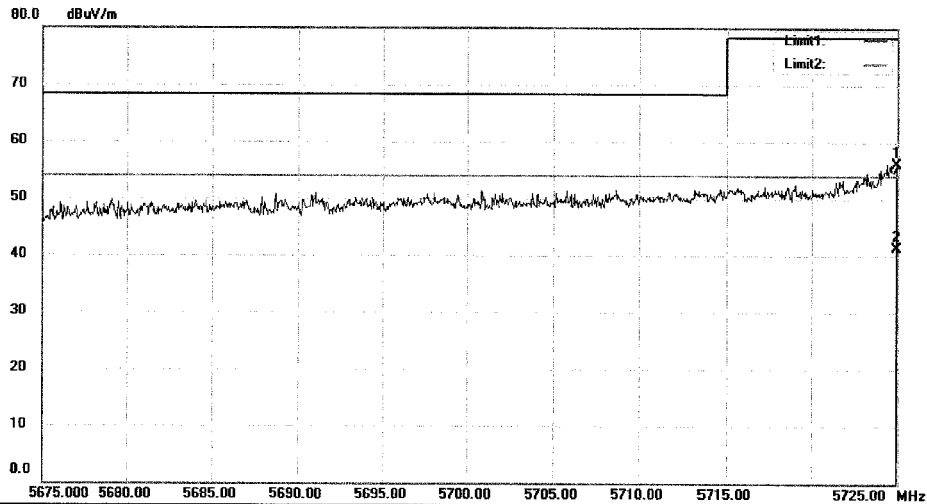
Page: 1



Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Radiated Emission Measurement**

File :TUV9 Data #371 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:11N 40M 5755  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		5724.950	69.76	-13.56	56.20	78.20	-22.00	peak			
2	*	5724.950	54.93	-13.56	41.37	54.00	-12.63	AVG			

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#371

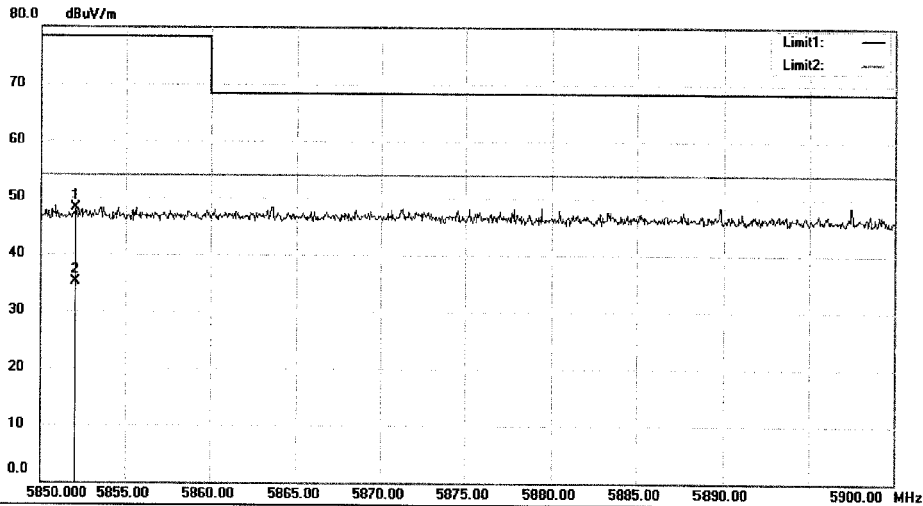
Page: 1

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P.R. China  
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File: TUV9 Data: #374 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C  
Limit: (RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
EUT: Tablet PC  
M/N: NS-P11W6100  
Mode: 11N 40M 5795  
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		5852.050	61.61	-13.41	48.20	78.20	-30.00			peak	
2	*	5852.050	48.54	-13.41	35.13	54.00	-18.87			AVG	

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#374

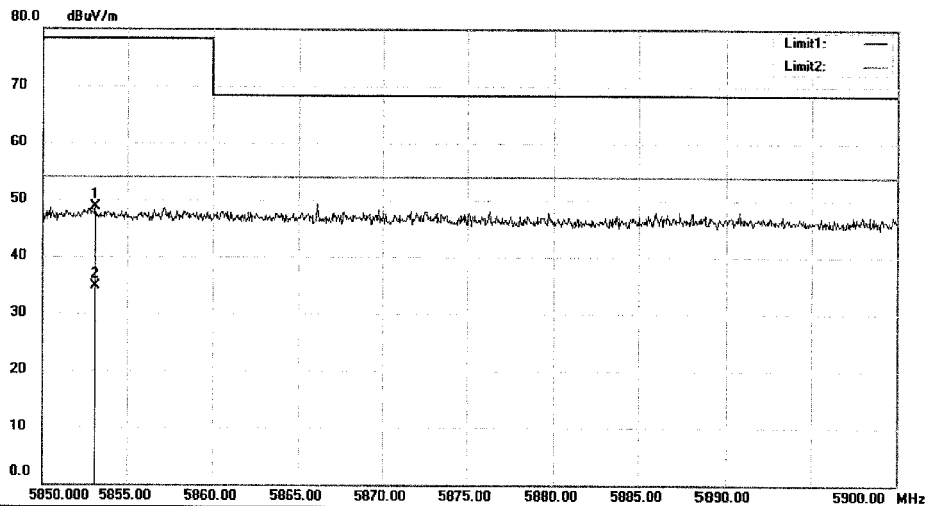
Page: 1

Shenzhen EMTEK Co., Ltd.  
Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282



Radiated Emission Measurement

File :TUV9 Data #373 Date: 15/09/14/



Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
Limit: (RE)FCC PART 15C ( Bandedge) Peak Power: AC 120V/60Hz Humidity: 53 %  
EUT: Tablet PC  
M/N: NS-P11W6100  
Mode:11N 40M 5795  
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5853.100	62.12	-13.41	48.71	78.20	-29.49	peak		
2	*	5853.100	48.03	-13.41	34.62	54.00	-19.38	AVG		

\*:Maximum data x:Over limit !:over margin

Operator: KK

File :TUV9\Data :#373

Page: 1

**Prüfbericht - Nr.: 17052521 003**

Test Report No.

Seite 220 von 226

Page 220 of 226

### 5.1.7 Conducted emissions

**RESULT:****Pass**

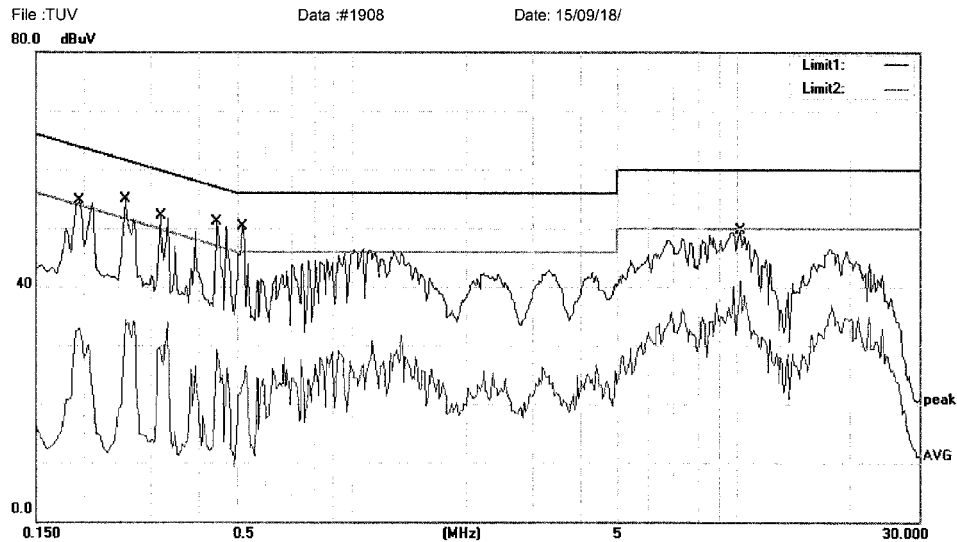
Date of testing : 2015-09-18  
Test standard : FCC Part 15.207  
FCC part 15.407(b)(6)  
RSS-Gen Clause 8.8  
Basic standard : ANSI C63.10: 2013  
Frequency range : 0.15 – 30MHz  
Limits : FCC Part 15.207  
Kind of test site : Shield room

**Test setup**

Input Voltage : AC 120V, 60Hz  
Operation Mode : A  
Earthing : Not Connected  
Ambient temperature : 26°C  
Relative humidity : 60%  
Atmospheric pressure : 101kPa

For details refer to following test plot.

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282

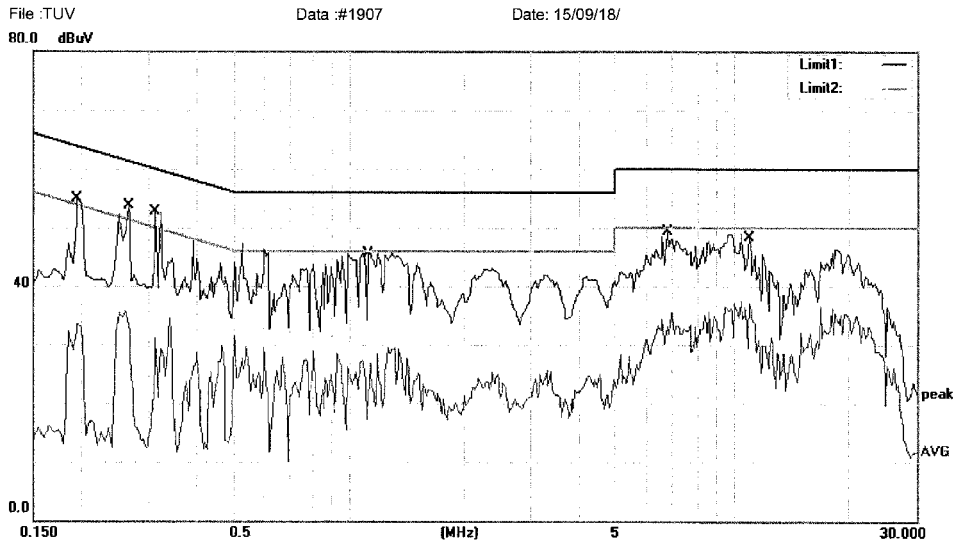

**Conducted Emission Measurement**


Site Conduction #1 Phase: **L1** Temperature: 26  
 Limit: (CE)FCC PART 15 class C\_QP Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode: WIFI 5G  
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1950	54.79	0.00	54.79	63.82	-9.03	QP	
2	0.1950	32.81	0.00	32.81	53.82	-21.01	AVG	
3	0.2550	54.97	0.00	54.97	61.59	-6.62	QP	
4	0.2550	34.23	0.00	34.23	51.59	-17.36	AVG	
5	0.3150	52.11	0.00	52.11	59.84	-7.73	QP	
6	0.3150	33.90	0.00	33.90	49.84	-15.94	AVG	
7	0.4450	51.09	0.00	51.09	56.97	-5.88	QP	
8	0.4450	29.31	0.00	29.31	46.97	-17.66	AVG	
9 *	0.5200	50.33	0.00	50.33	56.00	-5.67	QP	
10	0.5200	26.51	0.00	26.51	46.00	-19.49	AVG	
11	10.1791	49.69	0.00	49.69	60.00	-10.31	QP	
12	10.1791	41.09	0.00	41.09	50.00	-8.91	AVG	

\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Neo

Shenzhen EMTEK Co., Ltd.  
 Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052 P. R. China  
 www.emtek.com.cn Tel: +86-755-2695 4280 Fax: +86-755-2695 4282


**Conducted Emission Measurement**


Site Conduction #1 Phase: **N** Temperature: 26  
 Limit: (CE)FCC PART 15 class C\_QP Power: AC 120V/60Hz Humidity: 60 %  
 EUT: Tablet PC  
 M/N: NS-P11W6100  
 Mode:WIFI 5G  
 Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1950	54.83	0.00	54.83	63.82	-8.99	QP	
2	0.1950	33.58	0.00	33.58	53.82	-20.24	AVG	
3	0.2650	53.75	0.00	53.75	61.27	-7.52	QP	
4	0.2650	35.64	0.00	35.64	51.27	-15.63	AVG	
5 *	0.3100	52.64	0.00	52.64	59.97	-7.33	QP	
6	0.3100	34.42	0.00	34.42	49.97	-15.55	AVG	
7	1.1150	45.60	0.00	45.60	56.00	-10.40	QP	
8	1.1150	28.82	0.00	28.82	46.00	-17.18	AVG	
9	6.7900	49.39	0.00	49.39	60.00	-10.61	QP	
10	6.7900	35.59	0.00	35.59	50.00	-14.41	AVG	
11	11.0000	48.37	0.00	48.37	60.00	-11.63	QP	
12	11.0000	37.41	0.00	37.41	50.00	-12.59	AVG	

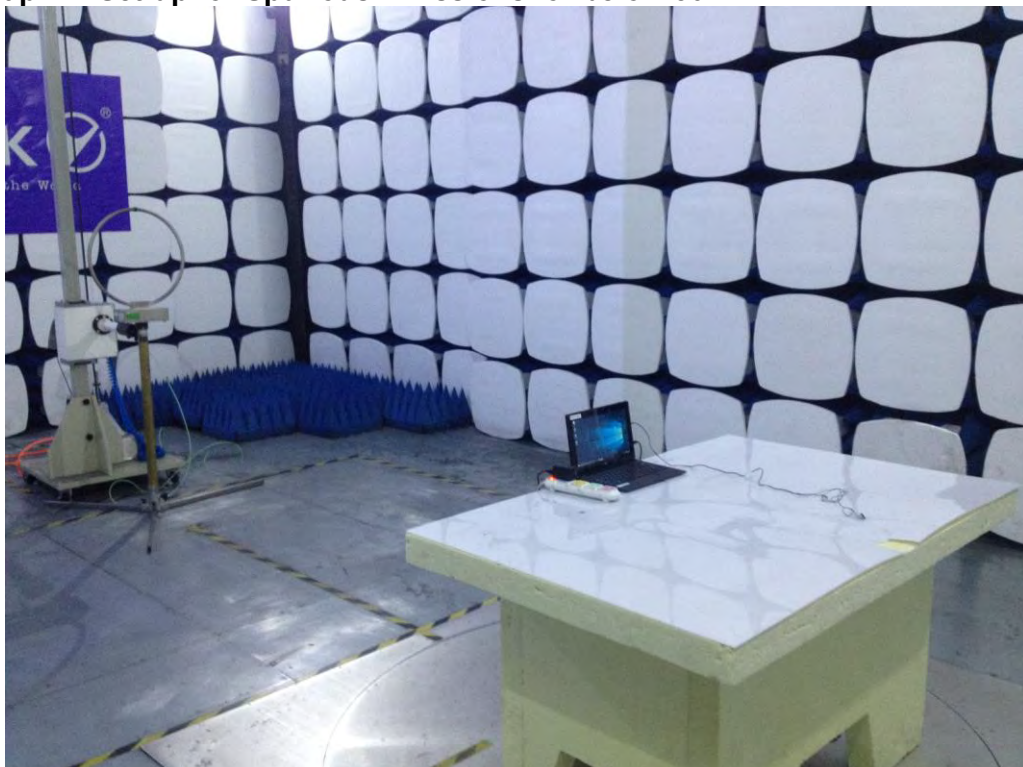
\*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Neo

## 6. Photographs of the Test Set-Up

**Photograph 1: Set-up for Conducted Emissions**

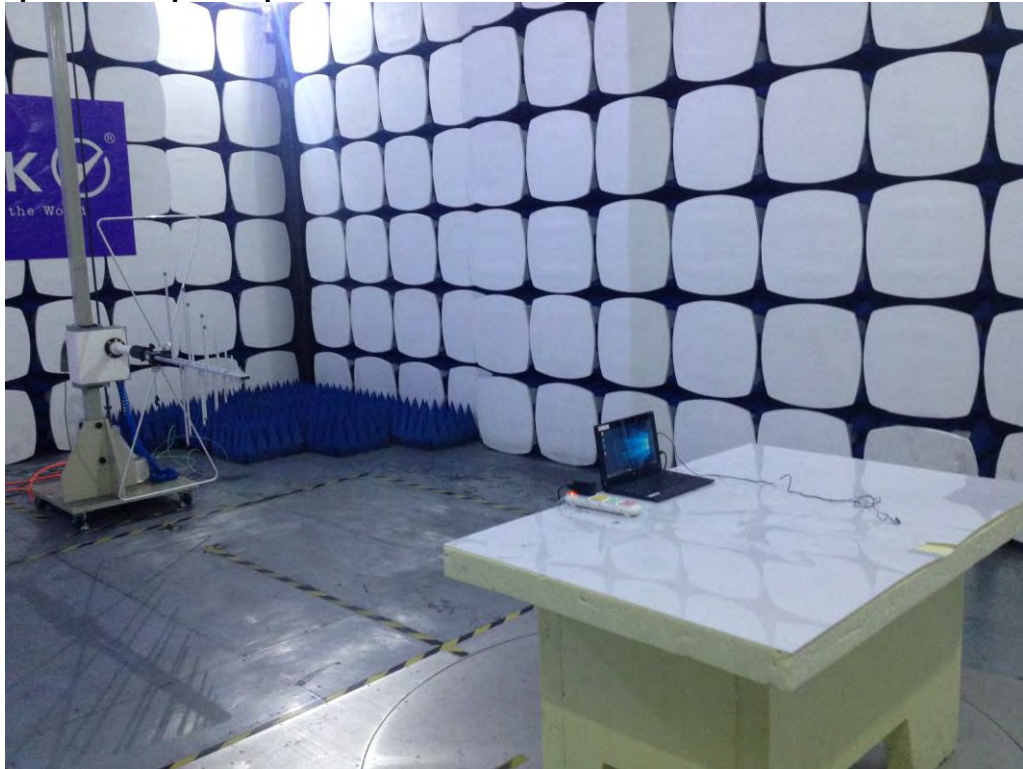


**Photograph 2: Set-up for Spurious Emissions for below 30MHz**





Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz

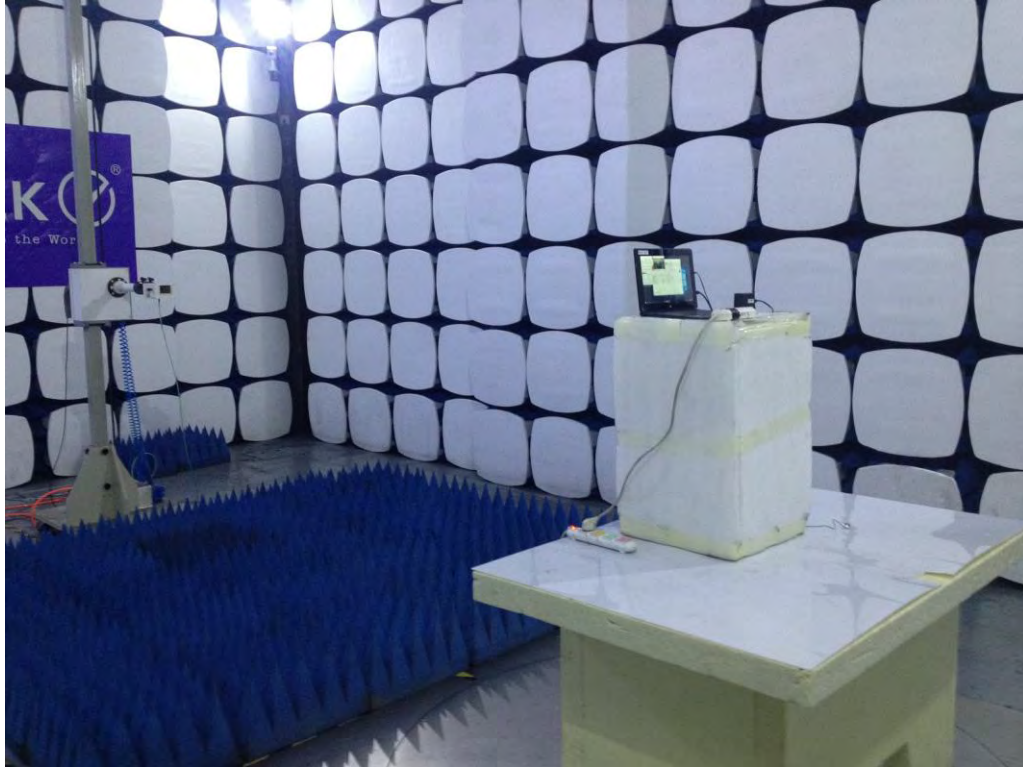


Photograph 4: Set-up for Spurious Emissions for 1 - 26.5GHz





**Photograph 5: Set-up for Spurious Emissions for 26.5 - 40GHz**



## 7. List of Tables

Table 1: List of Test and Measurement Equipment .....	5
Table 2: Measurement Uncertainty .....	6
Table 3: Technical Specification of EUT .....	8
Table 4: Technical Specification of Wi-Fi .....	8
Table 5: Carrier Frequency of 802.11a & 802.11n (HT20) .....	9
Table 6: Carrier Frequency of 802.11n (HT40) .....	9
Table 7: Test result of Peak Output Power of 802.11a .....	14
Table 8: Test result of Peak Output Power of 802.11n HT20 .....	14
Table 9: Test result of Peak Output Power of 802.11n HT40 .....	15
Table 10: Test result of 26dB Bandwidth and 99% Bandwidth of 802.11a .....	16
Table 11: Test result of 26dB Bandwidth and 99% Bandwidth of 802.11n HT20 .....	16
Table 12: Test result of 26dB Bandwidth and 99% Bandwidth of 802.11n HT40 .....	16
Table 13: Test result of 6dB Bandwidth of 802.11a .....	17
Table 14: Test result of 6dB Bandwidth of 802.11n HT20 .....	17
Table 15: Test result of 6dB Bandwidth of 802.11n HT40 .....	17
Table 16: Test result of power spectral density of 802.11a .....	18
Table 17: Test result of power spectral density of 802.11n HT20 .....	18
Table 18: Test result of power spectral density of 802.11n HT40 .....	18

## 8. List of Photographs

Photograph 1: Set-up for Conducted Emissions .....	223
Photograph 2: Set-up for Spurious Emissions for below 30MHz .....	223
Photograph 3: Set-up for Spurious Emissions for 30 - 1000MHz .....	224
Photograph 4: Set-up for Spurious Emissions for 1 – 26.5GHz .....	224
Photograph 5: Set-up for Spurious Emissions for 26.5 - 40GHz .....	225