

Appendix B: SAR Plots of SAR Measurement

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2023/12/20

P01 BT_DH5_Rear Face_0cm_Ch0_Left

DUT: EUT

Communication System: BT; Frequency: 2402 MHz; Duty Cycle: 1:1


Medium: H2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 37.999$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.98, 7.98, 7.98) @ 2402 MHz; Calibrated: 2023/6/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2023/7/6
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (51x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.888 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.97 V/m; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 1.66 W/kg
SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.109 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 17.9%
Maximum value of SAR (measured) = 0.887 W/kg

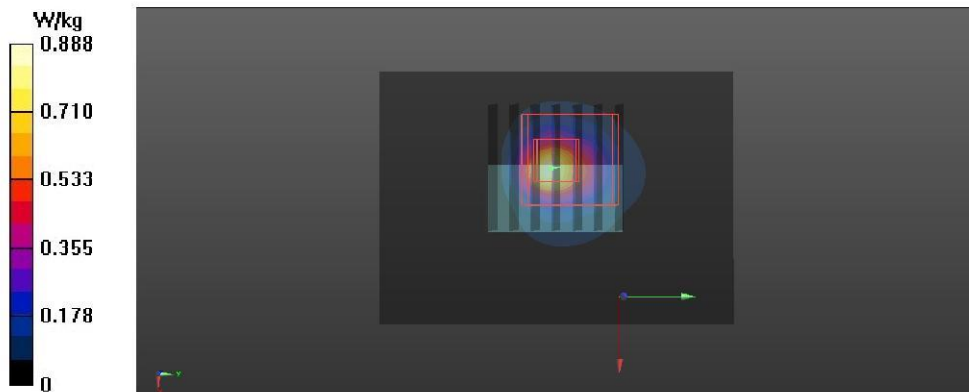

Test Laboratory: TÜV Rheinland (Shenzhen) Co., Ltd.

Date: 2023/12/20

P02 BT_DH5_Rear Face_0cm_Ch0_Right

DUT: EUT

Communication System: BT; Frequency: 2402 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2402$ MHz; $\sigma = 1.787$ S/m; $\epsilon_r = 37.999$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.98, 7.98, 7.98) @ 2402 MHz; Calibrated: 2023/6/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2023/7/6
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: 1961
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

- **Area Scan (51x71x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.849 W/kg

- **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.524 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.84 W/kg
SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.082 W/kg
Smallest distance from peaks to all points 3 dB below = 3.6 mm
Ratio of SAR at M2 to SAR at M1 = 10.8%
Maximum value of SAR (measured) = 0.878 W/kg

