


TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\14
Memo: 11A 5500

Test Graph

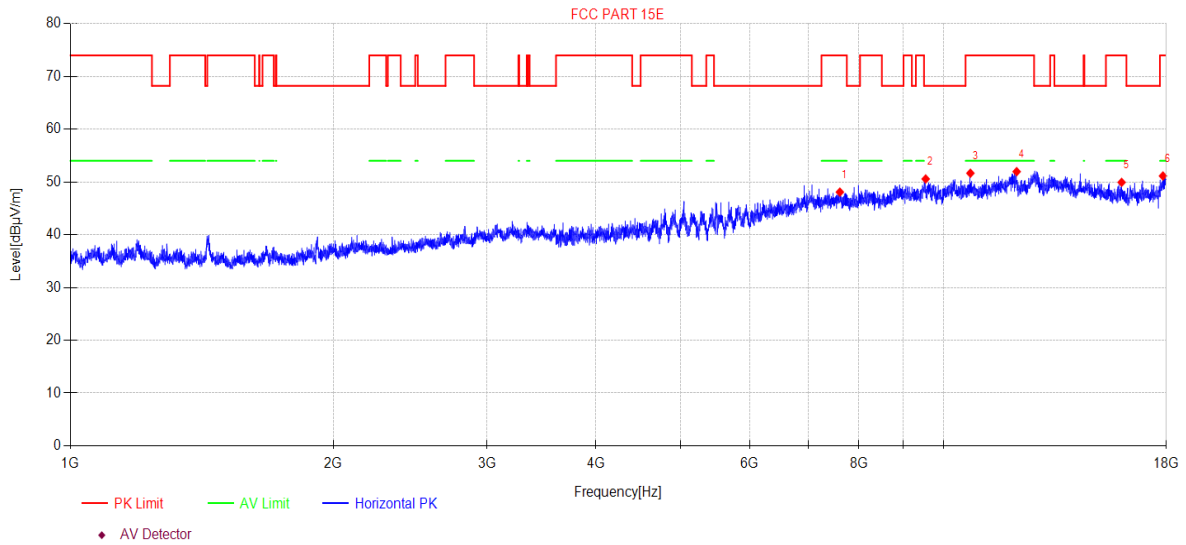

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	7609.64	44.82	7.84	36.42	-41.00	48.08	74.00	25.92	PK	Horizontal
2	9542.06	44.38	7.84	38.40	-40.05	50.57	68.20	17.63	PK	Horizontal
3	10736.24	44.91	8.18	39.10	-40.53	51.66	74.00	22.34	PK	Horizontal
4	12128.84	43.46	8.43	39.10	-39.03	51.96	74.00	22.04	PK	Horizontal
5	15997.88	42.06	10.37	37.90	-40.40	49.93	74.00	24.07	PK	Horizontal
6	17839.45	39.76	11.24	40.78	-40.64	51.14	74.00	22.86	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\15
Memo: 11A 5500

Test Graph

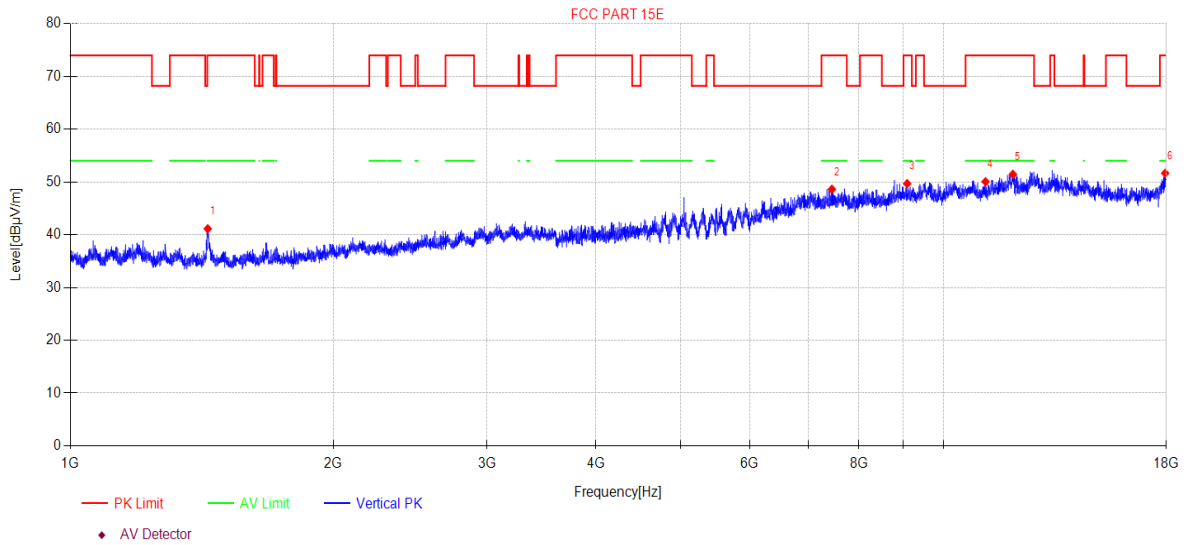

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	1436.80	51.23	3.16	25.60	-38.86	41.13	74.00	32.87	PK	Vertical
2	7450.78	45.26	7.86	36.50	-41.00	48.62	74.00	25.38	PK	Vertical
3	9087.20	43.37	7.61	38.20	-39.50	49.68	74.00	24.32	PK	Vertical
4	11173.09	42.95	8.22	39.10	-40.22	50.05	74.00	23.95	PK	Vertical
5	12010.25	43.17	8.28	38.92	-38.91	51.46	74.00	22.54	PK	Vertical
6	17942.87	39.57	11.31	41.46	-40.68	51.66	74.00	22.34	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\16
Memo: 11A 5580

Test Graph

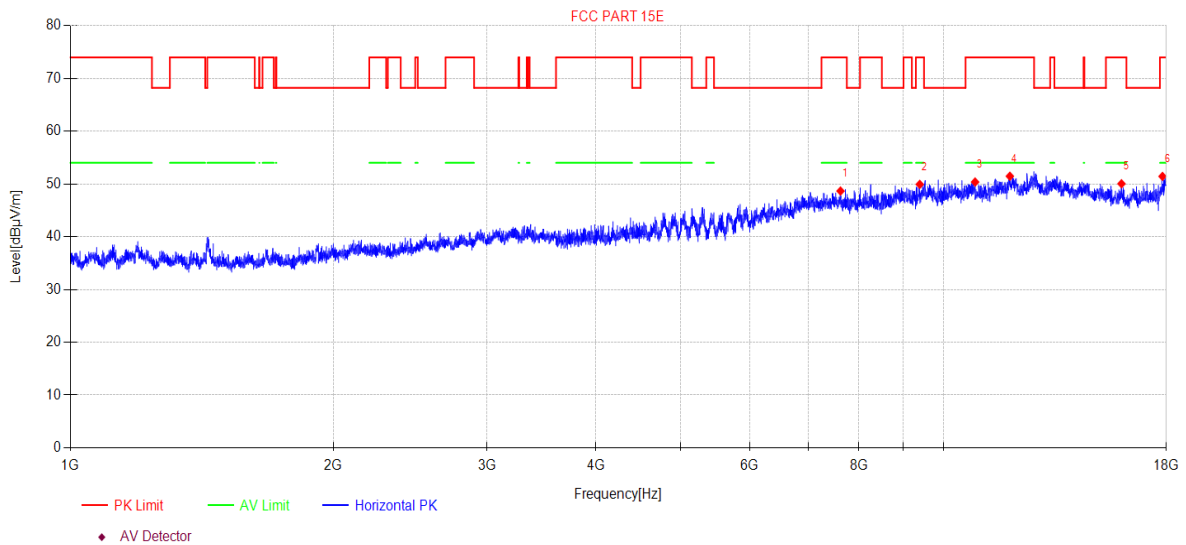

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	7622.85	45.37	7.84	36.45	-41.00	48.66	74.00	25.34	PK	Horizontal
2	9394.30	43.62	7.77	38.40	-39.87	49.92	74.00	24.08	PK	Horizontal
3	10870.50	43.59	8.19	39.10	-40.51	50.37	74.00	23.63	PK	Horizontal
4	11913.45	43.44	8.26	38.81	-39.04	51.47	74.00	22.53	PK	Horizontal
5	15993.26	42.16	10.37	37.91	-40.40	50.04	74.00	23.96	PK	Horizontal
6	17818.84	40.21	11.23	40.63	-40.63	51.44	74.00	22.56	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\17
Memo: 11A 5580

Test Graph

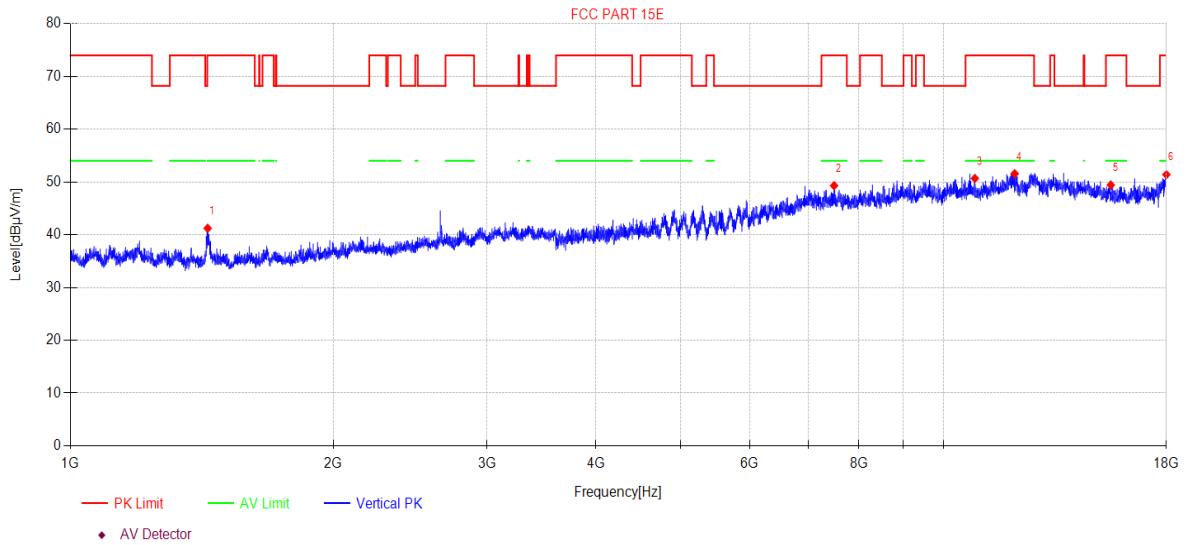

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	1436.38	51.31	3.16	25.60	-38.85	41.22	74.00	32.78	PK	Vertical
2	7493.97	46.03	7.86	36.41	-41.00	49.30	74.00	24.70	PK	Vertical
3	10864.21	43.90	8.19	39.10	-40.51	50.68	74.00	23.32	PK	Vertical
4	12065.91	43.15	8.35	39.03	-38.97	51.56	74.00	22.44	PK	Vertical
5	15546.64	40.86	10.13	38.51	-40.08	49.42	74.00	24.58	PK	Vertical
6	18000.00	38.94	11.35	41.80	-40.70	51.39	74.00	22.61	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\18
Memo: 11A 5700

Test Graph

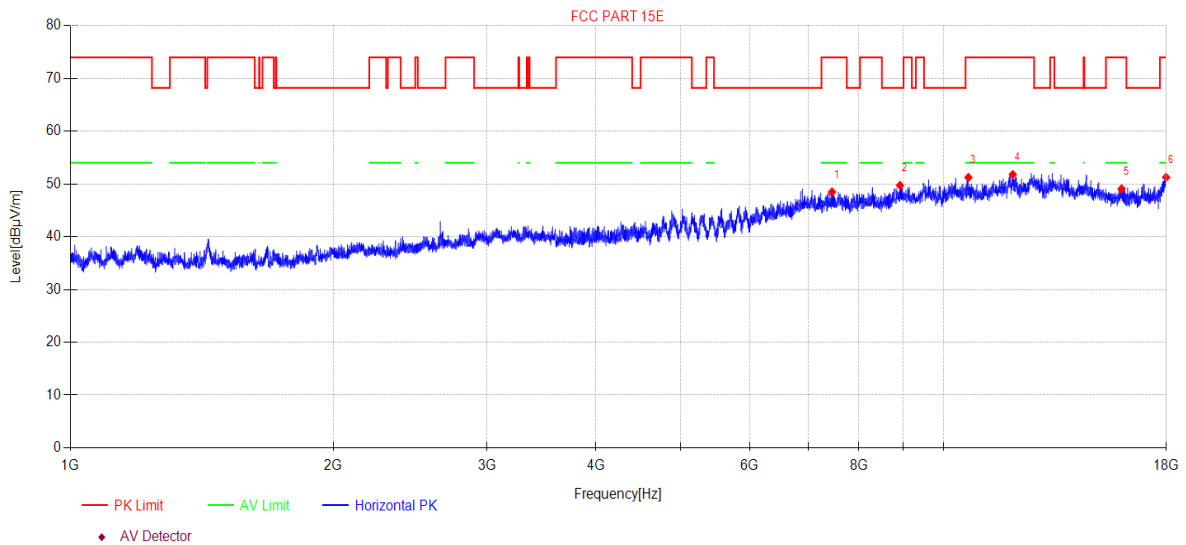

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	7452.93	45.12	7.86	36.49	-41.00	48.47	74.00	25.53	PK	Horizontal
2	8918.09	43.54	7.58	38.14	-39.53	49.73	68.20	18.47	PK	Horizontal
3	10680.53	44.51	8.17	39.08	-40.53	51.23	74.00	22.77	PK	Horizontal
4	12006.78	43.51	8.28	38.91	-38.91	51.79	74.00	22.21	PK	Horizontal
5	15997.88	41.19	10.37	37.90	-40.40	49.06	74.00	24.94	PK	Horizontal
6	17989.60	38.88	11.34	41.74	-40.70	51.26	74.00	22.74	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\19
Memo: 11A 5700

Test Graph

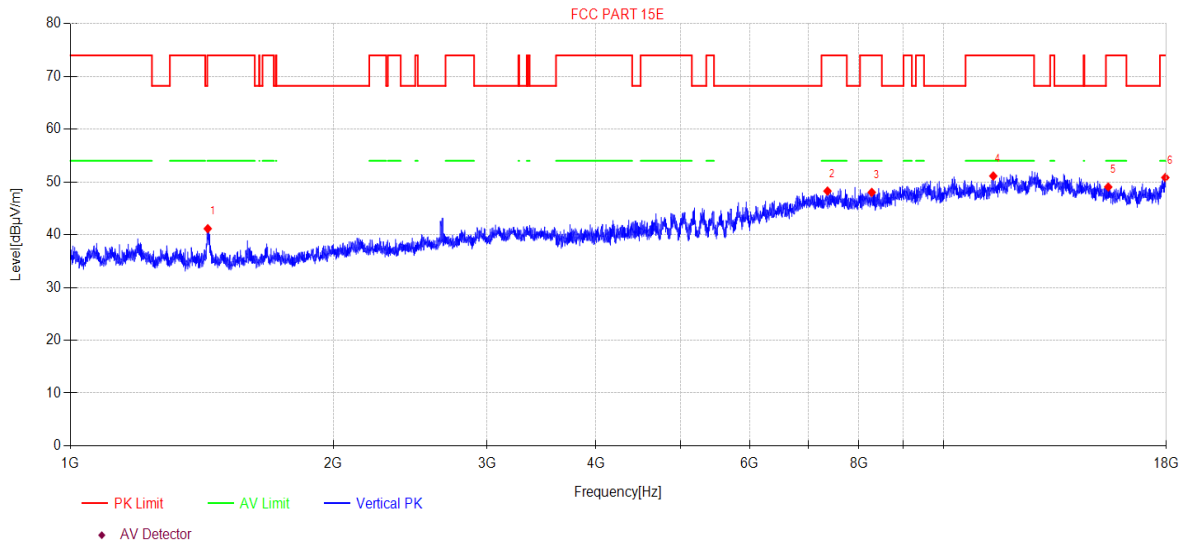

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	1436.80	51.25	3.16	25.60	-38.86	41.15	74.00	32.85	PK	Vertical
2	7365.14	44.91	7.87	36.50	-41.00	48.28	74.00	25.72	PK	Vertical
3	8277.31	43.71	7.73	37.15	-40.56	48.03	74.00	25.97	PK	Vertical
4	11404.72	43.65	8.23	39.10	-39.85	51.13	74.00	22.87	PK	Vertical
5	15443.64	40.33	10.07	38.66	-40.01	49.05	74.00	24.95	PK	Vertical
6	17953.24	38.68	11.32	41.52	-40.68	50.84	74.00	23.16	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 1G 5.8GWIFI\1
Memo: 11A 5745

Test Graph

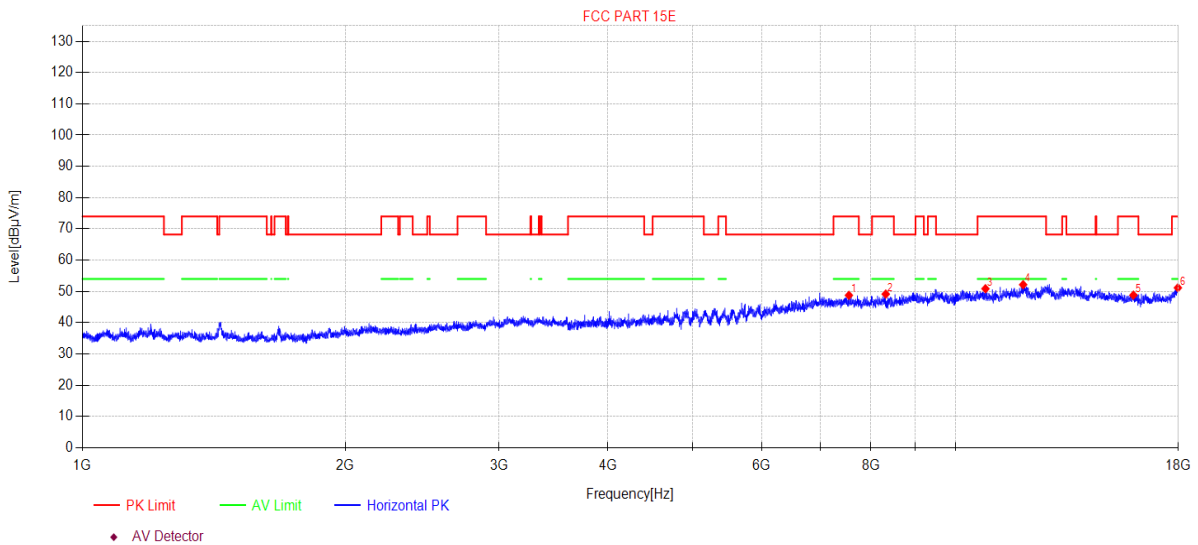

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	7550.49	45.51	7.85	36.40	-41.00	48.76	74.00	25.24	PK	Horizontal
2	8320.48	44.71	7.72	37.20	-40.49	49.14	74.00	24.86	PK	Horizontal
3	10823.47	44.10	8.19	39.10	-40.52	50.87	74.00	23.13	PK	Horizontal
4	11954.84	44.01	8.27	38.85	-38.97	52.16	74.00	21.84	PK	Horizontal
5	15988.64	40.93	10.36	37.92	-40.39	48.82	74.00	25.18	PK	Horizontal
6	17979.20	38.84	11.34	41.68	-40.69	51.17	74.00	22.83	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 1G 5.8GWIFI\2
Memo: 11A 5745

Test Graph

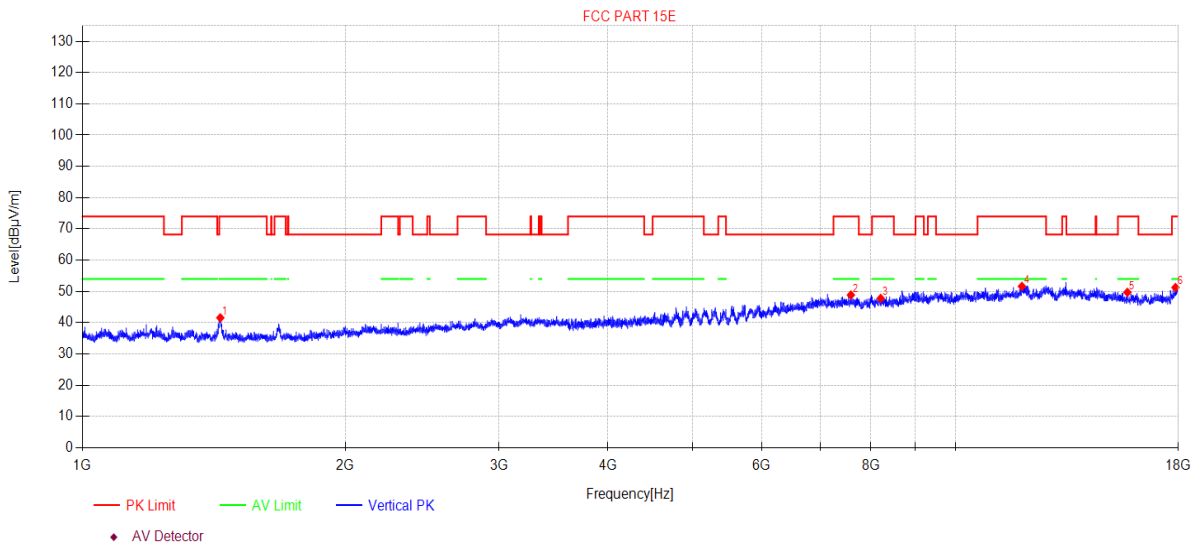

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	1438.87	51.67	3.17	25.60	-38.86	41.58	74.00	32.42	PK	Vertical
2	7589.87	45.62	7.84	36.40	-41.00	48.86	74.00	25.14	PK	Vertical
3	8210.59	43.60	7.74	37.10	-40.66	47.78	74.00	26.22	PK	Vertical
4	11916.89	43.56	8.27	38.82	-39.03	51.62	74.00	22.38	PK	Vertical
5	15736.50	41.46	10.23	38.26	-40.22	49.73	74.00	24.27	PK	Vertical
6	17865.25	39.69	11.26	40.96	-40.65	51.26	74.00	22.74	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 1G 5.8GWIFI\4
Memo: 11A 5785

Test Graph

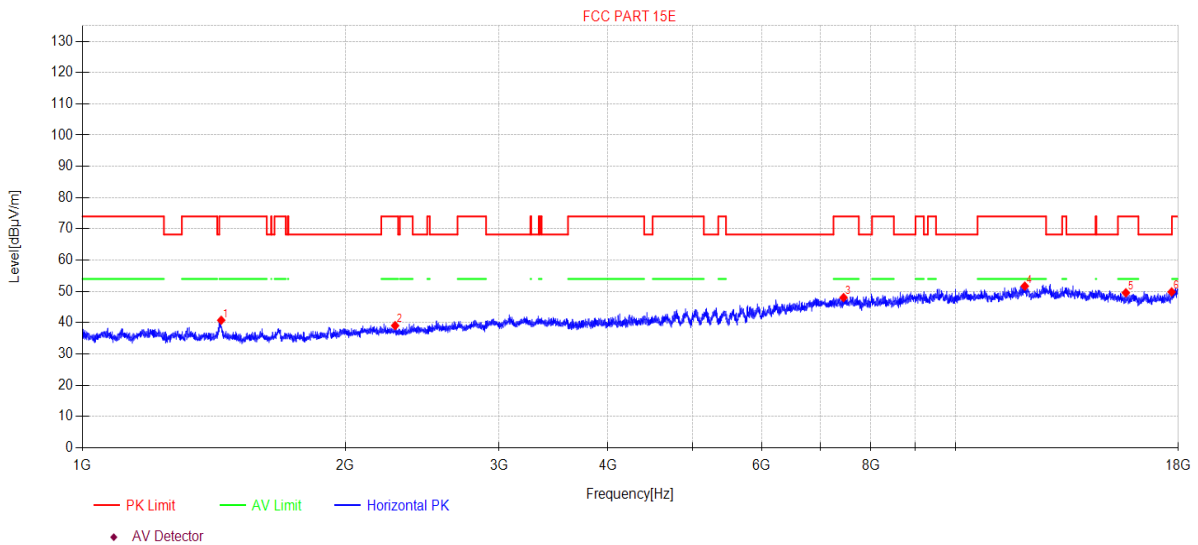

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	1442.21	50.88	3.17	25.60	-38.86	40.79	74.00	33.21	PK	Horizontal
2	2281.49	47.65	4.13	27.30	-40.01	39.07	74.00	34.93	PK	Horizontal
3	7444.32	44.68	7.86	36.50	-41.00	48.04	74.00	25.96	PK	Horizontal
4	12006.78	43.42	8.28	38.91	-38.91	51.70	74.00	22.30	PK	Horizontal
5	15672.96	41.23	10.19	38.33	-40.17	49.58	74.00	24.42	PK	Horizontal
6	17685.45	39.55	11.13	39.74	-40.57	49.85	68.20	18.35	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 1G 5.8GWIFI\3
Memo: 11A 5785

Test Graph

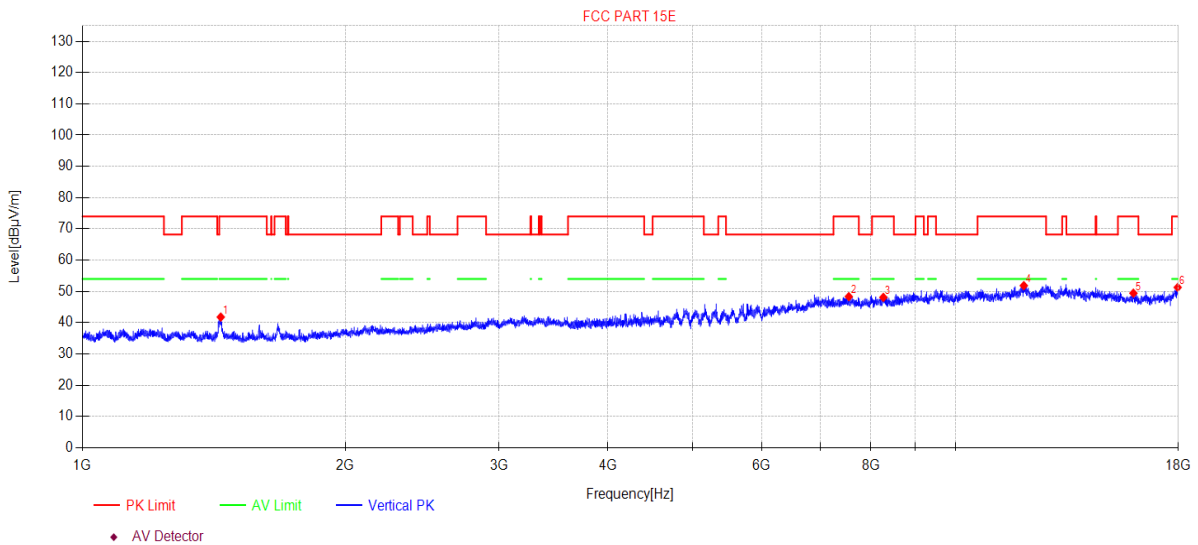

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	1440.54	51.89	3.17	25.60	-38.86	41.80	74.00	32.20	PK	Vertical
2	7548.31	45.10	7.85	36.40	-41.00	48.35	74.00	25.65	PK	Vertical
3	8267.74	43.80	7.73	37.14	-40.57	48.10	74.00	25.90	PK	Vertical
4	11975.59	43.64	8.27	38.88	-38.94	51.85	74.00	22.15	PK	Vertical
5	15988.64	41.55	10.36	37.92	-40.39	49.44	74.00	24.56	PK	Vertical
6	17968.81	39.04	11.33	41.61	-40.69	51.29	74.00	22.71	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 1G 5.8GWIFI\5
Memo: 11A 5825

Test Graph

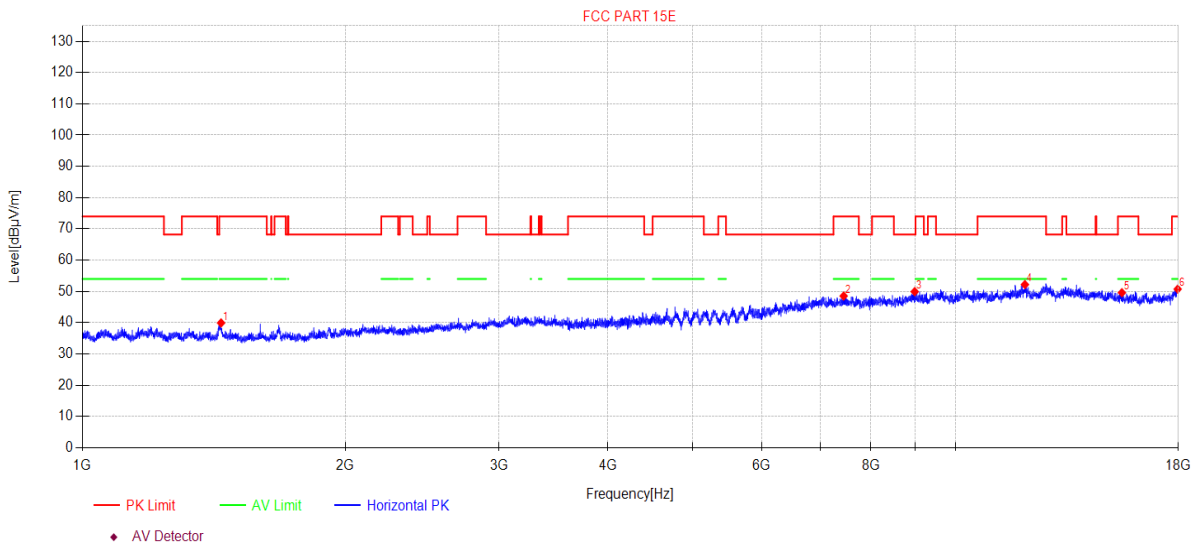


Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	1441.79	50.02	3.17	25.60	-38.86	39.93	74.00	34.07	PK	Horizontal
2	7446.47	45.19	7.86	36.50	-41.00	48.55	74.00	25.45	PK	Horizontal
3	8980.16	43.61	7.56	38.20	-39.43	49.94	68.20	18.26	PK	Horizontal
4	12010.25	43.91	8.28	38.92	-38.91	52.20	74.00	21.80	PK	Horizontal
5	15510.74	40.98	10.11	38.58	-40.06	49.61	74.00	24.39	PK	Horizontal
6	17968.81	38.51	11.33	41.61	-40.69	50.76	74.00	23.24	PK	Horizontal

- Note:
- Level = Reading + Cable Loss + Antenna Factor + AMP
 - If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 - Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 1G 5.8GWIFI\6
Memo: 11A 5825

Test Graph

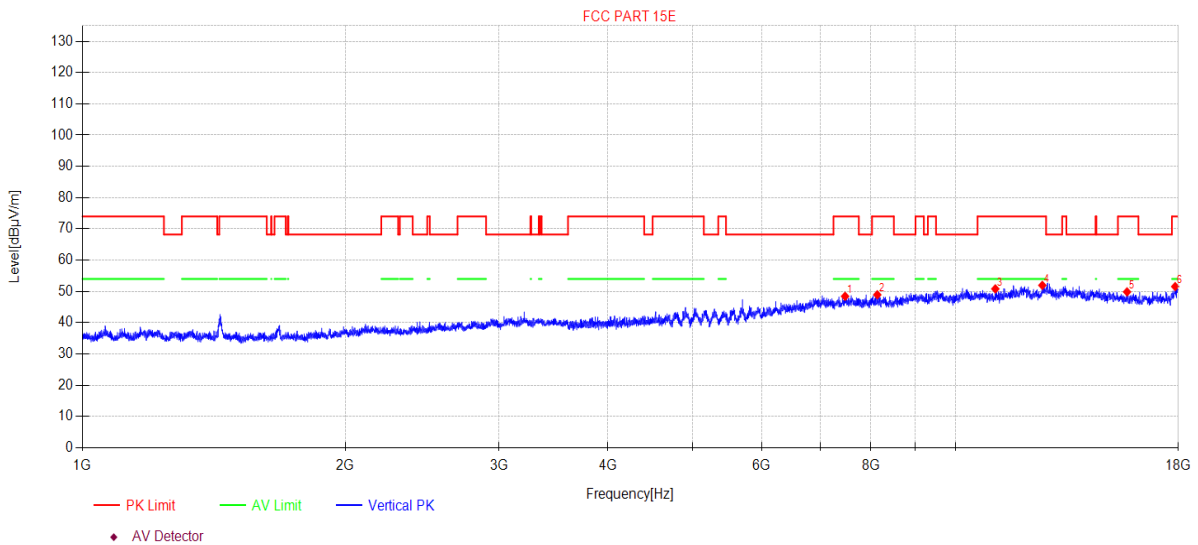


Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	7474.50	45.14	7.86	36.45	-41.00	48.45	74.00	25.55	PK	Vertical
2	8137.36	44.96	7.76	37.00	-40.78	48.94	74.00	25.06	PK	Vertical
3	11108.69	43.83	8.22	39.10	-40.33	50.82	74.00	23.18	PK	Vertical
4	12575.02	43.25	9.01	39.18	-39.48	51.96	74.00	22.04	PK	Vertical
5	15722.86	41.57	10.22	38.28	-40.21	49.86	74.00	24.14	PK	Vertical
6	17849.77	40.10	11.25	40.85	-40.64	51.56	74.00	22.44	PK	Vertical

Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

12. Band Edge Compliance

12.1. Block diagram of test setup

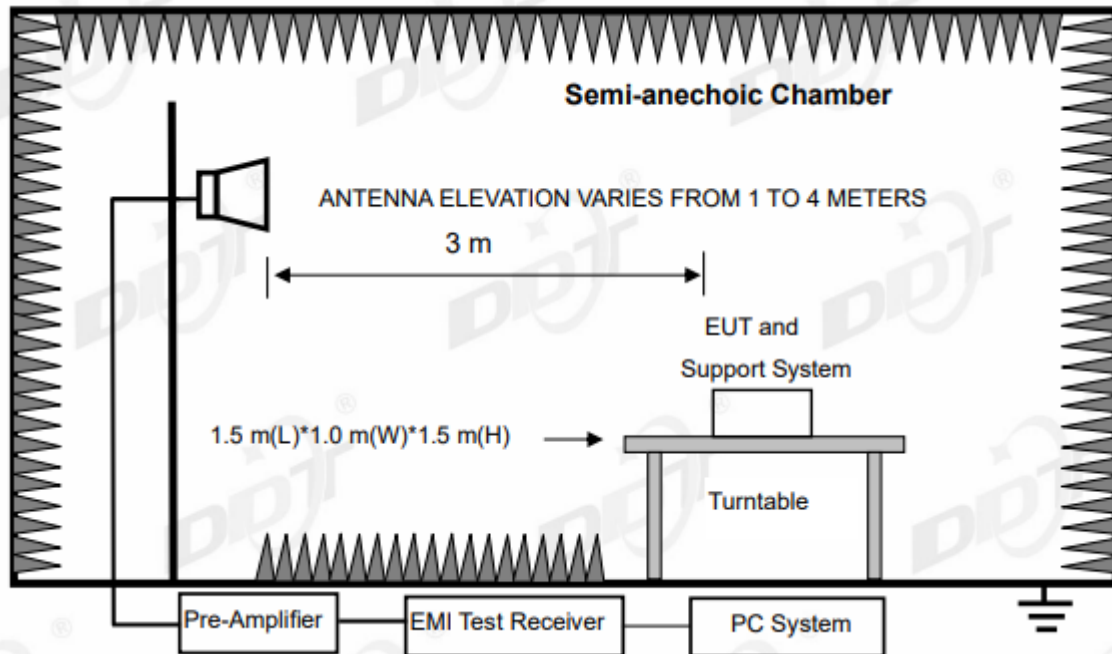

12.2. Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - ⊙ All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

12.3. Test Procedure

Same with Emissions in Restricted Frequency Bands except change investigated frequency range from 5.15-5.25 GHz, 5250-5350 GHz, 5470-5725 GHz, 5.725-5.85 GHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

12.4. Test result


Pass. (See below detailed test result)

Note: As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz. However, out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz peak emission limit

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\22
Memo: 11A 5180

Test Graph

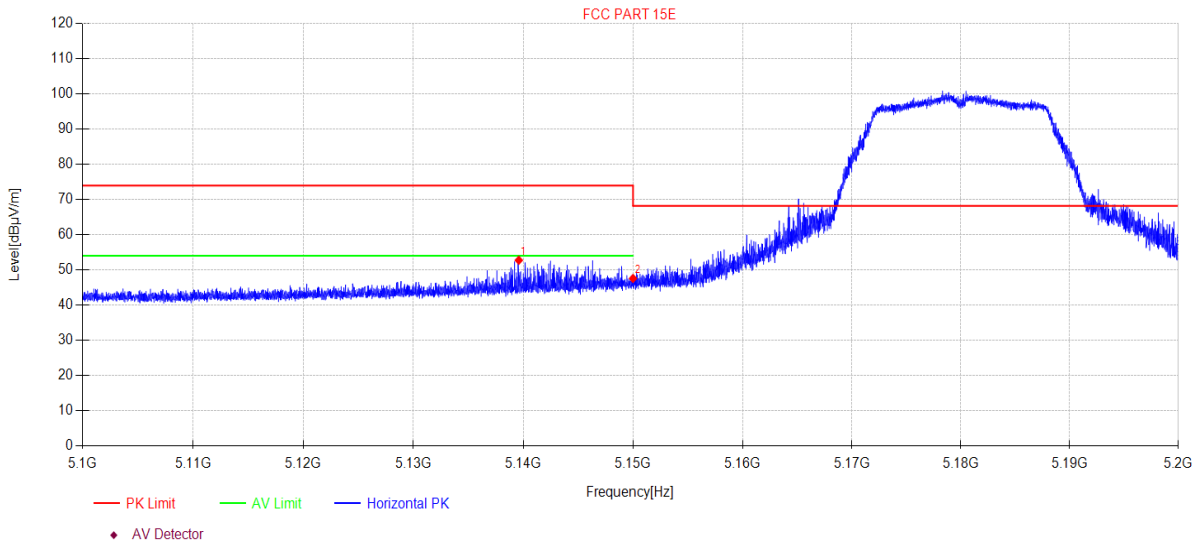

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5139.59	54.70	6.19	32.90	-41.04	52.75	74.00	21.25	PK	Horizontal
2	5150.00	49.50	6.21	32.90	-41.04	47.57	68.20	20.63	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\23
Memo: 11A 5180

Test Graph

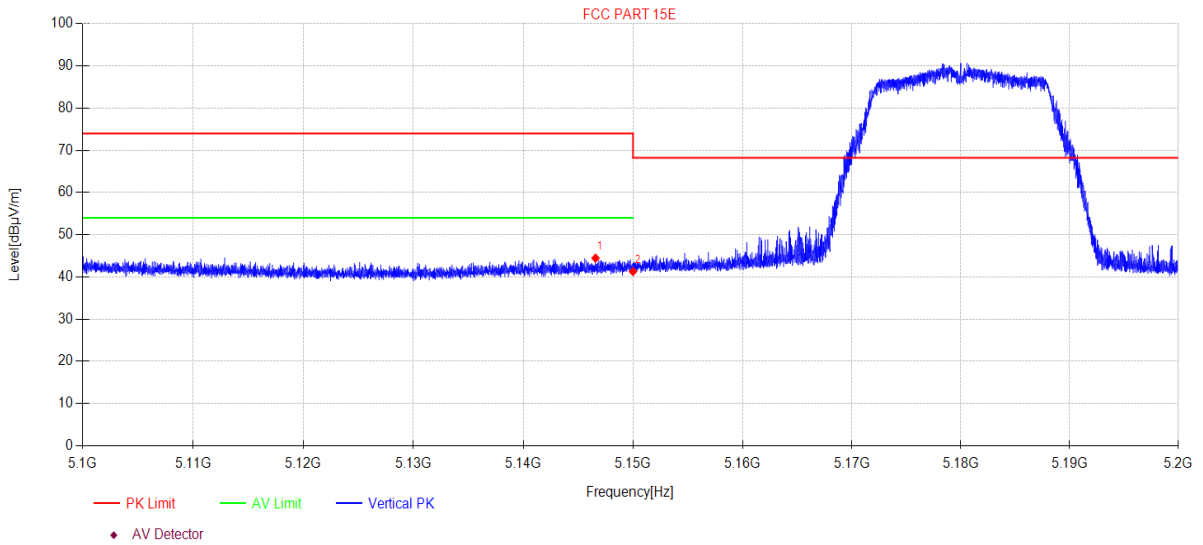

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5146.58	46.39	6.21	32.90	-41.04	44.46	74.00	29.54	PK	Vertical
2	5150.00	43.21	6.21	32.90	-41.04	41.28	68.20	26.92	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\38
Memo: 11A 5320

Test Graph

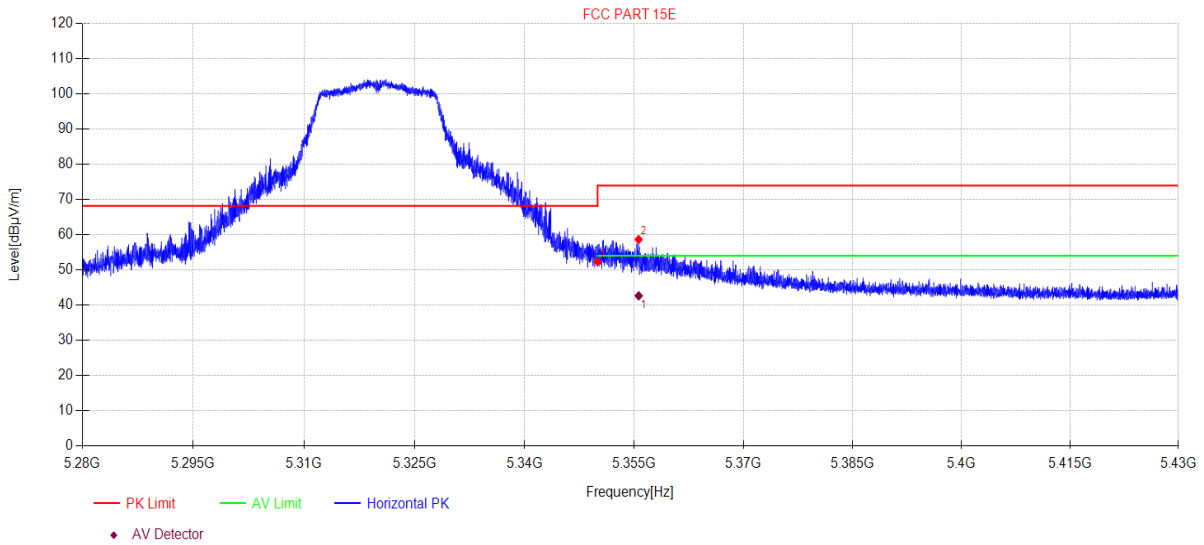

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	53.76	6.61	32.90	-40.96	52.31	74.00	21.69	PK	Horizontal
2	5355.62	60.09	6.62	32.90	-40.96	58.65	74.00	15.35	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5355.62	44.22	6.62	32.90	-40.96	42.63	54.00	11.37	AV	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\39
Memo: 11A 5320

Test Graph

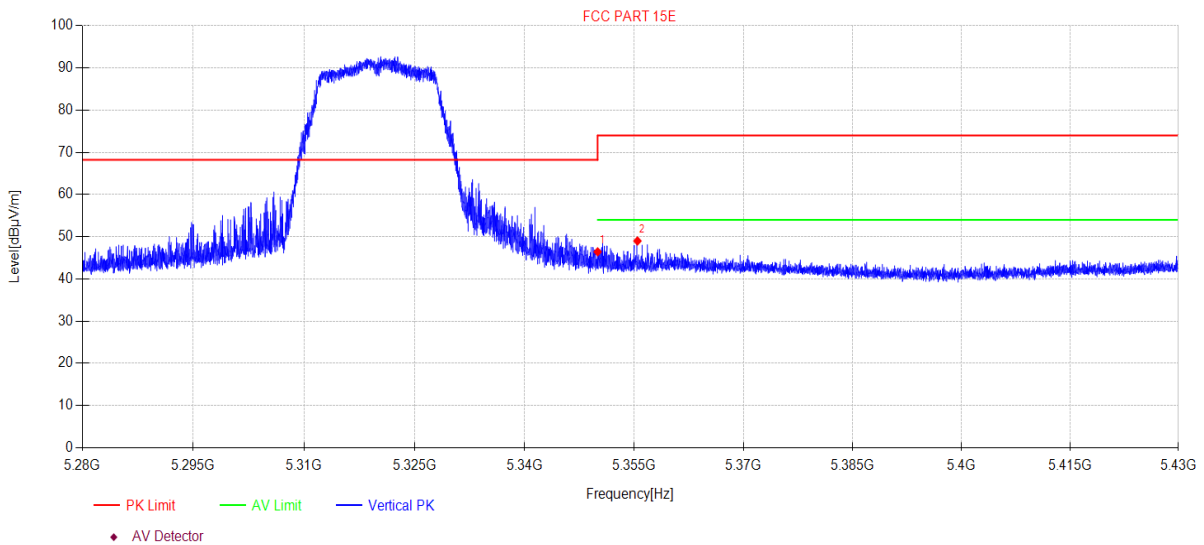

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	47.88	6.61	32.90	-40.96	46.43	74.00	27.57	PK	Vertical
2	5355.45	50.43	6.62	32.90	-40.96	48.99	74.00	25.01	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI44
Memo: 11A 5500

Test Graph

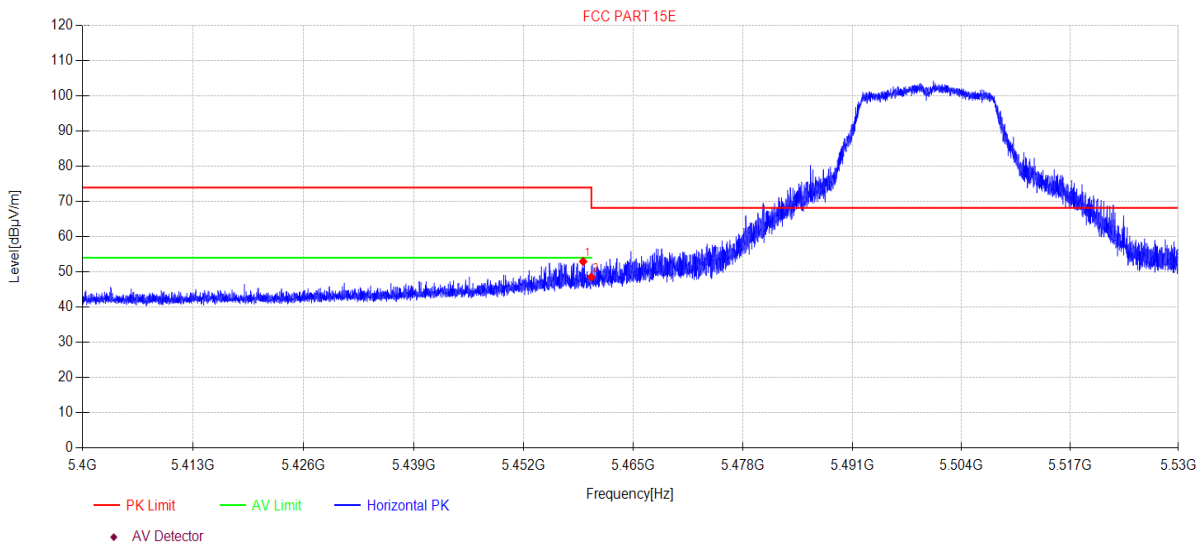

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5459.02	54.15	6.82	32.90	-40.92	52.95	74.00	21.05	PK	Horizontal
2	5460.00	49.74	6.82	32.90	-40.92	48.54	68.20	19.66	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI45
Memo: 11A 5500

Test Graph

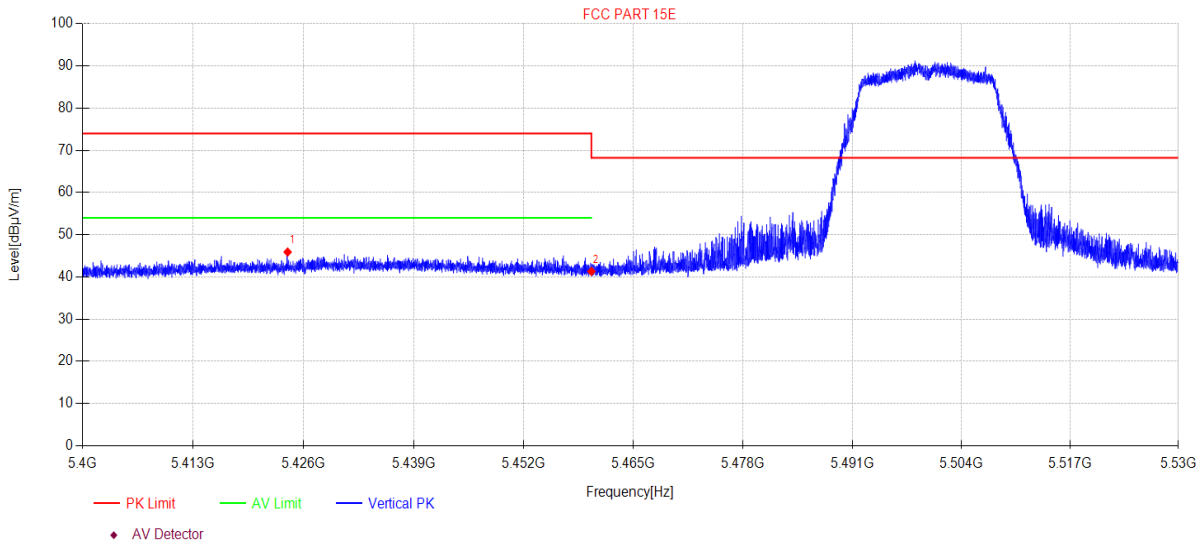

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5424.12	47.18	6.75	32.90	-40.93	45.90	74.00	28.10	PK	Vertical
2	5460.00	42.51	6.82	32.90	-40.92	41.31	68.20	26.89	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\62
Memo: 11A 5700

Test Graph

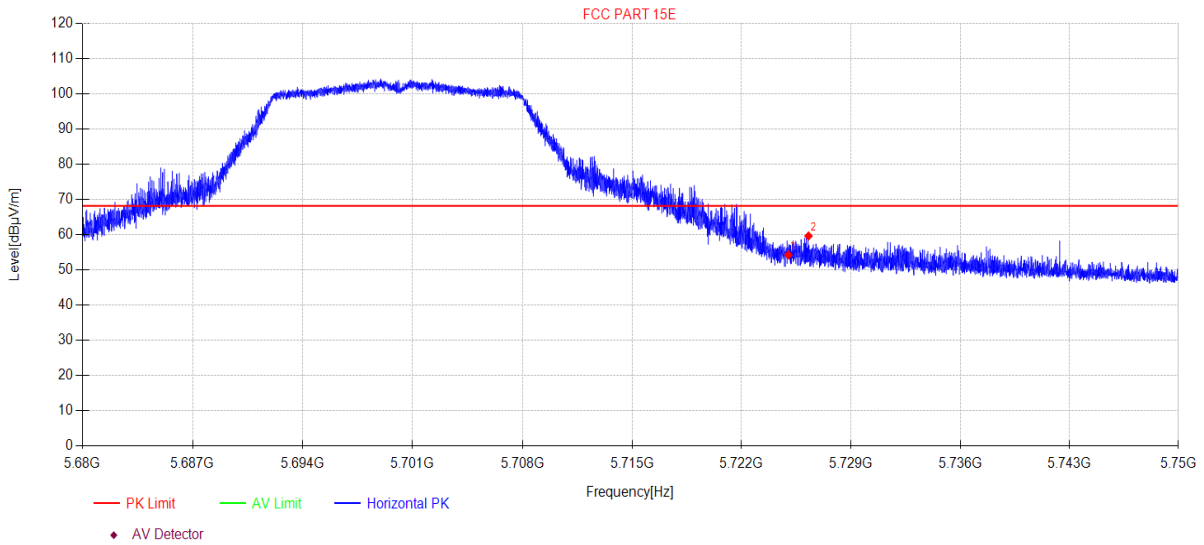

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5725.00	54.27	7.34	33.45	-40.81	54.25	68.20	13.95	PK	Horizontal
2	5726.28	59.66	7.34	33.45	-40.81	59.64	68.20	8.56	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI63
Memo: 11A 5700

Test Graph

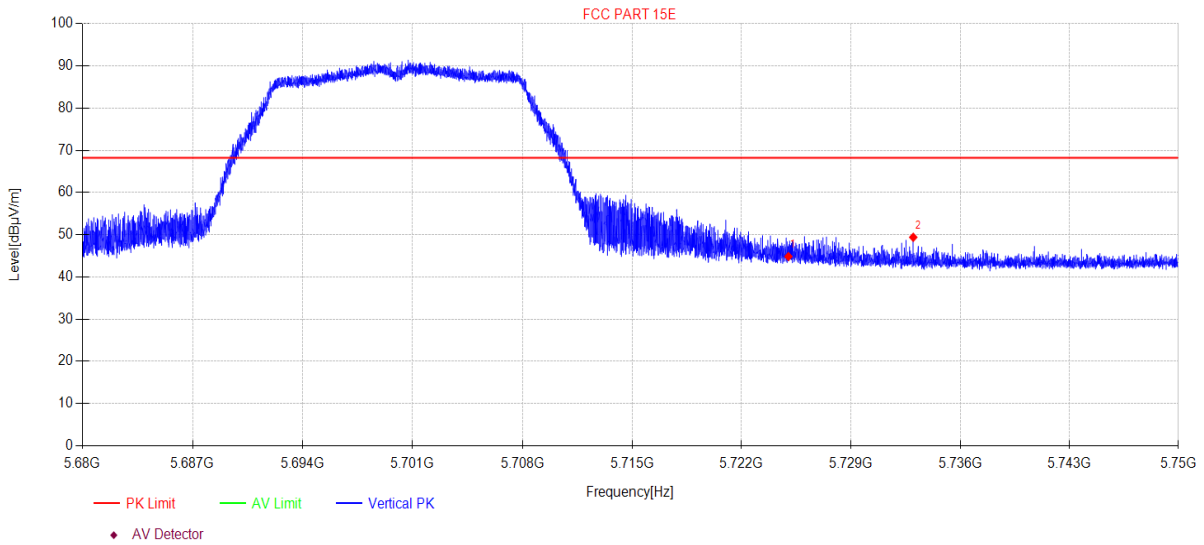

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5725.00	44.86	7.34	33.45	-40.81	44.84	68.20	23.36	PK	Vertical
2	5732.99	49.37	7.36	33.47	-40.81	49.39	68.20	18.81	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\20
Memo: 11N20 5180

Test Graph

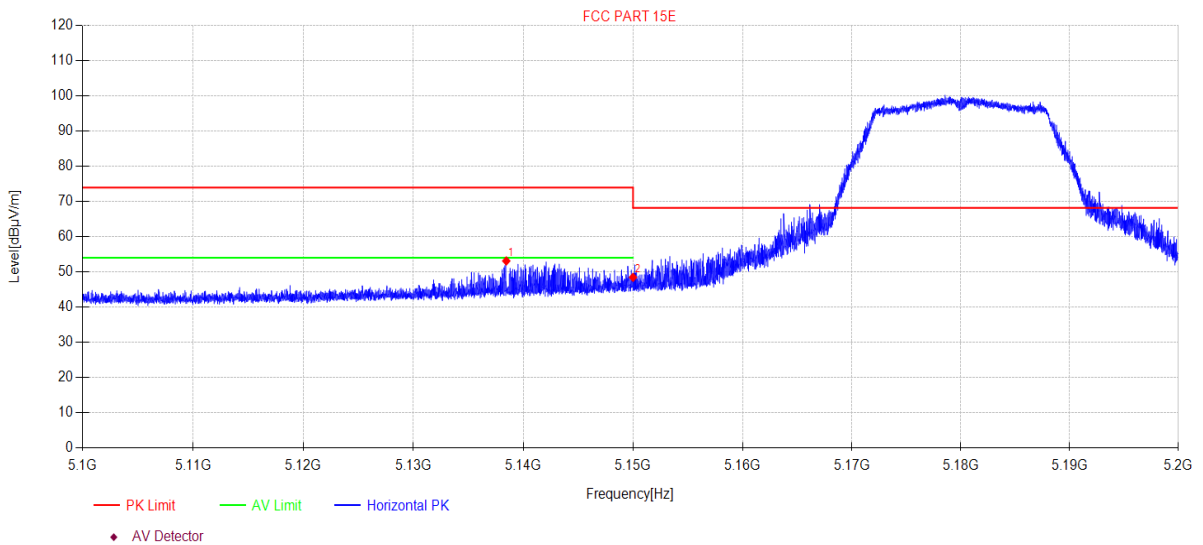

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5138.45	55.06	6.19	32.90	-41.04	53.11	74.00	20.89	PK	Horizontal
2	5150.00	50.39	6.21	32.90	-41.04	48.46	68.20	19.74	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI21
Memo: 11N20 5180

Test Graph

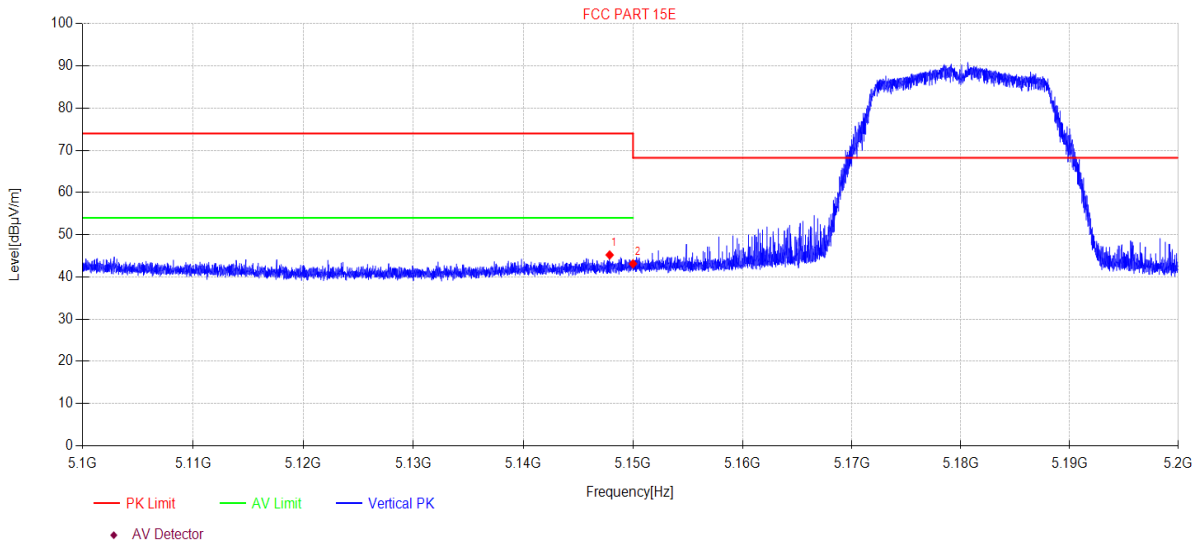

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5147.87	47.14	6.21	32.90	-41.04	45.21	74.00	28.79	PK	Vertical
2	5150.00	45.05	6.21	32.90	-41.04	43.12	68.20	25.08	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI40
Memo: 11N20 5320

Test Graph

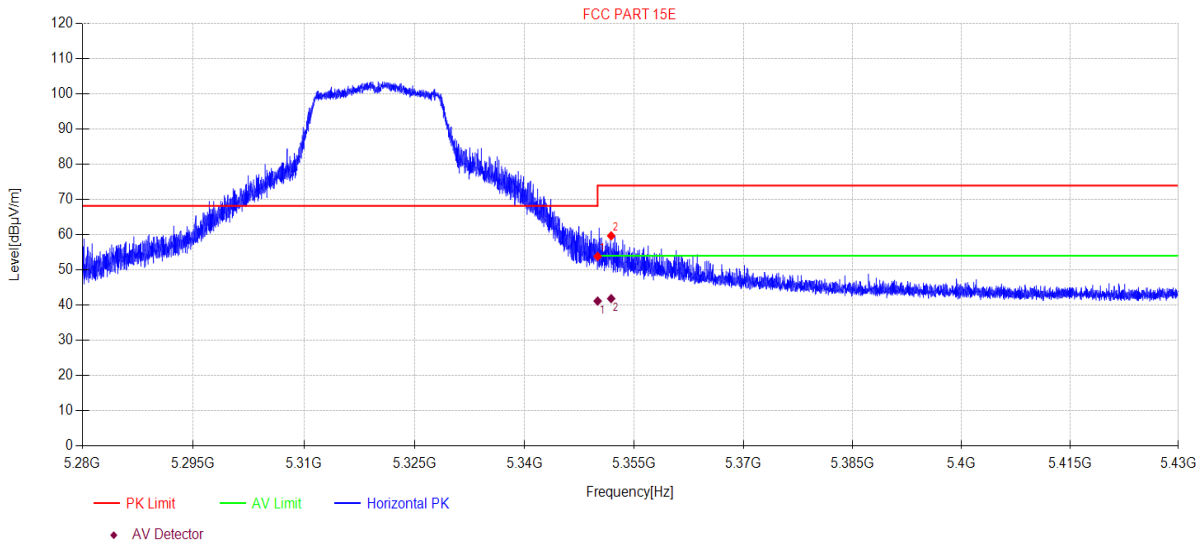

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	55.28	6.61	32.90	-40.96	53.83	74.00	20.17	PK	Horizontal
2	5351.85	61.14	6.61	32.90	-40.96	59.69	74.00	14.31	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	42.59	6.61	32.90	-40.96	41.14	54.00	12.86	AV	Horizontal
2	5351.85	43.28	6.61	32.90	-40.96	41.83	54.00	12.17	AV	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI41
Memo: 11N20 5320

Test Graph

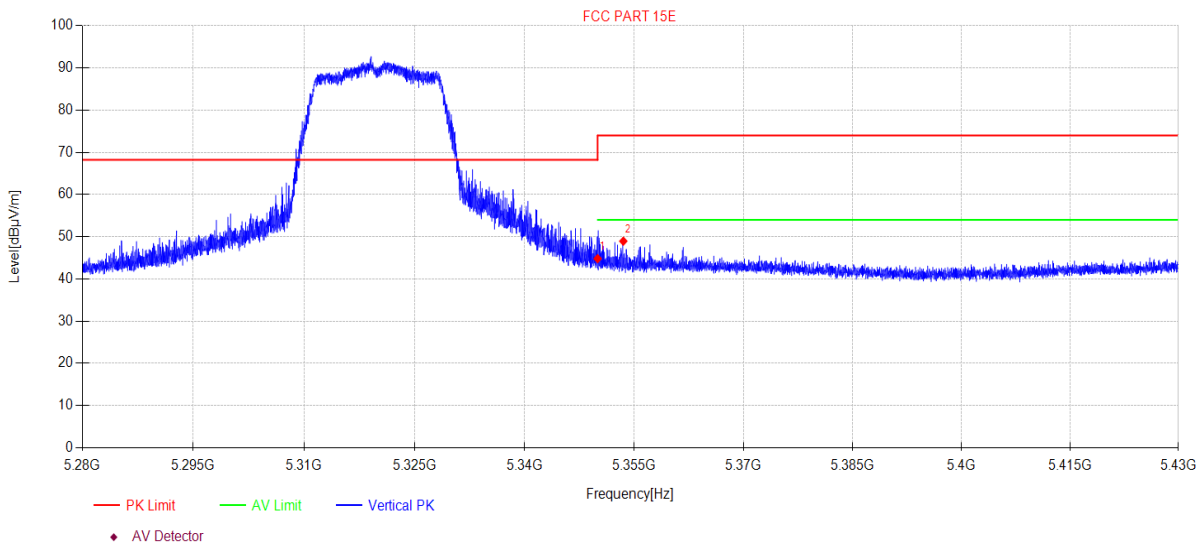

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	46.26	6.61	32.90	-40.96	44.81	74.00	29.19	PK	Vertical
2	5353.52	50.40	6.61	32.90	-40.96	48.95	74.00	25.05	PK	Vertical


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI46
Memo: 11N20 5500

Test Graph

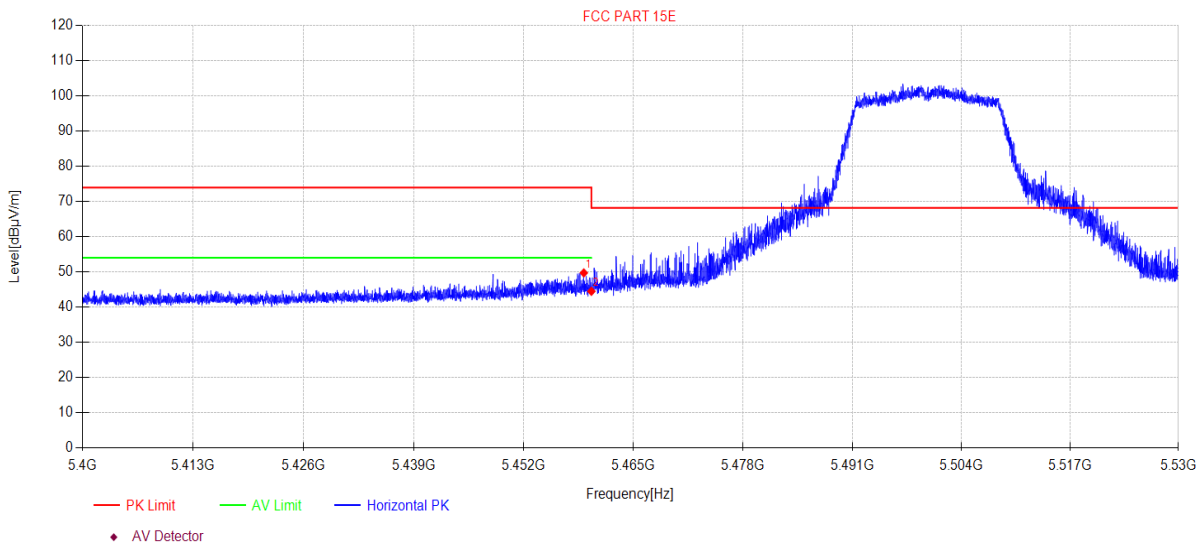

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5459.10	50.91	6.82	32.90	-40.92	49.71	74.00	24.29	PK	Horizontal
2	5460.00	45.69	6.82	32.90	-40.92	44.49	68.20	23.71	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI47
Memo: 11N20 5500

Test Graph

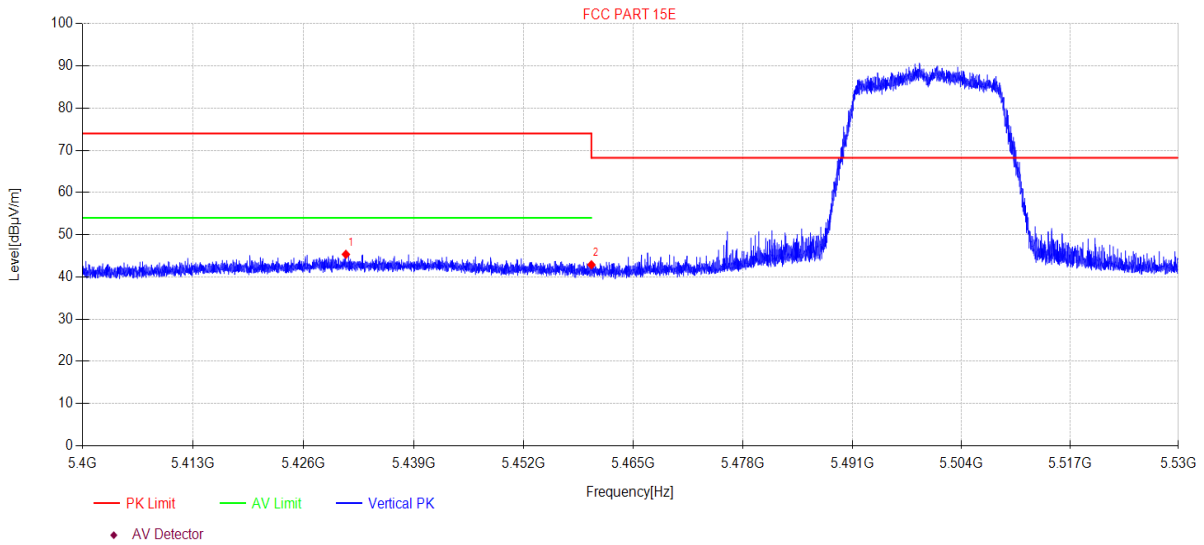

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5430.98	46.62	6.76	32.90	-40.93	45.35	74.00	28.65	PK	Vertical
2	5460.00	44.08	6.82	32.90	-40.92	42.88	68.20	25.32	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\64
Memo: 11N20 5700

Test Graph

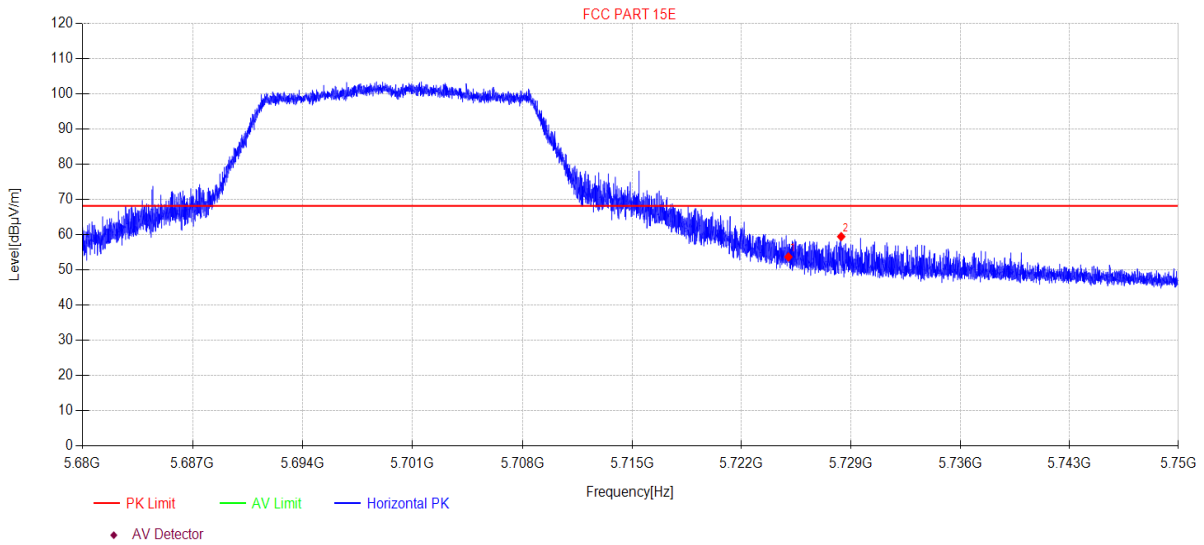

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5725.00	53.72	7.34	33.45	-40.81	53.70	68.20	14.50	PK	Horizontal
2	5728.38	59.46	7.35	33.46	-40.81	59.46	68.20	8.74	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI65
Memo: 11N20 5700

Test Graph

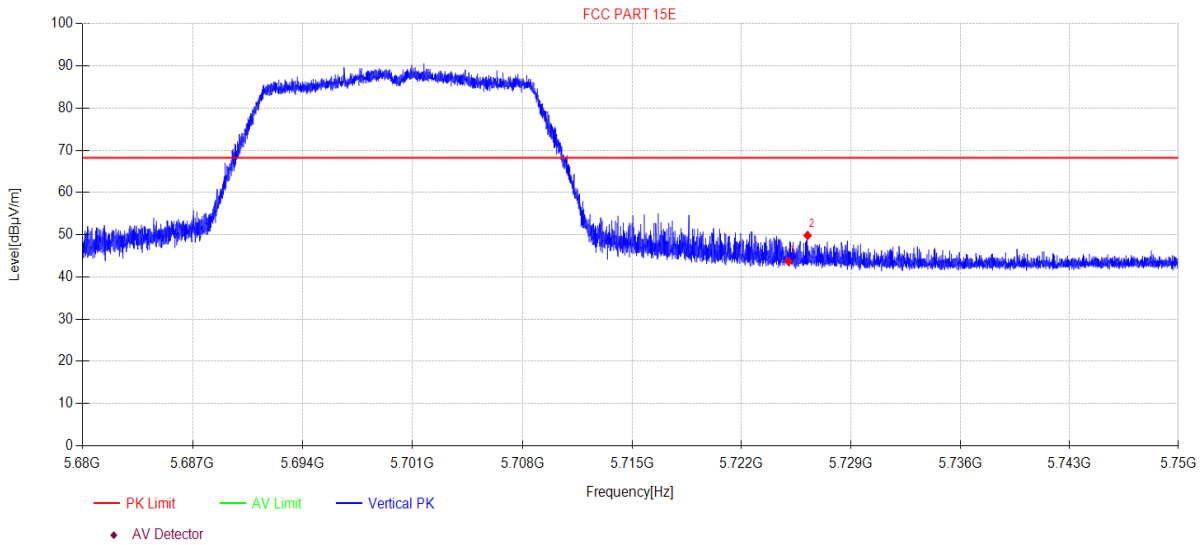

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5725.00	43.69	7.34	33.45	-40.81	43.67	68.20	24.53	PK	Vertical
2	5726.22	49.85	7.34	33.45	-40.81	49.83	68.20	18.37	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI26
Memo: 11N40 5190

Test Graph

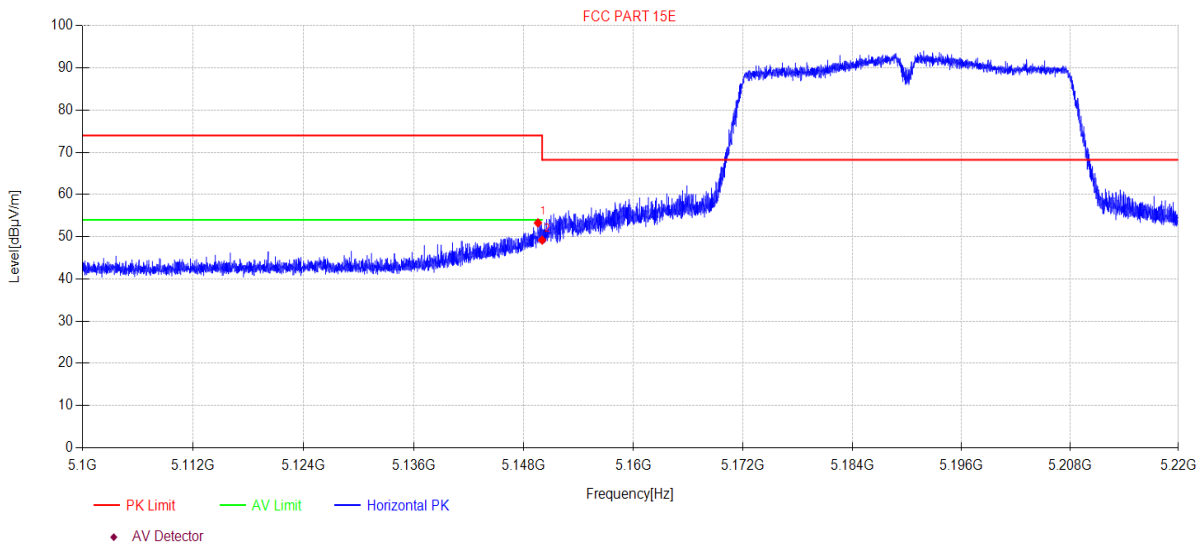

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5149.55	55.22	6.21	32.90	-41.04	53.29	74.00	20.71	PK	Horizontal
2	5150.00	51.13	6.21	32.90	-41.04	49.20	68.20	19.00	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI27
Memo: 11N40 5190

Test Graph

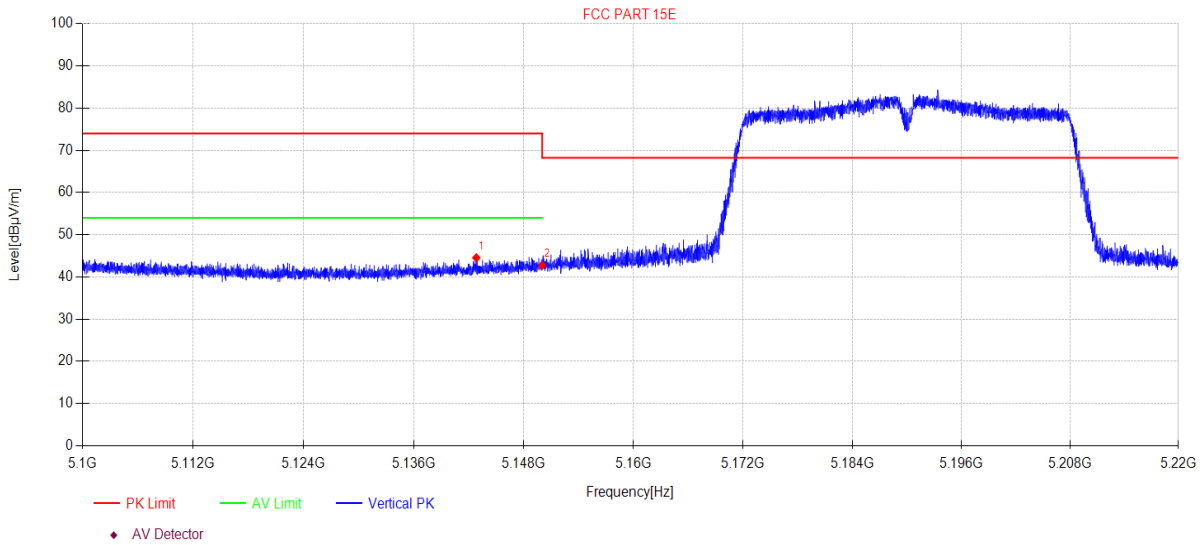

Suspected Data List										
NO	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5142.82	46.47	6.20	32.90	-41.04	44.53	74.00	29.47	PK	Vertical
2	5150.00	44.66	6.21	32.90	-41.04	42.73	68.20	25.47	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\34
Memo: 11N40 5310

Test Graph

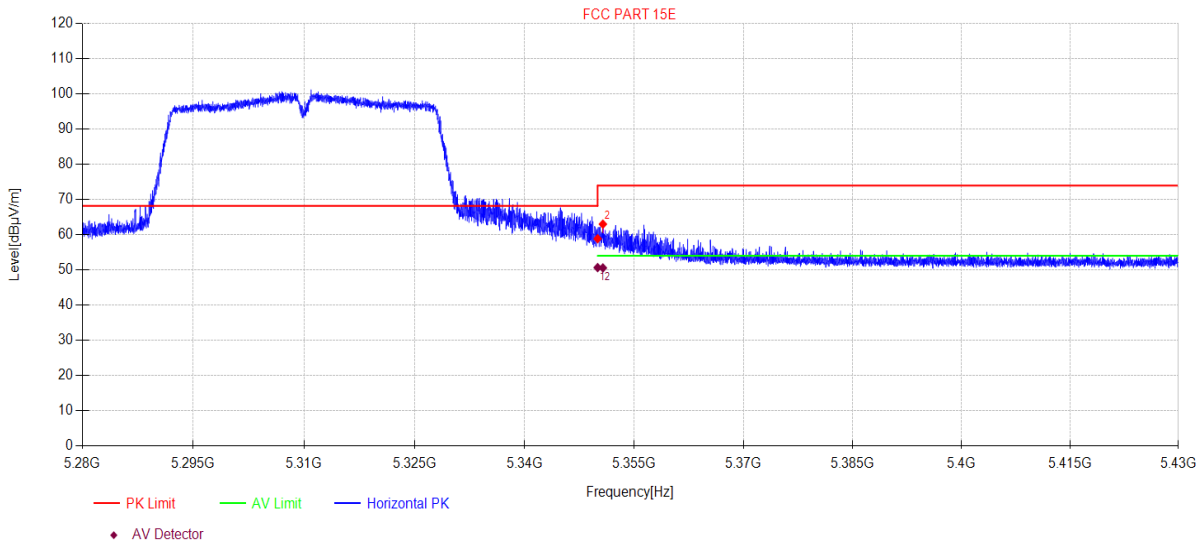

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	50.32	6.61	32.90	-30.96	58.87	74.00	15.13	PK	Horizontal
2	5350.73	54.46	6.61	32.90	-30.96	63.01	74.00	10.99	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	42.11	6.61	32.90	-30.96	50.66	54.00	3.34	AV	Horizontal
2	5350.73	42.17	6.61	32.90	-30.96	50.57	54.00	3.43	AV	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\35
Memo: 11N40 5310

Test Graph

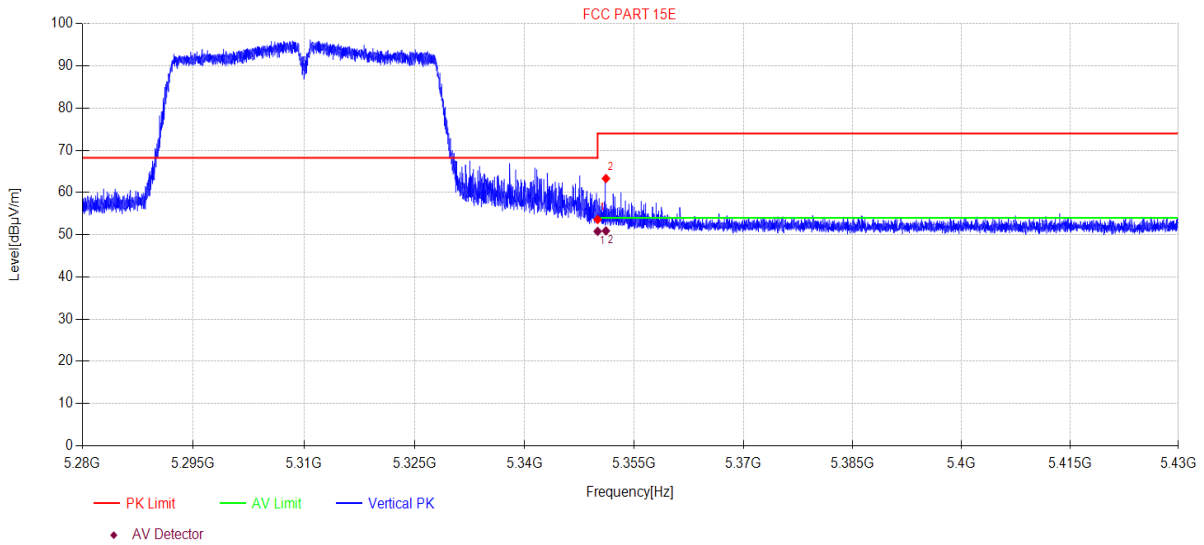

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	45.06	6.61	32.90	-30.96	53.61	74.00	20.39	PK	Vertical
2	5351.13	54.77	6.61	32.90	-30.96	63.32	74.00	10.68	PK	Vertical

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	42.25	6.61	32.90	-30.96	50.80	54.00	3.20	AV	Vertical
2	5351.13	42.36	6.61	32.90	-30.96	50.91	54.00	3.09	AV	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\50
Memo: 11N40 5510

Test Graph

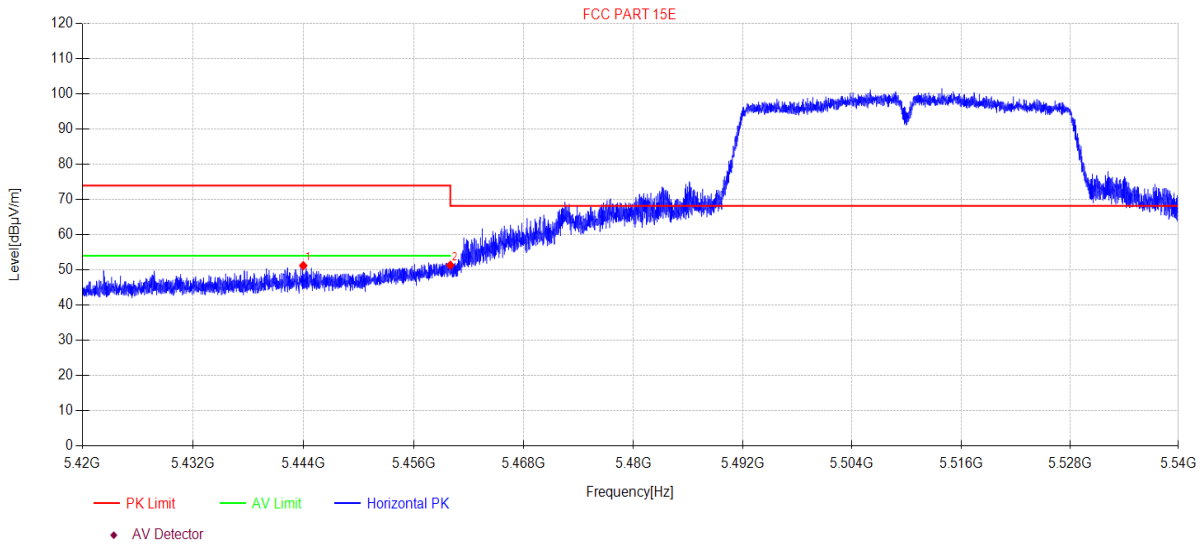

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5443.98	52.45	6.79	32.90	-40.92	51.22	74.00	22.78	PK	Horizontal
2	5460.00	52.55	6.82	32.90	-40.92	51.35	68.20	16.85	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\51
Memo: 11N40 5510

Test Graph

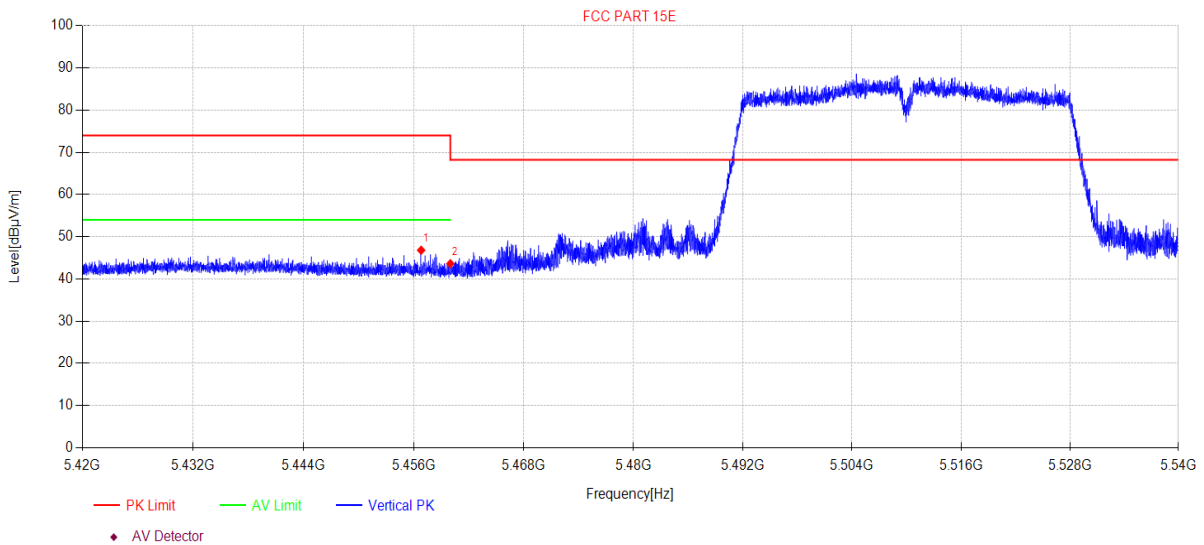

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5456.82	48.00	6.82	32.90	-40.92	46.80	74.00	27.20	PK	Vertical
2	5460.00	44.82	6.82	32.90	-40.92	43.62	68.20	24.58	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\58
Memo: 11N40 5670

Test Graph

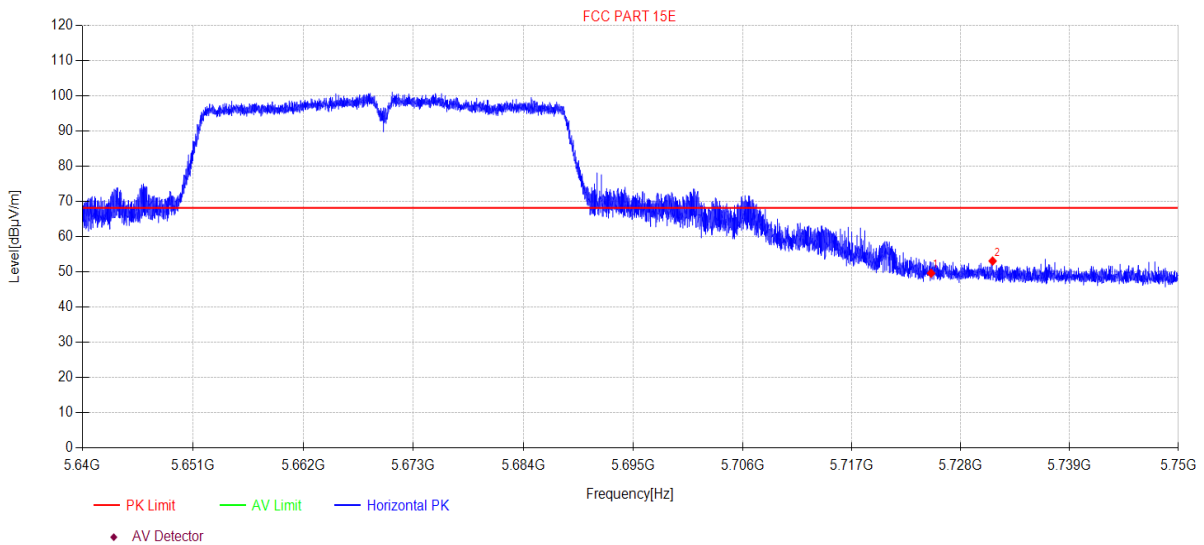

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5725.00	49.64	7.34	33.45	-40.81	49.62	68.20	18.58	PK	Horizontal
2	5731.21	53.09	7.35	33.46	-40.81	53.09	68.20	15.11	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\59
Memo: 11N40 5670

Test Graph

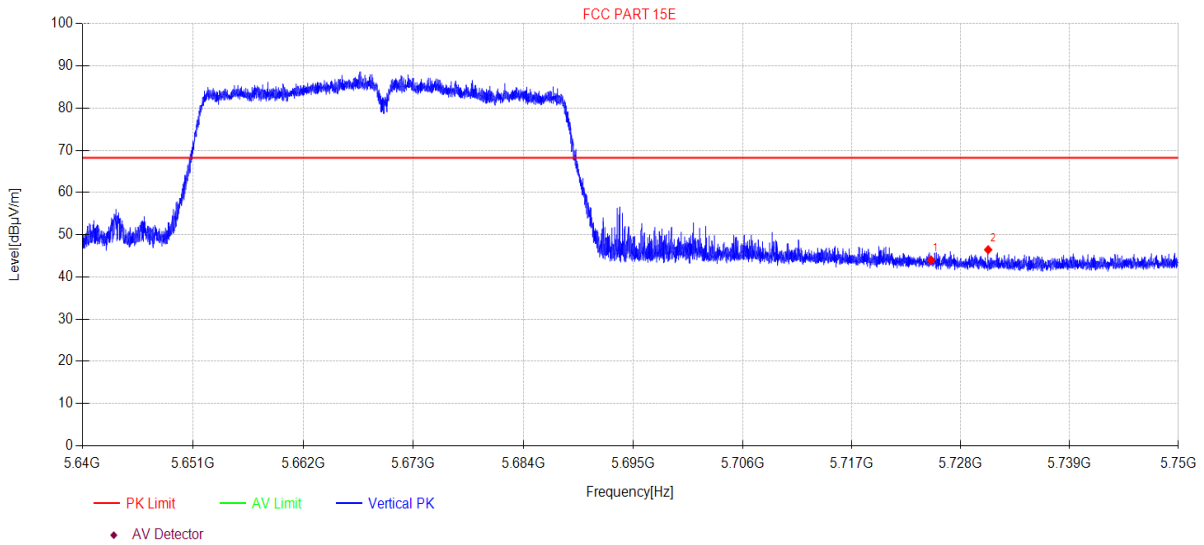

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5725.00	43.99	7.34	33.45	-40.81	43.97	68.20	24.23	PK	Vertical
2	5730.76	46.44	7.35	33.46	-40.81	46.44	68.20	21.76	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\24
Memo: 11AC20 5180

Test Graph

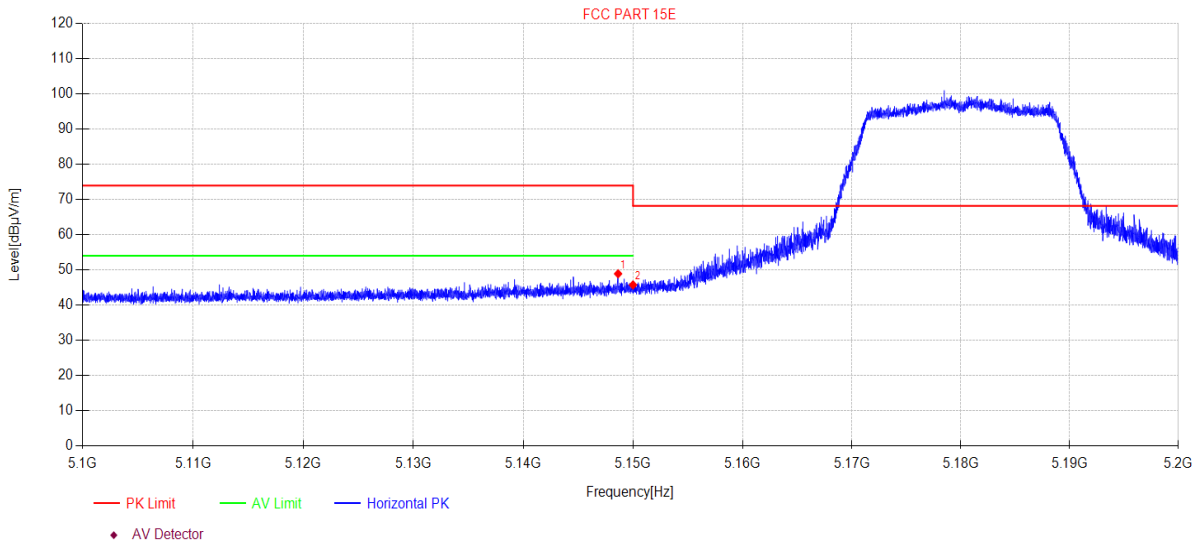

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5148.64	50.83	6.21	32.90	-41.04	48.90	74.00	25.10	PK	Horizontal
2	5150.00	47.66	6.21	32.90	-41.04	45.73	68.20	22.47	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI25
Memo: 11AC20 5180

Test Graph

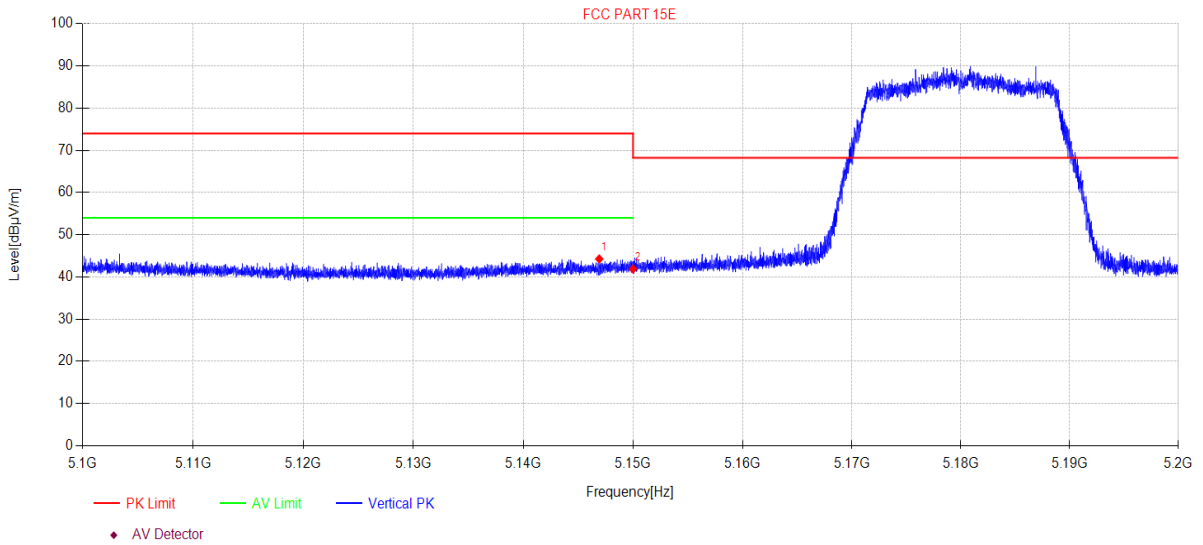

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5146.92	46.19	6.21	32.90	-41.04	44.26	74.00	29.74	PK	Vertical
2	5150.00	43.83	6.21	32.90	-41.04	41.90	68.20	26.30	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI42
Memo: 11AC20 5320

Test Graph

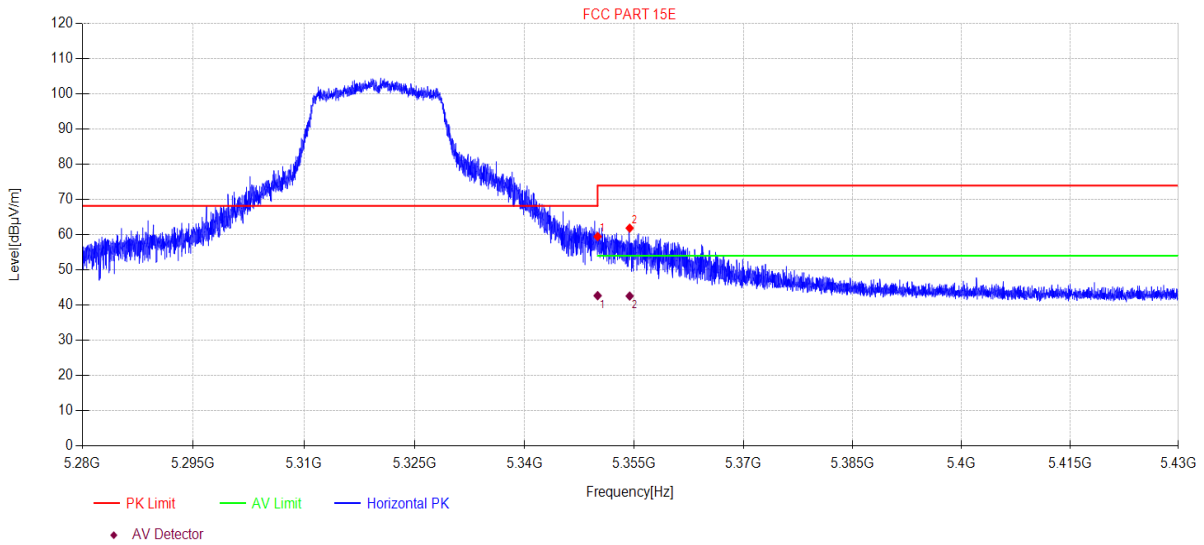

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	60.94	6.61	32.90	-40.96	59.49	74.00	14.51	PK	Horizontal
2	5354.39	63.32	6.61	32.90	-40.96	61.87	74.00	12.13	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	44.12	6.61	32.90	-40.96	42.67	54.00	11.33	AV	Horizontal
2	5354.39	44.16	6.61	32.90	-40.96	42.57	54.00	11.43	AV	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI43
Memo: 11AC20 5320

Test Graph

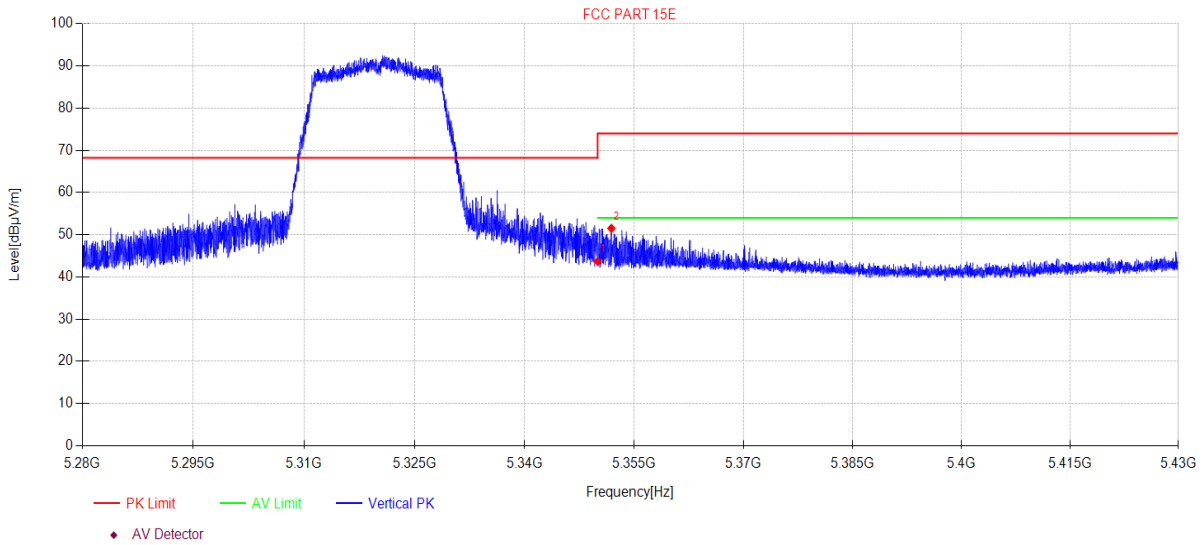

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	45.15	6.61	32.90	-40.96	43.70	74.00	30.30	PK	Vertical
2	5351.88	52.96	6.61	32.90	-40.96	51.51	74.00	22.49	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI48
Memo: 11AC20 5500

Test Graph

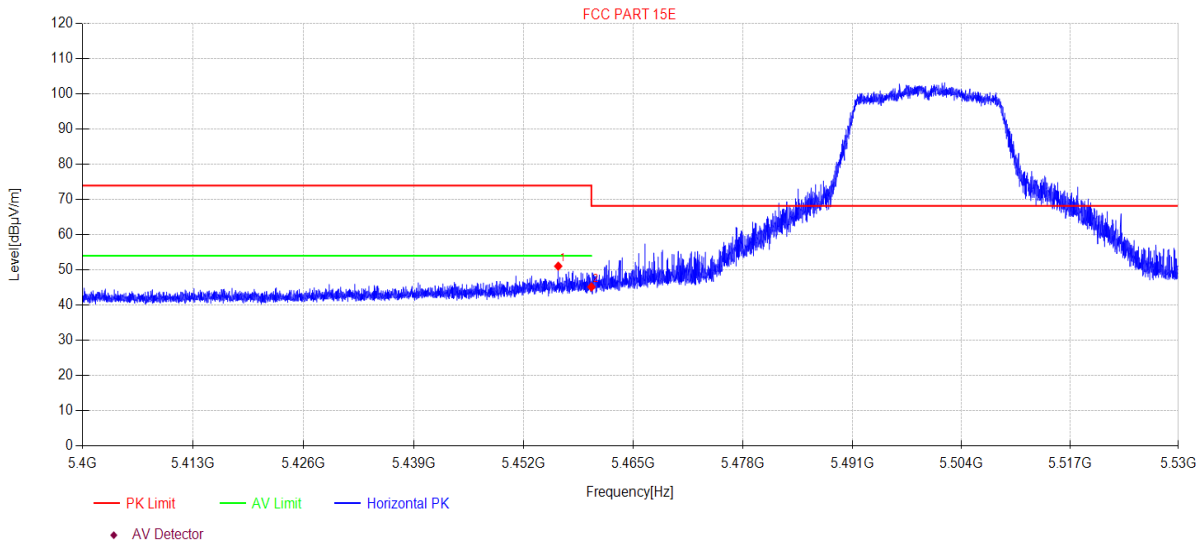

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5456.07	52.27	6.81	32.90	-40.92	51.06	74.00	22.94	PK	Horizontal
2	5460.00	46.37	6.82	32.90	-40.92	45.17	68.20	23.03	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI49
Memo: 11AC20 5500

Test Graph

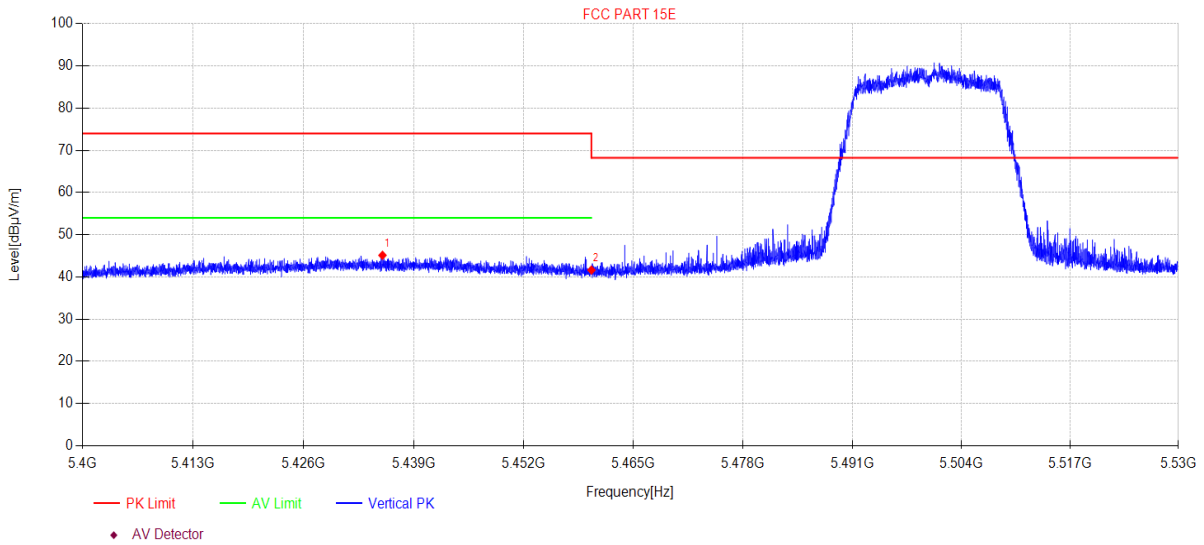

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5435.30	46.39	6.77	32.90	-40.93	45.13	74.00	28.87	PK	Vertical
2	5460.00	42.82	6.82	32.90	-40.92	41.62	68.20	26.58	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\66
Memo: 11AC20 5700

Test Graph

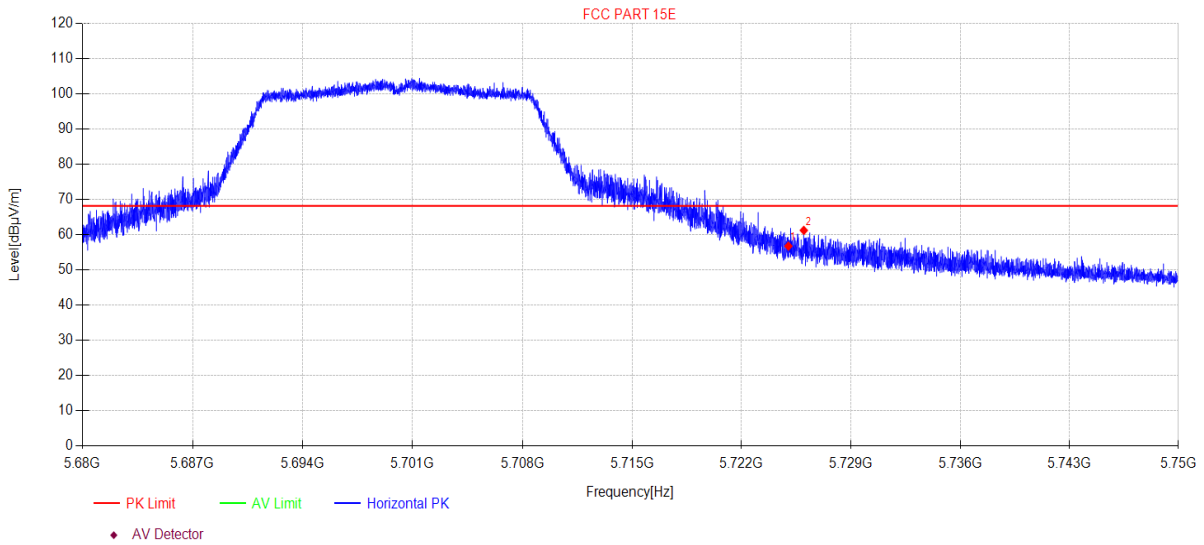

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5725.00	56.78	7.34	33.45	-40.81	56.76	68.20	11.44	PK	Horizontal
2	5725.98	61.26	7.34	33.45	-40.81	61.24	68.20	6.96	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\67
Memo: 11AC20 5700

Test Graph

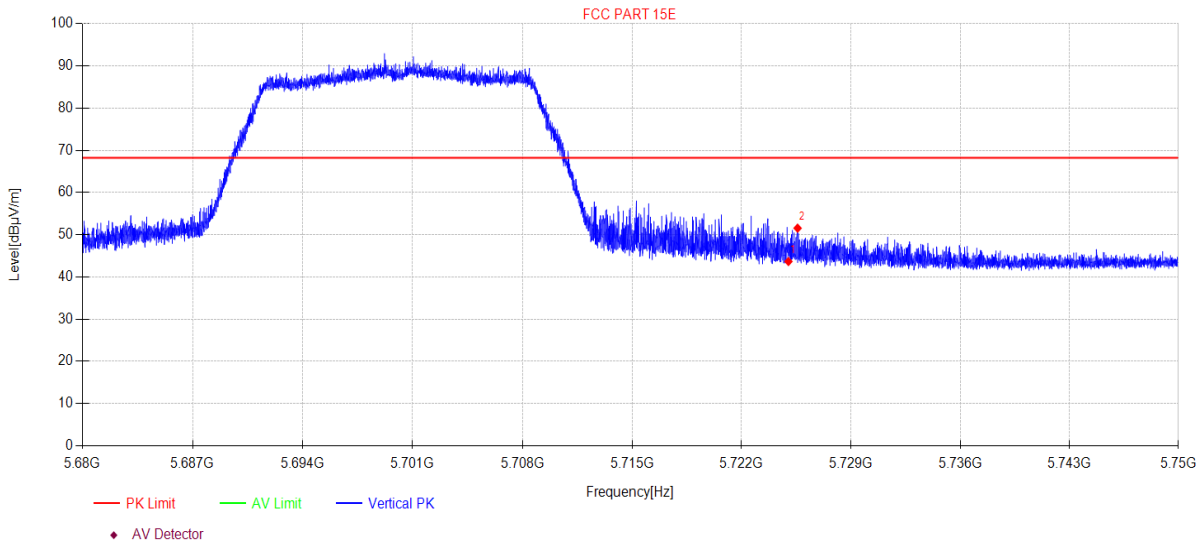

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5725.00	43.68	7.34	33.45	-40.81	43.66	68.20	24.54	PK	Vertical
2	5725.58	51.57	7.34	33.45	-40.81	51.55	68.20	16.65	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\28
Memo: 11AC40 5190

Test Graph

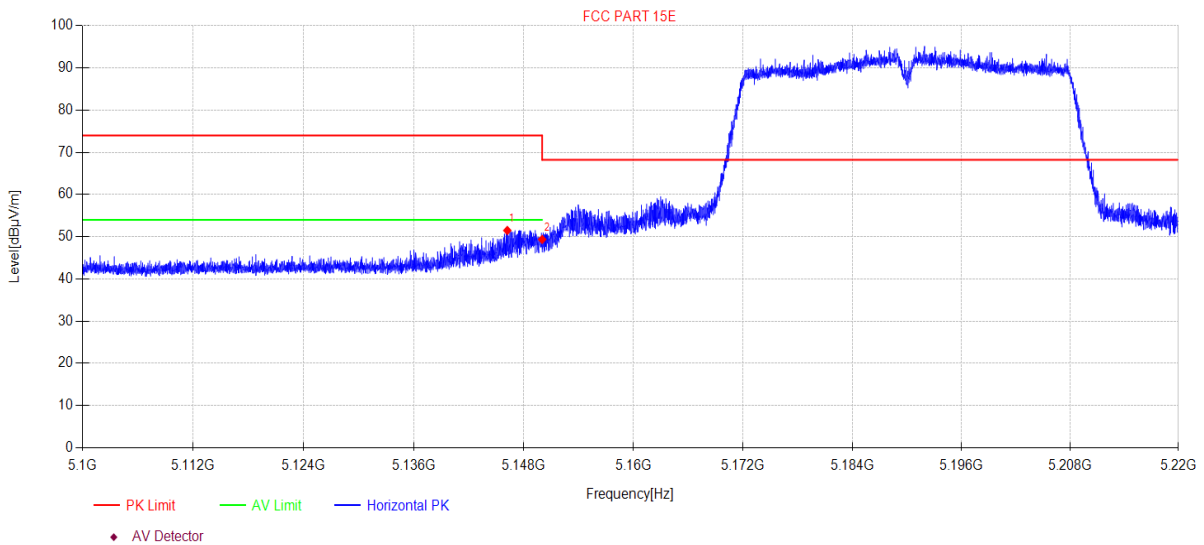

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5146.20	53.41	6.21	32.90	-41.04	51.48	74.00	22.52	PK	Horizontal
2	5150.00	51.30	6.21	32.90	-41.04	49.37	68.20	18.83	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: Tx mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\29
Memo: 11AC40 5190

Test Graph

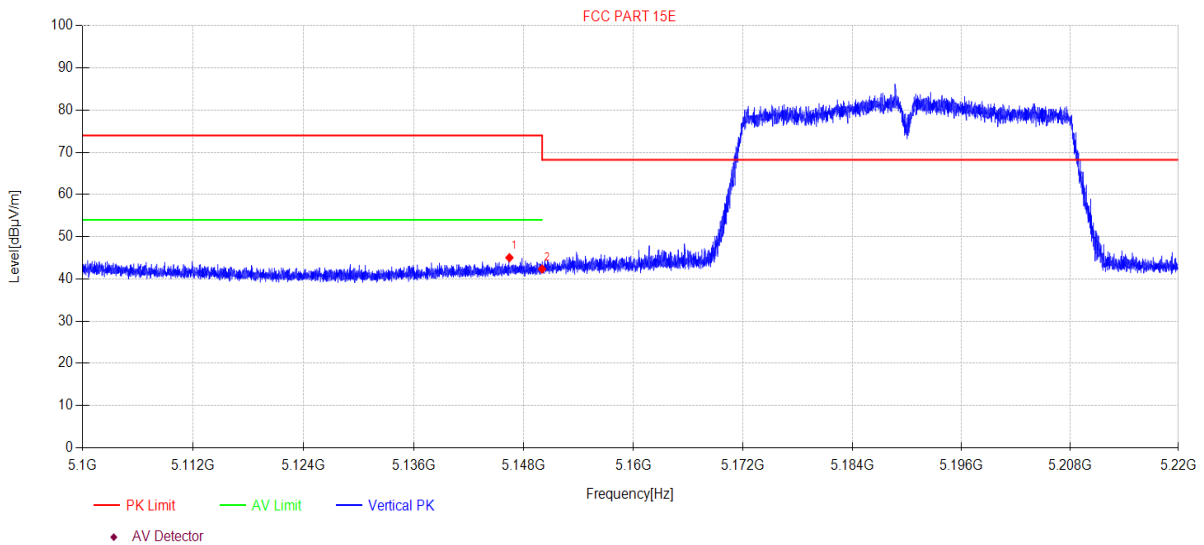

Suspected Data List										
NO	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5146.43	46.97	6.21	32.90	-41.04	45.04	74.00	28.96	PK	Vertical
2	5150.00	44.28	6.21	32.90	-41.04	42.35	68.20	25.85	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\36
Memo: 11AC40 5310

Test Graph

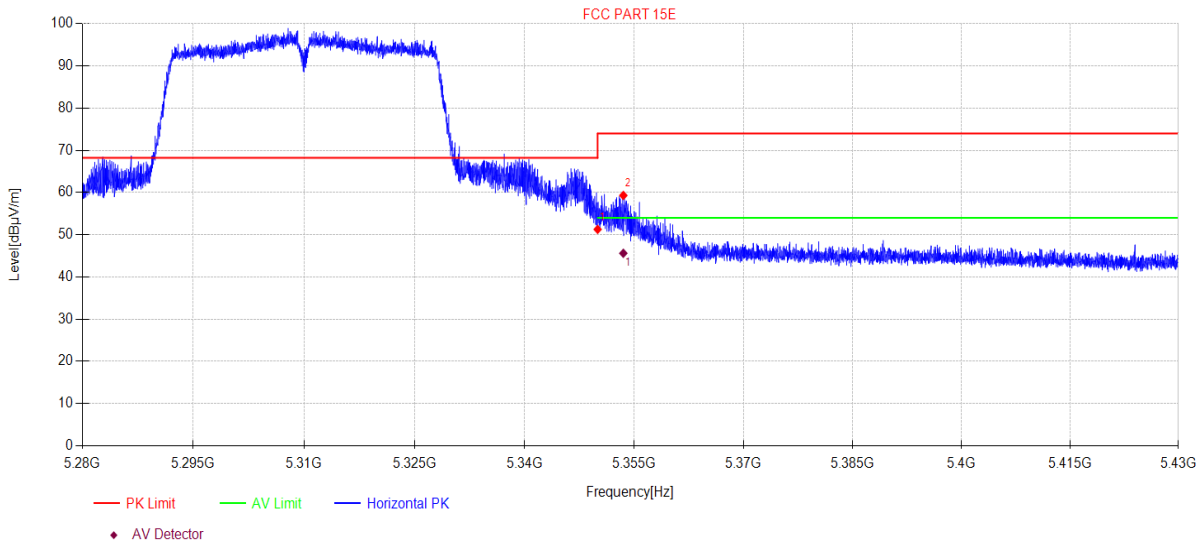

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	52.71	6.61	32.90	-40.96	51.26	74.00	22.74	PK	Horizontal
2	5353.52	60.76	6.61	32.90	-40.96	59.31	74.00	14.69	PK	Horizontal

Final Data List										
NO.	Freq. [MHz]	Reading [dBµV/m]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5353.52	47.20	6.61	32.90	-40.96	45.61	54.00	8.39	AV	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\37
Memo: 11AC40 5310

Test Graph

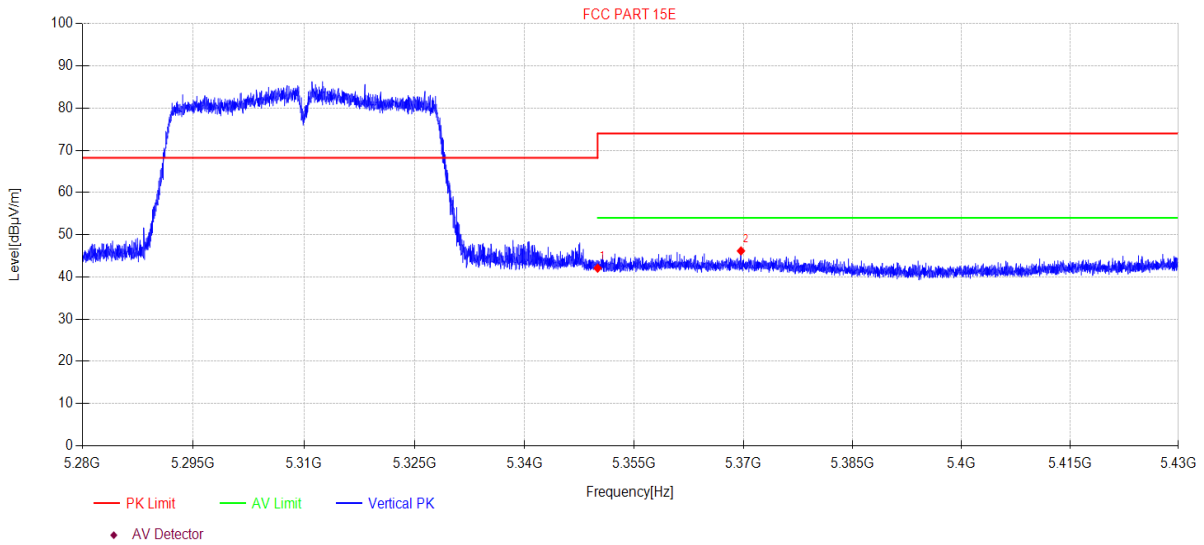

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5350.00	43.52	6.61	32.90	-40.96	42.07	74.00	31.93	PK	Vertical
2	5369.64	47.57	6.64	32.90	-40.95	46.16	74.00	27.84	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\52
Memo: 11AC40 5510

Test Graph

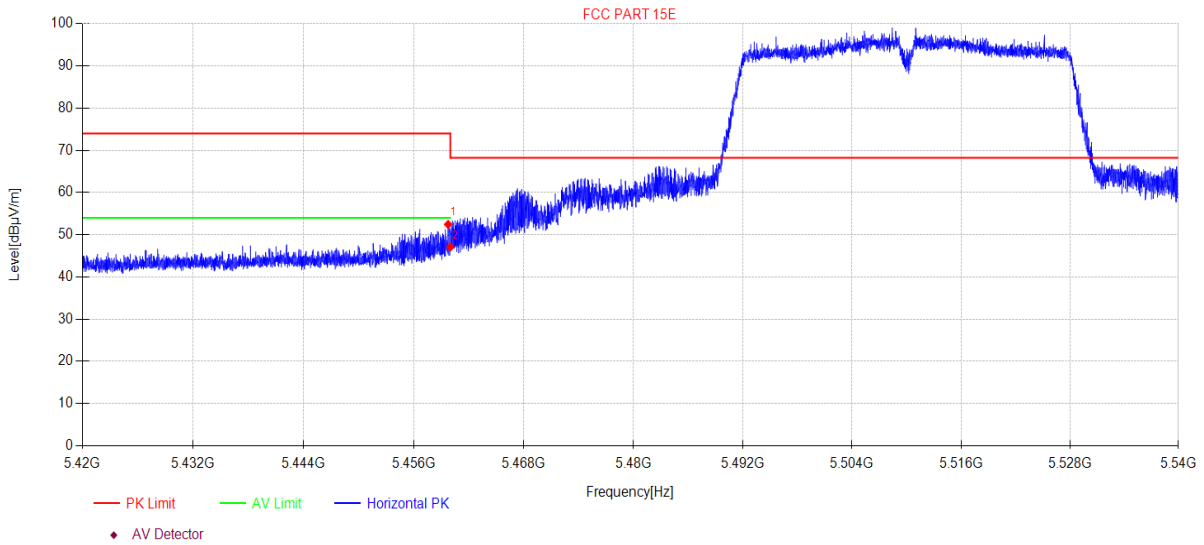

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5459.76	53.65	6.82	32.90	-40.92	52.45	74.00	21.55	PK	Horizontal
2	5460.00	48.29	6.82	32.90	-40.92	47.09	68.20	21.11	PK	Horizontal


Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI\53
Memo: 11AC40 5510

Test Graph

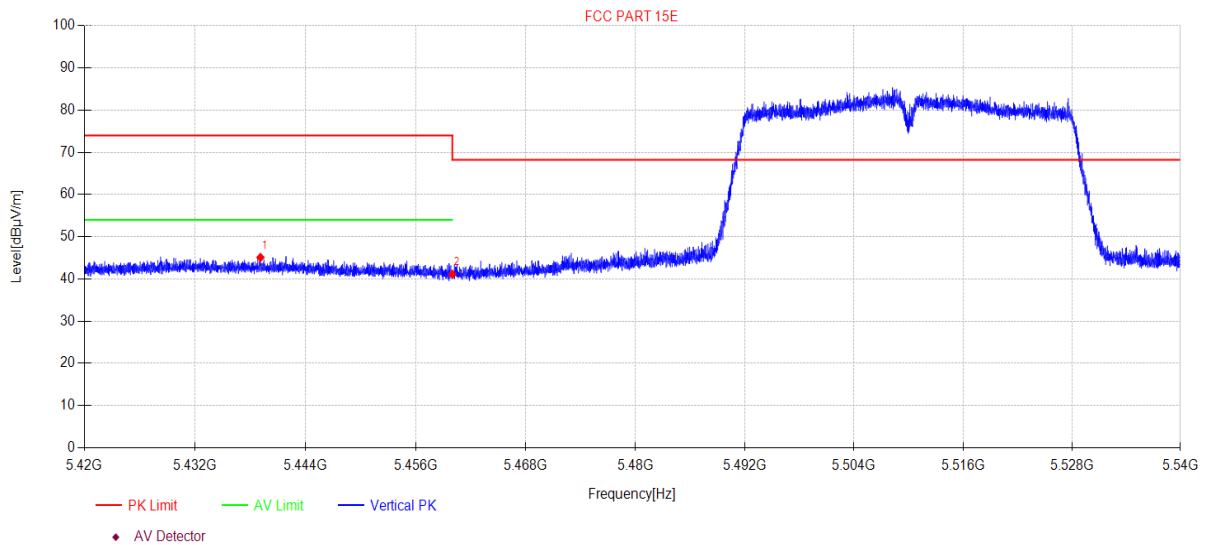

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5439.10	46.34	6.78	32.90	-40.92	45.10	74.00	28.90	PK	Vertical
2	5460.00	42.33	6.82	32.90	-40.92	41.13	68.20	27.07	PK	Vertical


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI60
Memo: 11AC40 5670

Test Graph

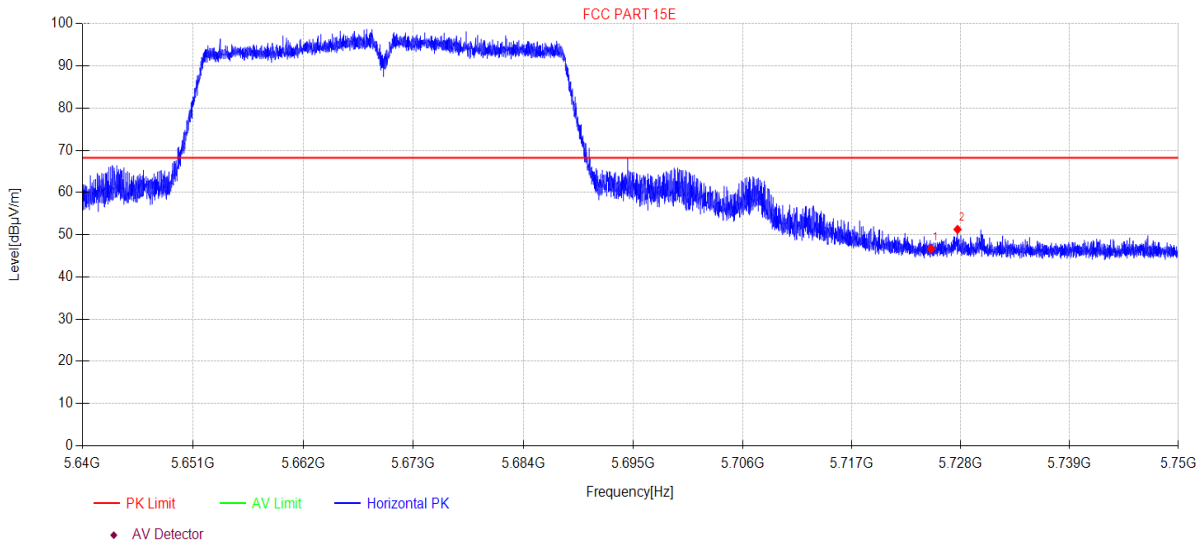

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBμV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	5725.00	46.65	7.34	33.45	-40.81	46.63	68.20	21.57	PK	Horizontal
2	5727.67	51.25	7.35	33.46	-40.81	51.25	68.20	16.95	PK	Horizontal


Note:

1. Level = Reading + Cable Loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-03-31 **Tested By:** Bairong
EUT: Portable Wireless Speaker **Model Number:** VIFA062
Test Mode: TX Mode **Power Supply:** AC 120V/60Hz
Condition: Temp:23.2°C;Humi:66.3% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23030821-2E VIFA062\FCC ABOVE 5GWIFI61
Memo: 11AC40 5670

Test Graph

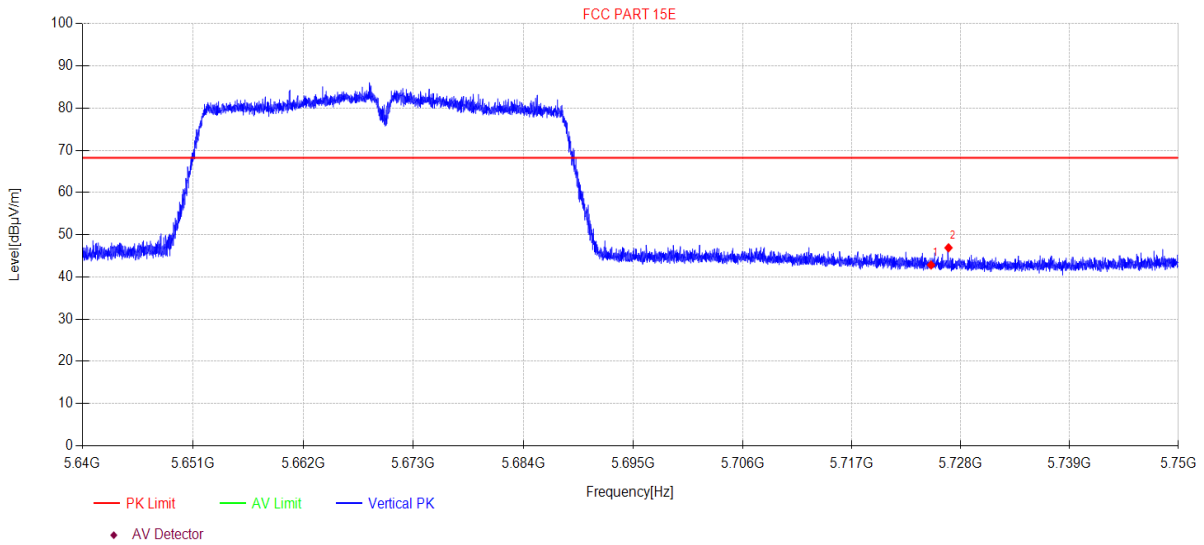

Suspected Data List										
NO.	Freq. [MHz]	Reading [dBµV]	Cable Loss [dB]	Antenna Factor [dB]	AMP [dB]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Detector	Polarity
1	5725.00	42.85	7.34	33.45	-40.81	42.83	68.20	25.37	PK	Vertical
2	5726.76	46.92	7.34	33.45	-40.81	46.90	68.20	21.30	PK	Vertical

Note:

- Level = Reading + Cable Loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.