

Guoguang Electric Co.,Ltd

TEST REPORT

SCOPE OF WORK

FCC Testing – HS217F, HS217G, AX2107G, AX2107G+,
AX2105A, AX2105B, AX2105C, AX2105F, TS217F, TS217G

REPORT NUMBER

210707061SZN-002

ISSUE DATE

11 August 2021

PAGES

28

DOCUMENT CONTROL NUMBER

FCC ID 249_C
© 2017 INTERTEK



Guoguang Electric Co.,Ltd

Application For Certification

FCC ID: 2AAP8AX2107G**2.1CH Soundbar with Wireless Subwoofer, Wireless Subwoofer****Model: HS217F, HS217G, AX2107G, AX2107G+, AX2105A, AX2105B, AX2105C,
AX2105F, TS217F, TS217G****Brand name: Hisense, TOSHIBA**

2.4GHz Transmitter

Report No.: 210707061SZN-002

We hereby certify that the sample of the above item is considered to comply with the
requirements of FCC Part 15, Subpart C for Intentional Radiator,
mention 47 CFR [10-1-19]

Prepared and Checked by:**Approved by:****Draven Li
Project Engineer**

**Peter Kang
Senior Technical Supervisor
Date: 11 August 2021**

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Service Shenzhen Ltd. Longhua Branch

101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community GuanHu Subdistrict, LongHua District, Shenzhen, People's Republic of China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one:) Original Grant Class II Change

Equipment Type: DXX - Part 15 Low Power Communication Device Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until: _____
date

Company Name agrees to notify the Commission by: _____
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-19 Edition] provision.

Report prepared by:

Draven Li
Intertek Testing Services Shenzhen Ltd. Longhua Branch
101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community, GuanHu Subdistrict, LongHua District, Shenzhen.
Tel: (86 755) 8601 0682 Fax: (86 755) 8601 6661

Table of Contents

1.0 Summary of Test Result	4
2.0 General Description	5
2.1 Product Description.....	5
2.2 Related Submittal(s) Grants.....	5
2.3 Test Methodology	5
2.4 Test Facility	5
3.0 System Test Configuration	6
3.1 Justification	6
3.2 EUT Exercising Software.....	6
3.3 Special Accessories.....	6
3.4 Equipment Modification	6
3.5 Measurement Uncertainty	7
3.6 Support Equipment List and Description.....	7
4.0 Emission Results	8
4.1 Radiated Test Results	8
4.1.1 Field Strength Calculation.....	8
4.1.2 Radiated Emission Configuration Photograph.....	9
4.1.3 Radiated Emissions.....	9
4.1.4 Transmitter Spurious Emissions.....	12
4.2 Conducted Emission Configuration Photograph.....	16
4.2.1 Conducted Emission	16
5.0 Equipment Photographs	19
6.0 Product Labelling	19
7.0 Technical Specifications	19
8.0 Instruction Manual	19
9.0 Miscellaneous Information	20
9.1 Bandedge Plot	20
9.2 20dB Bandwidth	22
9.3 Discussion of Pulse Desensitization.....	23
9.4 Calculation of Average Factor	23
9.5 Emissions Test Procedures	26
10.0 Test Equipment List	28

1.0 Summary of Test Result

Applicant: Guoguang Electric Co.,Ltd
Address: No.8 Jinghu Road, Xinhua Street, Huadu Reg, Guangzhou, China
Manufacturer: Guoguang Electric Co.,Ltd
Address: No.8 Jinghu Road, Xinhua Street, Huadu Reg, Guangzhou, China

Model: HS217F

FCC ID: 2AAP8AX2107G

Test Specification	Reference	Results
Transmitter Radiated Emission Bandedge	15.249 &15.209 &15.205	Pass
Conducted Emission	15.207	Pass
20dB Bandwidth	15.215(c)	Pass

Notes: The EUT uses an Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

2.0 General Description

2.1 Product Description

The equipment under test (EUT) is a 2.1CH Soundbar with Wireless Subwoofer, Wireless Subwoofer with 2.4GHz transmitter function operating at 2.4G Band. The EUT is powered by AC 100-240V~ 50/60Hz. For more detail information pls. refer to the user manual.

Antenna Type: Integral antenna

Modulation Type: GFSK

Antenna Gain: 1.5dBi

The model: HS217G, AX2107G, AX2107G+, AX2105A, AX2105B, AX2105C, AX2105F, TS217F, TS217G are the same as the Model: HS217F in hardware aspect, The differences in model number and brand name serve as marketing strategy.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

2.2 Related Submittal(s) Grants

This is an application for certification of transceiver for the 2.1CH Soundbar with Wireless Subwoofer, Wireless Subwoofer which has Bluetooth function and 2.4GHz Transmitter Function. Bluetooth functions were reported in the certification report: 210707061SZN-001. Other digital functions were reported in the verification report: 210707061SZN-004.

2.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst-case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Longhua Branch** and located at 101, 201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: CN1188).

3.0 System Test Configuration

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by AC120V, 60Hz during the test, only the worst data was reported in this report.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Section 4.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

3.2 EUT Exercising Software

The EUT exercise program (provided by client) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. The worst case configuration is used in all specified testing.

The parameters of test software setting:

During the test, Channel and power controlling software provided by the applicant was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the application and is going to be fixed on the firmware of the end product.

Test Software: EVB_Tool_20.10.15

3.3 Special Accessories

No special accessory attached.

3.4 Equipment Modification

Any modifications installed previous to testing by Guoguang Electric Co.,Ltd will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Longhua Branch.

3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

3.6 Support Equipment List and Description

Description	Manufacturer	Model No.
iPod	Apple	A1421
USB Memory	SanDisk	SDCZ36-002G-P36
Test TV	SONY	KDL-24EX520
Remote controller	Hisense	N/A
Dummy Load	N/A (provided by Intertek)	Audio Port: 1000Ω Video Port: 75 Ω HDMI Port: 100 Ω
HDMI Cable*1	N/A	Unshielded, Length 150cm
HDMI Cable*1	N/A (Provided by Intertek)	Unshielded, Length 150cm
AC power cord	N/A	Unshielded, Length 150cm
Optical Cable	N/A (Provided by Intertek)	Unshielded, Length 150cm
Coaxial Cable	N/A (Provided by Intertek)	Unshielded, Length 150cm

4.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

4.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

4.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

4.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

4.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit. Simultaneous transmission was considered during the test.

Worst Case Radiated Emission

at 39.943 MHz

Judgement: Passed by 7.0 dB

TEST PERSONNEL:

Sign on file


Draven Li, Project Engineer
Typed/Printed Name

13 July 2021
Date

Applicant: Guoguang Electric Co.,Ltd
 Date of Test: 13 July 2021
 Model: HS217F
 Worst Case Operating Mode: Simultaneous Transmission
 Modulation type: GFSK

ANT Polarity: Horizontal

FCC Part 15

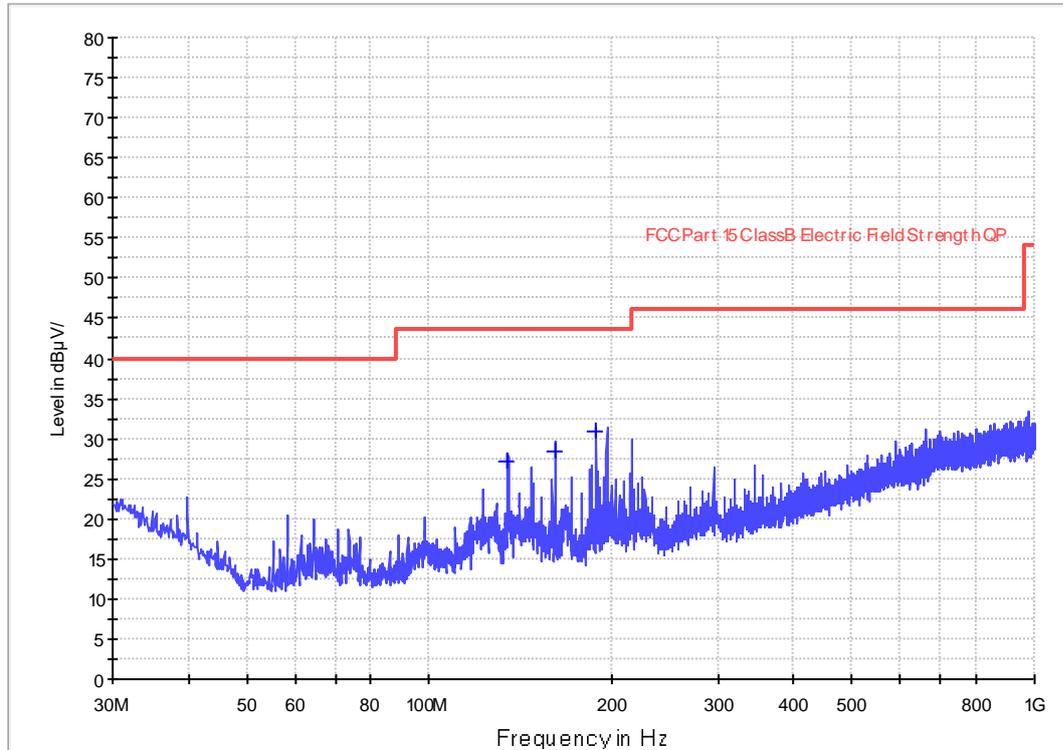

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
135.002500	27.1	1000.0	120.000	100.0	H	9.7	16.4	43.5
161.920000	28.4	1000.0	120.000	100.0	H	10.9	15.1	43.5
188.958750	31.0	1000.0	120.000	100.0	H	12.0	12.5	43.5


Remark:

1. Corr. (dB) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit Line (dBμV/m) – Level (dBμV/m)

Applicant: Guoguang Electric Co.,Ltd
 Date of Test: 13 July 2021
 Model: HS217F
 Worst Case Operating Mode: Simultaneous Transmission
 Modulation type: GFSK

ANT Polarity: Vertical

FCC Part 15

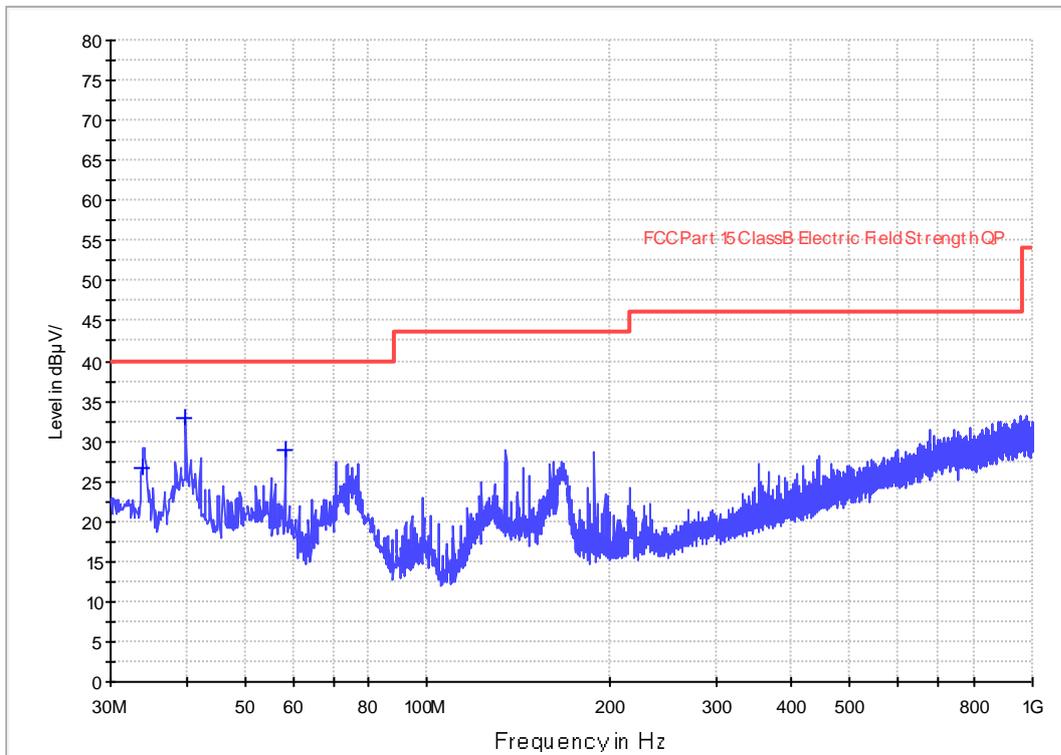

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
34.001250	26.6	1000.0	120.000	100.0	V	16.1	13.4	40.0
39.942500	33.0	1000.0	120.000	100.0	V	13.2	7.0	40.0
58.372500	28.9	1000.0	120.000	100.0	V	7.7	11.1	40.0

Remark:

1. Corr. (dB) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Limit Line (dBuV/m) – Level (dBuV/m)

4.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission
at
2400.000 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 2.9 dB

TEST PERSONNEL:

Sign on file

Draven Li, Project Engineer
Typed/Printed Name

13 July 2021
Date

Applicant: Guoguang Electric Co.,Ltd
Date of Test: 13 July 2021
Worst Case Operating Mode:

Model: HS217F
Transmitting

Table 1

Radiated Emissions
(2404.000 MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2404.000	100.1	36.7	28.1	91.5	114.0	-22.5
Vertical	4808.000	48.2	36.7	35.5	47.0	74.0	-27.0
Vertical	7212.000	52.1	36.8	35.6	50.9	74.0	-23.1

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2404.000	100.1	36.7	28.1	1.0	90.5	94.0	-3.5
Vertical	4808.000	48.2	36.7	35.5	1.0	46.0	54.0	-8.0
Vertical	7212.000	52.1	36.8	35.6	1.0	49.9	54.0	-4.1

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.

Applicant: Guoguang Electric Co.,Ltd
Date of Test: 13 July 2021
Worst Case Operating Mode:

Model: HS217F
Transmitting

Table 2

Radiated Emissions
(2441.000 MHz)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2441.000	99.6	36.7	28.1	91.0	114.0	-23.0
Vertical	4882.000	43.5	36.7	35.5	42.3	74.0	-31.7
Vertical	7323.000	51.7	36.8	35.6	50.5	74.0	-23.5

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2441.000	99.6	36.7	28.1	1.0	90.0	94.0	-4.0
Vertical	4882.000	43.5	36.7	35.5	1.0	41.3	54.0	-12.7
Vertical	7323.000	51.7	36.8	35.6	1.0	49.5	54.0	-4.5

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.

Applicant: Guoguang Electric Co.,Ltd

Date of Test: 13 July 2021

Worst Case Operating Mode:

Model: HS217F

Transmitting

Table 3

Radiated Emissions
(2476.000 MHz)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2476.000	99.9	36.7	28.1	91.3	114.0	-22.7
Vertical	4952.000	42.8	36.7	35.5	41.6	74.0	-32.4
Vertical	7428.000	45.8	36.8	35.6	44.6	74.0	-29.4

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Average Factor (-dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	2476.000	99.9	36.7	28.1	1.0	90.3	94.0	-3.7
Vertical	4952.000	42.8	36.7	35.5	1.0	40.6	54.0	-13.4
Vertical	7428.000	45.8	36.8	35.6	1.0	43.6	54.0	-10.4

- Notes:
1. Peak Detector Data unless otherwise stated.
 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 3. Negative value in the margin column shows emission below limit.
 4. Horn antenna is used for the emission over 1000MHz.

4.2 Conducted Emission Configuration Photograph

For electronic filing, the worst-case radiated emission configuration photographs are saved with filename: conducted photos.pdf. Simultaneous transmission was considered during the test.

4.2.1 Conducted Emission

Worst Case Conducted Configuration
at
0.306MHz

Judgement: Passed by 17.0dB margin

TEST PERSONNEL:

Sign on file


Draven Li, Project Engineer
Typed/Printed Name

13 July 2021
Date

Applicant: Guoguang Electric Co.,Ltd
 Date of Test: 13 July 2021
 Model: HS217F
 Worst Case Operating Mode: Simultaneous Transmission
 Modulation type: GFSK
 Phase: Live

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

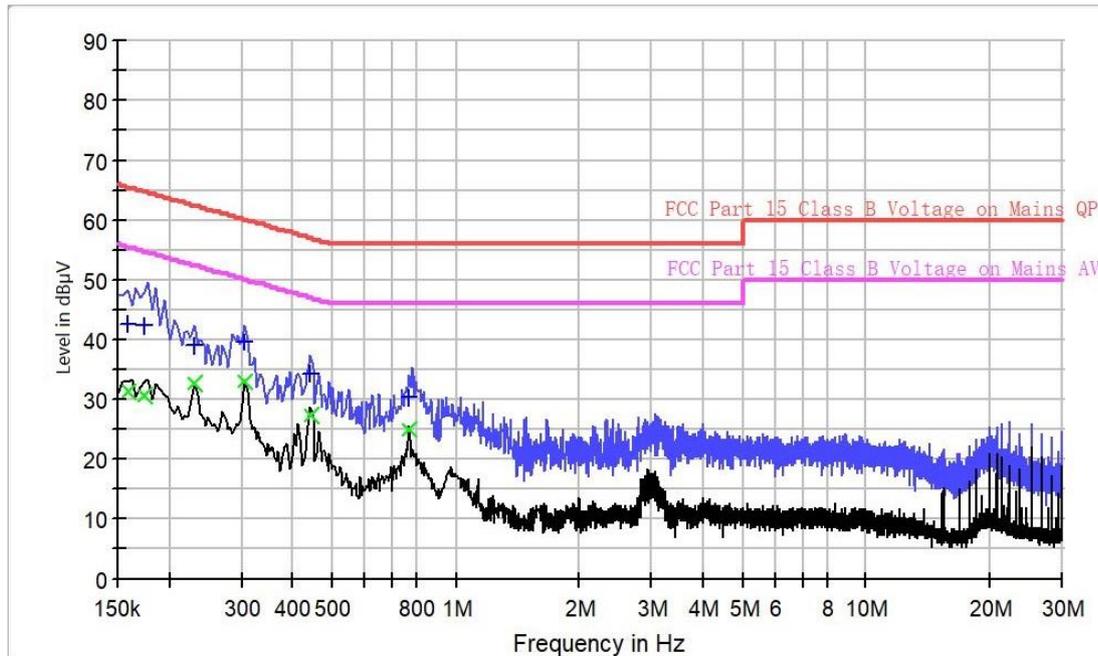

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.158000	42.7	9.000	L1	9.6	22.9	65.6
0.174000	42.2	9.000	L1	9.6	22.6	64.8
0.230000	38.8	9.000	L1	9.6	23.6	62.4
0.306000	39.5	9.000	L1	9.6	20.6	60.1
0.442000	34.5	9.000	L1	9.6	22.5	57.0
0.766000	30.3	9.000	L1	9.6	25.7	56.0


Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.158000	31.3	9.000	L1	9.6	24.3	55.6
0.174000	30.8	9.000	L1	9.6	24.0	54.8
0.230000	32.8	9.000	L1	9.6	19.6	52.4
0.306000	33.1	9.000	L1	9.6	17.0	50.1
0.442000	27.3	9.000	L1	9.6	19.7	47.0
0.766000	24.8	9.000	L1	9.6	21.2	46.0

Applicant: Guoguang Electric Co.,Ltd
 Date of Test: 13 July 2021
 Model: HS217F
 Worst Case Operating Mode: Simultaneous Transmission
 Modulation type: GFSK
 Phase: Neutral

Graphic / Data Table

Conducted Emissions Pursuant to FCC 15.207: Emissions Requirement

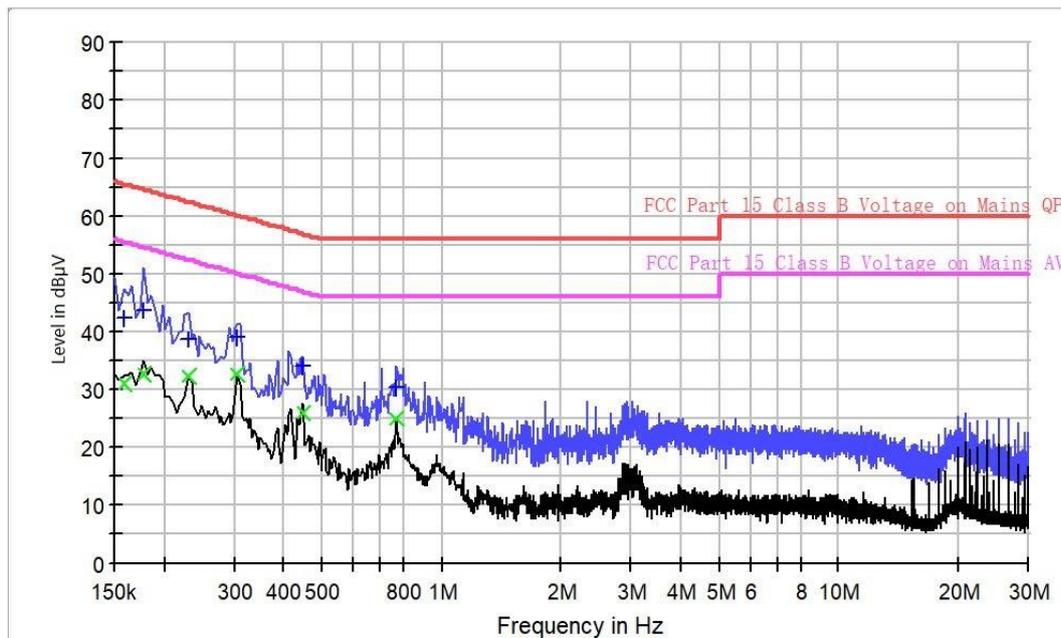

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.158000	42.2	9.000	N	9.5	23.4	65.6
0.178000	43.8	9.000	N	9.5	20.8	64.6
0.230000	38.8	9.000	N	9.5	23.6	62.4
0.306000	39.2	9.000	N	9.5	20.9	60.1
0.446000	33.9	9.000	N	9.5	23.0	56.9
0.770000	30.3	9.000	N	9.5	25.7	56.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.158000	30.9	9.000	N	9.5	24.7	55.6
0.178000	32.6	9.000	N	9.5	22.0	54.6
0.230000	32.4	9.000	N	9.5	20.0	52.4
0.306000	32.7	9.000	N	9.5	17.4	50.1
0.446000	26.1	9.000	N	9.5	20.8	46.9
0.770000	24.9	9.000	N	9.5	21.1	46.0

5.0 Equipment Photographs

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

6.0 Product Labelling

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

7.0 Technical Specifications

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

8.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

9.0 Miscellaneous Information

This miscellaneous information includes details of the measured bandedge, 20dB Bandwidth, the test procedure and calculation of factor such as pulse desensitization.

9.1 Bandedge Plot

The test plots are attached as below. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Restricted-band band-edge tests shall be performed as radiated measurements, i.e (Band-edge Plot).

(i) Lower channel 2404.000 MHz:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2400.000	77.3	36.7	27.9	68.5	74.0	-5.5



Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2400.000	59.9	36.7	27.9	51.1	54.0	-2.9

(ii) Upper channel 2476.000 MHz:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2483.735	68.8	36.8	29.1	61.1	74.0	-12.9



Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
Vertical	2483.518	35.1	36.8	50.0	48.3	54.0	-5.7

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dB μ v/m (Peak Limit) and 54dB μ v/m (Average Limit).

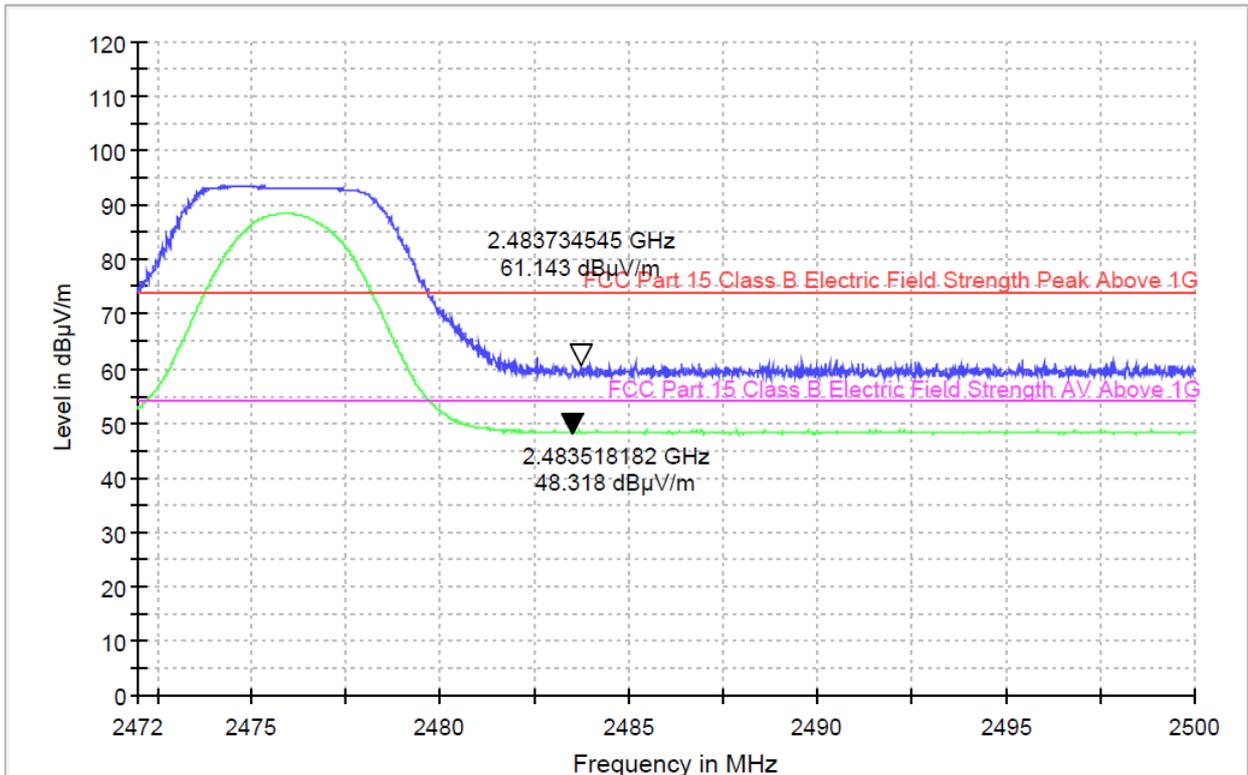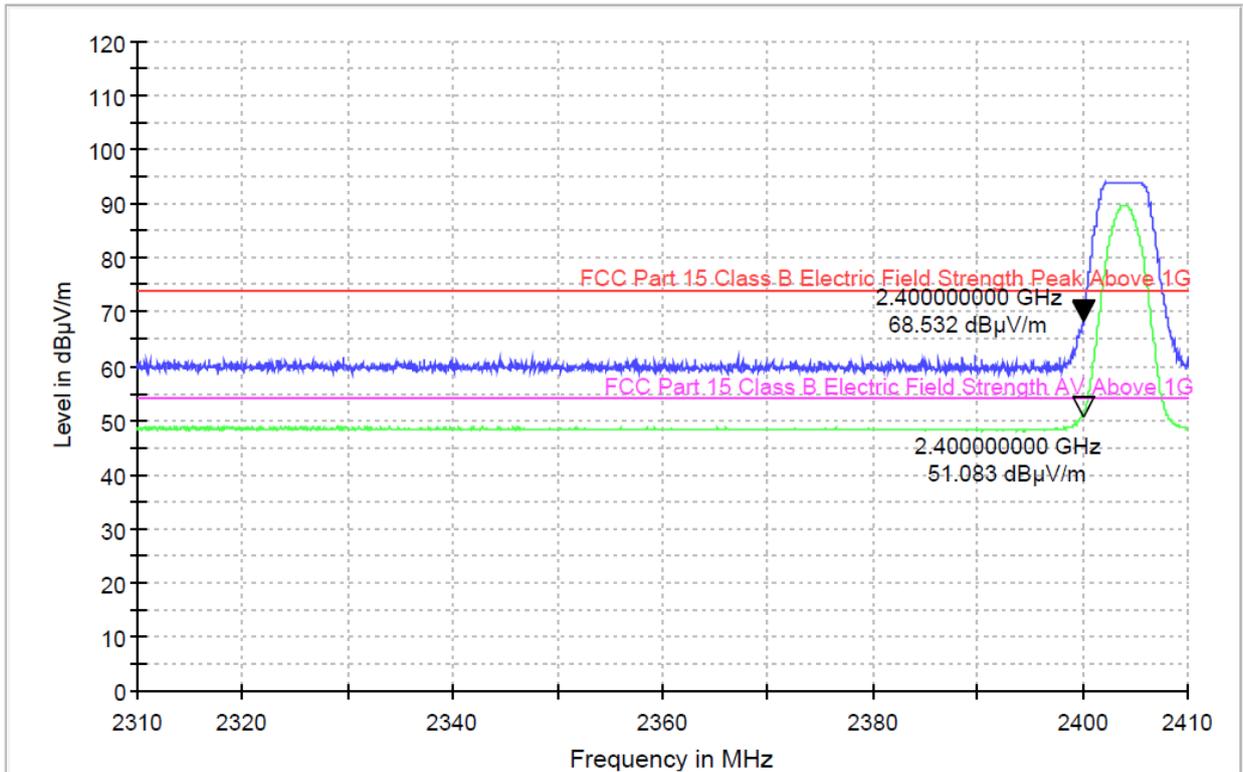

9.2 20dB Bandwidth

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered. The test plots are reported as below.

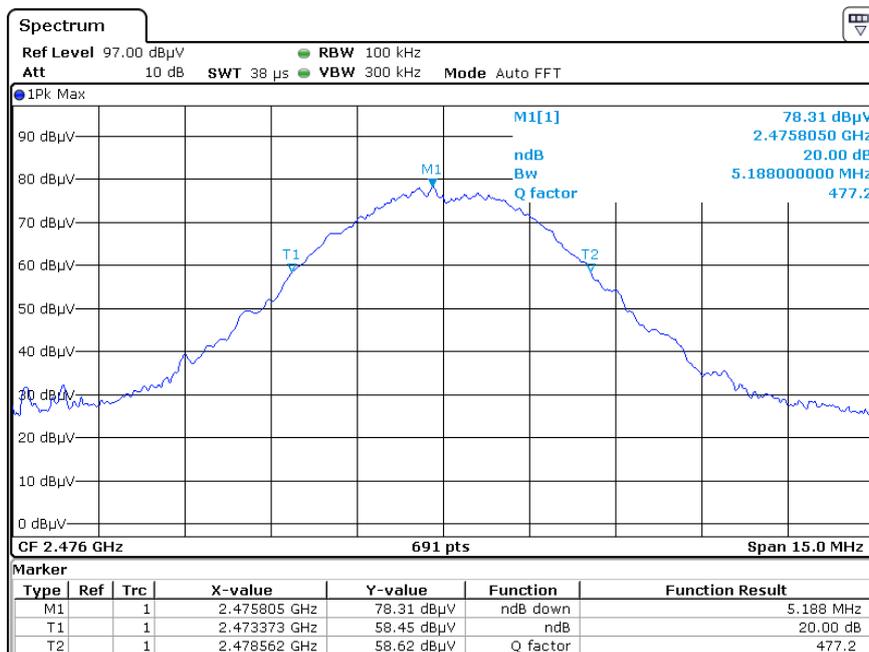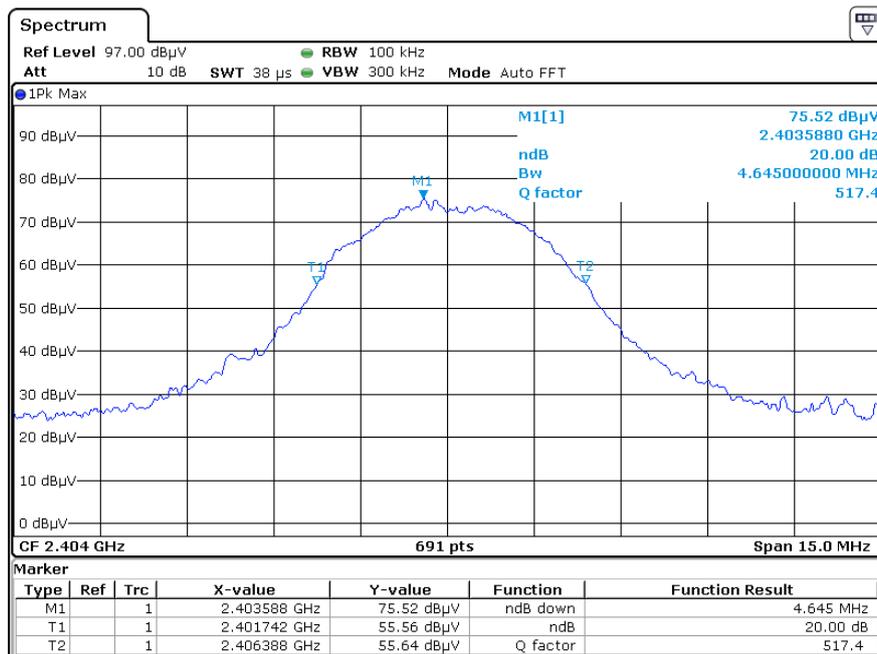

9.3 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. The effective period (T_{eff}) is approximately 2.493ms for a digital "1" bit, as shown in the plots of Section 9.4. With a resolution bandwidth (3 dB) of 100 kHz, the pulse desensitivity factor was 0 dB

9.4 Calculation of Average Factor

Averaging factor in dB = $20 \log(\text{duty cycle})$

The specification for output field strengths in accordance with the FCC rules specify measurements with an average detector. During testing, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.



The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation. The duty cycle is measured by placing the spectrum analyzer in zero scan (receiver mode) and linear mode at maximum bandwidth (3 MHz at 3 dB down) and viewing the resulting time domain signal output from the analyzer on a Tektronix oscilloscope. The oscilloscope is used because of its superior time base and triggering facilities.


The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 2.783ms
Effective period of the cycle = 2.493ms
 $DC = 2.493ms / 2.783ms = 0.8958$ or 89.58%

Therefore, the averaging factor is found by $20 \log_{10}(0.8958) = -1.0$ dB

The test plots are attached as below.

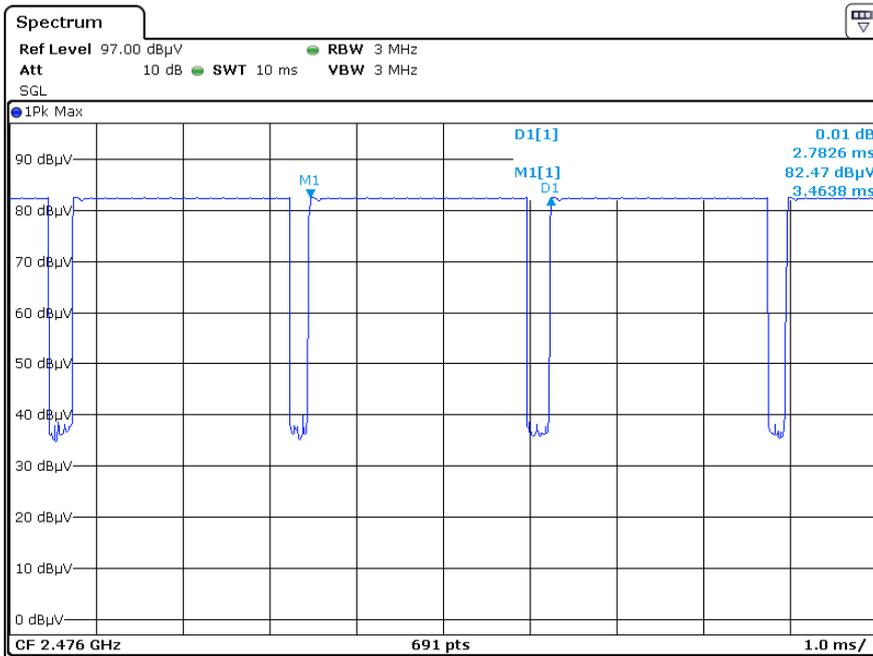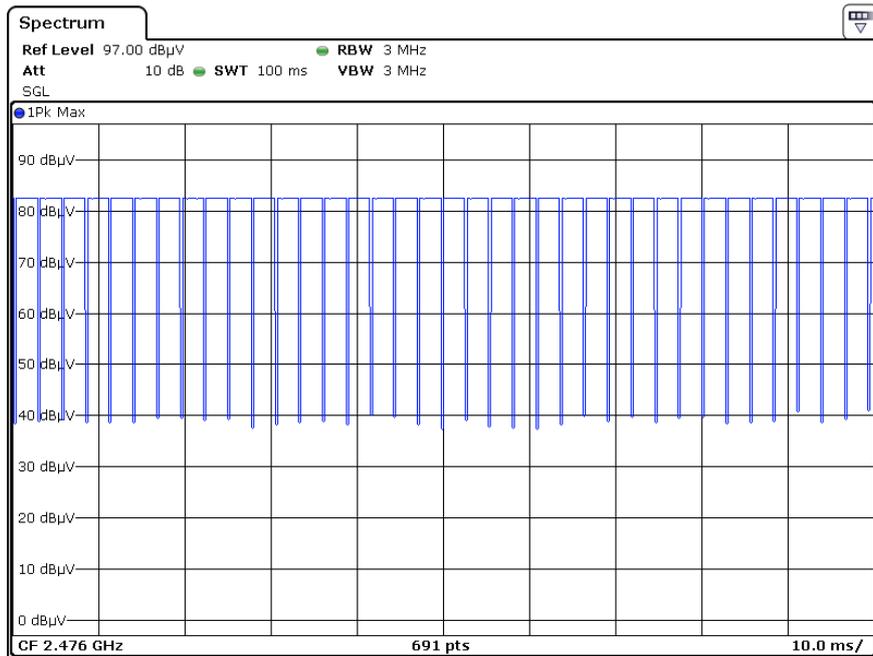

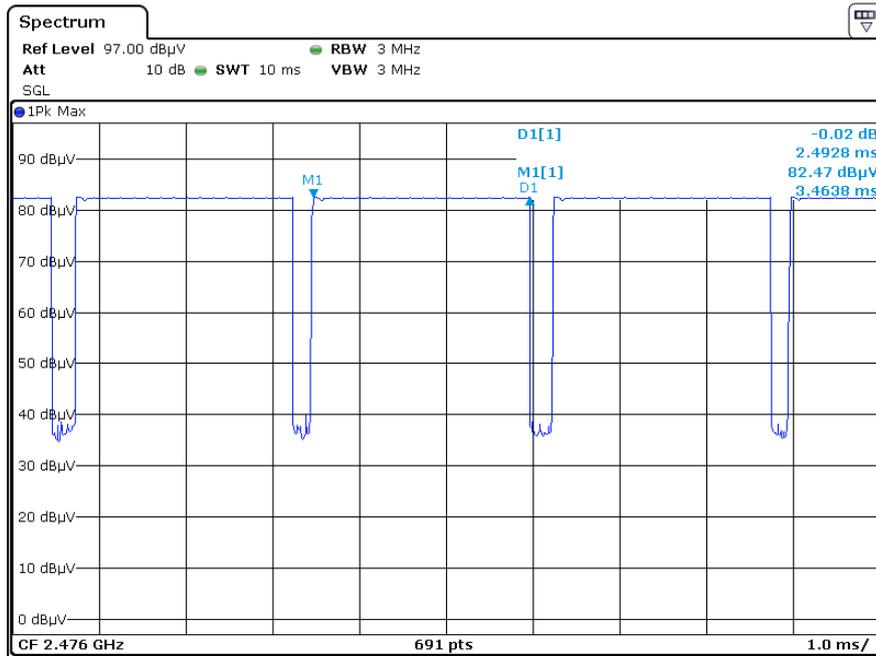

9.5 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter and approximately 0.8 meter up to 1GHz and 1.5 meter above 1GHz in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Section 9.4.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

9.6 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Section 9.3). Above 1000 MHz, a resolution bandwidth of 1 MHz is used, RBW 10MHz used for fundamental emission.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00078828	24-May-2019	24-May-2022
SZ185-01	EMI Receiver	R&S	ESCI	100547	22-Dec-2020	22-Dec-2021
SZ061-08	Horn Antenna	ETS	3115	00092346	07-Sep-2019	07-Sep-2021
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	18-May-2021	18-May-2023
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	10-May-2021	10-May-2022
SZ056-06	Signal Analyzer	R&S	FSV 40	101101	22-Dec-2020	22-Dec-2021
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	10-May-2021	10-May-2022
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	15-Dec-2018	15-Dec-2021
SZ062-02	RF Cable	RADIALL	RG 213U	--	01-Jun-2021	01-Dec-2021
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	--	01-Jun-2021	01-Dec-2021
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	01-Jun-2021	01-Dec-2021
SZ067-04	Notch Filter	Micro-Tronics	BRM50702-02	--	11-May-2021	11-May-2022
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	27-Oct-2020	27-Oct-2021
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	27-Oct-2020	27-Oct-2021
SZ187-02	Two-Line V-Network	R&S	ENV216	100072	12-May-2021	12-May-2022
SZ062-16	RF Cable	HUBER+SUHNER	CBL2-BN-1m	110127-2231000	13-Nov-2020	13-Nov-2021
SZ188-03	Shielding Room	ETS	RFD-100	4100	07-Jan-2020	07-Jan-2023

***** End of Report *****