

RF TEST REPORT



Report No.: 16071154-FCC-R

Supersede Report No.: N/A

Applicant	SHENZHEN KINGSUN ENTERPRISES Co.,Ltd	
Product Name	Bluetooth Shower Speaker	
Model No.	DC-0701	
Serial No.	AS-WSP20-01 AS-WSP20-03 AS-WSP20-04 AS-WSP20-06 AS-WSP20-08 AS-WSP20-ANC AS-WSP20-CAB AS-WSP20-FLW AS-WSP20-GR01 AS-WSP20-GR08 AS-WSP20-LNKS AS-WSP20-SNK AS-WSP20-SQU AS-WSP20-ZB04 AS-WSP20-ZB06	
Test Standard	FCC Part 15.247: 2015, ANSI C63.10: 2013	
Test Date	September 14 to 25, 2016	
Issue Date	September 26, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16071154-FCC-R
Page	3 of 59

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION.....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT.....	9
6.2 CHANNEL SEPARATION	10
6.3 20DB BANDWIDTH.....	14
6.4 PEAK OUTPUT POWER.....	18
6.5 NUMBER OF HOPPING CHANNEL.....	22
6.6 TIME OF OCCUPANCY (DWELL TIME)	24
6.7 BAND EDGE.....	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED SPURIOUS EMISSIONS.....	42
ANNEX A. TEST INSTRUMENT.....	48
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	49
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	54
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	58
ANNEX E. DECLARATION OF SIMILARITY.....	59

1. Report Revision History

Report No.	Report Version	Description	Issue Date
16071154-FCC-R	NONE	Original	September 26, 2016

2. Customer information

Applicant Name	SHENZHEN KINGSUN ENTERPRISES Co.,Ltd
Applicant Add	25/F, CEC Information Building, Xinwen Rd., Shenzhen, Guangdong, China
Manufacturer	SHENZHEN KINGSUN ENTERPRISES Co.,Ltd
Manufacturer Add	25/F, CEC Information Building, Xinwen Rd., Shenzhen, Guangdong, China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

4. Equipment under Test (EUT) Information

Description of EUT:	Bluetooth Shower Speaker
Main Model:	DC-0701
Serial Model:	AS-WSP20-01 AS-WSP20-03 AS-WSP20-04 AS-WSP20-06 AS-WSP20-08 AS-WSP20-ANC AS-WSP20-CAB AS-WSP20-FLW AS-WSP20-GR01 AS-WSP20-GR08 AS-WSP20-LNKS AS-WSP20-SNK AS-WSP20-SQU AS-WSP20-ZB04 AS-WSP20-ZB06
Date EUT received:	September 13, 2016
Test Date(s):	September 14 to 25, 2016
Equipment Category :	DSS
Antenna Gain:	0dBi
Antenna Type:	PCB antenna
Type of Modulation:	GFSK, π /4DQPSK, 8DPSK
RF Operating Frequency (ies):	2402-2480 MHz(TX/RX)
Max. Output Power:	-3.190dBm
Number of Channels:	79CH
Port:	USB Port
Input Power:	Battery: Spec:3.7V, 400mAh USB: DC 5V
Trade Name :	N/A

Test Report	16071154-FCC-R
Page	7 of 59

FCC ID:

2AAPKDC0701

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antenna:

A permanently attached PCB antenna for Bluetooth, the gain is 0dBi for Bluetooth.

The antenna meets up with the ANTENNA REQUIREMENT.


Result: Compliance.

6.2 Channel Separation

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1020mbar
Test date :	September 20, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>

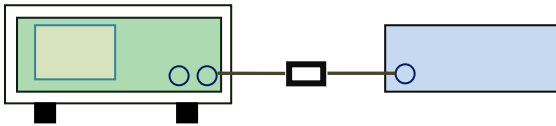Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span - Video (or Average) Bandwidth (VBW) ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.
----------------	--

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Channel Separation measurement result


Type/ Modulation	CH	CH Freq (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.005	0.741	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.738	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.736	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.005	0.923	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.924	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.921	Pass
	Adjacency Channel	2479			
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.005	0.909	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.005	0.909	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.005	0.907	Pass
	Adjacency Channel	2479			

Test Plots


Channel Separation measurement result

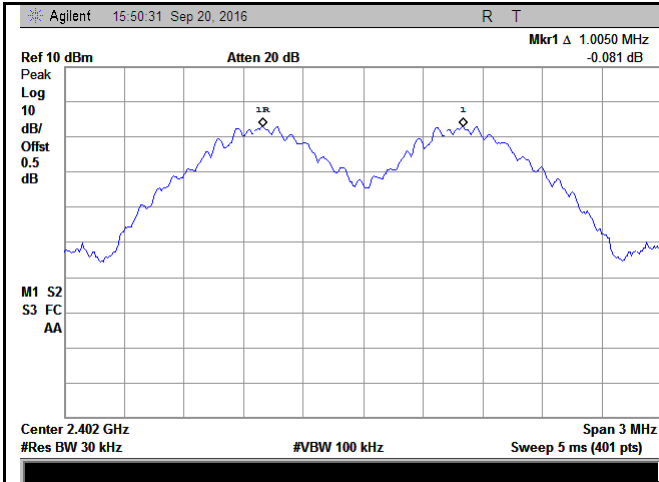


GFSK - Low Channel

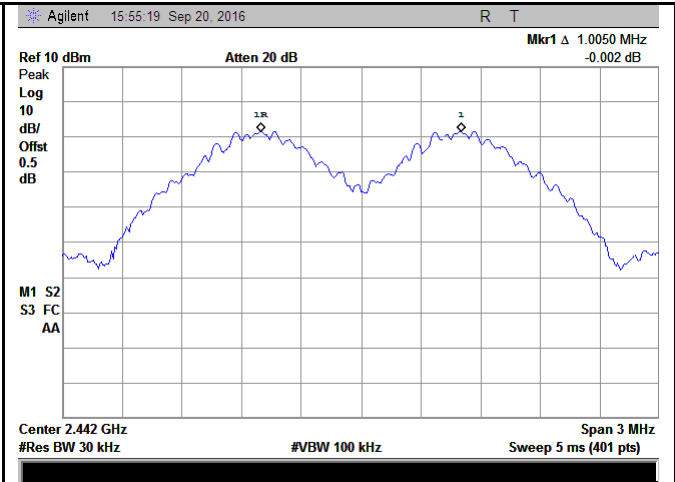


GFSK - Middle Channel

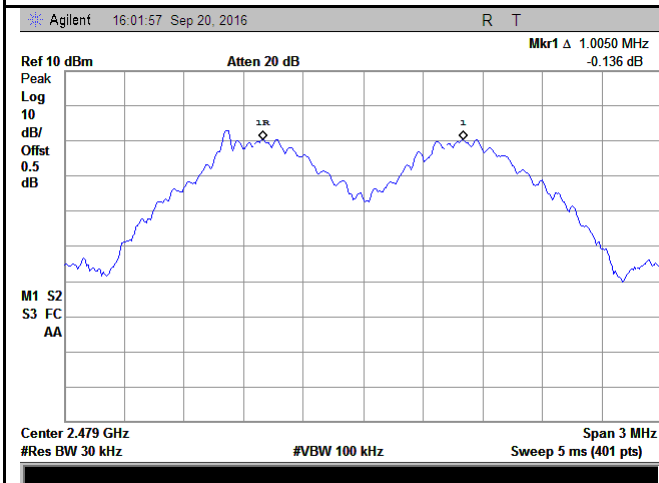


GFSK - High Channel

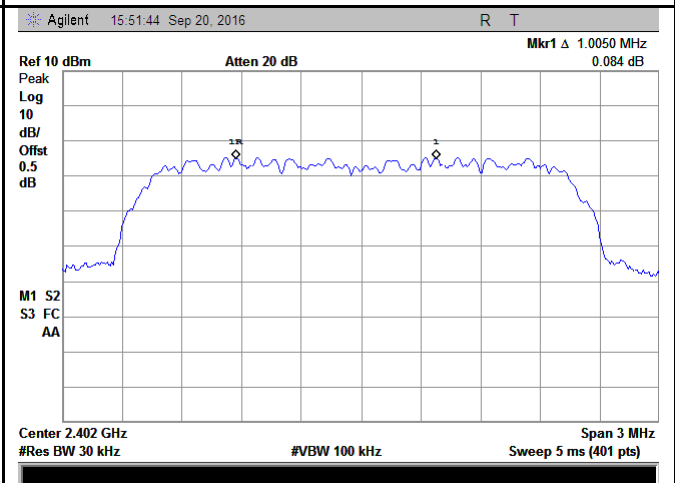


$\pi/4$ DPSK - Low Channel

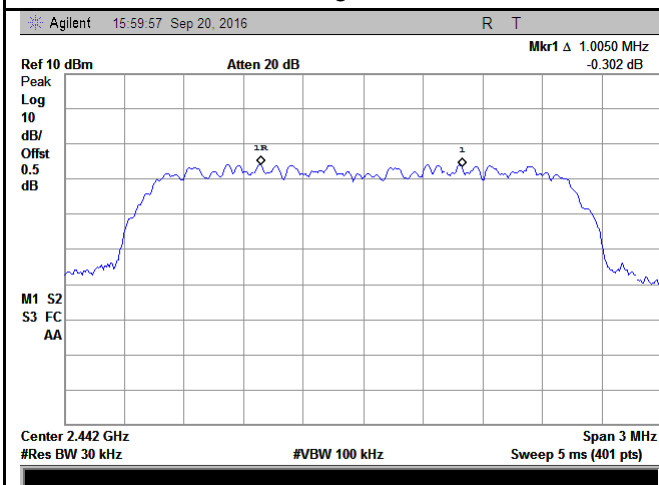


$\pi/4$ DQPSK - Middle Channel

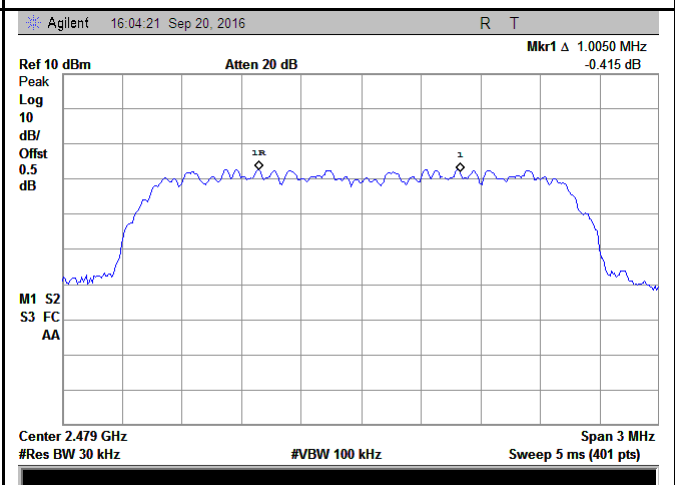


$\pi/4$ DQPSK - High Channel

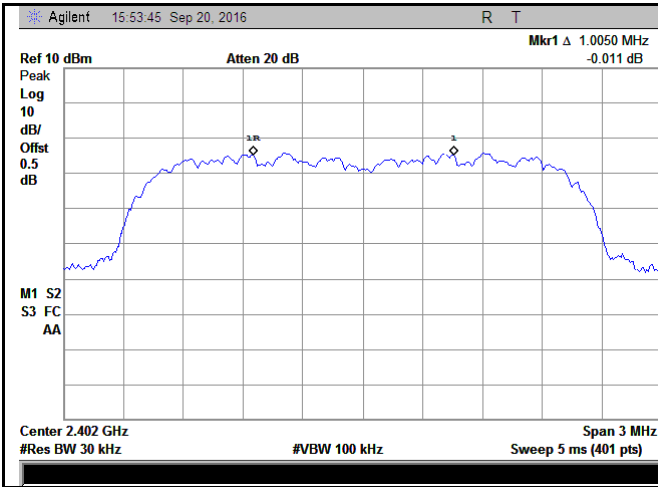

8DPSK - Low Channel

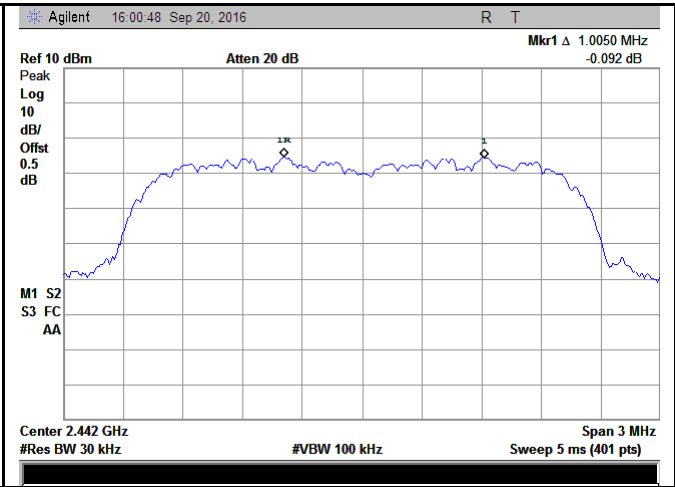

8DPSK - Middle Channel

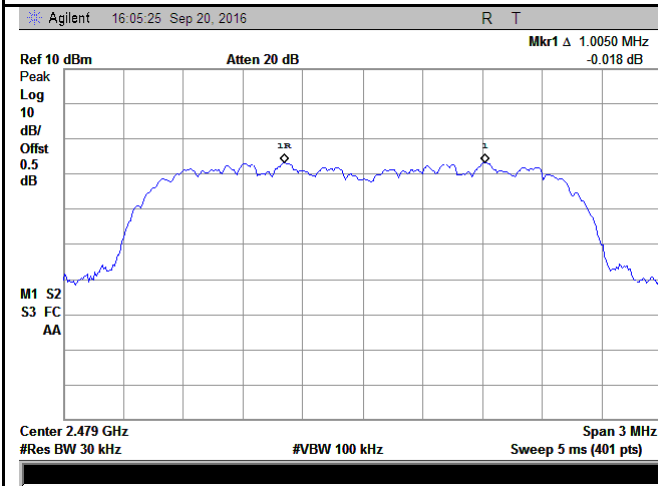


8DPSK - High Channel

6.3 20dB Bandwidth

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1020mbar
Test date :	September 20, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

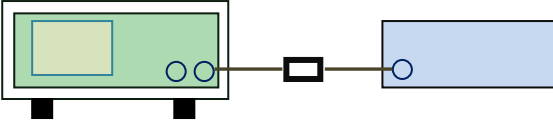Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference
----------------	--

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Measurement result


Modulation	CH	CH Freq (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.112	0.9744
	Mid	2441	1.107	0.9686
	High	2480	1.104	0.9650
π /4 DQPSK	Low	2402	1.385	1.2176
	Mid	2441	1.386	1.2191
	High	2480	1.381	1.2151
8DPSK	Low	2402	1.363	1.2151
	Mid	2441	1.364	1.2161
	High	2480	1.361	1.2132

Test Plots


20dB Bandwidth measurement result

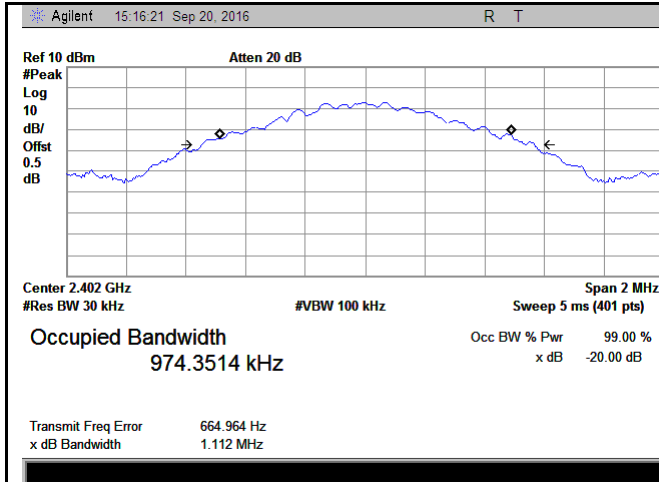


GFSK - Low Channel

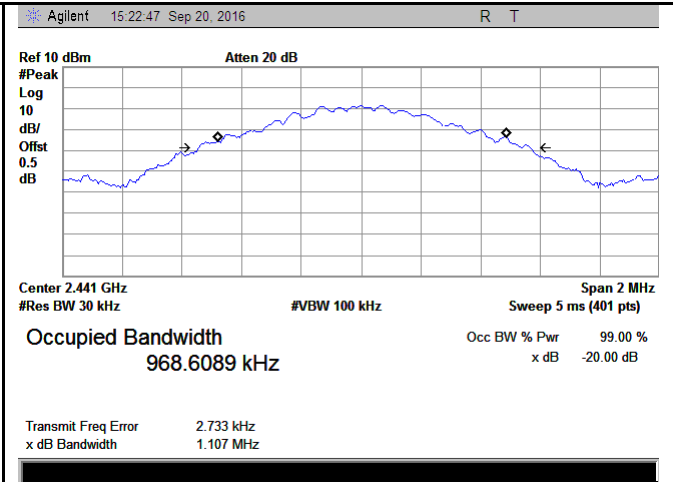


GFSK - Middle Channel

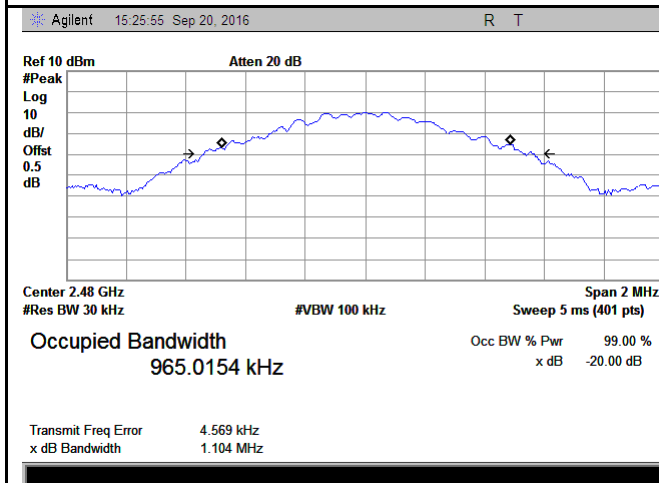


GFSK - High Channel

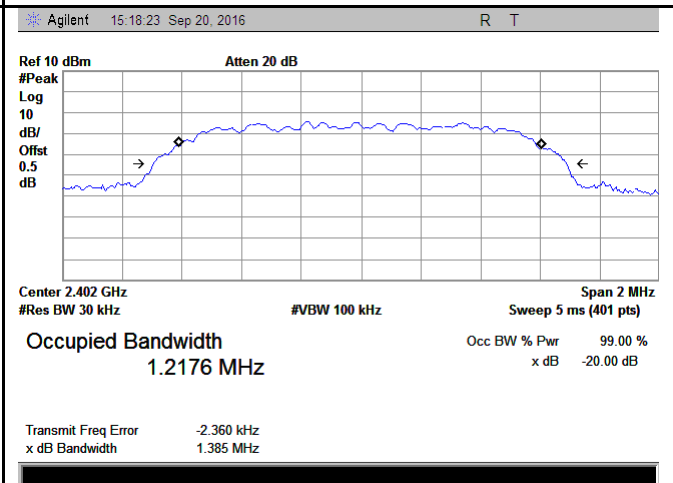


$\pi/4$ DPSK - Low Channel

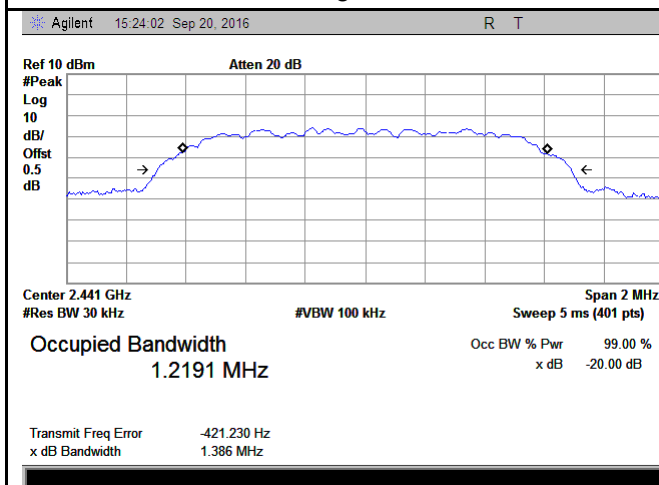


$\pi/4$ DQPSK - Middle Channel

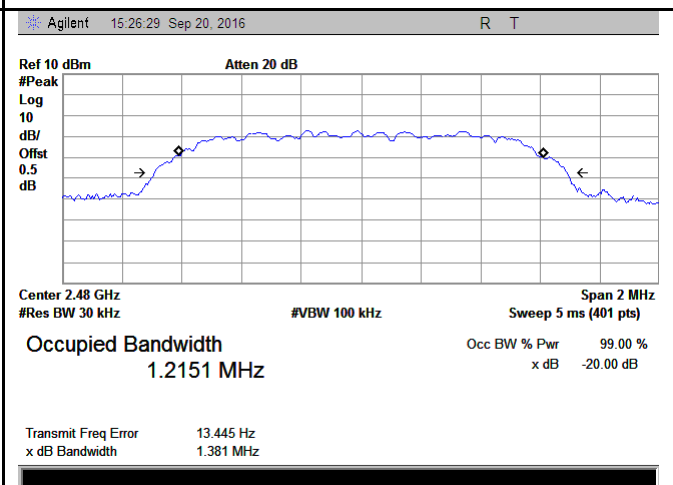


$\pi/4$ DQPSK - High Channel

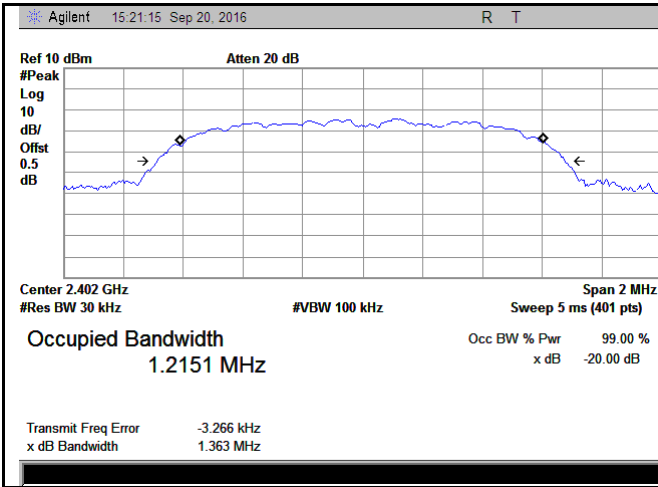

8DPSK - Low Channel

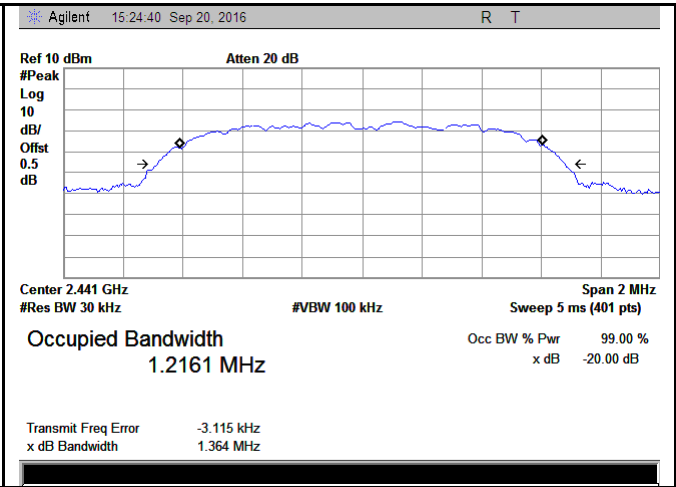

8DPSK - Middle Channel

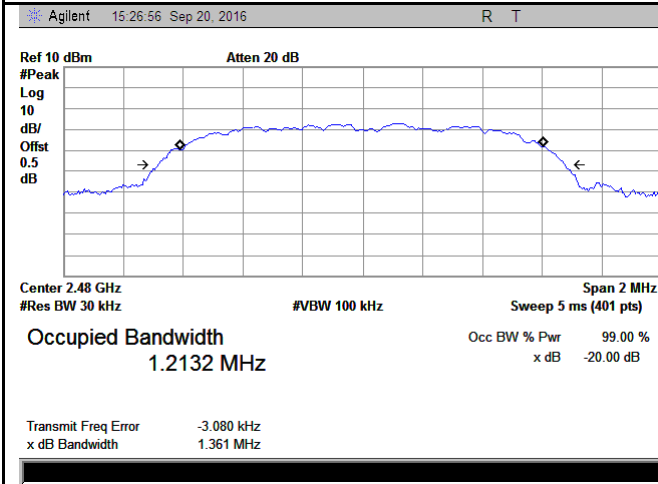


8DPSK - High Channel

6.4 Peak Output Power

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1020mbar
Test date :	September 20, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	<input type="checkbox"/>

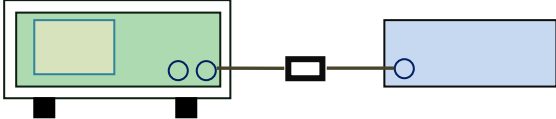Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p>Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW $>$ the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize.
----------------	--

	- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A
 Test Plot Yes (See below) N/A


Peak Output Power measurement result

Type	Modulation	CH	Freq (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	-3.870	125	Pass
		Mid	2441	-3.190	125	Pass
		High	2480	-3.283	125	Pass
	π /4 DQPSK	Low	2402	-3.419	125	Pass
		Mid	2441	-3.597	125	Pass
		High	2480	-3.862	125	Pass
	8DPSK	Low	2402	-3.408	125	Pass
		Mid	2441	-3.920	125	Pass
		High	2480	-3.738	125	Pass


Test Plots

Output Power measurement result

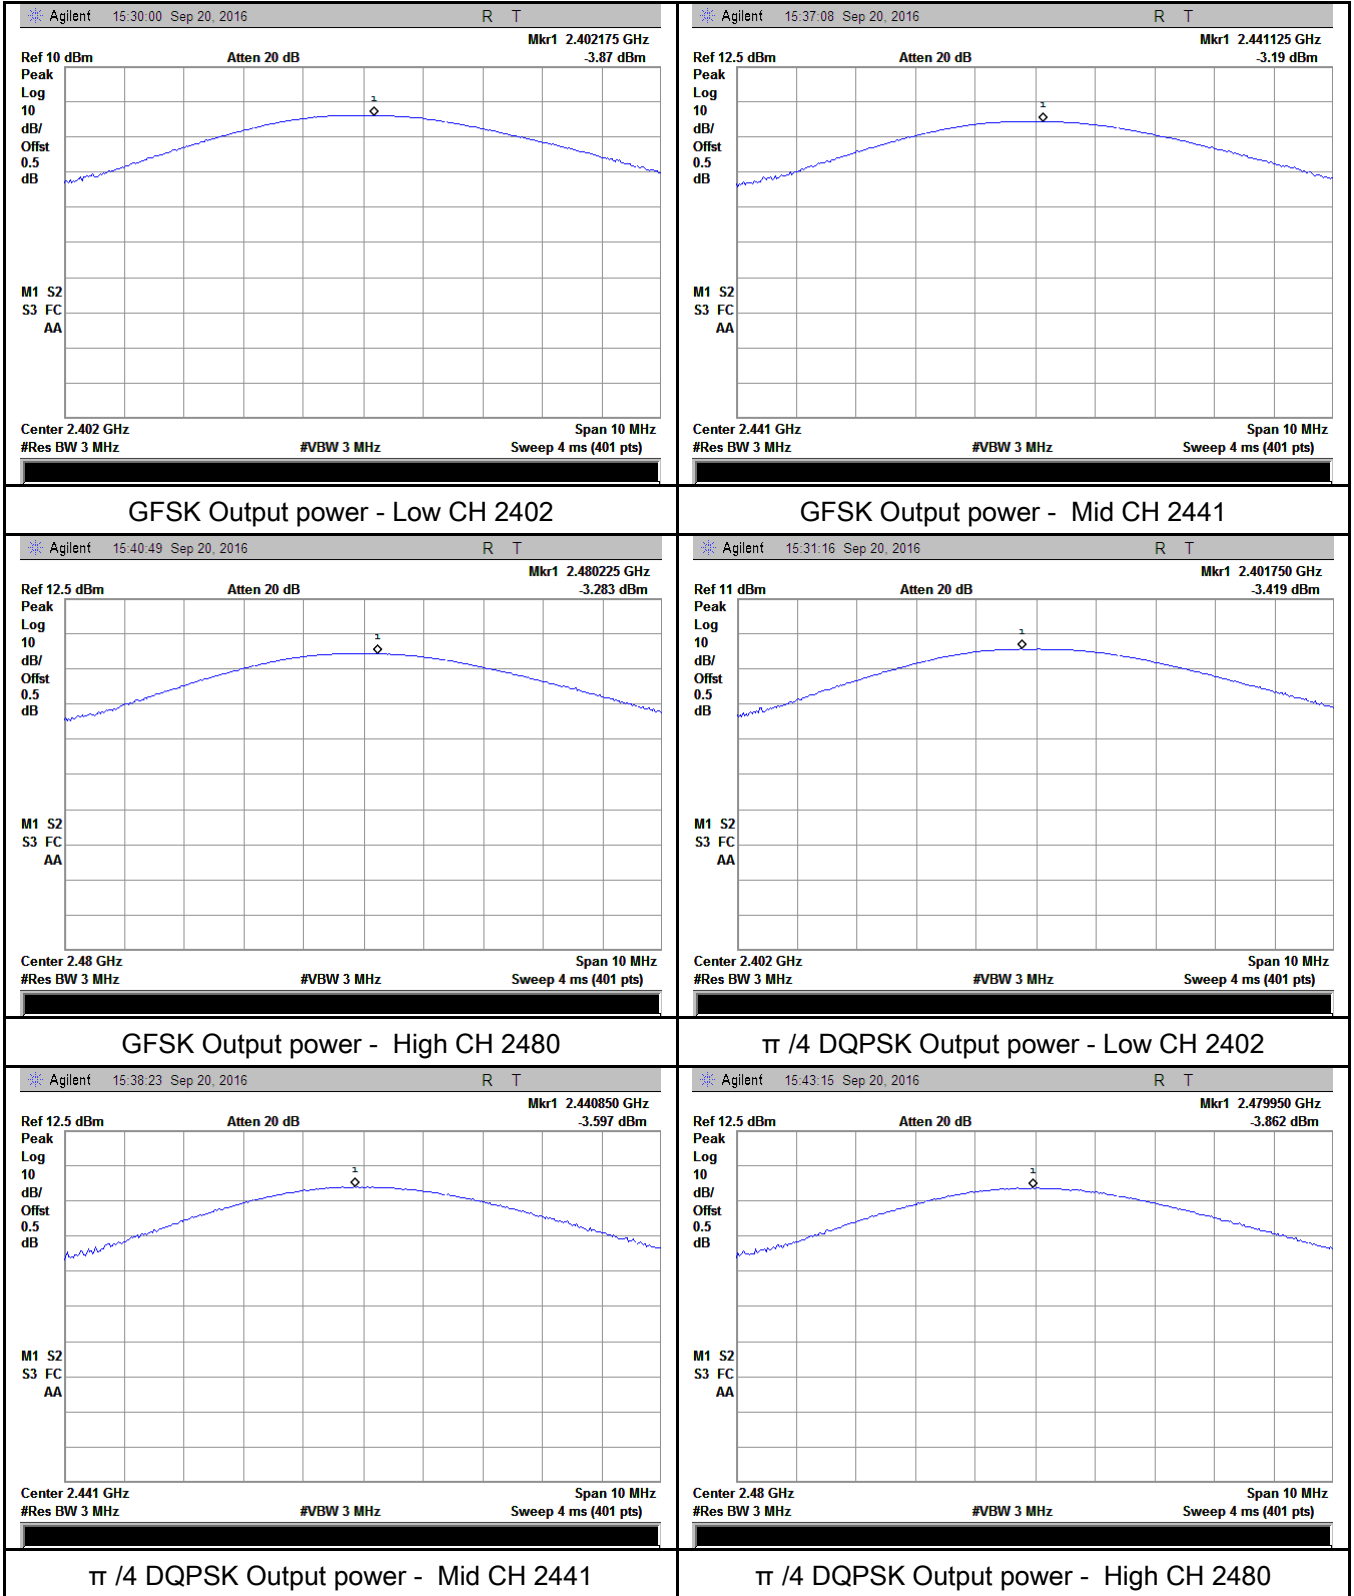


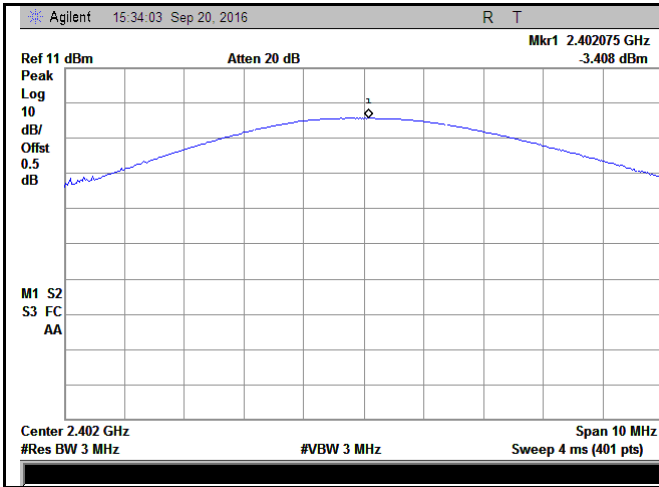

8DPSK Output power - Low CH 2402

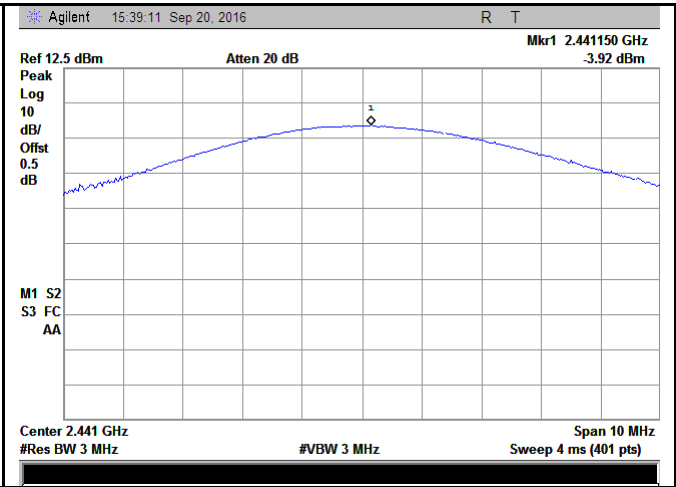

8DPSK Output power - Mid CH 2441

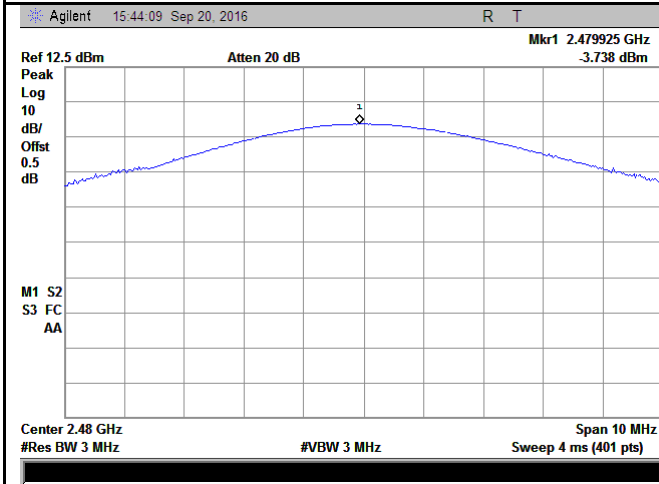

8DPSK Output power - High CH 2480

6.5 Number of Hopping Channel

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1020mbar
Test date :	September 20, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW ≥ 1% of the span - VBW ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

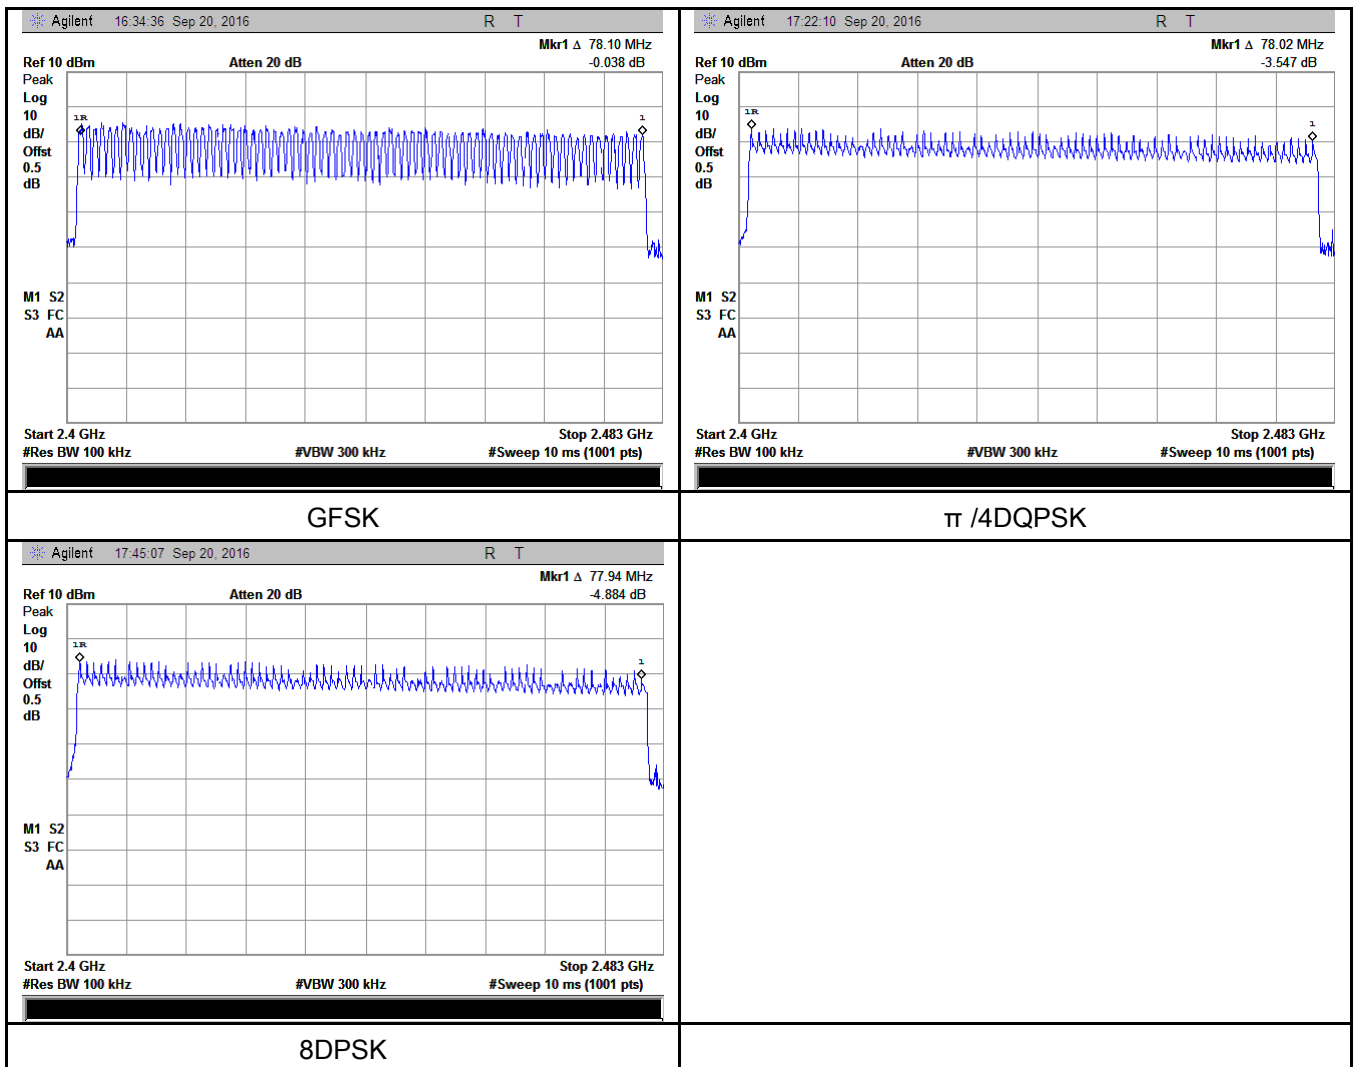

6.6 Time of Occupancy (Dwell Time)

Temperature	25°C
Relative Humidity	53%
Atmospheric Pressure	1020mbar
Test date :	September 20, 2016
Tested By :	Loren Luo

Requirement(s):

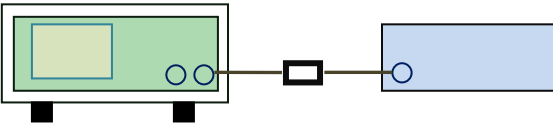Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup			
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A


Dwell Time measurement result

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.96	315.733	400	Pass
		Mid	2.91	310.400	400	Pass
		High	2.91	310.400	400	Pass
	π /4 DQPSK	Low	2.91	310.400	400	Pass
		Mid	2.89	308.267	400	Pass
		High	2.88	307.200	400	Pass
	8DPSK	Low	2.95	314.667	400	Pass
		Mid	2.91	310.400	400	Pass
		High	2.89	308.267	400	Pass


Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6

Test Plots


Dwell Time measurement result

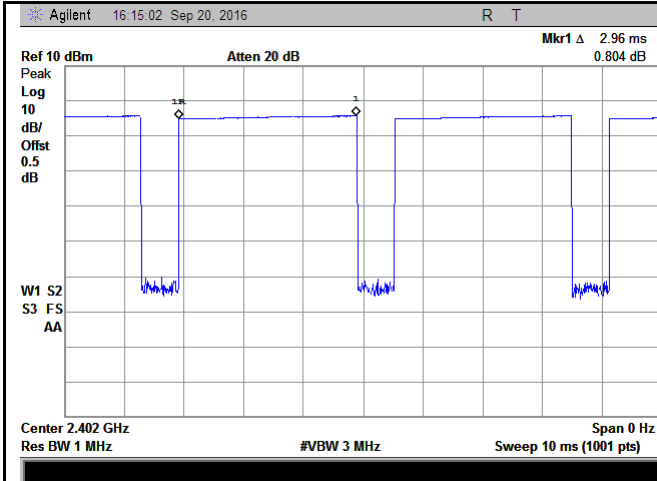


GFSK - Low CH 2402

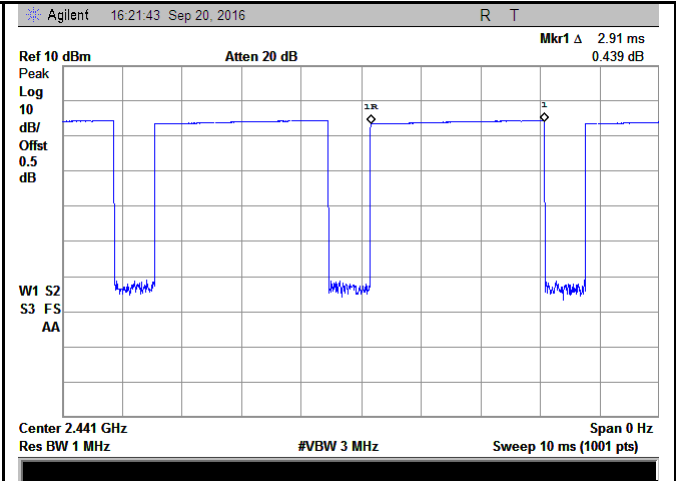


GFSK - Mid CH 2441

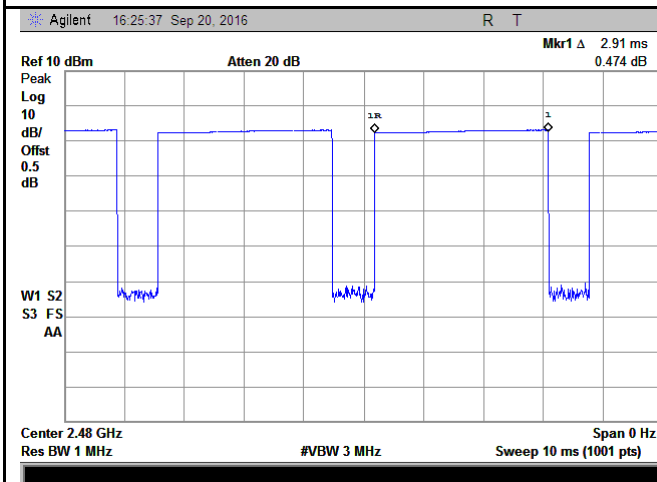


GFDK - High CH 2480

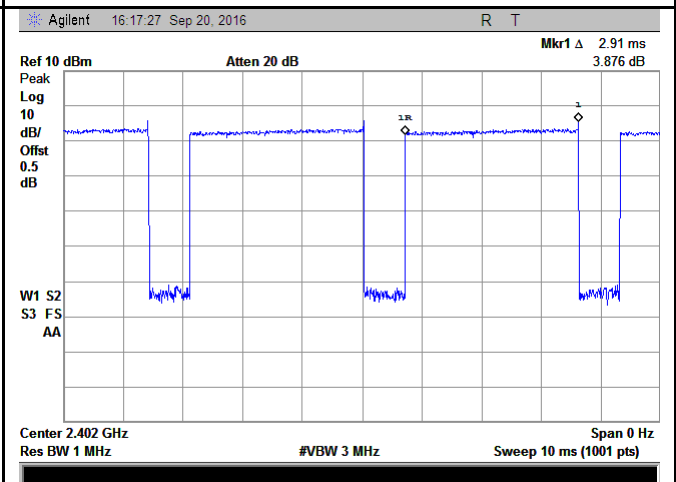


$\pi/4$ DQPSK - Low CH 2402

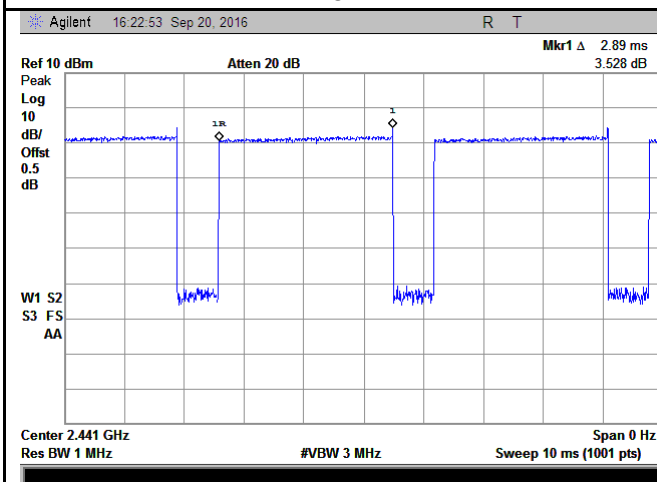


$\pi/4$ DQPSK - Mid CH 2441

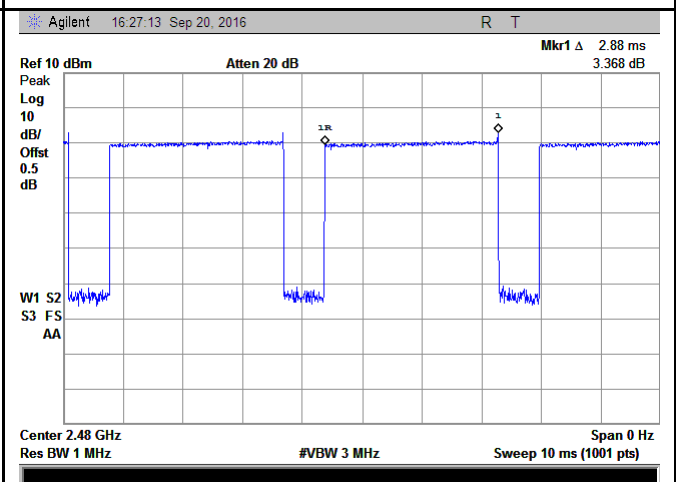


$\pi/4$ DQPSK - High CH 2480

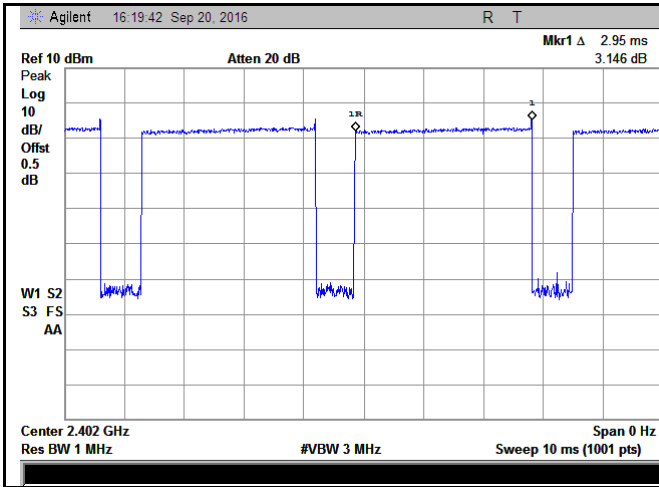

8DPSK - Low CH 2402

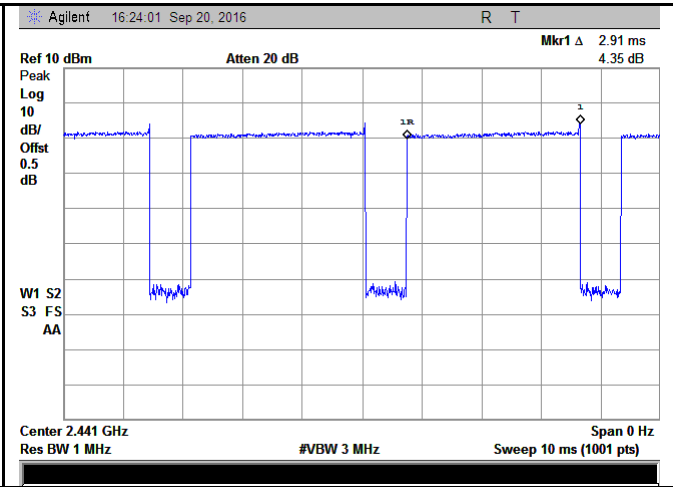

8DPSK - Mid CH 2441

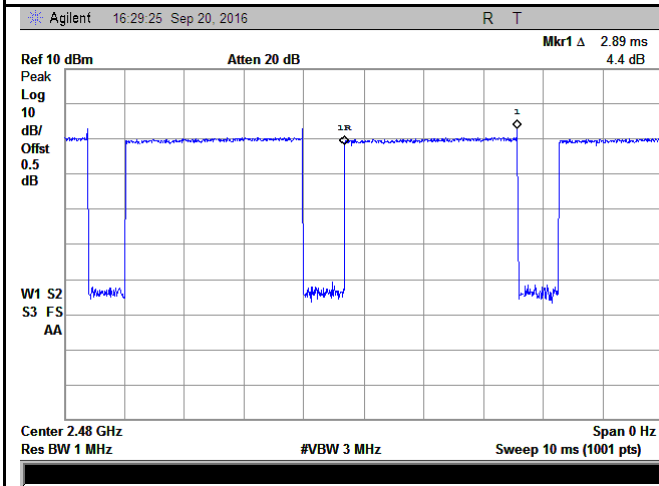

8DPSK - High CH 2480

6.7 Band Edge

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	September 22, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>

Test Setup	
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,
----------------	--



Test Report	16071154-FCC-R
Page	29 of 59

	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A
Test Plot Yes (See below) N/A



Test Plots

GFSK Mode:

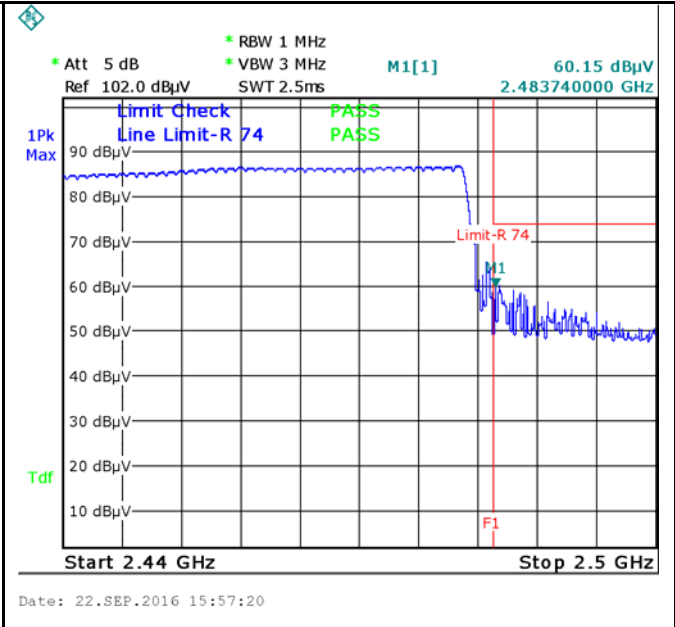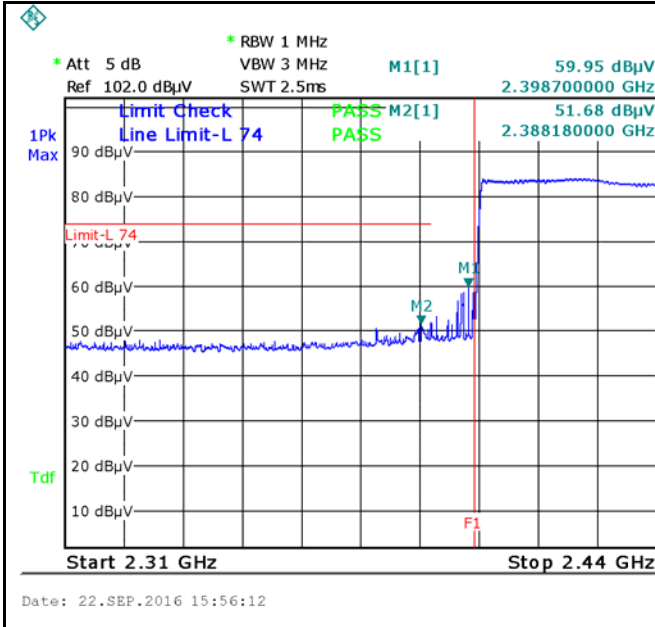


GFSK-Hopping Left Side-PK
 Note: F1 is frequency 2400MHz

GFSK-Hopping Right Side-PK
 Note: F1 is frequency 2483.5MHz

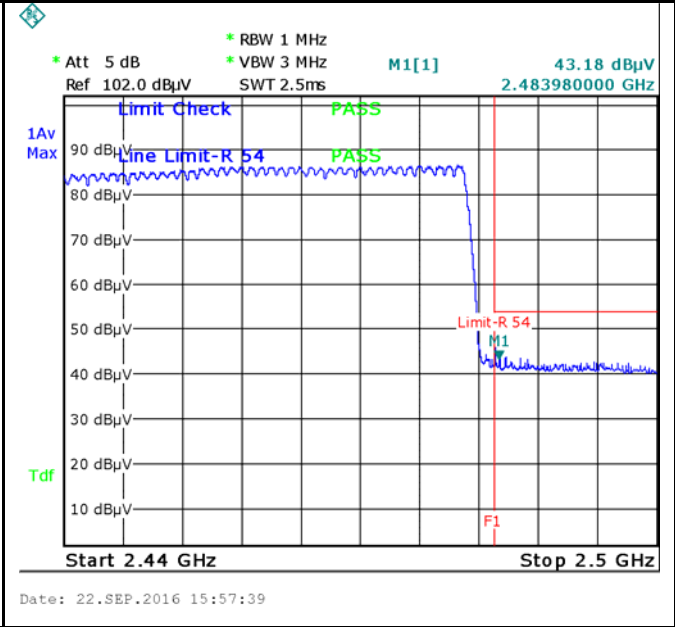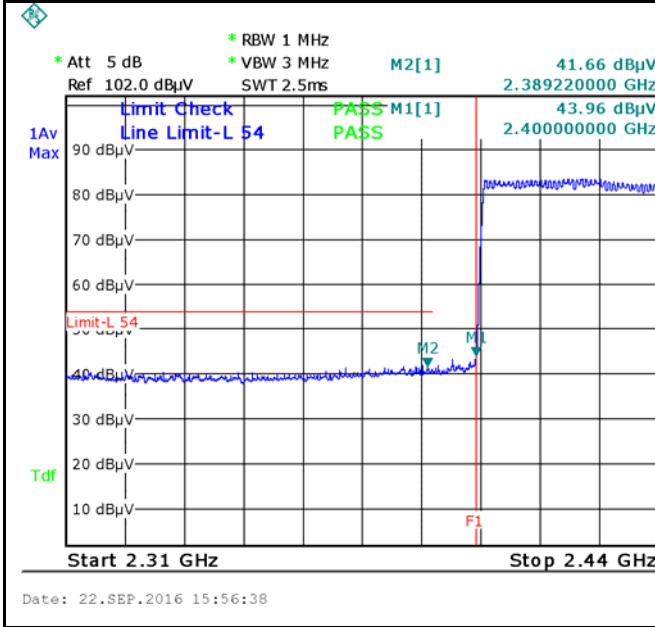

GFSK-Hopping Left Side-AV


GFSK-Hopping Right Side-AV

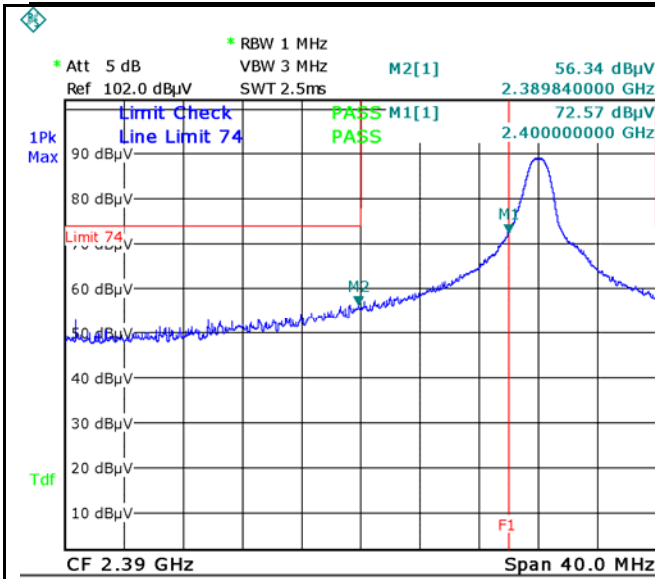

Date: 22.SEP.2016 10:04:44

GFSK-Left Side-PK


Note: F1 is frequency 2400MHz

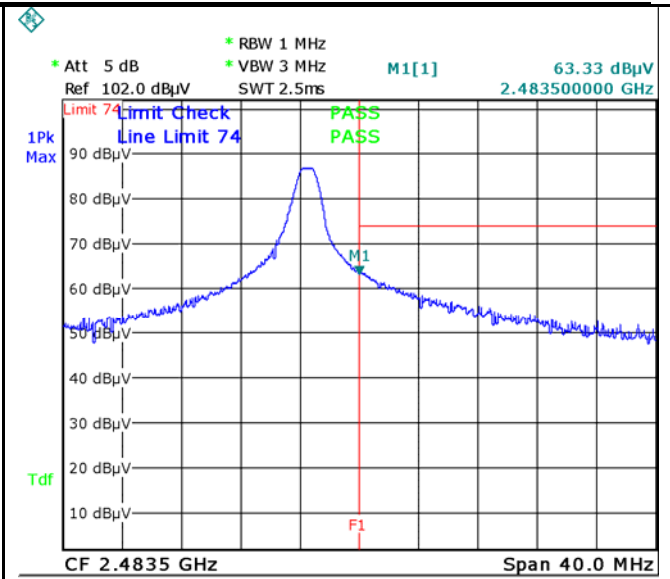

Date: 22.SEP.2016 15:47:42


GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

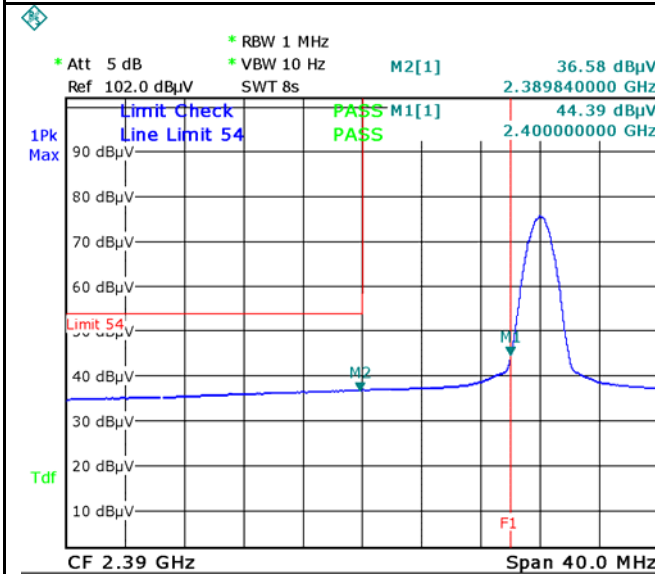

Date: 22.SEP.2016 10:05:17



GFSK-Left Side-AV

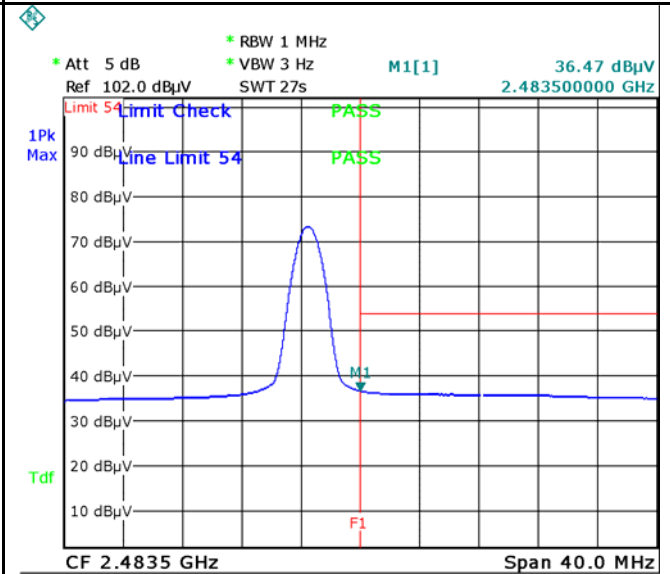

Date: 22.SEP.2016 15:49:02



GFSK-Right Side-AV

$\pi/4$ DQPSK Mode:

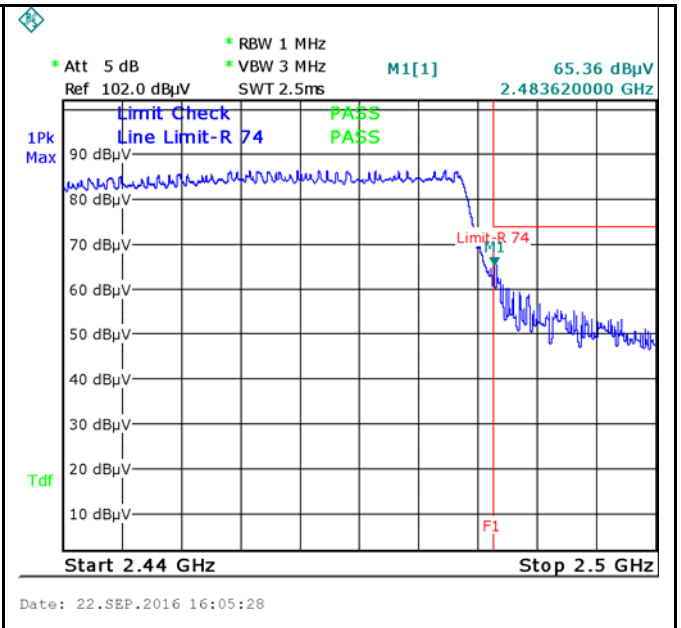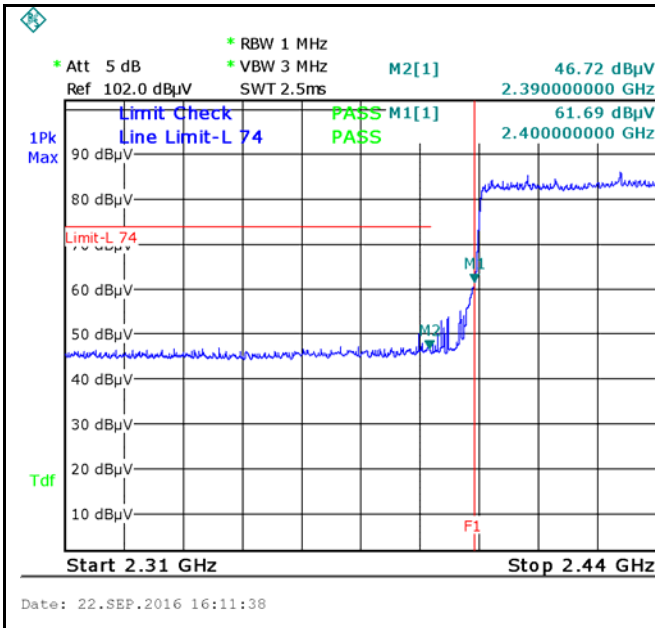


$\pi/4$ DQPSK-Hopping Left Side-PK
Note: F1 is frequency 2400MHz

$\pi/4$ DQPSK-Hopping Right Side-PK
Note: F1 is frequency 2483.5MHz

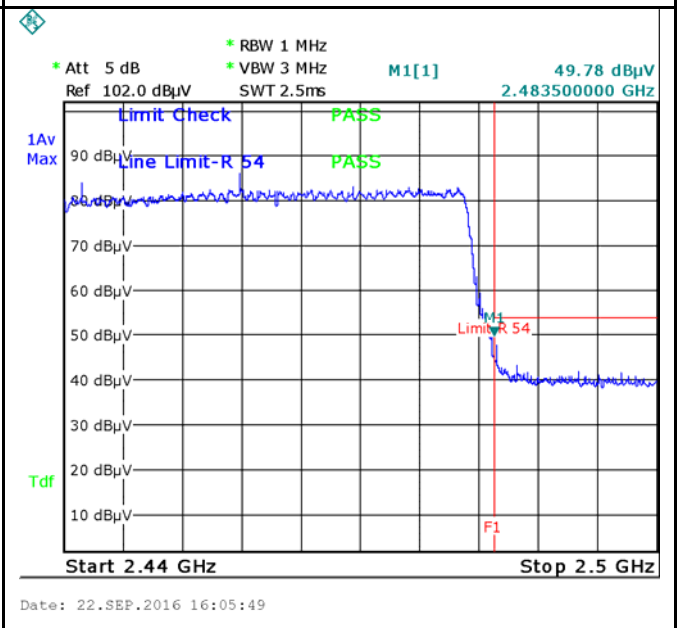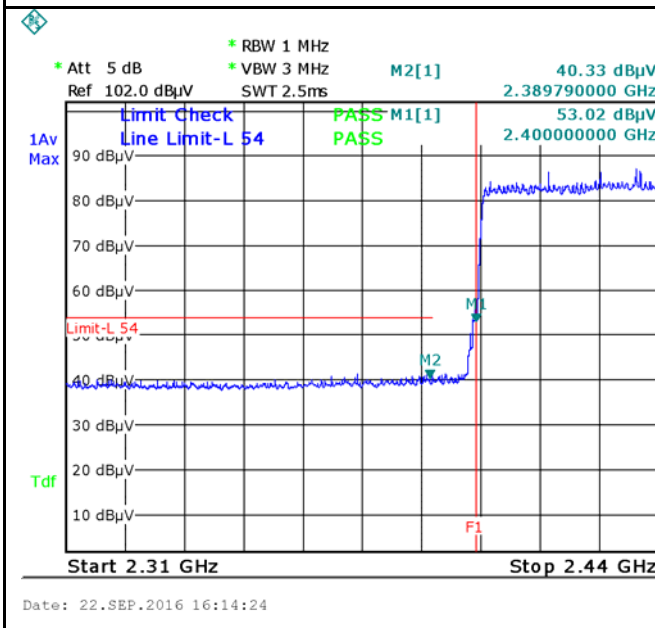


$\pi/4$ DQPSK-Hopping Left-AV

$\pi/4$ DQPSK-Hopping Right-AV

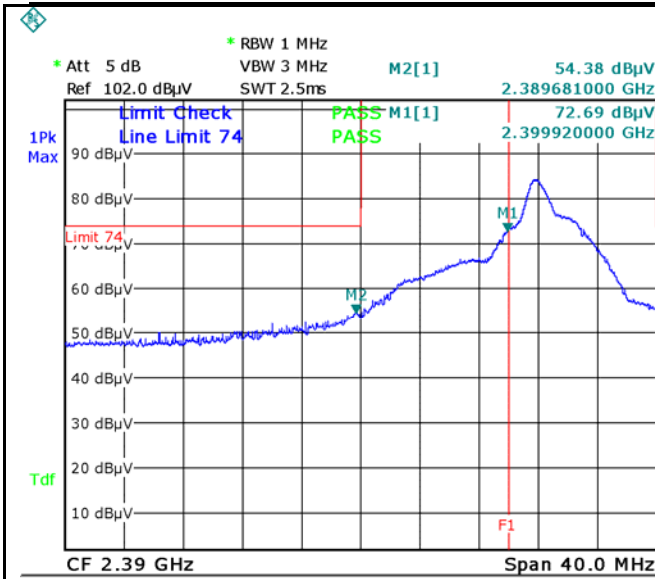


Date: 22.SEP.2016 15:17:18

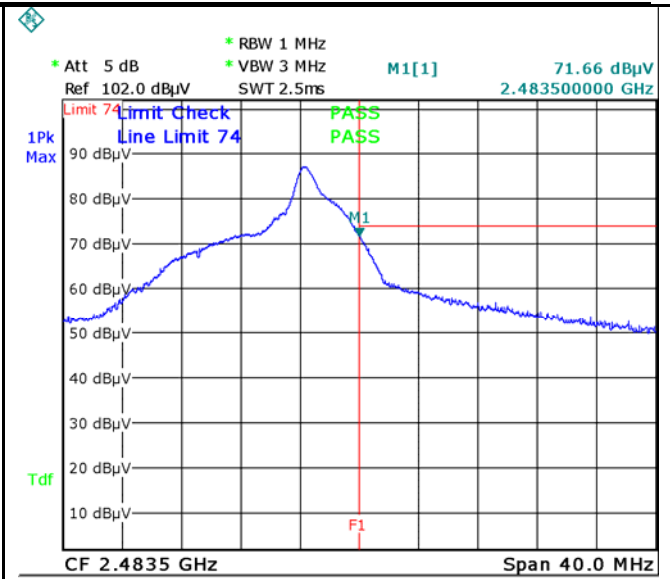


Date: 22.SEP.2016 15:44:04

π /4 DQPSK-Left Side-PK
Note: F1 is frequency 2400MHz

π /4 DQPSK-Right Side-PK
Note: F1 is frequency 2483.5MHz

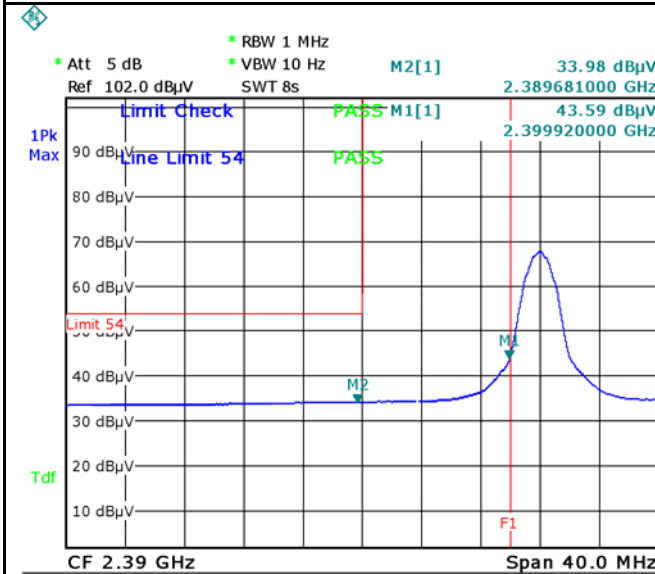

Date: 22.SEP.2016 15:21:40

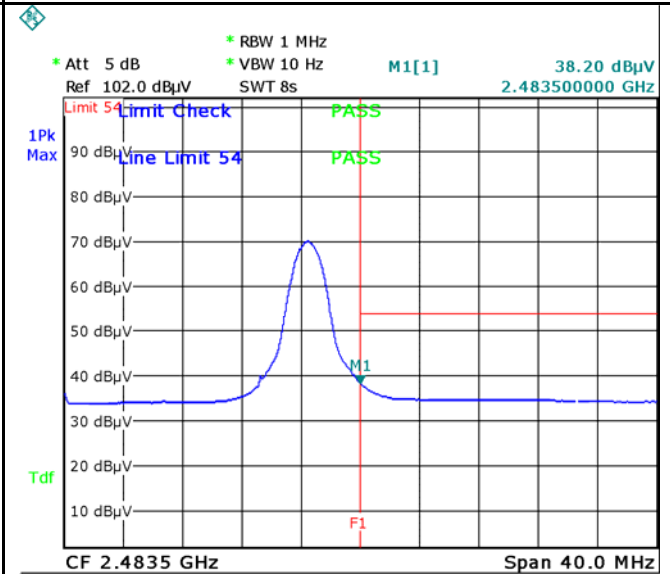


Date: 22.SEP.2016 15:45:04


π /4 DQPSK-Left Side-AV

π /4 DQPSK-Right Side-AV

8DPSK Mode:

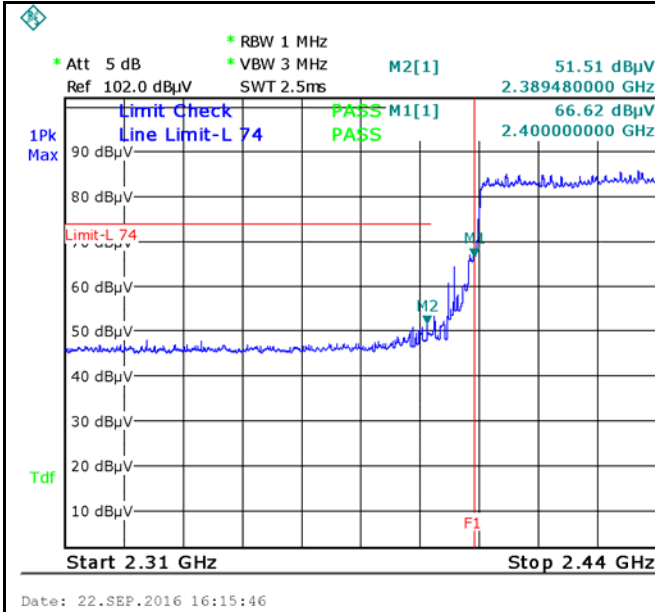


8DPSK-Hopping Left Side-PK
Note: F1 is frequency 2400MHz

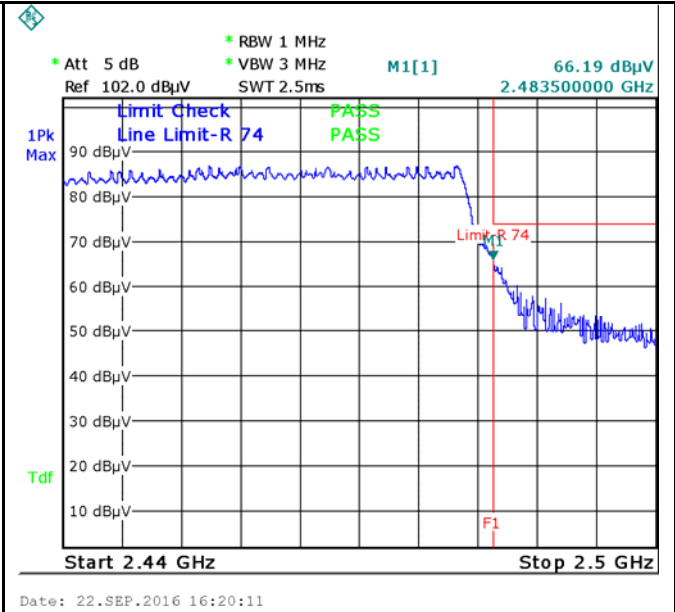




8DPSK--Hopping Right Side-PK
Note: F1 is frequency 2483.5MHz

8DPSK--Hopping Left-AV

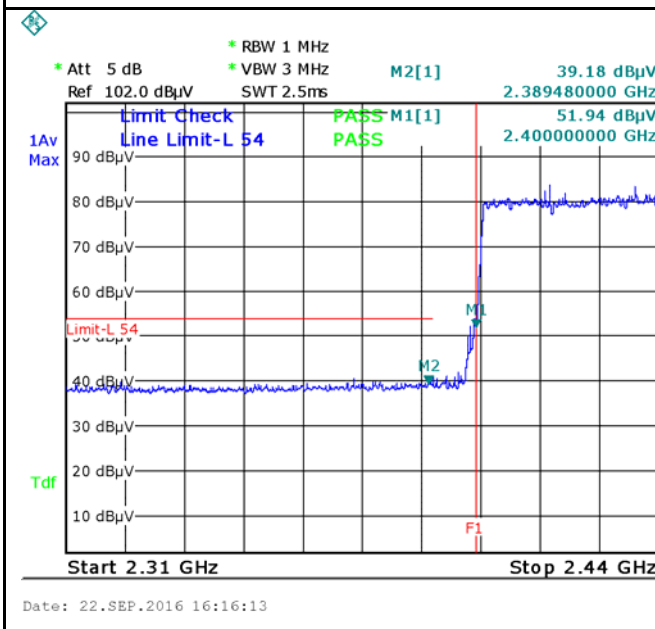



8DPSK--Hopping Right-AV

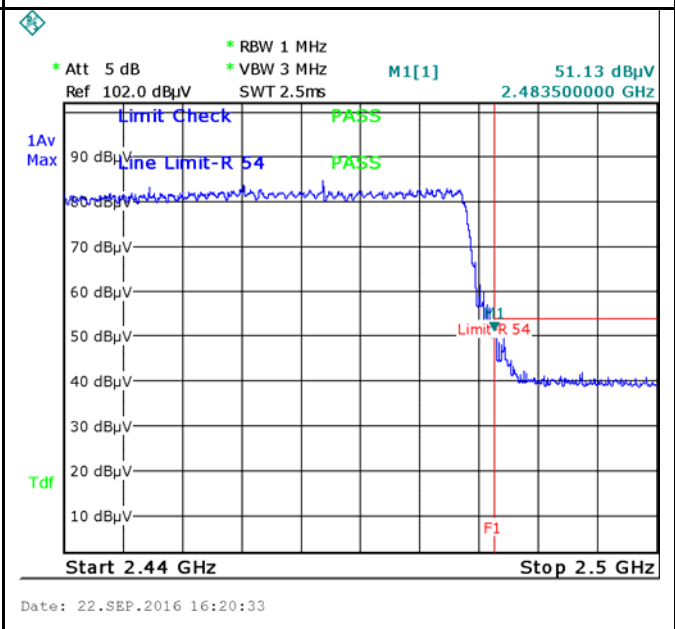

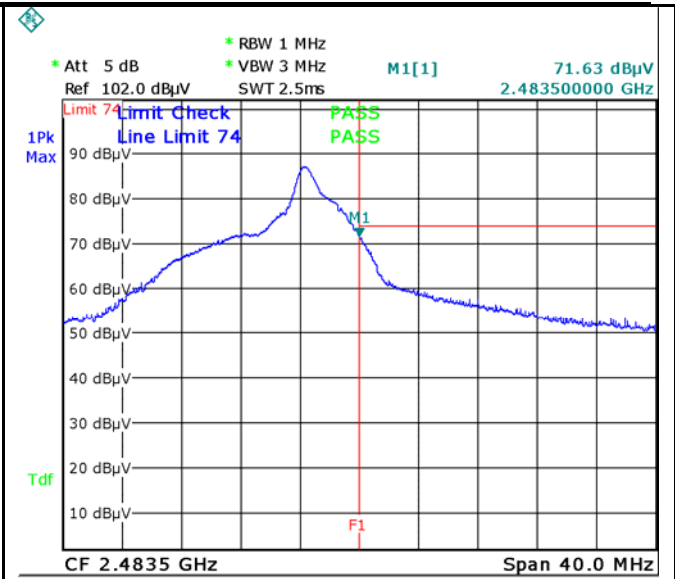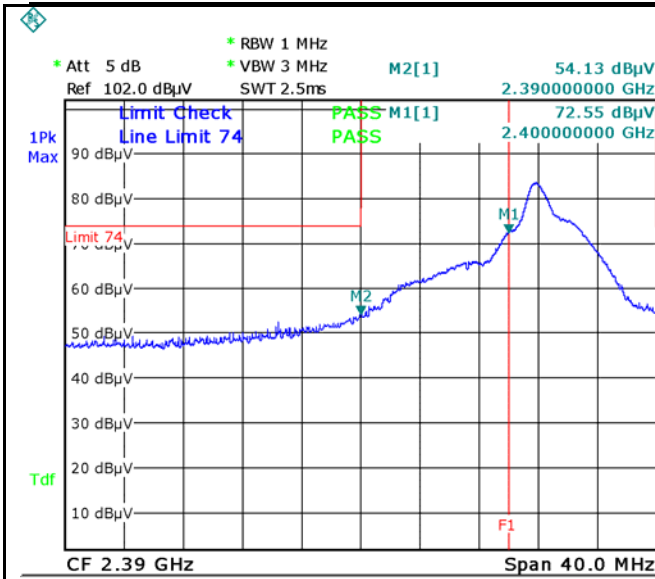

8DPSK--Left Side-PK
Note: F1 is frequency 2400MHz

8DPSK--Right Side-PK
Note: F1 is frequency 2483.5MHz

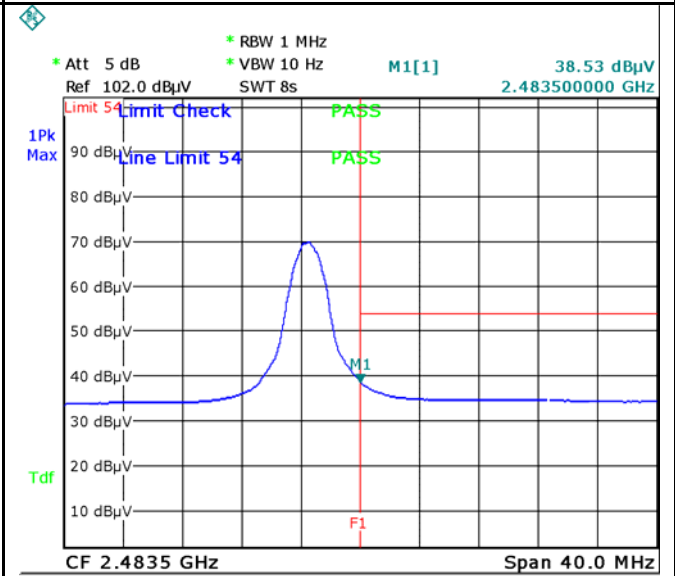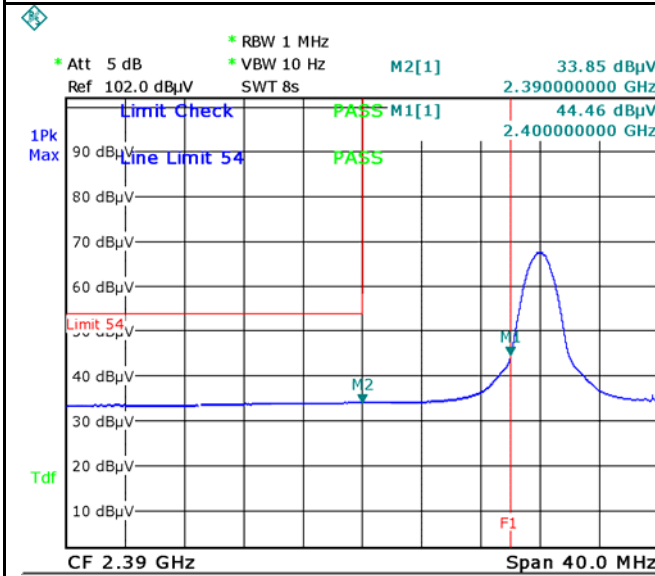

8DPSK--Left Side-AV

8DPSK--Right Side-AV

6.8 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	September 22, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBμV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

Test Setup	<p>Note: 1.Support units were connected to second LISN. 2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	--

Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	---


Test Report	16071154-FCC-R
Page	37 of 59

	<p>coaxial cable.</p> <ol style="list-style-type: none"> 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode : Bluetooth Mode

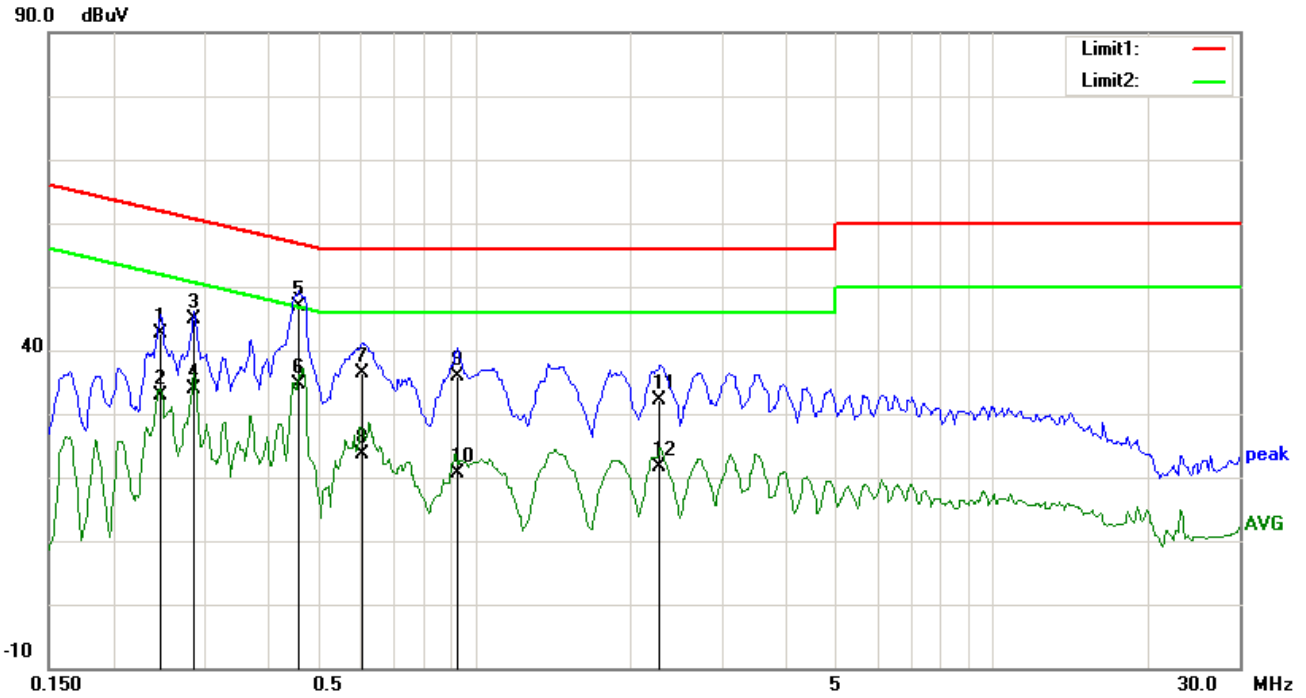


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2475	32.55	QP	10.03	42.58	61.84	-19.26
2	L1	0.2475	22.89	AVG	10.03	32.92	51.84	-18.92
3	L1	0.2865	34.87	QP	10.03	44.90	60.63	-15.73
4	L1	0.2865	23.97	AVG	10.03	34.00	50.63	-16.63
5	L1	0.4581	36.85	QP	10.03	46.88	56.73	-9.85
6	L1	0.4581	24.58	AVG	10.03	34.61	46.73	-12.12
7	L1	0.6063	26.27	QP	10.03	36.30	56.00	-19.70
8	L1	0.6063	13.48	AVG	10.03	23.51	46.00	-22.49
9	L1	0.9261	25.85	QP	10.03	35.88	56.00	-20.12
10	L1	0.9261	10.51	AVG	10.03	20.54	46.00	-25.46
11	L1	2.2833	22.17	QP	10.05	32.22	56.00	-23.78
12	L1	2.2833	11.47	AVG	10.05	21.52	46.00	-24.48

Test Mode : Bluetooth Mode

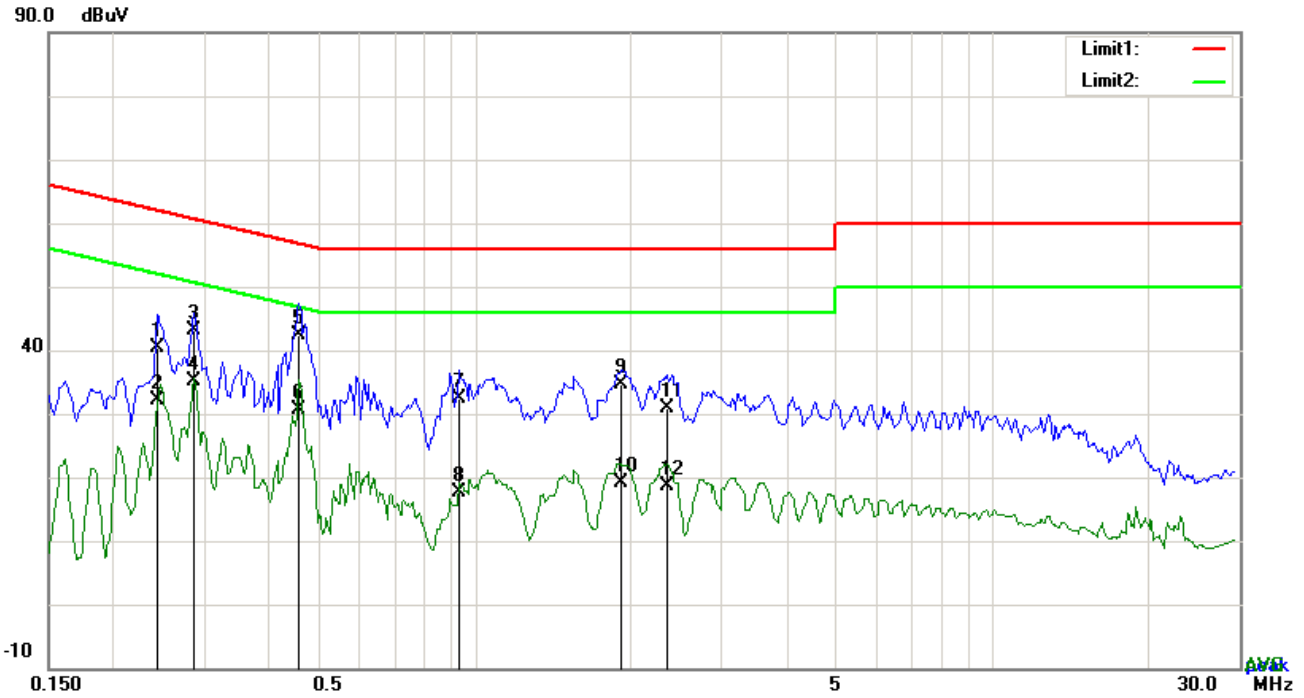


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.2436	30.41	QP	10.02	40.43	61.97	-21.54
2	N	0.2436	22.22	AVG	10.02	32.24	51.97	-19.73
3	N	0.2865	33.02	QP	10.02	43.04	60.63	-17.59
4	N	0.2865	25.19	AVG	10.02	35.21	50.63	-15.42
5	N	0.4581	32.28	QP	10.02	42.30	56.73	-14.43
6	N	0.4581	20.72	AVG	10.02	30.74	46.73	-15.99
7	N	0.9300	22.37	QP	10.03	32.40	56.00	-23.60
8	N	0.9300	7.64	AVG	10.03	17.67	46.00	-28.33
9	N	1.9245	24.58	QP	10.04	34.62	56.00	-21.38
10	N	1.9245	9.11	AVG	10.04	19.15	46.00	-26.85
11	N	2.3496	20.80	QP	10.04	30.84	56.00	-25.16
12	N	2.3496	8.67	AVG	10.04	18.71	46.00	-27.29

Test Mode :	Bluetooth Mode
--------------------	-----------------------

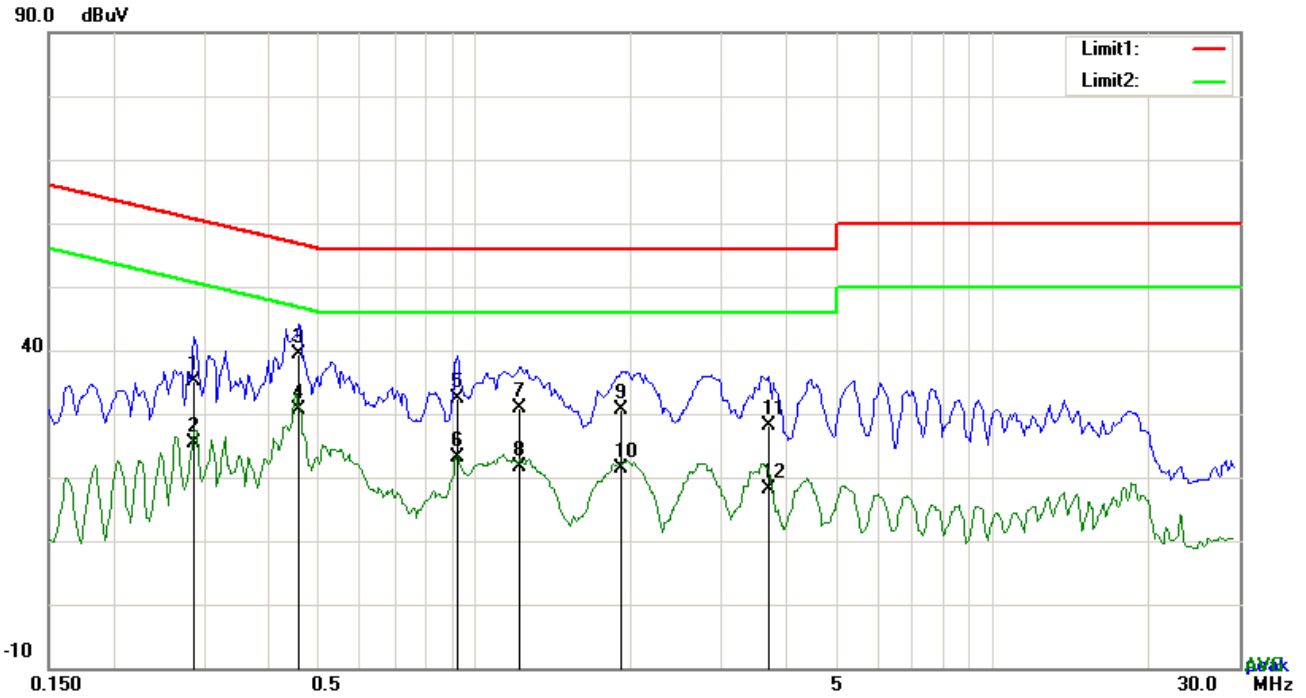


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2865	25.17	QP	10.03	35.20	60.63	-25.43
2	L1	0.2865	15.47	AVG	10.03	25.50	50.63	-25.13
3	L1	0.4581	29.42	QP	10.03	39.45	56.73	-17.28
4	L1	0.4581	20.56	AVG	10.03	30.59	46.73	-16.14
5	L1	0.9261	22.24	QP	10.03	32.27	56.00	-23.73
6	L1	0.9261	13.01	AVG	10.03	23.04	46.00	-22.96
7	L1	1.2225	20.83	QP	10.03	30.86	56.00	-25.14
8	L1	1.2225	11.68	AVG	10.03	21.71	46.00	-24.29
9	L1	1.9128	20.57	QP	10.04	30.61	56.00	-25.39
10	L1	1.9128	11.36	AVG	10.04	21.40	46.00	-24.60
11	L1	3.6981	18.19	QP	10.06	28.25	56.00	-27.75
12	L1	3.6981	8.03	AVG	10.06	18.09	46.00	-27.91

Test Mode :	Bluetooth Mode
-------------	----------------

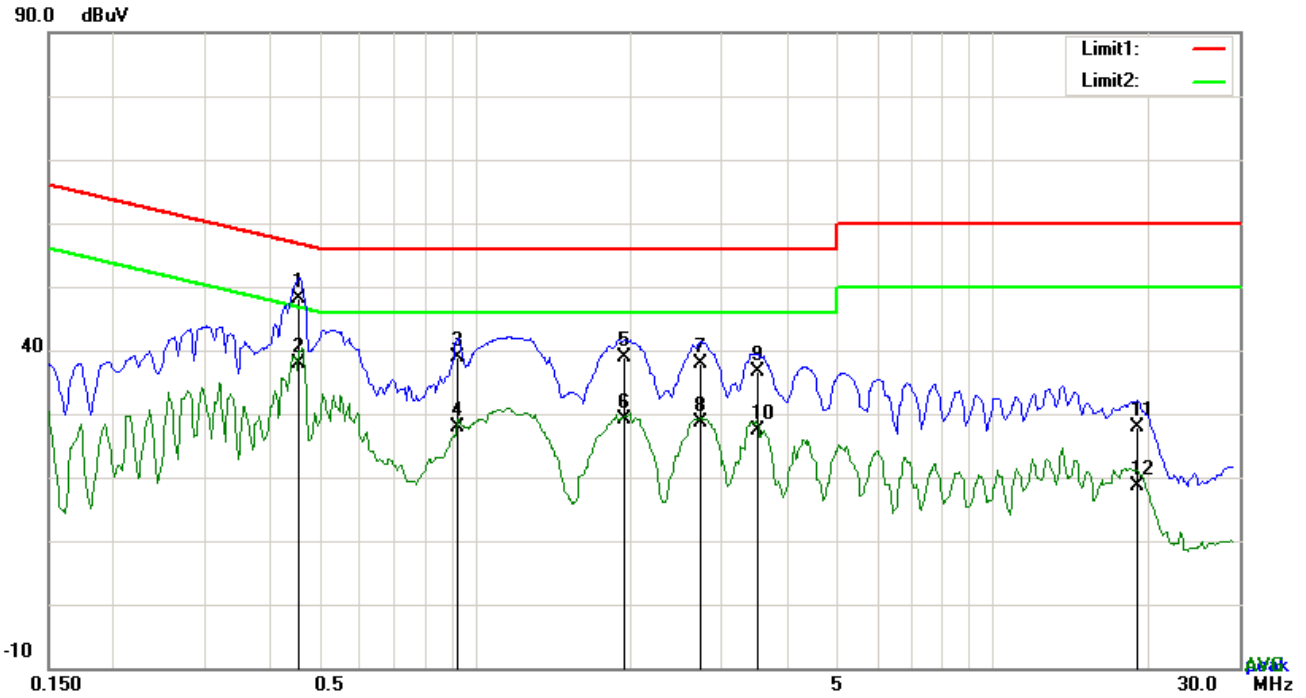

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.4581	38.06	QP	10.02	48.08	56.73	-8.65
2	N	0.4581	27.76	AVG	10.02	37.78	46.73	-8.95
3	N	0.9261	28.90	QP	10.03	38.93	56.00	-17.07
4	N	0.9261	17.76	AVG	10.03	27.79	46.00	-18.21
5	N	1.9401	28.85	QP	10.04	38.89	56.00	-17.11
6	N	1.9401	19.16	AVG	10.04	29.20	46.00	-16.80
7	N	2.7318	27.87	QP	10.05	37.92	56.00	-18.08
8	N	2.7318	18.48	AVG	10.05	28.53	46.00	-17.47
9	N	3.5226	26.50	QP	10.06	36.56	56.00	-19.44
10	N	3.5226	17.30	AVG	10.06	27.36	46.00	-18.64
11	N	19.0602	17.72	QP	10.25	27.97	60.00	-32.03
12	N	19.0602	8.45	AVG	10.25	18.70	50.00	-31.30

6.9 Radiated Spurious Emissions

Temperature	23°C
Relative Humidity	55%
Atmospheric Pressure	1022mbar
Test date :	September 22, 2016
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.205, §15.209, §15.247(d)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength ($\mu\text{V}/\text{m}$)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength ($\mu\text{V}/\text{m}$)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												

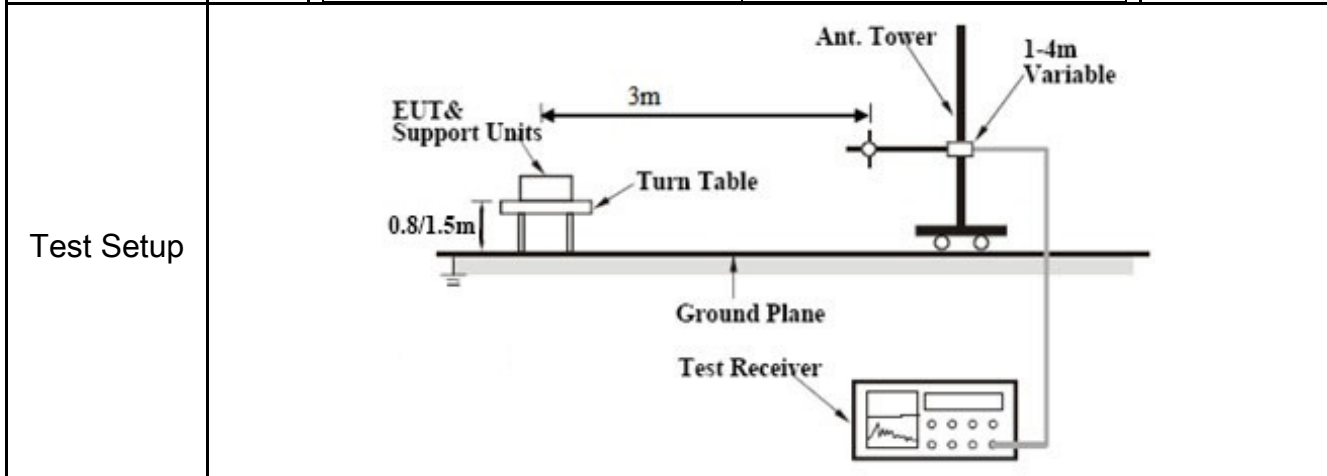

Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
-----------	---

Test Report	16071154-FCC-R
Page	43 of 59


	<p>a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Bluetooth Mode

Below 1GHz

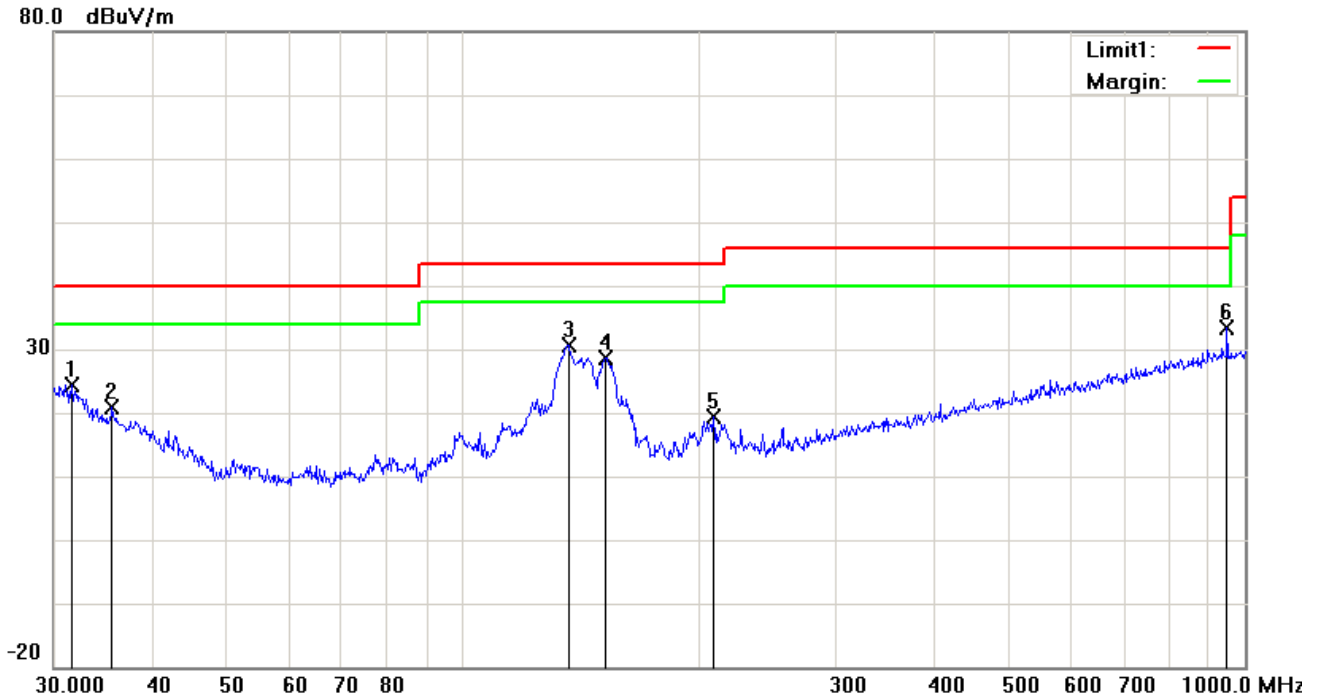


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	31.6202	25.87	peak	-1.45	24.42	40.00	-15.58	100	245
2	H	35.6240	25.24	peak	-4.40	20.84	40.00	-19.16	100	116
3	H	136.4598	39.02	peak	-8.32	30.70	43.50	-12.80	100	321
4	H	152.1297	36.98	peak	-8.38	28.60	43.50	-14.90	100	98
5	H	209.3129	28.18	peak	-8.82	19.36	43.50	-24.14	100	15
6	H	948.7610	28.30	peak	5.12	33.42	46.00	-12.58	100	158

Below 1GHz

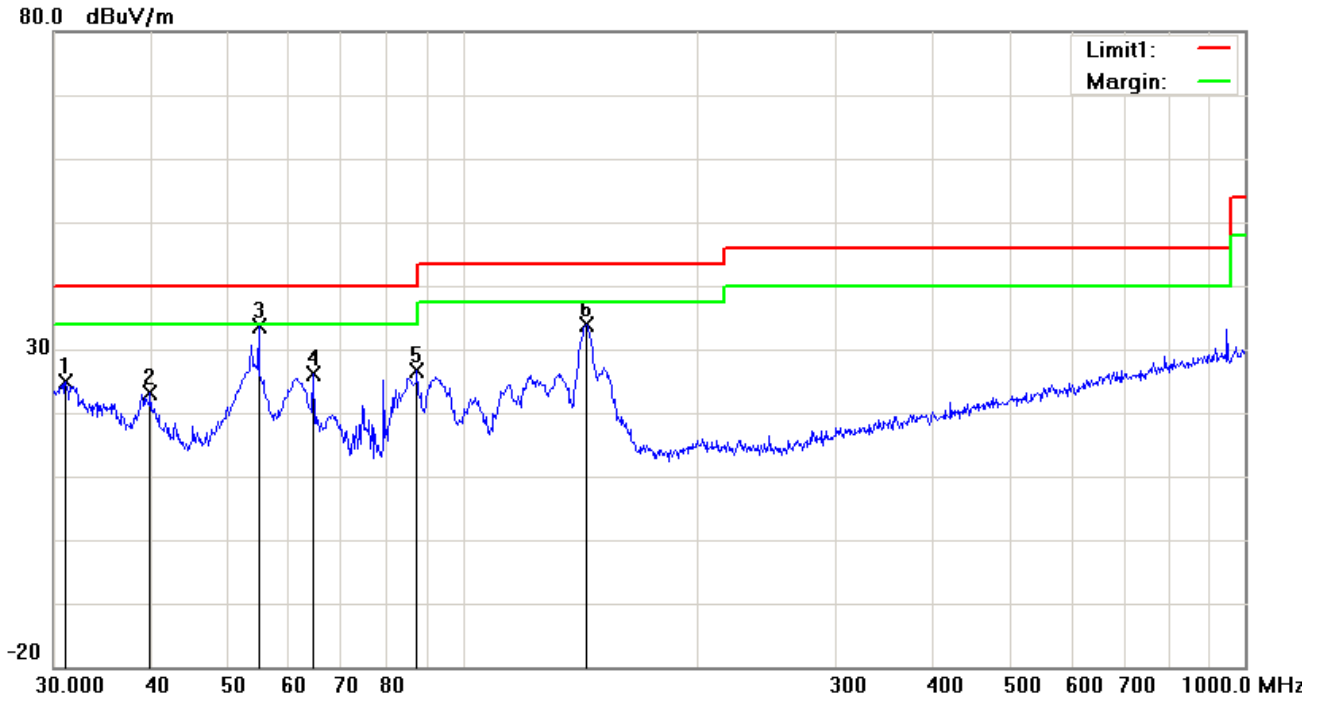

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	V	31.0706	25.87	peak	-1.04	24.83	40.00	-15.17	100	264
2	V	39.8542	30.56	peak	-7.48	23.08	40.00	-16.92	100	117
3	V	54.8348	47.38	peak	-13.74	33.64	40.00	-6.36	100	34
4	V	64.4331	40.25	peak	-14.01	26.24	40.00	-13.76	100	269
5	V	87.4177	40.04	peak	-13.44	26.60	40.00	-13.40	100	316
6	V	143.8295	42.26	peak	-8.48	33.78	43.50	-9.72	100	9

Above 1GHz

Test Mode:	Transmitting Mode
-------------------	--------------------------

Low Channel: 8-DPSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4804	38.72	AV	V	33.67	6.86	32.66	46.59	54	-7.41
4804	38.56	AV	H	33.67	6.86	32.66	46.43	54	-7.57
4804	47.64	PK	V	33.67	6.86	32.66	55.51	74	-18.49
4804	47.15	PK	H	33.67	6.86	32.66	55.02	74	-18.98
17804	24.62	AV	V	45.03	11.21	32.38	48.48	54	-5.52
17804	24.37	AV	H	45.03	11.21	32.38	48.23	54	-5.77
17804	40.86	PK	V	45.03	11.21	32.38	64.72	74	-9.28
17804	40.53	PK	H	45.03	11.21	32.38	64.39	74	-9.61

Middle Channel: GFSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dBµV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4882	38.85	AV	V	33.71	6.95	32.74	46.77	54	-7.23
4882	38.67	AV	H	33.71	6.95	32.74	46.59	54	-7.41
4882	47.92	PK	V	33.71	6.95	32.74	55.84	74	-18.16
4882	47.57	PK	H	33.71	6.95	32.74	55.49	74	-18.51
17823	24.23	AV	V	45.15	11.18	32.41	48.15	54	-5.85
17823	24.07	AV	H	45.15	11.18	32.41	47.99	54	-6.01
17823	41.13	PK	V	45.15	11.18	32.41	65.05	74	-8.95
17823	40.84	PK	H	45.15	11.18	32.41	64.76	74	-9.24

High Channel: GFSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	38.48	AV	V	33.9	6.76	32.74	46.4	54	-7.60
4960	38.31	AV	H	33.9	6.76	32.74	46.23	54	-7.77
4960	48.15	PK	V	33.9	6.76	32.74	56.07	74	-17.93
4960	47.86	PK	H	33.9	6.76	32.74	55.78	74	-18.22
17815	24.71	AV	V	45.22	11.35	32.38	48.9	54	-5.10
17815	24.46	AV	H	45.22	11.35	32.38	48.65	54	-5.35
17815	41.33	PK	V	45.22	11.35	32.38	65.52	74	-8.48
17815	41.12	PK	H	45.22	11.35	32.38	65.31	74	-8.69

Note:

- 1, The testing has been conformed to $10 \times 2480 \text{ MHz} = 24,800 \text{ MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/19/2015	11/18/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs


Annex B.i. Photograph: EUT External Photo




Whole package View




EUT - Front View

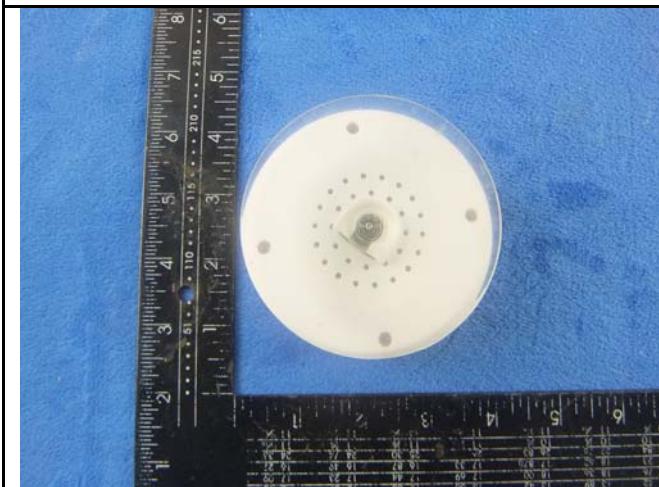


EUT - Rear View

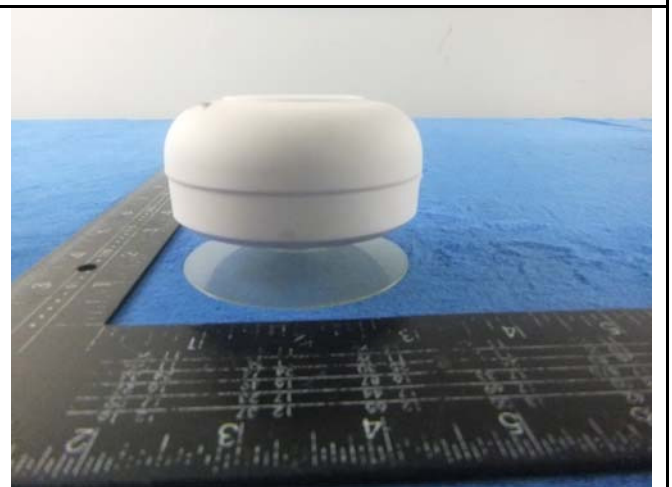


EUT - Top View

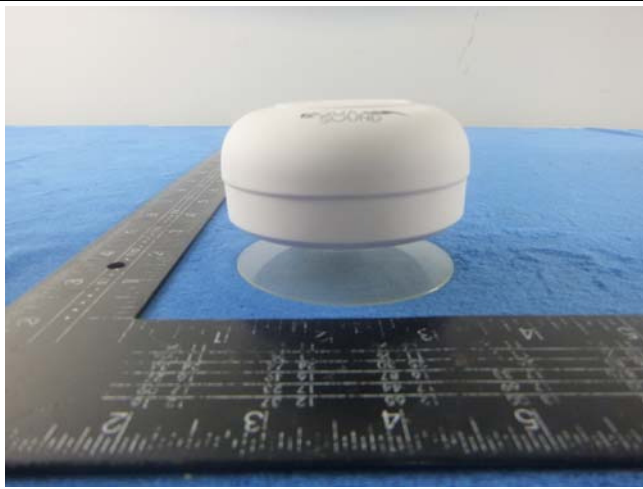

EUT - Bottom View

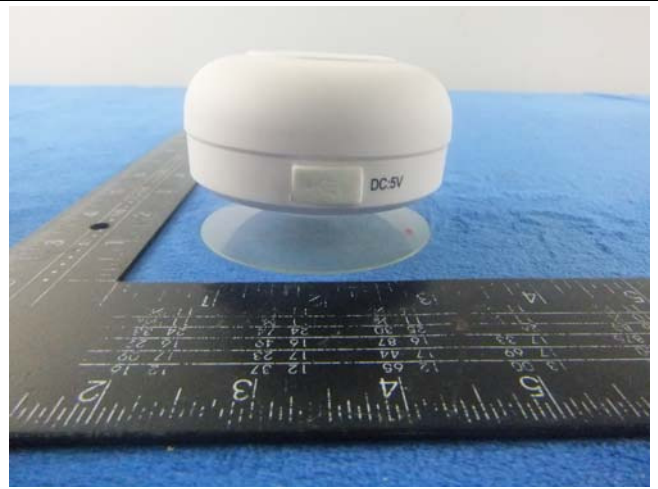


EUT - Left View

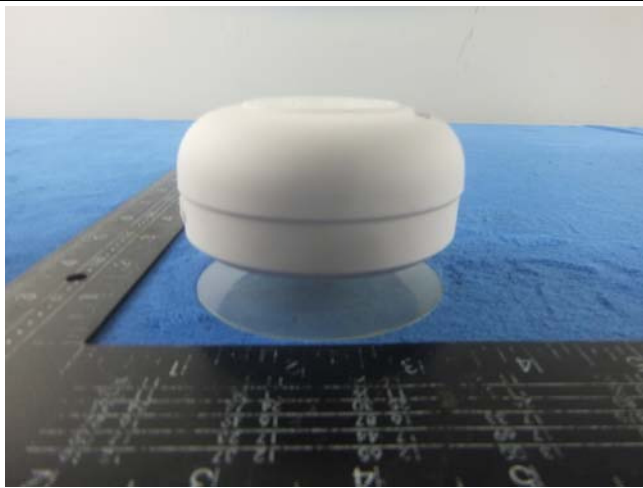


EUT - Right View

Annex B.ii. Photograph: EUT Internal Photo

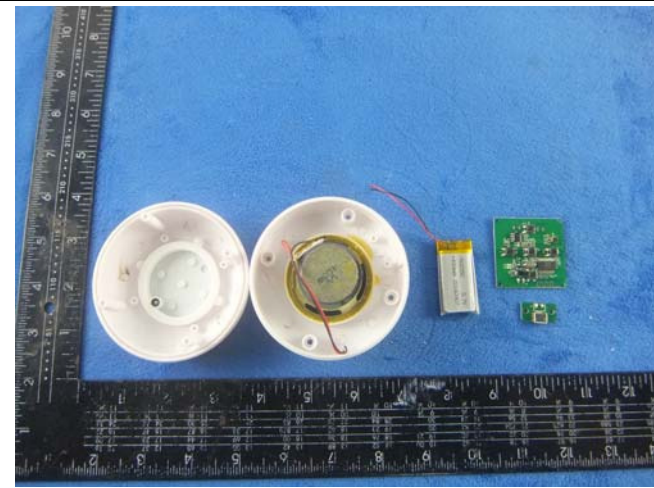


Cover Off - Top View

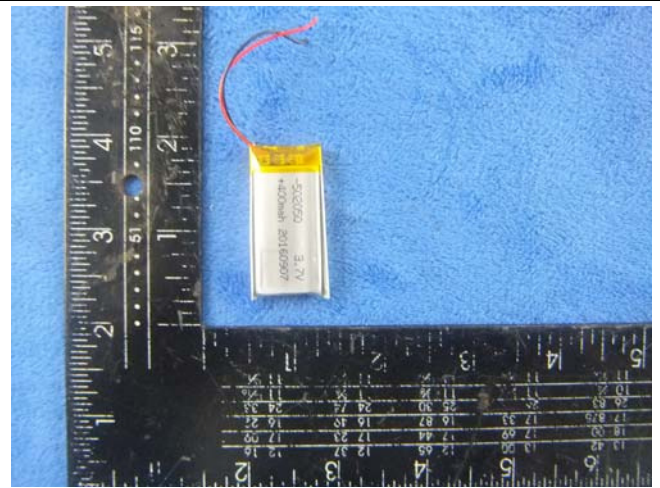


Battery - Front View




Battery - Rear View

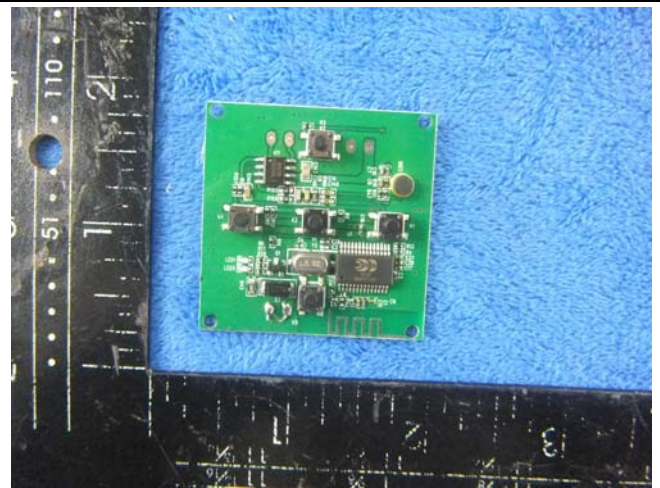


Mainboard - Front View

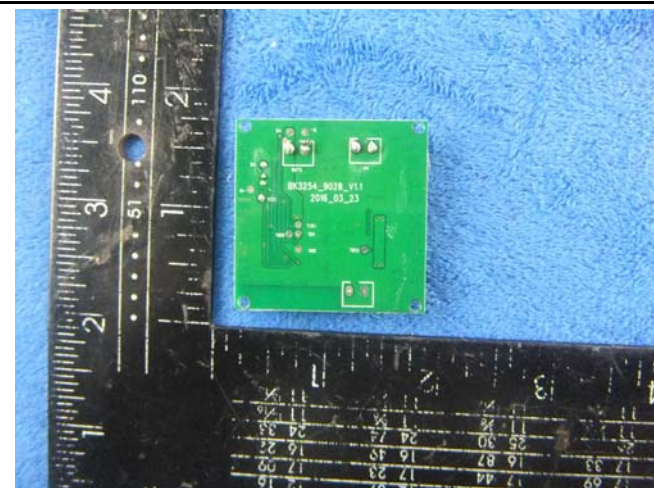


Mainboard - Rear View

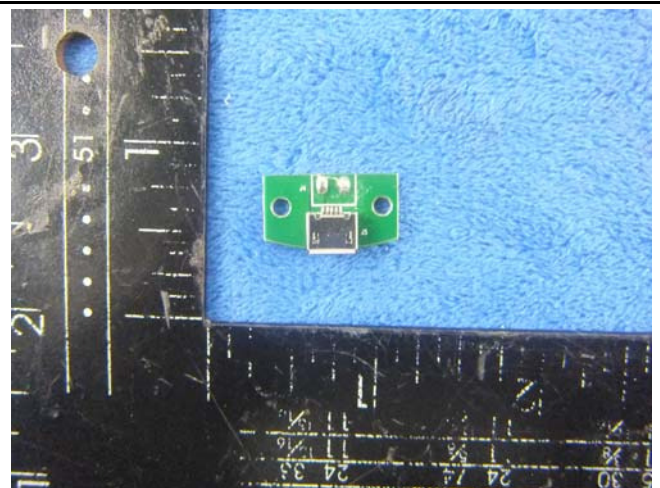

USB board - Front View

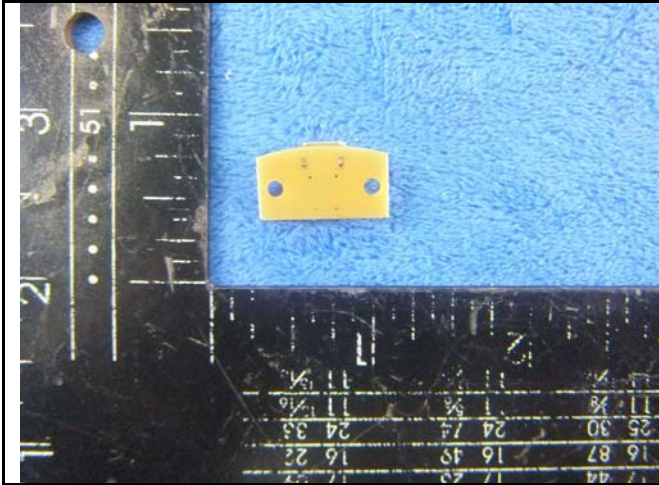

USB board – Rear View

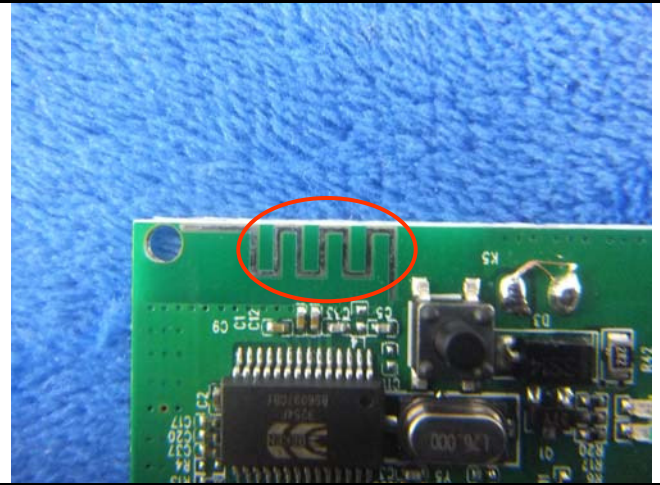

BT – Antenna View


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup – Front View



Conducted Emissions Test Setup – Side View

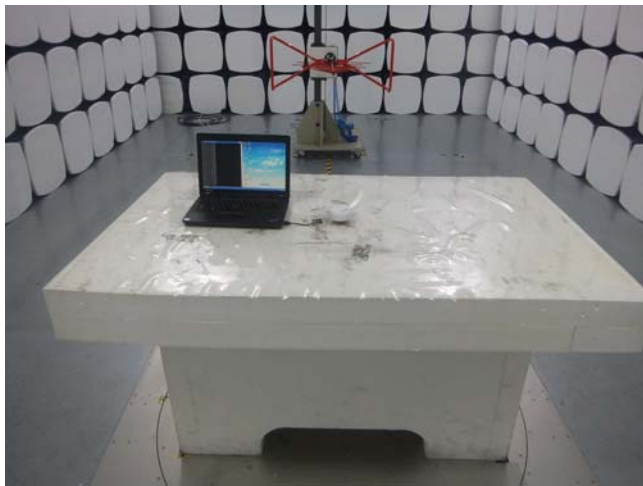

Radiated Spurious Emissions Test Setup Below 1GHz

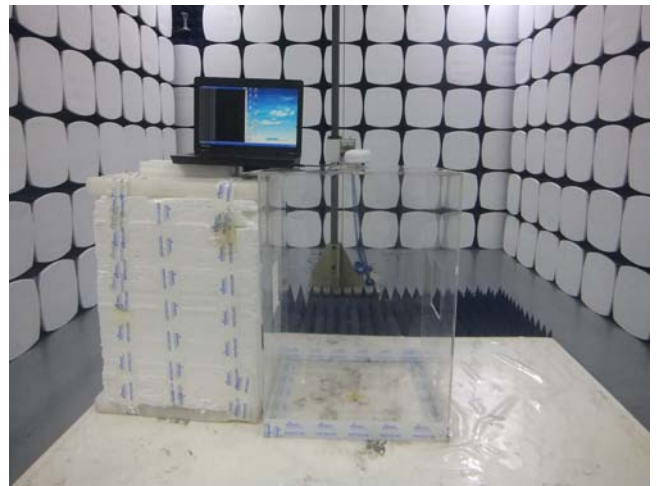

Radiated Spurious Emissions Test Above 1GHz




Radiated Spurious Emissions Test Above 1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

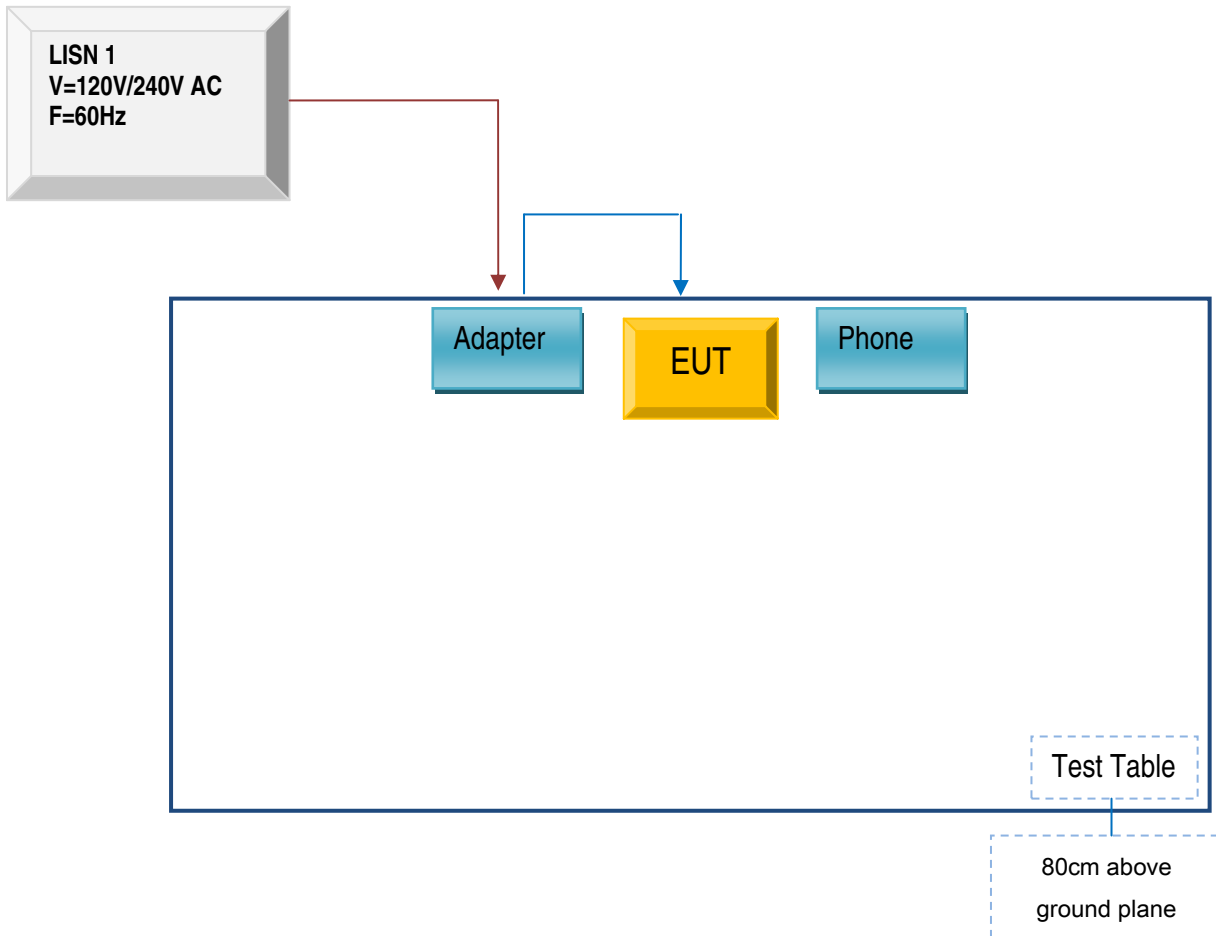

Block Configuration Diagram for Radiated Emission (Below 1GHz) .

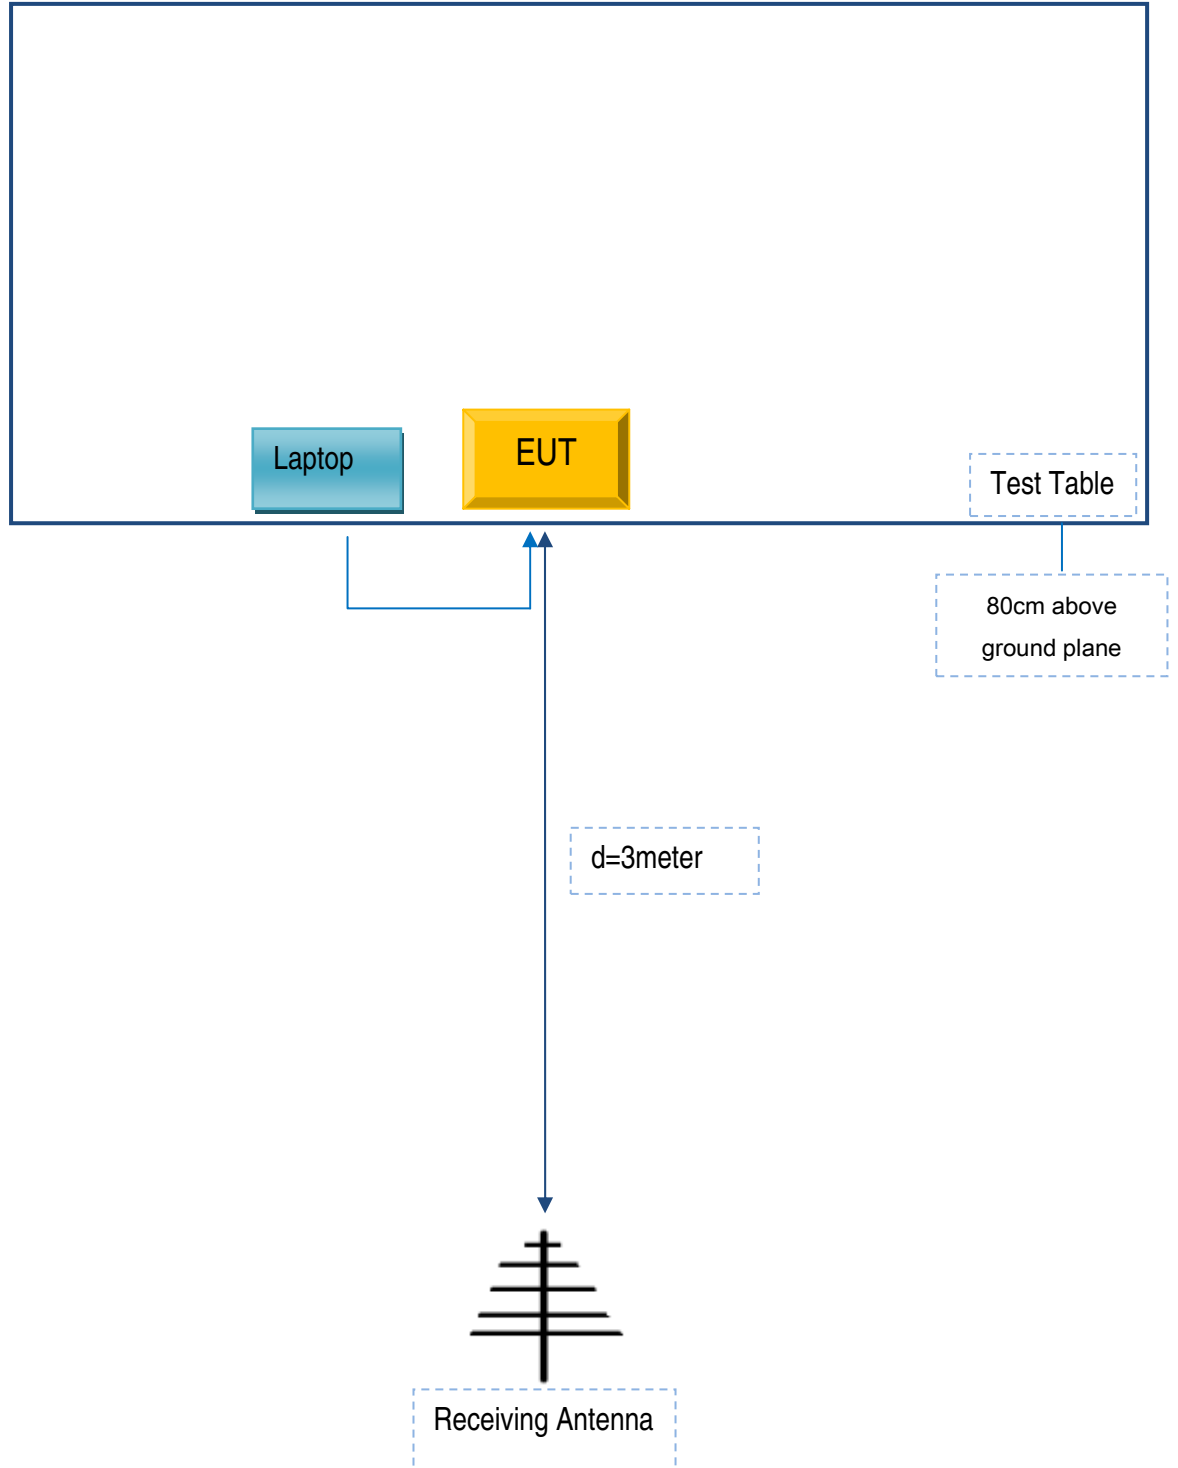

Block Configuration Diagram for Radiated Emission (Above 1GHz) .

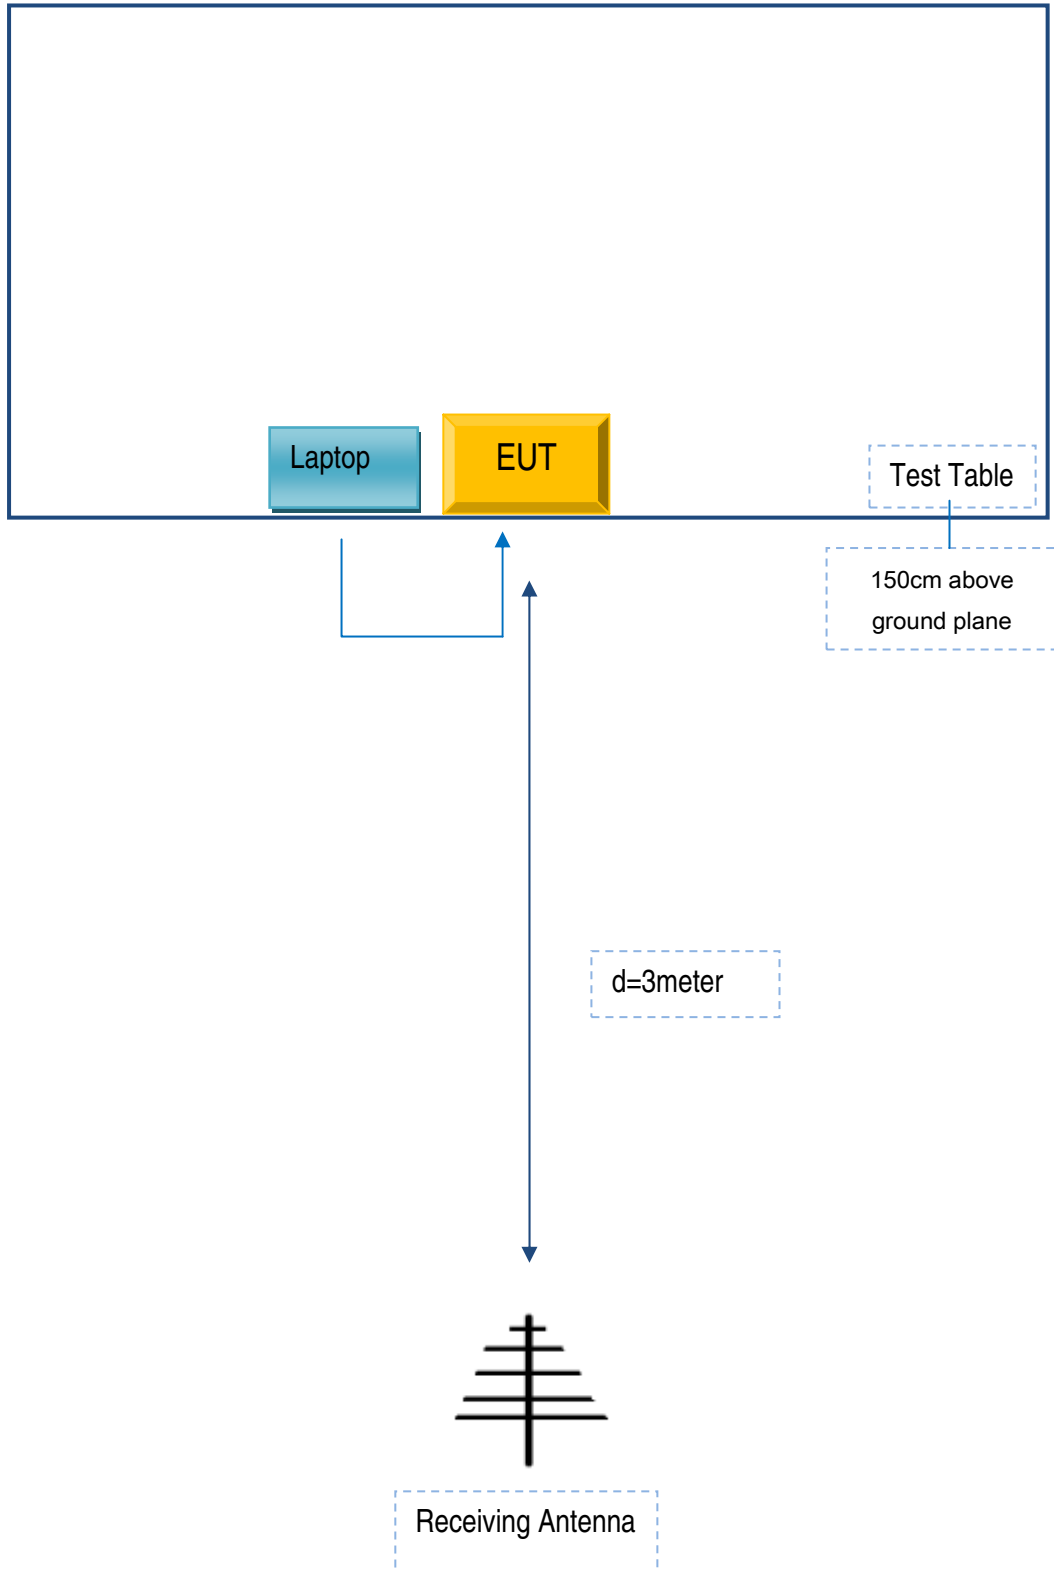

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Lenovo	Lenovo Laptop	E40	N3-F5022
MI	Phone	MI 4W	W01400
DCA	Adaptor	E2164A	Y20120311

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	50cm	Hk10023
Power Cable	Un-shielding	No	0.8m	D22156

Test Report	16071154-FCC-R
Page	58 of 59

Annex D. User Manual / Block Diagram / Schematics / Partlist

N/A

Annex E. DECLARATION OF SIMILARITY

Shenzhen Kingsun Enterprises Co., Ltd.

To: 775 Montague Expressway Milpitas, CA 95035, USA

Declaration Letter

For our business issue and marketing requirement, we would like to list 16 models on the FCC reports, as following:

Main Model No	Serial Model No	Difference
DC-0701	AS-WSP20-01 AS-WSP20-03 AS-WSP20-04 AS-WSP20-06 AS-WSP20-08 AS-WSP20-ANC AS-WSP20-CAB AS-WSP20-FLW AS-WSP20-GR01 AS-WSP20-GR08 AS-WSP20-LNKS AS-WSP20-SNK AS-WSP20-SQU AS-WSP20-ZB04 AS-WSP20-ZB06	We declare that : The PCB board, circuit, structure and internal of these models are the same, only color and model number are different.

Thank you!

Sincerely,
Client's signature:

Client's name / title: Sydney/ Manager

Contact information / address : 25 / F, CEC information Building Xinwen Rd., Shenzhen, Guangdong, China