

TEST REPORT

FCC ID: 2AAPKMA-3826-A

Product: Folded wireless charger

Model No.: MA-3826-A

Additional Model No.: N/A

Trade Mark: N/A

Report No.: TCT191125E008

Issued Date: Dec. 02, 2019

Issued for:

Shenzhen Kingsun Enterprises Co., Ltd.

**25/F, CEC Information Building, Xinwen Rd., Shenzhen, Guangdong, 518034,
China**

Issued By:

Shenzhen Tongce Testing Lab.

**1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China**

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification 3

2. Test Result Summary 4

3. EUT Description..... 5

4. General Information..... 6

 4.1. Test environment and mode..... 6

 4.2. Description of Support Units..... 6

5. Facilities and Accreditations 7

 5.1. Facilities 7

 5.2. Location 7

 5.3. Measurement Uncertainty..... 7

6. Test Results and Measurement Data 8

 6.1. Conducted Emission..... 8

 6.2. Radiated Spurious Emission Measurement..... 12

Appendix A: Photographs of Test Setup

Appendix B: Photographs of EUT

1. Test Certification

Product:	Folded wireless charger
Model No.:	MA-3826-A
Additional Model No.:	N/A
Trade Mark:	N/A
Applicant:	Shenzhen Kingsun Enterprises Co., Ltd.
Address:	25/F, CEC Information Building, Xinwen Rd., Shenzhen, Guangdong 518034, China
Manufacturer:	Shenzhen Kingsun Enterprises Co., Ltd.
Address:	25/F, CEC Information Building, Xinwen Rd., Shenzhen, Guangdong 518034, China
Date of Test:	Nov. 26, 2019 – Nov. 29, 2019
Applicable Standards:	FCC CFR Title 47 Part 18

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: *Kevin Huang*

Date: **Nov. 29, 2019**

Kevin Huang

Reviewed By: *Beryl Zhao*

Date: **Dec. 02, 2019**

Beryl Zhao

Approved By: *Tomsin*

Date: **Dec. 02, 2019**

Tomsin

2. Test Result Summary

Requirement	CFR 47 Section	Result
AC Power Line Conducted Emission	§18.307	PASS
Spurious Emission	§18.305	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. NA: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product:	Folded wireless charger
Model No.:	MA-3826-A
Additional Model No.:	N/A
Trade Mark:	N/A
Declaration Frequency:	110-205kHz
Operation Frequency:	116.67 - 172.76kHz
Modulation Technology:	Load modulation
Antenna Type:	Inductive loop coil Antenna
Power Supply:	DC 5V

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%) with Fully-charged battery.
<p>The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

4.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Mobile Phone	SM-G9350	R28HA2ER3GT	/	SAMSUNG
Adapter	EP-TA20CBC	R37HAEY0DT1RT3	/	SAMSUNG

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339

5.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Conducted Emission

6.1.1. Test Specification

Test Requirement:	FCC Part18 Section 18.307														
Test Method:	FCC MP-5														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	<p><i>Remark:</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>														
Test Mode:	Charging														
Test Procedure:	<ol style="list-style-type: none"> 1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. 														
Test Result:	PASS														

6.1.2. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	R&S	ESPI	101402	Jul. 29, 2020
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 11, 2020
Coax cable (9KHz-30MHz)	TCT	CE-05	N/A	Sep. 08, 2020
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.1.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

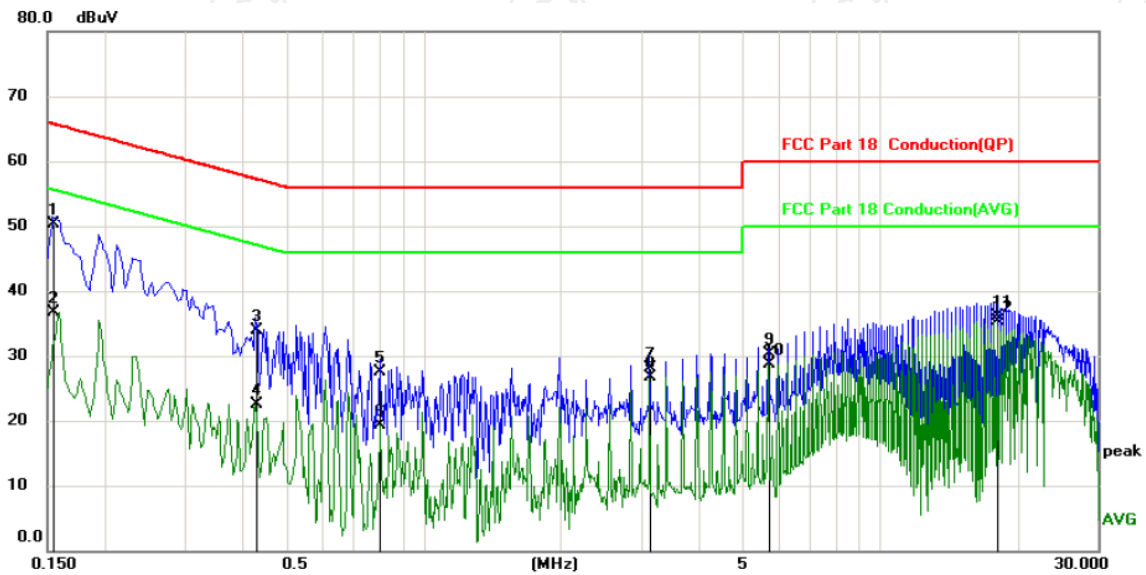


Site: _____ Phase: **L1** Temperature: 25
Limit: FCC Part 18 Conduction(QP) Power: _____ Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1545	40.28	10.12	50.40	65.75	-15.35	QP	
2		0.1545	26.62	10.12	36.74	55.75	-19.01	AVG	
3		0.4290	23.79	10.13	33.92	57.27	-23.35	QP	
4		0.4290	12.29	10.13	22.42	47.27	-24.85	AVG	
5		0.8025	17.35	10.12	27.47	56.00	-28.53	QP	
6		0.8025	9.15	10.12	19.27	46.00	-26.73	AVG	
7		3.1290	18.02	10.13	28.15	56.00	-27.85	QP	
8		3.1290	16.50	10.13	26.63	46.00	-19.37	AVG	
9		5.6895	20.16	10.13	30.29	60.00	-29.71	QP	
10		5.6895	18.49	10.13	28.62	50.00	-21.38	AVG	
11		18.0645	25.93	10.19	36.12	60.00	-23.88	QP	
12	*	18.0645	25.16	10.19	35.35	50.00	-14.65	AVG	

Note:

- Freq. = Emission frequency in MHz
- Reading level (dBuV) = Receiver reading
- Corr. Factor (dB) = LISN factor + Cable loss
- Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)
- Limit (dBuV) = Limit stated in standard
- Margin (dB) = Measurement (dBuV) – Limits (dBuV)
- Q.P. =Quasi-Peak
- AVG =average
- * is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

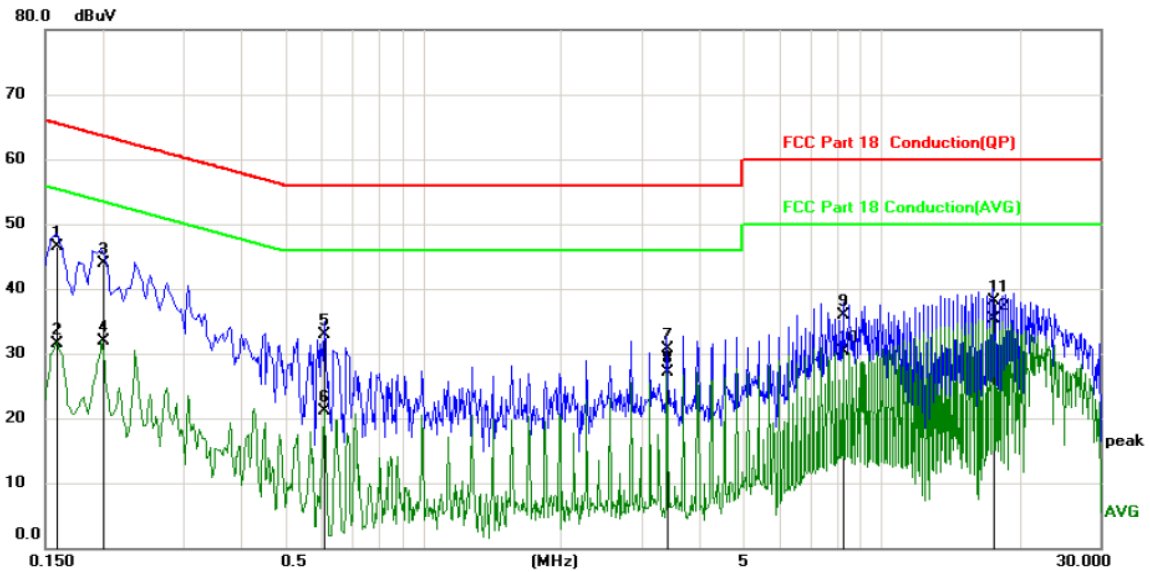

Site: Phase: **N** Temperature: 25
Limit: FCC Part 18 Conduction(QP) Power: Humidity: 55 %

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1590	36.43	10.12	46.55	65.52	-18.97	QP	
2	0.1590	21.48	10.12	31.60	55.52	-23.92	AVG	
3	0.1997	33.73	10.12	43.85	63.62	-19.77	QP	
4	0.1997	21.77	10.12	31.89	53.62	-21.73	AVG	
5	0.6090	22.82	10.13	32.95	56.00	-23.05	QP	
6	0.6090	11.07	10.13	21.20	46.00	-24.80	AVG	
7	3.4170	20.56	10.13	30.69	56.00	-25.31	QP	
8	3.4170	16.93	10.13	27.06	46.00	-18.94	AVG	
9	8.2545	25.71	10.14	35.85	60.00	-24.15	QP	
10	8.2545	20.25	10.14	30.39	50.00	-19.61	AVG	
11	17.5065	27.92	10.19	38.11	60.00	-21.89	QP	
12 *	17.5065	25.18	10.19	35.37	50.00	-14.63	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dBuV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBuV) = Reading level (dBuV) + Corr. Factor (dB)

Limit (dBuV) = Limit stated in standard

Margin (dB) = Measurement (dBuV) – Limits (dBuV)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

6.2. Radiated Spurious Emission Measurement

6.2.1. Test Specification

Test Requirement:	FCC Part18 Section 18.305																																														
Test Method:	FCC MP-5																																														
Frequency Range:	9 kHz to 25 GHz																																														
Measurement Distance:	3 m																																														
Antenna Polarization:	Horizontal & Vertical																																														
Operation mode:	Refer to item 4.1																																														
Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value																	
	Frequency	Detector	RBW	VBW	Remark																																										
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																																										
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																																										
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																																										
Above 1GHz	Peak	1MHz	3MHz	Peak Value																																											
	Peak	1MHz	10Hz	Average Value																																											
Limit:	<table border="1"> <thead> <tr> <th>Equipment</th> <th>Operating frequency</th> <th>RF Power generated by equipment (watts)</th> <th>Field strength limit (uV/m)</th> <th>Distance (meters)</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Any type unless otherwise specified (miscellaneous)</td> <td>Any ISM frequency</td> <td>Below 500 500 or more</td> <td>25 $25 \times \text{SQRT}(\text{power}/500)$</td> <td>300 1300</td> </tr> <tr> <td>Any non-ISM frequency</td> <td>Below 500 500 or more</td> <td>15 $15 \times \text{SQRT}(\text{power}/500)$</td> <td>300 1300</td> </tr> <tr> <td>Industrial heaters and RF stabilized arc welders</td> <td>On or below 5,725 MHz Above 5,725 MHz</td> <td>Any Any</td> <td>10 (²)</td> <td>1,600 (²)</td> </tr> <tr> <td rowspan="2">Medical diathermy</td> <td>Any ISM frequency</td> <td>Any</td> <td>25 15</td> <td>300 300</td> </tr> <tr> <td>Any non-ISM frequency</td> <td>Any</td> <td>15</td> <td>300</td> </tr> <tr> <td rowspan="2">Ultrasonic</td> <td>Below 490 kHz</td> <td>Below 500 500 or more</td> <td>$2,400/F(\text{kHz})$ $2,400/F(\text{kHz}) \times \text{SQRT}(\text{power}/500)$</td> <td>300 ³300</td> </tr> <tr> <td>490 to 1,600 kHz Above 1,600 kHz</td> <td>Any Any</td> <td>24,000/F(kHz) 15</td> <td>30 30</td> </tr> <tr> <td rowspan="2">Induction cooking ranges</td> <td>Below 90 kHz</td> <td>Any</td> <td>1,500</td> <td>⁴30</td> </tr> <tr> <td>On or above 90 kHz</td> <td>Any</td> <td>300</td> <td>⁴30</td> </tr> </tbody> </table>	Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)	Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 1300	Any non-ISM frequency	Below 500 500 or more	15 $15 \times \text{SQRT}(\text{power}/500)$	300 1300	Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any Any	10 (²)	1,600 (²)	Medical diathermy	Any ISM frequency	Any	25 15	300 300	Any non-ISM frequency	Any	15	300	Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/F(\text{kHz})$ $2,400/F(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300	490 to 1,600 kHz Above 1,600 kHz	Any Any	24,000/F(kHz) 15	30 30	Induction cooking ranges	Below 90 kHz	Any	1,500	⁴ 30	On or above 90 kHz	Any	300	⁴ 30
	Equipment	Operating frequency	RF Power generated by equipment (watts)	Field strength limit (uV/m)	Distance (meters)																																										
	Any type unless otherwise specified (miscellaneous)	Any ISM frequency	Below 500 500 or more	25 $25 \times \text{SQRT}(\text{power}/500)$	300 1300																																										
		Any non-ISM frequency	Below 500 500 or more	15 $15 \times \text{SQRT}(\text{power}/500)$	300 1300																																										
	Industrial heaters and RF stabilized arc welders	On or below 5,725 MHz Above 5,725 MHz	Any Any	10 (²)	1,600 (²)																																										
	Medical diathermy	Any ISM frequency	Any	25 15	300 300																																										
		Any non-ISM frequency	Any	15	300																																										
Ultrasonic	Below 490 kHz	Below 500 500 or more	$2,400/F(\text{kHz})$ $2,400/F(\text{kHz}) \times \text{SQRT}(\text{power}/500)$	300 ³ 300																																											
	490 to 1,600 kHz Above 1,600 kHz	Any Any	24,000/F(kHz) 15	30 30																																											
Induction cooking ranges	Below 90 kHz	Any	1,500	⁴ 30																																											
	On or above 90 kHz	Any	300	⁴ 30																																											
Test setup:	<p>For radiated emissions below 30MHz</p> <p>The diagram illustrates the test setup for radiated emissions below 30MHz. It shows an EUT (Equipment Under Test) on a turn table, positioned 3m away from a circular antenna. The antenna is mounted on a stand above a ground plane. The antenna is connected to a Pre-Amplifier, which is connected to a Receiver. The Receiver is also connected to a Computer.</p>																																														

Test Procedure:

1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
4. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=200Hz for $9K < f < 150 \text{ KHz}$; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 9 KHz, VBW= 30KHz for $150\text{KHz} < f < 30 \text{ MHz}$ for peak measurement.

Test mode:

Refer to section 4.1 for details

Test results:

PASS

6.2.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Test Receiver	ROHDE&SCHW ARZ	ESIB7	100197	Jul. 29, 2020
Spectrum Analyzer	ROHDE&SCHW ARZ	FSQ40	200061	Sep. 11, 2020
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 08, 2020
Pre-amplifier	HP	8447D	2727A05017	Sep. 08, 2020
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 11, 2020
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 06, 2020
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 06, 2020
Antenna Mast	Keleto	RE-AM	N/A	N/A
Coax cable (9KHz-40GHz)	TCT	RE-high-02	N/A	Sep. 08, 2020
Coax cable (9KHz-40GHz)	TCT	RE-high-04	N/A	Sep. 08, 2020
EMI Test Software	Shurple Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.2.3. Test Data

Please refer to following diagram for individual

9KHz-30MHz

9KHz-150KHz:




Site: Limit: FCC Part18-103.5 Polarization: *Horizontal* Temperature: 25
Power: Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		0.0091	60.49	0.00	60.49	103.5	-43.01	peak
2		0.0165	63.62	0.14	63.76	103.5	-39.74	peak
3		0.0303	64.75	0.14	64.89	103.5	-38.61	peak
4		0.0534	61.87	0.15	62.02	103.5	-41.48	peak
5		0.0577	61.36	0.15	61.51	103.5	-41.99	peak
6	*	0.1318	105.64	-25.65	79.99	103.5	-23.51	peak

NOTE: 1.If measurements are made at only one closer fixed distance, then the permissible field strength limits shall be adjusted using 1/d as an attenuation factor. So the limit at 3 m is 15 uV/m(\approx 103.5 dBuV/m)

2. The field strength limit conversion formula refer to ANSI C63.10 Section 6.4.4.6.

150KHz-30MHz:

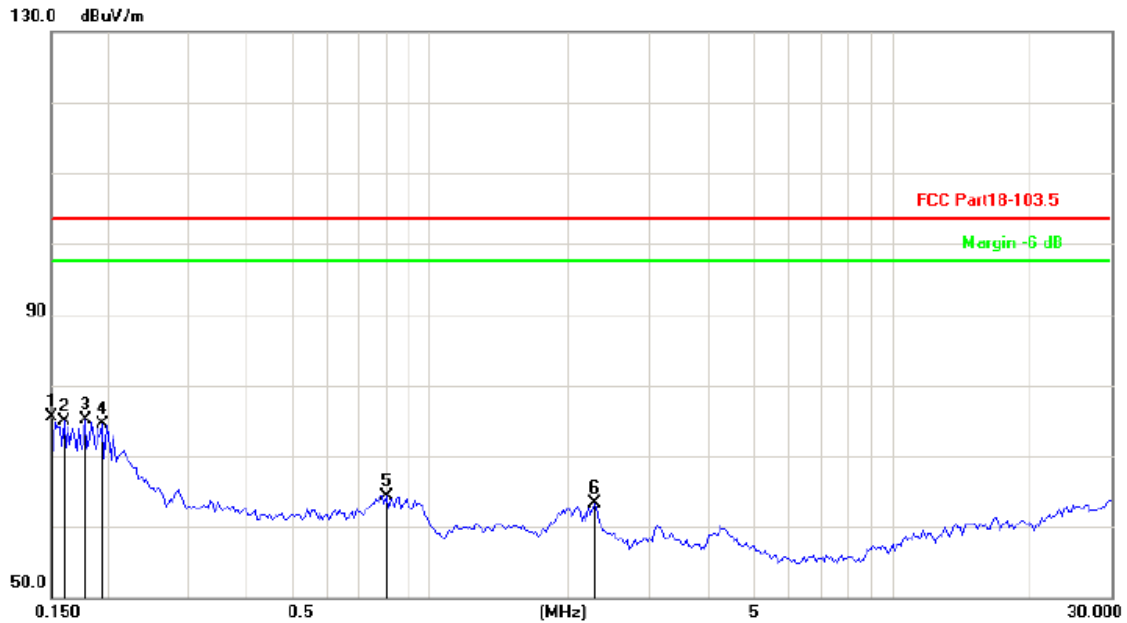

Site: Polarization: *Horizontal* Temperature: 25
Limit: FCC Part18-103.5 Power: Humidity: 55 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	0.1500	101.08	-25.65	75.43	103.5	-28.07	peak
2		0.1597	100.55	-25.66	74.89	103.5	-28.61	peak
3		0.1778	100.83	-25.66	75.17	103.5	-28.33	peak
4		0.1935	100.19	-25.67	74.52	103.5	-28.98	peak
5		0.8024	89.91	-25.60	64.31	103.5	-39.19	peak
6		2.2728	88.78	-25.51	63.27	103.5	-40.23	peak

NOTE:1. If measurements are made at only one closer fixed distance, then the permissible field strength limits shall be adjusted using 1/d as an attenuation factor. So the limit at 3 m is 15 uv/m(\approx 103.5 dBuv/m)



2. The field strength limit conversion formula refer to ANSI C63.10 Section 6.4.4.6.

Appendix A: Photographs of Test Setup

Product: Folded wireless charger

Model: MA-3826-A


Radiated Emission

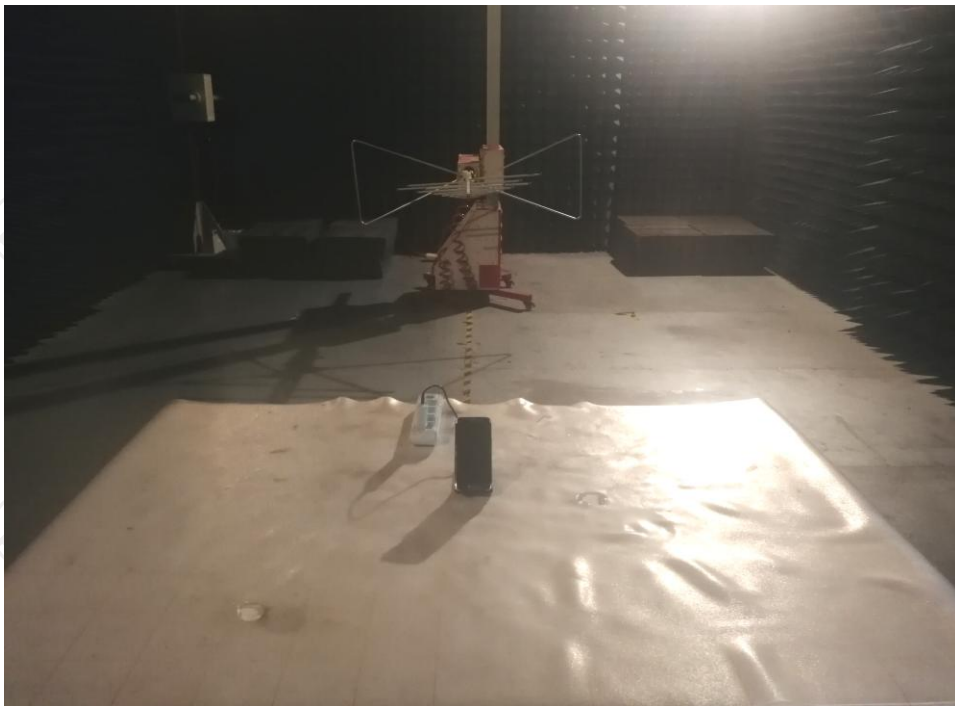
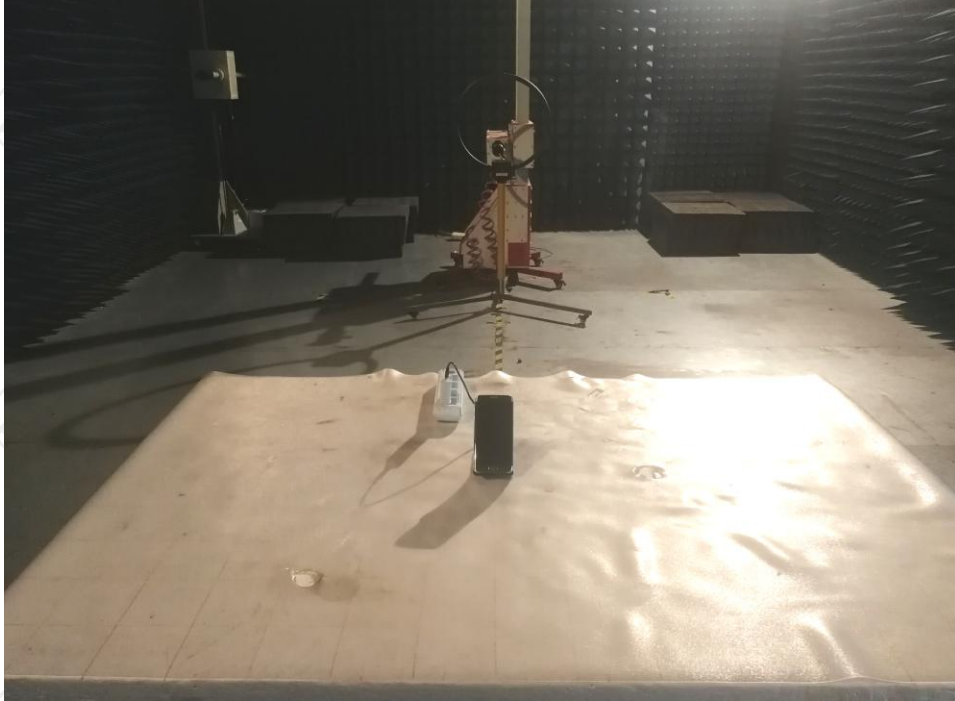



Conducted Emission




Appendix B: Photographs of EUT
Product: Folded wireless charger
Model: MA-3826-A
External Photos


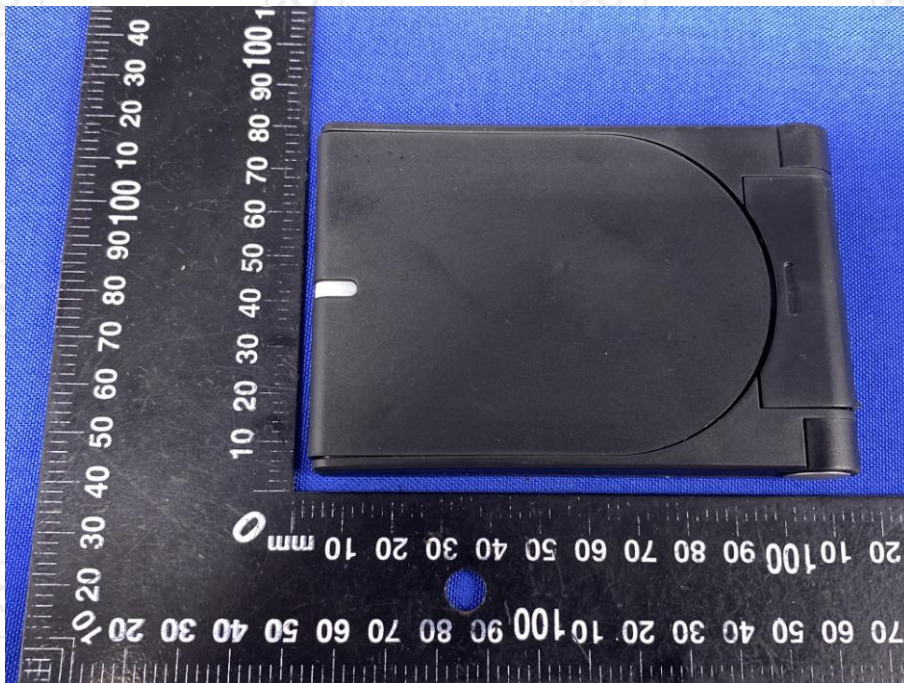


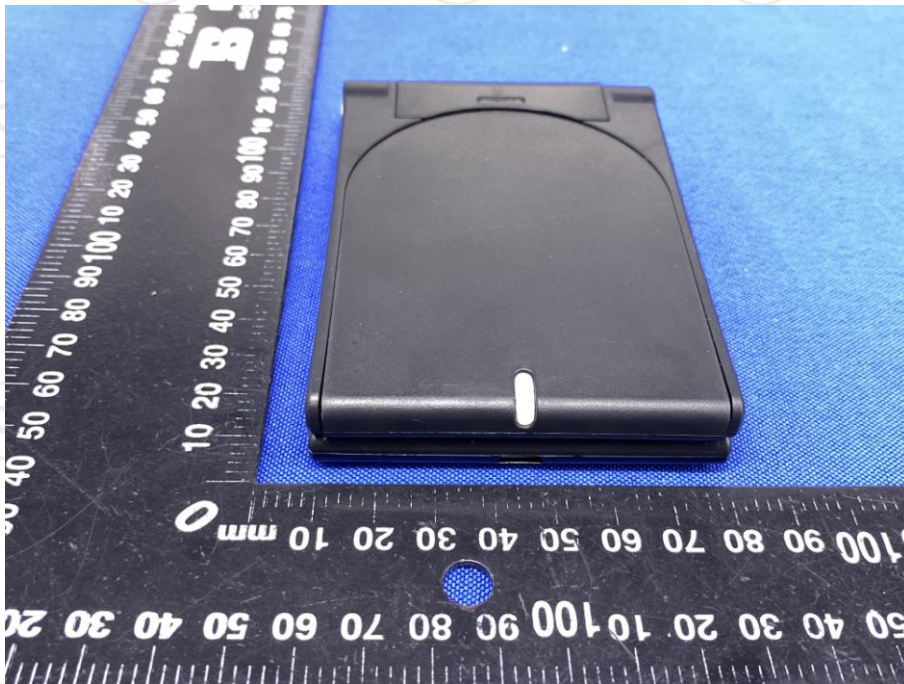
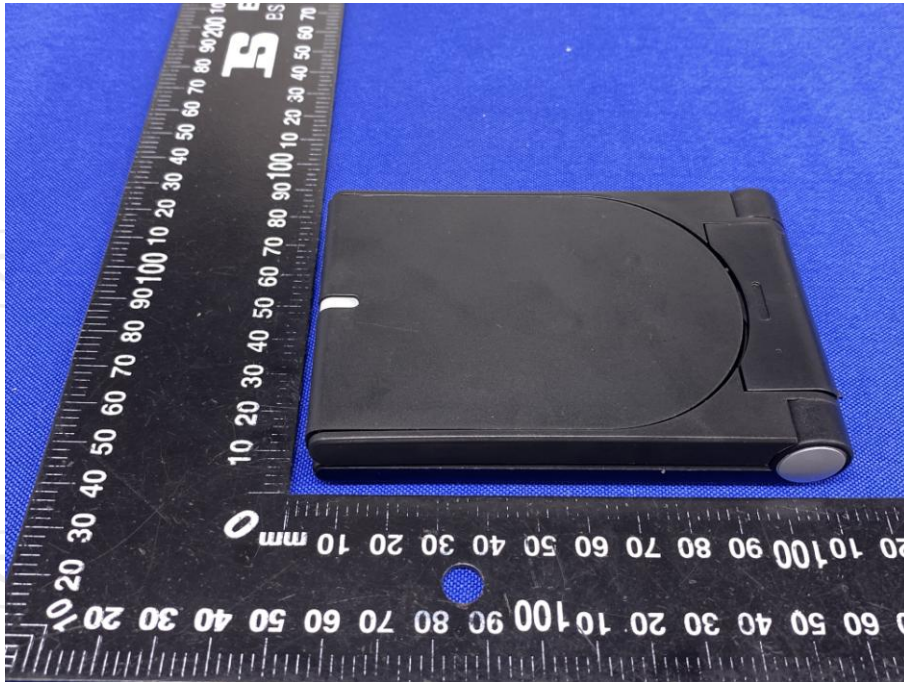



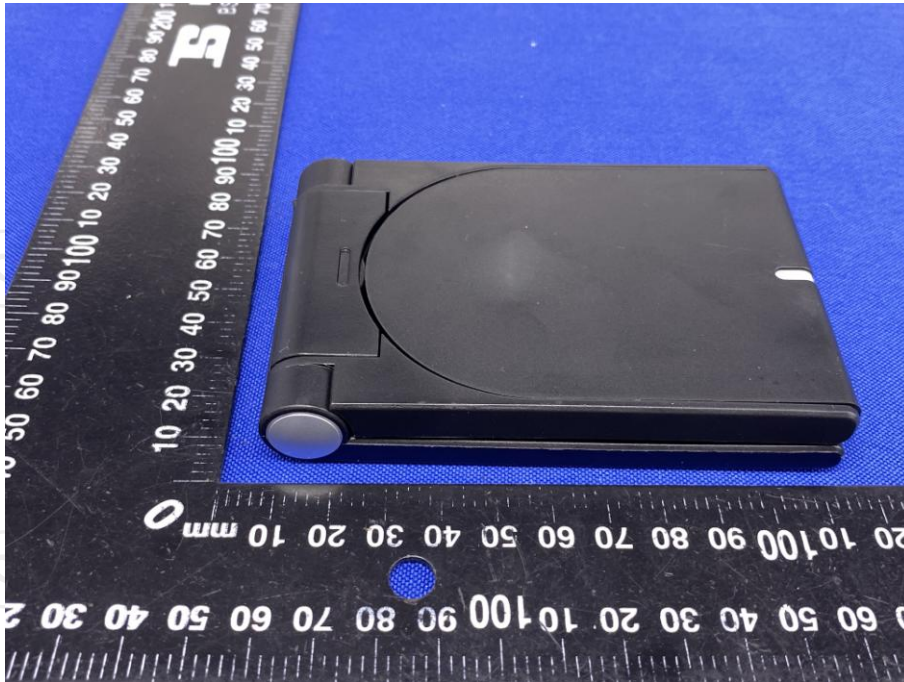


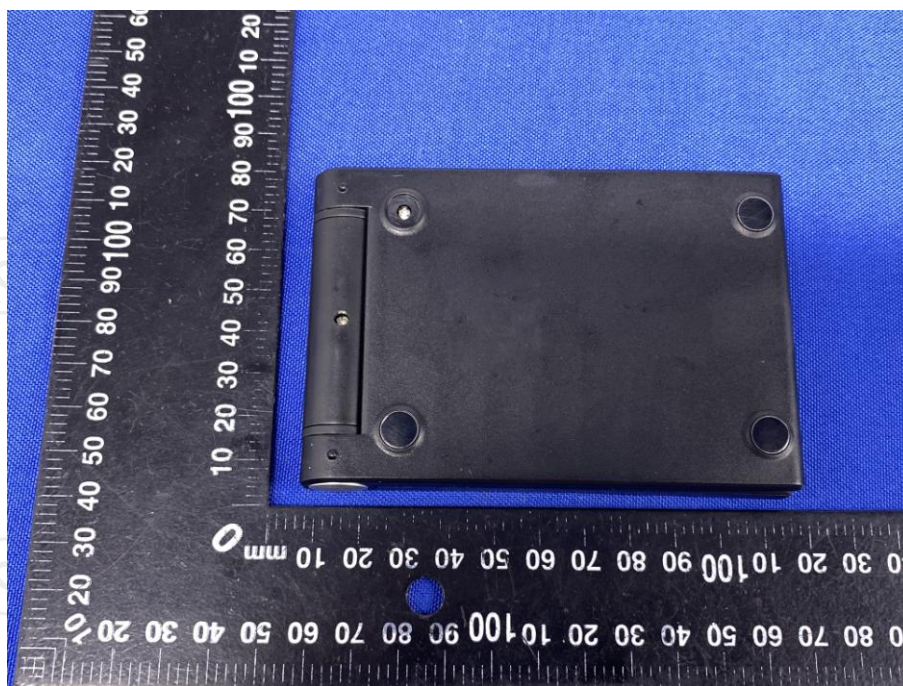

Product: Folded wireless charger
Model: MA-3826-A
Internal Photos

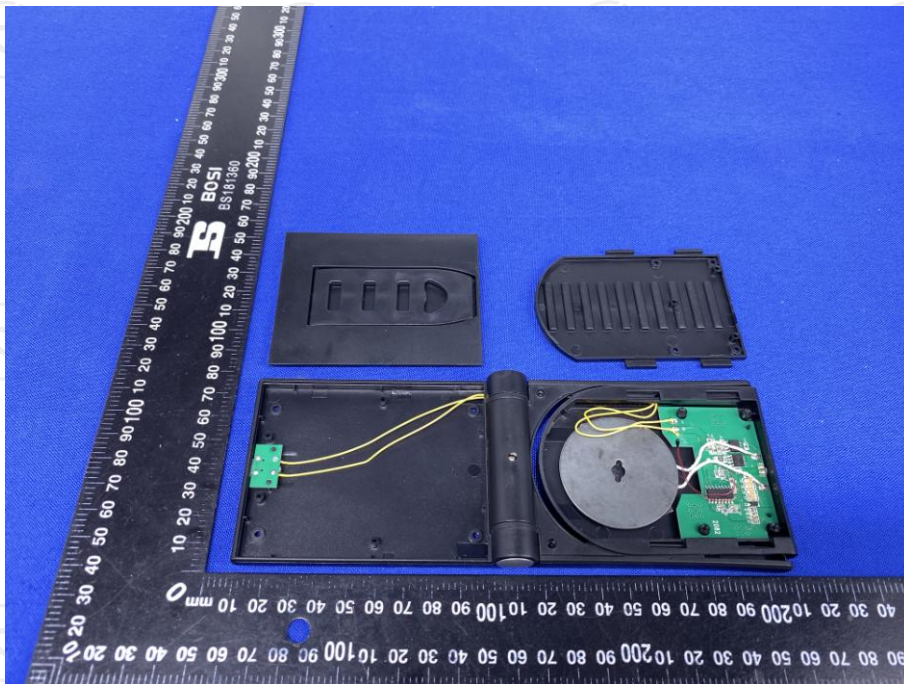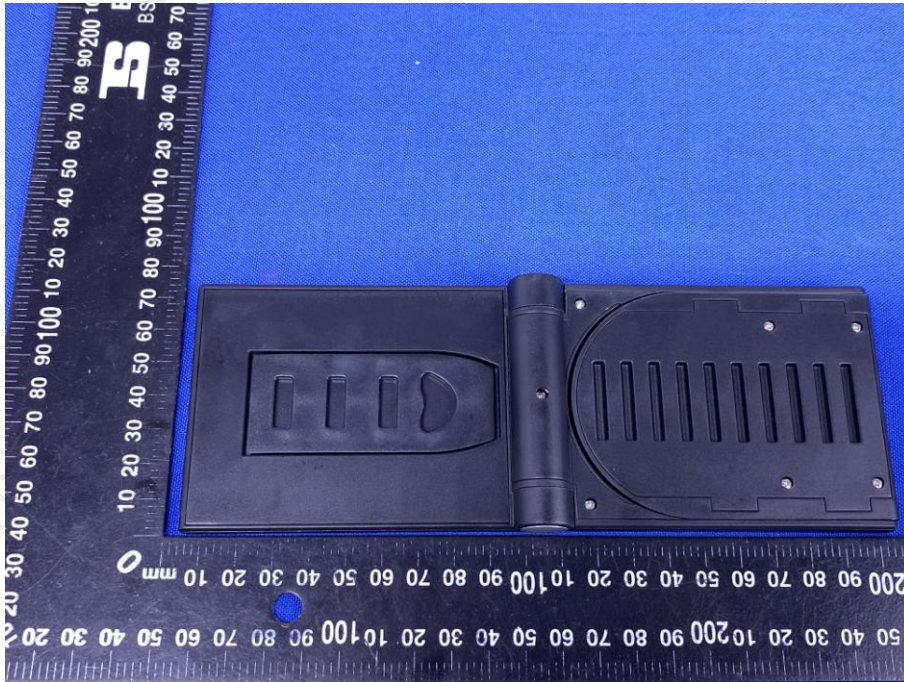

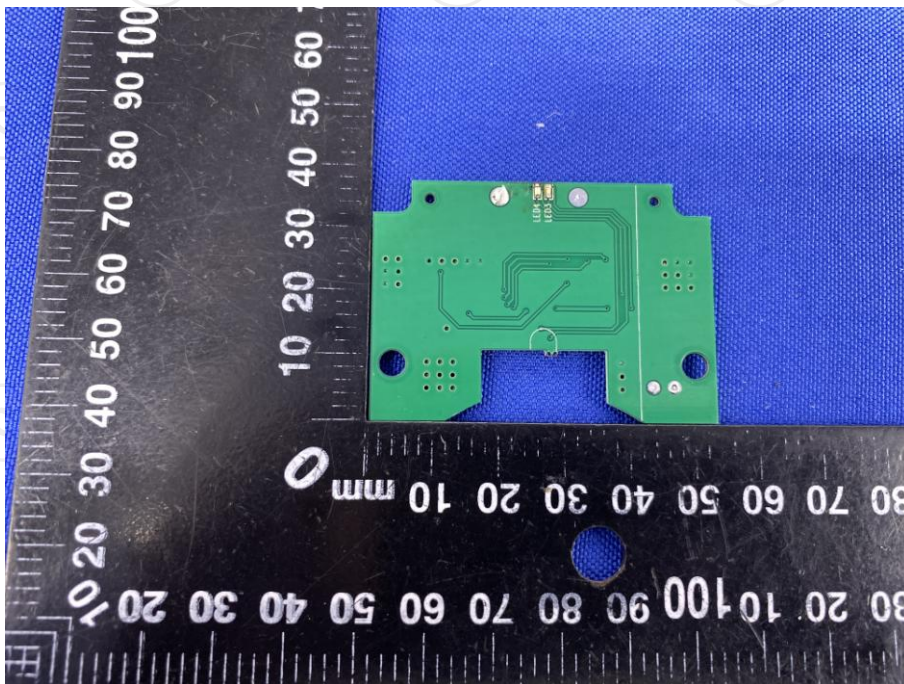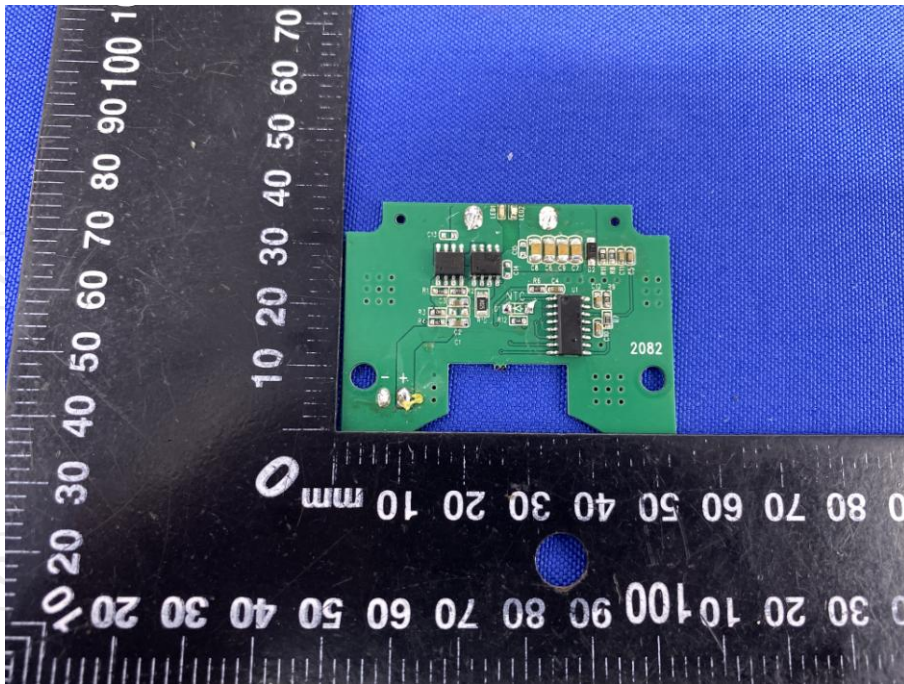

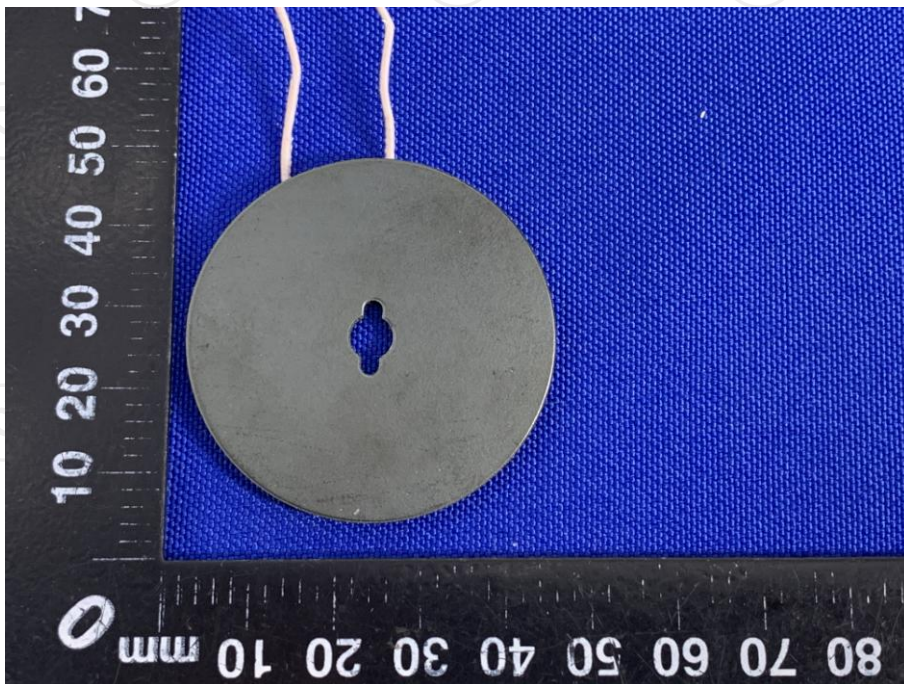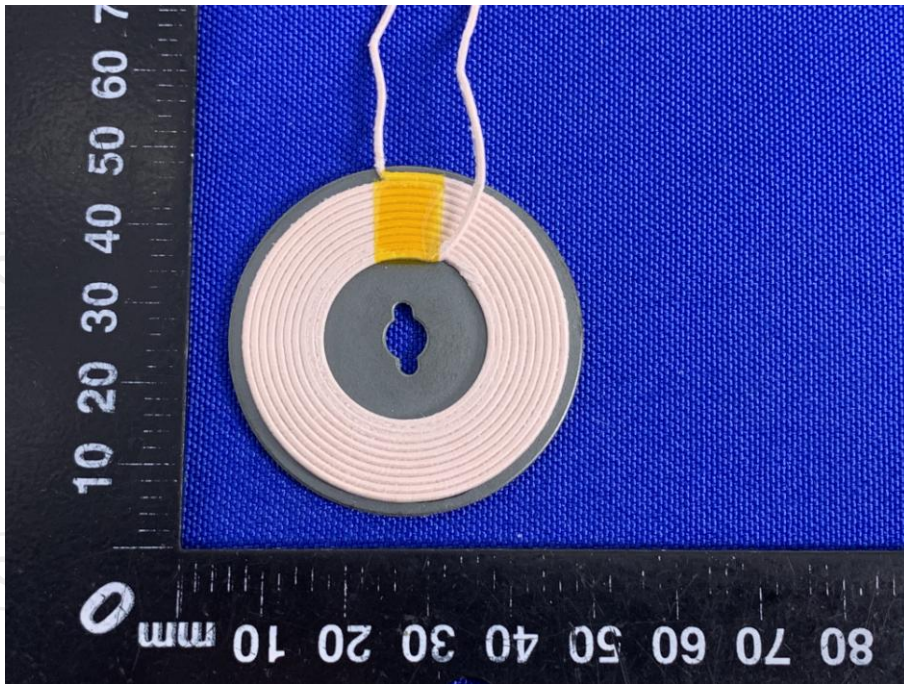

*****END OF REPORT*****