

Appendix B: Test Results of FCC 15B


APPENDIX B: TEST RESULTS OF FCC 15B	1
APPENDIX B.1: TEST PLOTS OF CONDUCTED EMISSION ON AC MAINS	2
<i>Charging only</i>	2
APPENDIX B.2: TEST PLOTS OF RADIATED EMISSION, BELOW 1GHZ	4
<i>SD Card play</i>	4
<i>USB Disk play</i>	6
<i>Charging only</i>	8
<i>Bluetooth play</i>	10
APPENDIX B.3: TEST PLOTS OF RADIATED EMISSION, ABOVE 1GHZ	12
<i>SD Card play</i>	12
<i>USB Disk play</i>	14
<i>Charging only</i>	16
<i>Bluetooth play</i>	18

Appendix B.1: Test Plots of Conducted Emission on AC Mains

Charging only

EUT Information

EUT Name:	MINI POD SPEAKER
Order No:	168378702
Model:	EE2763
Test Mode:	Charging only
Test Voltage:	AC 120V/60Hz
Test By/Review By:	Shower Dai/Gary Chen
Test Standard:	FCC Part 15
Tem./Hum./Pressure:	23.7°C/51.5%/101kPa
Remark:	SR1

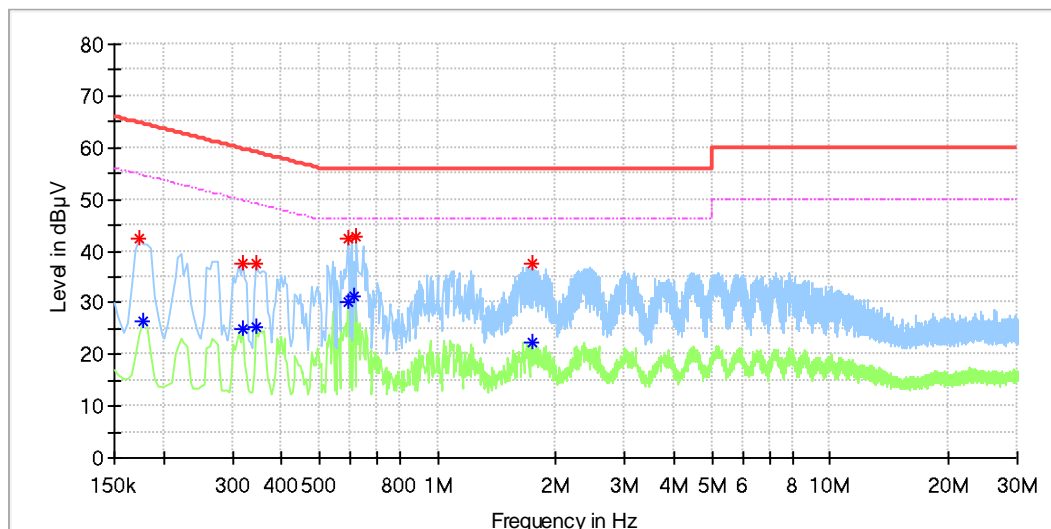


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.174000	42.32	---	64.77	22.44	L1	9.6
0.178000	---	26.33	54.58	28.25	L1	9.6
0.318000	---	25.07	49.76	24.69	L1	9.7
0.318000	37.40	---	59.76	22.36	L1	9.7
0.346000	---	25.14	49.06	23.92	L1	9.7
0.346000	37.64	---	59.06	21.41	L1	9.7
0.592000	---	29.99	46.00	16.01	L1	9.7
0.592000	42.31	---	56.00	13.69	L1	9.7
0.612000	---	31.25	46.00	14.75	L1	9.7
0.620000	42.93	---	56.00	13.07	L1	9.7
1.736000	---	22.25	46.00	23.75	L1	9.8
1.736000	37.56	---	56.00	18.44	L1	9.8

EUT Information

EUT Name: MINI POD SPEAKER
 Order No: 168378702
 Model: EE2763
 Test Mode: Charging only
 Test Voltage: AC 120V/60Hz
 Test By/Review By: Shower Dai/Gary Chen
 Test Standard: FCC Part 15
 Tem./Hum./Pressure: 23.7°C/51.5%/101kPa
 Remark: SR1

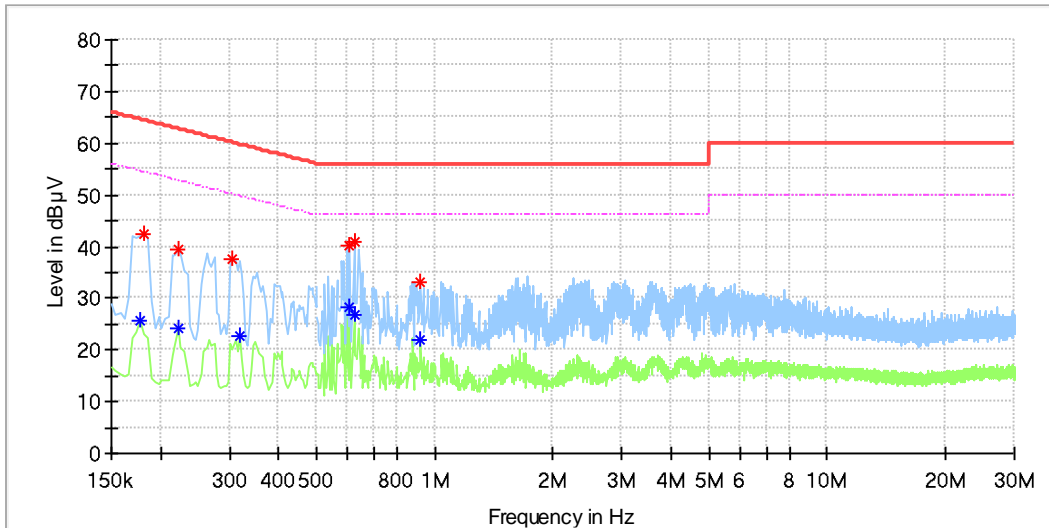

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.178000	---	25.62	54.58	28.95	N	9.6
0.182000	42.27	---	64.39	22.12	N	9.6
0.222000	---	24.11	52.74	28.64	N	9.6
0.222000	39.46	---	62.74	23.29	N	9.6
0.306000	37.55	---	60.08	22.53	N	9.6
0.318000	---	22.83	49.76	26.93	N	9.7
0.608000	---	28.35	46.00	17.66	N	9.7
0.608000	40.20	---	56.00	15.80	N	9.7
0.624000	---	26.64	46.00	19.36	N	9.7
0.624000	41.04	---	56.00	14.96	N	9.7
0.920000	---	21.92	46.00	24.08	N	9.7
0.920000	33.19	---	56.00	22.81	N	9.7

Appendix B.2: Test Plots of Radiated Emission, Below 1GHz

SD Card play

EUT Information

EUT Name:	MINI POD SPEAKER
Order No:	168378702
Model:	EE2763
Test Mode:	SD Card play
Test Voltage:	Battery
Standard:	FCC Part 15
Test By./Review By:	Shower Dai / Gary Chen
Tem./Hum./Pressure:	23.7°C/52.6%/101kPa
Remark:	3m chamber

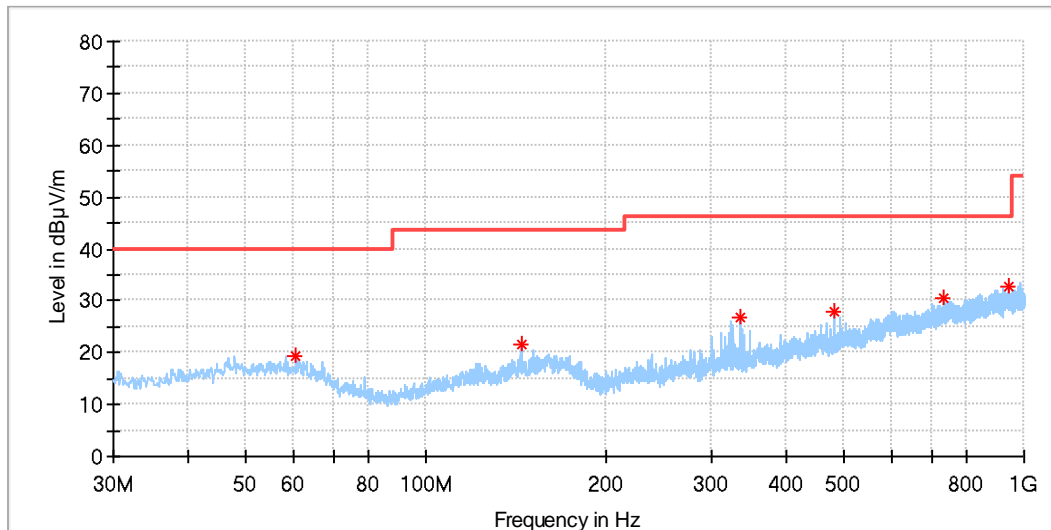


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
60.555000	19.48	40.00	20.52	100.0	H	290.0	20.8
144.751000	21.45	43.50	22.05	200.0	H	35.0	20.2
335.938000	26.80	46.00	19.20	100.0	H	191.0	21.4
479.983000	28.02	46.00	17.98	200.0	H	163.0	24.5
733.444000	30.62	46.00	15.38	200.0	H	51.0	29.8
940.248000	32.62	46.00	13.38	100.0	H	175.0	32.3

EUT Information

EUT Name:	MINI POD SPEAKER
Order No:	168378702
Model:	EE2763
Test Mode:	SD Card play
Test Voltage:	Battery
Standard:	FCC Part 15
Test By:/Review By:	Shower Dai / Gary Chen
Tem./Hum./Pressure:	23.7°C/52.6%/101kPa
Remark:	3m chamber

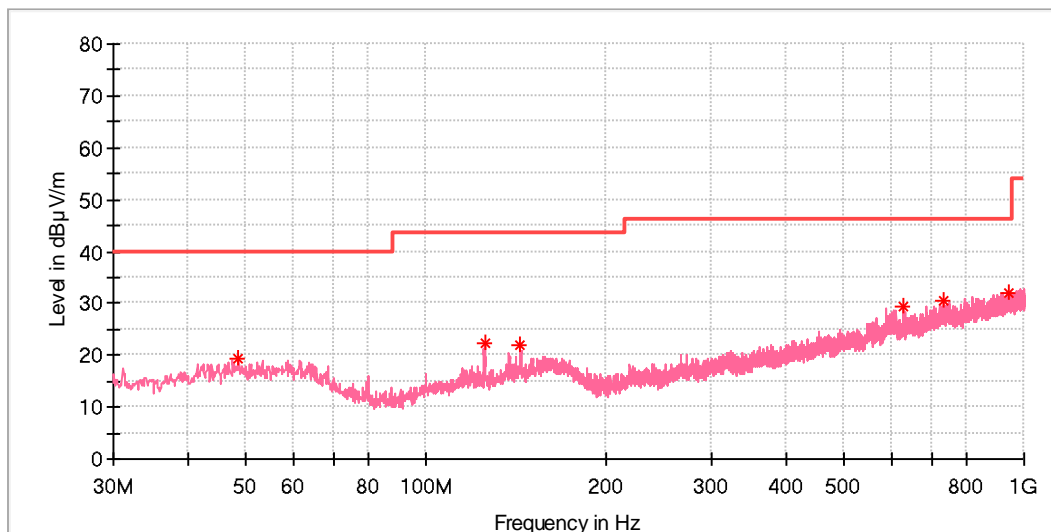


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
48.624000	19.49	40.00	20.51	200.0	V	348.0	21.2
125.254000	22.16	43.50	21.34	100.0	V	236.0	19.1
143.781000	21.84	43.50	21.66	100.0	V	7.0	20.2
627.714000	29.39	46.00	16.61	200.0	V	0.0	27.6
732.183000	30.43	46.00	15.57	100.0	V	180.0	29.8
939.763000	32.04	46.00	13.96	200.0	V	0.0	32.3

USB Disk play

EUT Information

EUT Name:	MINI POD SPEAKER
Order No:	168378702
Model:	EE2763
Test Mode:	USB Disk play
Test Voltage:	Battery
Standard:	FCC Part 15
Test By:/Review By:	Shower Dai / Gary Chen
Tem./Hum./Pressure:	23.7°C/52.6%/101kPa
Remark:	3m chamber

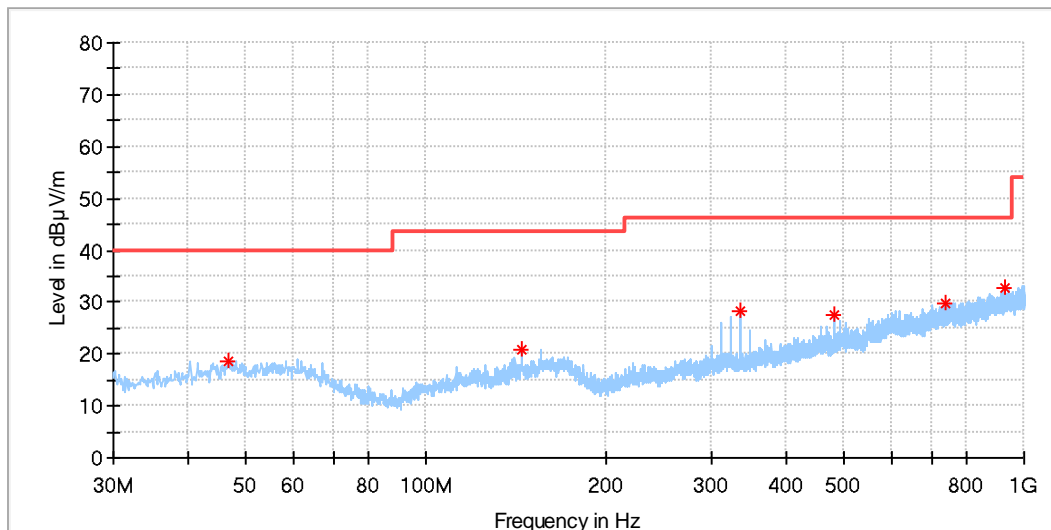


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.684000	18.60	40.00	21.40	200.0	H	279.0	21.1
144.460000	20.91	43.50	22.59	200.0	H	28.0	20.2
335.938000	28.22	46.00	17.78	100.0	H	183.0	21.4
479.983000	27.72	46.00	18.28	200.0	H	0.0	24.5
740.525000	29.76	46.00	16.24	200.0	H	319.0	30.3
926.183000	32.82	46.00	13.18	200.0	H	323.0	31.8

EUT Information

EUT Name:	MINI POD SPEAKER
Order No:	168378702
Model:	EE2763
Test Mode:	USB Disk play
Test Voltage:	Battery
Standard:	FCC Part 15
Test By:/Review By:	Shower Dai / Gary Chen
Tem./Hum./Pressure:	23.7°C/52.6%/101kPa
Remark:	3m chamber

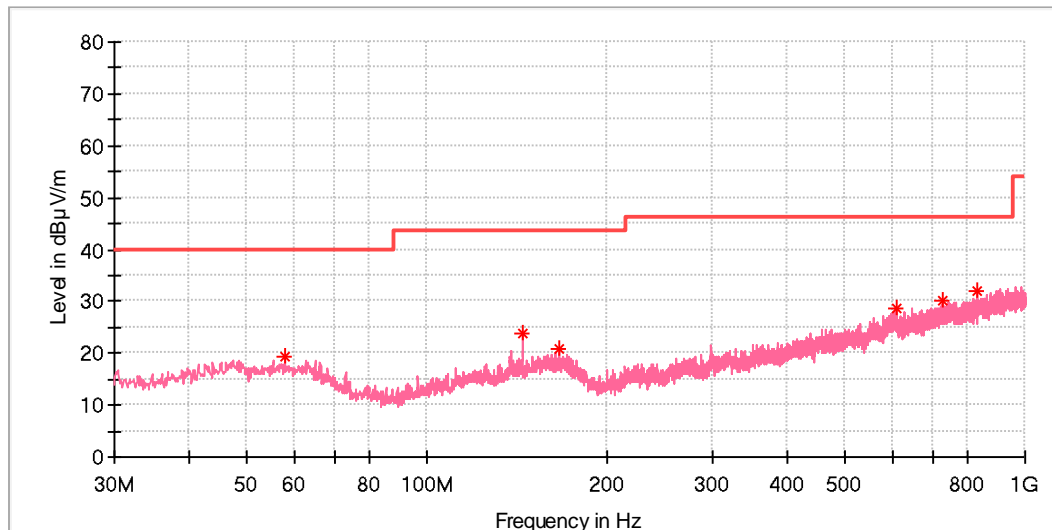


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
57.936000	19.26	40.00	20.74	100.0	V	161.0	21.4
144.266000	23.63	43.50	19.87	100.0	V	244.0	20.2
165.994000	20.91	43.50	22.59	200.0	V	193.0	21.3
609.381000	28.60	46.00	17.40	200.0	V	0.0	27.8
729.370000	30.04	46.00	15.96	100.0	V	105.0	29.6
833.645000	31.89	46.00	14.11	100.0	V	340.0	30.9

Charging only

EUT Information

EUT Name:	MINI POD SPEAKER
Order No:	168378702
Model:	EE2763
Test Mode:	Charging only
Test Voltage:	AC 120V/60Hz
Standard:	FCC Part 15
Test By:/Review By:	Shower Dai / Gary Chen
Tem./Hum./Pressure:	23.7°C/52.6%/101kPa
Remark:	3m chamber

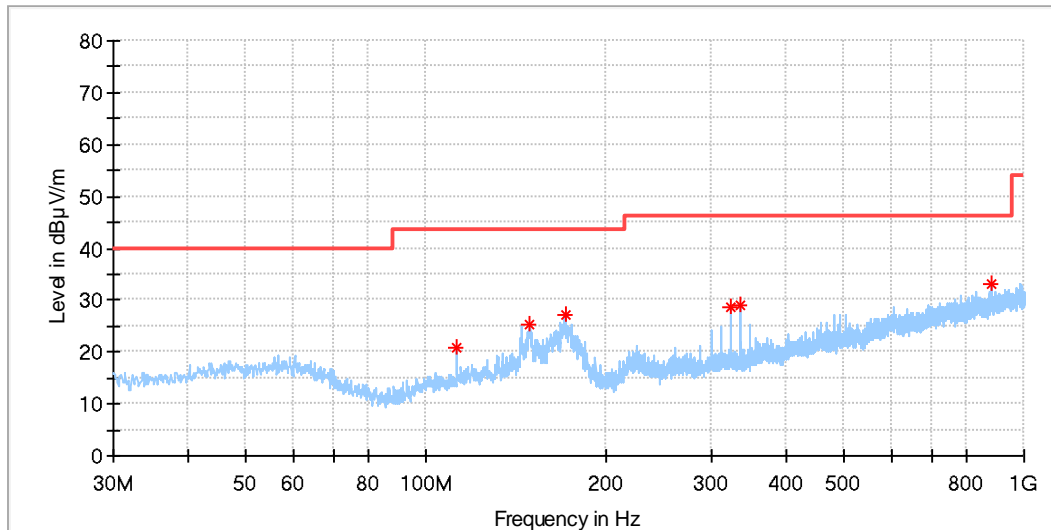


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
112.547000	21.01	43.50	22.49	200.0	H	170.0	18.5
149.407000	25.21	43.50	18.29	200.0	H	25.0	20.5
171.329000	27.10	43.50	16.40	200.0	H	348.0	21.4
324.007000	28.52	46.00	17.48	100.0	H	164.0	21.7
335.938000	28.91	46.00	17.09	100.0	H	156.0	21.4
882.339000	33.18	46.00	12.82	100.0	H	275.0	31.3

EUT Information

EUT Name:	MINI POD SPEAKER
Order No:	168378702
Model:	EE2763
Test Mode:	Charging only
Test Voltage:	AC 120V/60Hz
Standard:	FCC Part 15
Test By:/Review By:	Shower Dai / Gary Chen
Tem./Hum./Pressure:	23.7°C/52.6%/101kPa
Remark:	3m chamber

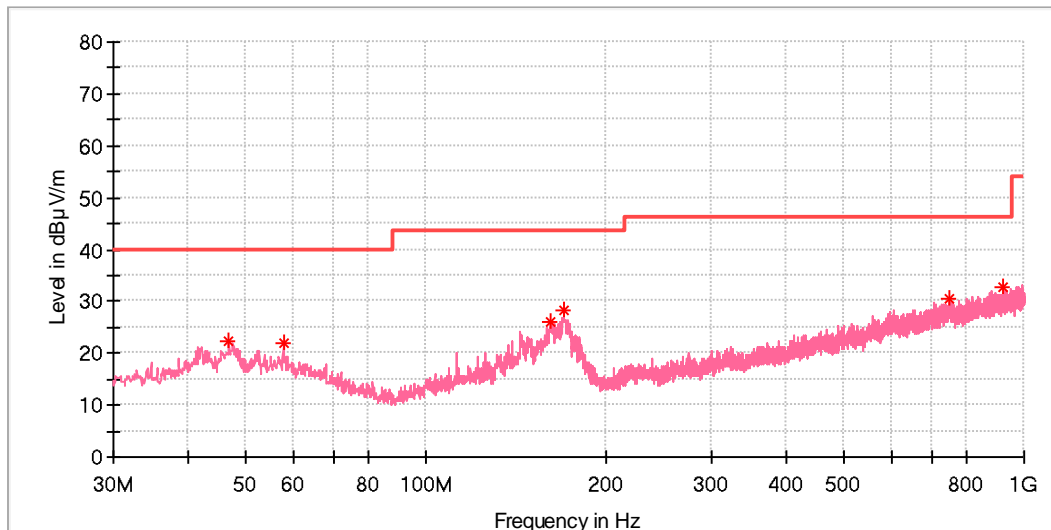


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
46.878000	22.15	40.00	17.85	100.0	V	62.0	21.1
57.839000	21.90	40.00	18.10	100.0	V	106.0	21.4
161.532000	26.14	43.50	17.36	100.0	V	170.0	21.5
170.262000	28.19	43.50	15.31	100.0	V	175.0	21.7
749.449000	30.65	46.00	15.35	200.0	V	199.0	30.5
919.878000	32.69	46.00	13.31	200.0	V	293.0	31.5

Bluetooth play

EUT Information

EUT Name:	MINI POD SPEAKER
Order No:	168378702
Model:	EE2763
Test Mode:	Bluetooth play
Test Voltage:	Battery
Standard:	FCC Part 15
Test By:/Review By:	Shower Dai / Gary Chen
Tem./Hum./Pressure:	23.7°C/52.6%/101kPa
Remark:	3m chamber

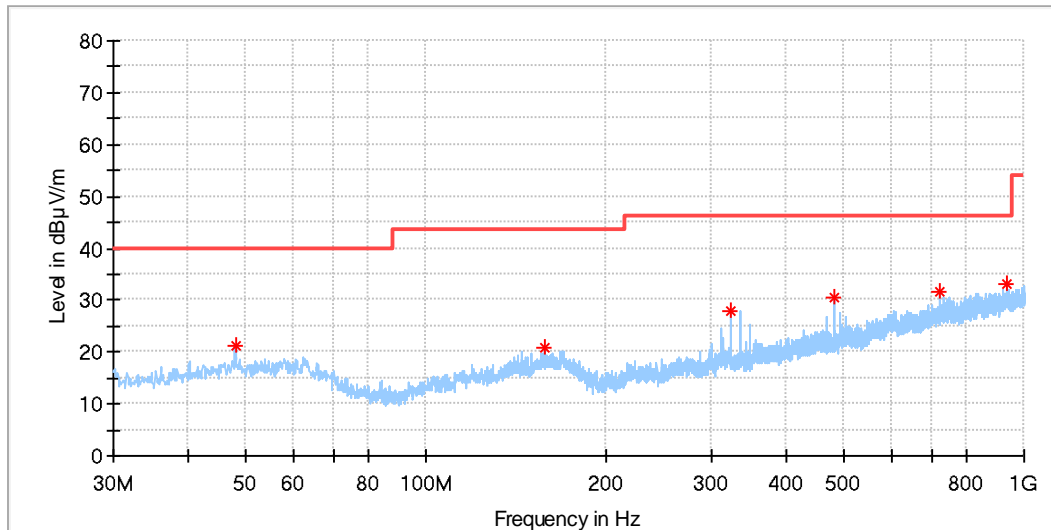


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.945000	21.10	40.00	18.90	100.0	H	36.0	21.4
157.749000	20.69	43.50	22.81	200.0	H	231.0	21.6
324.007000	27.98	46.00	18.02	100.0	H	0.0	21.7
479.983000	30.33	46.00	15.67	200.0	H	0.0	24.5
723.259000	31.50	46.00	14.50	200.0	H	199.0	29.5
933.652000	33.19	46.00	12.81	100.0	H	84.0	32.1

EUT Information

EUT Name: MINI POD SPEAKER
 Order No: 168378702
 Model: EE2763
 Test Mode: Bluetooth play
 Test Voltage: Battery
 Standard: FCC Part 15
 Test By:/Review By: Shower Dai / Gary Chen
 Tem./Hum./Pressure: 23.7°C/52.6%/101kPa
 Remark: 3m chamber

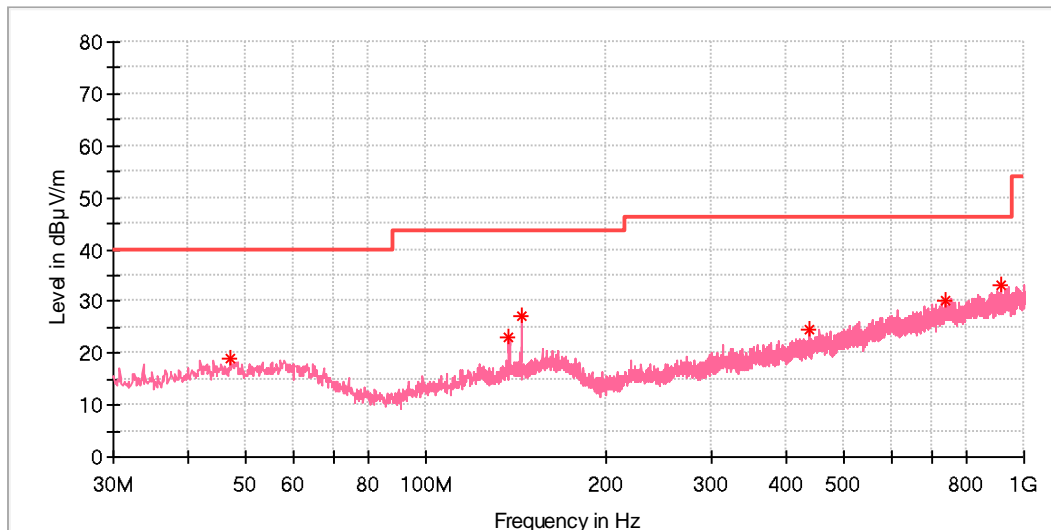

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
47.072000	18.91	40.00	21.09	100.0	V	263.0	21.2
137.573000	22.89	43.50	20.61	100.0	V	228.0	20.0
144.169000	27.21	43.50	16.29	100.0	V	58.0	20.2
436.430000	24.72	46.00	21.28	200.0	V	242.0	23.8
737.518000	30.30	46.00	15.70	100.0	V	195.0	30.1
915.804000	32.94	46.00	13.06	200.0	V	0.0	31.4

Appendix B.3: Test Plots of Radiated Emission, Above 1GHz

Note: Testing was carried out within frequency range 30MHz to the 5th harmonics. The measurement results above 6GHz were greater than 20dB below the limit, so only record the test result within the 30MHz to 6GHz.
 SD Card play

EUT Information

EUT Name: MINI POD SPEAKER
 Order No: 168378702
 Model: EE2763
 Test Mode: SD Card play
 Test Voltage: Battery
 Standard: FCC Part 15
 Test By:/Review By: Shower Dai / Gary Chen
 Tem./Hum./Pressure: 24.1°C/50.8%/101kPa
 Remark: 3m chamber

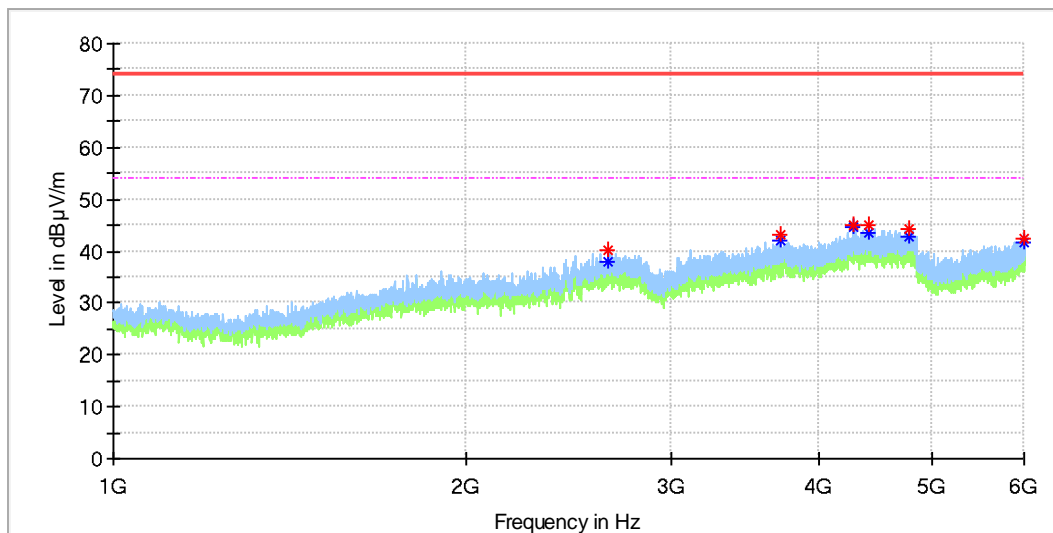


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2646.000000	---	37.87	54.00	16.13	100.0	H	112.0	-3.3
2646.500000	40.06	---	74.00	33.94	100.0	H	112.0	-3.3
3716.500000	43.25	---	74.00	30.75	100.0	H	258.0	0.3
3716.500000	---	42.02	54.00	11.98	100.0	H	258.0	0.3
4291.000000	44.97	---	74.00	29.03	100.0	H	240.0	2.2
4291.000000	---	44.57	54.00	9.43	100.0	H	240.0	2.2
4413.000000	45.12	---	74.00	28.88	100.0	H	246.0	1.9
4413.000000	---	43.40	54.00	10.60	100.0	H	246.0	1.9
4784.000000	44.18	---	74.00	29.82	100.0	H	4.0	2.6
4784.000000	---	42.67	54.00	11.33	100.0	H	4.0	2.6
5991.000000	42.39	---	74.00	31.61	100.0	H	189.0	2.4
5991.000000	---	41.50	54.00	12.50	100.0	H	189.0	2.4

EUT Information

EUT Name: MINI POD SPEAKER
 Order No: 168378702
 Model: EE2763
 Test Mode: SD Card play
 Test Voltage: Battery
 Standard: FCC Part 15
 Test By:/Review By: Shower Dai / Gary Chen
 Tem./Hum./Pressure: 24.1°C/50.8%/101kPa
 Remark: 3m chamber

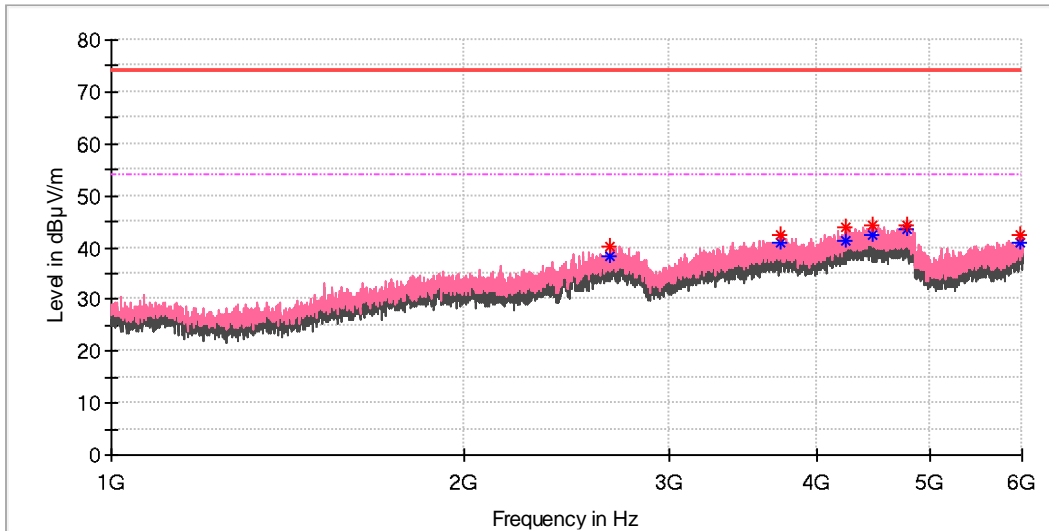


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2668.000000	---	38.46	54.00	15.54	100.0	V	141.0	-3.3
2668.000000	40.30	---	74.00	33.70	100.0	V	141.0	-3.3
3729.500000	---	40.77	54.00	13.23	100.0	V	9.0	0.2
3729.500000	42.55	---	74.00	31.45	100.0	V	9.0	0.2
4246.500000	---	41.16	54.00	12.84	100.0	V	164.0	1.8
4246.500000	44.02	---	74.00	29.98	100.0	V	164.0	1.8
4467.500000	---	42.42	54.00	11.58	100.0	V	216.0	2.0
4467.500000	44.14	---	74.00	29.86	100.0	V	216.0	2.0
4776.000000	---	43.42	54.00	10.58	100.0	V	61.0	2.8
4776.000000	44.17	---	74.00	29.83	100.0	V	61.0	2.8
5975.000000	42.47	---	74.00	31.53	100.0	V	216.0	2.3
5975.000000	---	40.86	54.00	13.14	100.0	V	216.0	2.3

USB Disk play

EUT Information

EUT Name: MINI POD SPEAKER
 Order No: 168378702
 Model: EE2763
 Test Mode: USB Disk play
 Test Voltage: Battery
 Standard: FCC Part 15
 Test By./Review By: Shower Dai / Gary Chen
 Tem./Hum./Pressure: 24.1°C/50.8%/101kPa
 Remark: 3m chamber

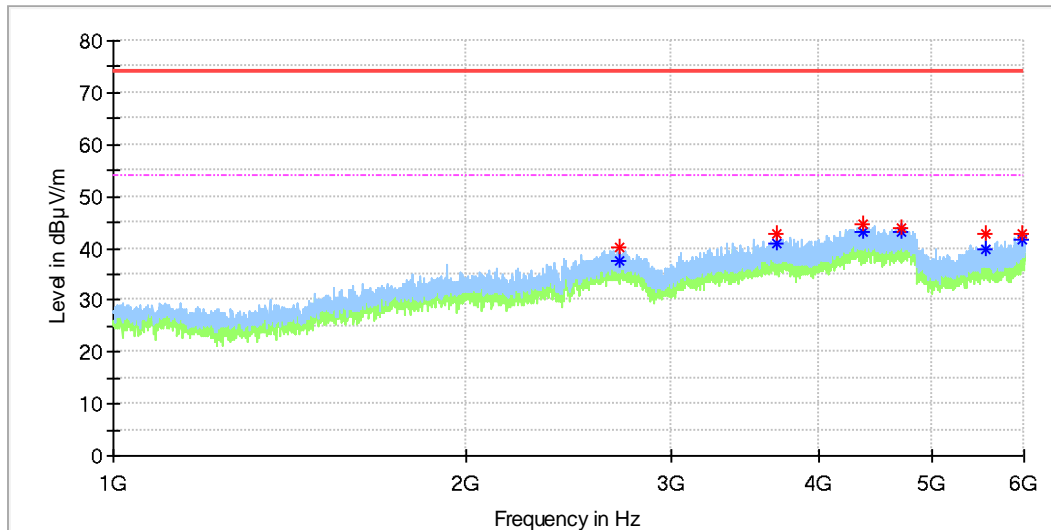


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2702.000000	40.17	---	74.00	33.83	100.0	H	21.0	-3.3
2702.500000	---	37.63	54.00	16.37	100.0	H	140.0	-3.3
3689.500000	---	40.97	54.00	13.03	100.0	H	232.0	0.2
3689.500000	42.74	---	74.00	31.26	100.0	H	232.0	0.2
4374.000000	---	42.98	54.00	11.02	100.0	H	0.0	2.0
4374.000000	44.48	---	74.00	29.52	100.0	H	0.0	2.0
4712.500000	---	43.30	54.00	10.70	100.0	H	16.0	2.7
4712.500000	44.01	---	74.00	29.99	100.0	H	16.0	2.7
5565.000000	---	39.87	54.00	14.13	100.0	H	81.0	1.0
5565.000000	42.83	---	74.00	31.17	100.0	H	81.0	1.0
5976.500000	---	41.65	54.00	12.35	100.0	H	41.0	2.3
5976.500000	42.80	---	74.00	31.20	100.0	H	41.0	2.3

EUT Information

EUT Name: MINI POD SPEAKER
 Order No: 168378702
 Model: EE2763
 Test Mode: USB Disk play
 Test Voltage: Battery
 Standard: FCC Part 15
 Test By:/Review By: Shower Dai / Gary Chen
 Tem./Hum./Pressure: 24.1°C/50.8%/101kPa
 Remark: 3m chamber

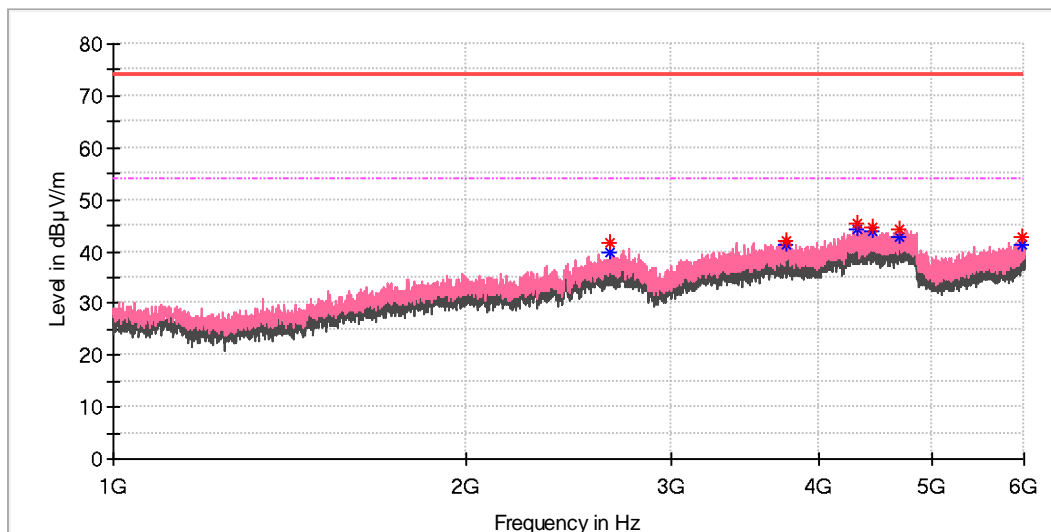


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2659.000000	---	39.76	54.00	14.24	100.0	V	0.0	-3.3
2659.000000	41.50	---	74.00	32.50	100.0	V	0.0	-3.3
3764.000000	---	41.27	54.00	12.73	100.0	V	102.0	0.1
3764.000000	42.04	---	74.00	31.96	100.0	V	102.0	0.1
4327.500000	---	44.26	54.00	9.74	100.0	V	90.0	2.2
4327.500000	45.50	---	74.00	28.50	100.0	V	90.0	2.2
4461.000000	---	43.93	54.00	10.07	100.0	V	165.0	2.0
4461.000000	44.70	---	74.00	29.30	100.0	V	165.0	2.0
4687.000000	---	42.83	54.00	11.17	100.0	V	0.0	2.5
4687.000000	44.32	---	74.00	29.68	100.0	V	0.0	2.5
5981.500000	---	41.16	54.00	12.84	100.0	V	18.0	2.3
5984.000000	42.80	---	74.00	31.20	100.0	V	23.0	2.3

Charging only

EUT Information

EUT Name: MINI POD SPEAKER
 Order No: 168378702
 Model: EE2763
 Test Mode: Charging only
 Test Voltage: AC 120V/60Hz
 Standard: FCC Part 15
 Test By./Review By: Shower Dai / Gary Chen
 Tem./Hum./Pressure: 24.1°C/50.8%/101kPa
 Remark: 3m chamber

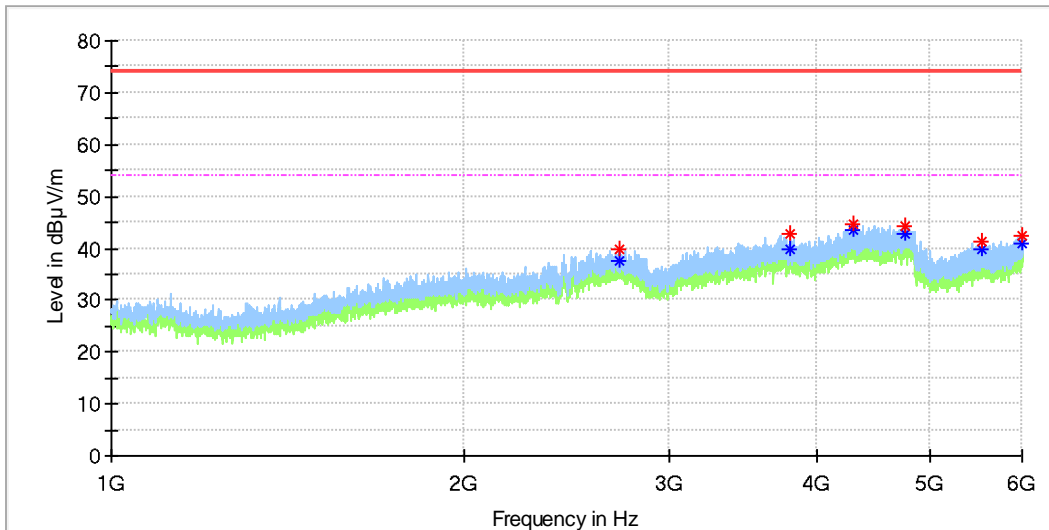


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2720.500000	---	37.69	54.00	16.31	100.0	H	77.0	-3.2
2720.500000	39.73	---	74.00	34.27	100.0	H	77.0	-3.2
3795.000000	42.81	---	74.00	31.19	100.0	H	192.0	0.0
3795.500000	---	39.68	54.00	14.32	100.0	H	192.0	0.0
4301.000000	---	43.53	54.00	10.47	100.0	H	65.0	2.2
4301.000000	44.72	---	74.00	29.28	100.0	H	65.0	2.2
4770.000000	---	42.90	54.00	11.10	100.0	H	0.0	2.8
4770.000000	44.43	---	74.00	29.57	100.0	H	0.0	2.8
5545.000000	---	39.99	54.00	14.01	100.0	H	100.0	1.0
5545.000000	41.35	---	74.00	32.65	100.0	H	100.0	1.0
5995.500000	---	41.08	54.00	12.92	100.0	H	42.0	2.4
5995.500000	42.58	---	74.00	31.42	100.0	H	42.0	2.4

EUT Information

EUT Name: MINI POD SPEAKER
 Order No: 168378702
 Model: EE2763
 Test Mode: Charging only
 Test Voltage: AC 120V/60Hz
 Standard: FCC Part 15
 Test By:/Review By: Shower Dai / Gary Chen
 Tem./Hum./Pressure: 24.1°C/50.8%/101kPa
 Remark: 3m chamber

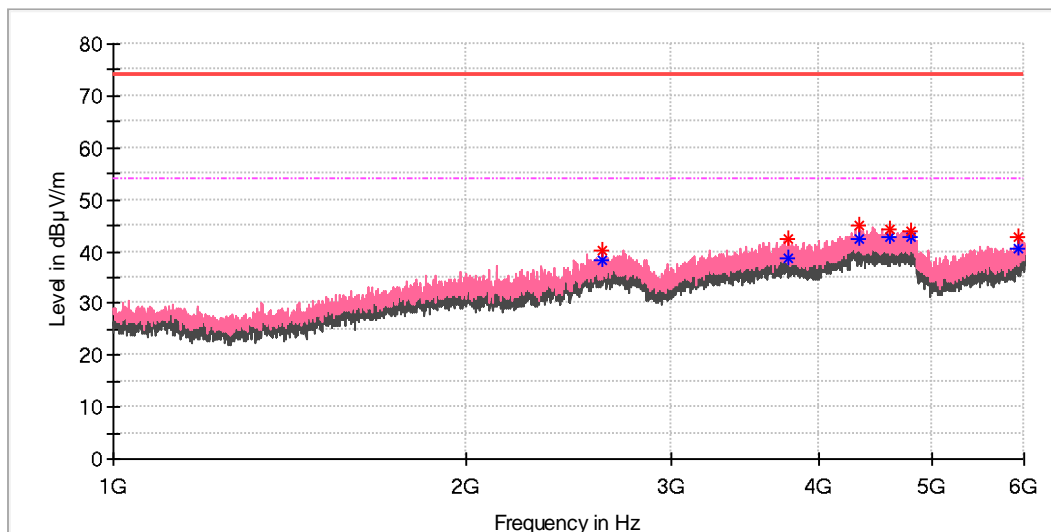


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2619.500000	---	38.28	54.00	15.72	100.0	V	356.0	-3.6
2619.500000	40.05	---	74.00	33.95	100.0	V	356.0	-3.6
3768.500000	---	38.87	54.00	15.13	100.0	V	0.0	0.1
3769.000000	42.32	---	74.00	31.68	100.0	V	0.0	0.1
4342.500000	---	42.26	54.00	11.74	100.0	V	0.0	2.2
4342.500000	44.92	---	74.00	29.08	100.0	V	0.0	2.2
4616.000000	---	42.65	54.00	11.35	100.0	V	32.0	2.0
4616.000000	44.45	---	74.00	29.55	100.0	V	32.0	2.0
4804.000000	44.02	---	74.00	29.98	100.0	V	174.0	2.3
4804.000000	---	42.69	54.00	11.31	100.0	V	174.0	2.3
5942.000000	---	40.48	54.00	13.52	100.0	V	61.0	2.0
5942.000000	42.65	---	74.00	31.35	100.0	V	61.0	2.0

Bluetooth play

EUT Information

EUT Name: MINI POD SPEAKER
 Order No: 168378702
 Model: EE2763
 Test Mode: Bluetooth play
 Test Voltage: Battery
 Standard: FCC Part 15
 Test By./Review By: Shower Dai / Gary Chen
 Tem./Hum./Pressure: 24.1°C/50.8%/101kPa
 Remark: 3m chamber

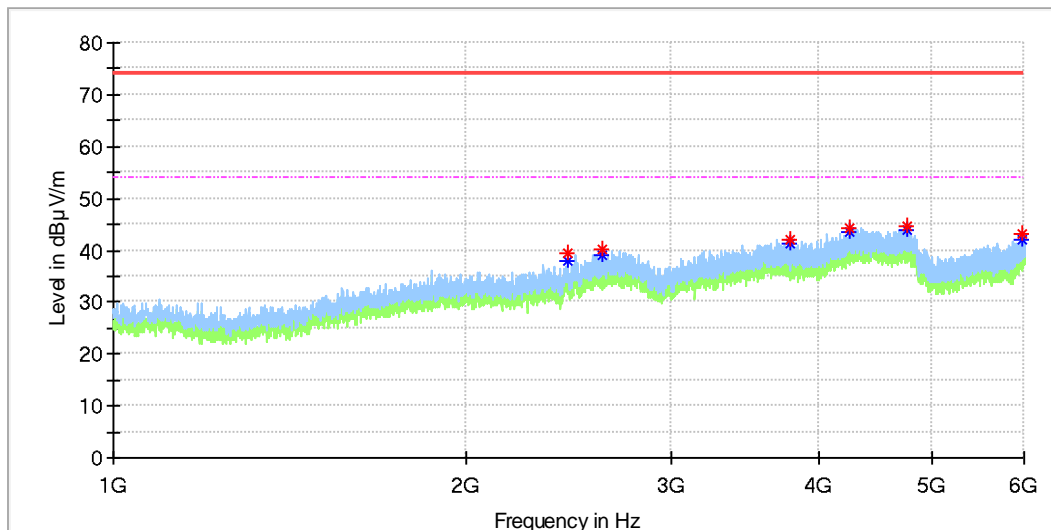


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2444.000000	39.54	---	74.00	34.46	100.0	H	17.0	-5.1
2444.000000	---	38.00	54.00	16.00	100.0	H	17.0	-5.1
2613.000000	40.08	---	74.00	33.92	100.0	H	282.0	-3.6
2613.000000	---	39.24	54.00	14.76	100.0	H	282.0	-3.6
3786.500000	42.22	---	74.00	31.78	100.0	H	316.0	0.0
3786.500000	---	41.45	54.00	12.55	100.0	H	316.0	0.0
4261.500000	44.44	---	74.00	29.56	100.0	H	345.0	1.9
4261.500000	---	43.52	54.00	10.48	100.0	H	345.0	1.9
4759.500000	44.59	---	74.00	29.41	100.0	H	236.0	2.9
4759.500000	---	43.96	54.00	10.04	100.0	H	236.0	2.9
5969.000000	43.12	---	74.00	30.88	100.0	H	242.0	2.2
5969.000000	---	41.94	54.00	12.06	100.0	H	242.0	2.2

EUT Information

EUT Name:	MINI POD SPEAKER
Order No:	168378702
Model:	EE2763
Test Mode:	Bluetooth play
Test Voltage:	Battery
Standard:	FCC Part 15
Test By:/Review By:	Shower Dai / Gary Chen
Tem./Hum./Pressure:	24.1°C/50.8%/101kPa
Remark:	3m chamber

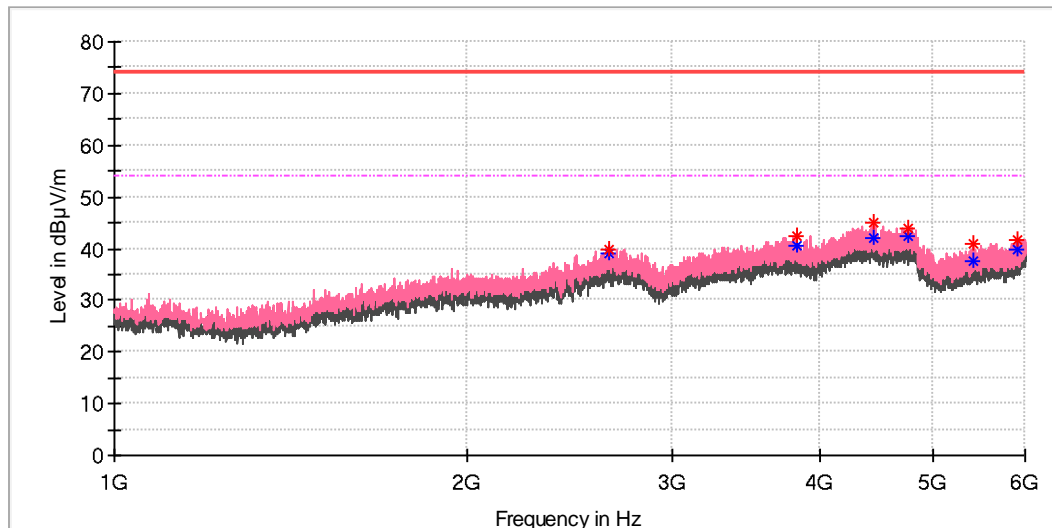

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2647.500000	---	39.25	54.00	14.75	100.0	V	94.0	-3.2
2647.500000	40.00	---	74.00	34.00	100.0	V	94.0	-3.2
3826.000000	---	40.47	54.00	13.53	100.0	V	318.0	0.0
3826.000000	42.56	---	74.00	31.44	100.0	V	318.0	0.0
4449.500000	---	41.94	54.00	12.06	100.0	V	129.0	1.9
4449.500000	45.02	---	74.00	28.98	100.0	V	129.0	1.9
4759.000000	---	42.38	54.00	11.62	100.0	V	301.0	2.9
4759.000000	44.00	---	74.00	30.00	100.0	V	301.0	2.9
5427.500000	---	37.54	54.00	16.46	100.0	V	53.0	0.6
5427.500000	40.93	---	74.00	33.07	100.0	V	53.0	0.6
5911.500000	---	39.69	54.00	14.31	100.0	V	0.0	1.7
5911.500000	41.62	---	74.00	32.38	100.0	V	0.0	1.7