

# Test report

## 282783-2TRFWL

Date of issue: November 9, 2015

Applicant:

**Char-Broil, LLC**

Product:

**Electric Smoker Remote**

Model:

**FDES301125**

FCC ID:

**2AARR4885637CB-RT**

IC Registration number:

**6858A-4885637CBRT**

Specifications:

◆ **FCC 47 CFR Part 15 Subpart C, §15.249**

Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz and 24.0–24.25 GHz


◆ **RSS-210, Issue 8, December 2010, Annex 2.9**

Devices operating in frequency bands 902–928, 2400–2483.5 and 5725–5875 MHz for any application

#### Test location

---

Company name:	Nemko Canada Inc.
Address:	303 River Road
City:	Ottawa
Province:	Ontario
Postal code:	K1V 1H2
Country:	Canada
Telephone:	+1 613 737 9680
Facsimile:	+1 613 737 9691
Toll free:	+1 800 563 6336
Website:	www.nemko.com
Site number:	FCC: 176392; IC: 2040A-4 (3 m semi anechoic chamber)

Tested by:	Kevin Rose, Wireless/EMC Specialist
Reviewed by:	Andrey Adelberg, Senior Wireless/EMC Specialist
Date:	November 9, 2015
Signature:	

#### Limits of responsibility

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

#### Copyright notification

---

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

## Table of Contents

<b>Section 1</b>	<b>Report summary</b> .....	<b>4</b>
1.1	Applicant .....	4
1.2	Manufacturers .....	4
1.3	Test specifications .....	4
1.4	Statement of compliance .....	4
1.5	Exclusions .....	4
1.6	Test report revision history .....	4
<b>Section 2</b>	<b>Summary of test results</b> .....	<b>5</b>
2.1	FCC Part 15 Subpart C – general requirements, test results .....	5
2.2	FCC Part 15 Subpart C – Intentional Radiators, test results .....	5
2.3	IC RSS-GEN, Issue 4, test results .....	5
2.4	RSS-210, Issue 8, test results .....	5
<b>Section 3</b>	<b>Equipment under test (EUT) details</b> .....	<b>6</b>
3.1	Sample information .....	6
3.2	EUT information .....	6
3.3	Technical information .....	6
3.4	Product description and theory of operation .....	6
3.5	EUT exercise details .....	6
3.6	EUT setup Figure .....	7
<b>Section 4</b>	<b>Engineering considerations</b> .....	<b>8</b>
4.1	Modifications incorporated in the EUT .....	8
4.2	Technical judgment .....	8
4.3	Deviations from laboratory tests procedures .....	8
<b>Section 5</b>	<b>Test conditions</b> .....	<b>9</b>
5.1	Atmospheric conditions .....	9
5.2	Power supply range .....	9
<b>Section 6</b>	<b>Measurement uncertainty</b> .....	<b>10</b>
6.1	Uncertainty of measurement .....	10
<b>Section 7</b>	<b>Test equipment</b> .....	<b>11</b>
7.1	Test equipment list .....	11
<b>Section 8</b>	<b>Testing data</b> .....	<b>12</b>
8.1	FCC Clause 15.215(c) Emission bandwidth and RSS-Gen Clause 6.6 Occupied bandwidth .....	12
8.2	FCC Clause 15.249(a) and RSS-210 A2.9(a) Field strength of fundamental and harmonics emissions .....	14
8.3	FCC Clause 15.249(d) and RSS-210 A2.9(b) Spurious emissions (except for harmonics) .....	16
<b>Section 9</b>	<b>Block Figures of test set-ups</b> .....	<b>18</b>
9.1	Radiated emissions set-up .....	18

## Section 1 Report summary

---

### 1.1 Applicant

---

Company name :	Char-Broil, LLC
Address :	1442 Belfast Ave
City :	Columbus
Province/State :	GA
Postal/Zip code :	31904
Country :	USA

### 1.2 Manufacturers

---

Company name :	Zhejiang Fudeer Electric Appliance Co., Ltd.
Address :	No. 286 Karifa Ave, Jiaojiang
City :	Taizhou
Province/State :	Zhejiang Province
Postal/Zip code :	318000
Country :	China

### 1.3 Test specifications

---

FCC 47 CFR Part 15, Subpart C, Clause 15.249	Operation in the 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz and 24.0–24.25 GHz
ANSI 63.10-2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
RSS-210, Issue 8 Annex 2.9	Devices operating in frequency bands 902–928, 2400–2483.5 and 5725–5875 MHz for any application

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

### 1.5 Exclusions

---

None

### 1.6 Test report revision history

---

Revision #	Details of changes made to test report
TRF	Original report issued

## Section 2 Summary of test results

---

### 2.1 FCC Part 15 Subpart C – general requirements, test results

---

Part	Test description	Verdict
§15.207(a)	Conducted limits	Not applicable
§15.215(c)	20 dB emission bandwidth	Pass

Note: The EUT is battery powered.

### 2.2 FCC Part 15 Subpart C – Intentional Radiators, test results

---

Part	Test description	Verdict
§15.249(a)	Field strength of fundamental and harmonics emissions	Pass
§15.249(d)	Spurious emissions (except harmonics)	Pass

### 2.3 IC RSS-GEN, Issue 4, test results

---

Clause	Test description	Verdict
6.6	Occupied bandwidth	Pass
7.1.2	Receiver Radiated Limits	Not applicable
7.1.3	Receiver Conducted Limits	Not applicable
8.8	AC power lines conducted emission limits	Not applicable

Note: <sup>1</sup> According to sections 5.2 and 5.3 of RSS-Gen, Issue 4 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

<sup>2</sup> The EUT is battery powered.

### 2.4 RSS-210, Issue 8, test results

---

Part	Test description	Verdict
§A2.9(a)	Field strength of fundamental and harmonics emissions	Pass
§A2.9(b)	Spurious emissions (except harmonics)	Pass

## Section 3 Equipment under test (EUT) details

---

---

### 3.1 Sample information

---

---

Receipt date	April 1, 2015
Nemko sample ID number	2

### 3.2 EUT information

---

---

Product name	Electric Smoker Remote
Model	FDES301125

### 3.3 Technical information

---

---

Operating band	2400–2483.5 MHz
Operating frequency	2440 MHz
Modulation type	GFSK
Occupied bandwidth (99 %)	945.5 kHz
Emission designator	F1D
Power requirements	DC 3.0 V (2 × 1.5 V “AAA” type batteries)
Antenna information	Internal PCB antenna The EUT uses a unique antenna coupling/ non-detachable antenna to the intentional radiator.

### 3.4 Product description and theory of operation

---

---

The Equipment under Test (EUT) is Remote that Controls an Electric Smoker

### 3.5 EUT exercise details

---

---

EUT was transmitting during testing.

### 3.6 EUT setup Figure

---



Figure 3.6-1: Setup diagram

## Section 4 Engineering considerations

---

---

### 4.1 Modifications incorporated in the EUT

---

---

There were no modifications performed to the EUT during this assessment.

### 4.2 Technical judgment

---

None

### 4.3 Deviations from laboratory tests procedures

---

No deviations were made from laboratory procedures.



## Section 5 Test conditions

---

### 5.1 Atmospheric conditions

---

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	860–1060 mbar

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 5.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.



## Section 6 Measurement uncertainty

---

### 6.1 Uncertainty of measurement

---

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

Test name	Measurement uncertainty, dB
All antenna port measurements	0.55
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

## Section 7 Test equipment

### 7.1 Test equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002047	1 year	Feb. 25/16
Flush mount turntable	Sunol	FM2022	FA002082	—	NCR
Controller	Sunol	SC104V	FA002060	—	NCR
Antenna mast	Sunol	TLT2	FA002061	—	NCR
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 26	FA002043	1 year	Jan. 07/16
Spectrum analyzer	Rohde & Schwarz	FSU	FA001877	1 year	Mar. 27/16
Horn antenna (1–18 GHz)	EMCO	3115	FA000825	1 year	Apr. 01/16
Bilog antenna (20–3000 MHz)	Sunol	JB3	FA002108	1 year	Apr. 12/16
Horn antenna (18–26.5 GHz)	Electro-metrics	SH-50/60-1	FA000479	—	VOU
Pre-amplifier (18–26 GHz)	Narda	BBS-1826N612	FA001550	—	VOU
50 $\Omega$ coax cable	C.C.A.	None	FA002555	1 year	June 23/15
50 $\Omega$ coax cable	Huber + Suhner	None	FA002074	1 year	June 23/15

Note: NCR - no calibration required VOU - verify on use



## Section 8 Testing data

### 8.1 FCC Clause 15.215(c) Emission bandwidth and RSS-Gen Clause 6.6 Occupied bandwidth

#### 8.1.1 Definitions and limits

##### FCC Part 15.215(c)

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80 % of the permitted band in order to minimize the possibility of out-of-band operation.

##### RSS-Gen Clause 6.6 Occupied bandwidth

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99 percent emission bandwidth, as calculated or measured.

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

The span between the two recorded frequencies is the occupied bandwidth.

#### 8.1.2 Test summary


Verdict	Pass		
Test date	April 23, 2015	Temperature	21 °C
Test engineer	Kevin Rose	Air pressure	990 mbar
Test location	Ottawa	Relative humidity	27 %

#### 8.1.3 Observations, settings and special notes

##### Spectrum analyzer settings:


Resolution bandwidth:	50 kHz
Video bandwidth:	200 kHz
Detector mode:	Peak
Trace mode:	Max Hold
Function:	20 dB BW (for FCC); 99 % bandwidth (for IC)

8.1.4 Test data

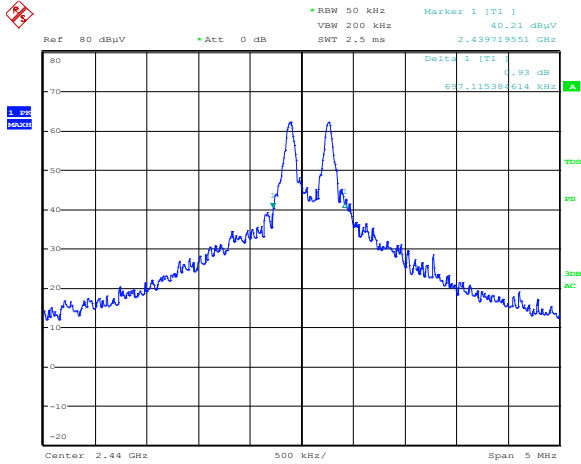

Date: 23.APR.2015 16:28:49

Plot 8.1-1: 20 dB bandwidth

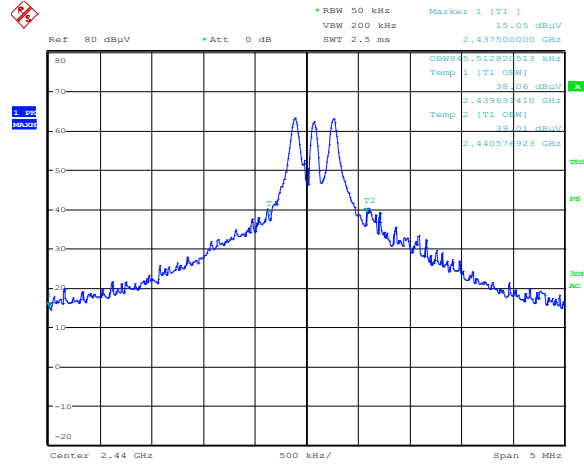

Date: 23.APR.2015 16:21:56

Plot 8.1-2: 99 % occupied bandwidth

Table 8.1-1: 20 dB bandwidth results

Lower 20 dBc Freq., MHz	Lower 20 dBc Freq. limit, MHz	Lower margin, MHz	Upper 20 dBc Freq., MHz	Upper 20 dBc Freq. limit, MHz	Upper margin, MHz
2439.7	2400	39.7	2440.4	2483.5	43.1

Table 8.1-2: 99% bandwidth results

Frequency, MHz	99 % bandwidth, kHz
2440	945.5

## 8.2 FCC Clause 15.249(a) and RSS-210 A2.9(a) Field strength of fundamental and harmonics emissions

### 8.2.1 Definitions and limits

In addition to the provisions of §15.205 and RSS Gen the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Table 8.2-1: Field strength limits

Fundamental frequencies (MHz)	Field strength of fundamental		Field strength of harmonics	
	(mV/m)	(dBµV/m)	(µV/m)	(dBµV/m)
902–928	50	94	500	54
2400–2483.5	50	94	500	54
5725–5875	50	94	500	54
24.0–24.25*	250	108	2500	68

Note: \* - Only FCC band.

(e) As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter (128 dBµV/m) at 3 meters along the antenna azimuth.

### 8.2.2 Test summary

Verdict	Pass		
Test date	April 23, 2015	Temperature	21 °C
Test engineer	Kevin Rose	Air pressure	990 mbar
Test location	Ottawa	Relative humidity	27 %

### 8.2.3 Observations, settings and special notes


- The spectrum was searched from 30 MHz to the 10<sup>th</sup> harmonic at a distance of 3 m.
- The test was performed with vertical and horizontal antenna polarizations and the EUT was measured on three orthogonal axis, only the highest emissions were reported.

Spectrum analyzer/receiver settings:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold
Average measurements:	Duty cycle/average factor was used for calculation of the average level.

8.2.4 Test data, continued

Duty cycle correction factor measurement:

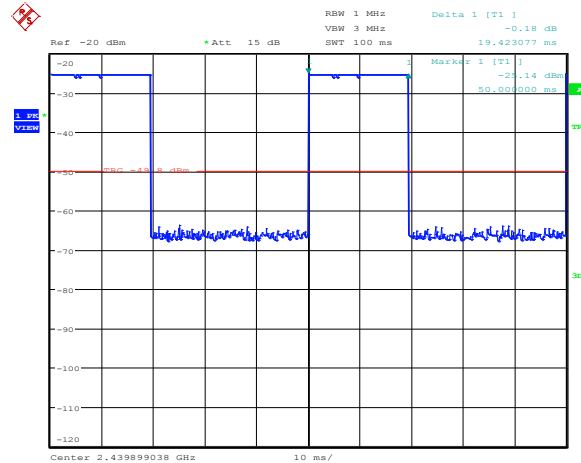

High channel  
 Date: 23.APR.2015 15:22:15

**Plot 8.2-1: 100 ms transmissions**

Duty cycle calculation:  $20 \times \log_{10} (T_{x100\text{ms}} / 100\text{ms}) = 20 \times \log_{10} (2 \times 19.42 / 100\text{ms}) = -8.21\text{ dB}$

**Table 8.2-2: Field strength of fundamental measurement results**

Frequency, (MHz)	Peak field strength, (dBμV/m)	Peak limit, (dBμV/m)	Margin, (dB)	Duty cycle factor, (dB)	Average field strength, (dBμV/m)	Average limit, (dBμV/m)	Margin, (dB)
2440	88.08	114	25.92	-8.21	79.87	94	14.13

Note: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable. Average field strength was calculated as follows: Peak field strength (dBμV/m) + duty cycle factor (dB).

**Table 8.2-3: Field strength of harmonics measurement results**

Frequency, (MHz)	Peak field strength, (dBμV/m)	Peak limit, (dBμV/m)	Margin, (dB)	Duty cycle factor, (dB)	Average field strength, (dBμV/m)	Average limit, (dBμV/m)	Margin, (dB)
4880	60.06	74	13.94	-8.21	51.85	54	2.15
7320	59.52	74	14.48	-8.21	51.31	54	2.69

Note: Field strength includes correction factor of antenna, cable loss, amplifier, and attenuators where applicable. Average field strength was calculated as follows: Peak field strength (dBμV/m) + duty cycle factor (dB).

### 8.3 FCC Clause 15.249(d) and RSS-210 A2.9(b) Spurious emissions (except for harmonics)

#### 8.3.1 Definitions and limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in FCC §15.209 and RSS-Gen, whichever is the lesser attenuation.

**Table 8.3-1: Field strength of spurious emissions**

Frequency (MHz)	Field strength		Measurement distance (m)
	( $\mu\text{V}/\text{m}$ )	( $\text{dB}\mu\text{V}/\text{m}$ )	
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes:

- In the emission table above, the tighter limit applies at the band edges.
- For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

#### 8.3.2 Test summary

Verdict	Pass		
Test date	April 23, 2015	Temperature	21 °C
Test engineer	Kevin Rose	Air pressure	990 mbar
Test location	Ottawa	Relative humidity	27 %

#### 8.3.3 Observations, settings and special notes

The spectrum was searched from 30 MHz to the 10<sup>th</sup> harmonic at a distance of 3 m.

The test was performed with vertical and horizontal antenna polarizations and the EUT was measured on three orthogonal axis, only the highest emissions were reported.

**No RF Emissions except for harmonics were detected**

Spectrum analyzer/receiver settings for frequencies below 1 GHz:

Resolution bandwidth:	120 kHz
Video bandwidth:	300 kHz
Detector mode:	Quasi-Peak
Trace mode:	Max Hold



Spectrum analyzer/receiver settings for frequencies above 1 GHz:

Resolution bandwidth:	1 MHz
Video bandwidth:	3 MHz
Detector mode:	Peak
Trace mode:	Max Hold
Average measurements:	Duty cycle/average factor was used for calculation of the average level.





8.3.4 Test data

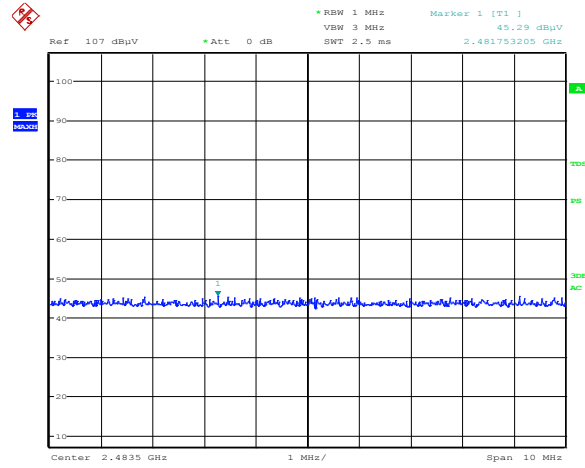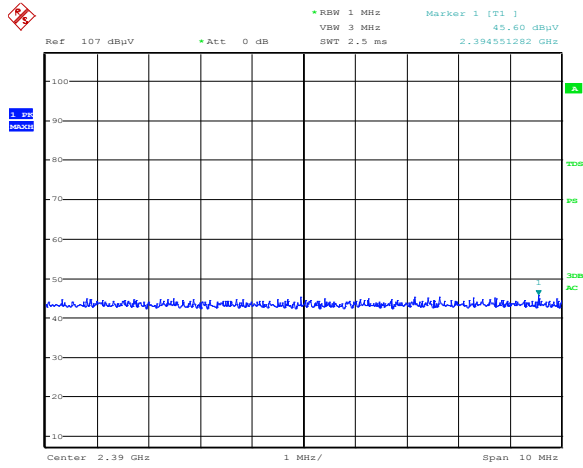

Date: 23.APR.2015 16:14:00

Date: 23.APR.2015 16:13:17

Plot 8.3-1: Lower band edge measurement

Plot 8.3-2: Upper band edge measurement

## Section 9 Block Figures of test set-ups

### 9.1 Radiated emissions set-up

