

TEST REPORT



Applicant	Medtrum Technologies Inc.
Address	7F,Building 8, No.200 Niudun Road, Shanghai 201203, China

Manufacturer or Supplier	Medtrum Technologies Inc.
Address	Building 3 and 6F~7F,Building 8,NO.200,Niudun Road,Shanghai 201203,China
Product	Pump Base
Brand Name	N/A
Model	MD0201
Additional Model & Model Difference	N/A
Date of tests	Feb. 05, 2021~ Mar. 09, 2021

the tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C, Section 15.247**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Aaron Liang Project Engineer / EMC Department	Approved by David Huang Supervisor / EMC Department
	 Date: Mar. 10, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2. Test Mode Applicability and tested channel detail	7
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4 DESCRIPTION OF SUPPORT UNITS	10
4 TEST TYPES AND RESULTS.....	11
4.1 RADIATED EMISSION MEASUREMENT	11
4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	11
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 6dB BANDWIDTH MEASUREMENT.....	21
4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	21
4.2.2 TEST INSTRUMENTS.....	21
4.2.3 TEST PROCEDURE.....	22
4.2.4 DEVIATION FROM TEST STANDARD	22
4.2.5 TEST SETUP	23
4.2.6 EUT OPERATING CONDITIONS	23
4.2.7 TEST RESULTS	24
4.3 CONDUCTED OUTPUT POWER.....	25
4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	25
4.3.2 TEST SETUP	25
4.3.3 TEST INSTRUMENTS.....	25
4.3.4 TEST PROCEDURES	26



4.3.5	DEVIATION FROM TEST STANDARD	26
4.3.6	EUT OPERATING CONDITIONS	26
4.3.7	TEST RESULTS	26
4.3.7.1	MAXIMUM PEAK OUTPUT POWER	26
4.3.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE)	26
4.4	POWER SPECTRAL DENSITY MEASUREMENT	27
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	27
4.4.2	TEST SETUP	27
4.4.3	TEST INSTRUMENTS	27
4.4.4	TEST PROCEDURE	27
4.4.5	DEVIATION FROM TEST STANDARD	27
4.4.6	EUT OPERATING CONDITION	27
4.4.7	TEST RESULTS	28
4.5	OUT OF BAND EMISSION MEASUREMENT	29
4.5.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	29
4.5.2	TEST SETUP	29
4.5.3	TEST INSTRUMENTS	29
4.5.4	TEST PROCEDURE	29
4.5.5	DEVIATION FROM TEST STANDARD	30
4.5.6	EUT OPERATING CONDITION	30
4.5.7	TEST RESULTS	31
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	34
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	35



Test Report No.: RF2102WSZ0052-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2102WSZ0052-2	Original release	Mar. 10, 2021



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Power from battery
15.205 15.209	Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9kHz~30MHz	2.16dB
	30MHz ~ 1GMHz	3.74dB
	1GHz ~ 18GHz	4.66dB
	18GHz ~ 40GHz	4.67dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Pump Base
MODEL NO.	MD0201
ADDITIONAL MODELS	N/A
FCC ID	2AARU-MD0201
NOMINAL VOLTAGE	DC 6V (1.5V*4*L754F) from battery
MODULATION TECHNOLOGY	DTS
MODULATION TYPE	BT-LE(GFSK)
OPERATING FREQUENCY	2402-2480MHz
PEAK OUTPUT POWER	0.382mW (Max. Measured)
ANTENNA TYPE	Ceramic Antenna, with 2dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2102WSZ0052-2) for detailed product photo.



3.2 DESCRIPTION OF TEST MODES

40 channels are provided for BT-LE(GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	DC 6V from full Battery

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

**RADIATED EMISSION TEST (BELOW 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	39	DTS	BT-LE	1

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	0,19, 39	DTS	BT-LE	1

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	0, 19, 39	DTS	BT-LE	1



TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	23deg. C, 51%RH	DC 6V from full Battery	Aaron Liang
RE≥1G	23deg. C, 51%RH	DC 6V from full Battery	Aaron Liang
PLC	-	-	-
APCM	24deg. C, 54%RH	DC 6V from full Battery	Aaron Liang



Test Report No.: RF2102WSZ0052-2

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

Note: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as a dependent unit together without any other necessary accessories or support units.



4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESL6	1300.5001K06 -100262-eQ	Mar. 24, 20	Mar. 24, 21
Bilog Antenna	Sunol Sciences	JB6	A110712	Jul. 21, 20	Jul. 21, 21
Active Antenna	CMO-POWER	AL-130	121031	Jun. 30, 20	Jun. 30, 21
Signal Amplifier	HP	8447E	443008	Mar. 24, 20	Mar. 24, 21
Signal and Spectrum Analyzer	R&S	FSV40	101094	Mar. 19, 20	Mar. 19, 21
MXA signal analyzer	Agilent	N9020A	MY49100060	Mar. 24, 20	Mar. 24, 21
Horn Antenna	COM-POWER	AH-118	71259	Apr. 17, 20	Apr. 17, 21
Horn Antenna	COM-POWER	AH-118	71283	Jul. 21, 20	Jul. 21, 21
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170147	May 10, 20	May 10, 21
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170242	May 10, 20	May 10, 21
AMPLIFIER	EM Electornic Corporation	EM01G26G	60613	Mar. 24, 20	Mar. 24, 21
Pre-amplifier	Rohde&Schwarz	SCU40	100437	Oct. 17, 20	Oct. 16, 21
3m Semi-anechoic Chamber	SAEMC	9m*6m*6m	N/A	Oct. 18,18	Oct. 17, 21
Test Software	EZ-EMC	ICP-03A1	N/A	N/A	N/A

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months (Except 3m Semi-anechoic Chamber). And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 535293.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
- 4.All modes of operation were investigated and the worst-case emissions are reported.
- 5.The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.




4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Below 30MHz test setup

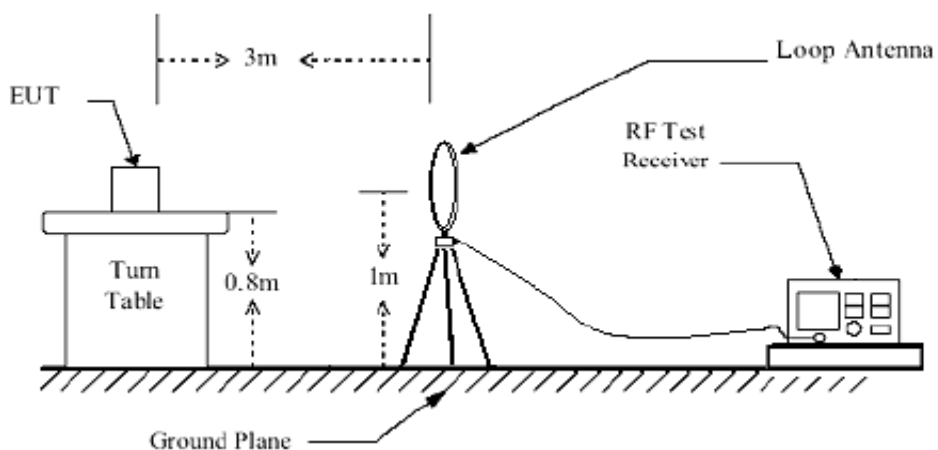


Below 1GHz test setup

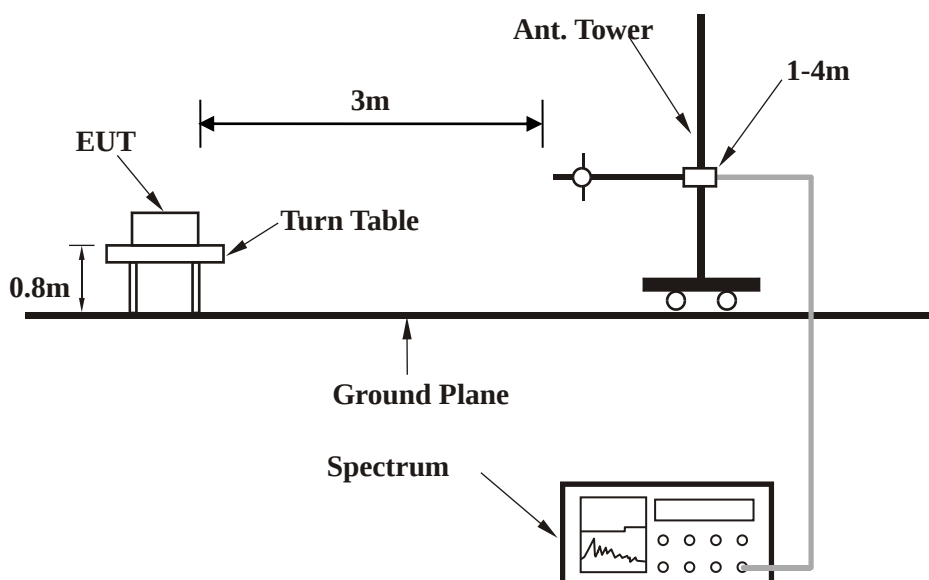

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).



Above 1GHz test setup

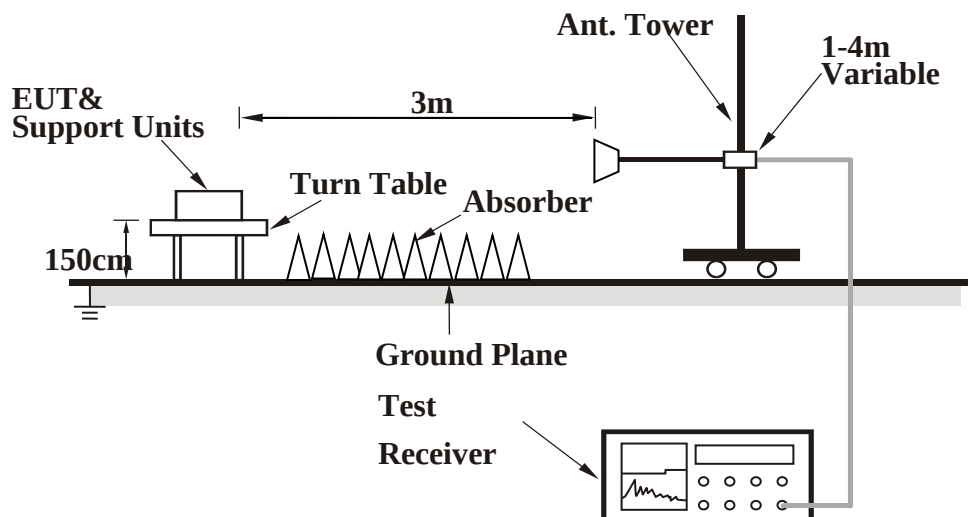

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


BT-LE (GFSK)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m										
No.	Frequency (MHz)	Reading (dBuV/m)	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	32.7486	27.26	peak	19.28	21.62	0.44	25.36	40.00	-14.64	100
2	72.5917	27.80	peak	7.80	21.62	0.79	14.77	40.00	-25.23	100
3	133.6188	27.72	peak	13.19	21.67	1.16	20.40	43.50	-23.10	200
4	319.9370	26.56	peak	13.92	21.99	1.87	20.36	46.00	-25.64	100
5	517.2480	28.02	peak	17.84	22.03	2.32	26.15	46.00	-19.85	100
6	790.6188	29.63	peak	21.27	21.72	2.94	32.12	46.00	-13.88	200

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

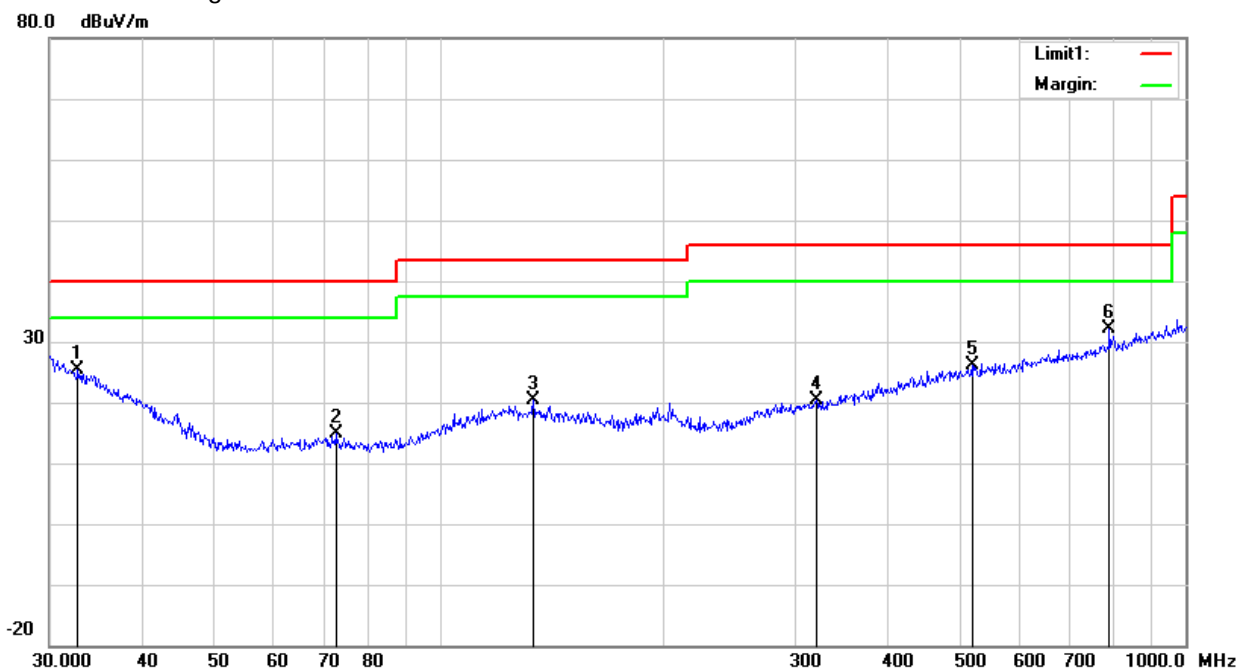




CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m										
No.	Frequency (MHz)	Reading (dBuV/m)	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	32.6340	26.54	peak	19.36	21.62	0.44	24.72	40.00	-15.28	100
2	72.3376	27.42	peak	7.81	21.62	0.79	14.40	40.00	-25.60	100
3	120.2766	27.03	peak	12.88	21.65	1.11	19.37	43.50	-24.13	200
4	300.3673	26.73	peak	13.61	21.99	1.82	20.17	46.00	-25.83	100
5	530.1014	28.05	peak	17.94	22.03	2.35	26.31	46.00	-19.69	100
6	906.4824	27.69	peak	22.44	21.52	3.21	31.82	46.00	-14.18	200

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB).
3. The emission levels of other frequencies were greater than 20dB margin.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

80.0 dBuV/m

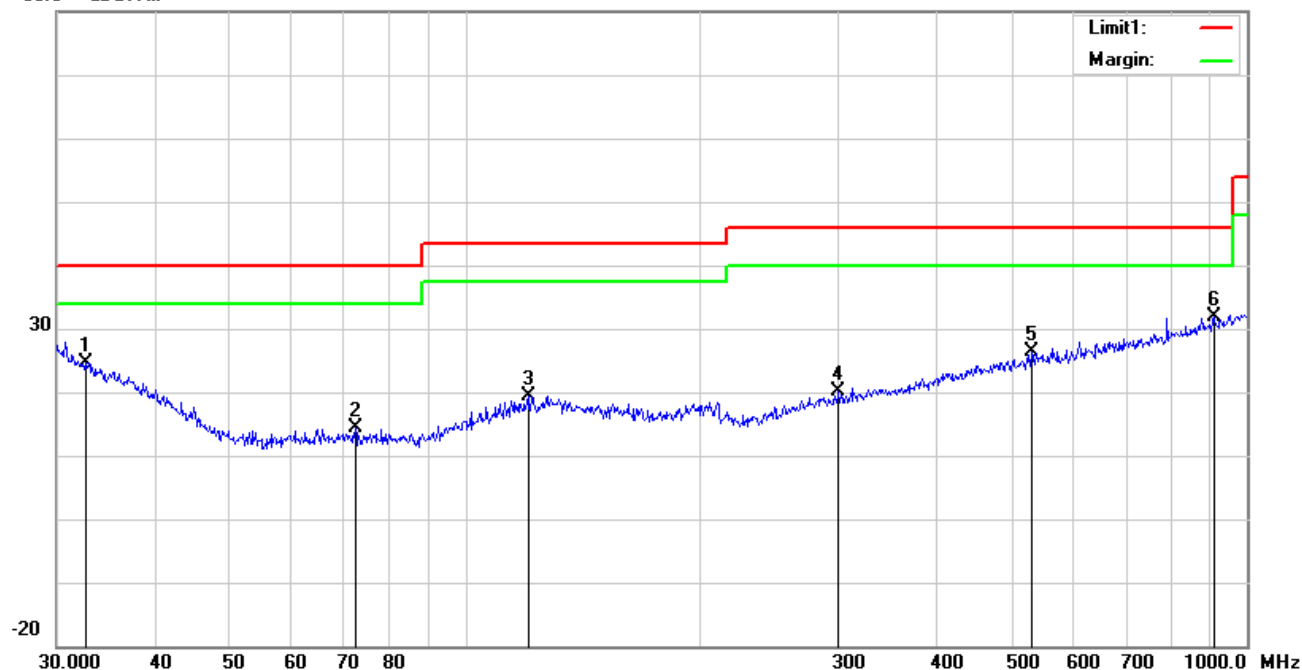



ABOVE 1GHz TEST DATA:

BT-LE (GFSK)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	2365.31	43.51PK	74	-30.49	153	159	54.89	-11.38
2	2365.31	31.33AV	54	-22.67	153	159	42.71	-11.38
3	*2402	87.26PK			197	72	98.64	-11.38
4	*2402	78.89AV			197	72	90.27	-11.38
5	4804	47.76PK	74	-26.24	213	291	53.83	-6.07
6	4804	38.78AV	54	-15.22	213	291	44.85	-6.07
7	7206	54.7PK	74	-19.3	192	302	54.41	0.29
8	7206	45.49AV	54	-8.51	192	302	45.2	0.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	((dB/m)
1	2333.2	43.91PK	74	-30.09	248	324	55.29	-11.38
2	2333.2	32.27AV	54	-21.73	248	324	43.65	-11.38
3	*2402	83.86PK			229	231	95.24	-11.38
4	*2402	82.56AV			229	231	93.94	-11.38
5	4804	47.86PK	74	-26.14	239	215	53.93	-6.07
6	4804	38.06AV	54	-15.94	239	215	44.13	-6.07
7	7206	54.6PK	74	-19.4	119	124	54.31	0.29
8	7206	44.57AV	54	-9.43	119	124	44.28	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	*2440	81.22PK			172	142	92.6	-11.38
2	*2440	80.78AV			172	142	92.16	-11.38
3	4880	48.5PK	74	-25.5	165	26	54.57	-6.07
4	4880	39.69AV	54	-14.31	165	26	45.76	-6.07
5	7320	54.82PK	74	-19.18	200	243	54.53	0.29
6	7320	44.25AV	54	-9.75	200	243	43.96	0.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	*2440	84.76PK			111	134	96.14	-11.38
2	*2440	84.29AV			111	134	95.67	-11.38
3	4880	48.88PK	74	-25.12	130	190	54.95	-6.07
4	4880	39.55AV	54	-14.45	130	190	45.62	-6.07
5	7320	55.17PK	74	-18.83	132	282	54.88	0.29
6	7320	46.01AV	54	-7.99	132	282	45.72	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	2483.5	45.2PK	74	-28.8	154	357	56.58	-11.38
2	2483.5	34.38AV	54	-19.62	154	357	45.76	-11.38
3	*2480	78.42PK			231	207	89.8	-11.38
4	*2480	77.92AV			231	207	89.3	-11.38
5	4960	48.91PK	74	-25.09	103	310	54.98	-6.07
6	4960	40.63AV	54	-13.37	103	310	46.7	-6.07
7	7440	54.65PK	74	-19.35	209	224	54.36	0.29
8	7440	44.64AV	54	-9.36	209	224	44.35	0.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	2483.5	45.93PK	74	-28.07	156	6	57.31	-11.38
2	2483.5	34.14AV	54	-19.86	156	6	45.52	-11.38
3	*2480	81.34PK			175	127	92.72	-11.38
4	*2480	81.16AV			175	127	92.54	-11.38
5	4960	48.67PK	74	-25.33	185	155	54.74	-6.07
6	4960	40.18AV	54	-13.82	185	155	46.25	-6.07
7	7440	53.15PK	74	-20.85	220	193	52.86	0.29
8	7440	44.85AV	54	-9.15	220	193	44.56	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



4.2 6dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXA VEXTOR SIGNAL	Agilent	n5182a	MY50140530	Mar. 24, 20	Mar. 24, 21
MXA signal analyzer	Agilent	n9020a	MY49100060	Mar. 24, 20	Mar. 24, 21
RF Control Unit	Tonscend	JS0806-2	188060112	Mar. 24, 20	Mar. 24, 21
DC Power Supply	Agilent	E3640A	MY40004013	Mar. 30, 20	Mar. 30, 21
Programmable Temperature & Humidity Chamber	Hongjin	HYC-TH-225 DH	DG-180746	Mar. 24, 20	Mar. 24, 21
Test System	Tonscend	JS 1120-3	N/A	N/A	N/A
Power Splitter	Weinschel	1580-1	TL177	Mar. 27, 20	Mar. 27, 21

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.2.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.



4.2.5 TEST SETUP

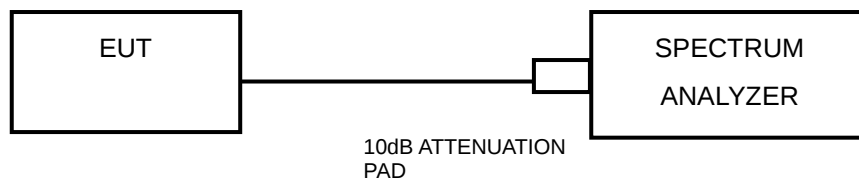

4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.2.7 TEST RESULTS

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.692	0.5	PASS
19	2440	0.704	0.5	PASS
39	2480	0.692	0.5	PASS

WORSE PLOT

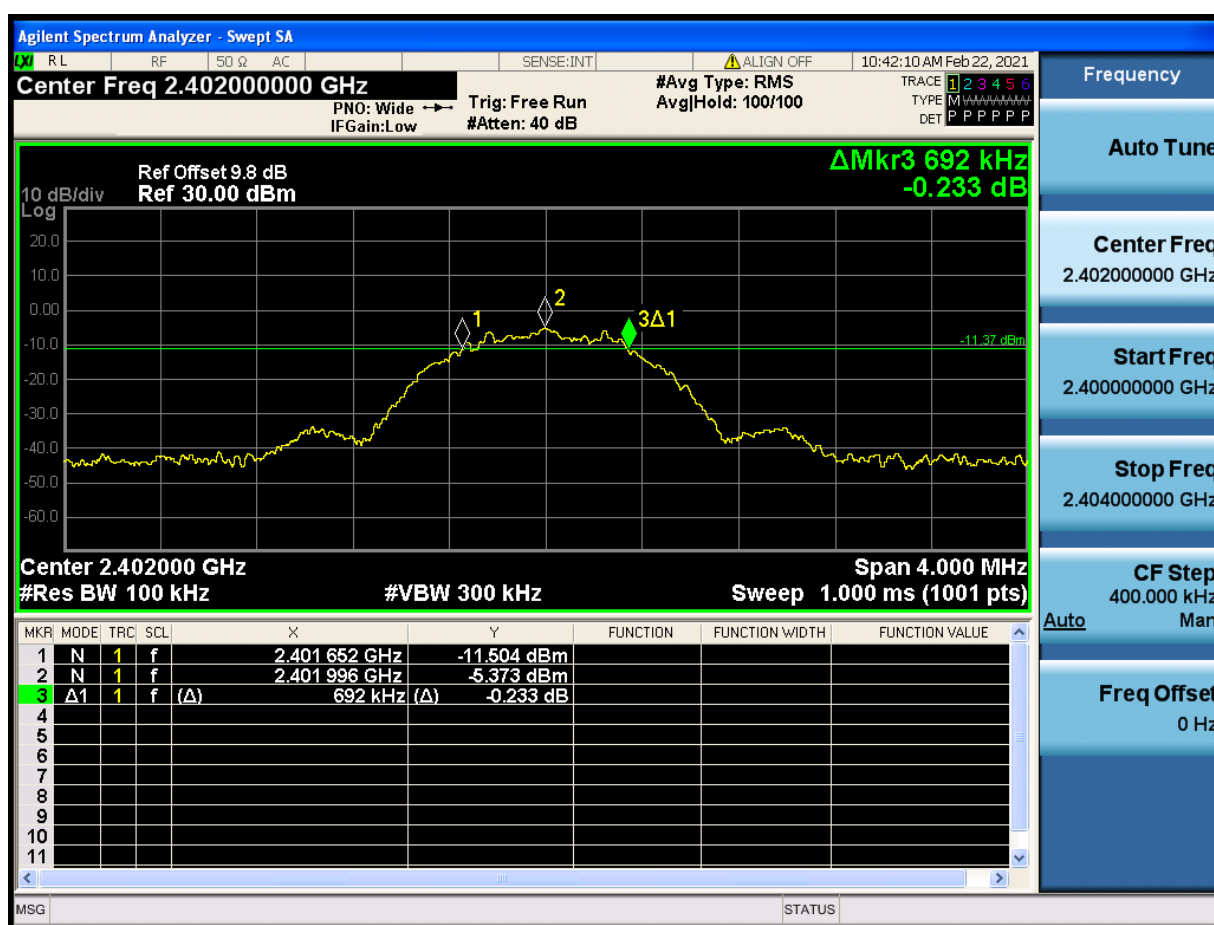




4.3 CONDUCTED OUTPUT POWER

4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.3.2 TEST SETUP

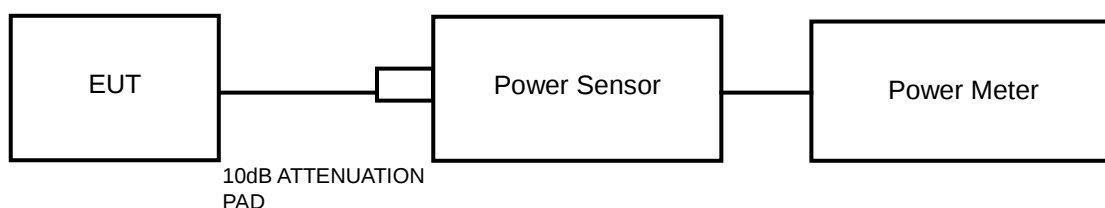

4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
MXA VEXTOR SIGNAL	Agilent	n5182a	MY50140530	Mar. 24, 20	Mar. 24, 21
MXA signal analyzer	Agilent	n9020a	MY49100060	Mar. 24, 20	Mar. 24, 21
RF Control Unit	Tonscend	JS0806-2	188060112	Mar. 24, 20	Mar. 24, 21
DC Power Supply	Agilent	E3640A	MY40004013	Mar. 30, 20	Mar. 30, 21
Programmable Temperature & Humidity Chamber	Hongjin	HYC-TH-225 DH	DG-180746	Mar. 24, 20	Mar. 24, 21
Test System	Tonscend	JS 1120-3	N/A	N/A	N/A
Power Splitter	Weinschel	1580-1	TL177	Mar. 27, 20	Mar. 27, 21

NOTE:1. The test was performed in RF Oven room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.3.4 TEST PROCEDURES

A peak sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

4.3.7.1 MAXIMUM PEAK OUTPUT POWER

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	-4.32	0.37	1	PASS
19	2440	-4.29	0.372	1	PASS
39	2480	-4.18	0.382	1	PASS

4.3.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2402	-6.32
19	2440	-6.62
39	2480	-6.08




4.4 POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.4.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.4.7 TEST RESULTS

BT-LE (GFSK)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-8.899	8	PASS
19	2440	-6.519	8	PASS
39	2480	-5.347	8	PASS

WORSE PLOT

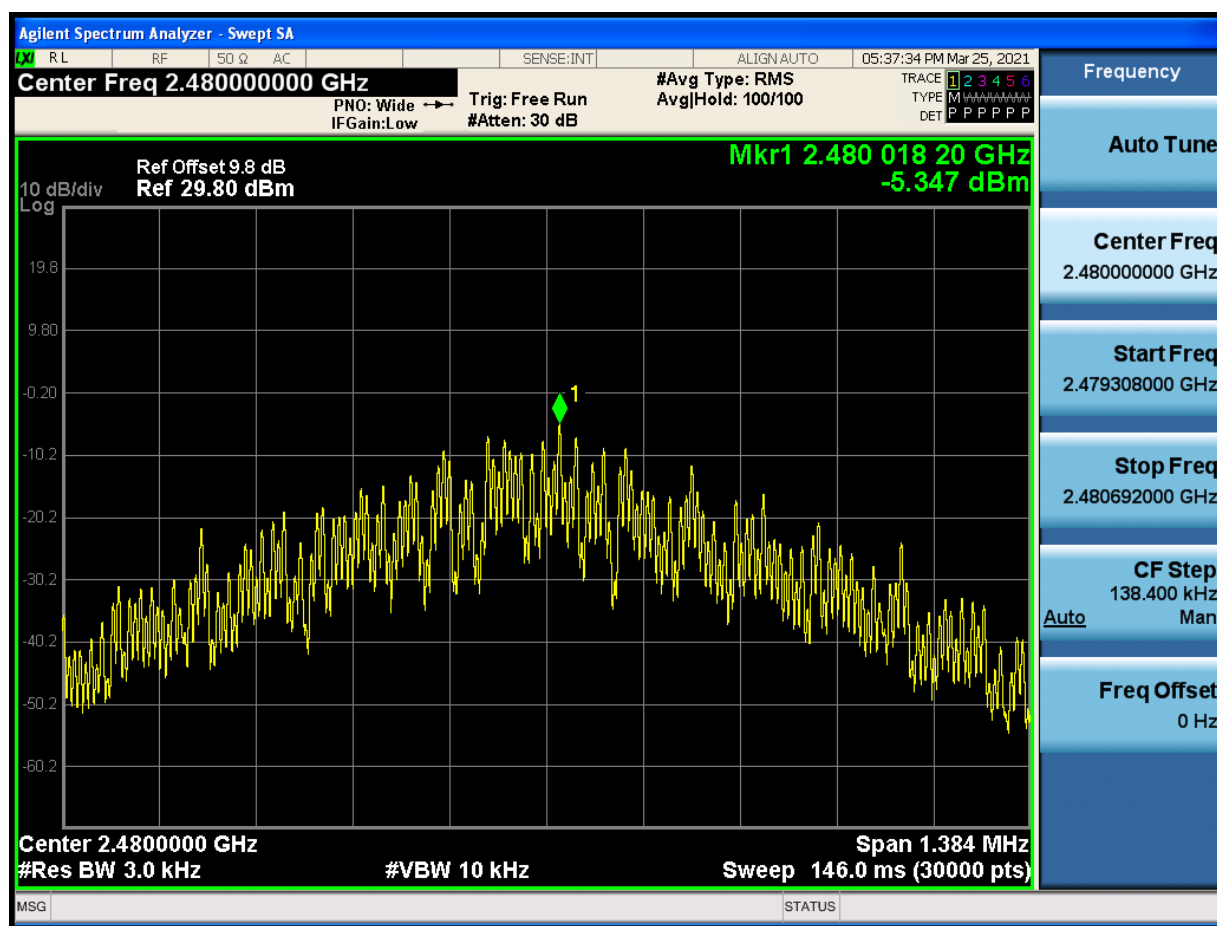




4.5 OUT OF BAND EMISSION MEASUREMENT

4.5.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 TEST SETUP

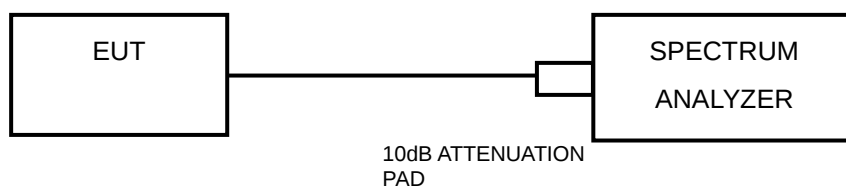

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




BUREAU
VERITAS

Test Report No.: RF2102WSZ0052-2

4.5.7 TEST RESULTS

BT-LE (GFSK)

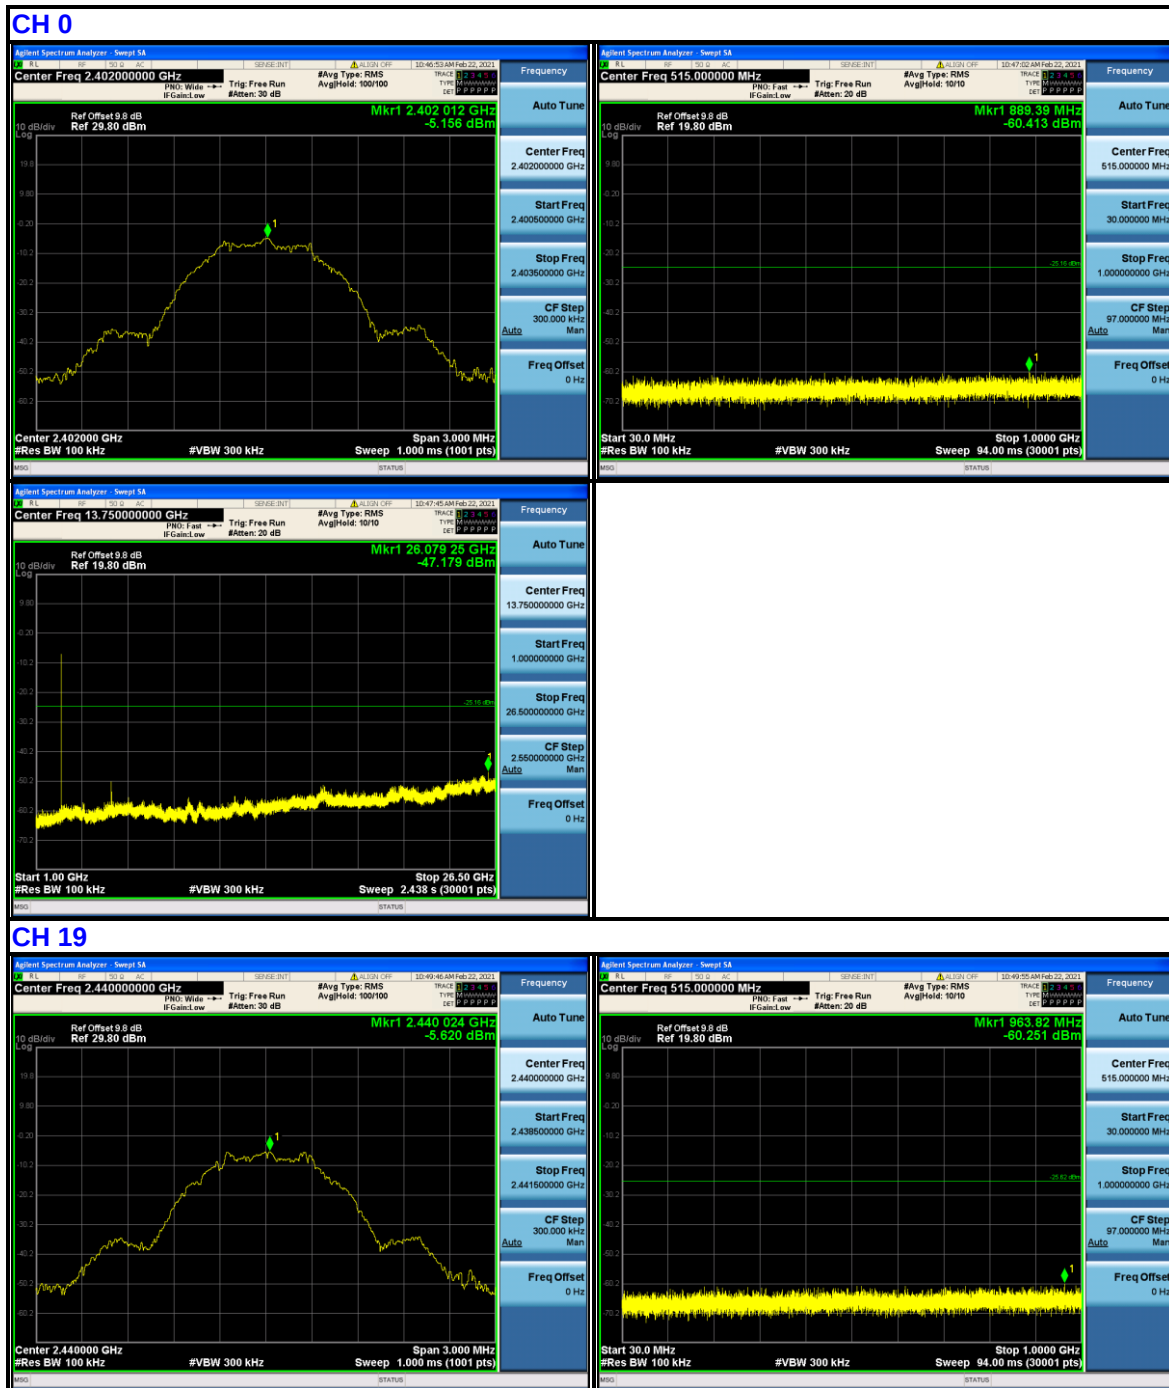

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.


Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.dq@cn.bureauveritas.com





BUREAU
VERITAS

Test Report No.: RF2102WSZ0052-2

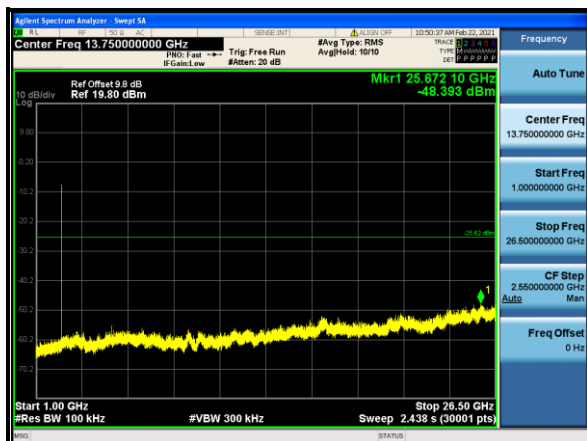

CH 39

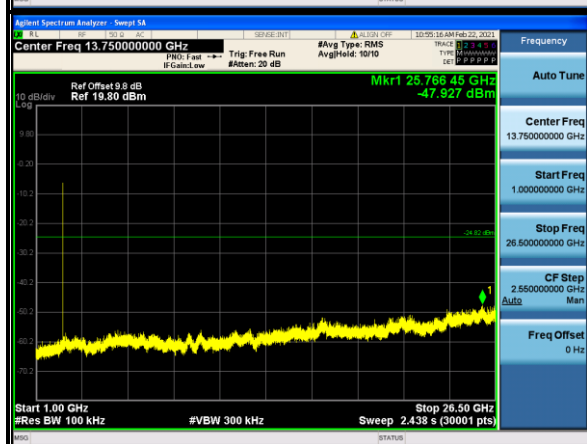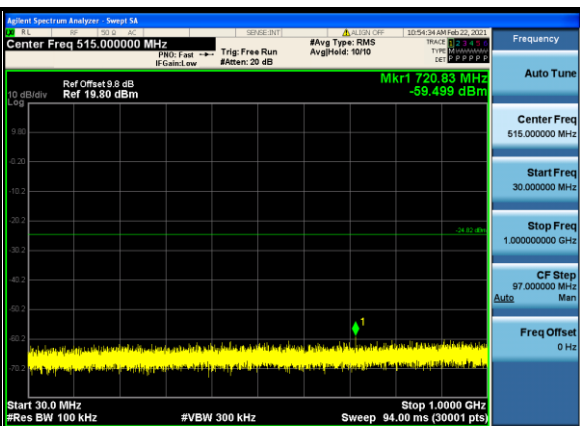

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.


Tel: +86-755-26014629 Ext.800
Email: customerservice.dq@cn.bureauveritas.com



BUREAU
VERITAS

Test Report No.: RF2102WSZ0052-2

Band Edge:

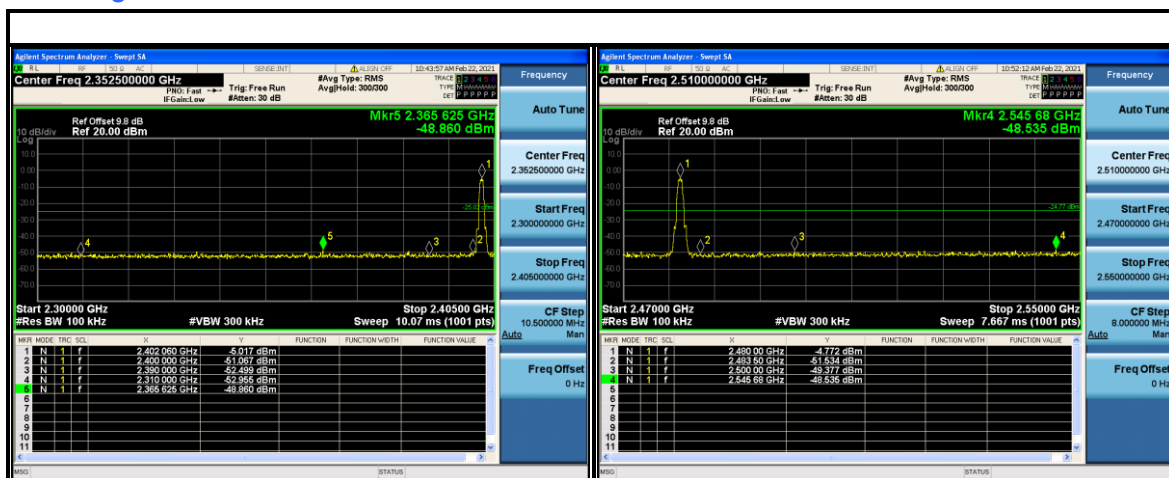

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.dq@cn.bureauveritas.com



Test Report No.: RF2102WSZ0052-2

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF2102WSZ0052-2

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---